



RADIO TEST REPORT FCC ID: 2ADQN-TM133WH

Product: HINGE 13 DRAW CONVERTIBLE LAPTOP

Trade Mark: Nuvision, Tmax

Model No.: TM133WH710C

TM133WH710CBL, TM133WH710CGN,

Serial Model: TM133WH710CBK, TM133WH710CPK,

TM133WH710CGD, A133AT, TM133WH730C

Report No.: NTEK-2017NT07104797F1

Issue Date: 29 Jul. 2017

Prepared for

Yuko Technology Co.,Ltd 6th Floor, A9 building,TianRui Industrial Park, FuYuan 1st Road, FuYong, Bao'an

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community,
Xixiang Street Bao'an District, Shenzhen 518126 P.R. China

Tel.: +86-755-6115 9388 Fax.: +86-755-6115 6599 Website:http://www.ntek.org.cn

Version.1.2 Page 1 of 53





TABLE OF CONTENTS

1	TES	ST RESULT CERTIFICATION	3
2	SU	MMARY OF TEST RESULTS	4
3	FA	CILITIES AND ACCREDITATIONS	5
	3.1	FACILITIES	
	3.2 3.3	LABORATORY ACCREDITATIONS AND LISTINGS MEASUREMENT UNCERTAINTY	
4	GE	NERAL DESCRIPTION OF EUT	
5	DE	SCRIPTION OF TEST MODES	8
6	SE	TUP OF EQUIPMENT UNDER TEST	9
	6.1	BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM	
	6.2 6.3	SUPPORT EQUIPMENTEQUIPMENTS LIST FOR ALL TEST ITEMS	10
7		ST REQUIREMENTS	
	7.1	CONDUCTED EMISSIONS TEST	13
	7.2	RADIATED SPURIOUS EMISSION	
	7.3	NUMBER OF HOPPING CHANNEL	27
	7.4	HOPPING CHANNEL SEPARATION MEASUREMENT	29
	7.5	AVERAGE TIME OF OCCUPANCY (DWELL TIME)	33
	7.6	20DB BANDWIDTH TEST	37
	7.7	PEAK OUTPUT POWER	
	7.8	CONDUCTED BAND EDGE MEASUREMENT	
	7.9	SPURIOUS RF CONDUCTED EMISSION	
	7.10	ANTENNA APPLICATION	53





1 TEST RESULT CERTIFICATION

Applicant's name	Yuko Technology Co.,Ltd
Address:	6th Floor, A9 building, TianRui Industrial Park, FuYuan 1st Road,
	FuYong, Bao'an
Manufacturer's Name:	Yuko Technology Co.,Ltd
Address:	6th Floor, A9 building, TianRui Industrial Park, FuYuan 1st Road,
	FuYong, Bao'an
Product description	
Product name:	HINGE 13 DRAW CONVERTIBLE LAPTOP
Model and/or type reference:	TM133WH710C
Serial Model:	TM133WH710CBL,TM133WH710CGN,TM133WH710CBK,
	TM133WH710CPK, TM133WH710CGD, A133AT, TM133WH730C

Measurement Procedure Used:

APPLICABLE STANDARDS		
STANDARD/ TEST PROCEDURE	TEST RESULT	
FCC 47 CFR Part 2, Subpart J:2016 FCC 47 CFR Part 15, Subpart C:2016 KDB 174176 D01 Line Conducted FAQ v01r01 ANSI C63.10-2013	Complied	

This device described above has been tested by Shenzhen NTEK Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK Testing Technology Co., Ltd., this document may be altered or revised by Shenzhen NTEK Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.

The test results of this report relate only to the tested sample identified in this report.

Date of Test	. 10 Jul. 2017 ~ 29 Jul. 2017
Testing Engineer	: Wen lin
	(Allen Liu)
Technical Manager	Jason chen
	(Jason Chen)
	San . Chen
Authorized Signatory	:
-	(Sam Chen)

Version.1.2 Page 3 of 53





2 SUMMARY OF TEST RESULTS

FCC Part15 (15.247), Subpart C				
Standard Section	Test Item	Verdict	Remark	
15.207	Conducted Emission	PASS		
15.247(c)	Radiated Spurious Emission	PASS		
15.247(a)(1)	Hopping Channel Separation	PASS		
15.247(b)(1)	Peak Output Power	PASS		
15.247(a)(iii)	Number of Hopping Frequency	PASS		
15.247(a)(iii)	Dwell Time	PASS		
15.247(a)(1)	Bandwidth	PASS		
15.205	Band Edge Emission	PASS		
15.203	Antenna Requirement	PASS		

Remark:

- 1. "N/A" denotes test is not applicable in this Test Report.
- 2. All test items were verified and recorded according to the standards and without any deviation during the test.
- This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

Version.1.2 Page 4 of 53





3 FACILITIES AND ACCREDITATIONS

3.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R. China.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

3.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

CNAS-Lab. : Accredited by CNAS, 2014.09.04

The Laboratory has been assessed and proved to be in compliance with

CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)

The Certificate Registration Number is L5516.

IC-Registration Accredited by Industry Canada, August 29, 2012

The Certificate Registration Number is 9270A-1.

FCC- Accredited Test Firm Registration Number: 463705.

Designation Number: CN1184

A2LA-Lab. The Certificate Registration Number is 4298.01

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for

the competence of testing and calibration laboratories.

This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

Name of Firm : Shenzhen NTEK Testing Technology Co., Ltd.

Site Location : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang

Street, Bao'an District, Shenzhen 518126 P.R. China.

3.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	±2.80dB
2	RF power, conducted	±0.16dB
3	Spurious emissions, conducted	±0.21dB
4	All emissions, radiated(30MHz~1GHz)	±2.64dB
5	All emissions, radiated(1GHz~6GHz)	±2.40dB
6	All emissions, radiated(>6GHz)	±2.52dB
7	Temperature	±0.5°C
8	Humidity	±2%

Version.1.2 Page 5 of 53





4 GENERAL DESCRIPTION OF EUT

Product Feature and Specification		
Equipment	HINGE 13 DRAW CONVERTIBLE LAPTOP	
Trade Mark	Nuvision, Tmax	
FCC ID	2ADQN-TM133WH	
Model No.	TM133WH710C	
Serial Model	TM133WH710CBL, TM133WH710CGN, TM133WH710CBK, TM133WH710CPK, TM133WH710CGD, A133AT, TM133WH730C	
Model Difference	All the model are the same circuit and RF module, except the colour.	
Operating Frequency	2402MHz~2480MHz	
Modulation	GFSK,π/4-DQPSK, 8-DPSK	
Bluetooth Version	BT V4.0(EDR+BR)	
Number of Channels	79 Channels	
Antenna Type	FPCB Antenna	
Antenna Gain	1 dBi	
	☑DC supply: DC 7.4V, 5000MAh	
Power supply	☐Adapter supply: Model: JHD-AP036U-120200BA-B Input: 100~240V 50/60Hz 1.2A Output: 12V, 2000mA	
HW Version	S133AR110	
SW Version	Windows 10 home	

Note: Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.

Version.1.2 Page 6 of 53





Revision History

Report No.	Version	Description	Issued Date
NTEK-2017NT07104797F1	Rev.01	Initial issue of report	Jul 29, 2017

Version.1.2 Page 7 of 53





5 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (1Mbps for GFSK modulation; 2Mbps for $\pi/4$ -DQPSK modulation; 3Mbps for 8-DPSK modulation) were used for all test.

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

Carrier Frequency and Channel list:

Channel	Frequency(MHz)
0	2402
1	2403
	•••
39	2441
40	2442
77	2479
78	2480

Note: fc=2402MHz+k×1MHz k=0 to 78

The following summary table is showing all test modes to demonstrate in compliance with the standard.

For AC Conducted Emission	
Final Test Mode Description	
Mode 1	normal link mode

Note: AC power line Conducted Emission was tested under maximum output power.

For Radiated Test Cases	
Final Test Mode	Description
Mode 1	normal link mode
Mode 2	CH00(2402MHz)
Mode 3	CH39(2441MHz)
Mode 4	CH78(2480MHz)

Note: For radiated test cases, the worst mode data rate 1Mbps was reported only, because this data rate has the highest RF output power at preliminary tests, and no other significantly frequencies found in conducted spurious emission.

For Conducted Test Cases		
Final Test Mode	Description	
Mode 2	CH00(2402MHz)	
Mode 3	CH39(2441MHz)	
Mode 4	CH78(2480MHz)	
Mode 5	Hopping mode	

Note: The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.

1. AC power line Conducted Emission was tested under maximum output power.

Version.1.2 Page 8 of 53








6 SETUP OF EQUIPMENT UNDER TEST

6.1 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

For AC Conducted Emission Mode

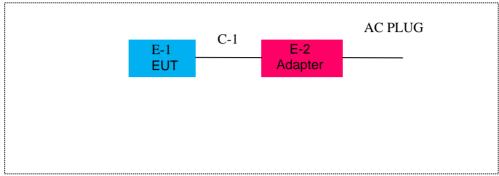

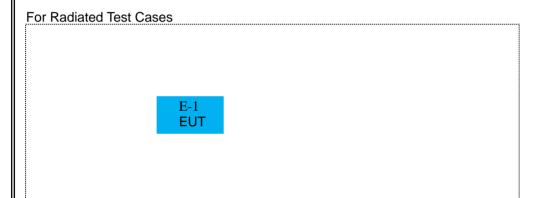

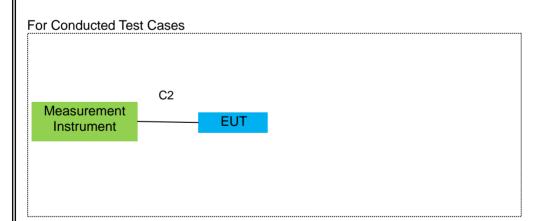

Note:The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

Version.1.2 Page 9 of 53





6.2 SUPPORT EQUIPMENT

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

100101					
Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Note
E-1	HINGE 13 DRAW CONVERTIBLE LAPTOP	Nuvision, Tmax	TM133WH710C	2ADQN-TM133WH	EUT
E-2	Adapter	N/A	JHD-AP036U-120200 BA-B	N/A	Peripherals

Item	Cable Type	Shielded Type	Ferrite Core	Length
C-1	Power Cable	NO	NO	1.2m
C-2	RF Cable	NO	NO	0.5m

Notes:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in <code>[Length]</code> column.
- (3) "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".

Version.1.2 Page 10 of 53





6.3 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Radiation lest equipment								
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibrati on period	
1	Spectrum Analyzer	Aglient	E4407B	MY45108040	2017.06.06	2018.06.05	1 year	
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2016.11.10	2017.11.09	1 year	
3	EMI Test Receiver	Agilent	N9038A	MY53227146	2017.06.06	2018.06.05	1 year	
4	Test Receiver	R&S	ESPI	101318	2017.06.06	2018.06.05	1 year	
5	Bilog Antenna	TESEQ	CBL6111D	31216	2017.04.09	2018.04.08	1 year	
6	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2017.06.06	2018.06.05	1 year	
7	Horn Antenna	EM	EM-AH-1018 0	2011071402	2017.04.09	2018.04.08	1 year	
8	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2017.07.06	2018.07.05	1 year	
9	Amplifier	EMC	EMC051835 SE	980246	2016.08.09	2017.08.08	1 year	
10	Amplifier	MITEQ	TTA1840-35- HG	177156	2017.06.06	2018.06.05	1 year	
11	Loop Antenna	ARA	PLA-1030/B	1029	2017.06.06	2018.06.05	1 year	
12	Power Meter	DARE	RPR3006W	15I00041SN O84	2016.08.09	2017.08.08	1 year	
13	Test Cable (9KHz-30MHz)	N/A	R-01	N/A	2017.04.21	2020.04.20	3 year	
14	Test Cable (30MHz-1GHz)	N/A	R-02	N/A	2017.04.21	2020.04.20	3 year	
15	High Test Cable(1G-40G Hz)	N/A	R-03	N/A	2017.04.21	2020.04.20	3 year	
16	High Test Cable(1G-40G Hz)	N/A	R-04	N/A	2017.04.21	2020.04.20	3 year	
17	temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A	

Note:

We will use the temporary antenna connector (soldered on the PCB board) When conducted test And this temporary antenna connector is listed within the instrument list

Version.1.2 Page 11 of 53





Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2017.06.06	2018.06.05	1 year
2	LISN	R&S	ENV216	101313	2017.04.19	2018.04.18	1 year
3	LISN	SCHWARZBE CK	NNLK 8129	8129245	2017.06.06	2018.06.05	1 year
4	50Ω Coaxial Switch	ANRITSU CORP	MP59B	6200983704	2017.06.06	2018.06.05	1 year
5	Test Cable (9KHz-30MH z)	N/A	C01	N/A	2017.04.21	2020.04.20	3 year
6	Test Cable (9KHz-30MH z)	N/A	C02	N/A	2017.04.21	2020.04.20	3 year
7	Test Cable (9KHz-30MH z)	N/A	C03	N/A	2017.04.21	2020.04.20	3 year

1	Filter	TRILTHIC	2400MHz	29	2017.04.19	2018.04.18	1 year
---	--------	----------	---------	----	------------	------------	--------

Note: Each piece of equipment is scheduled for calibration once a year.

Version.1.2 Page 12 of 53





7 TEST REQUIREMENTS

7.1 CONDUCTED EMISSIONS TEST

7.1.1 Applicable Standard

According to FCC Part 15.207(a) and KDB 174176 D01 Line Conducted FAQ v01r01


7.1.2 Conformance Limit

Fraguescy/MHz)	Conducted Emission Limit			
Frequency(MHz)	Quasi-peak	Average		
0.15-0.5	66-56*	56-46*		
0.5-5.0	56	46		
5.0-30.0	60	50		

Note: 1. *Decreases with the logarithm of the frequency

- 2. The lower limit shall apply at the transition frequencies
- 3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

7.1.3 Test Configuration

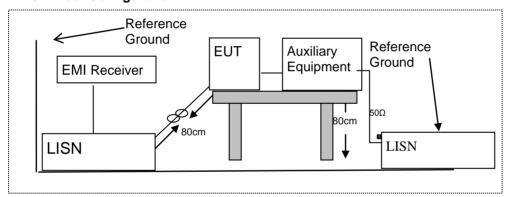

7.1.4 Test Procedure

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

- 1. The EUT was placed 0.4 meter from the conducting wall of the shielding room.
- 2. The EUT was placed on a table which is 0.8m above ground plane.
- 3. Connect EUT to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- 4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40cm long.
- 5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- 6. LISN at least 80 cm from nearest part of EUT chassis.
- 7. The frequency range from 150KHz to 30MHz was searched.
- 8. Set the test-receiver system to Peak Detect Function and specified bandwidth(IF bandwidth=9KHz) with Maximum Hold Mode
- 9. For the actual test configuration, please refer to the related Item –EUT Test Photos.

7.1.5 Test Results

Pass

Version.1.2 Page 13 of 53






7.1.6 Test Results

HIII.	HINGE 13 DRAW CONVERTIBLE LAPTOP	Model Name:	TM133WH710C
Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
Test Voltage:	DC 12V from Adapter AC 120V/60Hz	Test Mode:	Mode 1

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Domork
(MHz)	(dBµV)	(dB)	(dBµV)	(dBµV)	(dB)	Remark
0.1500	50.01	9.70	59.71	65.99	-6.28	QP
0.1500	35.13	9.70	44.83	55.99	-11.16	AVG
0.1660	45.78	9.70	55.48	65.15	-9.67	QP
0.1660	32.55	9.70	42.25	55.15	-12.90	AVG
0.2099	41.69	9.70	51.39	63.21	-11.82	QP
0.2099	33.32	9.70	43.02	53.21	-10.19	AVG
0.2779	38.94	9.70	48.64	60.88	-12.24	QP
0.2779	25.66	9.70	35.36	50.88	-15.52	AVG
0.7780	33.59	9.74	43.33	56.00	-12.67	QP
0.7780	25.70	9.74	35.44	46.00	-10.56	AVG
1.4460	32.47	9.78	42.25	56.00	-13.75	QP
1.4460	21.71	9.78	31.49	46.00	-14.51	AVG

Remark

- 1. All readings are Quasi-Peak and Average values.
- 2. Factor = Insertion Loss + Cable Loss.

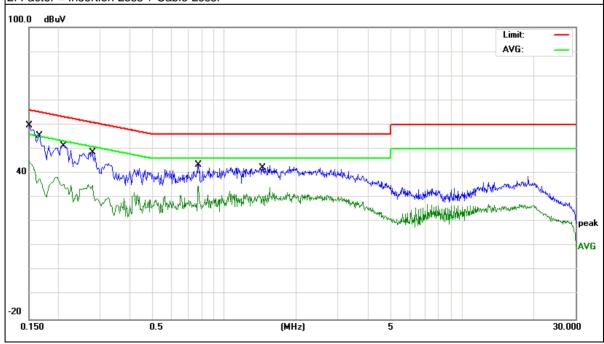

Version.1.2 Page 14 of 53






I - []].	HINGE 13 DRAW CONVERTIBLE LAPTOP	Model Name:	TM133WH710C
Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
Test Voltage:	DC 12V from Adapter AC 120V/60Hz	Test Mode:	Mode 1

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Domork
(MHz)	(dBµV)	(dB)	(dBµV)	(dBµV)	(dB)	Remark
0.1539	47.50	9.80	57.30	65.78	-8.48	QP
0.1539	33.81	9.80	43.61	55.78	-12.17	AVG
0.1900	42.80	9.80	52.60	64.03	-11.43	QP
0.1900	31.52	9.80	41.32	54.03	-12.71	AVG
0.2139	43.40	9.80	53.20	63.05	-9.85	QP
0.2139	32.22	9.80	42.02	53.05	-11.03	AVG
0.2340	39.56	9.80	49.36	62.30	-12.94	QP
0.2340	28.46	9.80	38.26	52.30	-14.04	AVG
0.7780	34.43	9.81	44.24	56.00	-11.76	QP
0.7780	24.44	9.81	34.25	46.00	-11.75	AVG
1.6340	33.65	9.83	43.48	56.00	-12.52	QP
1.6340	24.66	9.83	34.49	46.00	-11.51	AVG

- 1. All readings are Quasi-Peak and Average values.
- 2. Factor = Insertion Loss + Cable Loss.

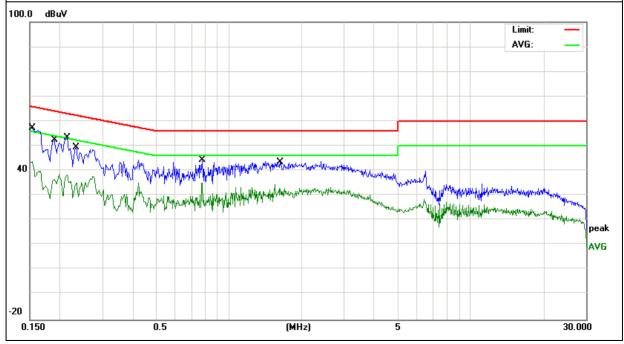

Version.1.2 Page 15 of 53






I - III.	HINGE 13 DRAW CONVERTIBLE LAPTOP	Model Name:	TM133WH710C
Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
Test Voltage:	DC 12V from Adapter AC 240V/60Hz	Test Mode:	Mode 1

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Domork
(MHz)	(dBµV)	(dB)	(dBµV)	(dBµV)	(dB)	Remark
0.1500	52.53	9.70	62.23	65.99	-3.76	QP
0.1500	38.43	9.70	48.13	55.99	-7.86	AVG
0.1779	47.66	9.70	57.36	64.58	-7.22	QP
0.1779	34.98	9.70	44.68	54.58	-9.90	AVG
0.6140	37.71	9.71	47.42	56.00	-8.58	QP
0.6140	32.88	9.71	42.59	46.00	-3.41	AVG
0.8980	37.49	9.79	47.28	56.00	-8.72	QP
0.8980	25.33	9.79	35.12	46.00	-10.88	AVG
1.2980	37.98	9.79	47.77	56.00	-8.23	QP
1.2980	26.53	9.79	36.32	46.00	-9.68	AVG
1.5540	38.39	9.77	48.16	56.00	-7.84	QP
1.5540	28.81	9.77	38.58	46.00	-7.42	AVG

- All readings are Quasi-Peak and Average values.
 Factor = Insertion Loss + Cable Loss.

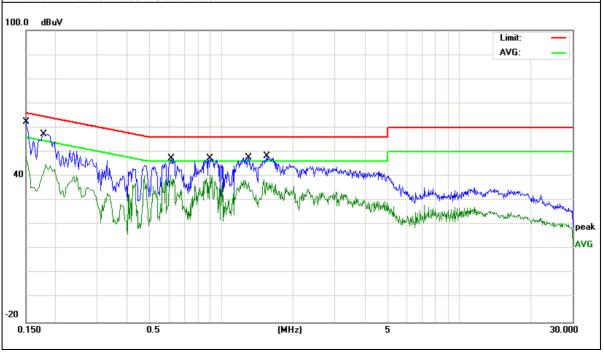

Version.1.2 Page 16 of 53






I - I I I •	HINGE 13 DRAW CONVERTIBLE LAPTOP	Model Name:	TM133WH710C
Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
Test Voltage:	DC 12V from Adapter AC 240V/60Hz	Test Mode:	Mode 1

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBµV)	(dB)	(dBµV)	(dBµV)	(dB)	Remark
0.1500	52.39	9.80	62.19	65.99	-3.80	QP
0.1500	36.51	9.80	46.31	55.99	-9.68	AVG
0.1620	47.34	9.80	57.14	65.36	-8.22	QP
0.1620	37.31	9.80	47.11	55.36	-8.25	AVG
0.1859	48.76	9.80	58.56	64.21	-5.65	QP
0.1859	36.89	9.80	46.69	54.21	-7.52	AVG
0.2300	42.41	9.80	52.21	62.45	-10.24	QP
0.2300	33.45	9.80	43.25	52.45	-9.20	AVG
0.4740	38.93	9.81	48.74	56.44	-7.70	QP
0.4740	33.35	9.81	43.16	46.44	-3.28	AVG
1.5540	39.02	9.83	48.85	56.00	-7.15	QP
1.5540	31.37	9.83	41.20	46.00	-4.80	AVG

- 1. All readings are Quasi-Peak and Average values.
- 2. Factor = Insertion Loss + Cable Loss.

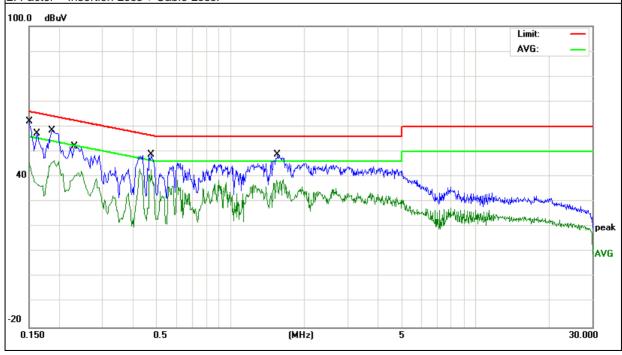

Version.1.2 Page 17 of 53





7.2 RADIATED SPURIOUS EMISSION

7.2.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and ANSI C63.10-2013

7.2.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)). According to FCC Part 15.205. Restricted bands

According to FCC Fatt 15.205, Restricted barros							
MHz	MHz	MHz	GHz				
0.090-0.110	.090-0.110 16.42-16.423		4.5-5.15				
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46				
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75				
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5				
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2				
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5				
6.215-6.218	6.215-6.218 74.8-75.2		10.6-12.7				
6.26775-6.26825	123-138	2200-2300	14.47-14.5				
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2				
8.362-8.366	8.362-8.366 156.52475-156.52525		17.7-21.4				
8.37625-8.38675 156.7-156.9		2690-2900	22.01-23.12				
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0				
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8				
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5				
12.57675-12.57725	322-335.4	3600-4400	(2)				
13.36-13.41							

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Restricted Frequency(MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)	Measurement Distance
0.009~0.490	2400/F(KHz)	20 log (uV/m)	300
0.490~1.705	2400/F(KHz)	20 log (uV/m)	30
1.705~30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dBuV	/m) (at 3M)
	PEAK	AVERAGE
Above 1000	74	54

Remark :1. Emission level in dBuV/m=20 log (uV/m)

- 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
- 3. Distance extrapolation factor =40log(Specific distance/ test distance)(dB); Limit line=Specific limits(dBuV) + distance extrapolation factor.

Version.1.2 Page 18 of 53






7.2.3 Measuring Instruments


The Measuring equipment is listed in the section 6.3 of this test report.

7.2.4 Test Configuration


(a) For radiated emissions below 30MHz

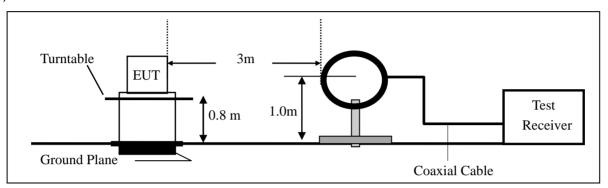

(b) For radiated emissions from 30MHz to 1000MHz

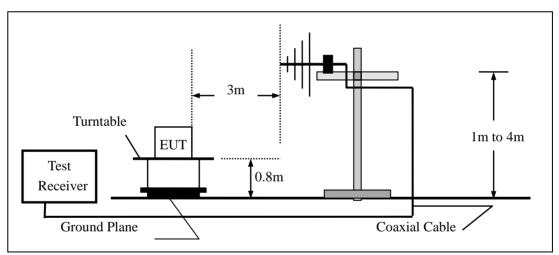

(c) For radiated emissions above 1000MHz

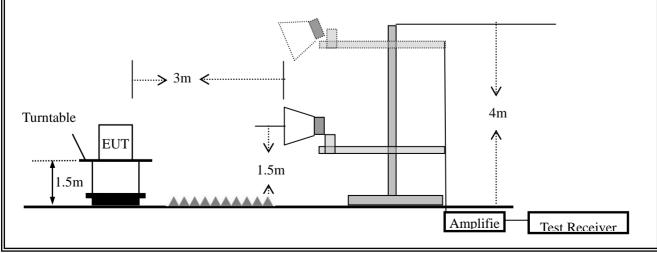

Version.1.2 Page 19 of 53





7.2.5 Test Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Osc the following spectrum analyzer settings	J.
Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation
- c. The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For the radiated emission test above 1GHz:
 - Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- e. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- f. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- g. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

Version.1.2 Page 20 of 53





During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Function Resolution bandwidth	
30 to 1000	QP	120 kHz	300 kHz
Above 4000	Peak	1 MHz	1 MHz
Above 1000	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where RBWCF [dB] =10*lg(100 [kHz]/narrower RBW [kHz]). , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

7.2.6 Test Results

■ Spurious Emission below 30MHz (9KHz to 30MHz)

EUT:	HINGE 13 DRAW CONVERTIBLE LAPTOP	Model No.:	TM133WH710C
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Allen Liu

Freq.	Ant.Pol.	Emission Level(dBuV/m)		Limit 3	m(dBuV/m)	Ove	r(dB)
(MHz)	H/V	PK	AV	PK	AV	PK	AV

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor =20log(Specific distance/ test distance)(dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor

Version.1.2 Page 21 of 53






Spurious Emission below 1GHz (30MHz to 1GHz)
All the modulation modes have been tested, and the worst result was report as below:

	HINGE 13 DRAW CONVERTIBLE LAPTOP	Model Name :	TM133WH710C
Temperature:	20 ℃	Relative Humidity:	48%
Pressure:	1010hPa	Test Mode:	Mode 1
Test Voltage:	DC 7.4V		

Polar	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(H/V)	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	36.6375	11.13	18.15	29.28	40.00	-10.72	QP
V	50.4089	18.89	13.33	32.22	40.00	-7.78	QP
V	218.3085	22.64	12.58	35.22	46.00	-10.78	QP
V	312.1794	16.70	13.29	29.99	46.00	-16.01	QP
V	470.5231	13.80	16.63	30.43	46.00	-15.57	QP
V	595.1327	13.97	18.84	32.81	46.00	-13.19	QP

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

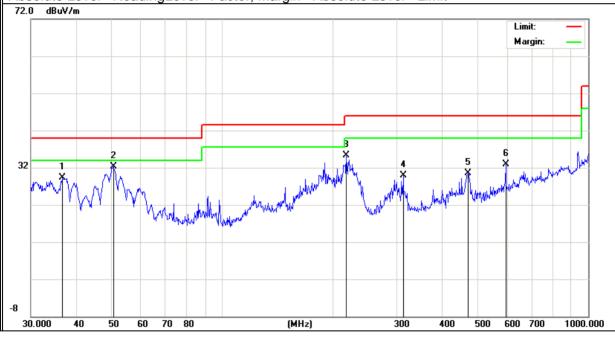


Version.1.2 Page 22 of 53





Polar	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(H/V)	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Н	58.4074	13.79	11.63	25.42	40.00	-14.58	QP
Н	148.4410	18.94	11.30	30.24	43.50	-13.26	QP
Н	211.5265	20.94	13.28	34.22	43.50	-9.28	QP
Н	297.2241	15.23	14.66	29.89	46.00	-16.11	QP
Н	595.1327	13.69	18.84	32.53	46.00	-13.47	QP
Н	742.2586	12.19	22.37	34.56	46.00	-11.44	QP

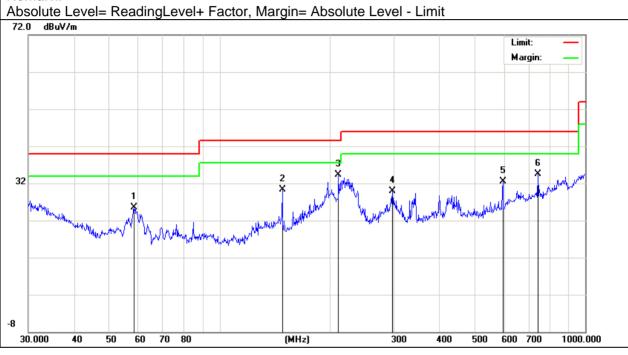

Version.1.2 Page 23 of 53





■ Spurious Emission Above 1GHz (1GHz to 25GHz)

	HINGE 13 DRAW CONVERTIBLE LAPTOP	Model No.:	TM133WH710C
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Allen Liu

All the modulation modes have been tested, and the worst result was report as below:

Frequenc y		Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark	Comment	
(MHz)	(dBµV)	(dB)	dB/m	(dB)	(dBµV/m)	(dBµV/m)	(dB)			
	Low Channel (2402 MHz)(GFSK)Above 1G									
4804.166	67.76	5.21	35.59	44.30	64.26	74.00	-9.74	Pk	Vertical	
4804.166	46.82	5.21	35.59	44.30	43.32	54.00	-10.68	AV	Vertical	
7206.447	64.94	6.48	36.27	44.60	63.09	74.00	-10.91	Pk	Vertical	
7206.447	48.19	6.48	36.27	44.60	46.34	54.00	-7.66	AV	Vertical	
4804.109	65.72	5.21	35.55	44.30	62.18	74.00	-11.82	Pk	Horizontal	
4804.109	49.33	5.21	35.55	44.30	45.79	54.00	-8.21	AV	Horizontal	
7206.223	67.86	6.48	36.27	44.52	66.09	74.00	-7.91	Pk	Horizontal	
7206.223	44.61	6.48	36.27	44.52	42.84	54.00	-11.16	AV	Horizontal	
			Mid Cha	nnel (2441	MHz)(GFS	K)Above	1G		-	
4882.138	64.32	5.21	35.66	44.20	60.99	74.00	-13.01	Pk	Vertical	
4882.138	42.05	5.21	35.66	44.20	38.72	54.00	-15.28	AV	Vertical	
7323.081	63.32	7.10	36.50	44.43	62.49	74.00	-11.51	Pk	Vertical	
7323.081	41.32	7.10	36.50	44.43	40.49	54.00	-13.51	AV	Vertical	
4882.364	63.32	5.21	35.66	44.20	59.99	74.00	-14.01	Pk	Horizontal	
4882.364	44.58	5.21	35.66	44.20	41.25	54.00	-12.75	AV	Horizontal	
7323.417	63.28	7.10	36.50	44.43	62.45	74.00	-11.55	Pk	Horizontal	
7323.417	44.07	7.10	36.50	44.43	43.24	54.00	-10.76	AV	Horizontal	
			High Cha	annel (2480	MHz)(GFS	K) Above	1G			
4960.528	59.94	5.21	35.52	44.21	56.46	74.00	-17.54	Pk	Vertical	
4960.528	44.32	5.21	35.52	44.21	40.84	54.00	-13.16	AV	Vertical	
7440.111	62.27	7.10	36.53	44.60	61.30	74.00	-12.70	Pk	Vertical	
7440.111	45.75	7.10	36.53	44.60	44.78	54.00	-9.22	AV	Vertical	
4960.235	63.28	5.21	35.52	44.21	59.80	74.00	-14.20	Pk	Horizontal	
4960.235	44.36	5.21	35.52	44.21	40.88	54.00	-13.12	AV	Horizontal	
7440.192	62.21	7.10	36.53	44.60	61.24	74.00	-12.76	Pk	Horizontal	
7440.192	43.14	7.10	36.53	44.60	42.17	54.00	-11.83	AV	Horizontal	

Note: (1) All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz). (2) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor

(3)All other emissions more than 20dB below the limit.

Version.1.2 Page 24 of 53

ΑV

Horizontal

-26.74





■ Spurious Emission in Band edge

EUT: HINGE 13 DRAW CONVERTIBLE LAPTOP Model No.: TM133WH710C

Temperature: 20 °C Relative Humidity: 48%

Test Mode: Mode2/ Mode4 Test By: Allen Liu

Allen Liu Test Mode: Mode2/ Mode4 Test By: All the modulation modes have been tested, and the worst result was report as below: Frequenc Meter Cable Antenna Preamp **Emission** Limits Margin Detector Reading Loss Factor Comment Factor Level (MHz) (dBµV/m) (dBµV) (dB) dB/m (dB) (dB_uV/m) (dB) Type 1Mbps (GFSK)-hopping 2310.00 59.35 2.97 27.80 43.80 46.32 74 -27.68 Pk Horizontal 2310.00 39.26 2.97 27.80 43.80 26.23 54 -27.77 ΑV Horizontal 2310.00 59.21 2.97 27.80 43.80 46.18 74 -27.82Pk Vertical 54 ΑV Vertical 2310.00 40.56 2.97 27.80 43.80 27.53 -26.47 27.21 44.98 74 Pk Vertical 2390.00 58.43 3.14 43.80 -29.02 2390.00 39.30 3.14 27.21 43.80 25.85 54 -28.15ΑV Vertical 2390.00 58.21 3.14 27.21 43.80 44.76 74 -29.24Pk Horizontal 25.32 54 2390.00 38.77 3.14 27.21 43.80 -28.68 ΑV Horizontal 2483.50 60.36 3.58 27.70 44.00 47.64 74 -26.36 Pk Vertical 3.58 27.70 44.00 26.59 54 -27.41 ΑV Vertical 2483.50 39.31 Horizontal 2483.50 59.57 3.58 27.70 44.00 46.85 74 -27.15 Pk 2483.50 40.98 3.58 27.70 44.00 28.26 54 -25.74 ΑV Horizontal 1Mbps(GFSK)-Non-hopping 2.97 Pk Horizontal 2310.00 59.33 27.80 43.80 46.30 74 -27.7 54 2310.00 38.26 2.97 27.80 43.80 25.23 -28.77ΑV Horizontal Pk 2.97 74 -28.82 Vertical 2310.00 58.21 27.80 43.80 45.18 2310.00 2.97 27.80 54 -27.47 ΑV Vertical 39.56 43.80 26.53 Pk 2390.00 58.41 3.14 27.21 43.80 44.96 74 -29.04 Vertical 3.14 27.21 43.80 25.83 54 ΑV Vertical 2390.00 39.28 -28.17 74 Pk 2390.00 57.21 3.14 27.21 43.80 43.76 -30.24 Horizontal ΑV Horizontal 2390.00 3.14 43.80 25.30 54 -28.738.75 27.21 2483.50 59.36 3.58 27.70 44.00 46.64 74 -27.36 Pk Vertical 2483.50 38.31 3.58 27.70 44.00 25.59 54 -28.41 ΑV Vertical Pk 2483.50 59.55 3.58 27.70 44.00 46.83 74 -27.17 Horizontal

Note: (1) All other emissions more than 20dB below the limit.

27.70

44.00

27.26

54

3.58

39.98

2483.50

Version.1.2 Page 25 of 53





■ Spurious Emission in Restricted Band 3260MMHz-18000MHz

EUT:	HINGE 13 DRAW CONVERTIBLE LAPTOP	Model No.:	TM133WH710C
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode2/ Mode4	Test By:	Allen Liu

All the modulation modes have been tested, and the worst result was report as below:

Frequenc	Readin	Cable	Antenn	Preamp	Emission	Limits	Margin	Detect	
у	g Level	Loss	а	Factor	Level	LIIIIIIS	Margin	or	Comment
(MHz)	(dBµV)	(dB)	dB/m	(dB)	(dBµ V/m)	(dBµ V/m)	(dB)	Туре	Comment
3260	59.65	4.04	29.57	44.70	48.56	74	-25.44	Pk	Vertical
3260	56.66	4.04	29.57	44.70	45.57	54	-8.43	AV	Vertical
3260	59.34	4.04	29.57	44.70	48.25	74	-25.75	Pk	Horizontal
3260	57.88	4.04	29.57	44.70	46.79	54	-7.21	AV	Horizontal
3332	63.81	4.26	29.87	44.40	53.54	74	-20.46	Pk	Vertical
3332	50.46	4.26	29.87	44.40	40.19	54	-13.81	AV	Vertical
3332	60.54	4.26	29.87	44.40	50.27	74	-23.73	Pk	Horizontal
3332	54.86	4.26	29.87	44.40	44.59	54	-9.41	AV	Horizontal
17797	39.27	10.99	43.95	43.50	50.71	74	-23.29	Pk	Vertical
17797	28.38	10.99	43.95	43.50	39.82	54	-14.18	AV	Vertical
17788	40.69	11.81	43.69	44.60	51.59	74	-22.41	Pk	Horizontal
17788	30.41	11.81	43.69	44.60	41.31	54	-12.69	AV	Horizontal

Note: (1) All other emissions more than 20dB below the limit.

Version.1.2 Page 26 of 53





7.3 NUMBER OF HOPPING CHANNEL

7.3.1 Applicable Standard

According to FCC Part 15.247(a)(1) (iii)and ANSI C63.10-2013

7.3.2 Conformance Limit

Frequency hopping systems in the 2400-2483.5MHz band shall use at least 15 channels.

7.3.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.3.4 Test Setup

Please refer to Section 6.1 of this test report.

7.3.5 Test Procedure

The testing follows ANSI C63.10-2013 clause 7.8.3

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT must have its hopping function enabled.

Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel

spacing or the 20 dB bandwidth, whichever is smaller.

 $VBW \geq RBW$

Sweep = auto

Detector function = peak

Trace = max hold

7.3.6 Test Results


EUT:	HINGE 13 DRAW CONVERTIBLE LAPTOP	Model No.:	TM133WH710C
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode 5(1Mbps)	Test By:	Allen Liu

Number of Hopping (Channel)	Adaptive Frequency hopping (Channel)	limit	Verdict	
79	20	≥15	Pass	

Version.1.2 Page 27 of 53





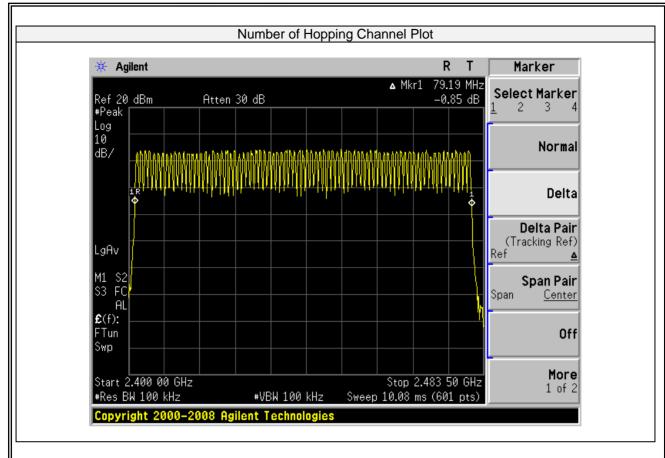

Version.1.2 Page 28 of 53





7.4 HOPPING CHANNEL SEPARATION MEASUREMENT

7.4.1 Applicable Standard

According to FCC Part 15.247(a)(1) and ANSI C63.10-2013

7.4.2 Conformance Limit

Frequency hopping systems operating in the 2400-2483.5MHz band shall have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

7.4.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.4.4 Test Setup

Please refer to Section 6.1 of this test report.

7.4.5 Test Procedure

The testing follows ANSI C63.10-2013 clause 7.8.2

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Span = Measurement Bandwidth or Channel Separation

RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary

to best identify the center of each individual channel.

 $\mathsf{VBW} \geq \mathsf{RBW}$

Sweep = auto

Detector function = peak

Trace = max hold

Version.1.2 Page 29 of 53





7.4.6 Test Results

EUT:	HINGE 13 DRAW CONVERTIBLE LAPTOP	Model No.:	TM133WH710C
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Allen Liu

Modulation	Channel	Channel	Measured		Limit	
Mode	Number	Frequency	Channel		(kHz)	Verdict
		(MHz)	Separation		,	verdict
			(kHz)			
	0	2402	1000	>679.333	2/3 of 20dB BW	PASS
GFSK	39	2441	1000	>685.333	2/3 of 20dB BW	PASS
	78	2480	1000	>684.000	2/3 of 20dB BW	PASS
	0	2402	1000	>954.667	2/3 of 20dB BW	PASS
π/4-DQPSK	39	2441	1000	>950.000	2/3 of 20dB BW	PASS
	78	2480	1000	>953.333	2/3 of 20dB BW	PASS
	0	2402	1000	>962.000	2/3 of 20dB BW	PASS
8-DPSK	39	2441	1000	>961.333	2/3 of 20dB BW	PASS
	78	2480	1000	>962.667	2/3 of 20dB BW	PASS


Version.1.2 Page 30 of 53






Test Plot


(1Mbps) Channel Separation plot on channel 00-01




(2Mbps) Channel Separation plot on channel 00-01




(1Mbps) Channel Separation plot on channel 39-40




(2Mbps) Channel Separation plot on channel 39-40



(1Mbps) Channel Separation plot on channel 77-78



(2Mbps) Channel Separation plot on channel 77-78




Version.1.2 Page 31 of 53






Test Plot

(3Mbps) Channel Separation plot on channel 00-01



(3Mbps) Channel Separation plot on channel 39-40



(3Mbps) Channel Separation plot on channel 77-78



Version.1.2 Page 32 of 53





7.5 AVERAGE TIME OF OCCUPANCY (DWELL TIME)

7.5.1 Applicable Standard

According to FCC Part 15.247(a)(1)(iii) and ANSI C63.10-2013

7.5.2 Conformance Limit

The average time of occupancy on any channel shall not be greater than 0.4s within a period of 0.4s multiplied by the number of hopping channels employed.

7.5.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.5.4 Test Setup

Please refer to Section 6.1 of this test report.

7.5.5 Test Procedure

The testing follows ANSI C63.10-2013 clause 7.8.4

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT must have its hopping function enabled.

Use the following spectrum analyzer settings:

Span = zero span, centered on a hopping channel

 $RBW \geq 1MHz$

 $VBW \geq RBW$

Sweep = as necessary to capture the entire dwell time per hopping channel

Detector function = peak

Trace = max hold

Measure the maximum time duration of one single pulse.

Set the EUT for DH5, DH3 and DH1 packet transmitting.

Measure the maximum time duration of one single pulse.

Version.1.2 Page 33 of 53





7.5.6 Test Results

EUT:	HINGE 13 DRAW CONVERTIBLE LAPTOP	Model No.:	TM133WH710C
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Allen Liu

Modulatio n Mode	Channel Number	Packet type	Mode	Hops Over Occupanc (ms)	Pulse width (ms)	dwell time (ms)	Limit (ms)	Verdict
	39	5114	Normal	320	0.415	132.80	<400	PASS
	39	DH1	AFH	160	0.415	66.40	<400	PASS
GFSK	39	DH3	Normal	160	1.658	265.28	<400	PASS
GFSK	39	טחט	AFH	80	1.658	132.64	<400	PASS
	39	DH5	Normal	106.67	2.947	314.36	<400	PASS
	39	טחט	AFH	53.33	2.947	157.16	<400	PASS
	39	2DH1	Normal	320	0.42	134.40	<400	PASS
	39		AFH	160	0.42	67.20	<400	PASS
π/4-	39	2DH3	Normal	160	1.683	269.28	<400	PASS
DQPSK	39	20113	AFH	80	1.683	134.64	<400	PASS
	39	2DH5	Normal	106.67	3.027	322.89	<400	PASS
	39	20113	AFH	53.33	3.027	161.43	<400	PASS
	39	3DH1	Normal	320	0.415	132.80	<400	PASS
	39	וווטנ	AFH	160	0.415	66.40	<400	PASS
8DPSK	39	3DH3	Normal	160	1.667	266.72	<400	PASS
ODPSK	39	טחט	AFH	80	1.667	133.36	<400	PASS
	39	3DH5	Normal	106.67	3.04	324.28	<400	PASS
Note	39	טווט	AFH	53.33	3.04	162.12	<400	PASS

Note:

A Period Time = (channel number)*0.4

DH1 Time Slot: Reading * (1600/2)*31.6/(channel number)

DH3 Time Slot: Reading * (1600/4)*31.6/(channel number)

DH5 Time Slot: Reading * (1600/6)*31.6/(channel number)

For Example:

- 1. In normal mode, hopping rate is 1600 hops/s with 6 slots in 79 hopping channels. With channel hopping rate (1600 / 6 / 79) in Occupancy Time Limit (0.4×79) (s), Hops Over Occupancy Time comes to $(1600 / 6 / 79) \times (0.4 \times 79) = 106.67$ hops.
- 2. In AFH mode, hopping rate is 800 hops/s with 6 slots in 20 hopping channels. With channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4×20) (s), Hops Over Occupancy Time comes to $(800 / 6 / 20) \times (0.4 \times 20) = 53.33$ hops.
- 3. Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time


Version.1.2 Page 34 of 53






Test Plot


Package Transfer Time Plot CH39-DH1




Package Transfer Time Plot CH39-2DH1




Package Transfer Time Plot CH39-DH3




Package Transfer Time Plot CH39-2DH3



Package Transfer Time Plot CH39-DH5



Package Transfer Time Plot CH39-2DH5




Version.1.2 Page 35 of 53






Test Plot


Package Transfer Time Plot CH39-3DH1



Package Transfer Time Plot CH39-3DH3



Package Transfer Time Plot CH39-3DH5



Version.1.2 Page 36 of 53





7.6 20DB BANDWIDTH TEST

7.6.1 Applicable Standard

According to FCC Part 15.247(a)(1) and ANSI C63.10-2013

7.6.2 Conformance Limit

No limit requirement.

7.6.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.6.4 Test Setup

Please refer to Section 6.1 of this test report.

7.6.5 Test Procedure

The testing follows ANSI C63.10-2013 clause 6.9.2

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW ≥ 1% of the 20 dB bandwidth

 $VBW \ge RBW$

Sweep = auto

Detector function = peak

Trace = max hold

Version.1.2 Page 37 of 53





7.6.6 Test Results

EUT:	HINGE 13 DRAW CONVERTIBLE LAPTOP	Model No.:	TM133WH710C
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Allen Liu


Test Channel	Frequency (MHz)	Measured Bandwidth (KHz)	Limit (kHz)	Verdict					
1Mbps									
0	2402	1019	N/A	PASS					
39	2441	1028	N/A	PASS					
78	2480	1026	N/A	PASS					
2Mbps									
0	2402	1432	N/A	PASS					
39	2441	1425	N/A	PASS					
78	2480	1430	N/A	PASS					
3Mbps									
0	2402	1443	N/A	PASS					
39	2441	1442	N/A	PASS					
78	2480	1444	N/A	PASS					

Version.1.2 Page 38 of 53






20dB Bandwidth plot on channel 00 (1Mbps)




20dB Bandwidth plot on channel 00 (2Mbps)




20dB Bandwidth plot on channel 39 (1Mbps)




20dB Bandwidth plot on channel 39 (2Mbps)



20dB Bandwidth plot on channel 78 (1Mbps)



20dB Bandwidth plot on channel 78 (2Mbps)




Version.1.2 Page 39 of 53







20dB Bandwidth plot on channel 00 (3Mbps)



20dB Bandwidth plot on channel 39 (3Mbps)



20dB Bandwidth plot on channel 78 (3Mbps)



Version.1.2 Page 40 of 53





7.7 PEAK OUTPUT POWER

7.7.1 Applicable Standard

According to FCC Part 15.247(b)(1) and ANSI C63.10-2013

7.7.2 Conformance Limit

The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts.

7.7.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.7.4 Test Setup

Please refer to Section 6.1 of this test report.

7.7.5 Test Procedure

The testing follows ANSI C63.10-2013 clause 7.8.5.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW ≥ the 20 dB bandwidth of the emission being measured

 $VBW \ge RBW$

Sweep = auto

Detector function = peak

Trace = max hold

Version.1.2 Page 41 of 53





7.7.6 Test Results

EUT:	HINGE 13 DRAW CONVERTIBLE LAPTOP	Model No.:	TM133WH710C
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Allen Liu


Test Channel	Frequenc y (MHz)	Power Setting			Verdict					
	(MHz) (dBm) (dBm) (dBm) (dBm)									
0	2402	Default	1.36	20.97	PASS					
39	2441	Default	2.28	20.97	PASS					
78	2480	Default	2.72	20.97	PASS					
0	2402	Default	-3.17	20.97	PASS					
39	2441	Default	-2.16	20.97	PASS					
78	2480	Default	-1.57	20.97	PASS					
	3Mbps									
0	2402	Default	-3	20.97	PASS					
39	2441	Default	-2.02	20.97	PASS					
78	2480	Default	-1.38	20.97	PASS					

Version.1.2 Page 42 of 53







Peak output Power plot on channel 00 (1Mbps)




Peak output Power plot on channel 00 (2Mbps)




Peak output Power plot on channel 39 (1Mbps)




Peak output Power plot on channel 39 (2Mbps)



Peak output Power plot on channel 78 (1Mbps)



Peak output Power plot on channel 78 (2Mbps)




Version.1.2 Page 43 of 53







Peak output Power plot on channel 00 (3Mbps)



Peak output Power plot on channel 39 (3Mbps)



Peak output Power plot on channel 78 (3Mbps)



Version.1.2 Page 44 of 53





7.8 CONDUCTED BAND EDGE MEASUREMENT

7.8.1 Applicable Standard

According to FCC Part 15.247(d) and ANSI C63.10-2013

7.8.2 Conformance Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.8.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.8.4 Test Setup

Please refer to Section 6.1 of this test report.

7.8.5 Test Procedure

The testing follows ANSI C63.10-2013 clause 7.8.6.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT must have its hopping function enabled.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW = 100KHz

VBW = 300KHz

Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.

Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.

Repeat above procedures until all measured frequencies were complete.

Version.1.2 Page 45 of 53






7.8.6 Test Results

EUT:	HINGE 13 DRAW CONVERTIBLE LAPTOP	Model No.:	TM133WH710C
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode2 /Mode4/ Mode 5	Test By:	Allen Liu


Note: Hopping enabled and disabled have evaluated, and the wortest data was reported

Test Plot


GFSK: Band Edge-Low Channel




GFSK: Band Edge-High Channel



GFSK: Band Edge-Low Channel (Hopping Mode)



GFSK: Band Edge-High Channel (Hopping Mode)




Version.1.2 Page 46 of 53







π /4-DQPSK: Band Edge-Low Channel




 π /4-DQPSK: Band Edge-High Channel



 π /4-DQPSK: Band Edge-Low Channel (Hopping Mode)



 π /4-DQPSK: Band Edge-High Channel (Hopping Mode)




Version.1.2 Page 47 of 53






8-DPSK: Band Edge-Low Channel




8-DPSK: Band Edge-Low Channel


(Hopping Mode)



8-DPSK: Band Edge-High Channel



8-DPSK: Band Edge-High Channel (Hopping Mode)



Version.1.2 Page 48 of 53





7.9 SPURIOUS RF CONDUCTED EMISSION

7.9.1 Applicable Standard

According to FCC Part 15.247(d) and ANSI C63.10-2013.

7.9.2 Conformance Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.9.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.9.4 Test Setup

Please refer to Section 6.1 of this test report.

7.9.5 Test Procedure

Establish an emission level by using the following procedure:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW \geq [3 \times RBW].
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Then the limit shall be attenuated by at least 20 dB relative to the maximum amplitude level in 100 kHz.

7.9.6 Test Results


Remark: The measurement frequency range is from 9KHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandege measurement data.

The worst mode is GFSK mode, and the report only show the worst mode data.

Version.1.2 Page 49 of 53






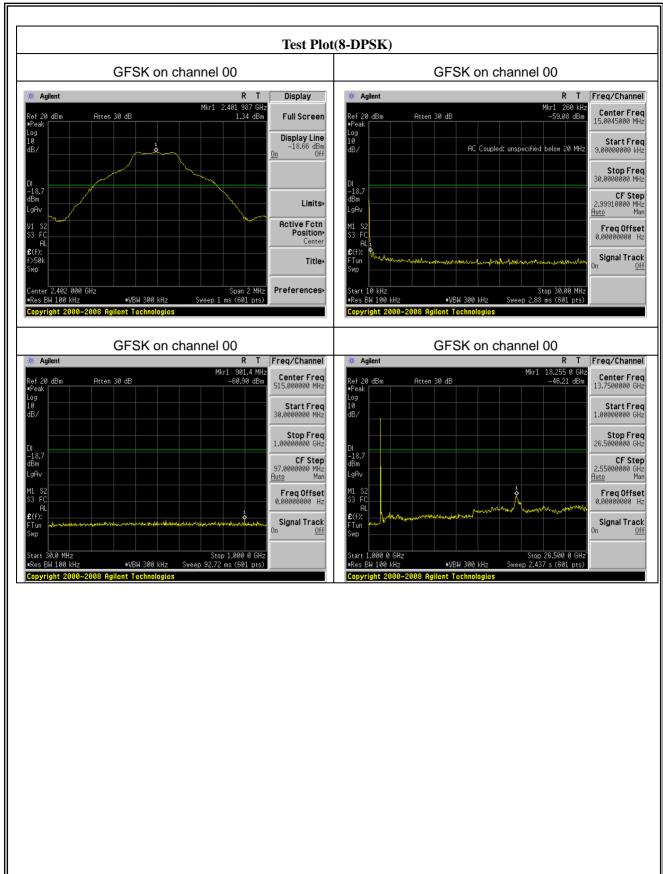

Version.1.2 Page 50 of 53






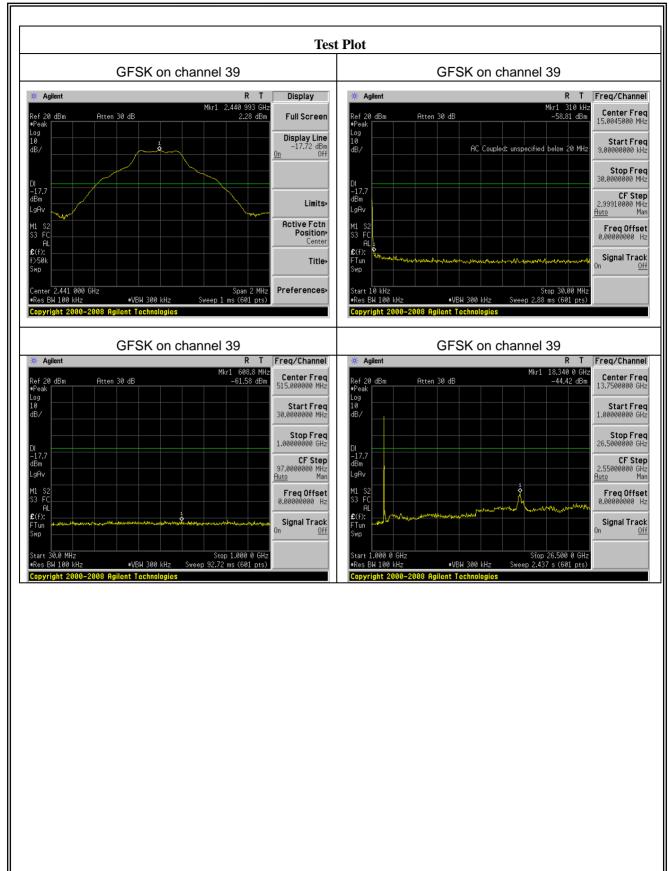

Version.1.2 Page 51 of 53





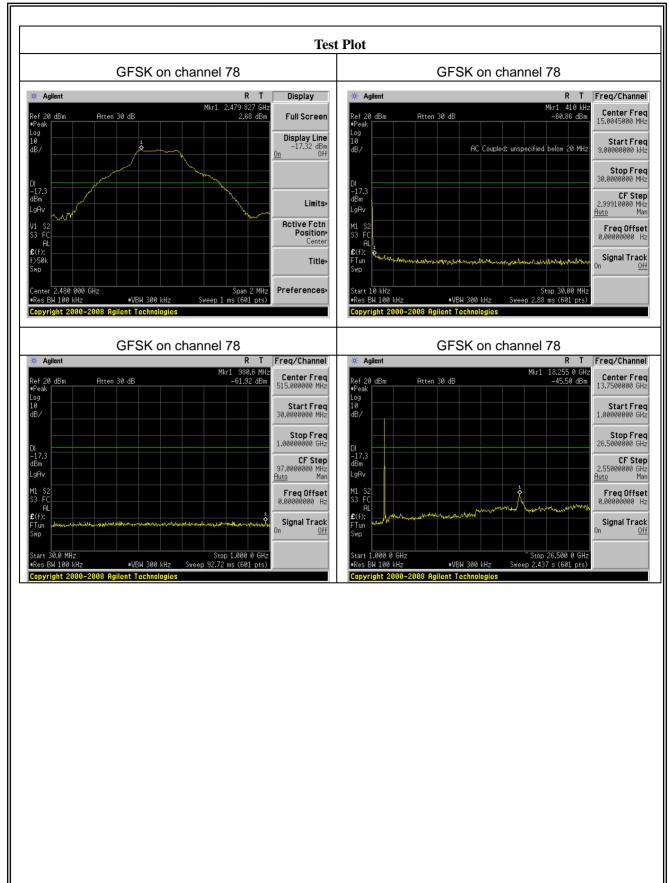

Version.1.2 Page 52 of 53





7.10 ANTENNA APPLICATION

7.10.1 Antenna Requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible partyshall be used with the device.

7.10.2 Result

The	EUT	antenna	is	permanent	attached	FPCB	antenna(Gain:1dBi).	lt	comply	with	the	standard
requ	iremei	nt.										

END OF REPORT

Version.1.2 Page 53 of 53