




Plot 65:

Test Date	2025-04-11
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	NR band 71
Signal	NR FDD
Frequency	680.5
SAR 10g (W/Kg)	0.237
SAR 1g (W/Kg)	0.409
ConvF	1.70
Relative permittivity	42.40
Conductivity (S/m)	0.90

Maximum location: X=-8.00, Y=-48.00 ; SAR Peak: 0.58 W/kg

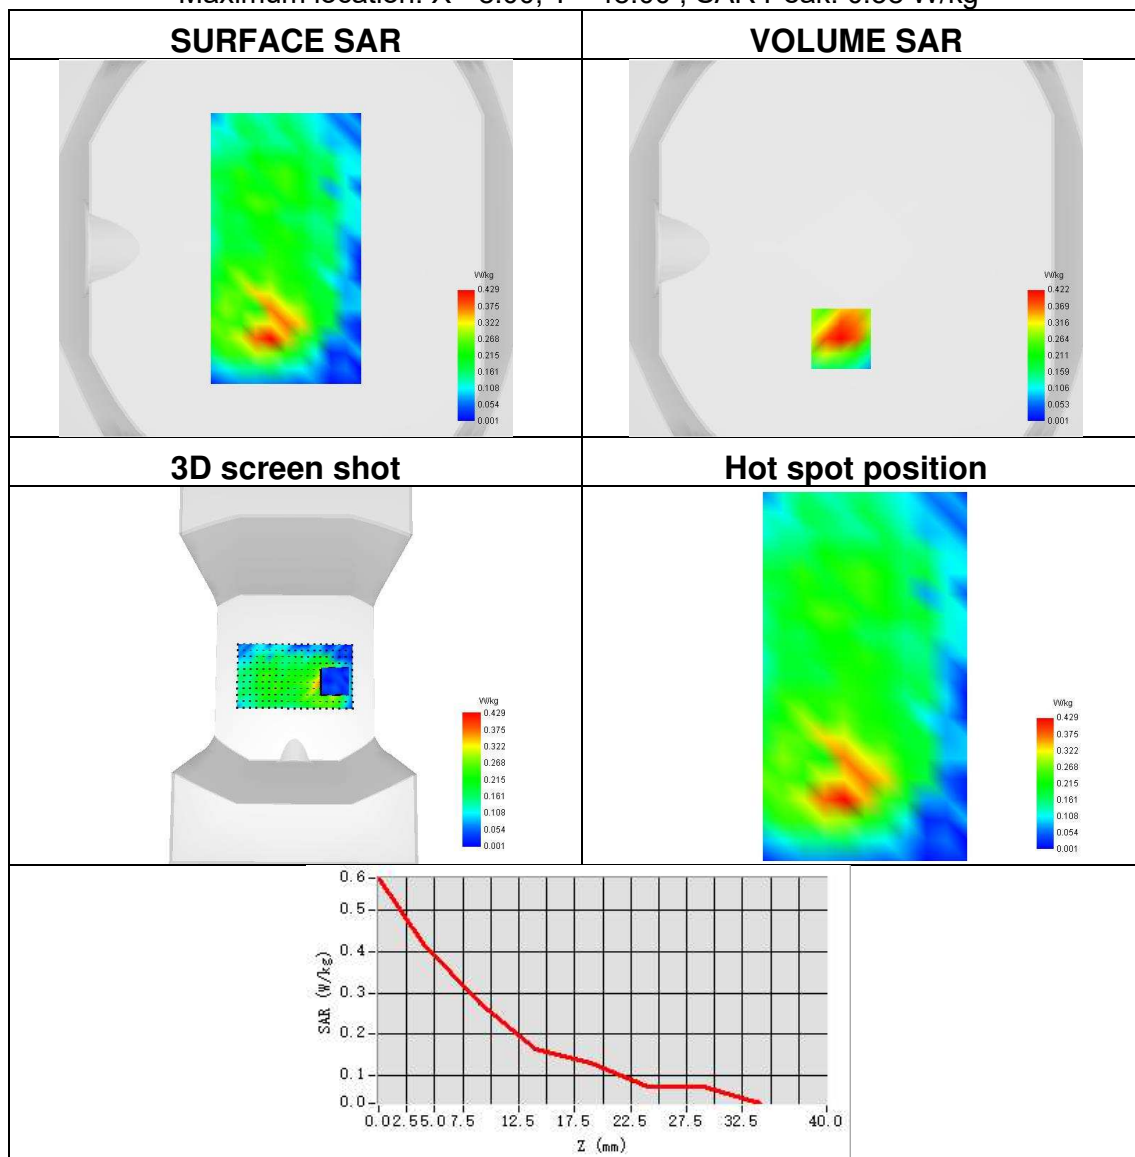




Plot 66:

Test Date	2025-04-13
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	NR band 78
Signal	NR TDD
Frequency	3750
SAR 10g (W/Kg)	0.417
SAR 1g (W/Kg)	0.999
ConvF	1.95
Relative permittivity	37.89
Conductivity (S/m)	3.14

Maximum location: X=0.00, Y=-15.00 ; SAR Peak: 2.85 W/kg

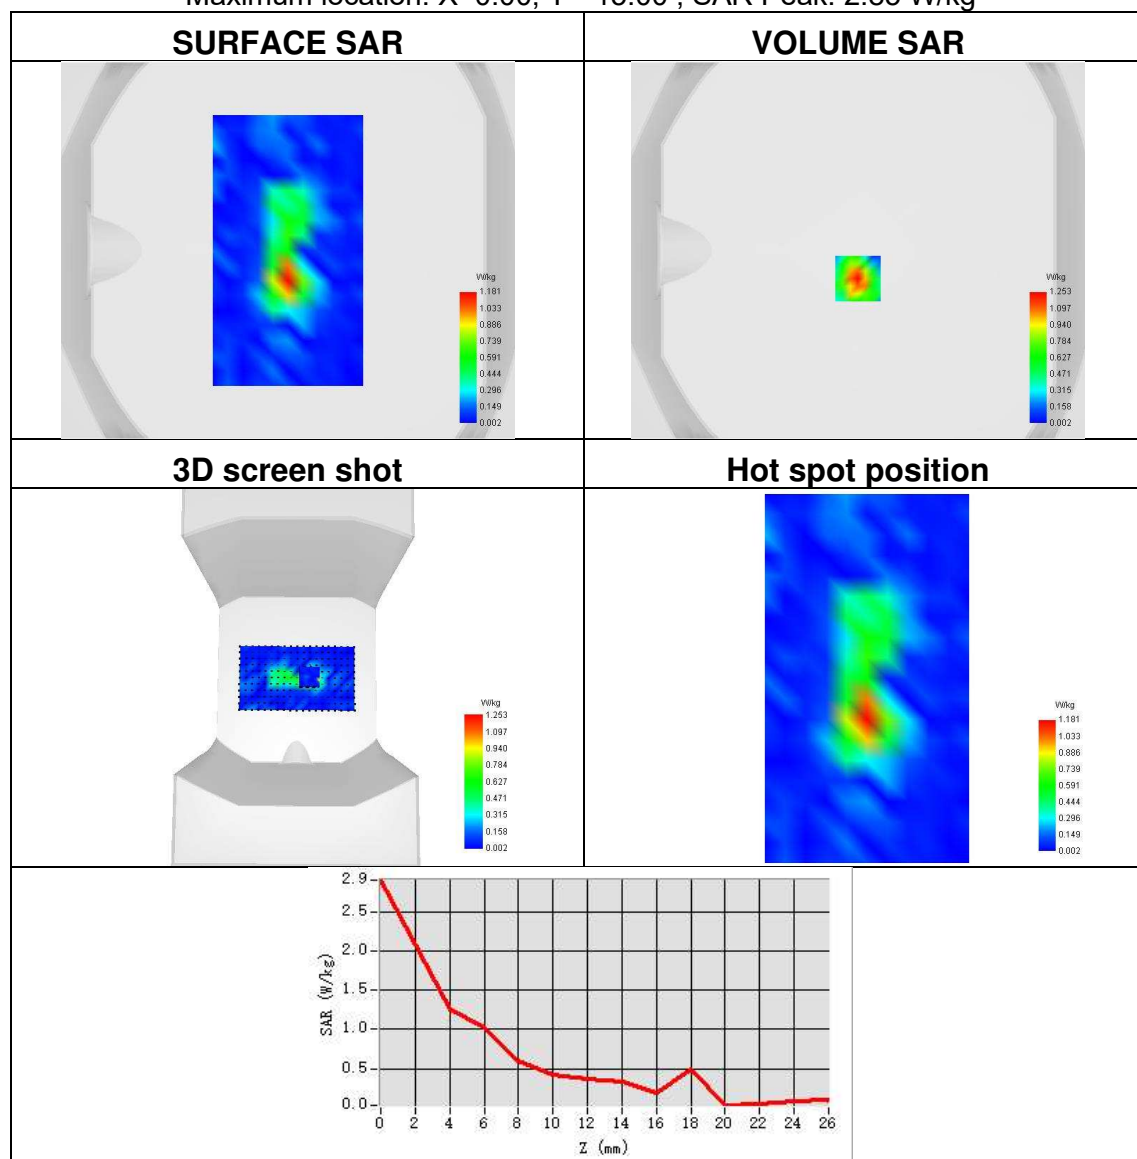




Plot 67:

Test Date	2025-04-14
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	NR band 2
Signal	NSA NR FDD
Frequency	1880
SAR 10g (W/Kg)	0.276
SAR 1g (W/Kg)	0.570
ConvF	2.21
Relative permittivity	40.56
Conductivity (S/m)	1.43

Maximum location: X=14.00, Y=29.00 ; SAR Peak: 1.09 W/kg

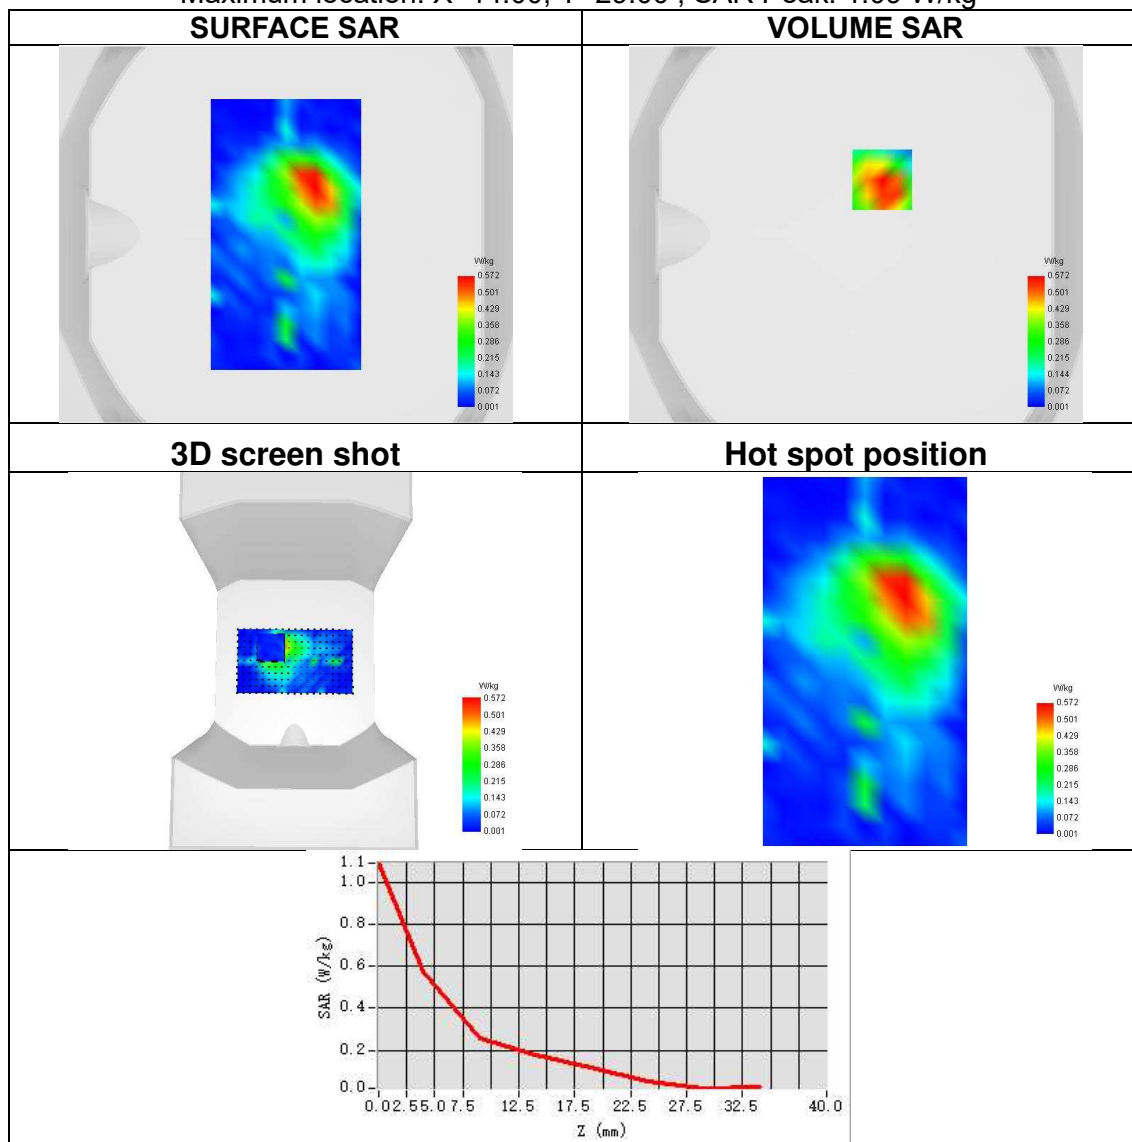




Plot 68:

Test Date	2025-04-03
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	NR band 5
Signal	NSA NR FDD
Frequency	836.5
SAR 10g (W/Kg)	0.149
SAR 1g (W/Kg)	0.292
ConvF	1.71
Relative permittivity	42.24
Conductivity (S/m)	0.86

Maximum location: X=-15.00, Y=-49.00 ; SAR Peak: 0.53 W/kg

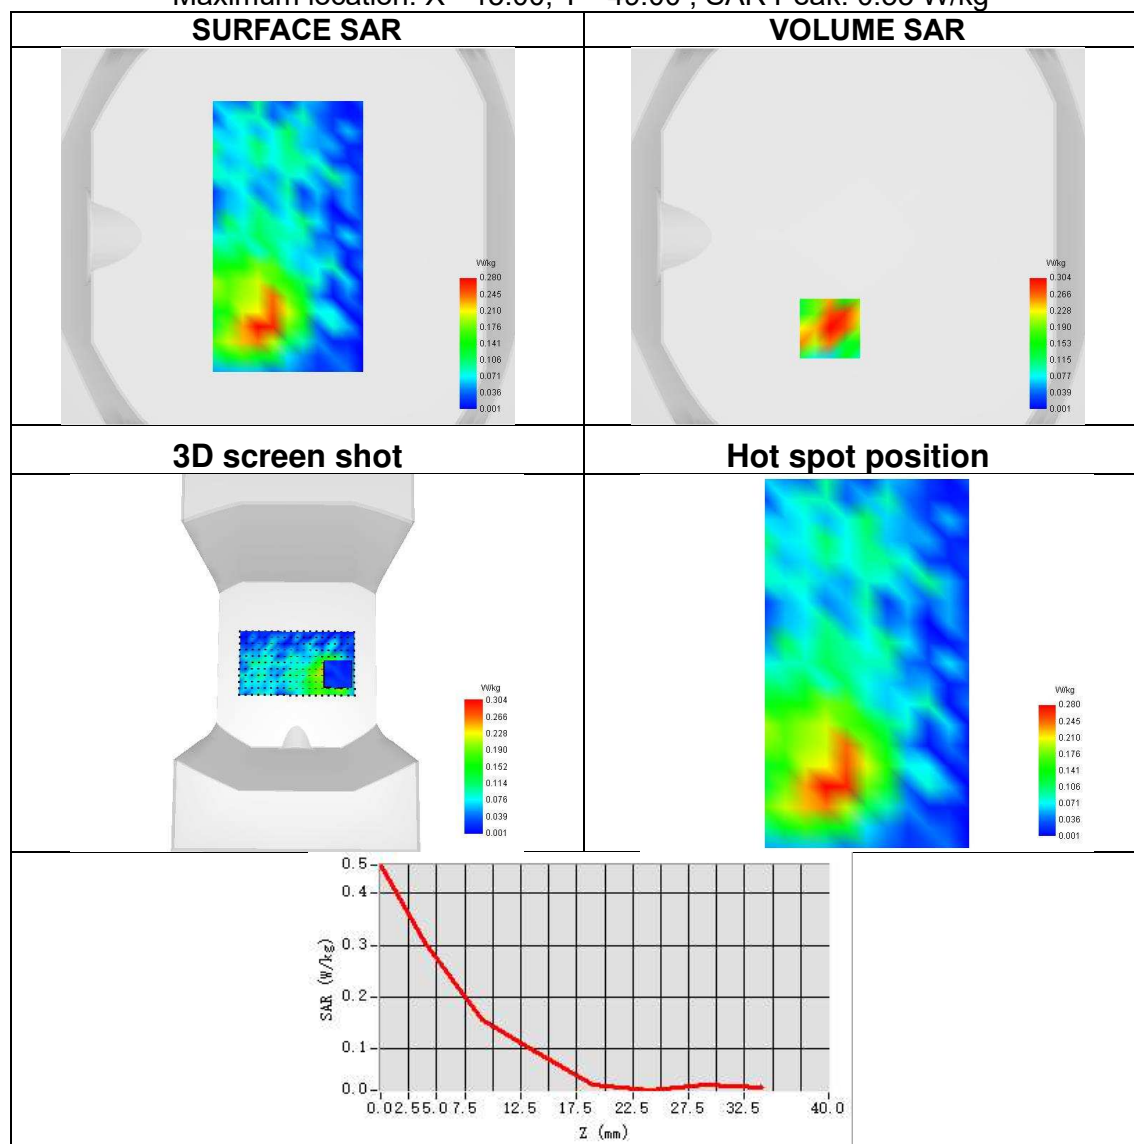




Plot 69:

Test Date	2025-04-09
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	NR band 41
Signal	NSA NR TDD
Frequency	2640
SAR 10g (W/Kg)	0.283
SAR 1g (W/Kg)	0.626
ConvF	2.10
Relative permittivity	39.48
Conductivity (S/m)	1.99

Maximum location: X=9.00, Y=-1.00 ; SAR Peak: 1.19 W/kg

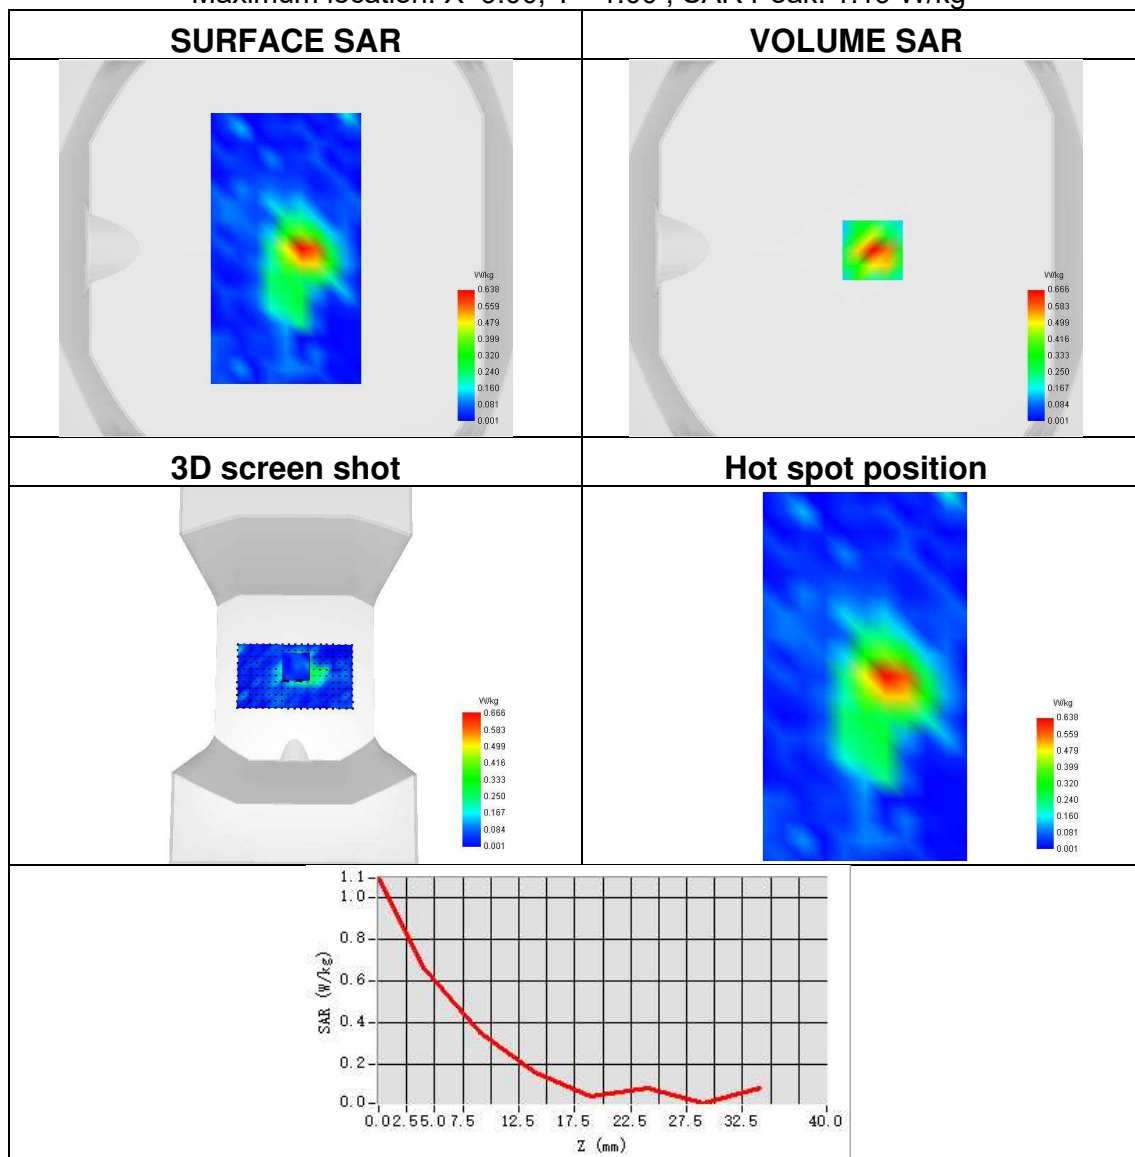




Plot 70:

Test Date	2025-04-08
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	NR band 66
Signal	NSA NR FDD
Frequency	1730
SAR 10g (W/Kg)	0.173
SAR 1g (W/Kg)	0.410
ConvF	2.01
Relative permittivity	40.73
Conductivity (S/m)	1.39

Maximum location: X=17.00, Y=-7.00 ; SAR Peak: 0.89 W/kg

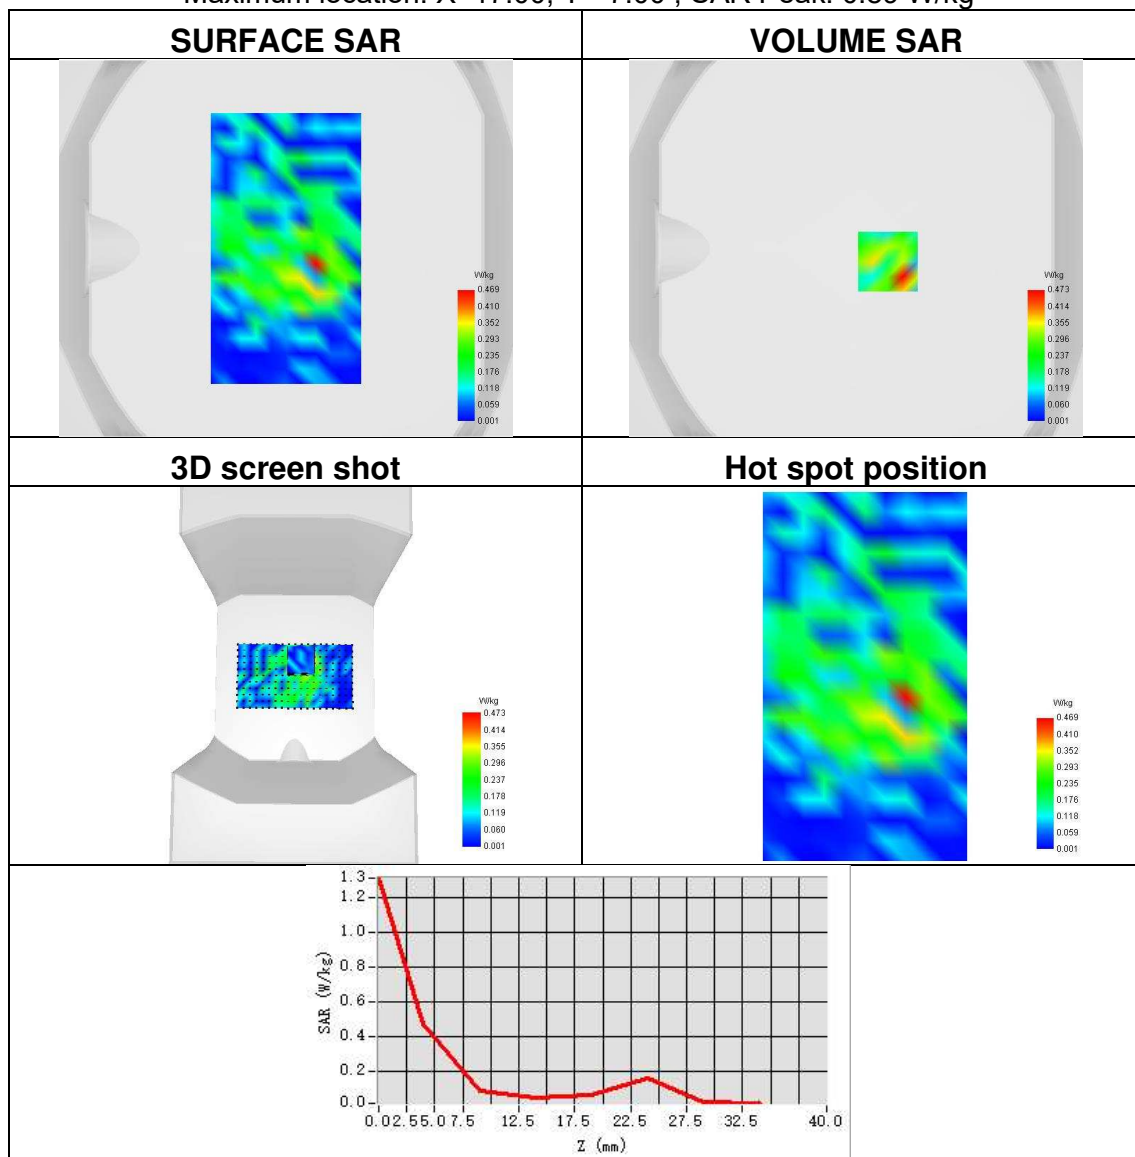




Plot 71:

Test Date	2025-04-11
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	NR band 71
Signal	NSA NR FDD
Frequency	680.5
SAR 10g (W/Kg)	0.106
SAR 1g (W/Kg)	0.239
ConvF	1.70
Relative permittivity	42.40
Conductivity (S/m)	0.90

Maximum location: X=0.00, Y=-39.00 ; SAR Peak: 0.48 W/kg

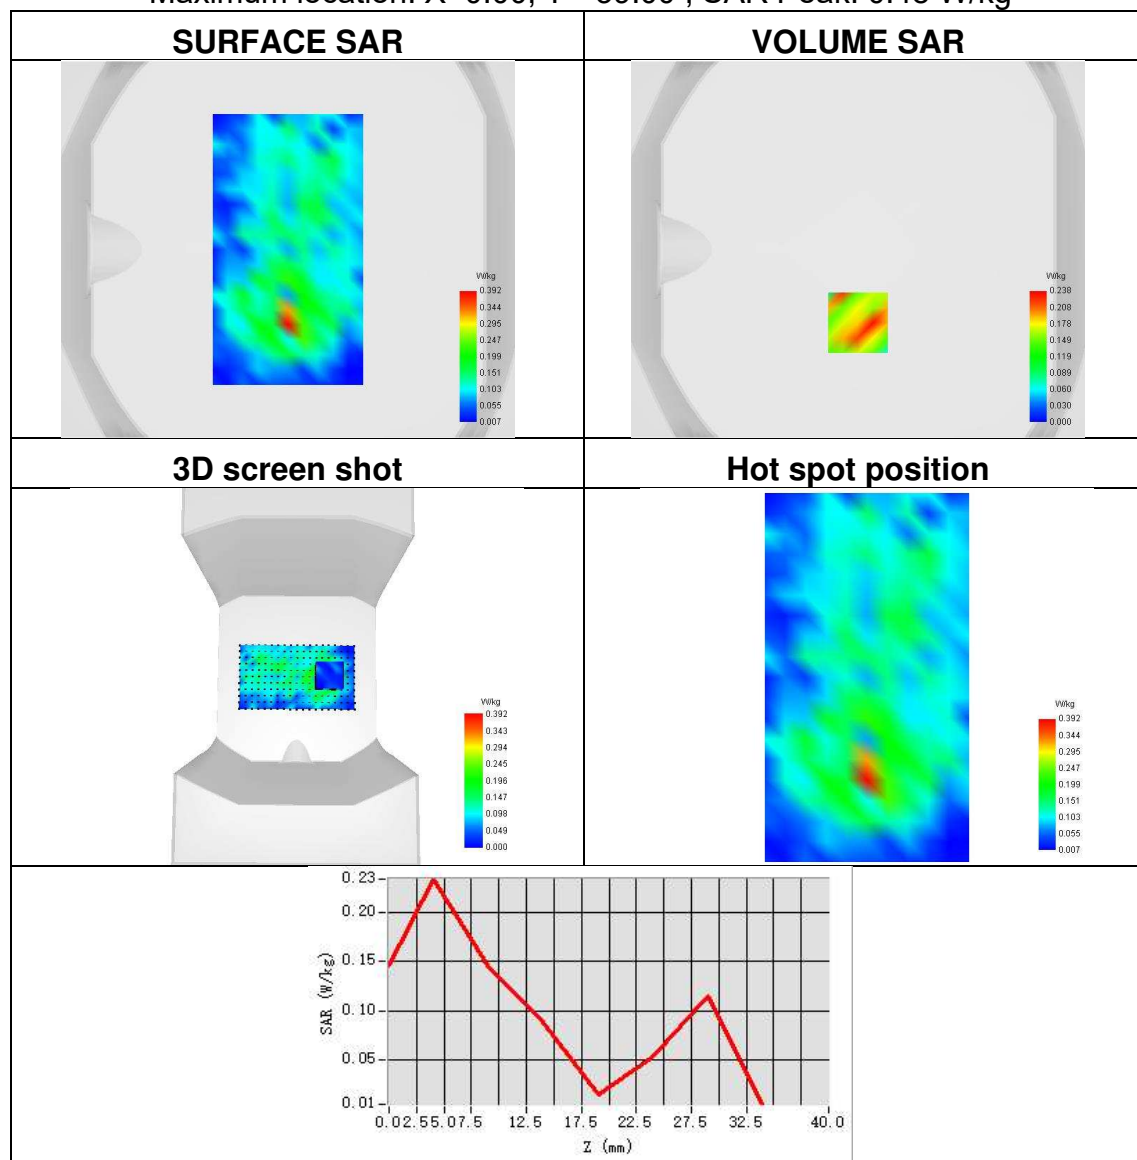




Plot 72:

Test Date	2025-04-16
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	NR band 78
Signal	NSA NR TDD
Frequency	3750
SAR 10g (W/Kg)	0.093
SAR 1g (W/Kg)	0.303
ConvF	1.95
Relative permittivity	37.59
Conductivity (S/m)	3.21

Maximum location: X=-8.00, Y=-31.00 ; SAR Peak: 2.95 W/kg

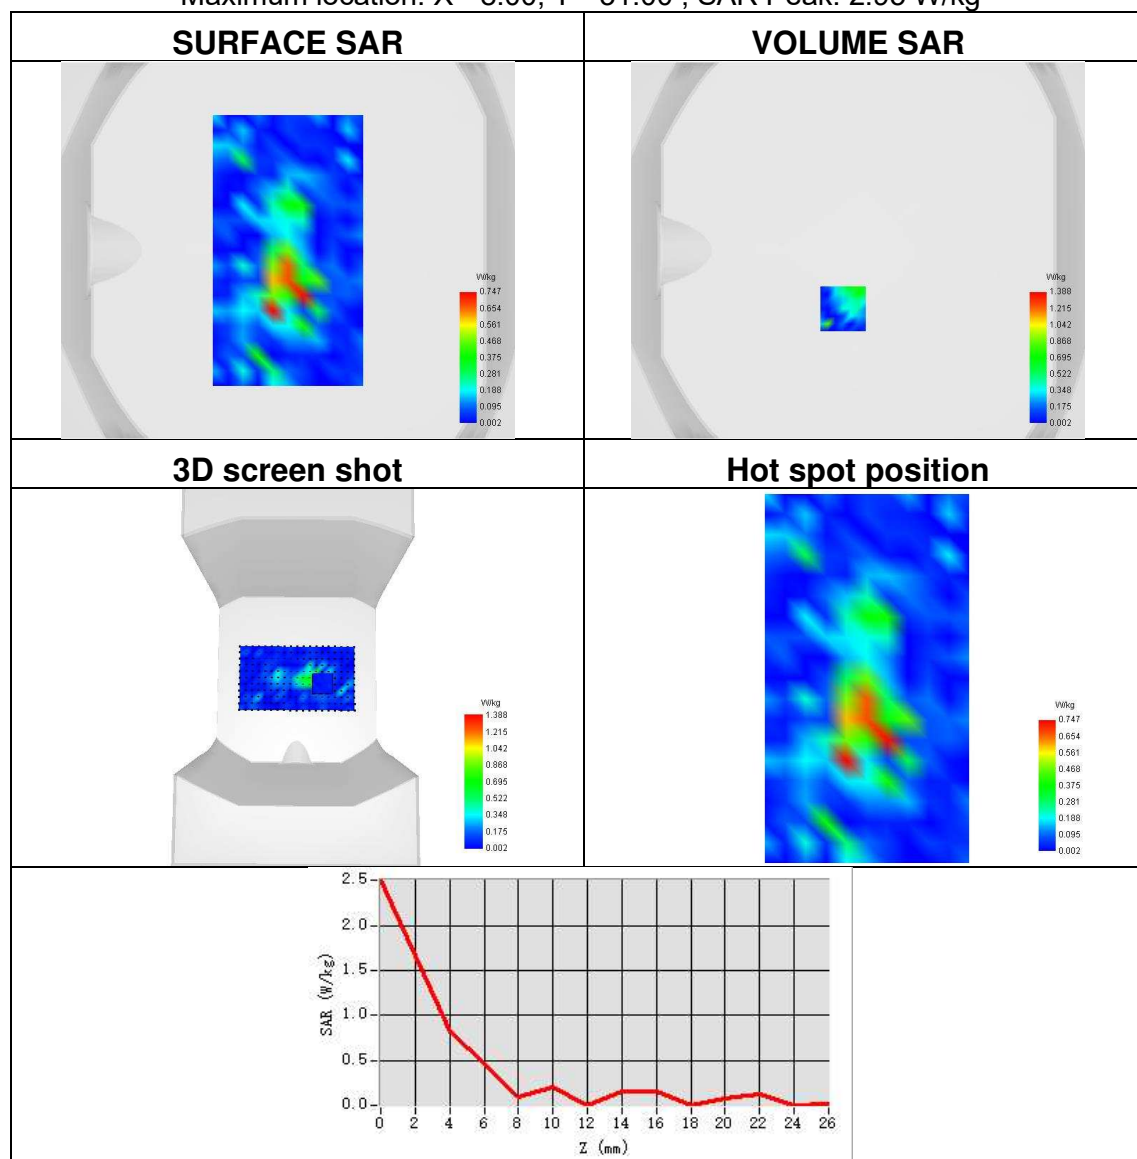




Plot 73:

Test Date	2025-04-12
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 2
Signal	NSA LTE FDD
Frequency	1900
SAR 10g (W/Kg)	0.228
SAR 1g (W/Kg)	0.606
ConvF	2.21
Relative permittivity	40.83
Conductivity (S/m)	1.45

Maximum location: X=5.00, Y=-5.00 ; SAR Peak: 1.31 W/kg

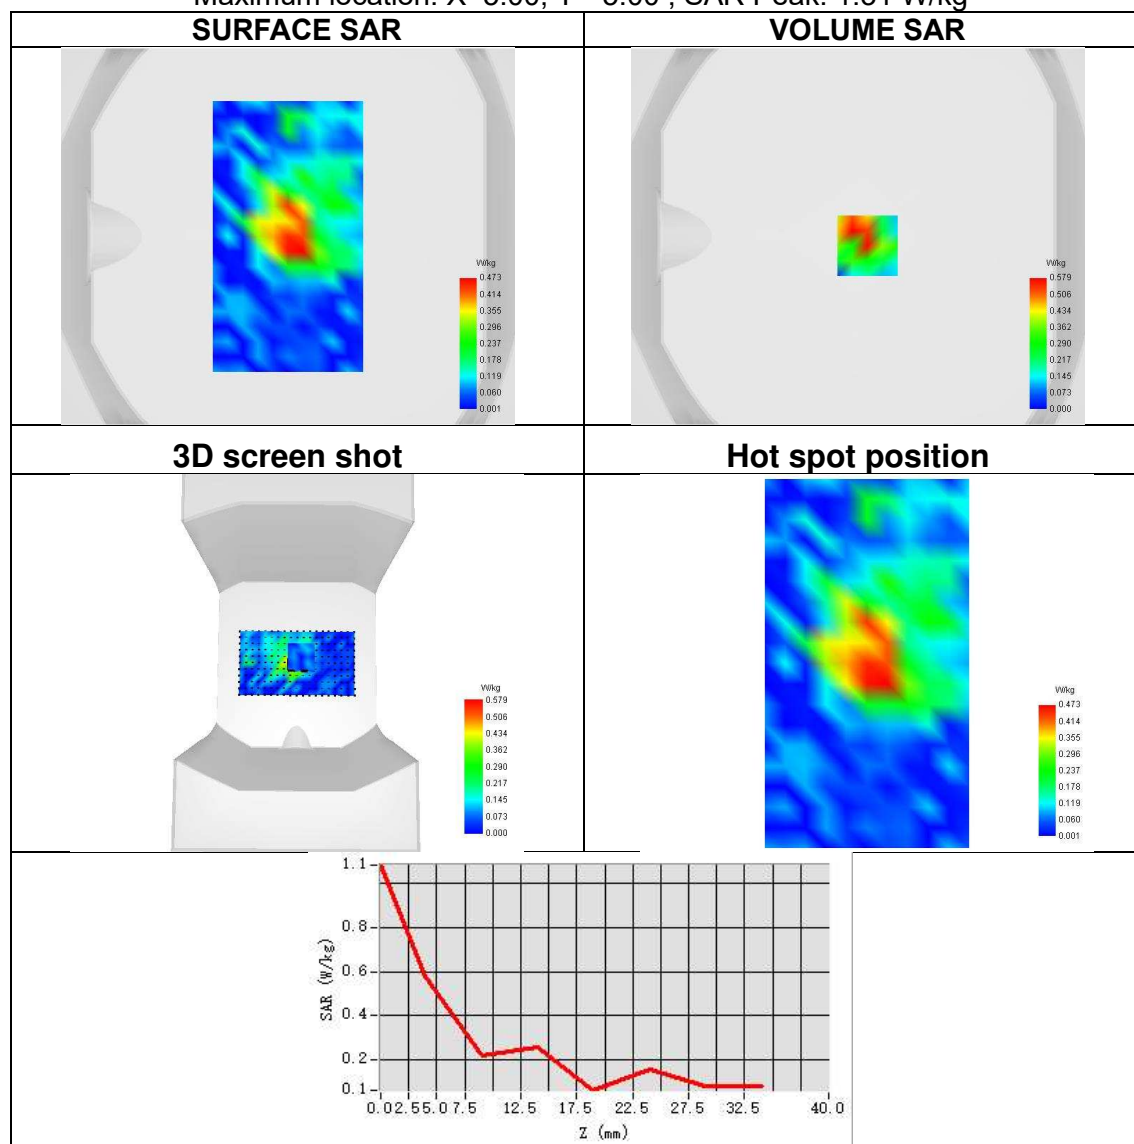




Plot 74:

Test Date	2025-04-18
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 4
Signal	NSA LTE FDD ANT4
Frequency	1720
SAR 10g (W/Kg)	0.101
SAR 1g (W/Kg)	0.194
ConvF	2.01
Relative permittivity	41.21
Conductivity (S/m)	1.34

Maximum location: X=9.00, Y=2.00 ; SAR Peak: 0.43 W/kg

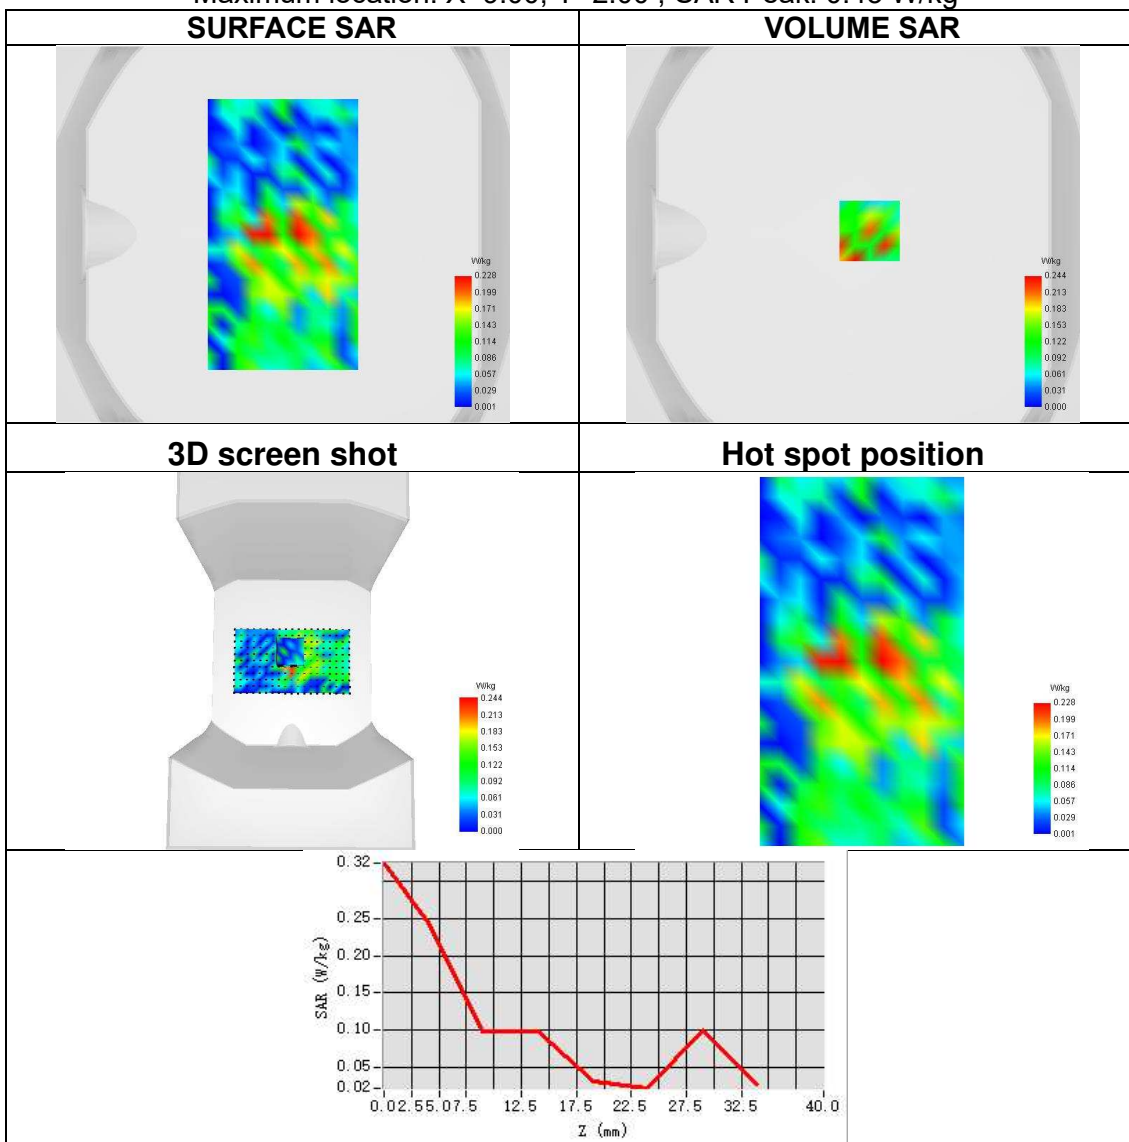




Plot 75:

Test Date	2025-04-03
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 5
Signal	NSA LTE FDD
Frequency	836.5
SAR 10g (W/Kg)	0.175
SAR 1g (W/Kg)	0.451
ConvF	1.71
Relative permittivity	42.24
Conductivity (S/m)	0.86

Maximum location: X=-15.00, Y=-40.00 ; SAR Peak: 0.96 W/kg

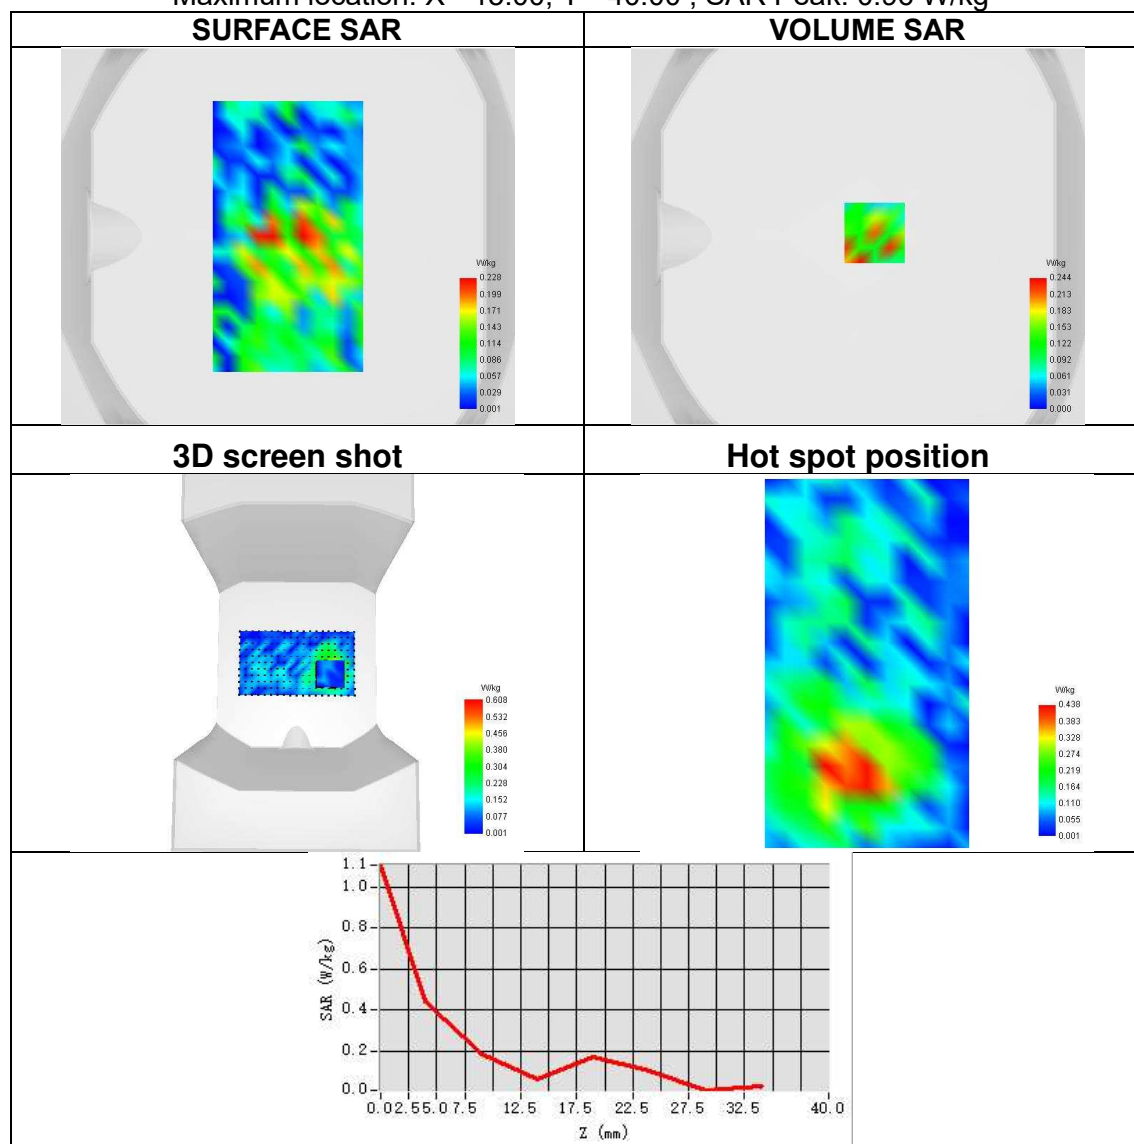




Plot 76:

Test Date	2025-04-04
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 7
Signal	NSA LTE FDD
Frequency	2510
SAR 10g (W/Kg)	0.254
SAR 1g (W/Kg)	0.526
ConvF	2.10
Relative permittivity	39.81
Conductivity (S/m)	1.94

Maximum location: X=8.00, Y=25.00 ; SAR Peak: 1.03 W/kg

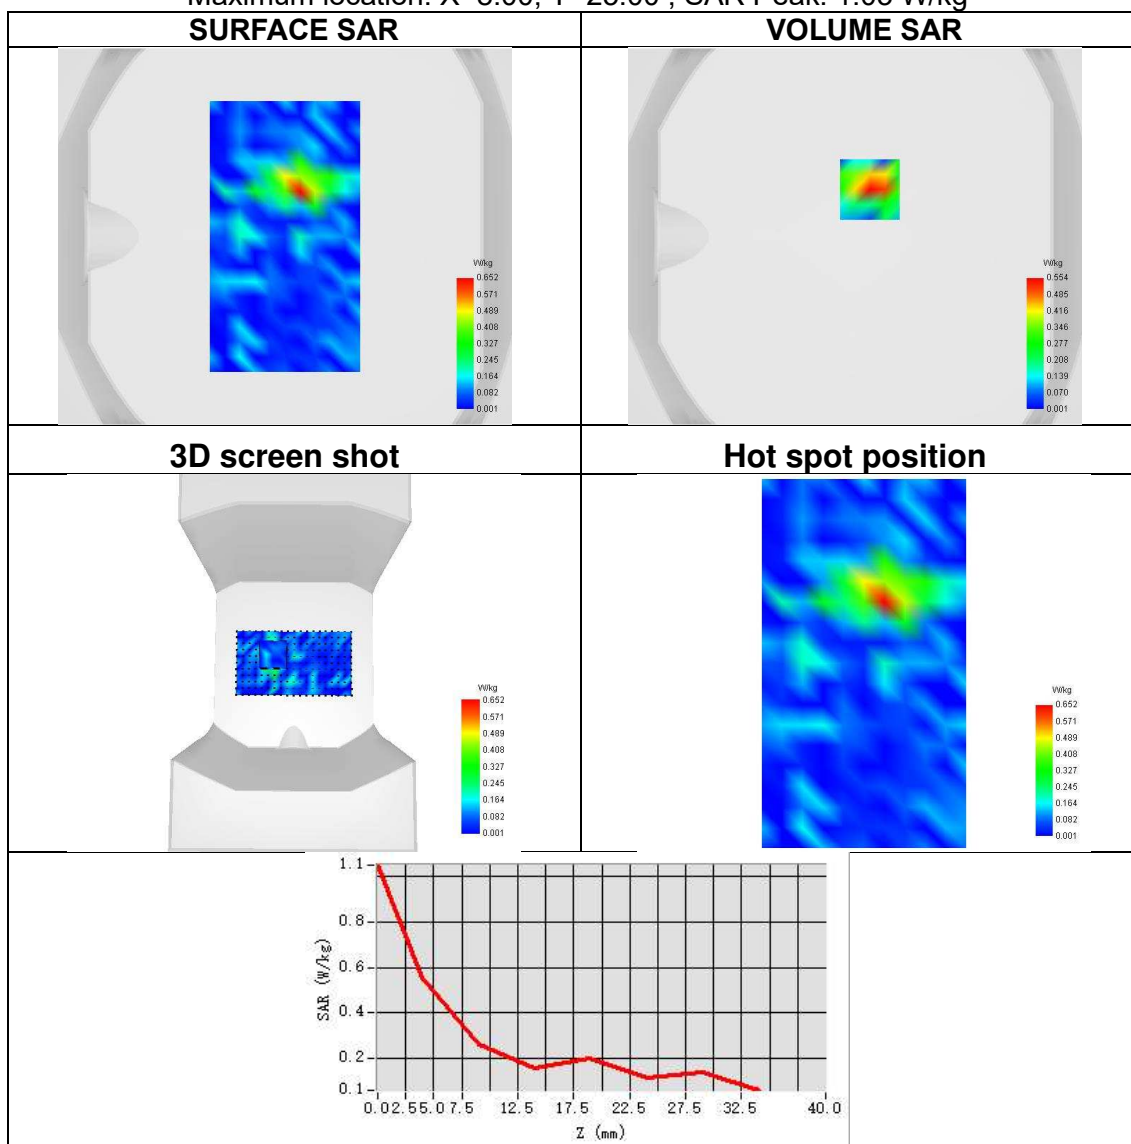




Plot 77:

Test Date	2025-03-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 12
Signal	NSA LTE FDD
Frequency	707.5
SAR 10g (W/Kg)	0.167
SAR 1g (W/Kg)	0.355
ConvF	1.70
Relative permittivity	42.90
Conductivity (S/m)	0.92

Maximum location: X=-5.00, Y=-39.00 ; SAR Peak: 0.76 W/kg

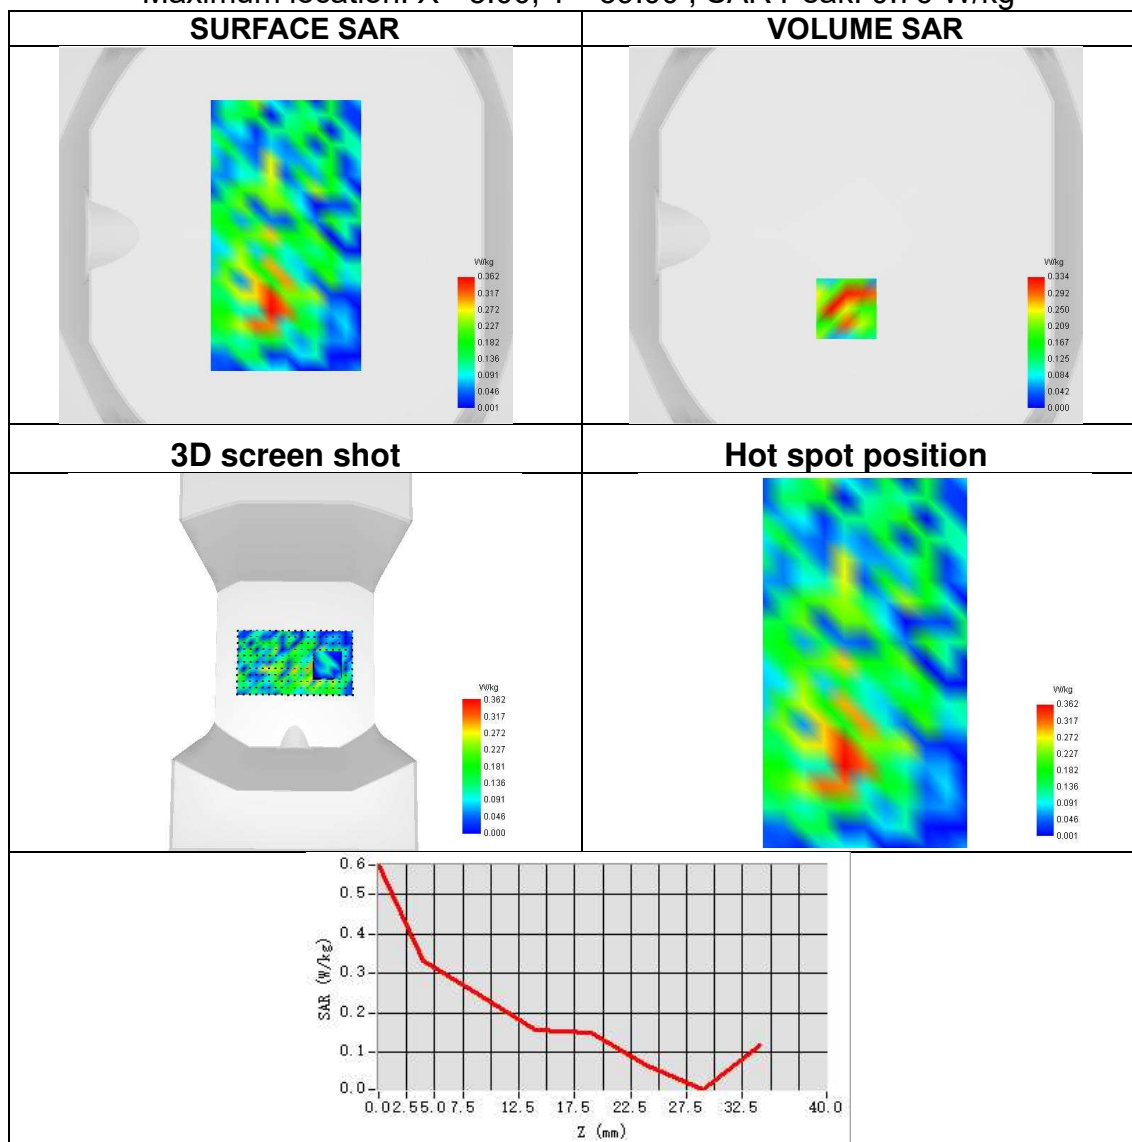




Plot 78:

Test Date	2025-04-07
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 14
Signal	NSA LTE FDD
Frequency	793
SAR 10g (W/Kg)	0.122
SAR 1g (W/Kg)	0.284
ConvF	1.70
Relative permittivity	41.92
Conductivity (S/m)	0.85

Maximum location: X=-8.00, Y=-48.00 ; SAR Peak: 0.64 W/kg

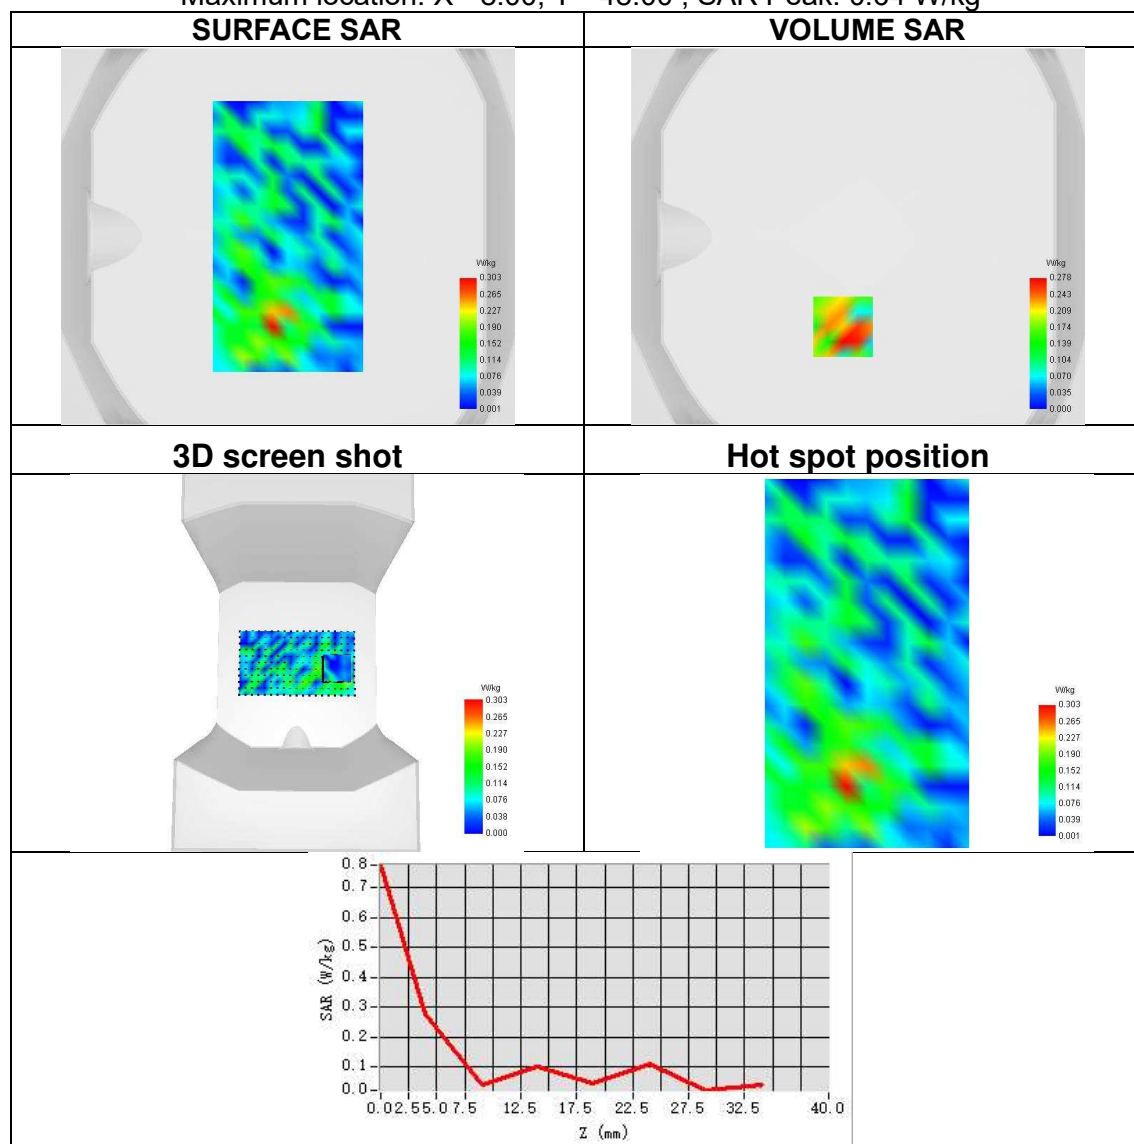




Plot 79:

Test Date	2025-04-02
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 30
Signal	NSA LTE FDD
Frequency	2310
SAR 10g (W/Kg)	0.299
SAR 1g (W/Kg)	0.623
ConvF	2.45
Relative permittivity	40.64
Conductivity (S/m)	1.64

Maximum location: X=20.00, Y=-3.00 ; SAR Peak: 1.23 W/kg

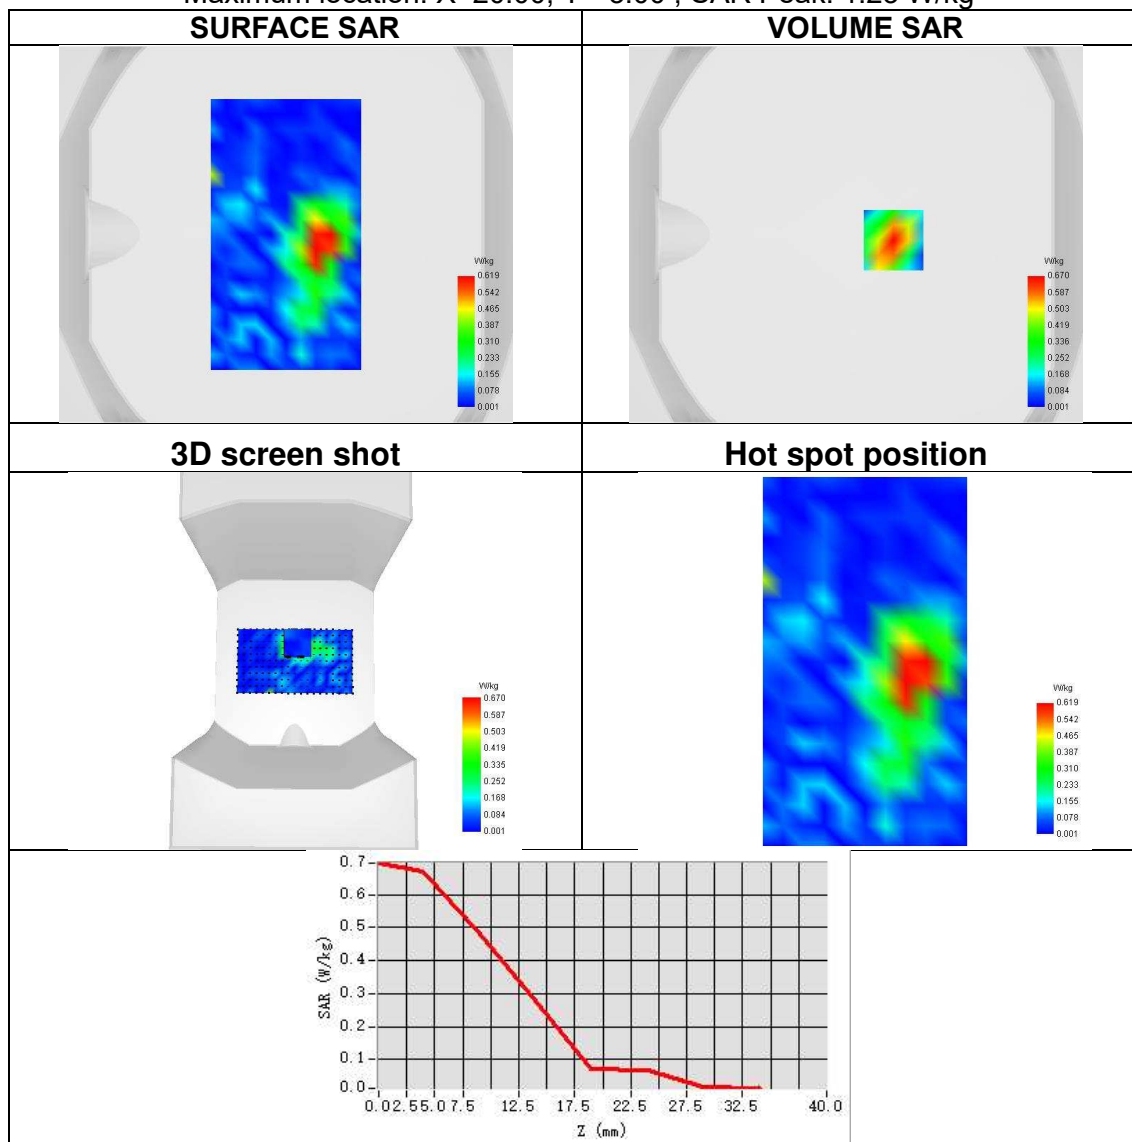




Plot 80:

Test Date	2025-03-31
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 66
Signal	NSA LTE FDD ANT2
Frequency	1770
SAR 10g (W/Kg)	0.235
SAR 1g (W/Kg)	0.514
ConvF	2.01
Relative permittivity	40.71
Conductivity (S/m)	1.43

Maximum location: X=16.00, Y=8.00 ; SAR Peak: 0.94 W/kg

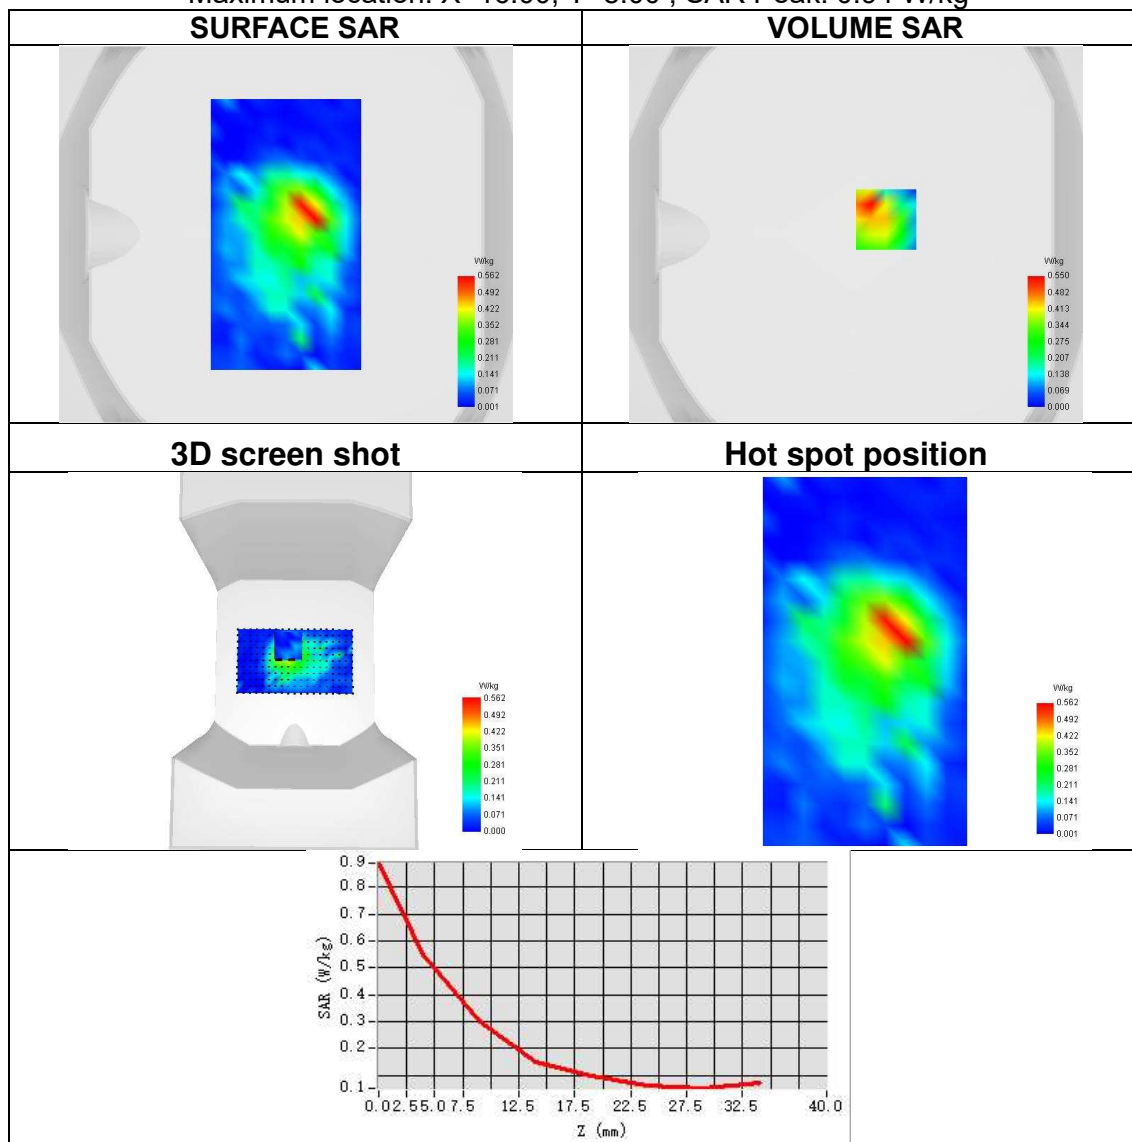




Plot 81:

Test Date	2025-03-31
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 66
Signal	NSA LTE FDD ANT4
Frequency	1770
SAR 10g (W/Kg)	0.112
SAR 1g (W/Kg)	0.299
ConvF	2.01
Relative permittivity	40.71
Conductivity (S/m)	1.43

Maximum location: X=19.00, Y=-24.00 ; SAR Peak: 1.05 W/kg

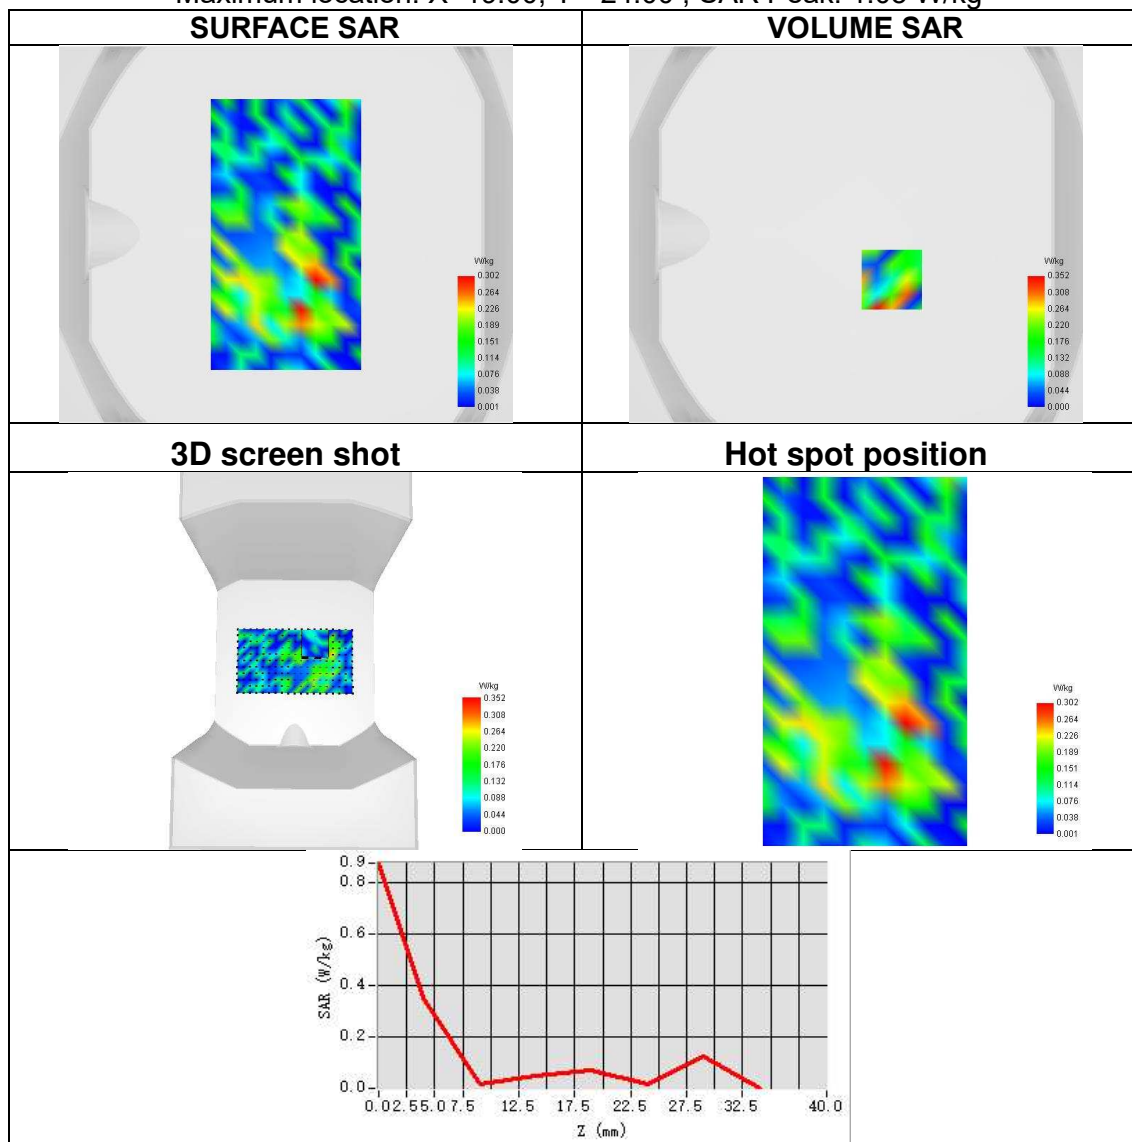




Plot 82:

Test Date	2025-03-22
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 71
Signal	NSA LTE FDD
Frequency	673
SAR 10g (W/Kg)	0.107
SAR 1g (W/Kg)	0.251
ConvF	1.70
Relative permittivity	42.11
Conductivity (S/m)	0.87

Maximum location: X=-10.00, Y=-40.00 ; SAR Peak: 0.56 W/kg

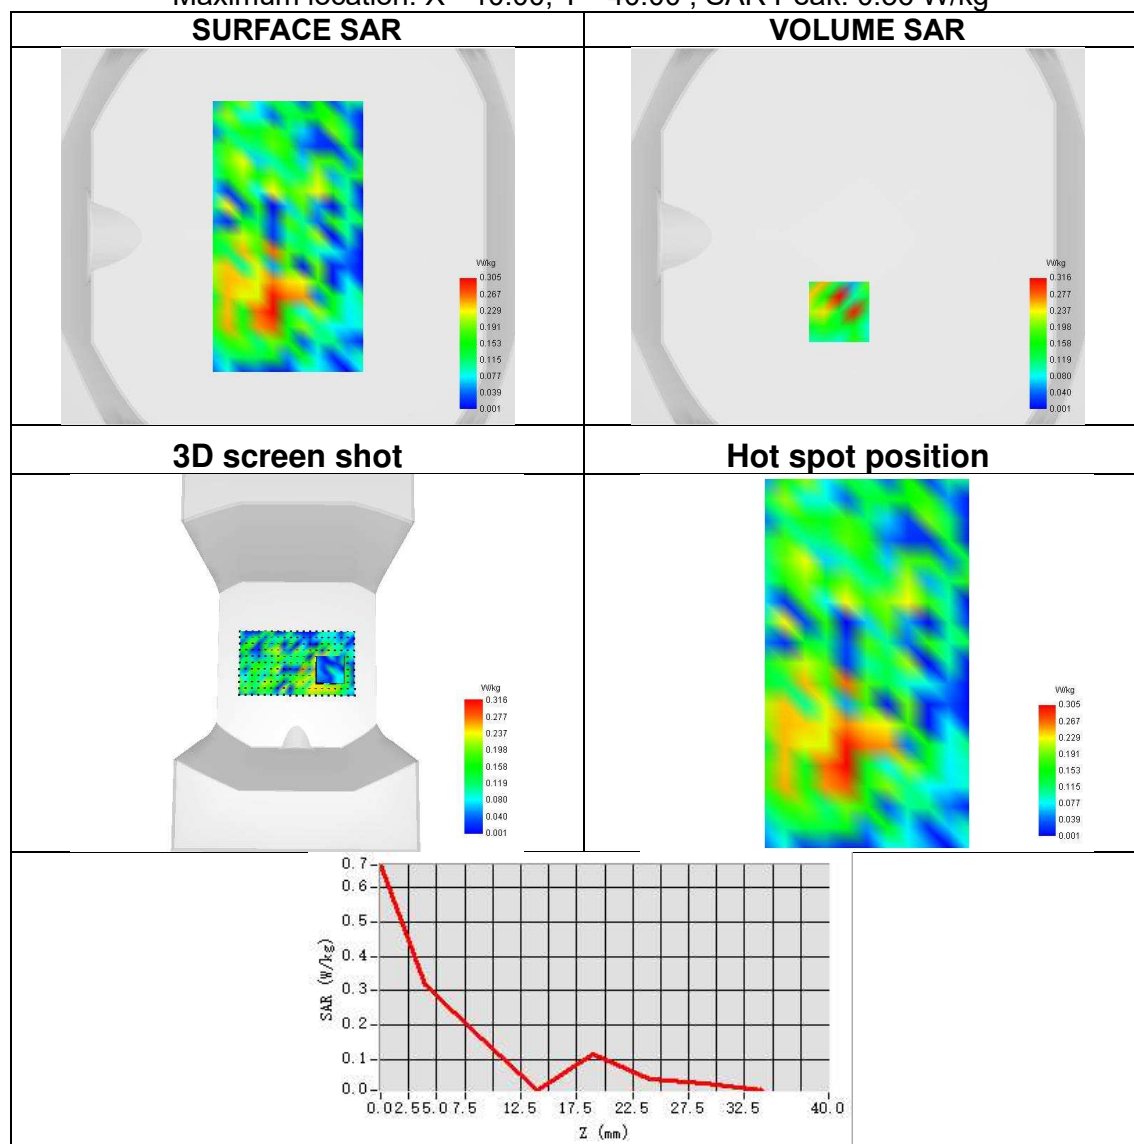




Plot 83:

Test Date	2025-04-03
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front Side
Band	GSM850
Signal	TDMA (GSM)
Frequency	836.6
SAR 10g (W/Kg)	0.967
SAR 1g (W/Kg)	1.703
ConvF	1.71
Relative permittivity	42.24
Conductivity (S/m)	0.86

Maximum location: X=20.00, Y=-22.00 ; SAR Peak: 2.79 W/kg

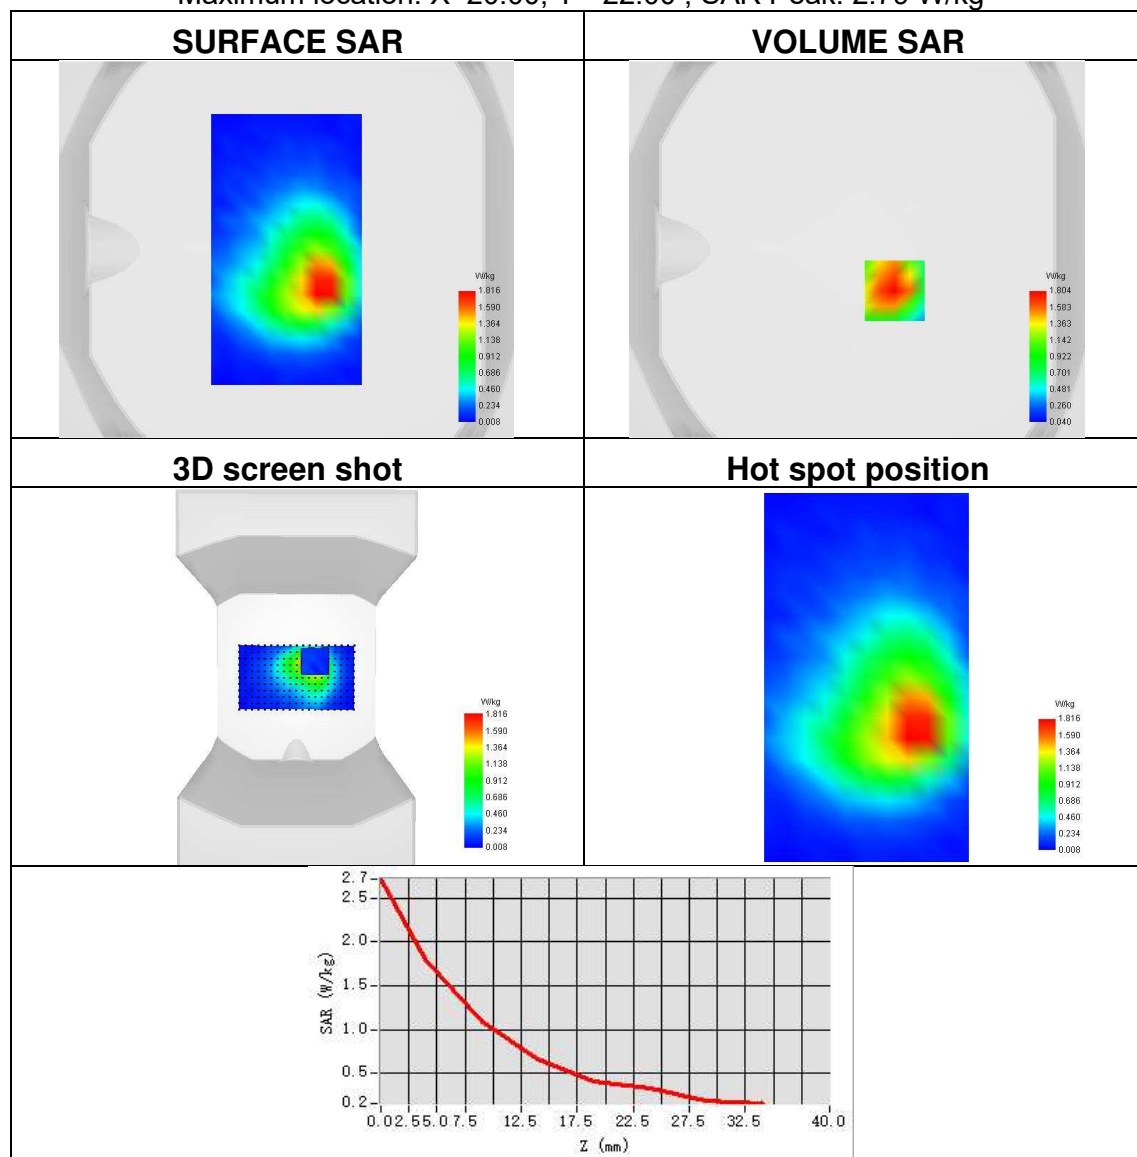




Plot 84:

Test Date	2025-04-14
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	GPRS1900
Signal	TDMA (GPRS)
Frequency	1880
SAR 10g (W/Kg)	1.235
SAR 1g (W/Kg)	2.401
ConvF	2.21
Relative permittivity	40.56
Conductivity (S/m)	1.43

Maximum location: X=0.00, Y=17.00 ; SAR Peak: 4.33 W/kg

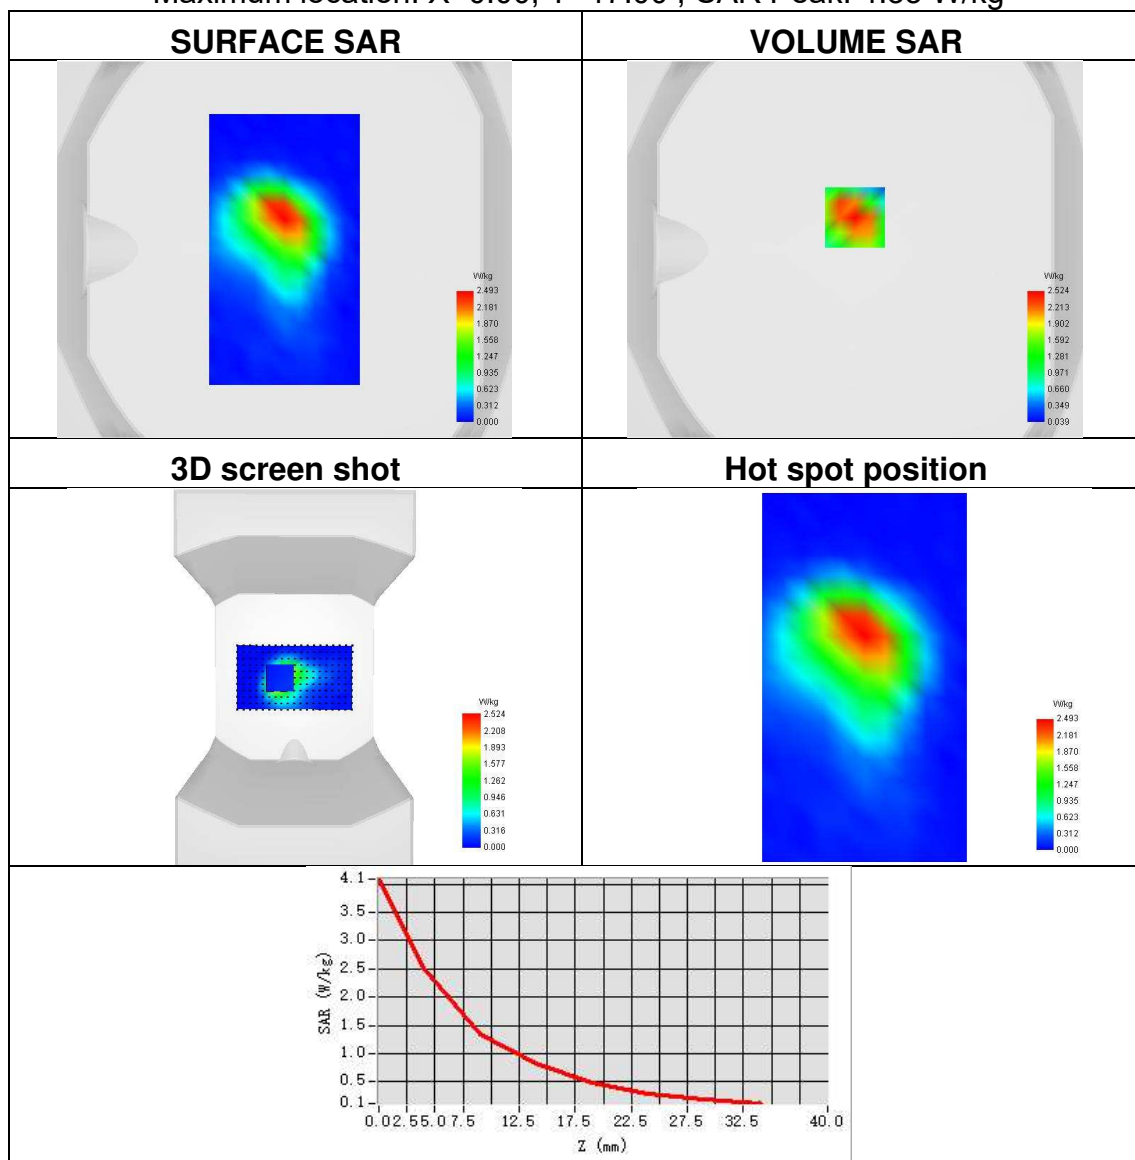




Plot 85:

Test Date	2025-04-01
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	Band 2 (1900)
Signal	WCDMA
Frequency	1907.6
SAR 10g (W/Kg)	0.759
SAR 1g (W/Kg)	1.477
ConvF	2.21
Relative permittivity	40.61
Conductivity (S/m)	1.38

Maximum location: X=5.00, Y=14.00 ; SAR Peak: 2.58 W/kg

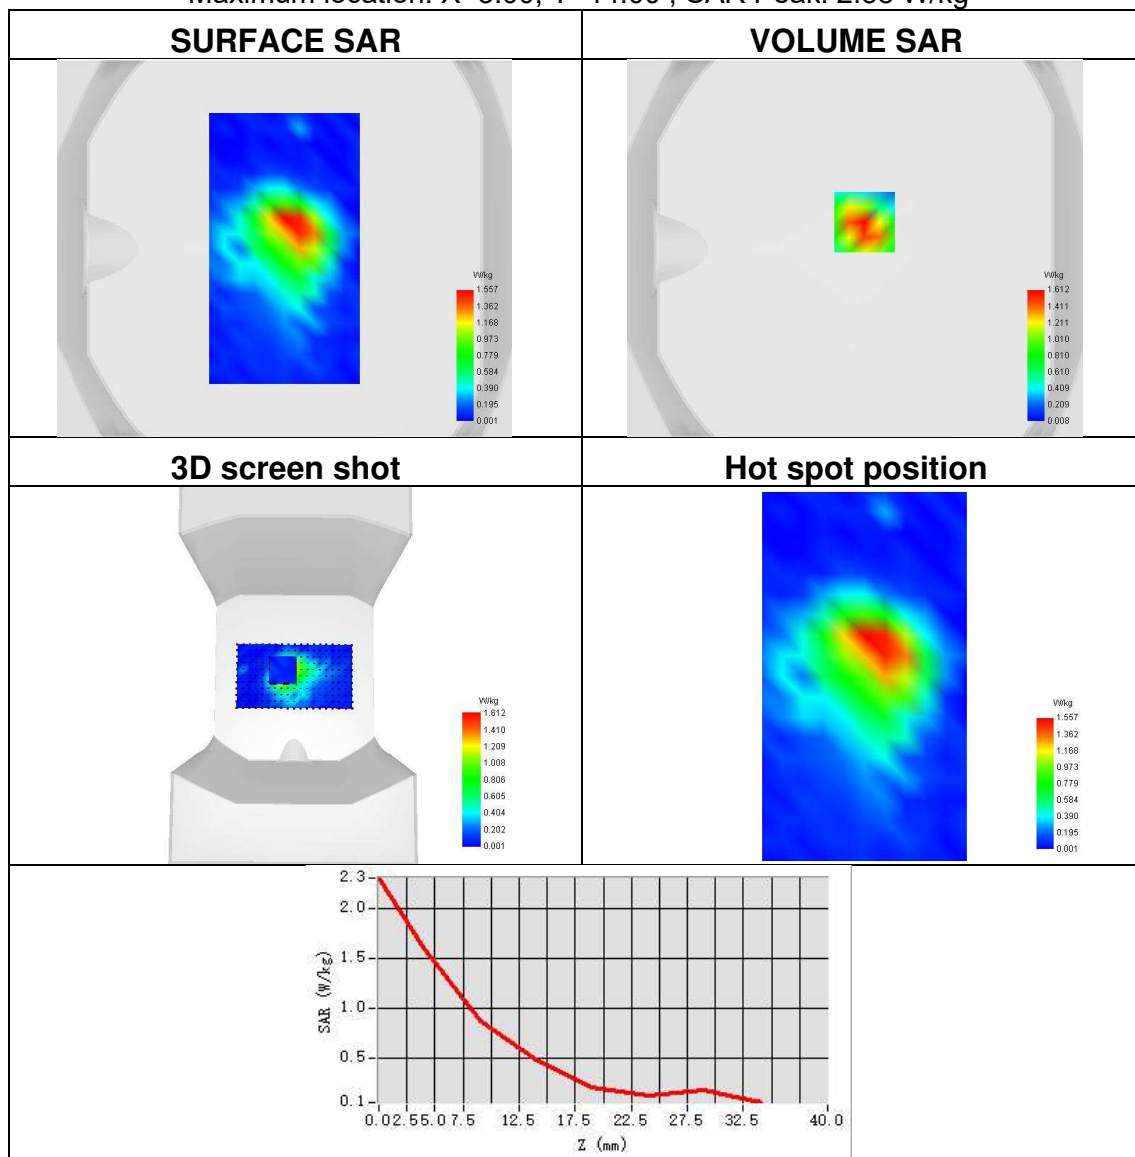




Plot 86:

Test Date	2025-03-31
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	Band 4 (1700)
Signal	WCDMA
Frequency	1740
SAR 10g (W/Kg)	0.701
SAR 1g (W/Kg)	1.325
ConvF	2.01
Relative permittivity	40.71
Conductivity (S/m)	1.43

Maximum location: X=2.00, Y=13.00 ; SAR Peak: 2.30 W/kg

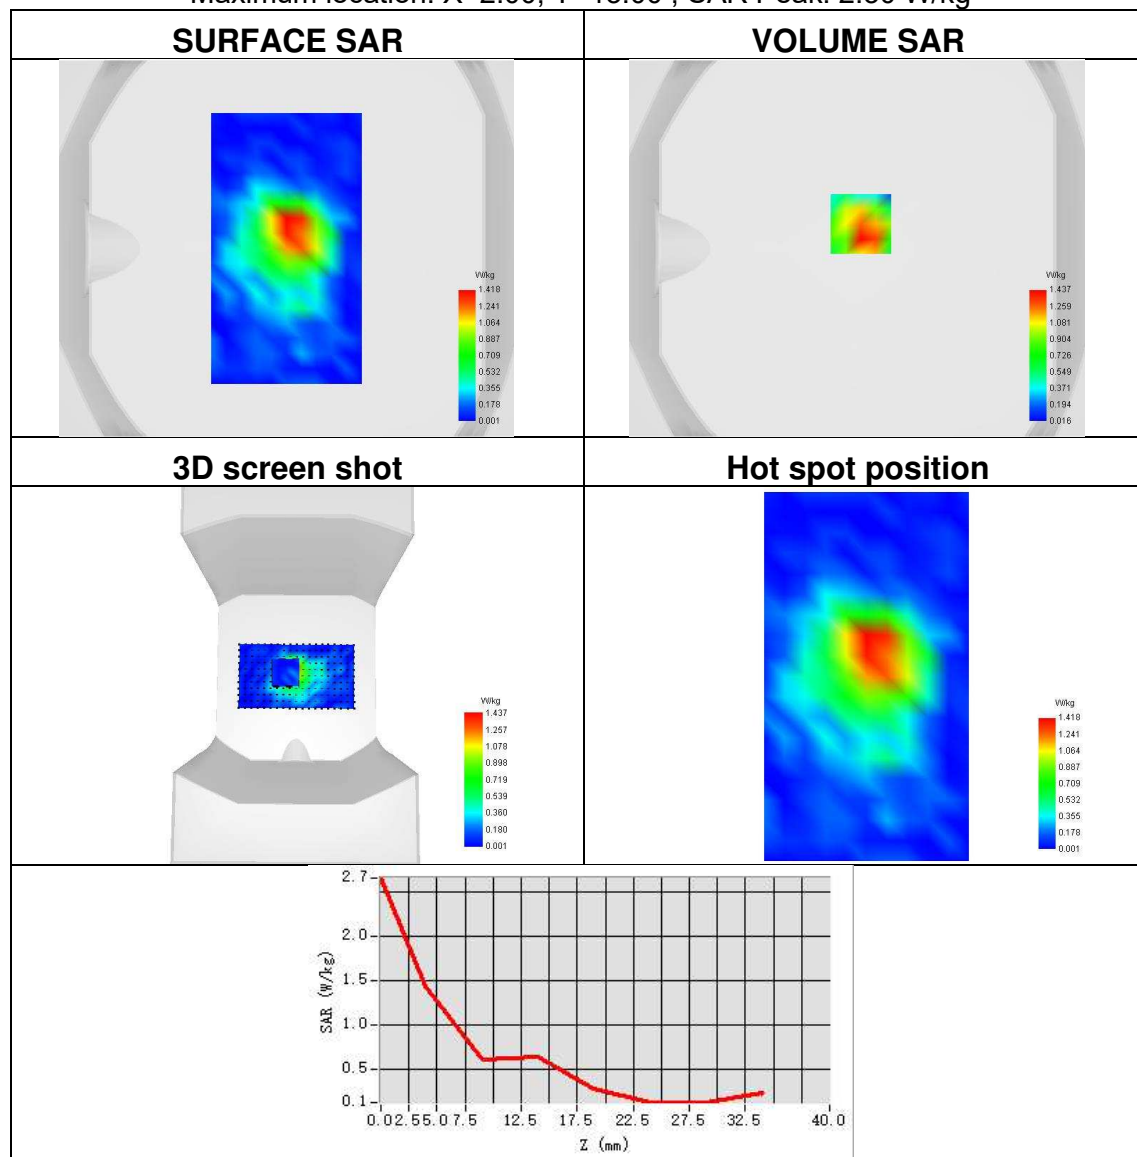




Plot 87:

Test Date	2025-03-19
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front Side
Band	Band 5 (850)
Signal	WCDMA
Frequency	826.4
SAR 10g (W/Kg)	0.612
SAR 1g (W/Kg)	1.134
ConvF	1.71
Relative permittivity	41.89
Conductivity (S/m)	0.91

Maximum location: X=22.00, Y=-49.00 ; SAR Peak: 1.96 W/kg

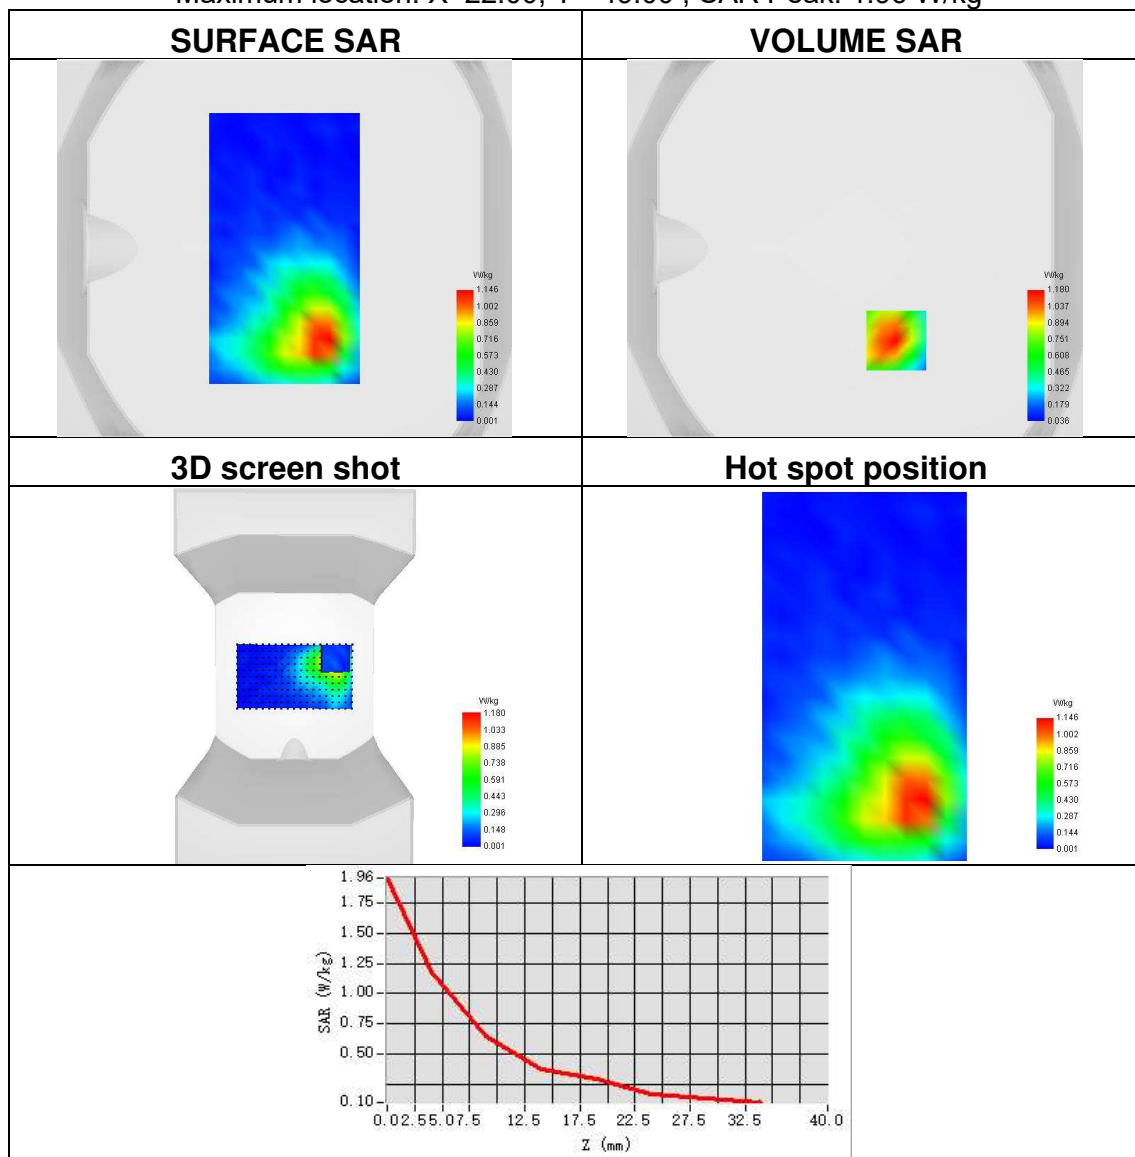




Plot 88:

Test Date	2025-04-18
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Top Side
Band	ISM
Signal	IEEE 802.11b
Frequency	2437
SAR 10g (W/Kg)	0.435
SAR 1g (W/Kg)	1.075
ConvF	2.26
Relative permittivity	40.10
Conductivity (S/m)	1.79

Maximum location: X=-1.00, Y=2.00 ; SAR Peak: 2.10 W/kg

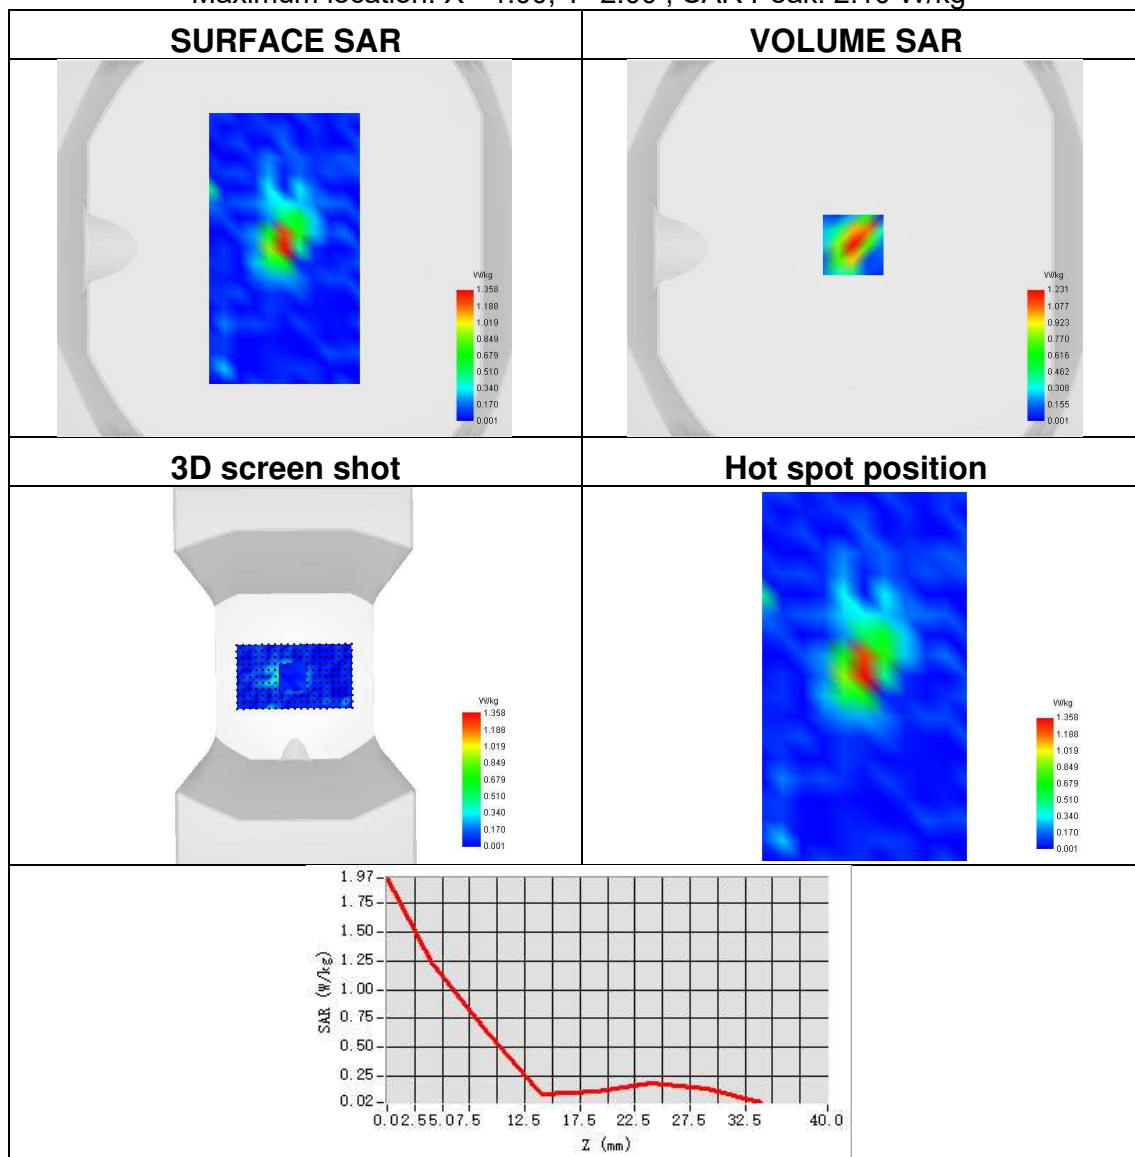




Plot 89:

Test Date	2025-04-19
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-1
Signal	IEEE 802.11a
Frequency	5200
SAR 10g (W/Kg)	0.885
SAR 1g (W/Kg)	2.997
ConvF	1.93
Relative permittivity	37.49
Conductivity (S/m)	4.63

Maximum location: X=1.00, Y=-9.00 ; SAR Peak: 8.81 W/kg

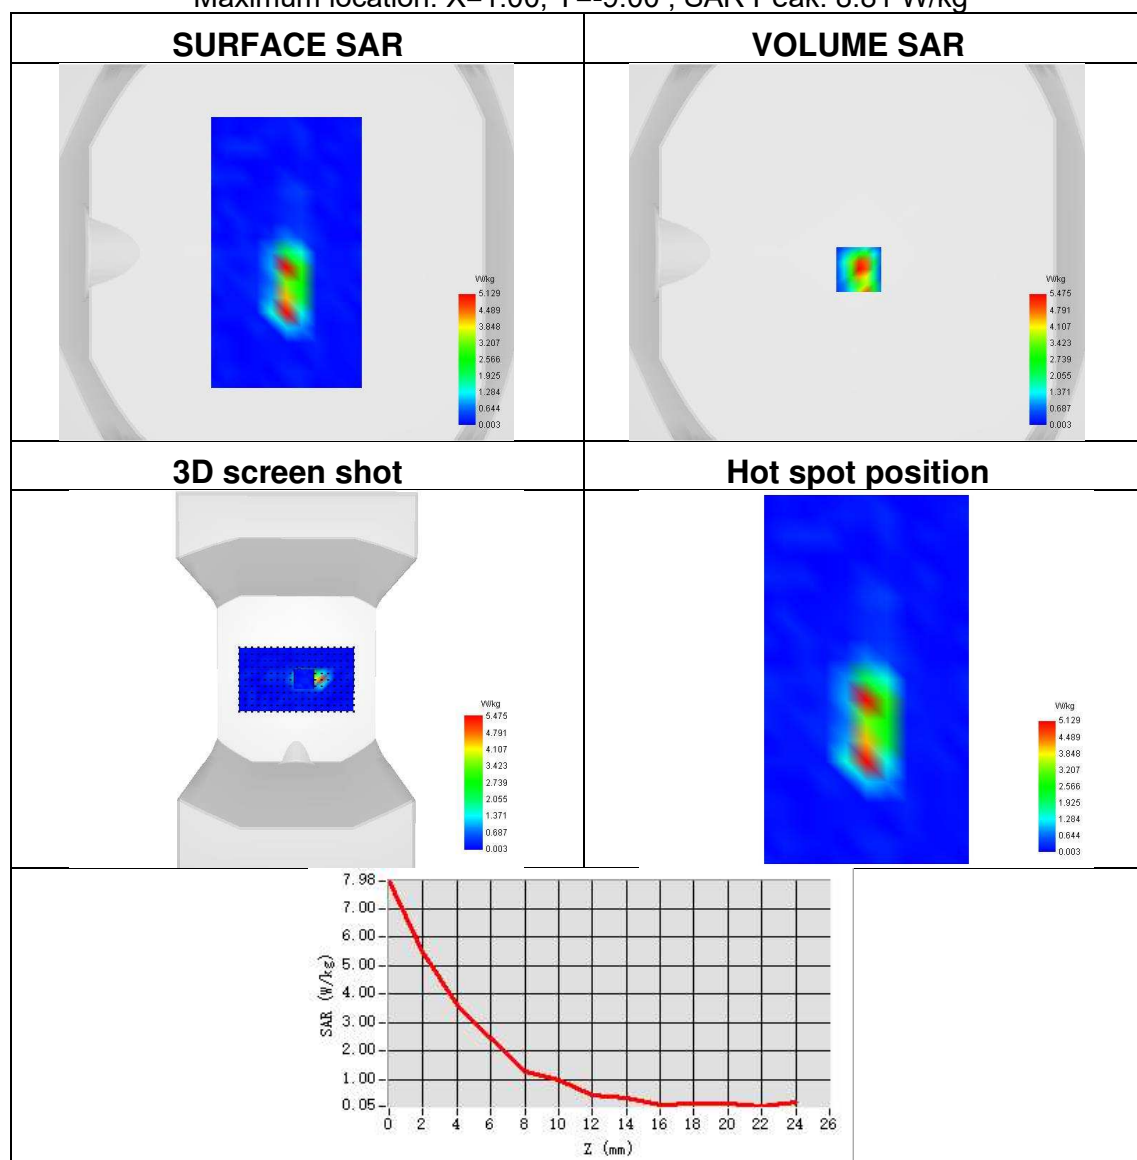




Plot 90:

Test Date	2025-04-19
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-2a
Signal	IEEE 802.11a
Frequency	5260
SAR 10g (W/Kg)	1.014
SAR 1g (W/Kg)	3.398
ConvF	1.83
Relative permittivity	36.49
Conductivity (S/m)	4.83

Maximum location: X=7.00, Y=-9.00 ; SAR Peak: 13.53 W/kg

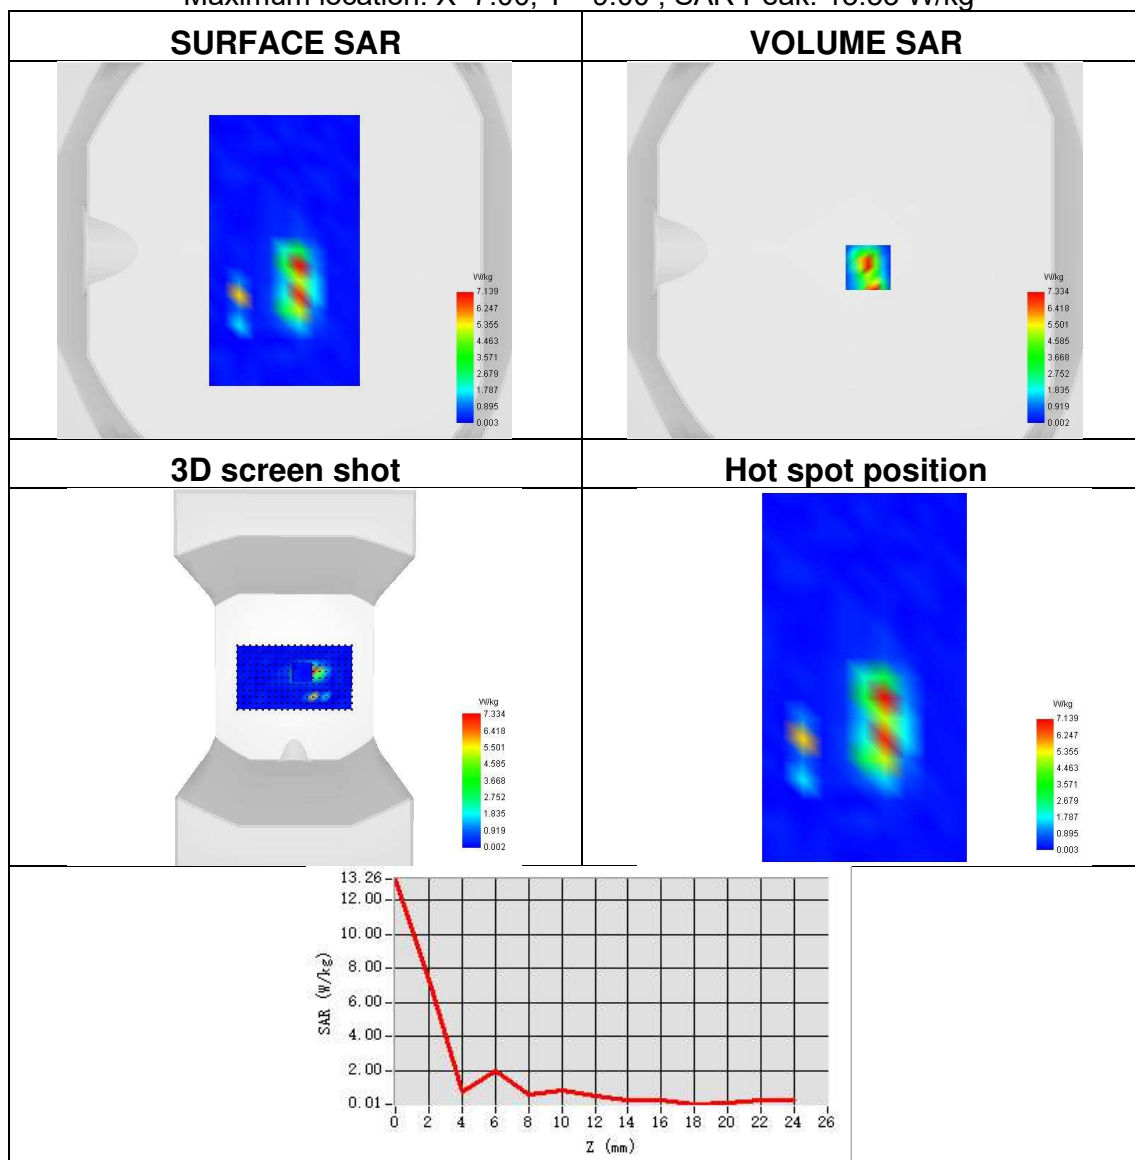




Plot 91:

Test Date	2025-04-20
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-2c
Signal	IEEE 802.11a
Frequency	5700
SAR 10g (W/Kg)	1.120
SAR 1g (W/Kg)	3.691
ConvF	1.74
Relative permittivity	36.85
Conductivity (S/m)	5.01

Maximum location: X=1.00, Y=-25.00 ; SAR Peak: 13.35 W/kg

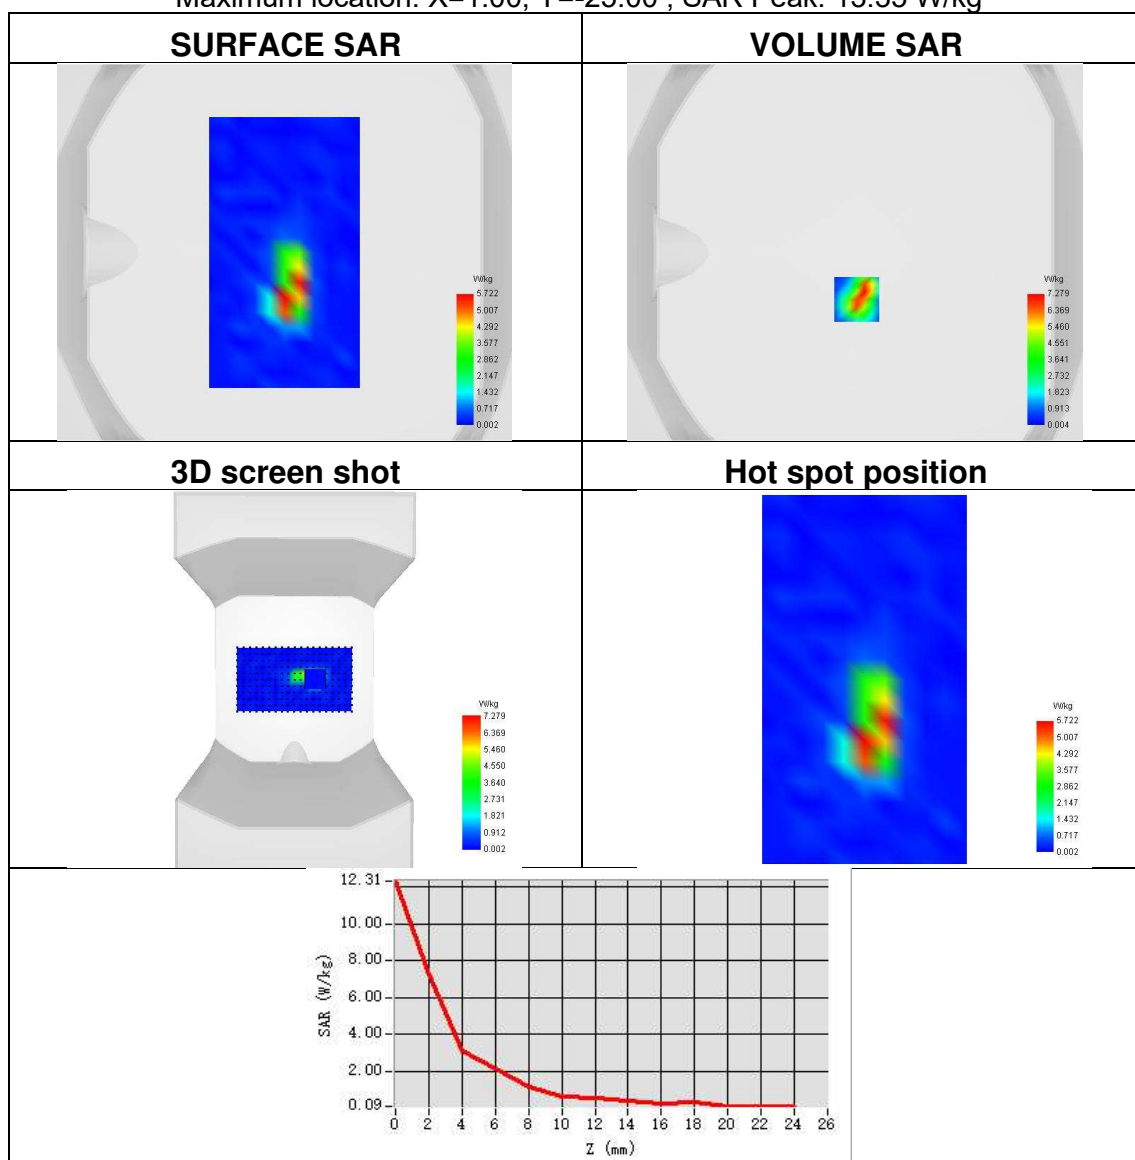




Plot 92:

Test Date	2025-04-20
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-3
Signal	IEEE 802.11a
Frequency	5745
SAR 10g (W/Kg)	1.119
SAR 1g (W/Kg)	3.686
ConvF	1.73
Relative permittivity	36.11
Conductivity (S/m)	5.26

Maximum location: X=0.00, Y=-25.00 ; SAR Peak: 13.80 W/kg

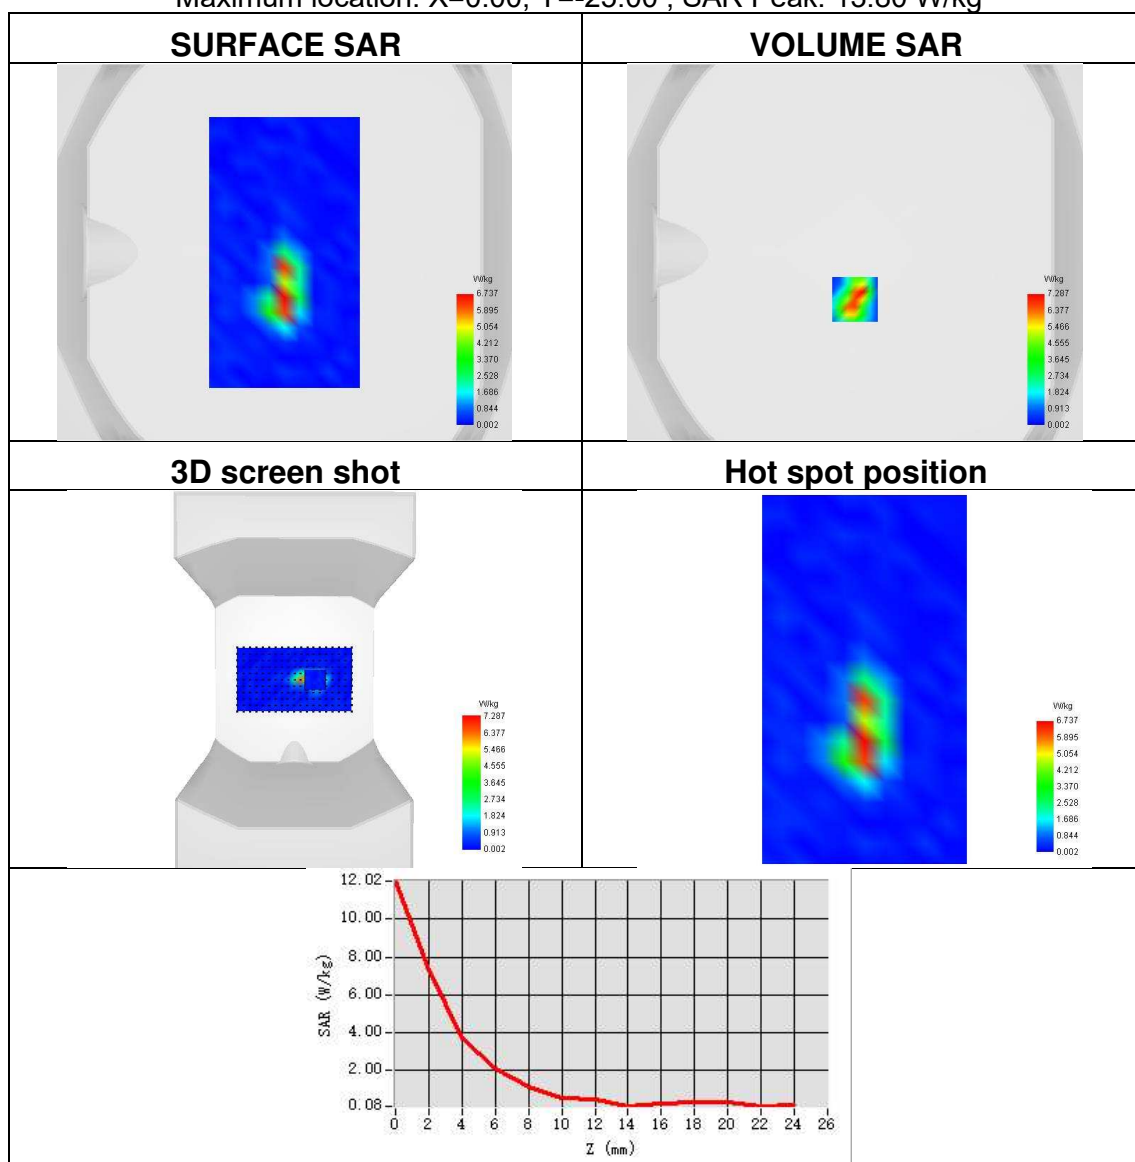




Plot 93:

Test Date	2025-04-14
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 2
Signal	LTE FDD
Frequency	1800
SAR 10g (W/Kg)	0.657
SAR 1g (W/Kg)	1.237
ConvF	2.21
Relative permittivity	40.56
Conductivity (S/m)	1.43

Maximum location: X=15.00, Y=7.00 ; SAR Peak: 2.07 W/kg

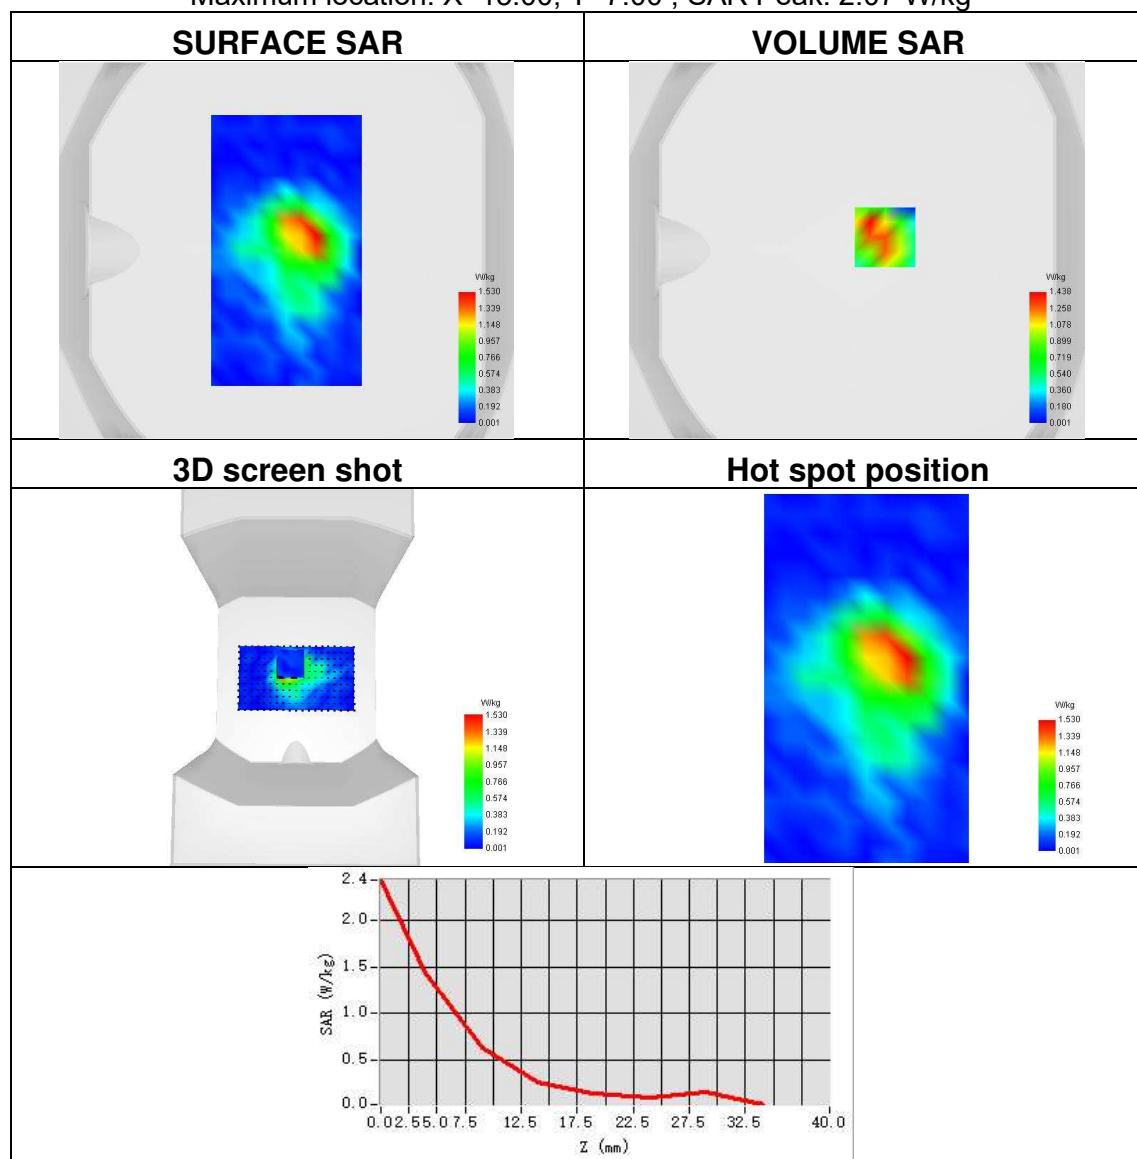




Plot 94:

Test Date	2025-03-30
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 4
Signal	LTE FDD
Frequency	1720
SAR 10g (W/Kg)	0.847
SAR 1g (W/Kg)	1.589
ConvF	2.01
Relative permittivity	40.73
Conductivity (S/m)	1.42

Maximum location: X=9.00, Y=9.00 ; SAR Peak: 2.82 W/kg

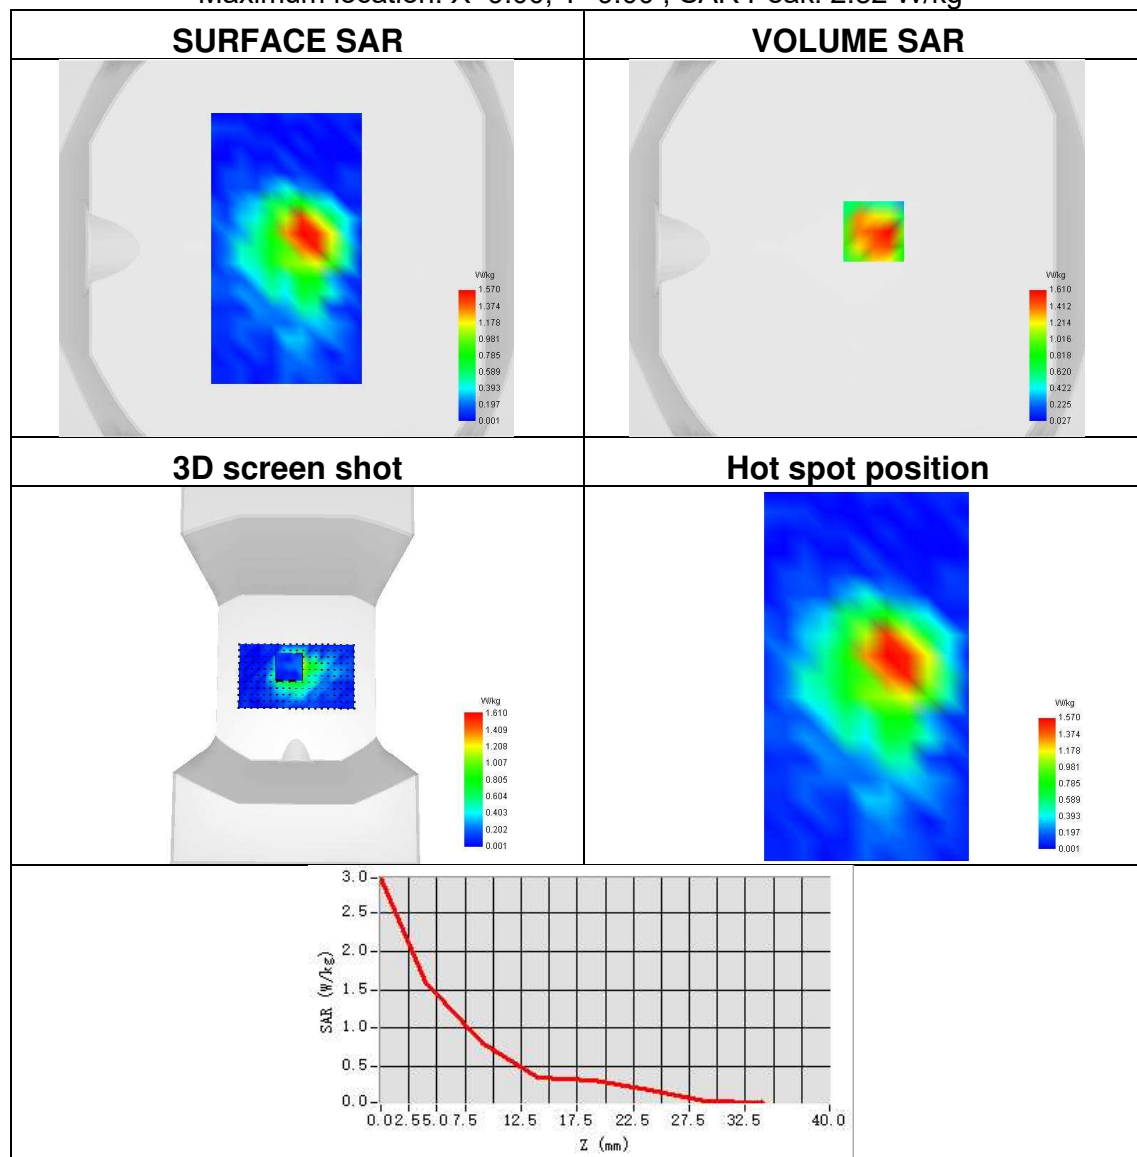




Plot 95:

Test Date	2025-04-03
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	LTE band 5
Signal	LTE FDD
Frequency	836.5
SAR 10g (W/Kg)	0.712
SAR 1g (W/Kg)	1.304
ConvF	1.71
Relative permittivity	42.24
Conductivity (S/m)	0.86

Maximum location: X=26.00, Y=-30.00 ; SAR Peak: 2.21 W/kg

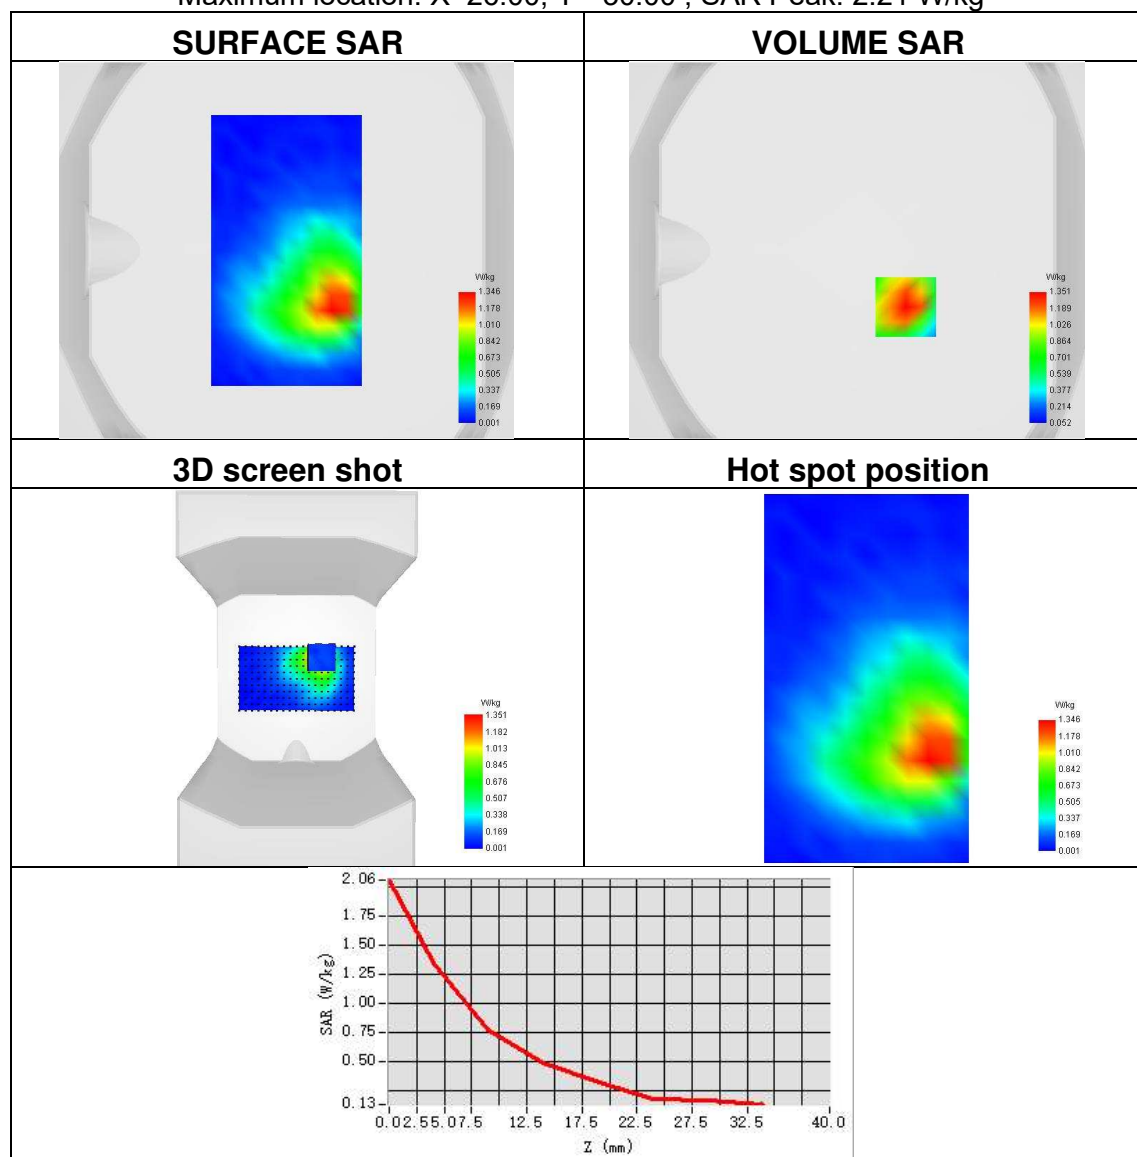




Plot 96:

Test Date	2025-04-06
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 7
Signal	LTE FDD
Frequency	2510
SAR 10g (W/Kg)	0.769
SAR 1g (W/Kg)	1.681
ConvF	2.10
Relative permittivity	39.14
Conductivity (S/m)	1.93

Maximum location: X=9.00, Y=18.00 ; SAR Peak: 2.90 W/kg

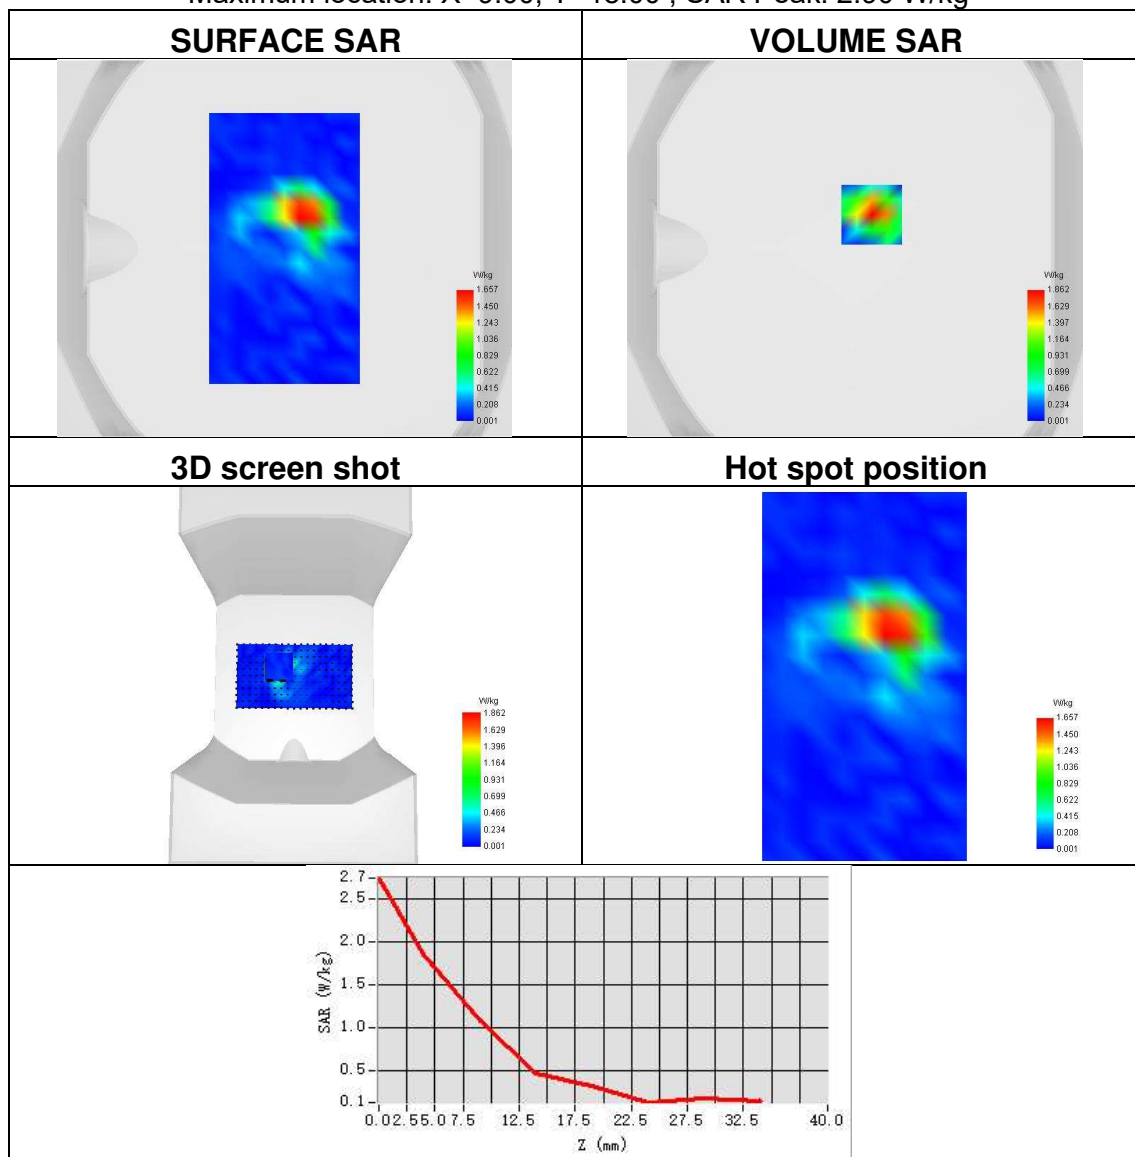




Plot 97:

Test Date	2025-03-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	LTE band 12
Signal	LTE FDD
Frequency	707.5
SAR 10g (W/Kg)	0.707
SAR 1g (W/Kg)	1.324
ConvF	1.70
Relative permittivity	42.90
Conductivity (S/m)	0.92

Maximum location: X=24.00, Y=-46.00 ; SAR Peak: 2.07 W/kg

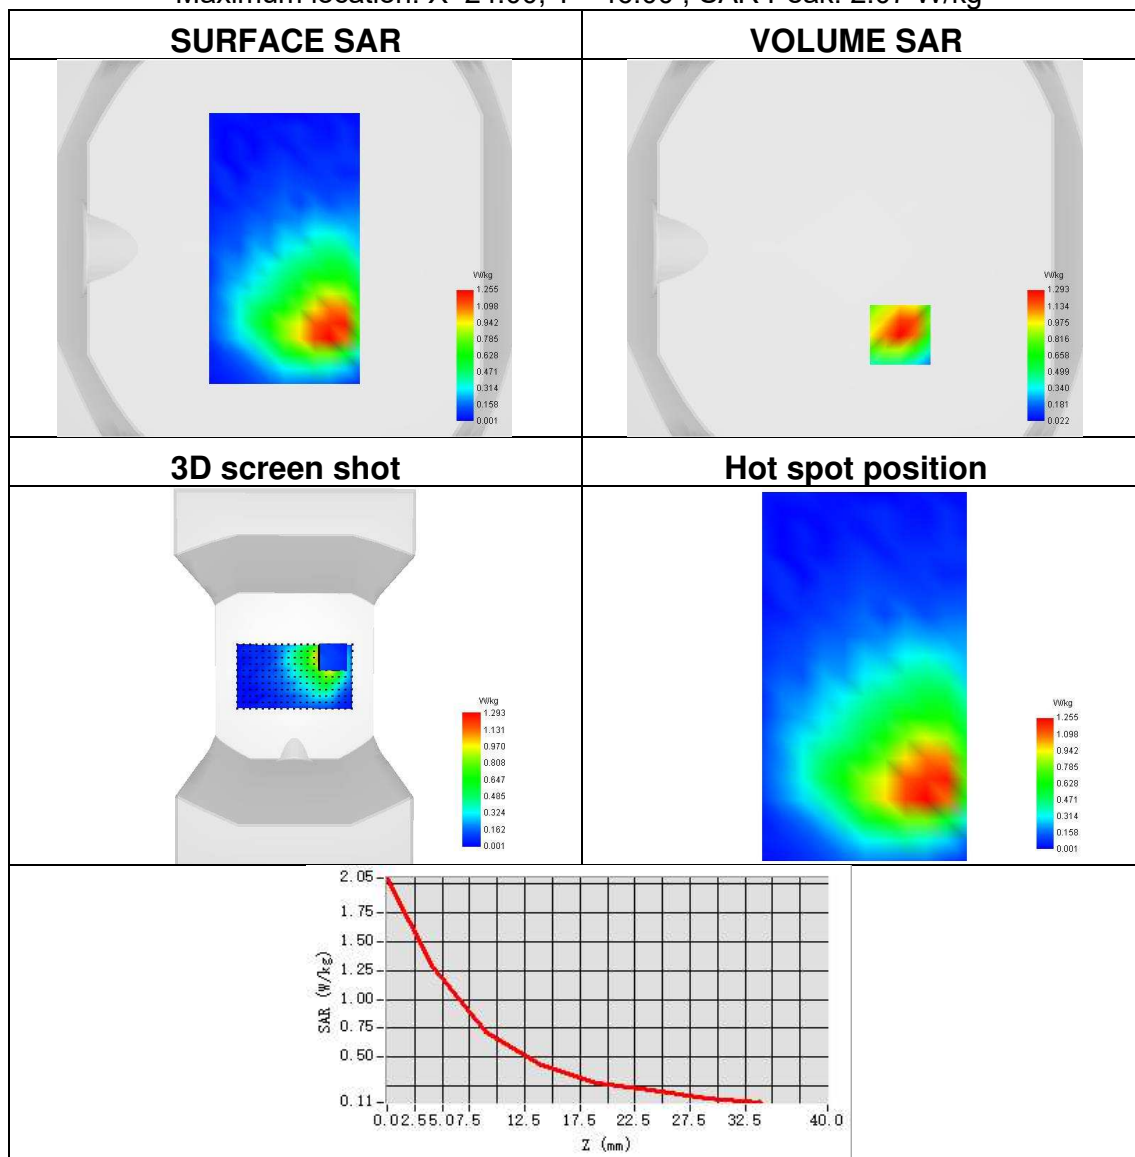




Plot 98:

Test Date	2025-04-07
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	LTE band 14
Signal	LTE FDD
Frequency	793
SAR 10g (W/Kg)	0.432
SAR 1g (W/Kg)	0.758
ConvF	1.70
Relative permittivity	41.92
Conductivity (S/m)	0.85

Maximum location: X=19.00, Y=-47.00 ; SAR Peak: 1.18 W/kg

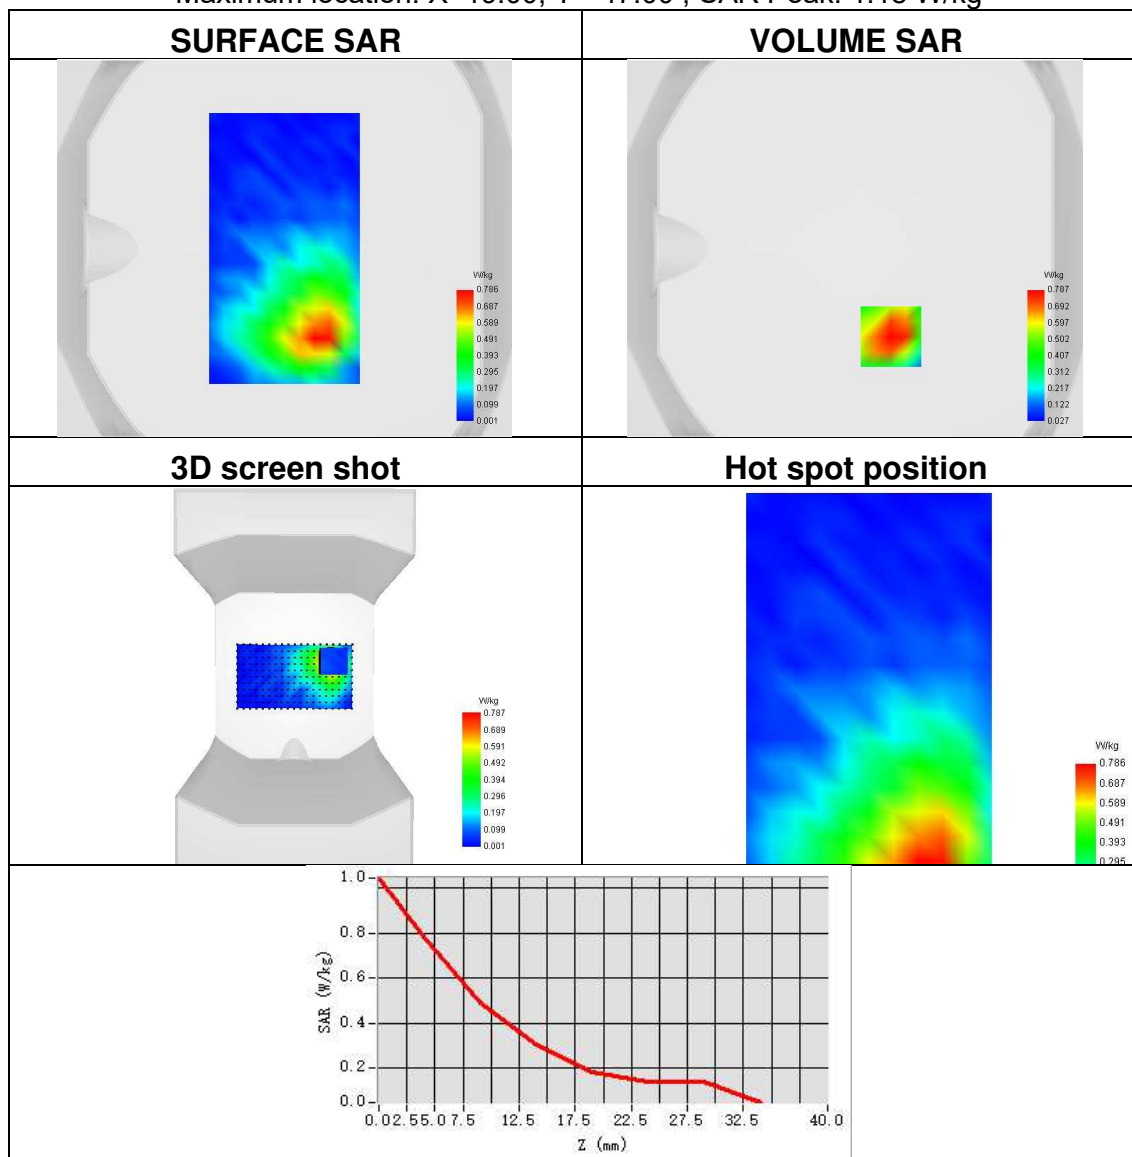




Plot 99:

Test Date	2025-04-15
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	LTE band 17
Signal	LTE FDD
Frequency	711
SAR 10g (W/Kg)	0.741
SAR 1g (W/Kg)	1.373
ConvF	1.70
Relative permittivity	42.17
Conductivity (S/m)	0.86

Maximum location: X=13.00, Y=-40.00 ; SAR Peak: 2.18 W/kg

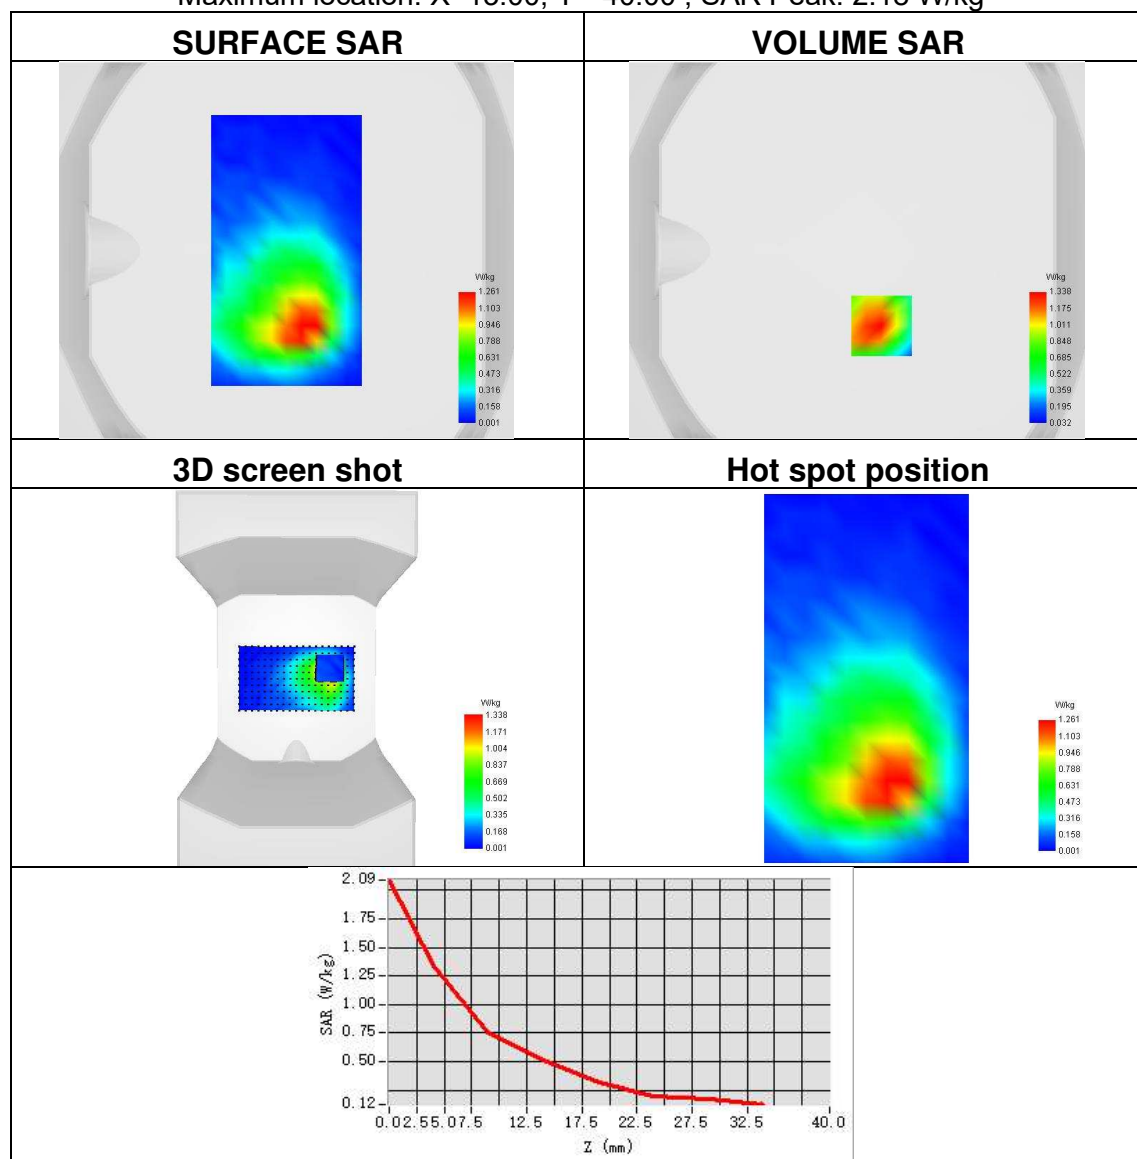




Plot 100:

Test Date	2025-04-02
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	LTE band 30
Signal	LTE FDD
Frequency	2310
SAR 10g (W/Kg)	0.465
SAR 1g (W/Kg)	0.925
ConvF	2.45
Relative permittivity	40.64
Conductivity (S/m)	1.64

Maximum location: X=-8.00, Y=32.00 ; SAR Peak: 1.63 W/kg

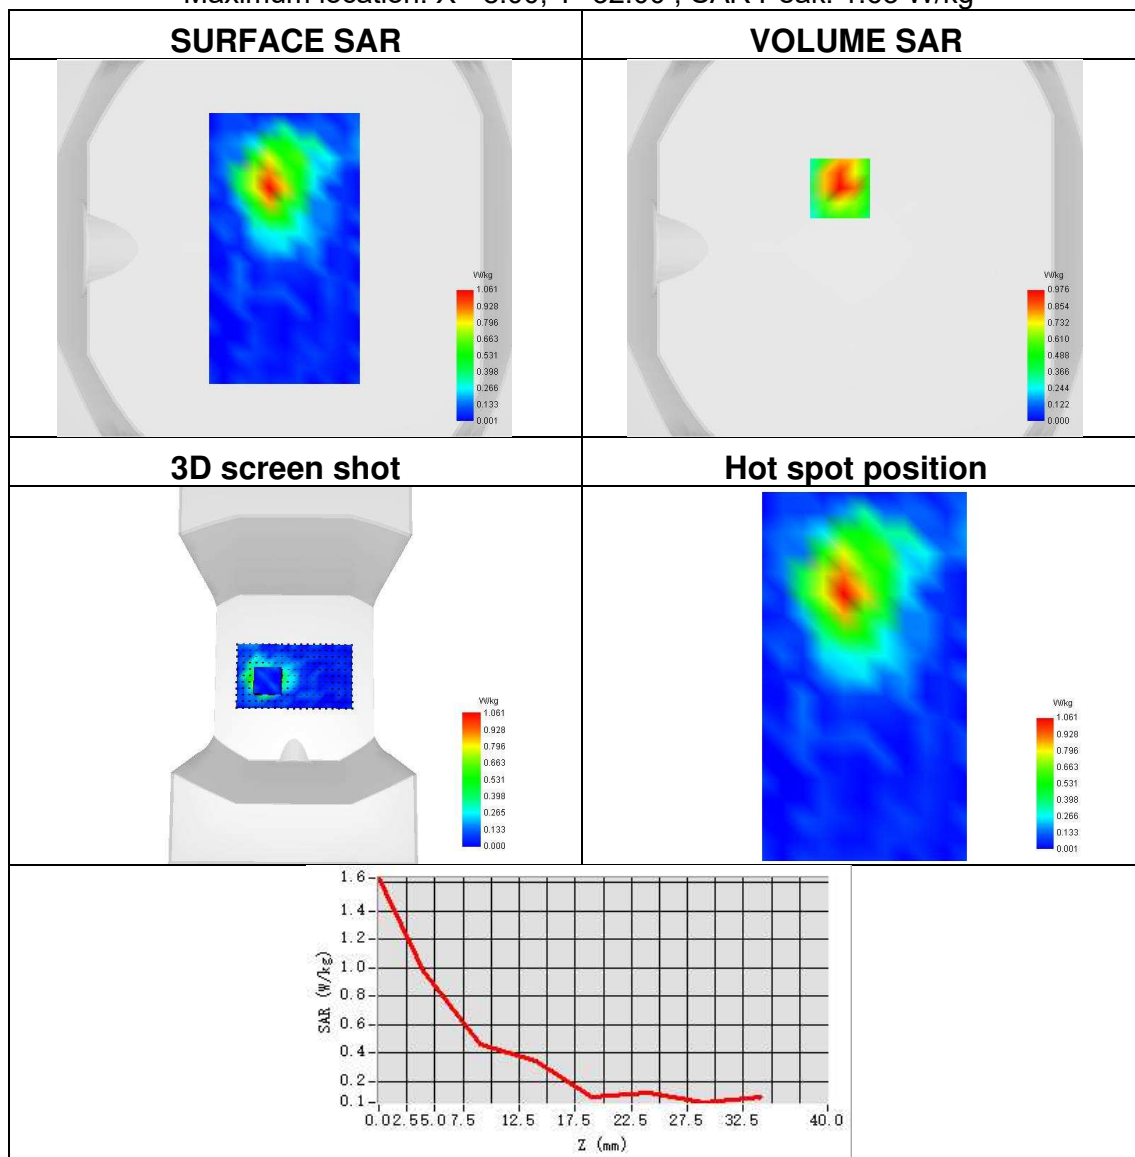




Plot 101:

Test Date	2025-04-10
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	LTE band 38
Signal	LTE TDD
Frequency	2610
SAR 10g (W/Kg)	0.965
SAR 1g (W/Kg)	2.145
ConvF	2.10
Relative permittivity	39.55
Conductivity (S/m)	1.95

Maximum location: X=-16.00, Y=10.00 ; SAR Peak: 4.06 W/kg

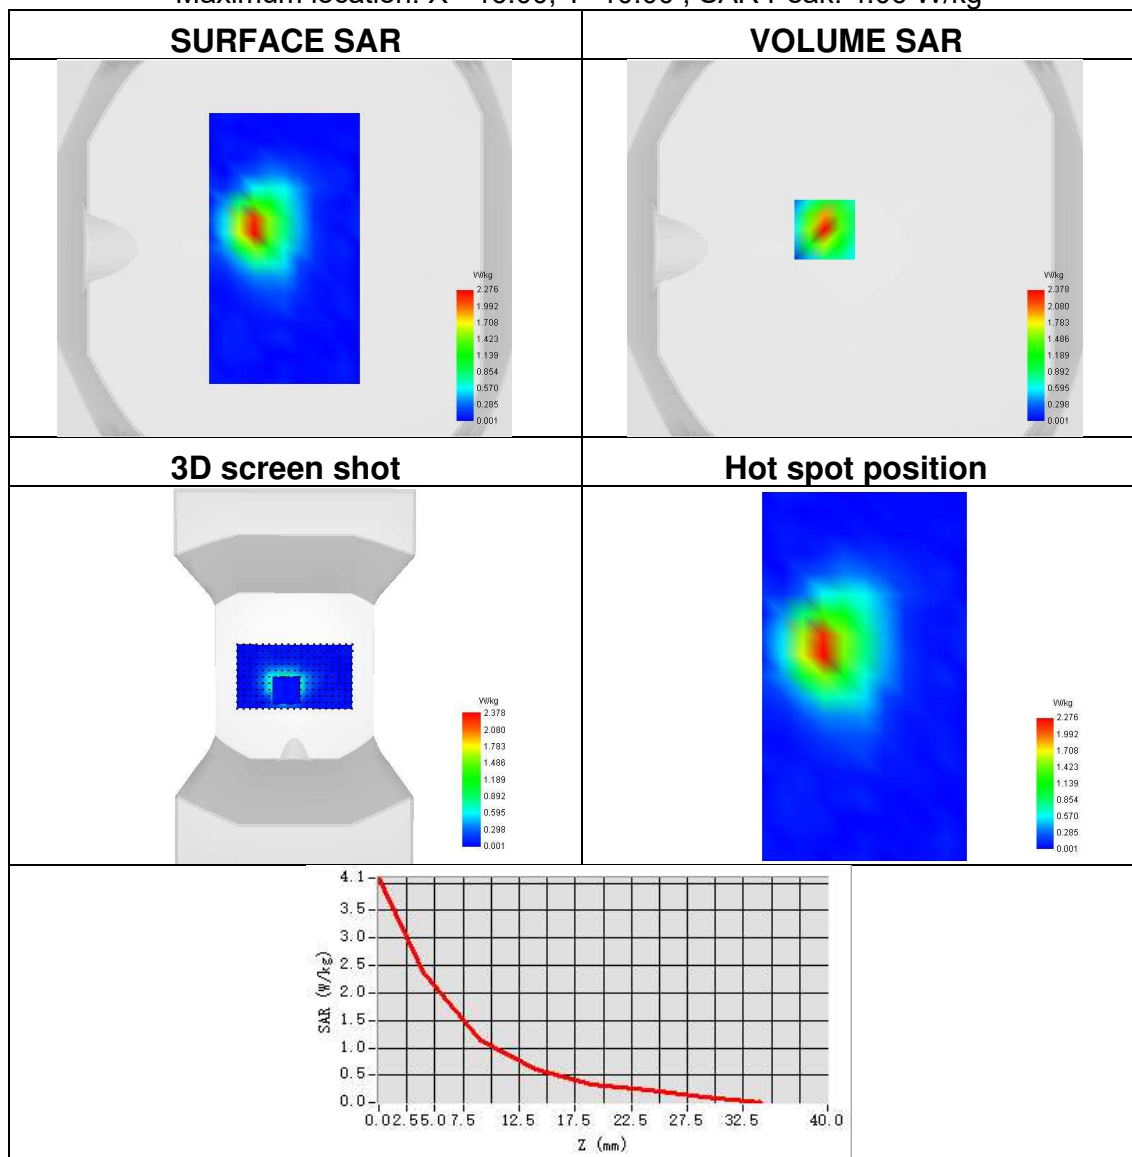




Plot 102:

Test Date	2025-04-17
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	LTE band 41
Signal	LTE TDD
Frequency	2680
SAR 10g (W/Kg)	0.666
SAR 1g (W/Kg)	1.485
ConvF	2.10
Relative permittivity	40.13
Conductivity (S/m)	1.90

Maximum location: X=-16.00, Y=9.00 ; SAR Peak: 2.79 W/kg

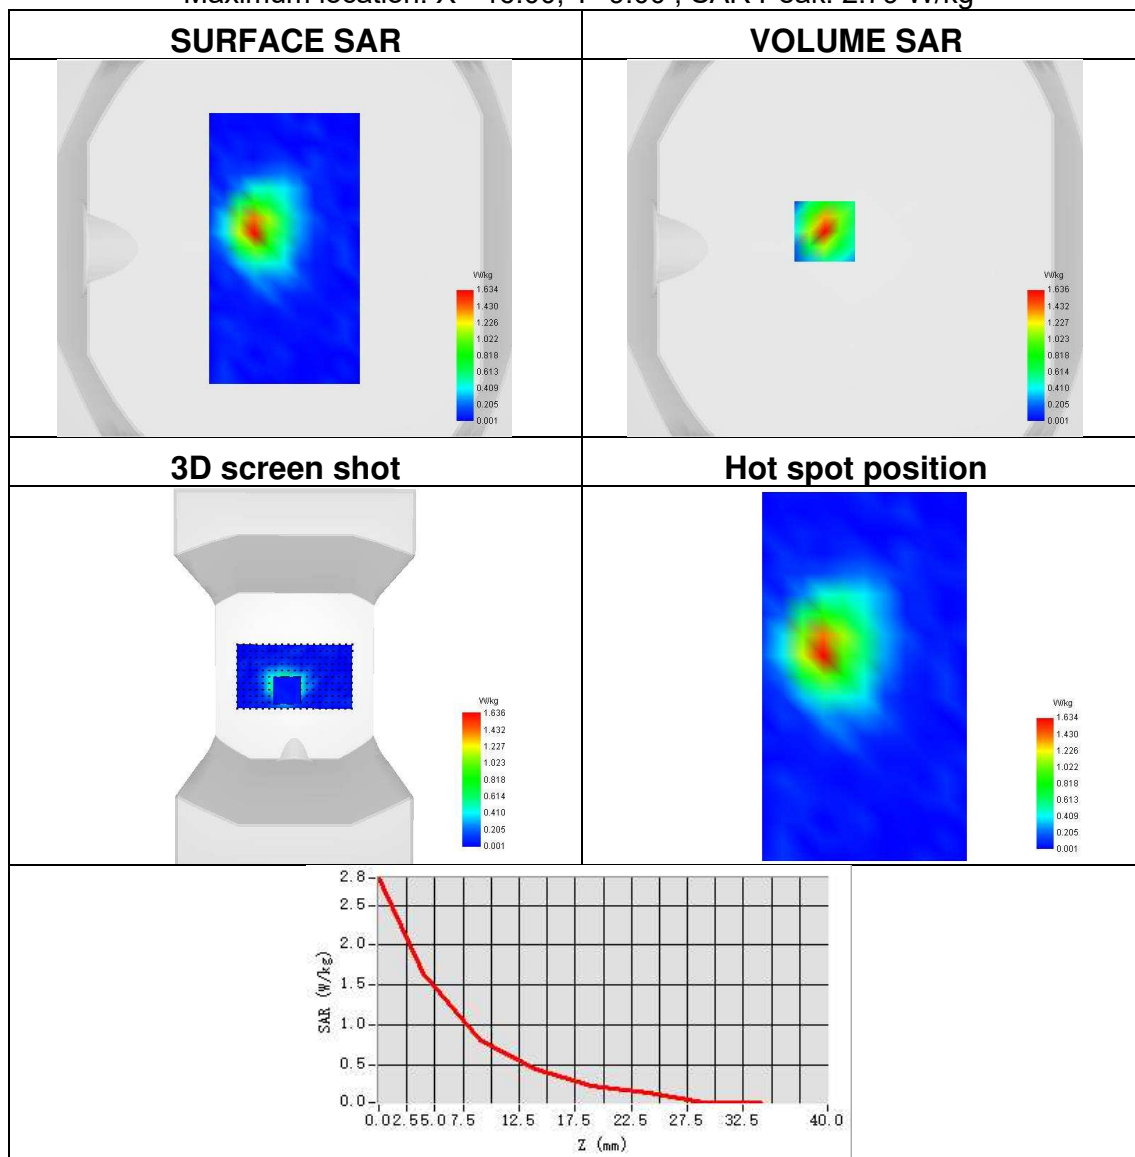




Plot 103:

Test Date	2025-03-30
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	LTE band 66
Signal	LTE FDD
Frequency	1720
SAR 10g (W/Kg)	0.437
SAR 1g (W/Kg)	0.951
ConvF	2.01
Relative permittivity	40.73
Conductivity (S/m)	1.42

Maximum location: X=-9.00, Y=22.00 ; SAR Peak: 1.78 W/kg

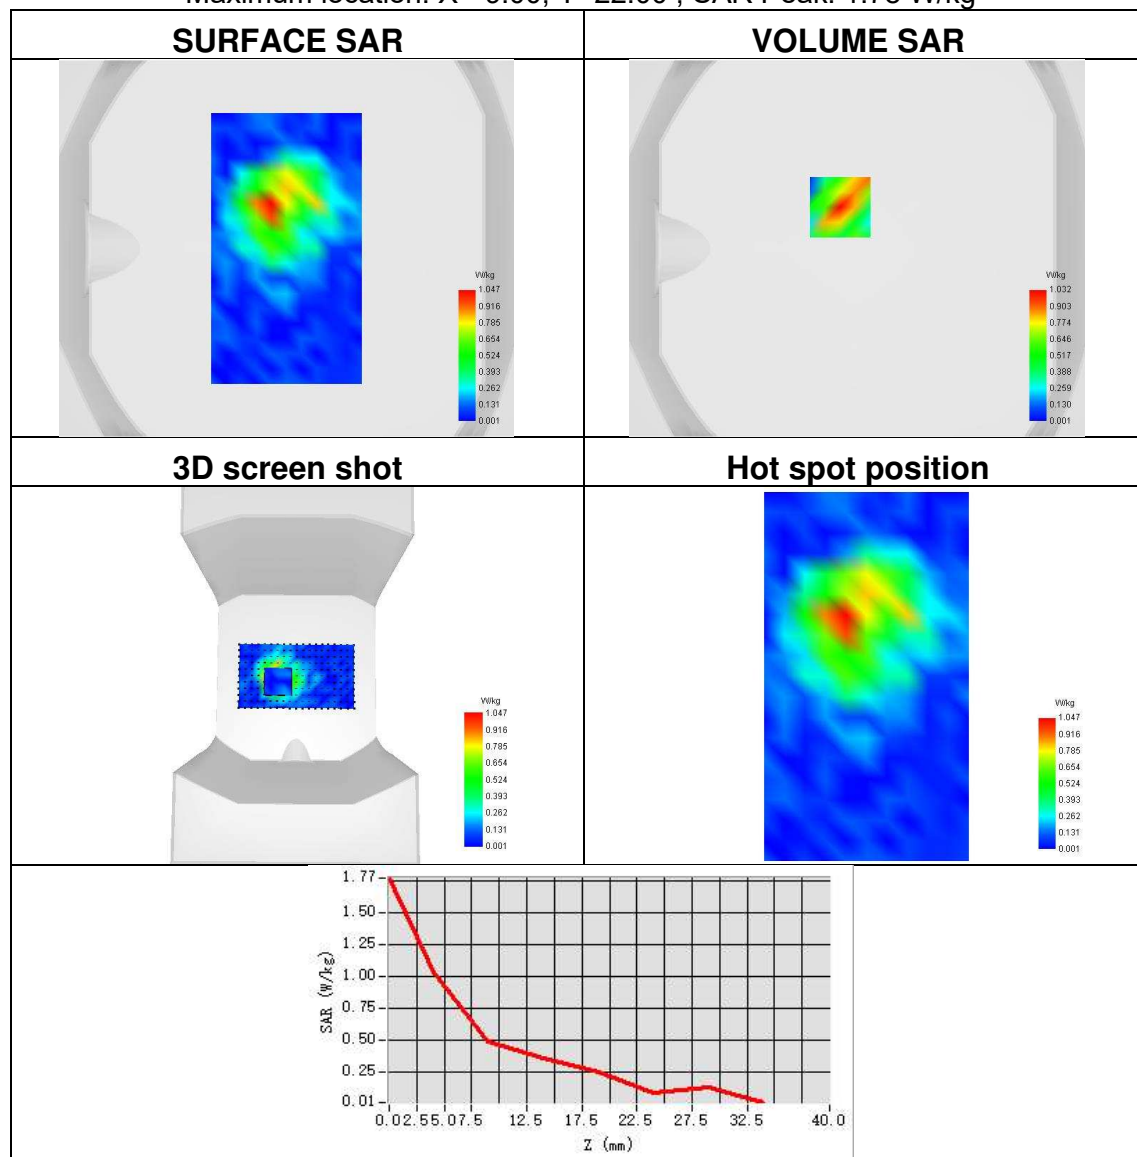




Plot 104:

Test Date	2025-03-22
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	LTE band 71
Signal	LTE FDD
Frequency	673
SAR 10g (W/Kg)	0.611
SAR 1g (W/Kg)	1.095
ConvF	1.70
Relative permittivity	42.11
Conductivity (S/m)	0.87

Maximum location: X=9.00, Y=-42.00 ; SAR Peak: 1.74 W/kg

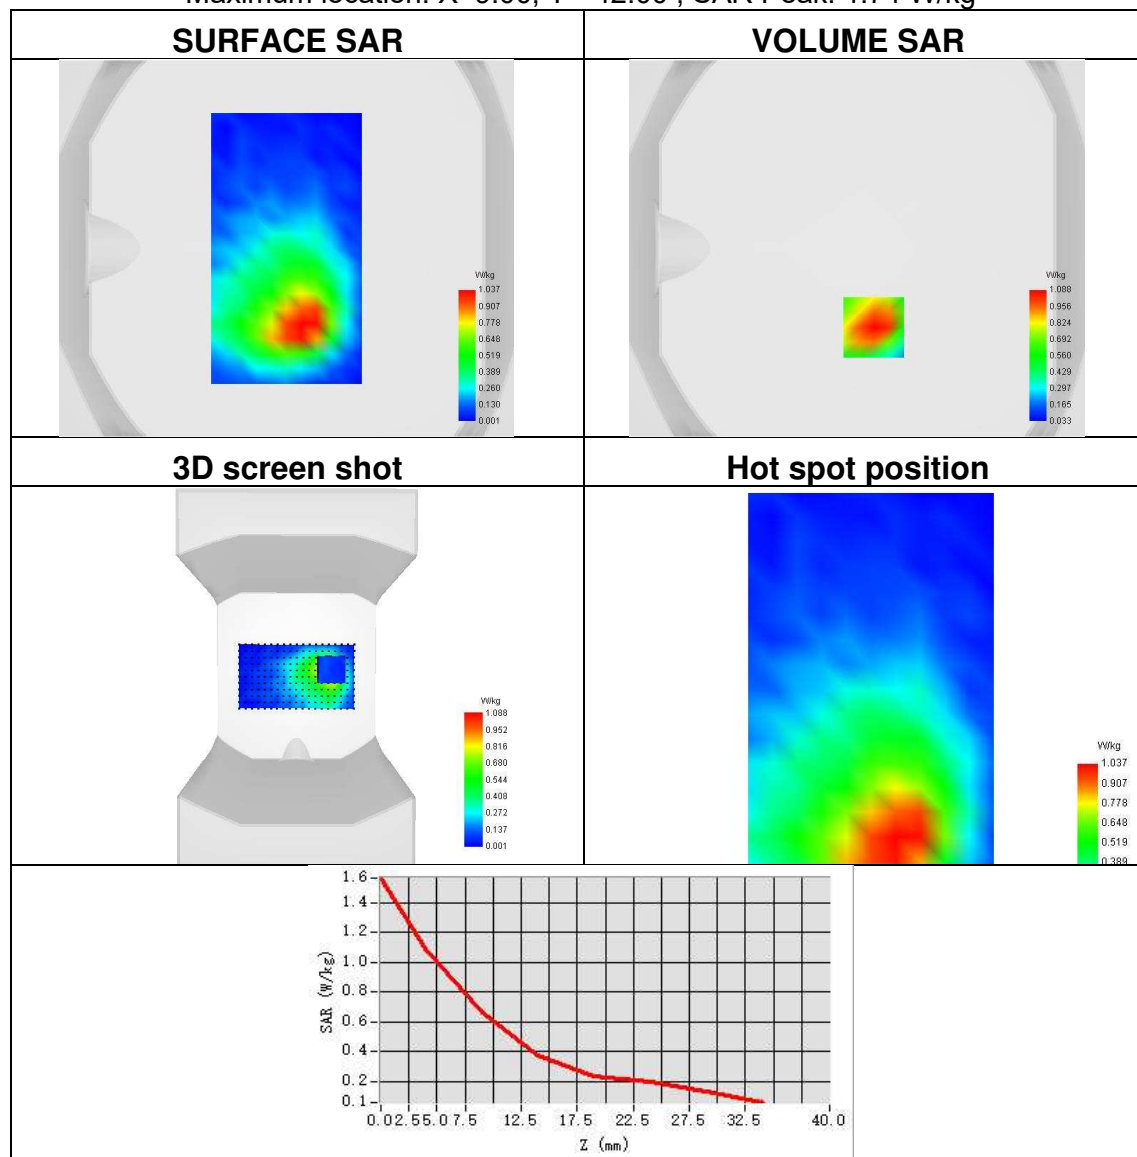




Plot 105:

Test Date	2025-04-01
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	SA NR band 2
Signal	SA NR FDD
Frequency	1880
SAR 10g (W/Kg)	0.697
SAR 1g (W/Kg)	1.513
ConvF	2.21
Relative permittivity	40.61
Conductivity (S/m)	1.38

Maximum location: X=14.00, Y=9.00 ; SAR Peak: 3.41 W/kg

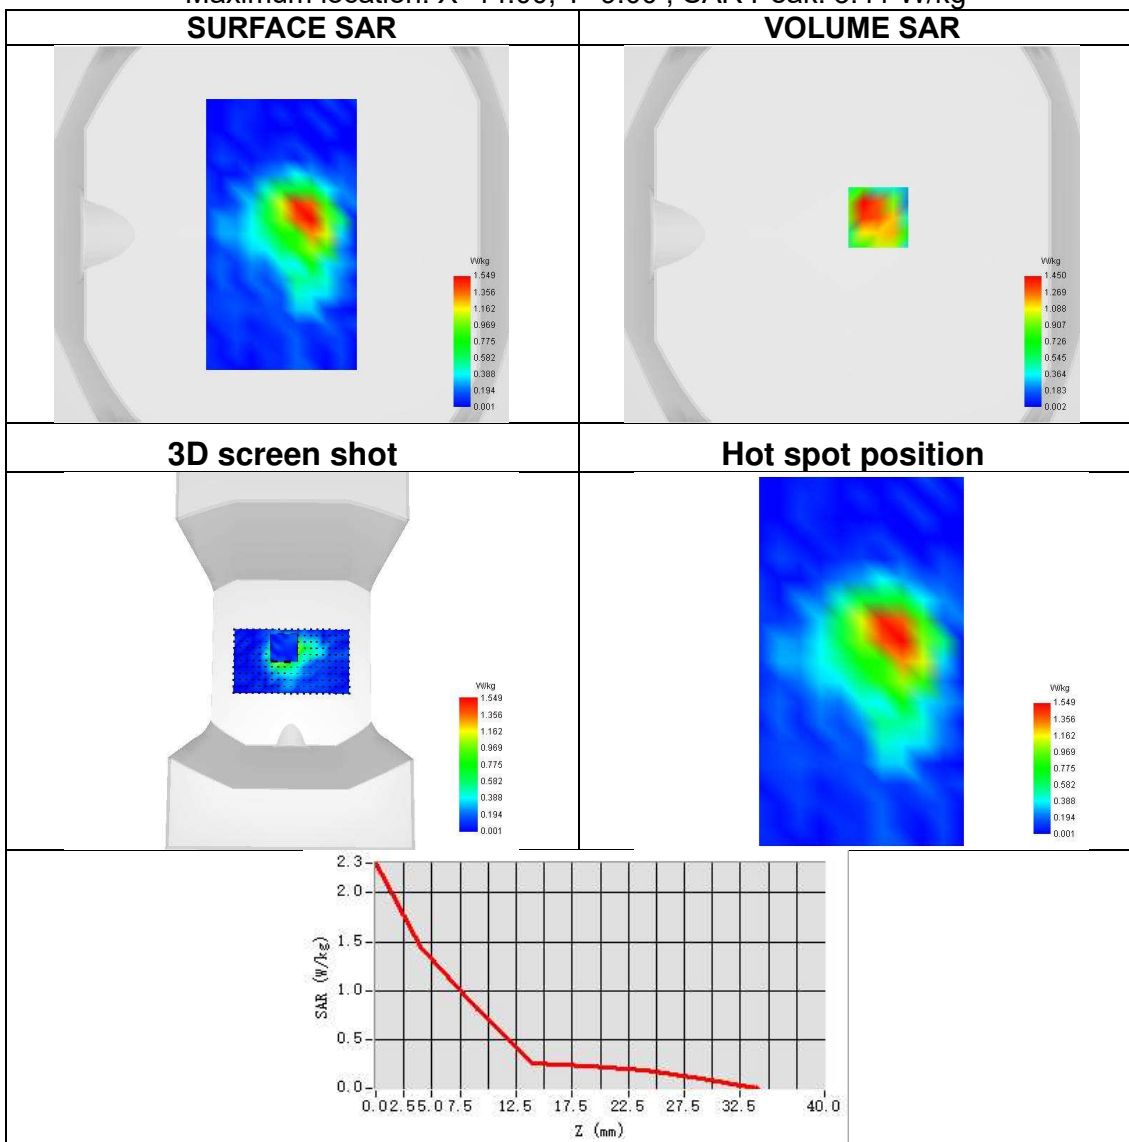




Plot 106:

Test Date	2025-03-19
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	SA NR band 5
Signal	SA NR FDD
Frequency	834
SAR 10g (W/Kg)	0.398
SAR 1g (W/Kg)	0.761
ConvF	1.71
Relative permittivity	41.89
Conductivity (S/m)	0.91

Maximum location: X=16.00, Y=-38.00 ; SAR Peak: 1.33 W/kg

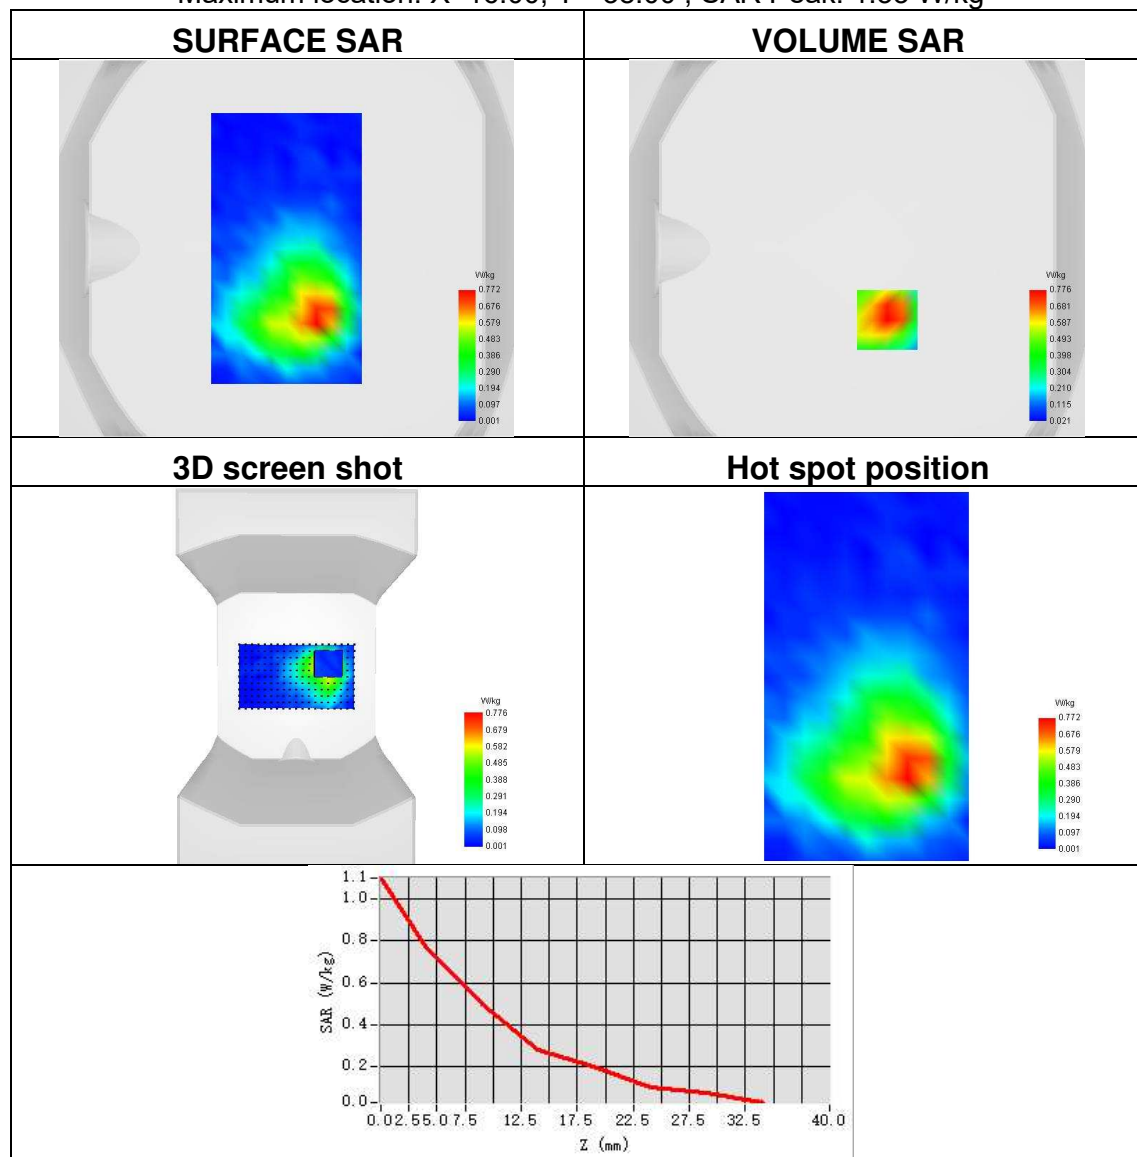




Plot 107:

Test Date	2025-04-06
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	SA NR band 7
Signal	SA NR FDD
Frequency	2510
SAR 10g (W/Kg)	0.506
SAR 1g (W/Kg)	1.204
ConvF	2.10
Relative permittivity	39.14
Conductivity (S/m)	1.93

Maximum location: X=9.00, Y=30.00 ; SAR Peak: 2.42 W/kg

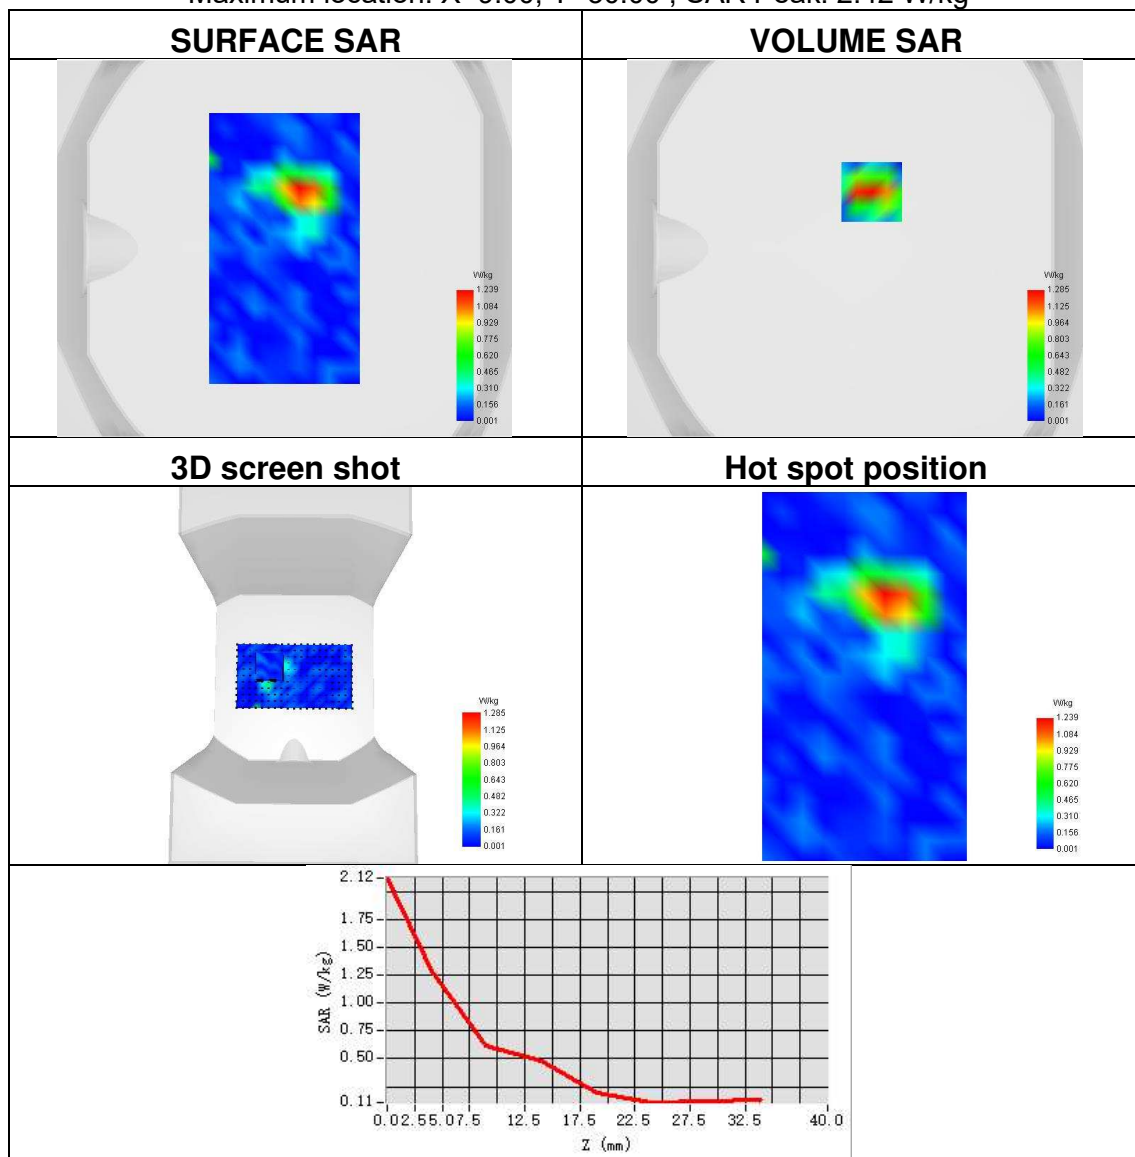




Plot 108:

Test Date	2025-03-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	SA NR band 12
Signal	SA NR FDD
Frequency	707.5
SAR 10g (W/Kg)	0.588
SAR 1g (W/Kg)	1.096
ConvF	1.70
Relative permittivity	42.90
Conductivity (S/m)	0.92

Maximum location: X=6.00, Y=-24.00 ; SAR Peak: 1.83 W/kg

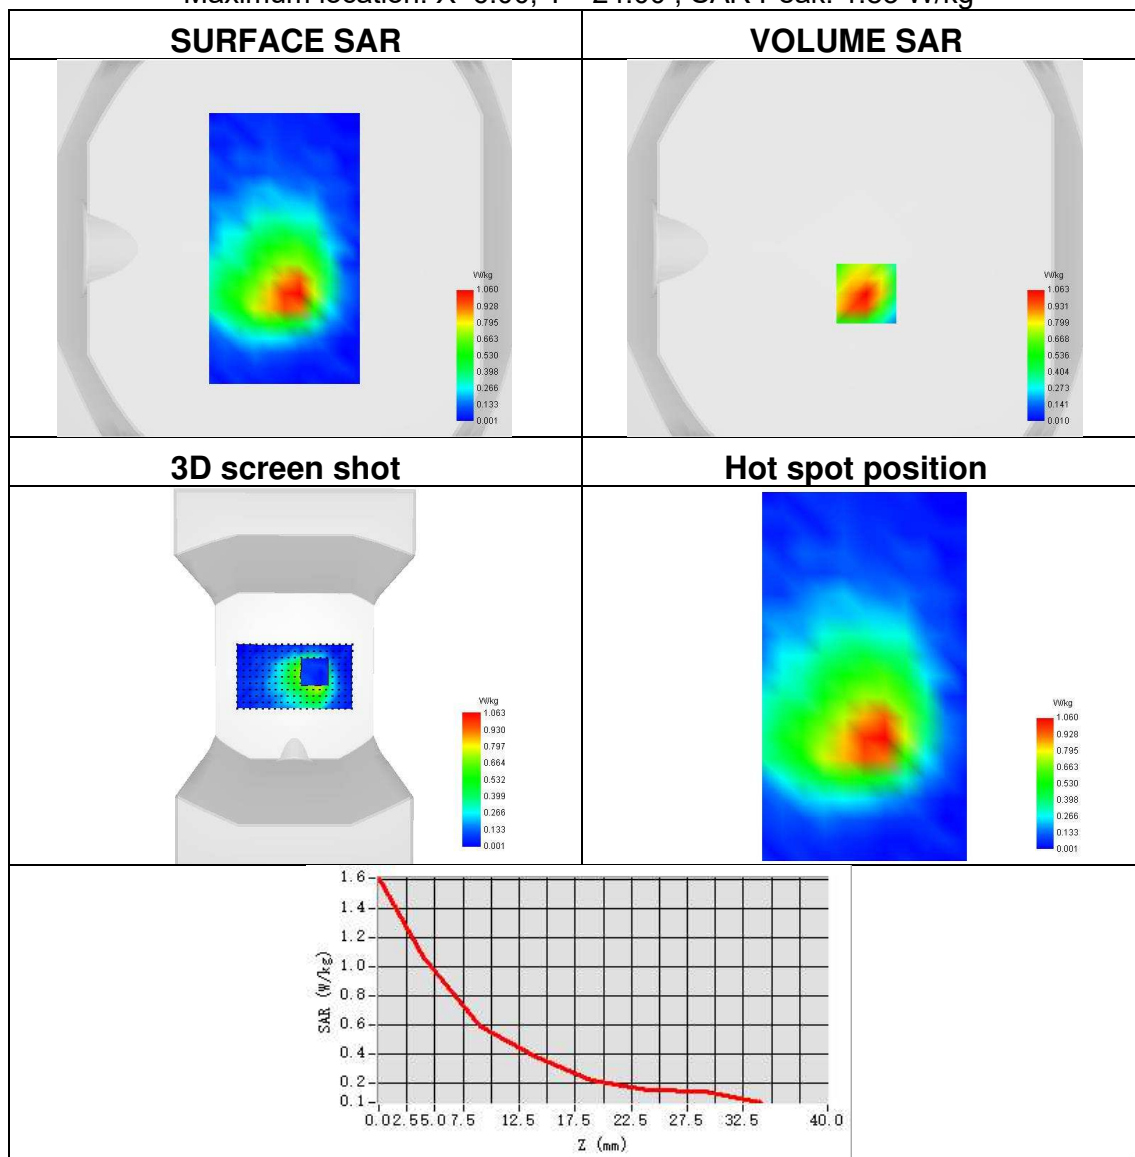




Plot 109:

Test Date	2025-04-09
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	SA NR band 41
Signal	SA NR TDD
Frequency	2640
SAR 10g (W/Kg)	0.760
SAR 1g (W/Kg)	1.708
ConvF	2.10
Relative permittivity	39.48
Conductivity (S/m)	1.99

Maximum location: X=-15.00, Y=29.00 ; SAR Peak: 3.23 W/kg

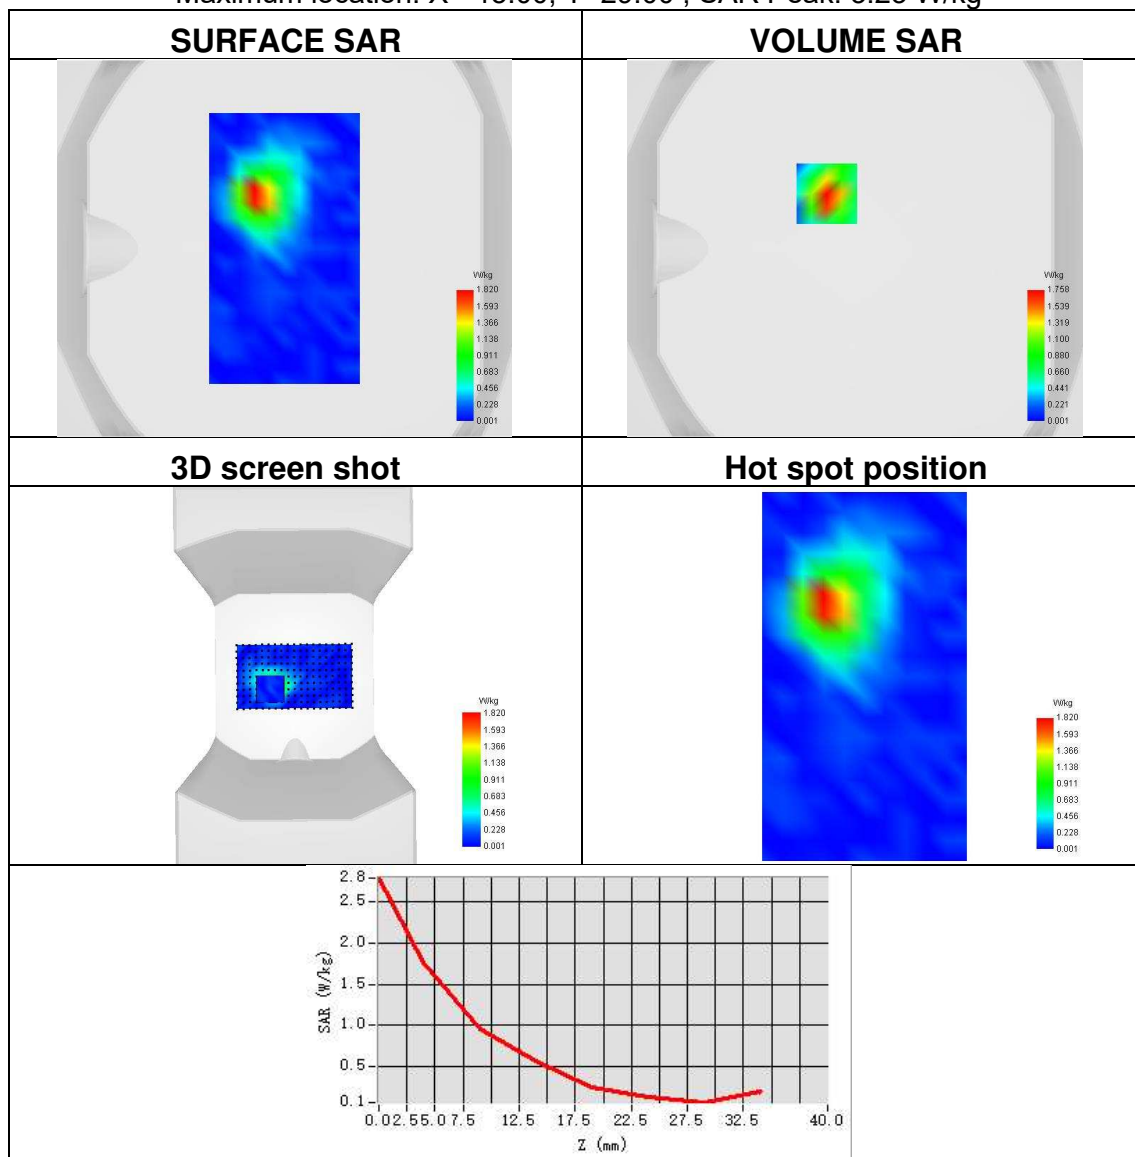




Plot 110:

Test Date	2025-04-08
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	SA NR band 66
Signal	SA NR FDD ANT2
Frequency	1730
SAR 10g (W/Kg)	0.668
SAR 1g (W/Kg)	1.317
ConvF	2.01
Relative permittivity	40.73
Conductivity (S/m)	1.39

Maximum location: X=1.00, Y=9.00 ; SAR Peak: 2.45 W/kg

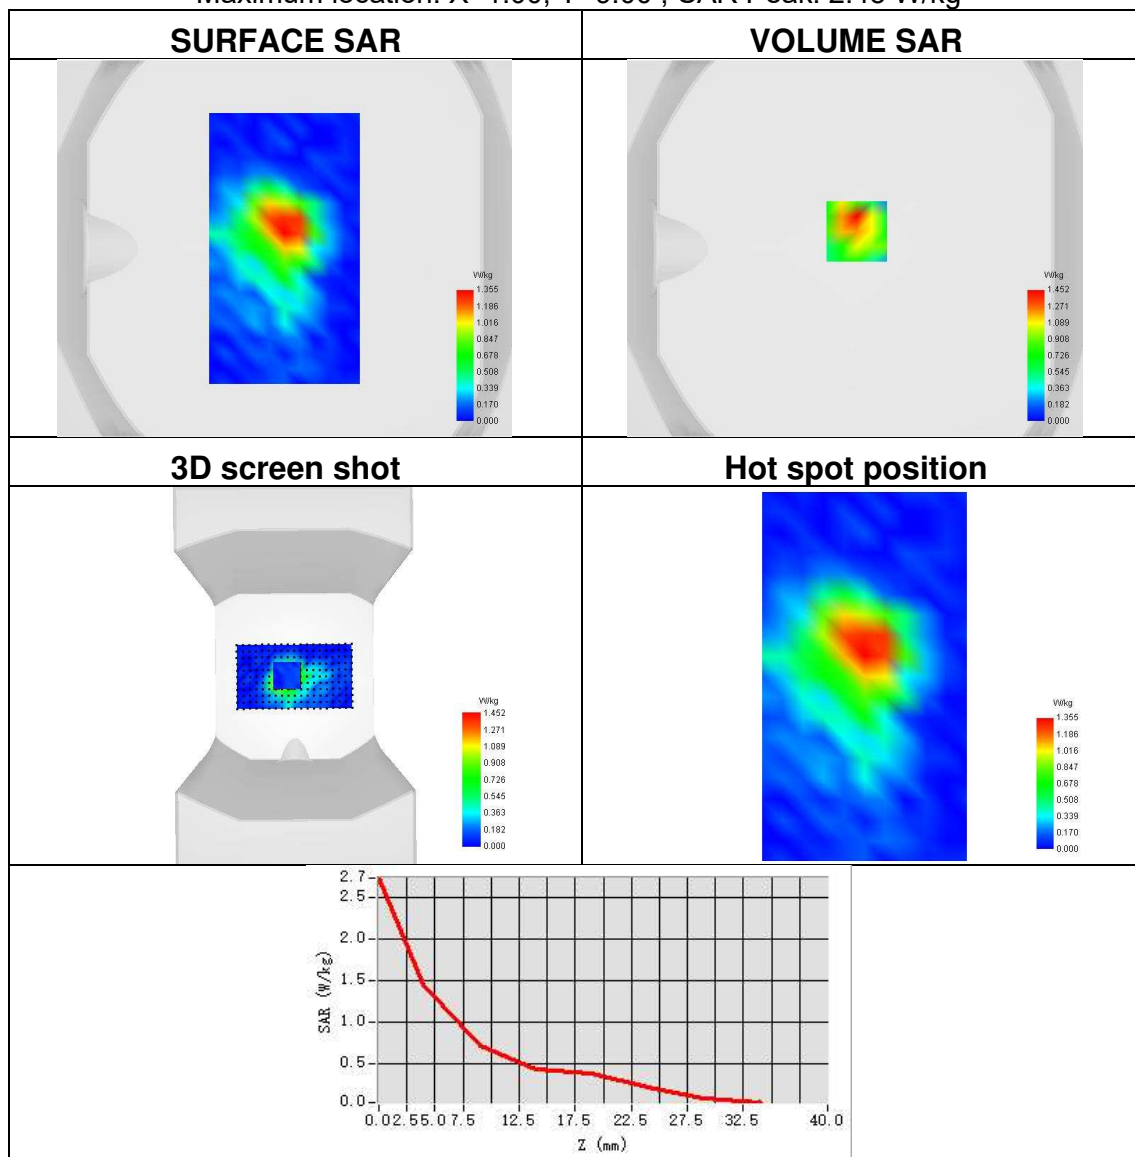




Plot 111:

Test Date	2025-04-11
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	SA NR band 71
Signal	SA NR FDD
Frequency	680.5
SAR 10g (W/Kg)	0.448
SAR 1g (W/Kg)	0.833
ConvF	1.70
Relative permittivity	42.40
Conductivity (S/m)	0.90

Maximum location: X=21.00, Y=-28.00 ; SAR Peak: 1.31 W/kg

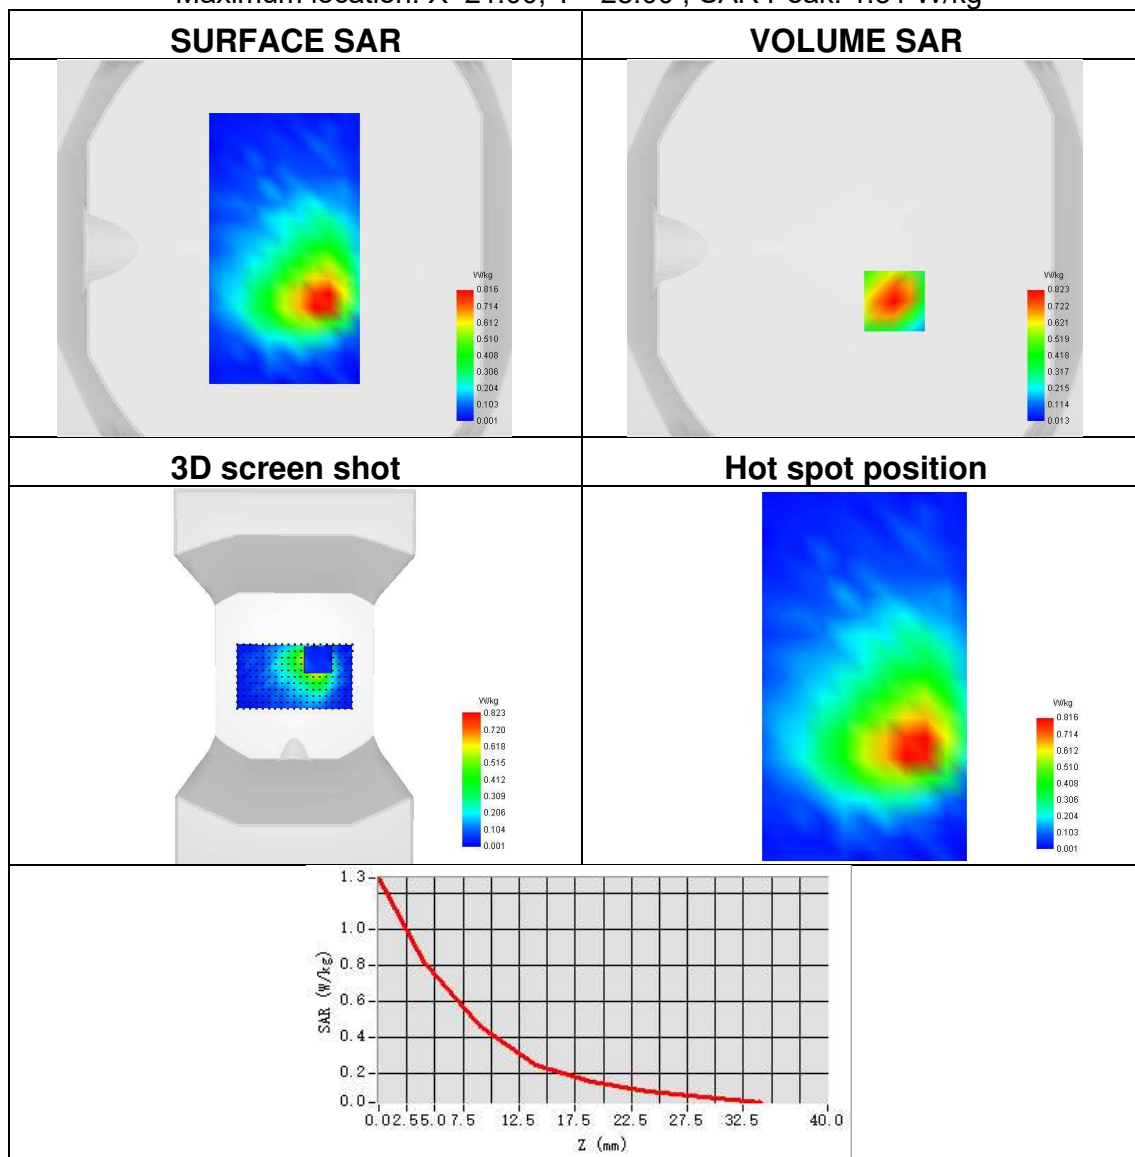




Plot 112:

Test Date	2025-04-16
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	SA NR band 78
Signal	SA NR TDD
Frequency	3750
SAR 10g (W/Kg)	0.648
SAR 1g (W/Kg)	1.792
ConvF	1.95
Relative permittivity	37.59
Conductivity (S/m)	3.21

Maximum location: X=6.00, Y=-23.00 ; SAR Peak: 4.56 W/kg

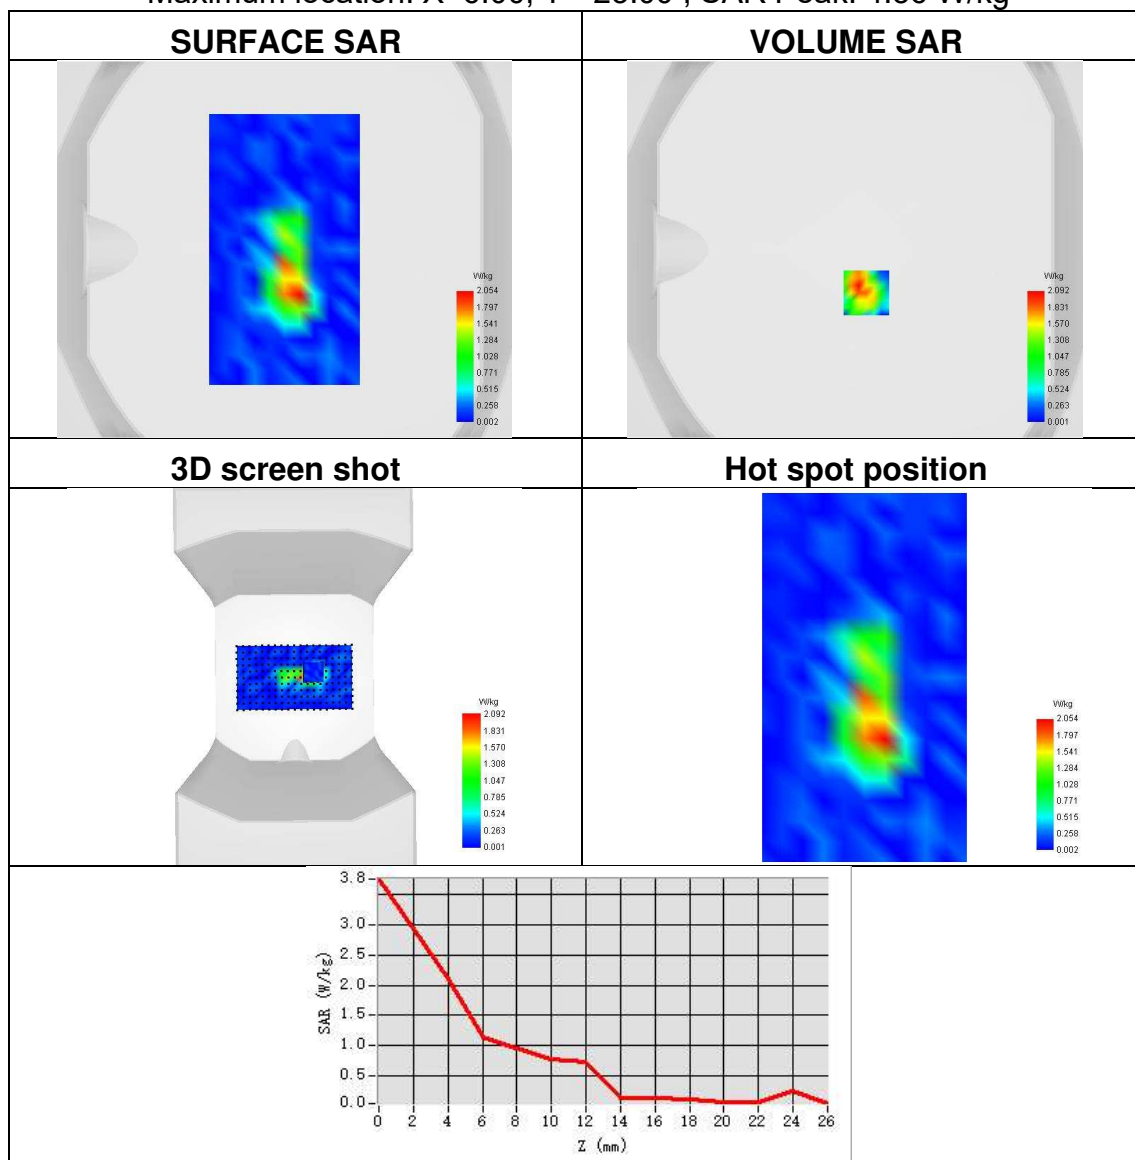




Plot 113:

Test Date	2025-04-01
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	NR band 2
Signal	NSA NR FDD
Frequency	1880
SAR 10g (W/Kg)	0.379
SAR 1g (W/Kg)	0.775
ConvF	2.21
Relative permittivity	40.61
Conductivity (S/m)	1.38

Maximum location: X=11.00, Y=31.00 ; SAR Peak: 1.36 W/kg

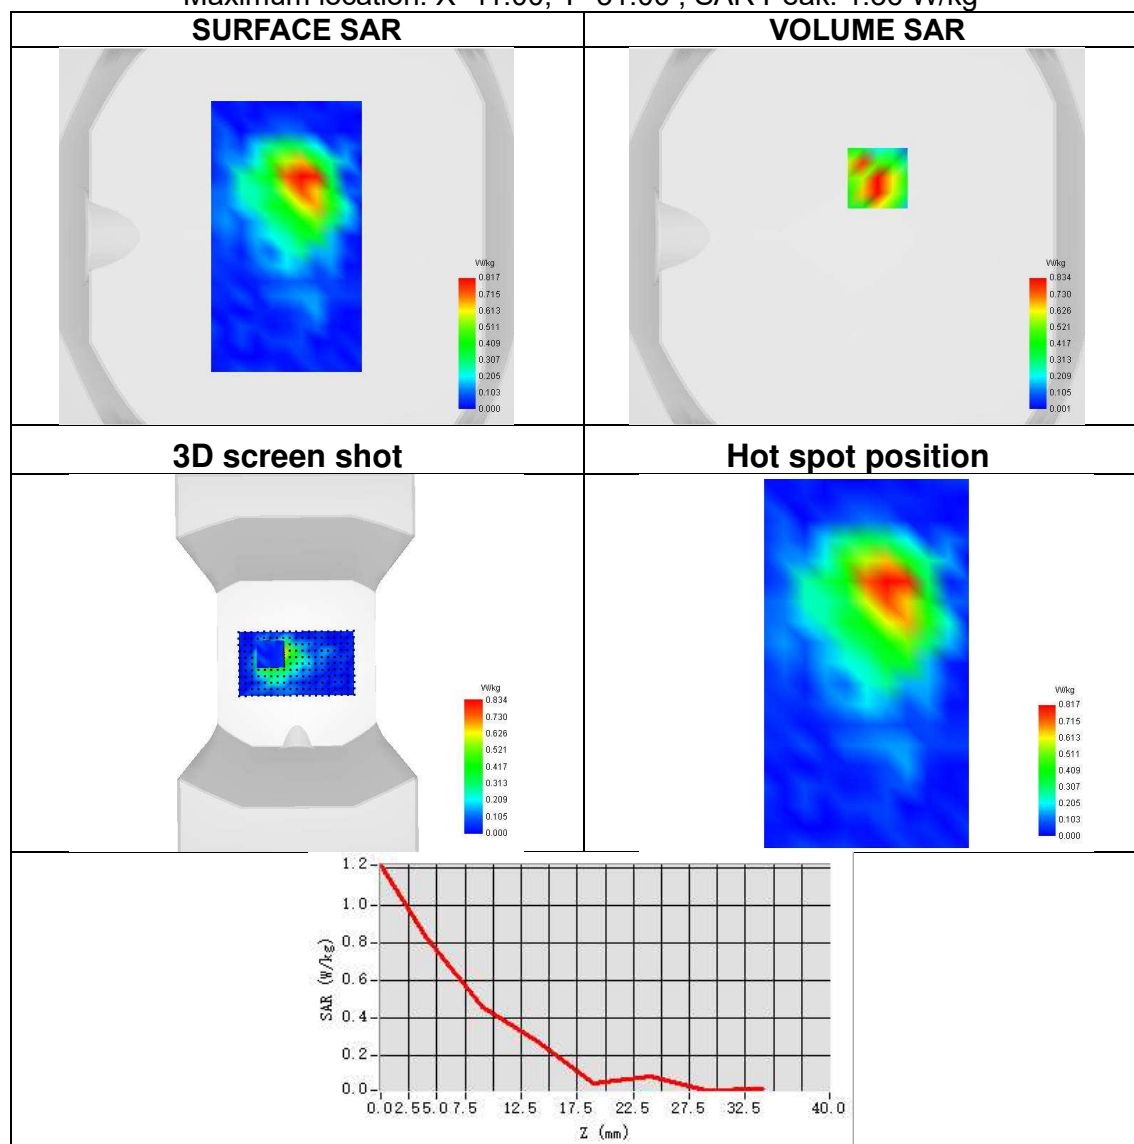




Plot 114:

Test Date	2025-04-03
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	NR band 5
Signal	NSA NR FDD
Frequency	836.5
SAR 10g (W/Kg)	0.245
SAR 1g (W/Kg)	0.443
ConvF	1.71
Relative permittivity	42.24
Conductivity (S/m)	0.86

Maximum location: X=15.00, Y=-37.00 ; SAR Peak: 0.94 W/kg

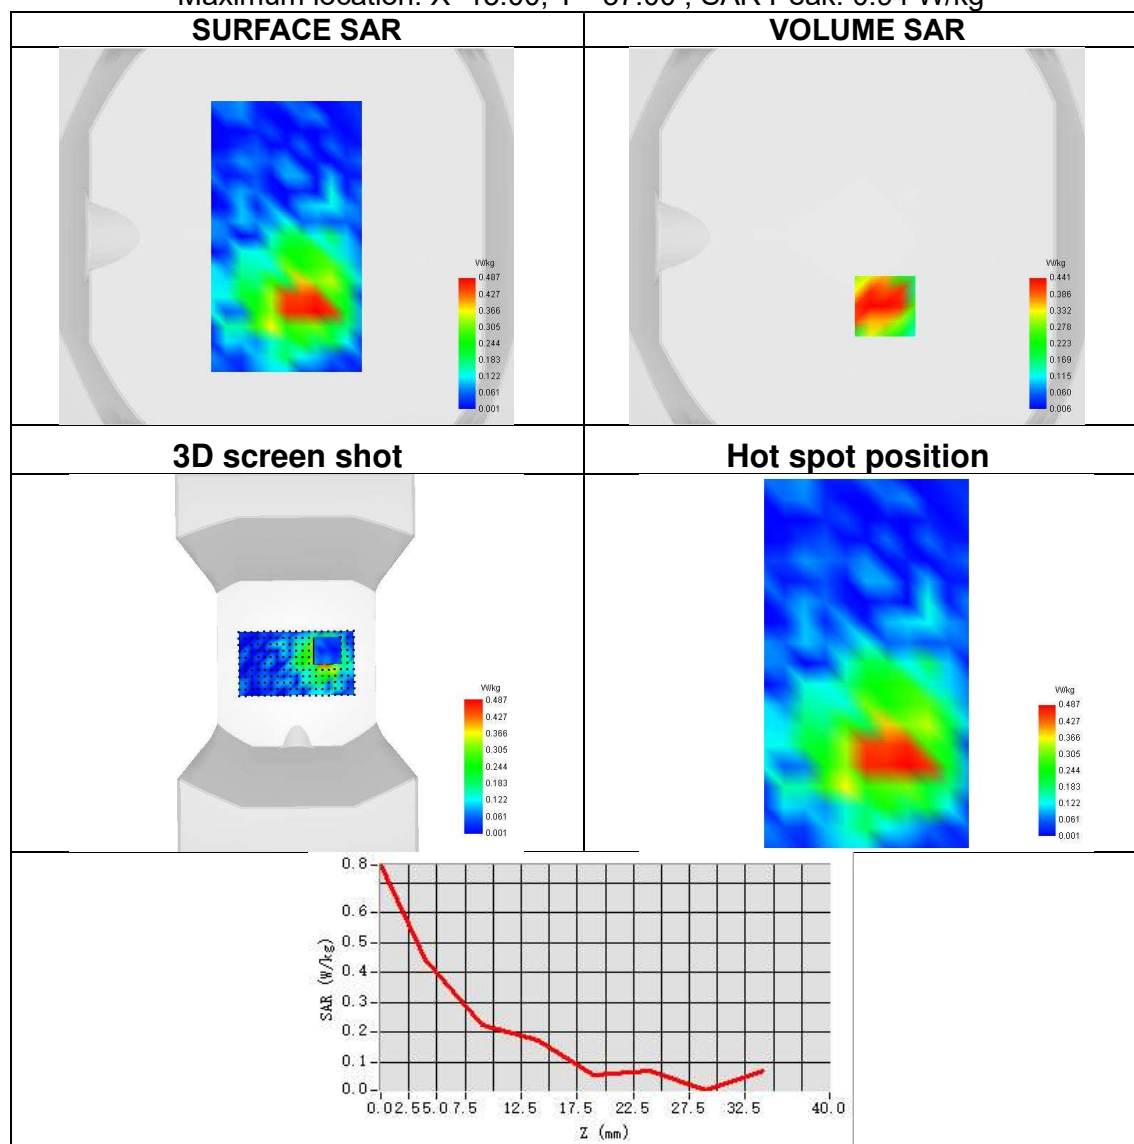




Plot 115:

Test Date	2025-04-09
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	NR band 41
Signal	NSA NR TDD
Frequency	2640
SAR 10g (W/Kg)	0.454
SAR 1g (W/Kg)	1.033
ConvF	2.10
Relative permittivity	39.48
Conductivity (S/m)	1.99

Maximum location: X=-10.00, Y=1.00 ; SAR Peak: 1.88 W/kg

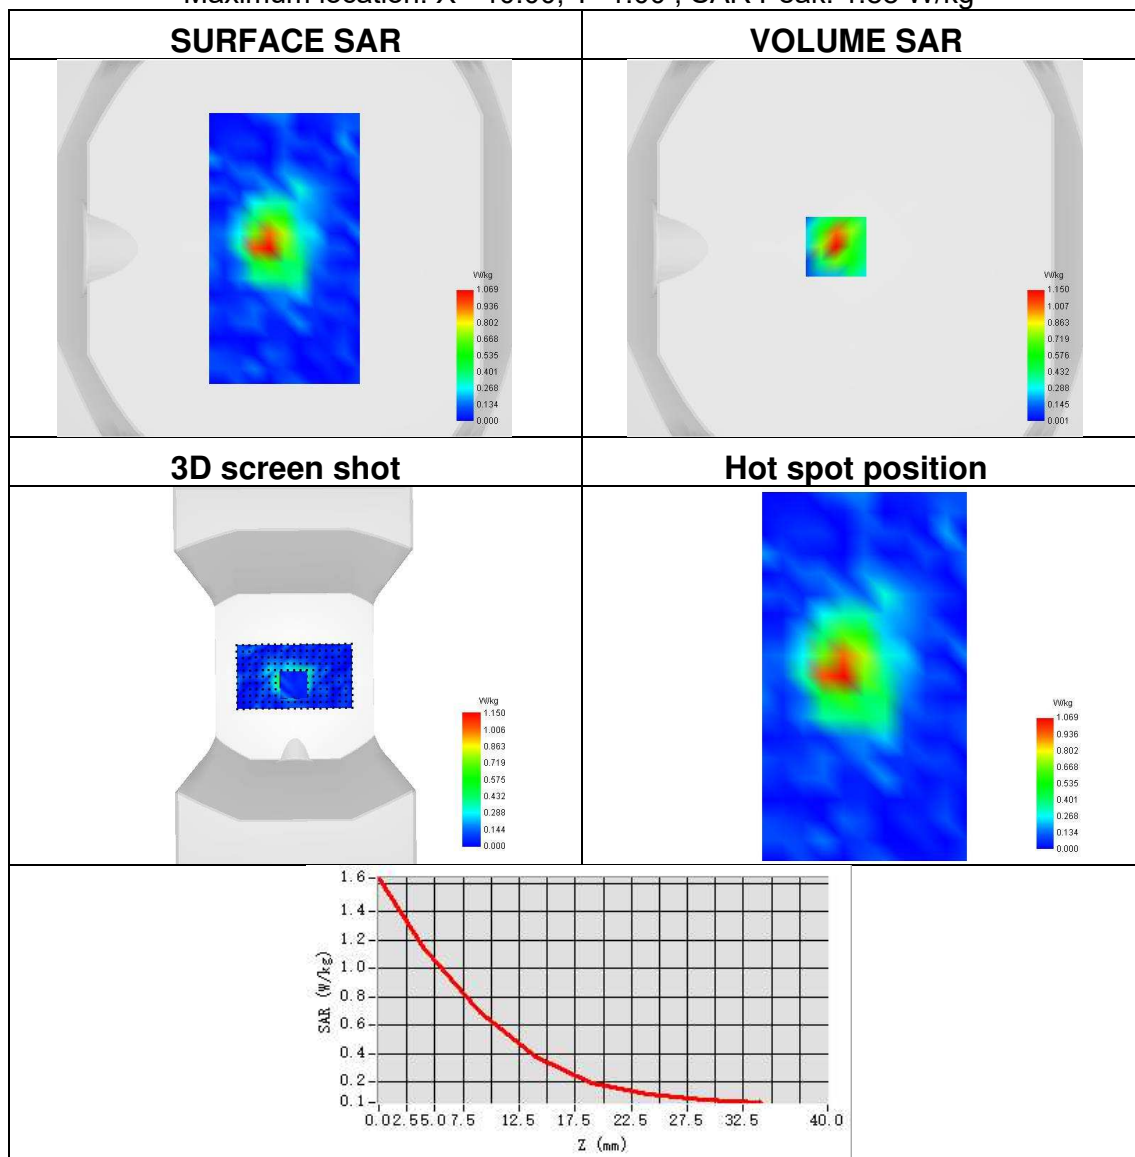




Plot 116:

Test Date	2025-04-08
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	NR band 66
Signal	NSA NR FDD
Frequency	1730
SAR 10g (W/Kg)	0.797
SAR 1g (W/Kg)	1.609
ConvF	2.01
Relative permittivity	40.73
Conductivity (S/m)	1.39

Maximum location: X=23.00, Y=-16.00 ; SAR Peak: 2.81 W/kg

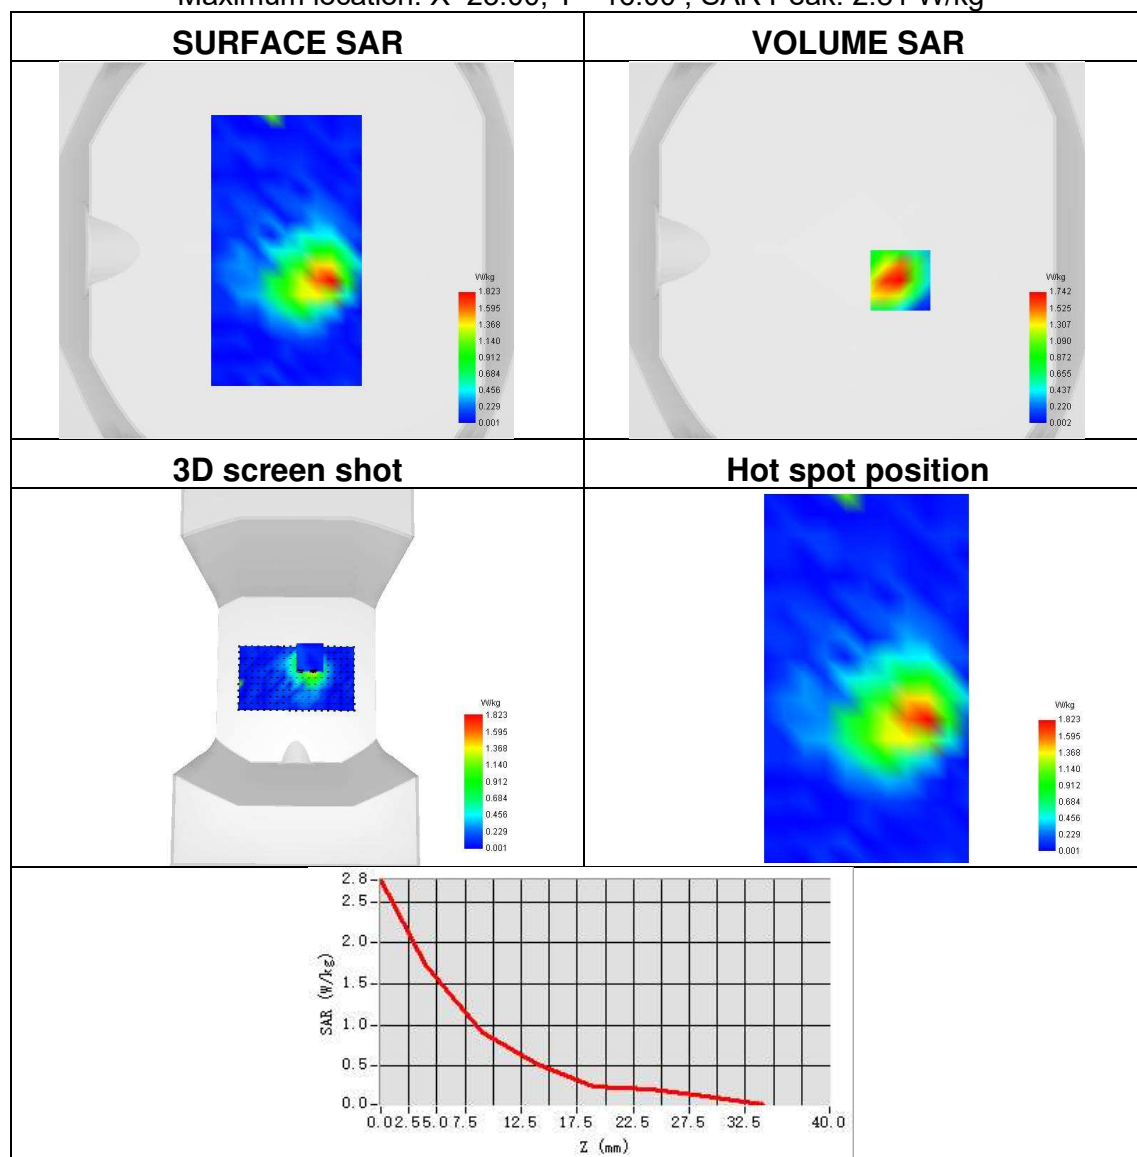




Plot 117:

Test Date	2025-04-11
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	NR band 71
Signal	NSA NR FDD
Frequency	680.5
SAR 10g (W/Kg)	0.217
SAR 1g (W/Kg)	0.493
ConvF	1.70
Relative permittivity	42.40
Conductivity (S/m)	0.90

Maximum location: X=24.00, Y=-32.00 ; SAR Peak: 1.04 W/kg

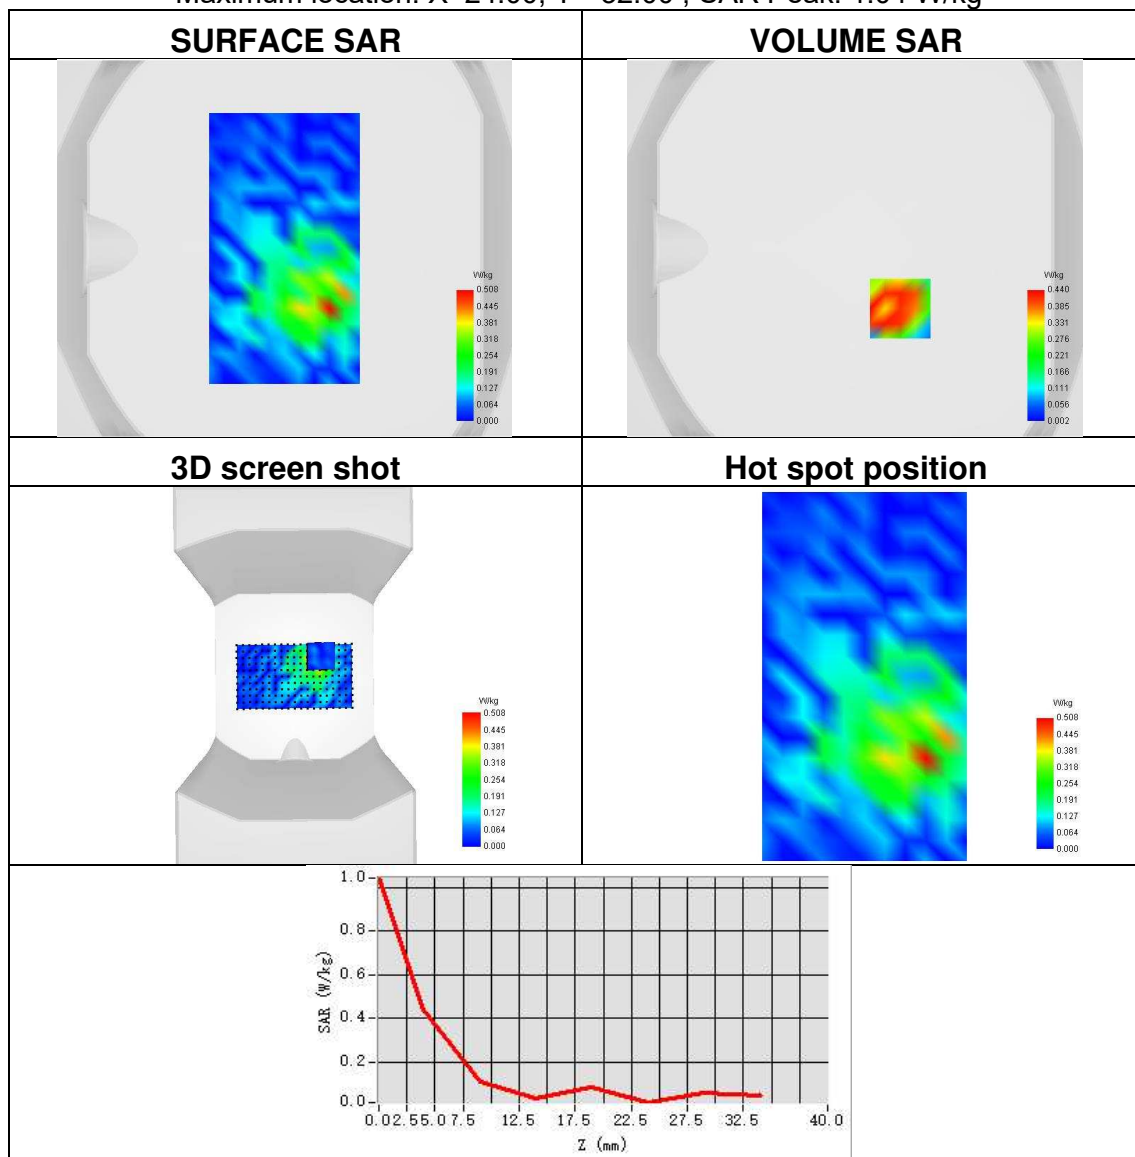




Plot 118:

Test Date	2025-04-16
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	NR band 78
Signal	NSA NR TDD
Frequency	3750
SAR 10g (W/Kg)	0.363
SAR 1g (W/Kg)	0.924
ConvF	1.95
Relative permittivity	37.59
Conductivity (S/m)	3.21

Maximum location: X=-5.00, Y=-2.00 ; SAR Peak: 3.52 W/kg

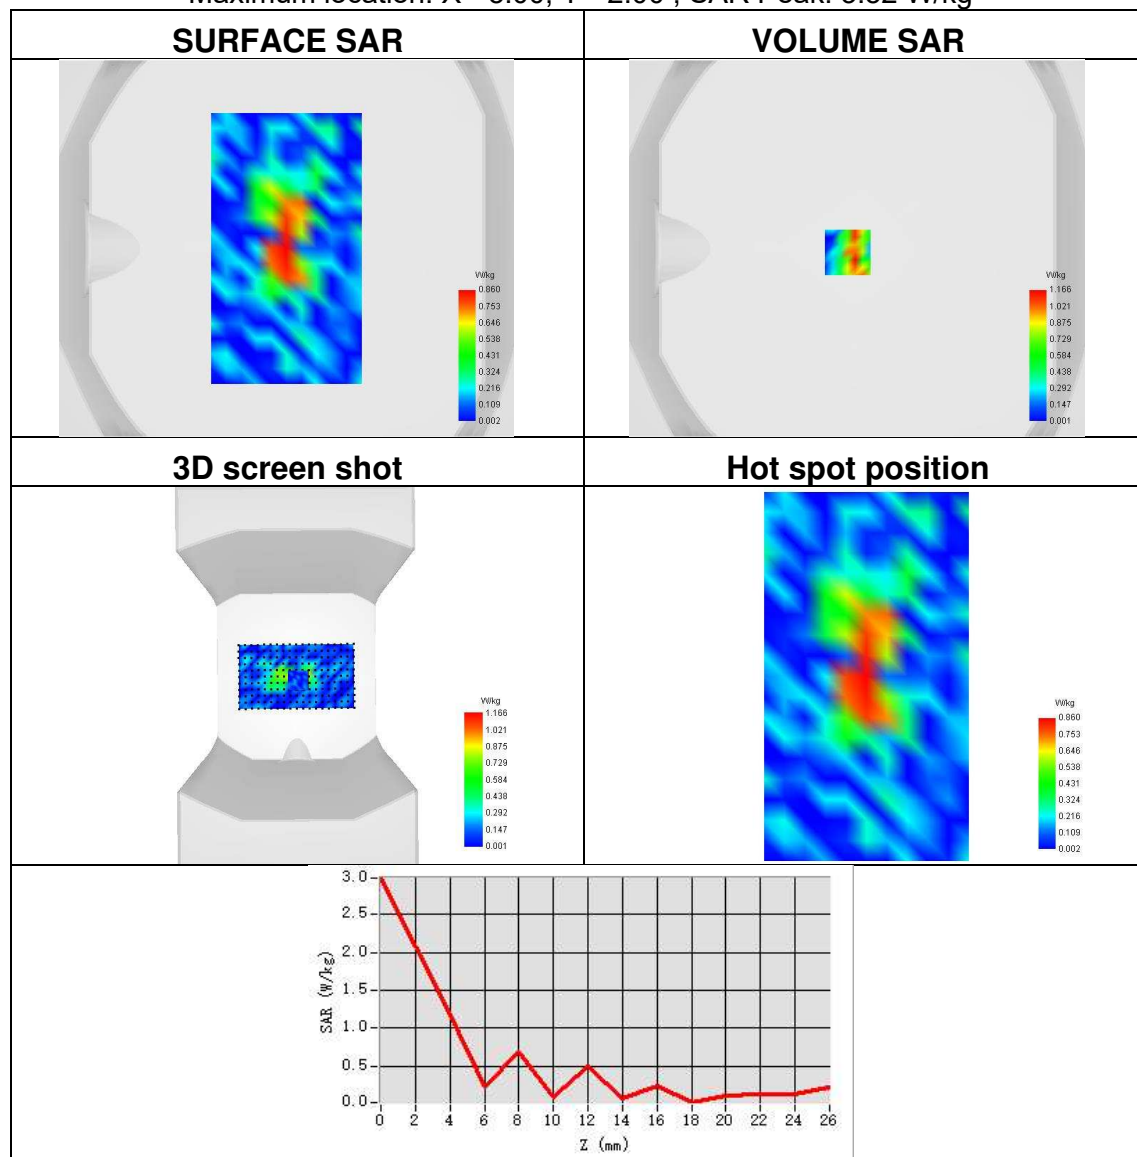




Plot 119:

Test Date	2025-04-12
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 2
Signal	NSA LTE FDD
Frequency	1900
SAR 10g (W/Kg)	0.333
SAR 1g (W/Kg)	0.714
ConvF	2.21
Relative permittivity	40.83
Conductivity (S/m)	1.45

Maximum location: X=-1.00, Y=-5.00 ; SAR Peak: 1.37 W/kg

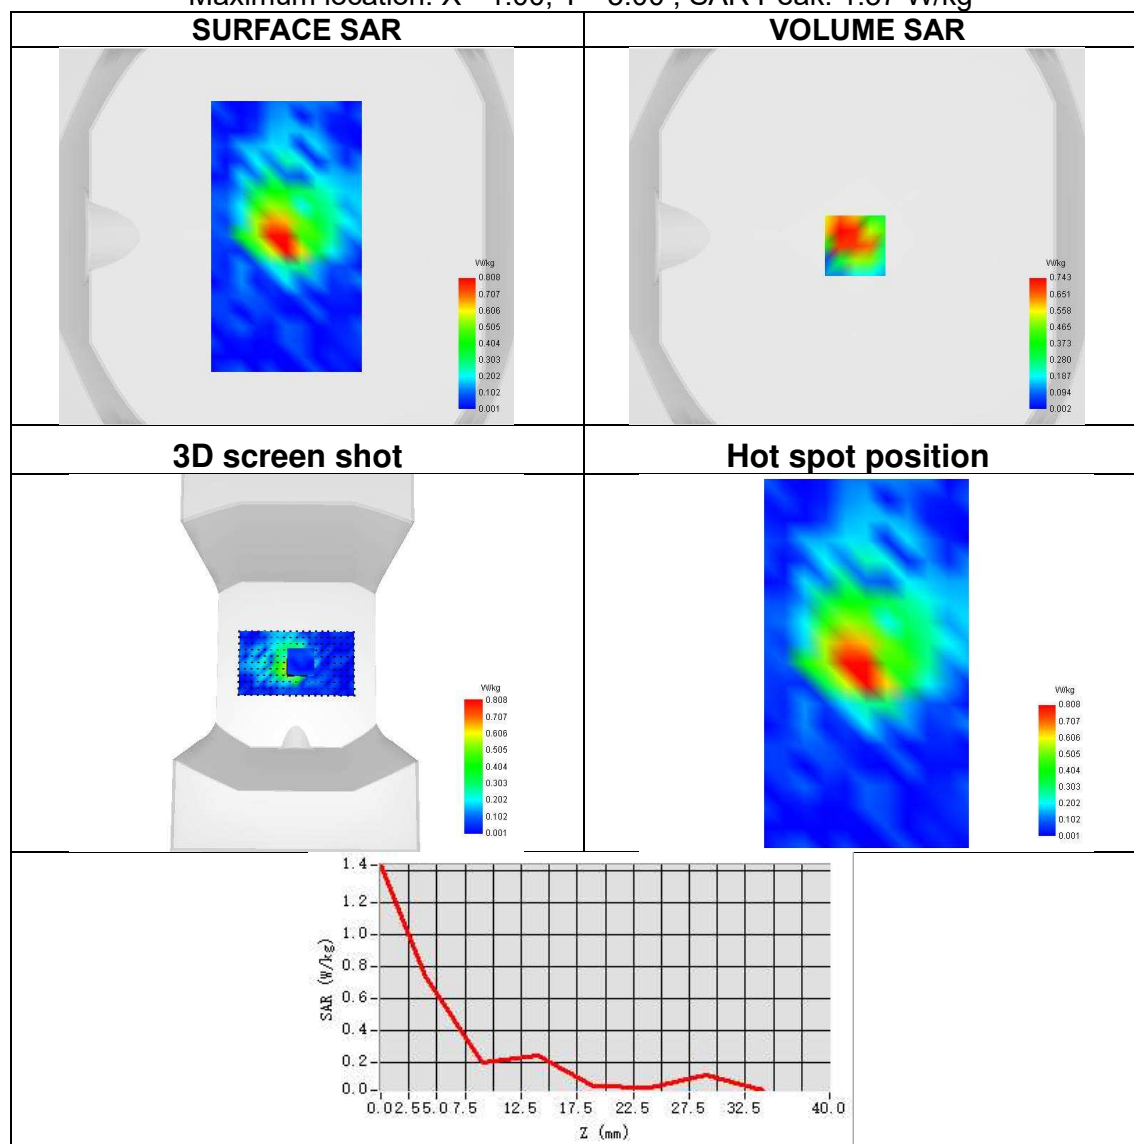




Plot 120:

Test Date	2025-03-30
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 4
Signal	NSA LTE FDD ANT4
Frequency	1720
SAR 10g (W/Kg)	0.499
SAR 1g (W/Kg)	1.116
ConvF	2.01
Relative permittivity	40.73
Conductivity (S/m)	1.42

Maximum location: X=-8.00, Y=-2.00 ; SAR Peak: 2.41 W/kg

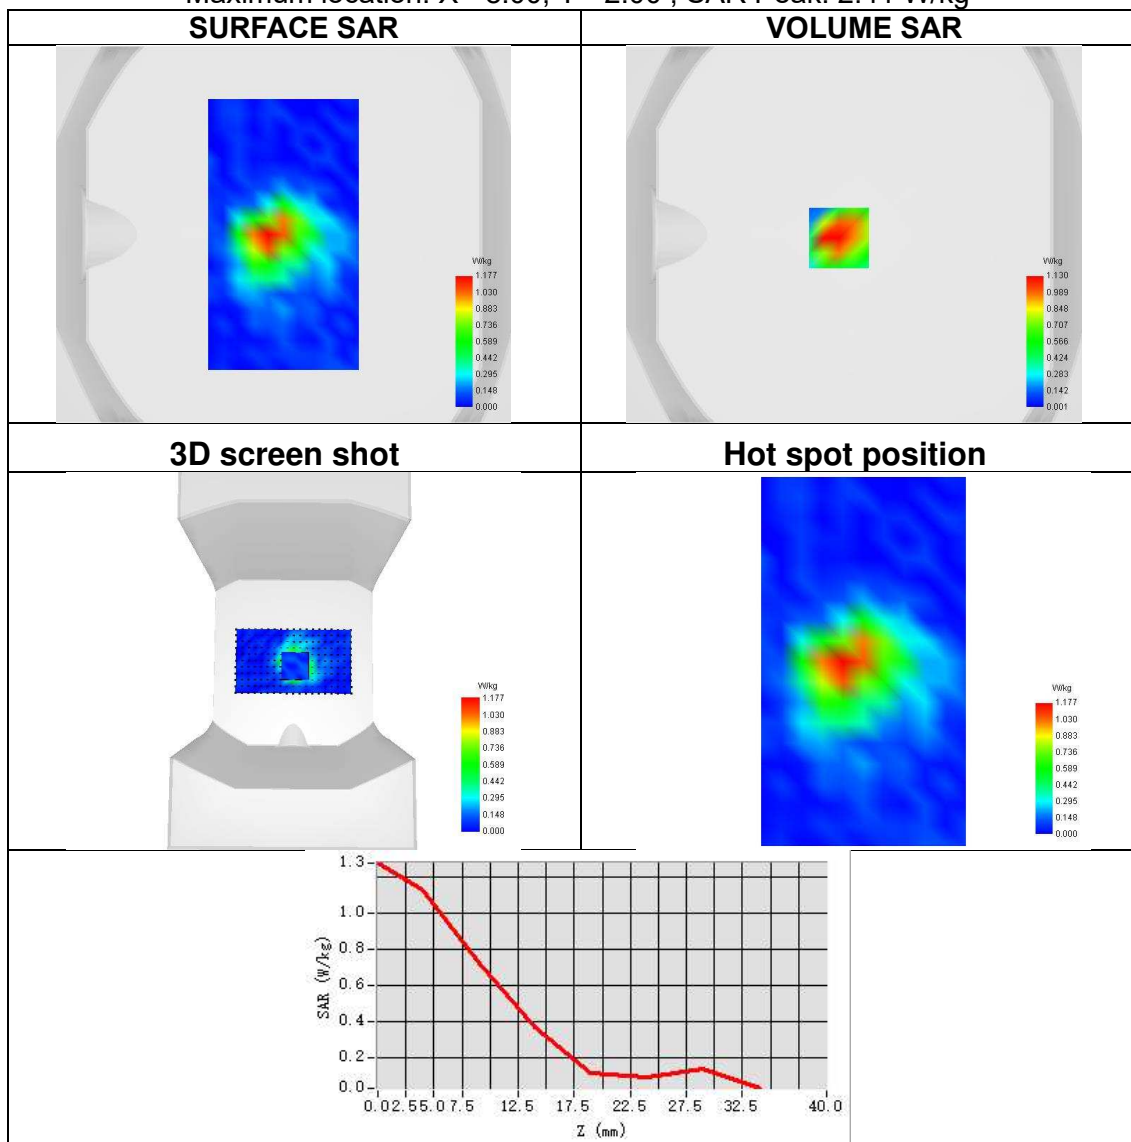




Plot 121:

Test Date	2025-04-03
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 5
Signal	NSA LTE FDD
Frequency	836.5
SAR 10g (W/Kg)	0.242
SAR 1g (W/Kg)	0.503
ConvF	1.71
Relative permittivity	42.24
Conductivity (S/m)	0.86

Maximum location: X=7.00, Y=-6.00 ; SAR Peak: 0.98 W/kg

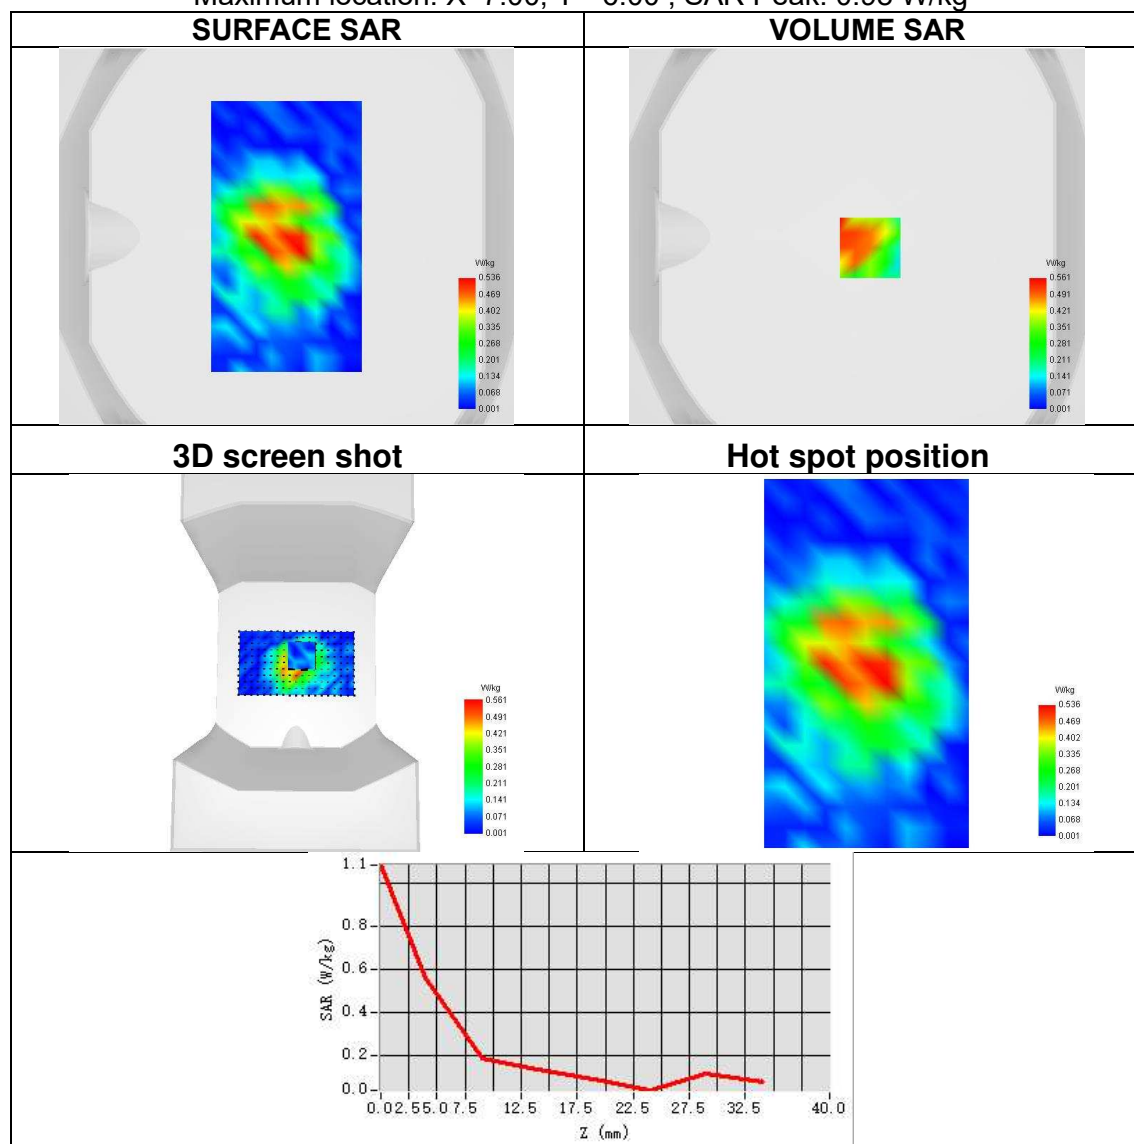




Plot 122:

Test Date	2025-04-06
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 7
Signal	NSA LTE FDD
Frequency	2510
SAR 10g (W/Kg)	0.366
SAR 1g (W/Kg)	0.863
ConvF	2.10
Relative permittivity	39.14
Conductivity (S/m)	1.93

Maximum location: X=-8.00, Y=-16.00 ; SAR Peak: 1.78 W/kg

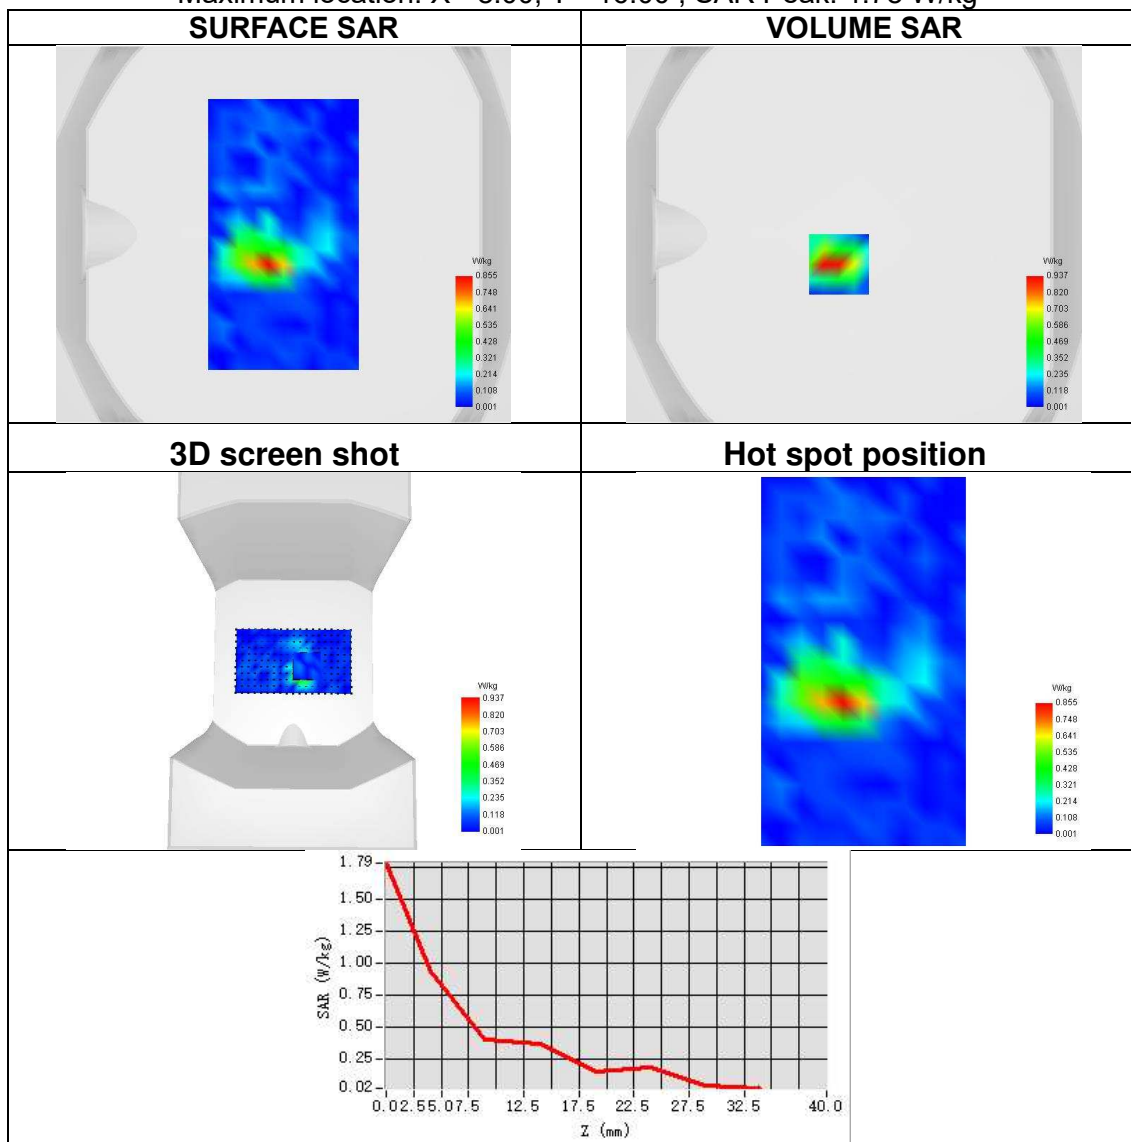




Plot 123:

Test Date	2025-03-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	LTE band 12
Signal	NSA LTE FDD
Frequency	707.5
SAR 10g (W/Kg)	0.359
SAR 1g (W/Kg)	0.698
ConvF	1.70
Relative permittivity	42.90
Conductivity (S/m)	0.92

Maximum location: X=-15.00, Y=-7.00 ; SAR Peak: 1.39 W/kg

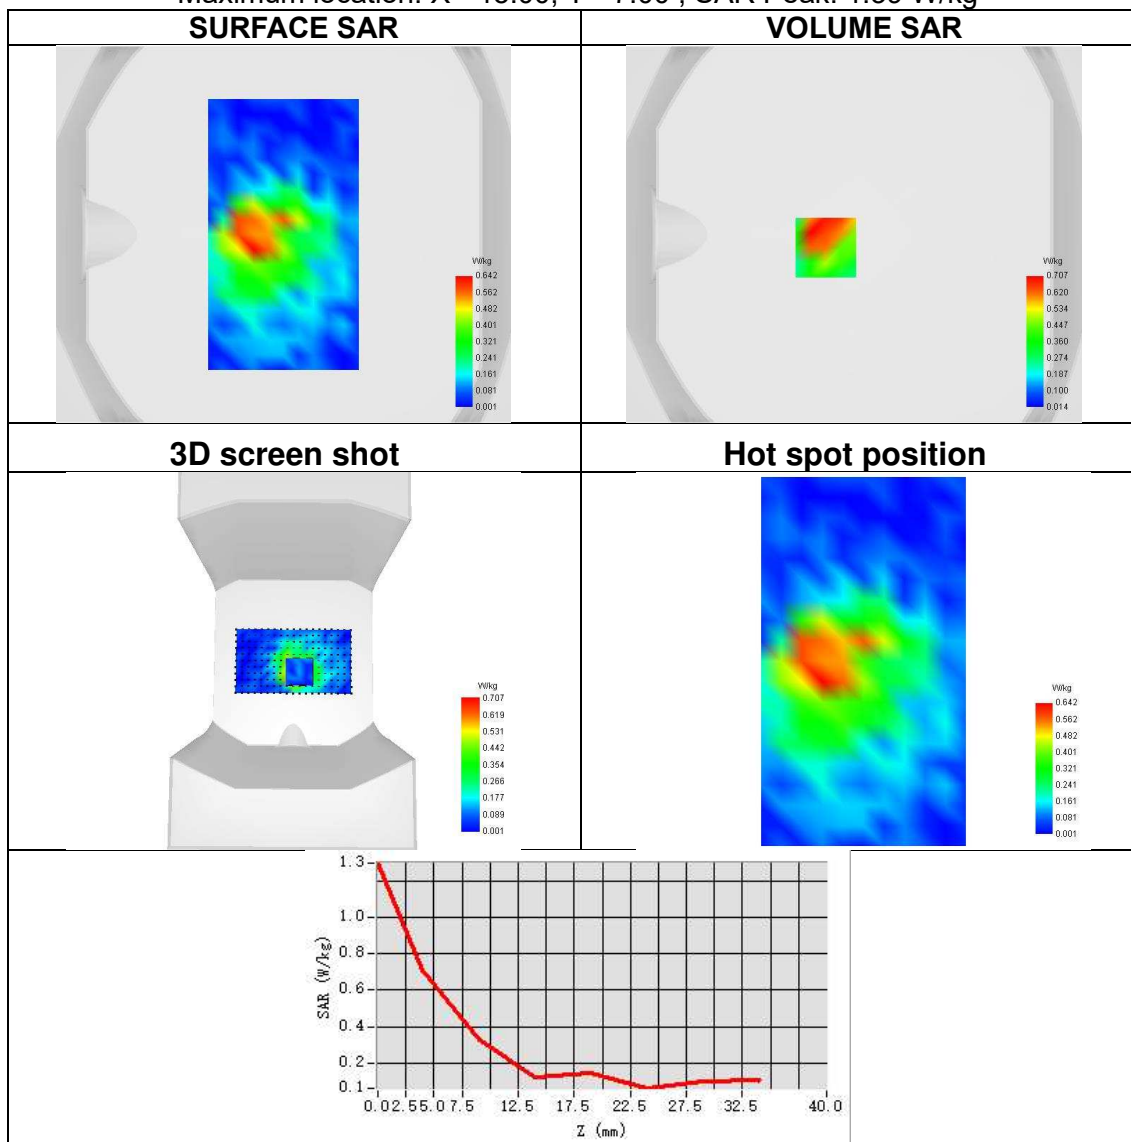




Plot 124:

Test Date	2025-04-07
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	LTE band 14
Signal	NSA LTE FDD
Frequency	793
SAR 10g (W/Kg)	0.112
SAR 1g (W/Kg)	0.325
ConvF	1.70
Relative permittivity	41.92
Conductivity (S/m)	0.85

Maximum location: X=8.00, Y=-24.00 ; SAR Peak: 0.65 W/kg

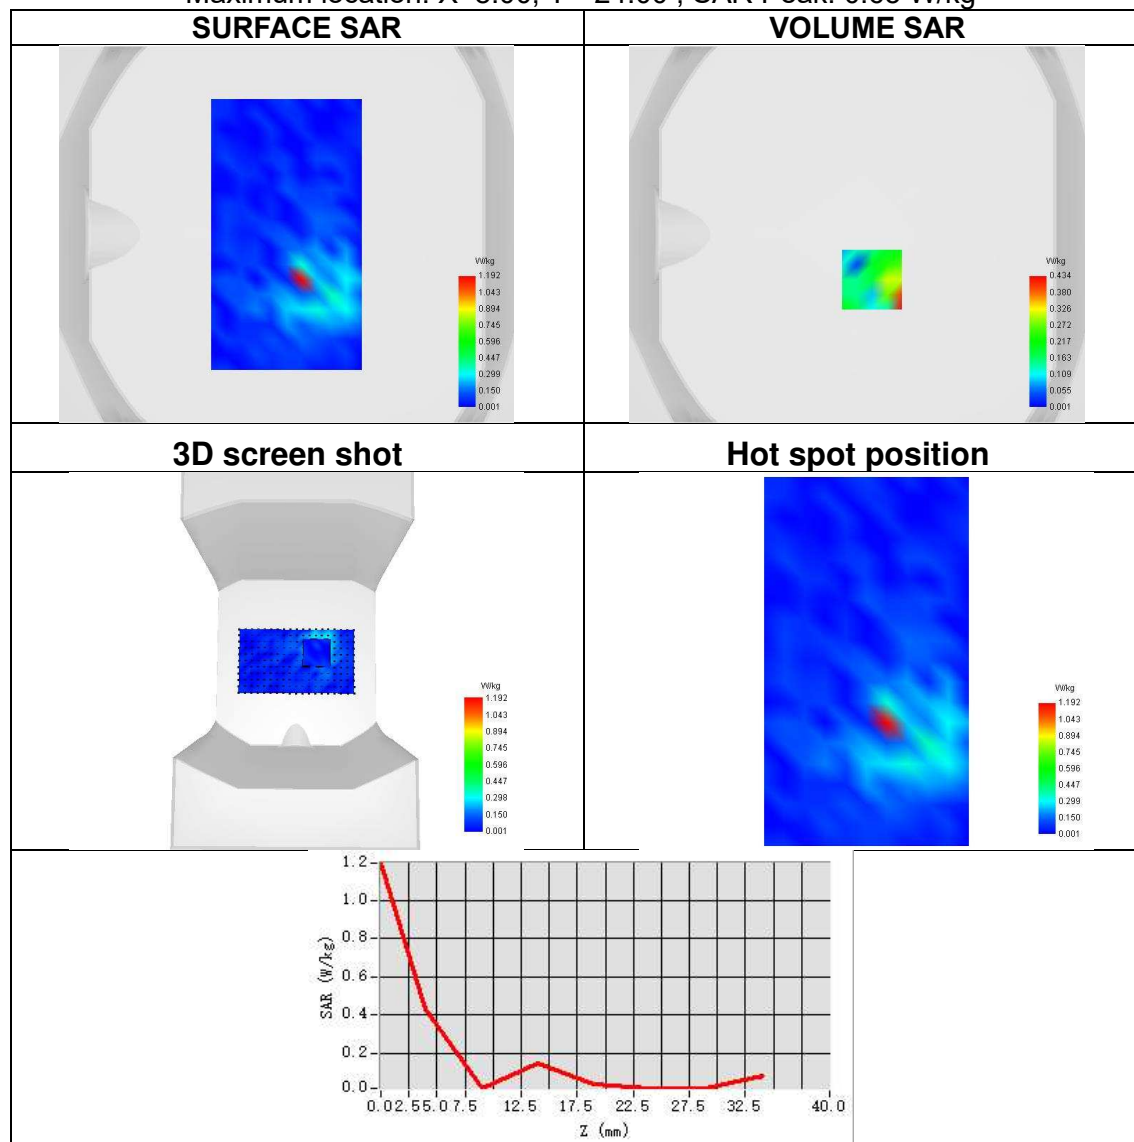




Plot 125:

Test Date	2025-04-02
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 30
Signal	NSA LTE FDD
Frequency	2310
SAR 10g (W/Kg)	0.568
SAR 1g (W/Kg)	1.410
ConvF	2.45
Relative permittivity	40.64
Conductivity (S/m)	1.64

Maximum location: X=16.00, Y=24.00 ; SAR Peak: 3.16 W/kg

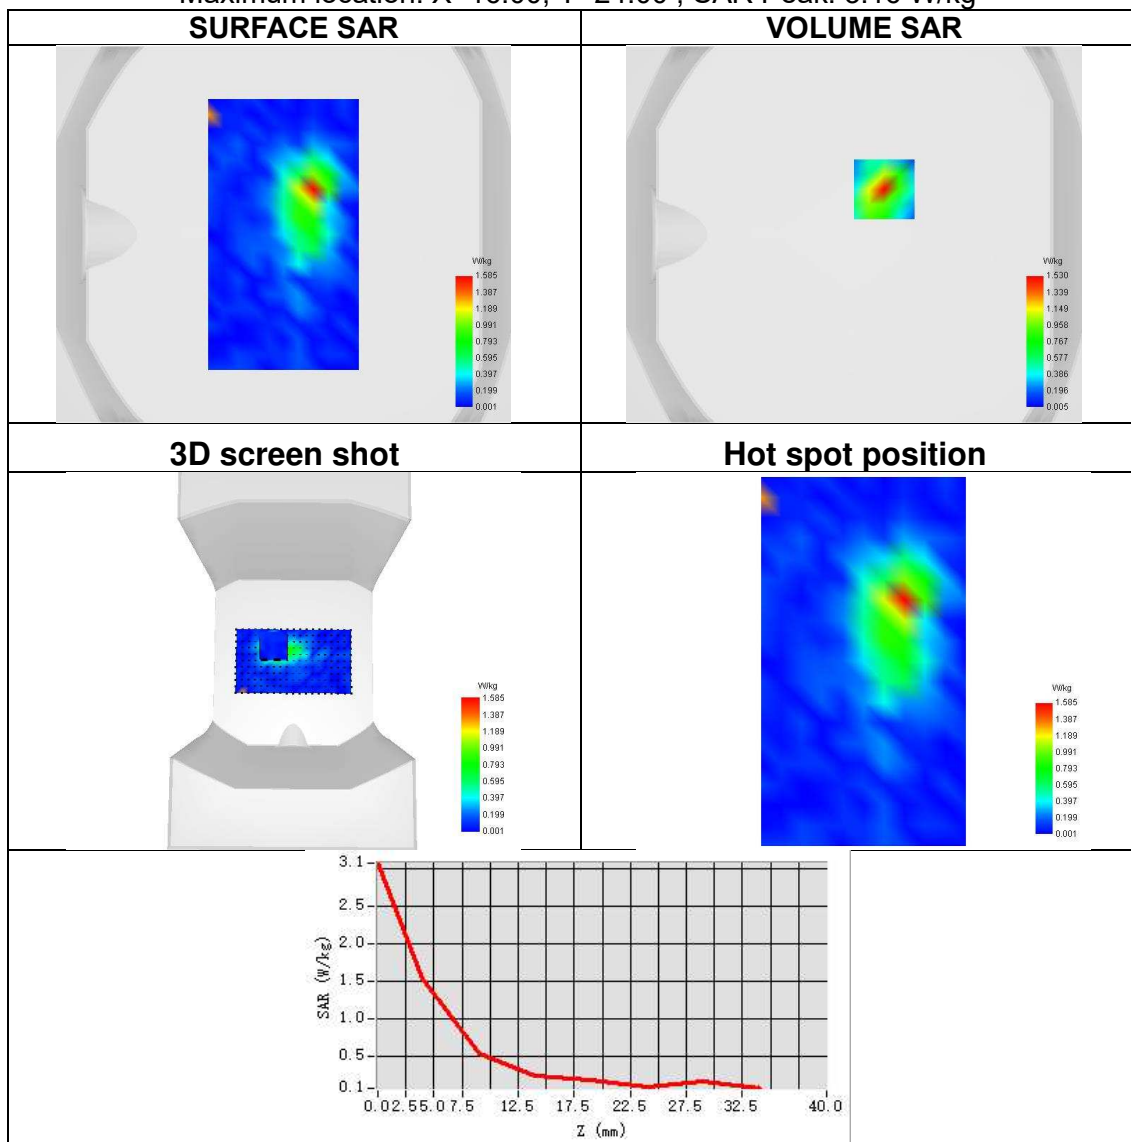




Plot 126:

Test Date	2025-03-31
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 66
Signal	NSA LTE FDD ANT2
Frequency	1770
SAR 10g (W/Kg)	0.603
SAR 1g (W/Kg)	1.184
ConvF	2.01
Relative permittivity	40.71
Conductivity (S/m)	1.43

Maximum location: X=14.00, Y=39.00 ; SAR Peak: 2.25 W/kg

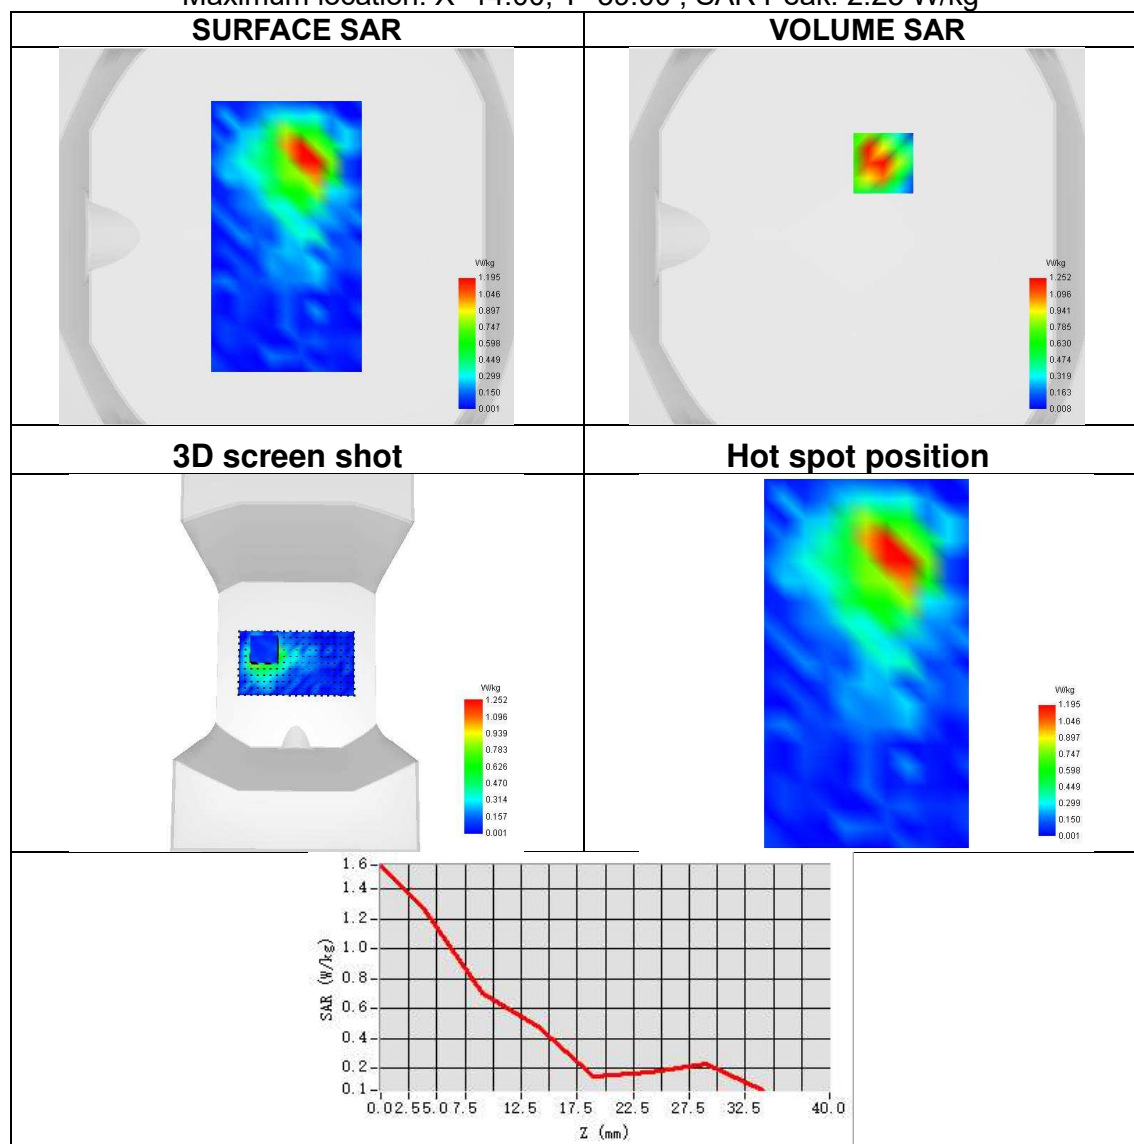




Plot 127:

Test Date	2025-03-31
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 66
Signal	NSA LTE FDD ANT4
Frequency	1770
SAR 10g (W/Kg)	0.542
SAR 1g (W/Kg)	1.100
ConvF	2.01
Relative permittivity	40.71
Conductivity (S/m)	1.43

Maximum location: X=11.00, Y=-15.00 ; SAR Peak: 2.04 W/kg

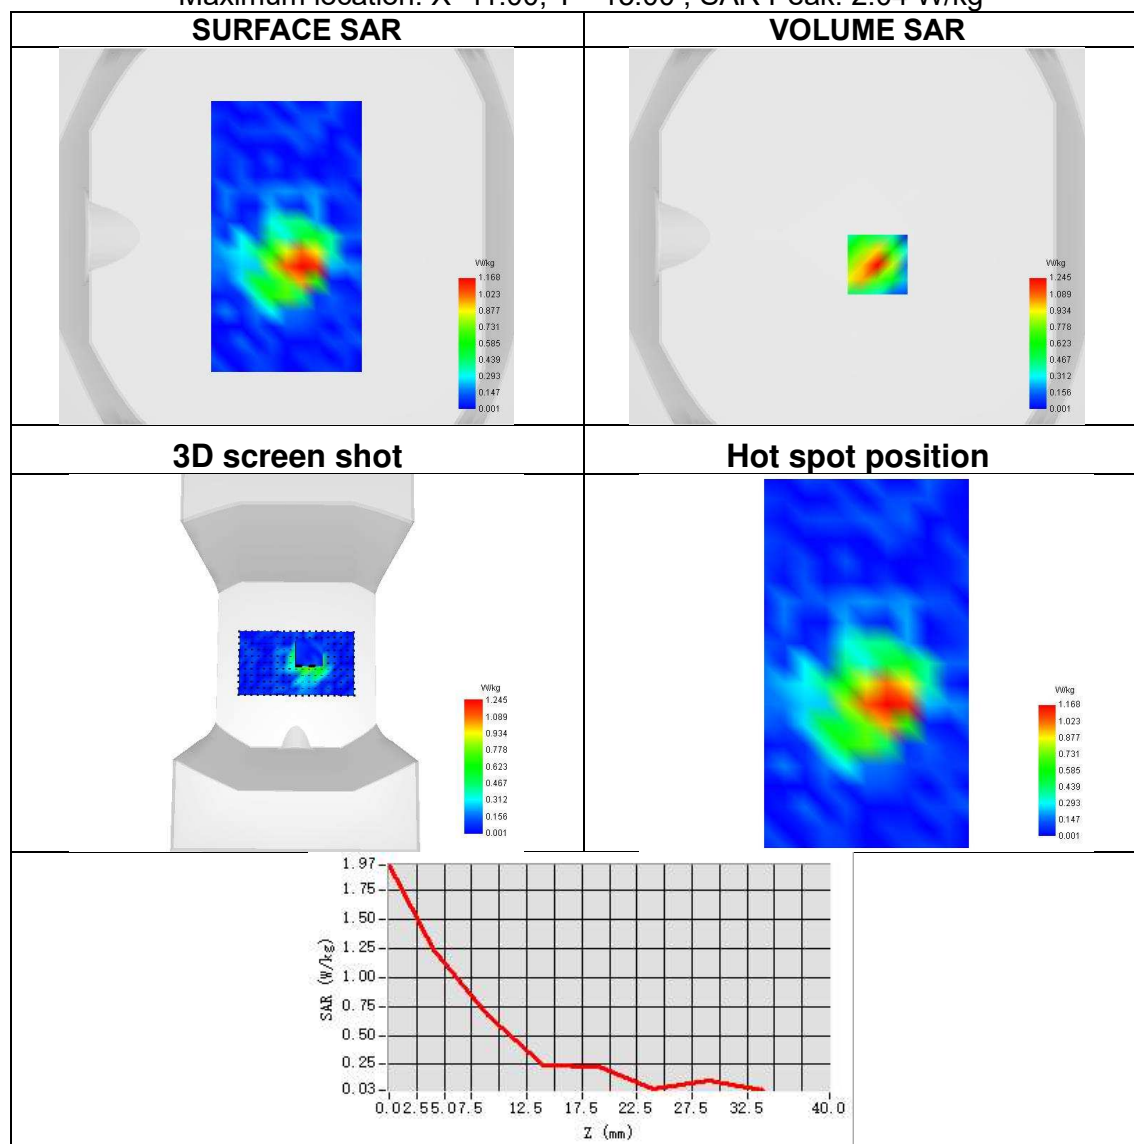



Plot 128:

Test Date	2025-03-22
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 71
Signal	NSA LTE FDD
Frequency	673
SAR 10g (W/Kg)	0.245
SAR 1g (W/Kg)	0.543
ConvF	1.70
Relative permittivity	42.11
Conductivity (S/m)	0.87

Maximum location: X=0.00, Y=-23.00 ; SAR Peak: 1.05 W/kg

