

2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.

Telephone: (852) 2173 8888 Facsimile: (852) 2785 5487

www.intertek.com

TEST REPORT

Report No.: 19011248HKG-001

TTS-Group Ltd

Application For Certification (Original Grant)

FCC ID: 2ADRE-IT10000

Transceiver

Prepared and Checked by: Approved by:

Signed On File Lee Yee Yat, Adrian Assistant Engineer

Wong Kwok Yeung, Kenneth Senior Lead Engineer Date: March 18, 2019

Intertek's standard Terms and Conditions can be obtained at our website http://www.intertek.com/terms/.

The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.





GENERAL INFORMATION

Grantee: TTS-Group Ltd

Grantee Address: Unit 1, Park Lane Business Park Park Lane,

Kirkby in Ashfield,

United Kingdom NG179GU

Contact Person: Scott Shore

Tel: +44(0) 1623 8870443 Fax: +44(0) 1623 8870443

e-mail: N/A

Manufacturer: Silverlit Toys Manufactory Ltd.

Manufacturer Address: Room 1102, East Ocean Center,
98 Granville Road, Tsim Sha Tsui,

Kowloon, Hong Kong.

Brand Name:

Model:

Type of EUT:

Description of EUT:

Silverlit

IT10000

Transceiver

Rugged Robot

Serial Number: N/A

FCC ID: 2ADRE-IT10000

Date of Sample Submitted: January 28, 2019

Date of Test: January 28, 2019 to March 15, 2019

 Report No.:
 19011248HKG-001

 Report Date:
 March 18, 2019

Environmental Conditions: Temperature: +10 to 40°C

Humidity: 10 to 90%

Conclusion: Test was conducted by client submitted sample. The submitted

sample as received complied with the 47 CFR Part 15 Certification.



SUMMARY OF TEST RESULT

Test Specification	Reference	Results			
Radiated Emission	15.249 <i>,</i> 15.209	Pass			
Radiated Emission on the Bandedge					
Radiated Emission in Restricted Bands	15.205	Pass			

The equipment under test is found to be complying with the following standards: FCC Part 15, October 1, 2017 Edition

Note: 1. The EUT uses a permanently attached antenna which, in accordance to section 15.203, is considered sufficient to comply with the pervisions of this section.

2. Pursuant to FCC part 15 Section 15.215(c), the 20 dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over excepted variations in temperature and supply voltage were considered.



TABLE OF CONTENTS

1.0	GENI	ERAL DESCRIPTION	5
	1.1	Product Description	5
	1.2	Related Submittal(s) Grants	5
	1.3	Test Methodology	5
	1.4	Test Facility	5
2.0	SYST	TEM TEST CONFIGURATION	6
	2.1	Justification	6
	2.2	EUT Exercising Software	6
	2.3	Special Accessories	6
	2.4	Measurement Uncertainty	6
	2.5	Support Equipment List and Description	6
3.0	EMIS	SSION RESULTS	7
	3.1	Field Strength Calculation	7
	3.2	Radiated Emission Configuration Photograph	8
	3.3	Radiated Emission Data	8
4.0	EQU	IPMENT PHOTOGRAPHS	12
5.0	PROI	DUCT LABELLING	12
6.0	TECH	HNICAL SPECIFICATIONS	12
7.0	INST	RUCTION MANUAL	12
8.0	MISC	CELLANEOUS INFORMATION	13
	8.1	Radiated Emission on the Bandedge	13
	8.2	Discussion of Pulse Desensitization	16
	8.3	Emissions Test Procedures	16
9.0	CON	FIDENTIALITY REQUEST	19
10 0	EOU	IDMENIT LIST	10



1.0 GENERAL DESCRIPTION

1.1 Product Description

The EUT is powered by 1 x 3.7V rechargeable battery. After switching on the EUT and being paired with the smart phone via Bluetooth (Bluetooth V4.0, BLE only), the user can press a sequence of commands via the smart phone app. Each command is either one forward/backward movement, left/ right turn, or a pause. When the "Go" button is pressed, the unit will execute all the commands stored in order with a short pause between each command.

Antenna Type: Internal, Integral

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

1.2 Related Submittal(s) Grants

This is a single application for certification of a transceiver.

1.3 Test Methodology

Radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). All radiated measurements were performed in an 3m Chamber. Preliminary scans were performed in the 3m Chamber only to determine worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "Justification Section" of this Application.

1.4 Test Facility

The 3m Chamber facility used to collect the radiated data is located at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong. This test facility and site measurement data have been placed on file with the FCC.



2.0 SYSTEM TEST CONFIGURATION

2.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.10 (2013).

The device was powered by DC 3.7V (1 x 3.7V Rechargeable battery).

For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Exhibit 3.0.

The unit was operated standalone and placed in the center of the turntable.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was mounted to a plastic stand if necessary and placed on the wooden turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

2.2 EUT Exercising Software

There was no special software to exercise the device. Once the unit is powered up, it transmits the RF signal continuously.

2.3 Special Accessories

There are no special accessories necessary for compliance of this product.

2.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

2.5 Support Equipment List and Description

N/A.



3.0 EMISSION RESULTS

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

3.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any), Average Factor (optional) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CF - AG - AV

where $FS = Field Strength in dB\mu V/m$

RA = Receiver Amplitude (including preamplifier) in $dB\mu V$

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB AG = Amplifier Gain in dB AV = Average Factor in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows:

FS = RR + LF

where $FS = Field Strength in dB\mu V/m$

RR = RA - AG - AV in $dB\mu V$

LF = CF + AF in dB

Assume a receiver reading of 52.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB are added. The amplifier gain of 29 dB and average factor of 5 dB are subtracted, giving a field strength of 27 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

 $RA = 52.0 dB\mu V/m$

 $AF = 7.4 \text{ dB} \qquad \qquad RR = 18.0 \text{ dB}\mu\text{V}$

CF = 1.6 dB LF = 9.0 dB

AG = 29.0 dBAV = 5.0 dB

FS = RR + LF

 $FS = 18 + 9 = 27 \, dB\mu V/m$

Level in $\mu V/m = Common Antilogarithm [(27 dB<math>\mu V/m)/20] = 22.4 \mu V/m$



3.2 Radiated Emission Configuration Photograph

The worst case in radiated emission was found at 4960 MHz

For electronic filing, the worst case radiated emission configuration photographs are saved with filename: radiated photos.pdf.

3.3 Radiated Emission Data

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgment: Passed by 18.1 dB



RADIATED EMISSIONS

Model: IT10000

Date of Test: March 15, 2019

Worst-Case Operating Mode: Transmitting

Table 1

Pursuant to FCC Part 15 Section 15.249 Requirement

Lowest Channel

Polari- zation	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBµV/m)	Average Limit at 3m (dBµV/m)	Margin (dB)
Н	2402.000	77.4	33	29.4	73.8	94.0	-20.2
Н	4804.000	31.1	33	34.9	33.0	54.0	-21.0
Н	7216.000	29.3	33	37.9	34.2	54.0	-19.8
Н	9608.000	25.5	33	40.4	32.9	54.0	-21.1
Н	12010.000	27.0	33	40.5	34.5	54.0	-19.5
Н	14412.000	27.8	33	40.0	34.8	54.0	-19.2

			Pre-Amp	Antenna	Net at	Peak Limit	
Polari-	Frequency	Reading	Gain	Factor	3m - Peak	at 3m	Margin
zation	(MHz)	(dBµV)	(dB)	(dB)	(dBµV/m)	(dBµV/m)	(dB)
Н	2402.000	95.3	33	29.4	91.7	114.0	-22.3
Н	4804.000	45.1	33	34.9	47.0	74.0	-27.0
Н	7216.000	41.5	33	37.9	46.4	74.0	-27.6
H	9608.000	38.9	33	40.4	46.3	74.0	-27.7
Н	12010.000	38.2	33	40.5	45.7	74.0	-28.3
Н	14412.000	38.6	33	40.0	45.6	74.0	-28.4

NOTES: 1. Peak Detector Data unless otherwise stated.

- 2. Average detector is applied according to ANSI C63.10.
- 3. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
- 4. Negative sign in the column shows value below limit.
- 5. Horn antenna is used for the emission over 1000MHz.
- 6. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
- 7. Measurement Uncertainty is ±5.3dB at a level of confidence of 95%.



Model: IT10000

Date of Test: March 15, 2019

Worst-Case Operating Mode: Transmitting

Table 2 Pursuant to FCC Part 15 Section 15.249 Requirement

Middle Channel

Polari- zation	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBµV/m)	Average Limit at 3m (dBµV/m)	Margin (dB)
Н	2440.000	79.2	33	29.4	75.6	94.0	-18.4
Н	4880.000	29.5	33	34.9	31.4	54.0	-22.6
Н	7320.000	25.5	33	37.9	30.4	54.0	-23.6
Н	9760.000	23.9	33	40.4	31.3	54.0	-22.7
Н	12200.000	22.1	33	40.5	29.6	54.0	-24.4
Н	14640.000	25.8	33	38.4	31.2	54.0	-22.8

			Pre-Amp	Antenna	Net at	Peak Limit	
Polari-	Frequency	Reading	Gain	Factor	3m - Peak	at 3m	Margin
zation	(MHz)	(dBµV)	(dB)	(dB)	(dBµV/m)	(dBµV/m)	(dB)
Н	2440.000	96.7	33	29.4	93.1	114.0	-20.9
Н	4880.000	44.9	33	34.9	46.8	74.0	-27.2
Н	7320.000	40.7	33	37.9	45.6	74.0	-28.4
Н	9760.000	38.8	33	40.4	46.2	74.0	-27.8
Н	12200.000	37.3	33	40.5	44.8	74.0	-29.2
Н	14640.000	40.5	33	38.4	45.9	74.0	-28.1

NOTES: 1. Peak Detector Data unless otherwise stated.

- 2. Average detector is applied according to ANSI C63.10.
- 3. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
- 4. Negative sign in the column shows value below limit.
- 5. Horn antenna is used for the emission over 1000MHz. (for Over 1GHz)
- 6. Emission (the row indicated by bold italic) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
- 7. Measurement Uncertainty is ±5.3dB at a level of confidence of 95%.



Model: IT10000

Date of Test: March 15, 2019

Worst-Case Operating Mode: Transmitting

Table 3 **Pursuant to FCC Part 15 Section 15.249 Requirement**

Highest Channel

		1	i	1	Net at	1	
Polari- zation	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	3m - Average (dBµV/m)	Average Limit at 3m (dBµV/m)	Margin (dB)
Н	2480.000	75.6	33	29.4	72.0	94.0	-22.1
Н	4960.000	34.0	33	34.9	35.9	54.0	-18.1
Н	7440.000	28.6	33	37.9	33.5	54.0	-20.5
Н	9920.000	23.9	33	40.4	31.3	54.0	-22.7
Н	12400.000	25.1	33	40.5	32.6	54.0	-21.4
Н	14880.000	29.7	33	38.4	35.1	54.0	-18.9

			Pre-Amp	Antenna	Net at	Peak Limit	
Polari-	Frequency	Reading	Gain	Factor	3m - Peak	at 3m	Margin
zation	(MHz)	(dBµV)	(dB)	(dB)	(dBµV/m)	(dBµV/m)	(dB)
Н	2480.000	93.6	33	29.4	90.0	114.0	-24.0
Н	4960.000	48.4	33	34.9	50.3	74.0	-23.7
Н	7440.000	43.2	33	37.9	48.1	74.0	-25.9
Н	9920.000	41.8	33	40.4	49.2	74.0	-24.8
Н	12400.000	40.1	33	40.5	47.6	74.0	-26.4
Н	14880.000	44.5	33	38.4	49.9	74.0	-24.1

NOTES: 1. Peak Detector Data unless otherwise stated.

- 2. Average detector is applied according to ANSI C63.10.
- 3. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
- 4. Negative sign in the column shows value below limit.
- 5. Horn antenna is used for the emission over 1000MHz.
- 6. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
- 7. Measurement Uncertainty is ±5.3dB at a level of confidence of 95%.



4.0 EQUIPMENT PHOTOGRAPHS

For electronic filing, the photographs are saved with filename: external photos.pdf and internal photos.pdf.

5.0 PRODUCT LABELLING

For electronics filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

6.0 TECHNICAL SPECIFICATIONS

For electronic filing, the block diagram and schematic of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

7.0 INSTRUCTION MANUAL

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.



8.0 MISCELLANEOUS INFORMATION

The miscellaneous information includes details of the test procedure and measured bandwidth / calculation of factor such as pulse desensitization and averaging factor (calculation and timing diagram).


8.1 Radiated Emission on the Bandedge


From the following plots, they show that the fundamental emissions are confined in the specified band (2400MHz to 2483.5MHz). In case of the fundamental emissions are within two standard bandwidths from the bandedge, the delta measurement technique is used for determining bandedge compliance. Standard bandwidth is the bandwidth specified by ANSI C63.10 (2013) for frequency being measured.

Emissions radiated outside of the specified frequency bands, except harmonics, are attenuated by 50dB below the level of the fundamental or to the general radiated emissions limits in Section 15.209, whichever is the lesser attenuation, which meet the requirement of part 15.249(d).



PEAK MEASUREMENT

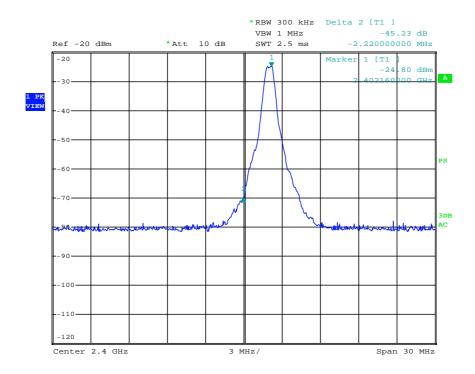

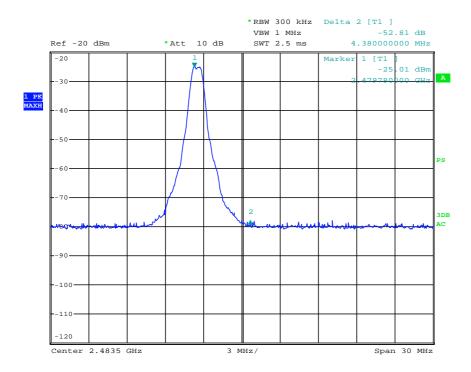



PEAK MEASUREMENT

Bandedge compliance is determined by applying marker-delta method, i.e. (Bandedge Plot).

Lower bandedge

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the plot

=91.7
$$dB\mu V/m - 45.2 dB$$

=46.5 $dB\mu V/m$

Average Resultant field strength = Fundamental emissions (average value) – delta from the plot

```
=73.8 dB\mu V/m - 45.2 dB
=28.6 dB\mu V/m
```

Upper bandedge

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the plot

```
=90.0 dB\muV/m – 52.8 dB =37.2dB\muV/m
```

Average Resultant field strength = Fundamental emissions (average value) – delta from the plot

```
=72.0 dB\muV/m – 52.8 dB =19.2 dB\muV/m
```

The resultant field strength meets the general radiated emission limit in Section 15.209, which does not exceed 74 dB μ V/m (Peak Limit) but exceeded 54 dB μ V/m (Average Limit).



8.2 Discussion of Pulse Desensitization

Pulse desensitivity is not applicable for this device. Since the transmitter transmits the RF signal continuously.

8.3 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services Hong Kong Ltd. in the measurements of transmitter operating under the Part 15, Subpart C rules.

The transmitting equipment under test (EUT) is placed on a wooden turntable which is four feet in diameter and approximately 0.8m in height above the ground plane for emission measurement at or below 1GHz and 1.5m in height above the ground plane for emission measurement above 1GHz. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjusted through all three orthogonal axis to obtain maximum emission levels. The antenna height and polarization are also varied during the testing to search for maximum signal levels. The height of the antenna is varied from one to four meters.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in Exhibit 8.3.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.



8.3 Emissions Test Procedures (cont'd)

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements were made as described in ANSI C63.10 (2013).


The IF bandwidth used for measurement of radiated signal strength was 100 kHz or greater when frequency is below 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. A discussion of whether pulse desensitivity is applicable to this unit is included in this report (See Exhibit 8.1). Above 1000 MHz, a resolution bandwidth of 3 MHz is used.

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the forbidden bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, unless otherwise reported. Measurements taken at a closer distance are so marked.




8.3.1 Radiated Emission Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

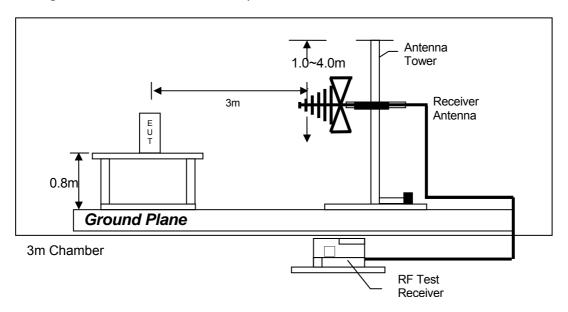

Test setup of radiated emissions up to 1GHz

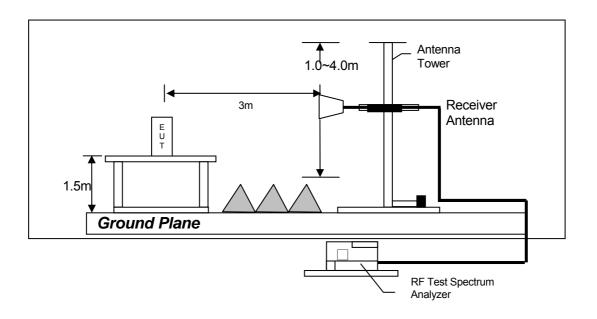

Test setup of radiated emissions above 1GHz



9.0 CONFIDENTIALITY REQUEST

For electronic filing, a preliminary copy of the confidentiality request is saved with filename: request.pdf.

10.0 EQUIPMENT LIST

1) Radiated Emissions Test

Equipment	EMI Test Receiver	Spectrum Analyzer	Biconical Antenna
Registration No.	EW-2666	EW-2425	EW-0571
Manufacturer	ROHDESCHWARZ	ROHDESCHWARZ	EMCO
Model No.	ESC17	FSP3	3104C
Calibration Date	August 28, 2018	August 17, 2018	February 27, 2018
Calibration Due Date	August 28, 2019	August 17, 2019	August 27, 2019

Equipment	Log Periodic Antenna	Double Ridged Guide Antenna	14m Double Shield RF Cable (20MHz - 6GHz)
Registration No.	EW-0447	EW-1015	EW-2074
Manufacturer	EMCO	EMCO	RADIALL
Model No.	3148	3115	Nm-RG142-
Calibration Date	January 17, 2018	November 17, 2017	March 27, 2018
Calibration Due Date	July 17, 2019	May 17, 2019	March 27, 2019

Equipment	RF Cable 14m (1GHz to 26.5GHz)	RF Pre-amplifier 3 pcs (9kHz to 40GHz)	Horn Antenna (14GHz - 40GHz)
Registration No.	EW-2781	EW-3006	EW-1679
Manufacturer	GREATBILLION	SCHWARZBECK	SCHWARZBECK
Model No.	SMA m/SHF5MPU	BBV 9718	BBHA9170
	/SMA m ra14m,26G		
Calibration Date	October 27, 2018	April 26, 2018	September 25, 2018
Calibration Due Date	October 27, 2019	April 26, 2019	September 25, 2019

2) Bandedge Measurement

Equipment	Spectrum Analyzer
Registration No.	EW-2249
Manufacturer	R&S
Model No.	FSP30
Calibration Date	May 17, 2018
Calibration Due Date	May 17, 2019

END OF TEST REPORT