

## FCC TEST REPORT

For

PURO Sound Labs, LLC

Bluetooth Headphone

Test Model: BT5200

Prepared for  
Address

: PURO Sound Labs, LLC  
: 13700 Alton Parkway, Suite 154-155, Irvine, CA 92618

Prepared by  
Address

: Shenzhen LCS Compliance Testing Laboratory Ltd.  
: 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,  
Bao'an District, Shenzhen, Guangdong, China

Tel  
Fax  
Web  
Mail

: (+86)755-82591330  
: (+86)755-82591332  
: [www.LCS-cert.com](http://www.LCS-cert.com)  
: [webmaster@LCS-cert.com](mailto:webmaster@LCS-cert.com)

Date of receipt of test sample : September 14, 2015  
Number of tested samples : 1  
Sample Number : 15090923  
Date of Test : September 16, 2015 - September 21, 2015  
Date of Report : September 21, 2015

**FCC TEST REPORT****FCC CFR 47 PART 15 C(15.247): 2014****Report Reference No. .... : LCS1509140655E**

Date of Issue ..... : September 21, 2015

**Testing Laboratory Name..... : Shenzhen LCS Compliance Testing Laboratory Ltd.**

Address ..... : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China

Testing Location/ Procedure..... : Full application of Harmonised standards  Partial application of Harmonised standards  Other standard testing method **Applicant's Name..... : PURO Sound Labs, LLC**

Address ..... : 13700 Alton Parkway, Suite 154-155, Irvine, CA 92618

**Test Specification**

Standard ..... : FCC CFR 47 PART 15 C(15.247): 2014 / ANSI C63.10: 2013

**Test Report Form No..... : LCSEMC-1.0**

TRF Originator ..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF ..... : Dated 2011-03

**Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test Item Description. .... : Bluetooth Headphone**

Trade Mark ..... : puro

Test Model ..... : BT5200

Ratings ..... : DC 3.7V by build-in battery(400mAh)  
Recharge Voltage: DC 5V/150mAResult ..... : **Positive****Compiled by:**

Leo Lee/ File administrators

**Supervised by:**

Glin Lu/ Technique principal

**Approved by:**

Gavin Liang/ Manager

## FCC -- TEST REPORT

<b>Test Report No. : LCS1509140655E</b>	<u>September 21, 2015</u> Date of issue
---	--

Test Model..... : BT5200

EUT..... : Bluetooth Headphone

**Applicant..... : PURO Sound Labs, LLC**

Address..... : 13700 Alton Parkway, Suite 154-155, Irvine, CA 92618

Telephone..... : /

Fax..... : /

**Manufacturer..... : PURO Sound Labs, LLC**

Address..... : 13700 Alton Parkway, Suite 154-155, Irvine, CA 92618

Telephone..... : /

Fax..... : /

**Factory..... : PURO Sound Labs, LLC**

Address..... : 13700 Alton Parkway, Suite 154-155, Irvine, CA 92618

Telephone..... : /

Fax..... : /

<b>Test Result</b>	<b>Positive</b>
--------------------	-----------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## TABLE OF CONTENTS

Description	Page
<b>1. GENERAL INFORMATION .....</b>	<b>5</b>
1.1. DESCRIPTION OF DEVICE (EUT) .....	5
1.2. HOST SYSTEM CONFIGURATION LIST AND DETAILS .....	5
1.3. EXTERNAL I/O .....	5
1.4. DESCRIPTION OF TEST FACILITY .....	6
1.5. STATEMENT OF THE MEASUREMENT UNCERTAINTY .....	6
1.6. MEASUREMENT UNCERTAINTY .....	6
1.7. DESCRIPTION OF TEST MODES .....	7
<b>2. TEST METHODOLOGY.....</b>	<b>8</b>
2.1. EUT CONFIGURATION .....	8
2.2. EUT EXERCISE .....	8
2.3. GENERAL TEST PROCEDURES .....	8
<b>3. SYSTEM TEST CONFIGURATION .....</b>	<b>9</b>
3.1. JUSTIFICATION .....	9
3.2. EUT EXERCISE SOFTWARE.....	9
3.3. SPECIAL ACCESSORIES.....	9
3.4. BLOCK DIAGRAM/SCHEMATICS .....	9
3.5. EQUIPMENT MODIFICATIONS .....	9
3.6. TEST SETUP .....	9
<b>4. SUMMARY OF TEST RESULTS.....</b>	<b>10</b>
<b>5. TEST RESULT.....</b>	<b>11</b>
5.1. MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT.....	11
5.2. POWER SPECTRAL DENSITY MEASUREMENT .....	12
5.3. 6 DB SPECTRUM BANDWIDTH MEASUREMENT .....	15
5.4. RADIATED EMISSIONS MEASUREMENT .....	20
5.5. CONDUCTED SPURIOUS EMISSIONS AND BAND EDGES TEST .....	27
5.6. POWER LINE CONDUCTED EMISSIONS .....	31
5.7. ANTENNA REQUIREMENTS.....	34
<b>6. LIST OF MEASURING EQUIPMENTS.....</b>	<b>35</b>

## 1. GENERAL INFORMATION

### 1.1. Description of Device (EUT)

EUT : Bluetooth Headphone  
Test Model : BT5200  
Power Supply : DC 3.7V by build-in battery(400mAh)  
Recharge Voltage: DC 5V/150mA  
Hardware Version : 00  
Software Version : CSR8645  
Frequency Range : 2402.00-2480.00MHz  
Channel Number : 79 channels for Bluetooth V4.0 (DSS)  
40 channels for Bluetooth V4.0 (DTS)  
Channel Spacing : 1MHz for Bluetooth V4.0 (DSS)  
2MHz for Bluetooth V4.0 (DTS)  
Modulation Type : GFSK, Pi/4-DQPSK, 8-DPSK for Bluetooth V4.0 (DSS)  
GFSK for Bluetooth V4.0 (DTS)  
Bluetooth Version : This report is only for V4.0 BLE part only.  
For V3.0 part, please see another separate report.  
Antenna Description : IFA antenna, 0.6dBi(Max.)

### 1.2. Host System Configuration List and Details

Manufacturer	Description	Model	Serial Number	Certificate
Lenovo	Notebook	B470	WB05067151	DOC
Lenovo	AC/DC ADAPTER	ADP-90DD B	36001941	VOC

### 1.3. External I/O

I/O Port Description	Quantity	Cable
USB Port	1	1.0m, unshielded
Audio Port	1	N/A

## 1.4. Description of Test Facility

CNAS Registration Number. is L4595.

FCC Registration Number. is 899208.

Industry Canada Registration Number. is 9642A-1.

VCCI Registration Number. is C-4260 and R-3804.

ESMD Registration Number. is ARCB0108.

UL Registration Number. is 100571-492.

TUV SUD Registration Number. is SCN1081.

TUV RH Registration Number. is UA 50296516-001

## 1.5. Statement of The Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

## 1.6. Measurement Uncertainty

Test Item		Frequency Range	Uncertainty	Note
Radiation Uncertainty	:	9KHz~30MHz	3.10dB	(1)
		30MHz~200MHz	2.96dB	(1)
		200MHz~1000MHz	3.10dB	(1)
		1GHz~26.5GHz	3.80dB	(1)
		26.5GHz~40GHz	3.90dB	(1)
Conduction Uncertainty	:	150kHz~30MHz	1.63dB	(1)
Power disturbance	:	30MHz~300MHz	1.60dB	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 1.7. Description Of Test Modes

Bluetooth operates in the unlicensed ISM Band at 2.4GHz. The EUT was set to transmit at 100% duty cycle. The following operating modes were applied for the related test items. All test modes were tested, only the result of the worst case was recorded in the report.

Mode of Operations	Frequency Range (MHz)	Data Rate (Mbps)
GFSK	2402	1
	2440	1
	2480	1
For Conducted Emission		
Test Mode	TX Mode	
For Radiated Emission		
Test Mode	TX Mode	

Worst-case mode and channel used for 150kHz-30 MHz power line conducted emissions was the mode and channel with the highest output power, that was determined to be TX-High Channel(2480MHz, GFSK).

Worst-case mode and channel used for 9kHz-1000 MHz radiated emissions was the mode and channel with the highest output power, that was determined to be TX-High Channel(2480MHz, GFSK).

\*\*\*Note: Using a temporary antenna connector for the EUT when the conducted measurements are performed.

## 2. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10: 2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen LCS Compliance Testing Laboratory Ltd..

### 2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### 2.2. EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to FCC's request, Test Procedure KDB558074 D01 DTS Meas. Guidance v03r02 is required to be used for this kind of FCC 15.247 digital modulation device.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.205, 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

### 2.3. General Test Procedures

#### 2.3.1 Conducted Emissions

According to the requirements in Section 6.2 of ANSI C63.10: 2013, AC power-line conducted emissions shall be measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

#### 2.3.2 Radiated Emissions

The EUT is placed on a turn table and the turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10: 2013

### 3. SYSTEM TEST CONFIGURATION

#### 3.1. Justification

The system was configured for testing in a continuous transmit condition.

#### 3.2. EUT Exercise Software

N/A

#### 3.3. Special Accessories

N/A

#### 3.4. Block Diagram/Schematics

Please refer to the related document

#### 3.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

#### 3.6. Test Setup

Please refer to the test setup photo.

## 4. SUMMARY OF TEST RESULTS

Applied Standard: FCC Part 15 Subpart C		
FCC Rules	Description of Test	Result
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.247(a)(2)	6dB Bandwidth	Compliant
§15.209, §15.247(d)	Radiated and Conducted Spurious Emissions	Compliant
§15.205	Emissions at Restricted Band	Compliant
§15.207(a)	Line Conducted Emissions	Compliant
§15.203	Antenna Requirements	Compliant

## 5. TEST RESULT

### 5.1. Maximum Conducted Output Power Measurement


#### 5.1.1. Standard Applicable

According to § 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850MHz bands: 1 Watt.

#### 5.1.2. Test Procedures

The transmitter output (antenna port) was connected to the power meter.

#### 5.1.3. Test Setup Layout

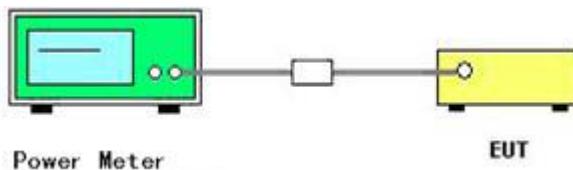

#### 5.1.4. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 5.1.5. Test Result of Maximum Conducted Output Power(Peak)

Modulation	Frequency (MHz)	Output Power (dBm)	Output Power (mW)	Limit (mW)	Result
GFSK	2402	6.13	4.10	1000	Pass
	2440	7.49	5.61	1000	Pass
	2480	7.63	5.79	1000	Pass

## 5.2. Power Spectral Density Measurement


### 5.2.1. Standard Applicable

According to §15.247(e): For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 5.2.2. Test Procedures

- 1) The transmitter was connected directly to a Spectrum Analyzer through a directional couple.
- 2) The power was monitored at the coupler port with a Spectrum Analyzer. The power level was set to the maximum level.
- 3) Set the RBW = 3 kHz.
- 4) Set the VBW  $\geq$  3\*RBW.
- 5) Set the span to 1.5 times the DTS channel bandwidth.
- 6) Detector = peak.
- 7) Sweep time = auto couple.
- 8) Trace mode = max hold.
- 9) Allow trace to fully stabilize.
- 10) Use the peak marker function to determine the maximum power level in any 3 kHz band segment within the fundamental EBW.

### 5.2.3. Test Setup Layout

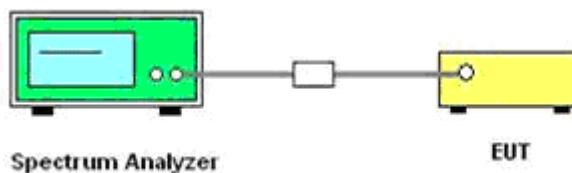

### 5.2.4. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

### 5.2.5. Test Result of Power Spectral Density

Modulation	Frequency (MHz)	Reading Level (dBm/3KHz)	Max. Limit (dBm/3KHz)	Result
GFSK	2402	-9.369	8	Pass
	2440	-7.833	8	Pass
	2480	-7.790	8	Pass

The test data refer to the following page.

Low Channel, 2402MHz

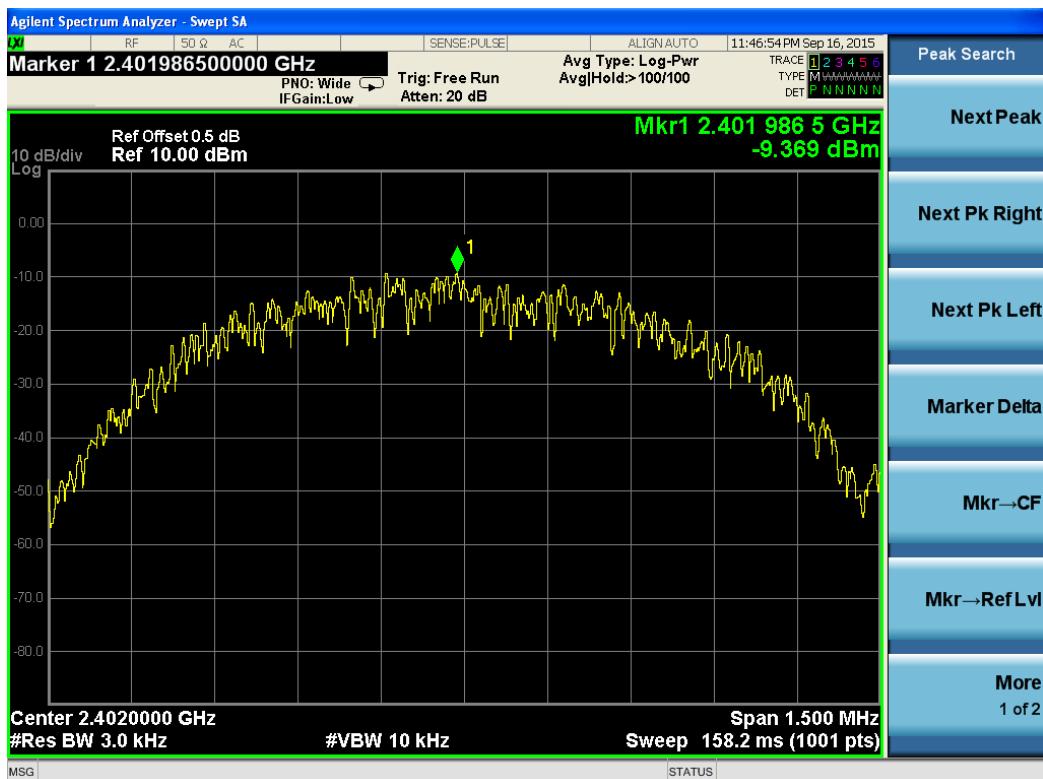

## Middle Channel, 2440MHz



## High Channel, 2480MHz



### 5.3. 6 dB Spectrum Bandwidth Measurement

#### 5.3.1. Standard Applicable

According to §15.247(a)(2): Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

#### 5.3.2. Instruments Setting


The following table is the setting of the Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	3MHz
RBW/VBW	100kHz/300kHz
Detector	Peak
Trace	Max Hold

#### 5.3.3. Test Procedures

- 1) The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
- 2) The resolution bandwidth and the video bandwidth were set according to KDB558074 D01 DTS Meas. Guidance v03r02.
- 3) Measured the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.
- 4) Measured the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20dB relative to the maximum level measured in the fundamental emission.

#### 5.3.4. Test Setup Layout

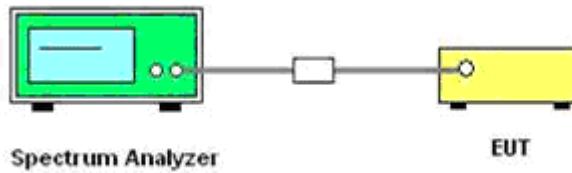

#### 5.3.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

### 5.3.6. Test Result of Spectrum Bandwidth

Modulation	Frequency (MHz)	6dB Bandwidth (KHz)	Min. Limit (KHz)	Result
GFSK	2402	510.0	500	Complies
	2440	510.2	500	Complies
	2480	510.8	500	Complies

### Test Plots For 6dB Bandwidth:

Low Channel, 2402MHz



## Middle Channel, 2440MHz



## High Channel, 2480MHz



Modulation	Frequency (MHz)	20dB Bandwidth (MHz)	Limit
GFSK	2402	1.193	Non-specified
	2440	1.186	
	2480	1.189	

### Test Plots For 20dB Bandwidth:

Low Channel, 2402MHz



## Middle Channel, 2440MHz



## High Channel, 2480MHz



## 5.4. Radiated Emissions Measurement

### 5.4.1. Standard Applicable

According to §15.247 (d): 20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies(MHz)	Field Strength(microvolts/meter)	Measurement Distance(meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 5.4.2. Instruments Setting

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average



Spectrum Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 100kHz for QP


### 5.4.3. Test Procedures

- 1) Configure the EUT according to ANSI C63.10: 2013. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2) Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3) The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.

- 4) For each suspected emissions, the antenna tower was scan (from 1 m to 4 m) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading
- 5) Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6) For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
- 7) When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
- 8) If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9) For the radiated emission test above 1GHz: Place the measurement antenna away from each area of the EUT determined to be a source of emission sat the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10) In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

## 5.4.4. Test Setup Layout

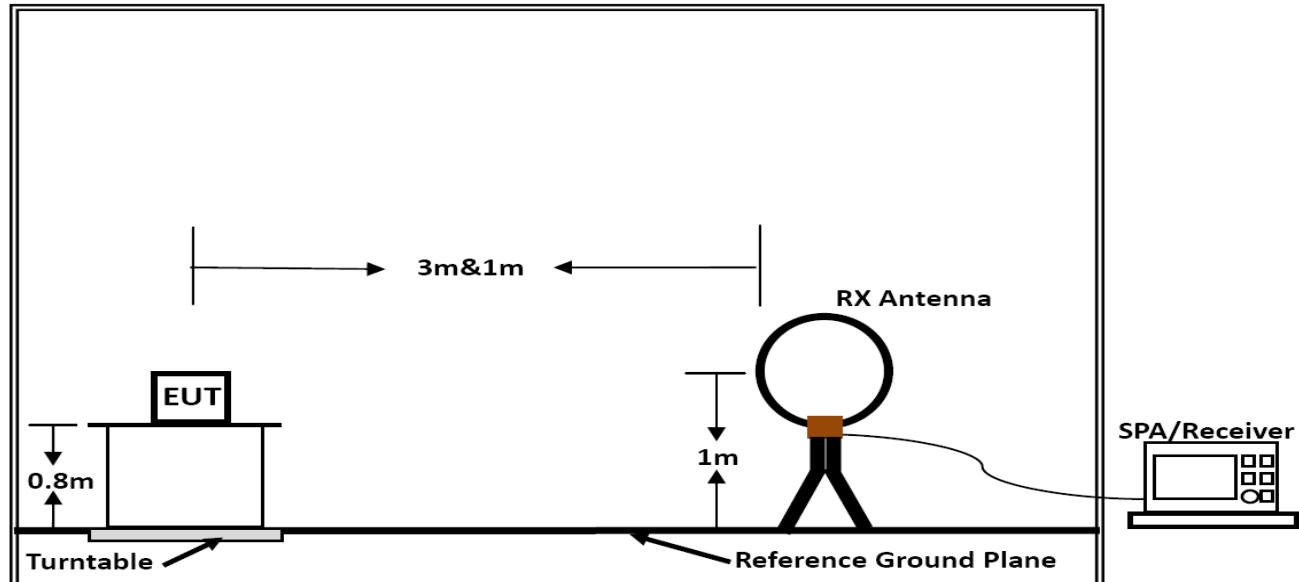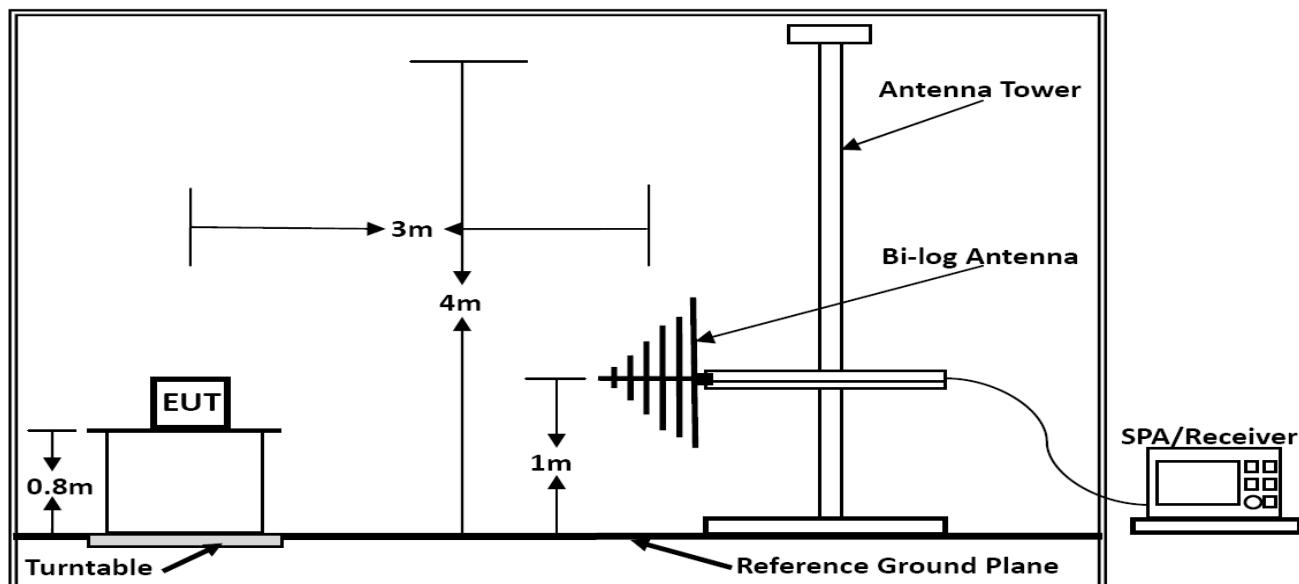**Below 30MHz****Below 1GHz**

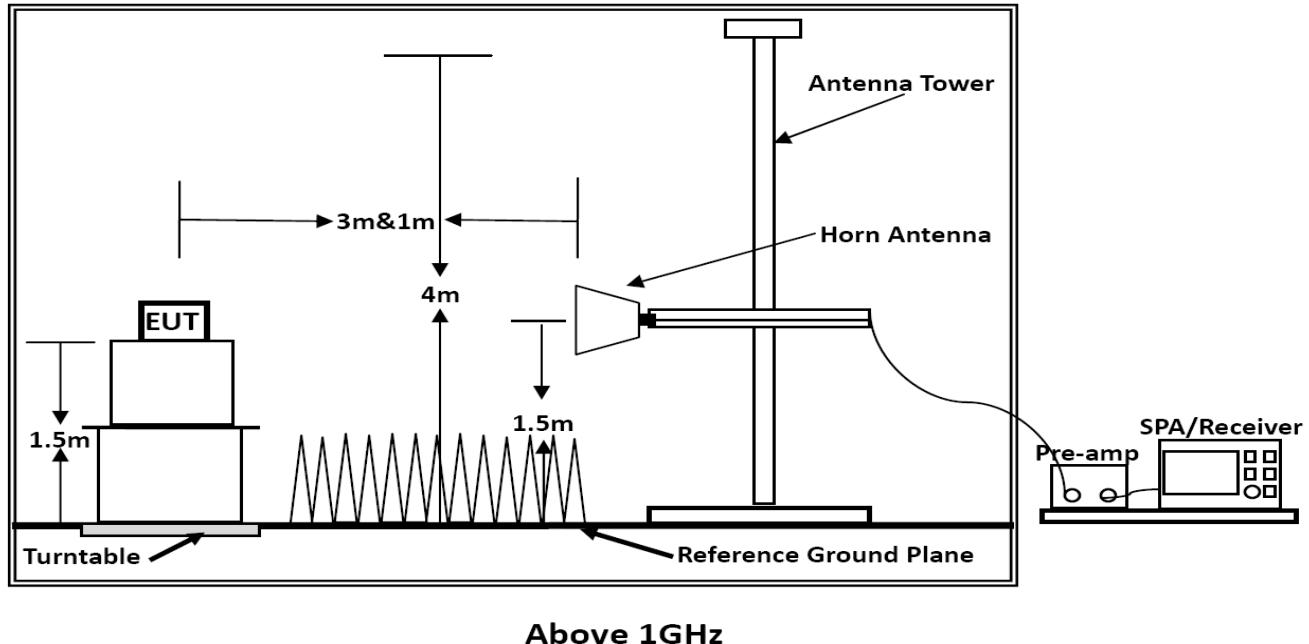

#### 5.4.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 5.4.6. Results of Radiated Emissions (9kHz~30MHz)

Temperature	25°C	Humidity	60%
Test Engineer	Leo	Configurations	BLE V4.0

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Over Limit (dBuV)	Remark
-	-	-	-	See Note

Note:

The radiated emissions from 9kHz to 30MHz are at least 20dB below the official limit and no need to report.


Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

#### 5.4.7. Results of Radiated Emissions (30MHz~1GHz)

**PASS.**


The test data please refer to following page:

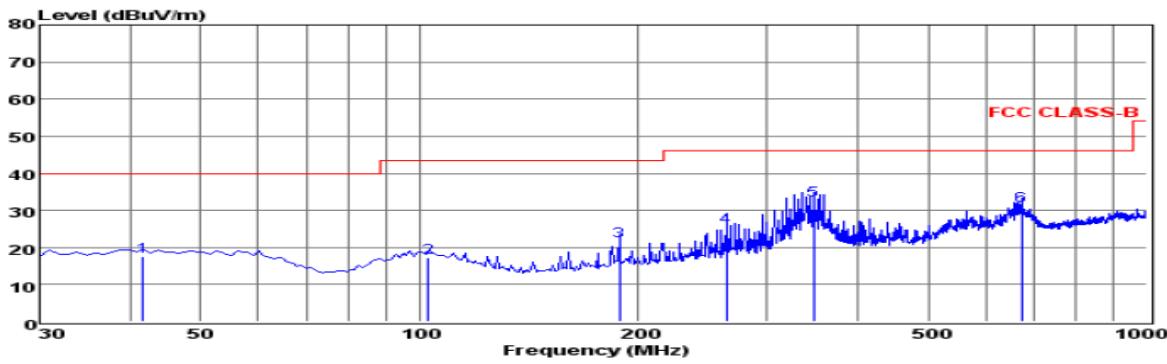

Env./Ins: 24 °C / 56%  
 EUT: Bluetooth Headphone  
 M/N: BT5200  
 Power Rating: DC 3.7V  
 Test Mode: TX-High Channel  
 Operator: Leo  
 Memo:  
 pol: HORIZONTAL

Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	41.64	3.42	0.50	13.57	17.49	40.00	-22.51 QP
2	102.75	3.60	0.60	12.91	17.11	43.50	-26.39 QP
3	188.11	10.22	0.98	10.39	21.59	43.50	-21.91 QP
4	263.77	12.31	1.03	12.17	25.51	46.00	-20.49 QP
5	348.16	17.36	1.13	14.25	32.74	46.00	-13.26 QP
6	672.14	11.01	1.65	18.71	31.37	46.00	-14.63 QP

Note: 1. All readings are Quasi-peak values.  
 2. Measured= Reading + Antenna Factor + Cable Loss  
 3. The emission that ate 20db blow the offical limit are not reported

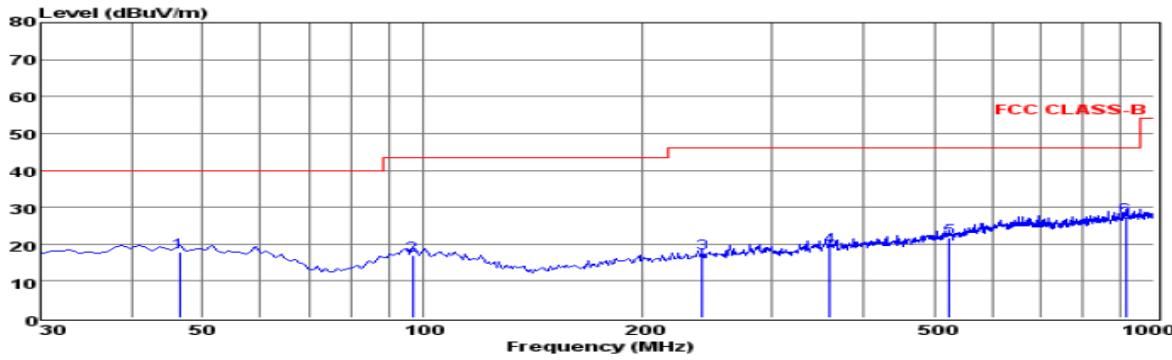

Env./Ins: 24 °C / 56%  
 EUT: Bluetooth Headphone  
 M/N: BT5200  
 Power Rating: DC 3.7V  
 Test Mode: TX-High Channel  
 Operator: Leo  
 Memo:  
 pol: VERTICAL

Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	46.49	3.96	0.35	13.46	17.77	40.00	-22.23 QP
2	96.93	3.47	0.61	12.96	17.04	43.50	-26.46 QP
3	241.46	4.30	1.01	12.09	17.40	46.00	-28.60 QP
4	359.80	3.59	1.18	14.43	19.20	46.00	-26.80 QP
5	524.70	3.33	1.45	17.04	21.82	46.00	-24.18 QP
6	913.67	4.23	2.04	21.18	27.45	46.00	-18.55 QP

Note: 1. All readings are Quasi-peak values.  
 2. Measured= Reading + Antenna Factor + Cable Loss  
 3. The emission that ate 20db blow the offical limit are not reported

\*\*\*Note:

Pre-scan all mode and recorded the worst case results in this report (TX-High Channel(2480MHz, GFSK)).

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Measured Level.

## 5.4.8. Results for Radiated Emissions (Above 1GHz)

## Channel 1

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4804.14	50.61	33.06	35.04	3.94	52.57	74	-21.43	Peak	Horizontal
4804.16	41.13	33.06	35.04	3.94	43.09	54	-10.91	Average	Horizontal
4804.14	52.37	33.06	35.04	3.94	54.33	74	-19.67	Peak	Vertical
4804.16	42.56	33.06	35.04	3.94	44.52	54	-9.48	Average	Vertical

## Channel 20

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4880.21	51.84	33.16	35.15	3.96	53.81	74	-20.19	Peak	Horizontal
4880.23	42.31	33.16	35.15	3.96	44.28	54	-9.72	Average	Horizontal
4880.21	53.67	33.16	35.15	3.96	55.64	74	-18.36	Peak	Vertical
4880.23	43.95	33.16	35.15	3.96	45.92	54	-8.08	Average	Vertical

## Channel 40

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4960.26	52.77	33.26	35.14	3.98	54.87	74	-19.13	Peak	Horizontal
4960.29	43.58	33.26	35.14	3.98	45.68	54	-8.32	Average	Horizontal
4960.26	54.31	33.26	35.14	3.98	56.41	74	-17.59	Peak	Vertical
4960.29	44.62	33.26	35.14	3.98	46.72	54	-7.28	Average	Vertical

## Notes:

1. Measuring frequencies from 9k~10th harmonic (ex. 26GHz), No emission found between lowest internal used/generated frequency to 30MHz.
2. Radiated emissions measured in frequency range from 9k~10th harmonic (ex. 26GHz) were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

## 5.4.9. Results for Band edge Testing (Radiated)

Tx-2402

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
2376.31	44.16	32.89	35.16	3.51	45.40	74	-28.60	Peak	Horizontal
2376.33	34.83	32.90	35.16	3.51	36.08	54	-17.92	Average	Horizontal
2390.00	47.32	32.92	35.16	3.54	48.62	74	-25.38	Peak	Horizontal
2389.97	38.24	32.92	35.16	3.54	39.54	54	-14.46	Average	Horizontal
2400.00	56.50	32.92	35.16	3.54	57.80	74	-16.20	Peak	Horizontal
2399.99	46.86	32.92	35.16	3.54	48.16	54	-5.84	Average	Horizontal
2376.31	44.26	32.89	35.16	3.51	45.50	74	-28.50	Peak	Vertical
2376.33	35.08	32.90	35.16	3.51	36.33	54	-17.67	Average	Vertical
2390.00	48.09	32.92	35.16	3.54	49.39	74	-24.61	Peak	Vertical
2389.97	39.47	32.92	35.16	3.54	40.77	54	-13.23	Average	Vertical
2400.00	57.91	32.92	35.16	3.54	59.21	74	-14.79	Peak	Vertical
2399.99	48.35	32.92	35.16	3.54	49.65	54	-4.35	Average	Vertical

Tx-2480

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
2483.50	47.96	33.06	35.18	3.6	49.44	74	-24.56	Peak	Horizontal
2483.51	38.59	33.08	35.18	3.6	40.09	54	-13.91	Average	Horizontal
2488.63	45.77	33.08	35.18	3.62	47.29	74	-26.71	Peak	Horizontal
2488.66	36.40	33.08	35.18	3.62	37.92	54	-16.08	Average	Horizontal
2483.50	50.00	33.06	35.18	3.6	51.48	74	-22.52	Peak	Vertical
2483.51	40.28	33.08	35.18	3.6	41.78	54	-12.22	Average	Vertical
2488.63	46.69	33.08	35.18	3.62	48.21	74	-25.79	Peak	Vertical
2488.66	36.81	33.08	35.18	3.62	38.33	54	-15.67	Average	Vertical

## 5.5. Conducted Spurious Emissions And Band Edges Test

### 5.5.1. Standard Applicable

According to §15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

### 5.5.2. Instruments Setting

The following table is the setting of the spectrum analyzer.


Spectrum Parameter	Setting
Detector	Peak
Attenuation	Auto
RB / VB (Emission in restricted band)	100KHz/300KHz
RB / VB (Emission in non-restricted band)	100KHz/300KHz

### 5.5.3. Test Procedures

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

### 5.5.4. Test Setup Layout

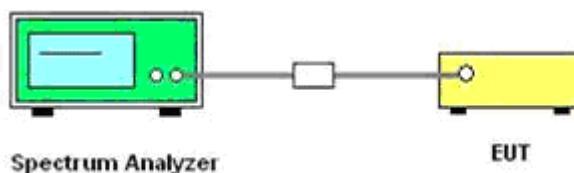


### 5.5.5. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

### 5.5.6. Test Results of Conducted Spurious Emissions


## Test Result of Low Channel:

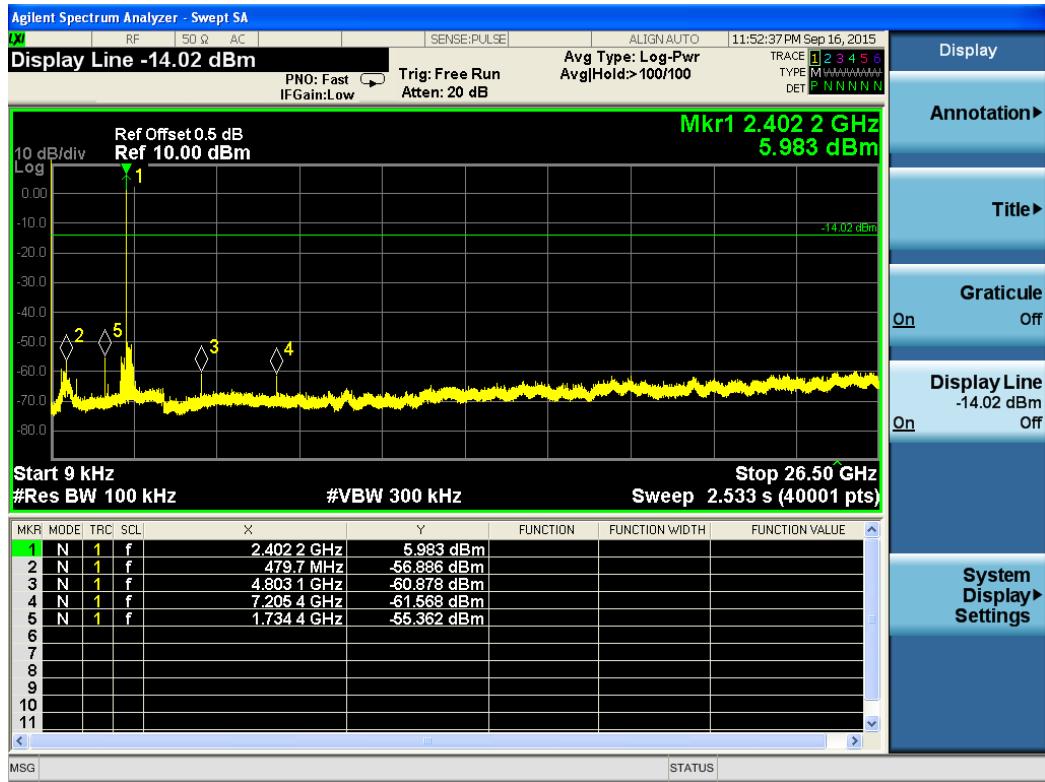


## Test Result of Middle Channel:

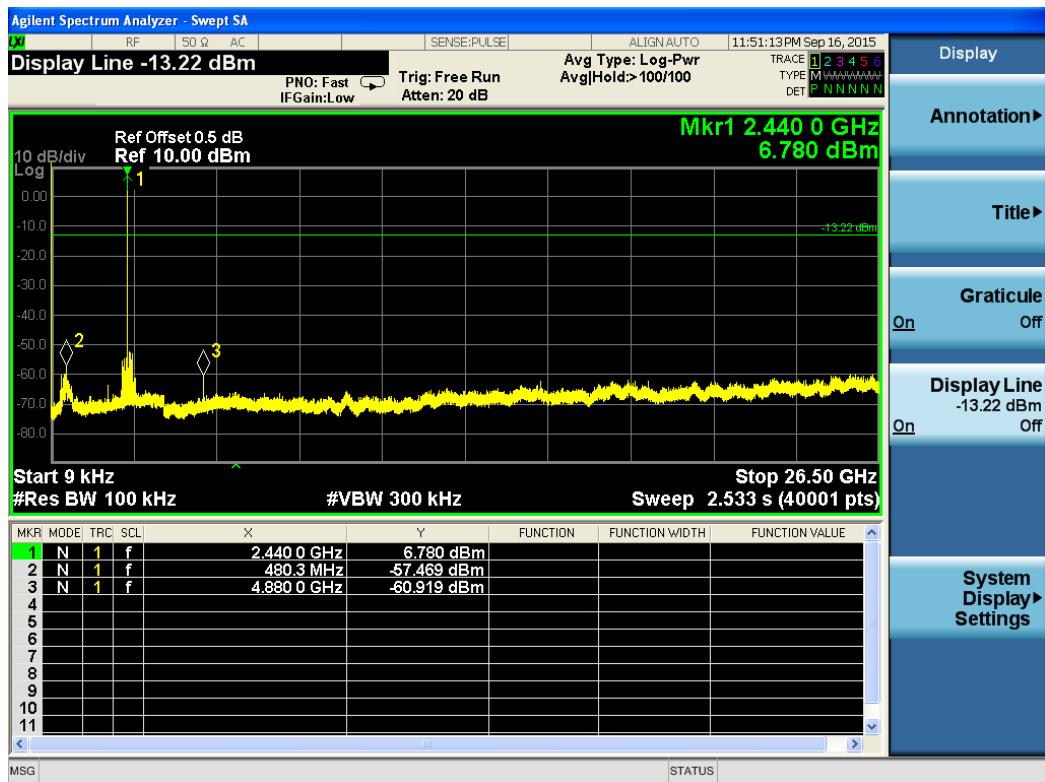

## Test Result of High Channel:

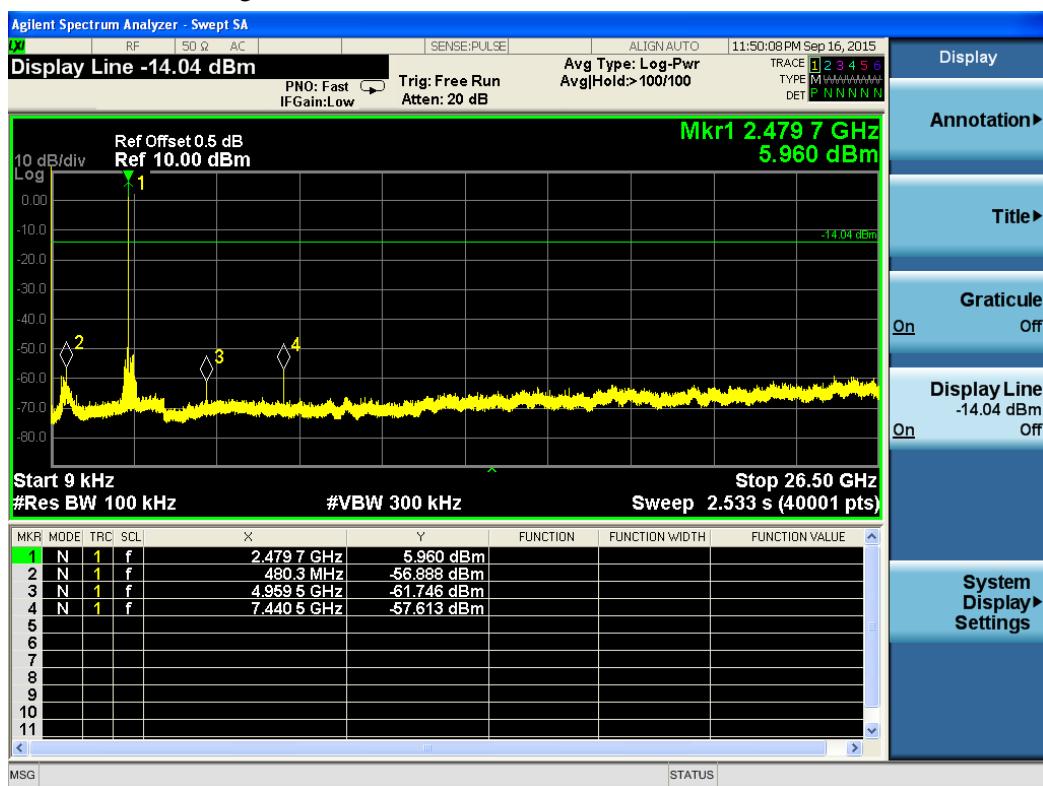

### 5.5.7. Test Results of Band Edges Test

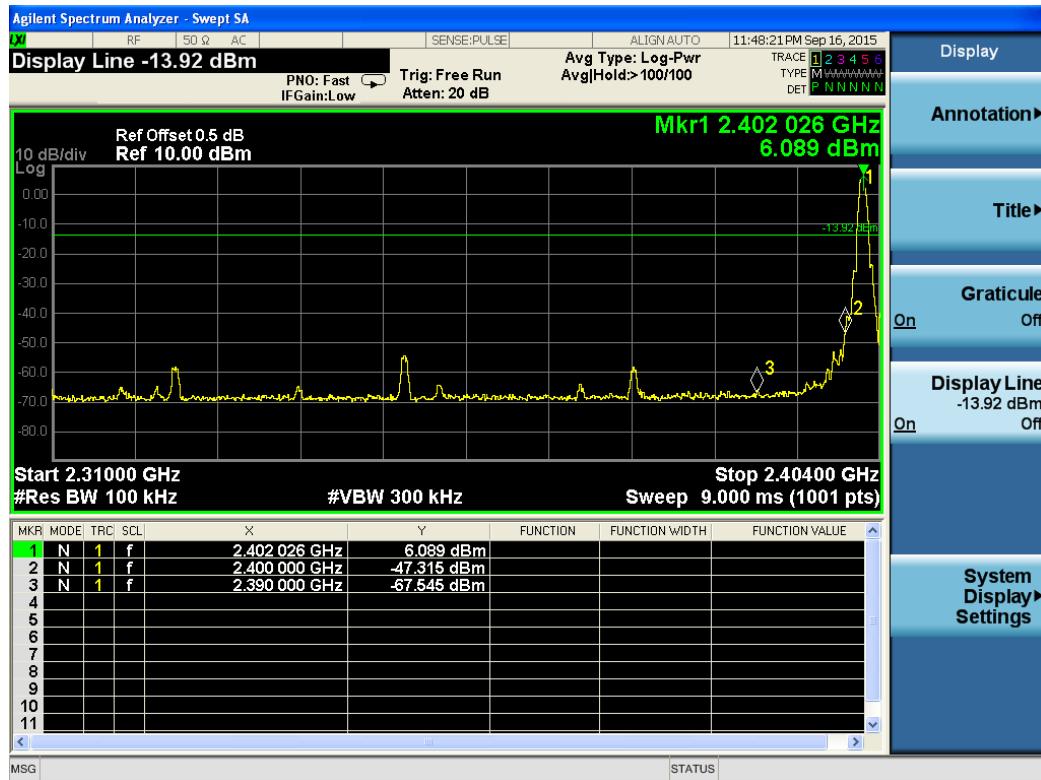


## 5.6. Power line conducted emissions

### 5.6.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

### 5.6.2 Block Diagram of Test Setup


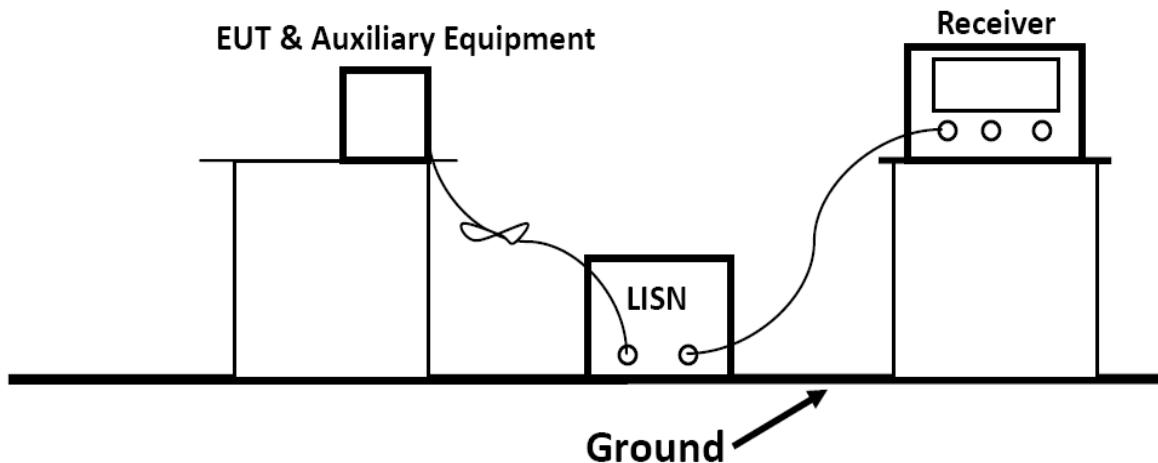


### 5.6.3 Test Results


PASS.

The test data please refer to following page.

## Test Result For Line Power Input AC 240V/60Hz

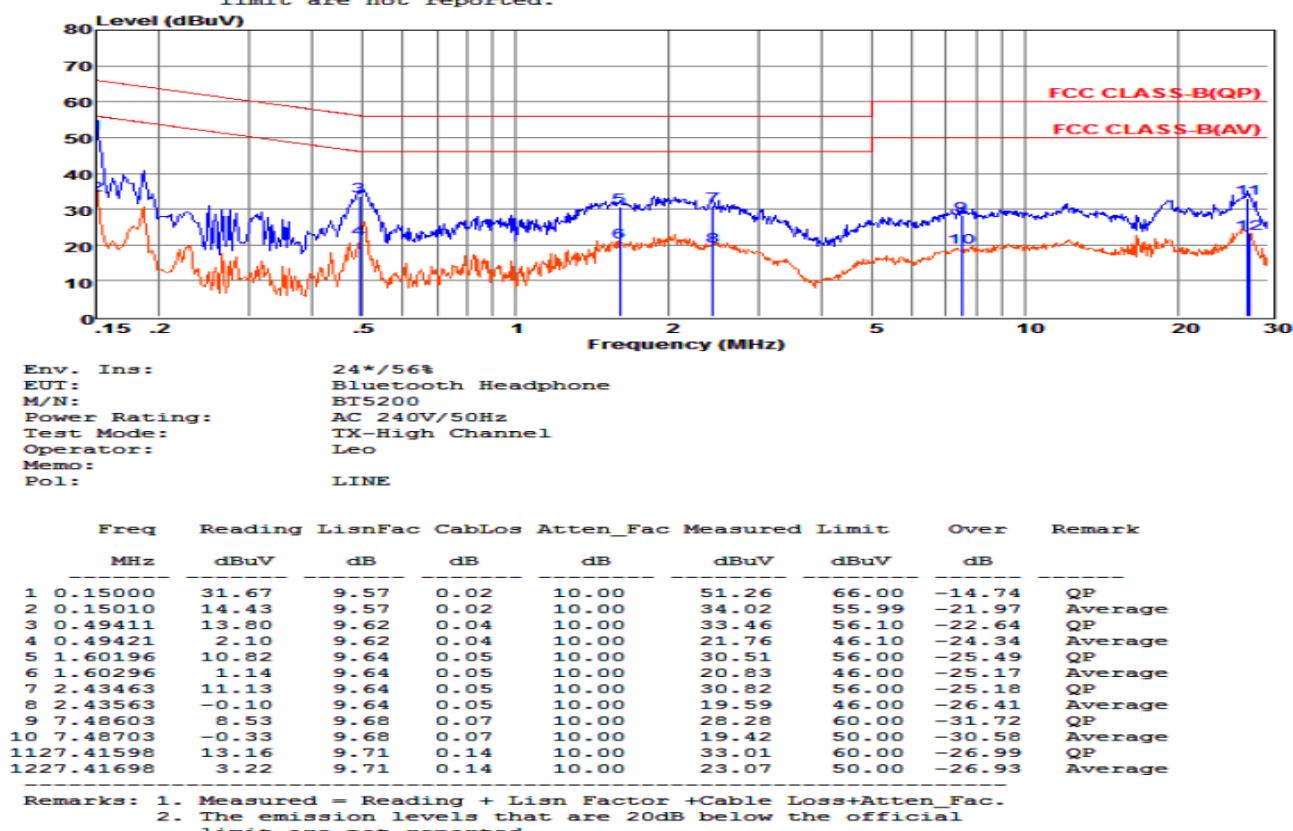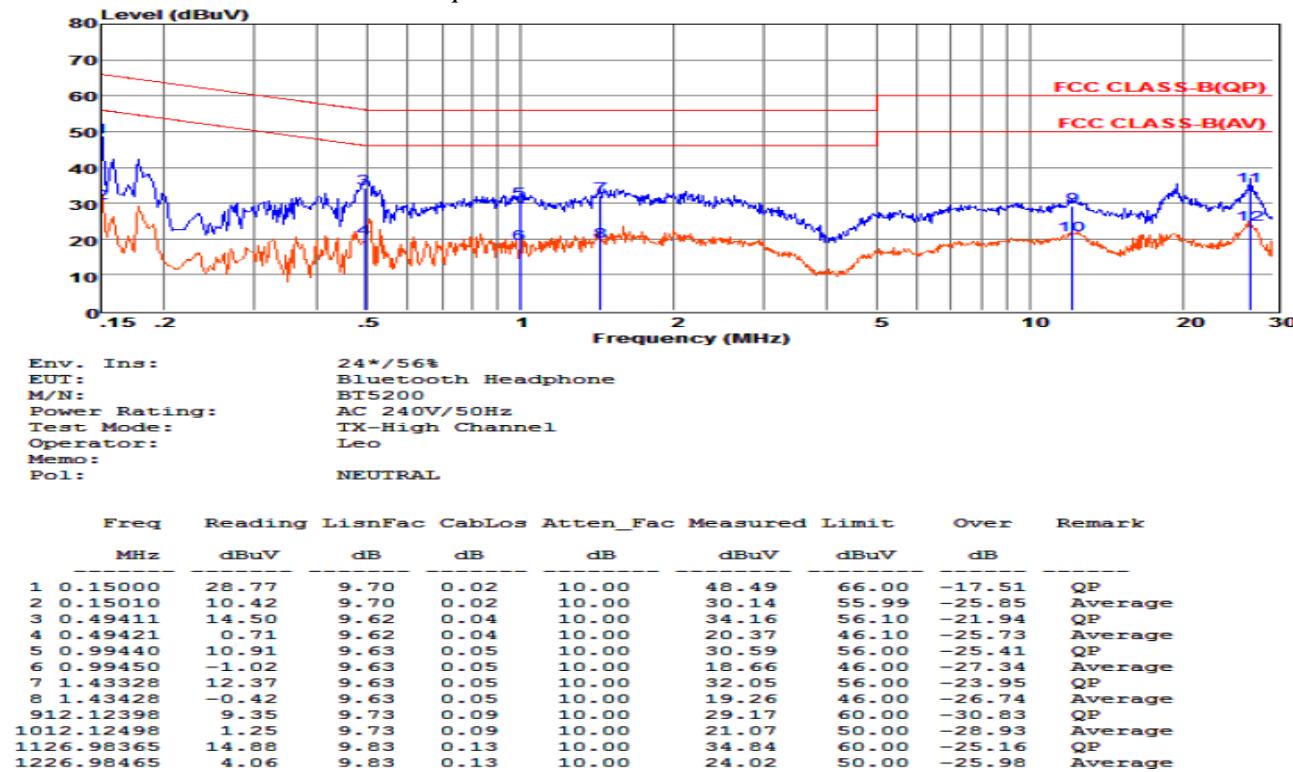


## Test Result For Line Power Input AC 120V/60Hz

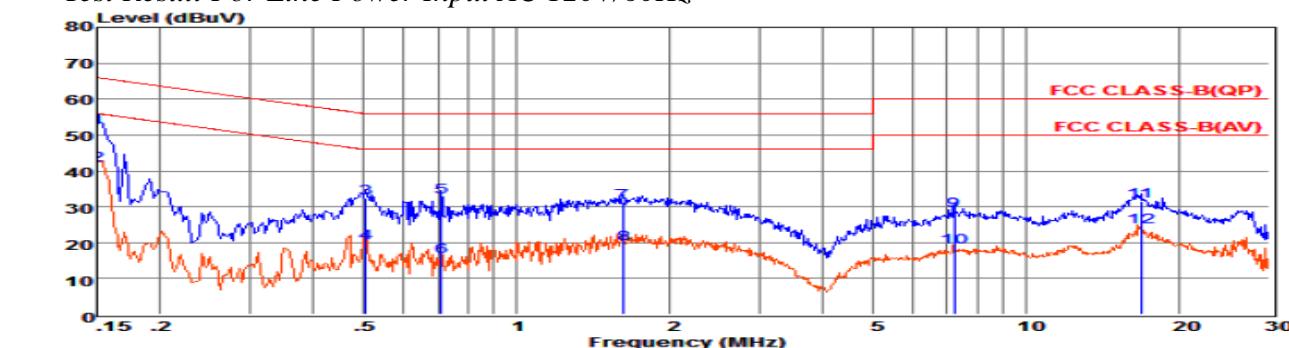

Env. Ins: 24\*/56%  
 EUT: Bluetooth Headphone  
 M/N: BT5200  
 Power Rating: AC 120V/60Hz  
 Test Mode: TX-High Channel  
 Operator: Leo  
 Memo:  
 Pol: NEUTRAL

Freq	Reading	LisnFac	CabLos	Atten_Fac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1 0.15000	32.29	9.70	0.02	10.00	52.01	66.00	-13.99	QP
2 0.15010	22.04	9.70	0.02	10.00	41.76	55.99	-14.23	Average
3 0.50469	12.69	9.62	0.04	10.00	32.35	56.00	-23.65	QP
4 0.50479	0.29	9.62	0.04	10.00	19.95	46.00	-26.05	Average
5 0.71219	12.96	9.63	0.04	10.00	32.63	56.00	-23.37	QP
6 0.71229	-3.51	9.63	0.04	10.00	16.16	46.00	-29.84	Average
7 1.61903	11.61	9.63	0.05	10.00	31.29	56.00	-24.71	QP
8 1.62003	-0.19	9.63	0.05	10.00	19.49	46.00	-26.51	Average
9 7.21347	9.13	9.69	0.07	10.00	28.89	60.00	-31.11	QP
10 7.21447	-1.16	9.69	0.07	10.00	18.60	50.00	-31.40	Average
11 16.74973	11.74	9.76	0.11	10.00	31.61	60.00	-28.39	QP
12 16.75073	4.40	9.76	0.11	10.00	24.27	50.00	-25.73	Average

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten\_Fac.  
 2. The emission levels that are 20dB below the official limit are not reported.

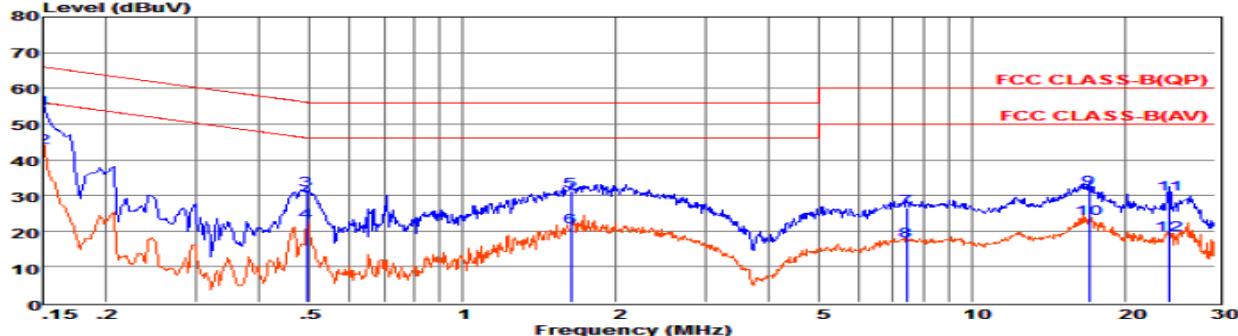

Env. Ins: 24\*/56%  
 EUT: Bluetooth Headphone  
 M/N: BT5200  
 Power Rating: AC 120V/60Hz  
 Test Mode: TX-High Channel  
 Operator: Leo  
 Memo:  
 Pol: LINE

Freq	Reading	LisnFac	CabLos	Atten_Fac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1 0.15000	34.63	9.57	0.02	10.00	54.22	66.00	-11.78	QP
2 0.15010	23.77	9.57	0.02	10.00	43.36	55.99	-12.63	Average
3 0.49411	11.90	9.62	0.04	10.00	31.56	56.10	-24.54	QP
4 0.49421	2.92	9.62	0.04	10.00	22.58	46.10	-23.52	Average
5 1.62763	11.48	9.64	0.05	10.00	31.17	56.00	-24.83	QP
6 1.62863	1.38	9.64	0.05	10.00	21.07	46.00	-24.93	Average
7 7.44647	6.69	9.68	0.07	10.00	26.44	60.00	-33.56	QP
8 7.44747	-2.42	9.68	0.07	10.00	17.33	50.00	-32.67	Average
9 16.92817	11.90	9.73	0.11	10.00	31.74	60.00	-28.26	QP
10 16.92917	3.59	9.73	0.11	10.00	23.43	50.00	-26.57	Average
11 24.39951	10.44	9.71	0.13	10.00	30.28	60.00	-29.72	QP
12 24.40051	-0.84	9.71	0.13	10.00	19.00	50.00	-31.00	Average

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten\_Fac.  
 2. The emission levels that are 20dB below the official limit are not reported.

\*\*\*Note: Pre-scan all mode and recorded the worst case results in this report.

## 5.7. Antenna Requirements

### 5.7.1. Standard Applicable

According to § 15.203, An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 5.7.2. Antenna Connector Construction

The antenna used for transmitting is permanently attached and no consideration of replacement. Please see EUT photo for details.

### 5.7.3. Results: Compliance.

## 6. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Cal Date	Due Date
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	June 18,2015	June 17,2016
Signal analyzer	Agilent	E4448A(External mixers to 40GHz)	US44300469	9kHz~40GHz	July 16,2015	July 15,2016
LISN	SCHWARZBECK	NLSK 8127	N/A	9KHz~30MHz	June 18,2015	June 17,2016
LISN	MESS Tec	NNB-2/16Z	99079	9KHz-30MHz	June 18,2015	June 17,2016
LISN (Support Unit)	EMCO	3819/2NM	9703-1839	9KHz-30MHz	June 18,2015	June 17,2016
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9KHz-30MHz	June 18,2015	June 17,2016
ISN	SCHAFFNER	ISN ST08	21653	9KHz-30MHz	June 18,2015	June 17,2016
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30M-1GHz 3m	June 18,2015	June 17,2016
Amplifier	SCHAFFNER	COA9231A	18667	9kHz-2GHz	July 16,2015	July 15,2016
Amplifier	Agilent	8449B	3008A02120	1GHz-26.5GHz	July 16,2015	July 15,2016
Amplifier	MITEQ	AMF-6F-260400	9121372	26.5GHz-40GHz	July 16,2015	July 15,2016
Spectrum Analyzer	Agilent	E4407B	MY41440292	9k-26.5GHz	Oct. 27, 2014	Oct. 26, 2015
Loop Antenna	R&S	HFH2-Z2	860004/001	9k-30MHz	June 18,2015	June 17,2016
By-log Antenna	SCHWARZBECK	VULB9163	9163-470	30MHz-1GHz	June 10,2015	June 09,2016
Horn Antenna	EMCO	3115	6741	1GHz-18GHz	June 10,2015	June 09,2016
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15GHz-40GHz	June 10,2015	June 09,2016
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz-1GHz	June 18,2015	June 17,2016
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz-40GHz	June 18,2015	June 17,2016
Power Meter	R&S	NRVS	100444	DC-40GHz	June 18,2015	June 17,2016
Power Sensor	R&S	NRV-Z51	100458	DC-30GHz	June 18,2015	June 17,2016
Power Sensor	R&S	NRV-Z32	10057	30MHz-6GHz	June 18,2015	June 17,2016
RF CABLE-1m	JYE Bao	RG142	CB034-1m	20MHz-7GHz	June 18,2015	June 17,2016
RF CABLE-2m	JYE Bao	RG142	CB035-2m	20MHz-1GHz	June 18,2015	June 17,2016

*Note: All equipment through GRT EST calibration*

-----THE END OF REPORT-----