

1-4F, Huafeng Science Park, Xin'an Sixth Road, 82<sup>th</sup> District, Bao'an,

Shenzhen, China.

Telephone: +86-755-29451282,

Fax: +86-755-22639141

Report No.: EBO1412008-E417

Page 1 of 57

# FCC Report (WIFI)

Applicant: SIMPLEX TECNOLOGIA S.A.S

Address of Applicant: Calle 125 # 19-89 of 502, Bogota DC, Colombia

**Equipment Under Test (EUT)** 

Product Name: TABLET PC WITH 3G FUNCTION

Brand Name: Simplex

Model No.: Miratio 600

FCC ID: 2ADT2S-MIRATIO600

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247:2013

Date of sample receipt: January 05, 2015

Date of Test: January 05, 2015 To January 09, 2015

Date of report issued: January 09, 2015

Test Result: PASS \*

Authorized Signature:

Kevin Yu Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the EBO product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of EBO International Electrical Approvals or testing done by EBO International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by EBO International Electrical Approvals in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

<sup>\*</sup> In the configuration tested, the EUT complied with the standards specified above.



Report No.: EBO1412008-E417 Page 2 of 57

### 2 Version

Version No.	Date	Description
00	January 09, 2015	Original

Prepared By:	Jason	Date:	January 09, 2015
	Project Engineer		
Check By:	Ceury	Date:	January 09, 2015



Report No.: EBO1412008-E417 Page 3 of 57

### 3 Contents

			Page
1	COV	/ER PAGE	1
2	VER	SION	2
3	CON	NTENTS	3
4	TES	Page  AGE	
5	GEN	NERAL INFORMATION	5
	5.1	CLIENT INFORMATION	5
	5.2	GENERAL DESCRIPTION OF EUT	5
	5.3		
	5.4	DESCRIPTION OF SUPPORT UNITS	6
	5.5	TEST FACILITY	7
	5.6	TEST LOCATION	7
6	TES	T INSTRUMENTS LIST	8
7	TES	T RESULTS AND MEASUREMENT DATA	9
	7.1	ANTENNA REQUIREMENT	9
	7.2	CONDUCTED EMISSIONS	10
	7.3	CONDUCTED PEAK OUTPUT POWER	13
	7.4		
	7.5		
	7.6		
	7.6.		
	7.6.2		
	7.7		
	7.7.		
	7.7.2	2 Radiated Emission Method	41
8	TES	T SETUP PHOTO	56
9	EUT	CONSTRUCTIONAL DETAILS	57



Report No.: EBO1412008-E417

Page 4 of 57

# 4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(3)	Pass
Channel Bandwidth	15.247 (a)(2)	Pass
Power Spectral Density	15.247 (e)	Pass
Band Edge	15.247(d)	Pass
Spurious Emission	15.205/15.209	Pass

Pass: The EUT complies with the essential requirements in the standard.



Report No.: EBO1412008-E417

Page 5 of 57

### 5 General Information

### 5.1 Client Information

Applicant:	SIMPLEX TECNOLOGIA S.A.S	
Address of Applicant:	Calle 125 # 19-89 of 502, Bogota DC, Colombia	
Manufacturer/Factory:	SHENZHEN FUHAICHUANG TECHNOLOGY CO., LTD.	
Address of	Floor 3, Building A3, Fuqiao Third Zone, Fuyong Town, Bao'an District,	
Manufacturer/Factory:	Shenzhen	

### 5.2 General Description of EUT

Product Name:	TABLET PC WITH 3G FUNCTION
Brand Name:	Simplex
Model No.:	Miratio 600
Operation Frequency:	802.11b/802.11g/802.11n(HT20): 2412MHz~2462MHz 802.11n(HT40): 2422MHz~2452MHz
Channel numbers:	802.11b/802.11g /802.11n(HT20): 11 802.11(HT40): 7
Channel separation:	5MHz
Modulation technology:	802.11b: Direct Sequence Spread Spectrum (DSSS) 802.11g/802.11n(H20)/802.11n(H40): Orthogonal Frequency Division Multiplexing (OFDM)
Antenna Type:	Integral antenna
Antenna gain:	1.45dBi (declare by Applicant)
Power supply:	Input: AC 100-240V, 50/60Hz Output: DC 5.0V, 2A DC 3.7V Li-ion Battery, 2600mAh



Report No.: EBO1412008-E417

Page 6 of 57

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

#### Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Tastalannal	Frequency (MHz)		
Test channel	802.11b/802.11g/802.11n(HT20)	802.11n(HT40)	
Lowest channel	2412MHz	2422MHz	
Middle channel	2437MHz	2437MHz	
Highest channel	2462MHz	2452MHz	

### 5.3 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode
-------------------	--

Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

		,		
Mode	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)
Data rate	1Mbps	6Mbps	6.5Mbps	13Mbps

### 5.4 Description of Support Units

N	$\cap$	ne



Report No.: EBO1412008-E417

Page 7 of 57

### 5.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### • CNAS —Registration No.: CNAS L5775

CNAS has accredited Global United Technology Services Co., Ltd. To ISO/IEC 17025 General Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

### • FCC —Registration No.: 600491

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fuly described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, June 28, 2013.

### • Industry Canada (IC) —Registration No.: 9079A-2

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, June 26, 2013.

#### 5.6 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen, China



Report No.: EBO1412008-E417

Page 8 of 57

### 6 Test Instruments list

Rad	Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)	
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	Mar. 28 2014	Mar. 27 2015	
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A	
3	Spectrum Analyzer	Agilent	E4440A	GTS533	July 01 2014	June 30 2015	
4	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	July 01 2014	June 30 2015	
5	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	July 01 2014	June 30 2015	
6	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 27 2014	June 26 2015	
7	Horn Antenna	ETS-LINDGREN	3160	GTS217	Mar. 28 2014	Mar. 27 2015	
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A	
9	Coaxial Cable	GTS	N/A	GTS213	Mar. 29 2014	Mar. 28 2015	
10	Coaxial Cable	GTS	N/A	GTS211	Mar. 29 2014	Mar. 28 2015	
11	Coaxial cable	GTS	N/A	GTS210	Mar. 29 2014	Mar. 28 2015	
12	Coaxial Cable	GTS	N/A	GTS212	Mar. 29 2014	Mar. 28 2015	
13	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	July 01 2014	June 30 2015	
14	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	July 01 2014	June 30 2015	
15	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 27 2014	June 26 2015	
16	Band filter	Amindeon	82346	GTS219	Mar. 29 2014	Mar. 28 2015	
17	Power Meter	Anritsu	ML2495A	GTS540	July 01 2014	June 30 2015	
18	Power Sensor	Anritsu	MA2411B	GTS541	July 01 2014	June 30 2015	

Con	Conducted Emission:											
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)						
1	Shielding Room	ZhongYu Electron	7.0(L)x3.0(W)x3.0(H)	GTS264	July 01 2014	June 30 2015						
2	<b>EMI Test Receiver</b>	Rohde & Schwarz	ESCS30	GTS223	July 01 2014	June 30 2015						
3	10dB Pulse Limita	Rohde & Schwarz	N/A	GTS224	July 01 2014	June 30 2015						
4	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	July 01 2014	June 30 2015						
5	LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	GTS226	July 01 2014	June 30 2015						
6	Coaxial Cable	GTS	N/A	GTS227	July 01 2014	June 30 2015						
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A						

Gene	eral used equipment:					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	ChangChun	DYM3	GTS257	July 08 2014	July 07 2015



Report No.: EBO1412008-E417

Page 9 of 57

### 7 Test results and Measurement Data

### 7.1 Antenna requirement

**Standard requirement:** FCC Part15 C Section 15.203 /247(c)

### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

### E.U.T Antenna:

The antenna is Integral antenna, the best case gain of the antenna is 1.45dBi



Report No.: EBO1412008-E417

Page 10 of 57

### 7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207	,								
Test Method:	ANSI C63.4:2003									
Test Frequency Range:	150KHz to 30MHz									
Class / Severity:	Class B									
Receiver setup:	RBW=9KHz, VBW=30KHz, S	ween time=auto								
		Limit (dBuV)								
Limit:	Frequency range (MHz)	Quasi-peak	Average							
	0.15-0.5	66 to 56*	56 to 46*							
	0.5-5	56	46							
	5-30	60	50							
	* Decreases with the logarithn	n of the frequency.								
Test setup:	Reference Plane	<del>!</del>	_							
	AUX Equipment E.U.T  Test table/Insulation plane  Remark: E.U.T. Equipment Under Test LISN: Line Impedence Stabilization Network Test table height=0.8m	Filter — AC pow								
Test procedure:	<ol> <li>The E.U.T and simulators a line impedance stabilization 500hm/50uH coupling impedance.</li> <li>The peripheral devices are LISN that provides a 500hr termination. (Please refer to photographs).</li> <li>Both sides of A.C. line are</li> </ol>	n network (L.I.S.N.). The edance for the measuring also connected to the m/50uH coupling imped to the block diagram of checked for maximum	nis provides a ng equipment. main power through a dance with 50ohm the test setup and conducted							
	interference. In order to find positions of equipment and according to ANSI C63.4: 2	I all of the interface cab	oles must be changed							
Test Instruments:	Refer to section 6.0 for details	3								
Test mode:	Refer to section 5.3 for details	3								
Test results:	Pass									
	•									




Report No.: EBO1412008-E417

Page 11 of 57

### Measurement data

Line:

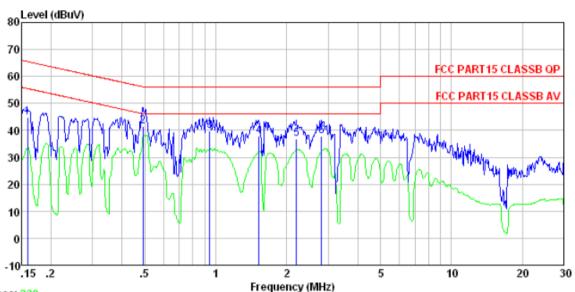

Trace: 230

ite : Shielded room

Condition : FCC PART15 CLASSB QP LISN-2013 LINE


	Freq		LISN Factor			Limit Line	Over Limit	Remark
	MHz	dBu₹	dB	dB	dBuV	dBuV	dB	
1 2 3 4 5 6	0.943 1.527	44. 52 41. 27 39. 63 37. 56 36. 45 37. 65	0.14 0.12 0.12	0.11	39. 90 37. 82 36. 72	56.14 56.00 56.00 56.00	-14.64 -16.10 -18.18 -19.28	QP QP QP QP



Report No.: EBO1412008-E417

Page 12 of 57

#### Neutral:

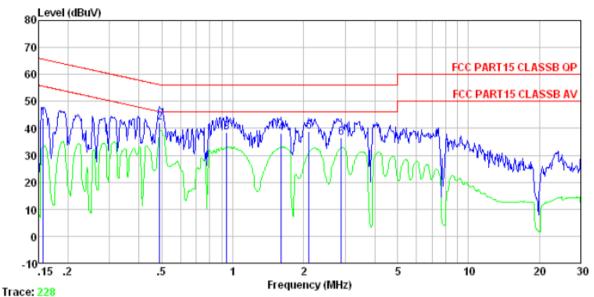

ite : Shielded room

Condition : FCC PART15 CLASSB QP LISN-2013 NEUTRAL

	Freq		LISN Factor				Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1 2 3 4 5	0. 489 0. 943 1. 610 2. 110	38. 21 37. 81 38. 54	0.06 0.07 0.09 0.09	0.13 0.14 0.15	42. 02 38. 41 38. 04 38. 78	56.19 56.00 56.00 56.00	-14.17 -17.59 -17.96 -17.22	QP QP QP QP
6	2.884	36.29	0.11	0.15	36.55	56.00	-19.45	QP

### Notes:

- 1. An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3. Final Level =Receiver Read level + LISN Factor + Cable Loss
- 4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.



Report No.: EBO1412008-E417

Page 13 of 57

# 7.3 Conducted Peak Output Power

Test Requirement:	FCC Part15 C Section 15.247 (b)(3)			
Test Method:	ANSI C63.4:2003 and KDB558074 D01 DTS Meas Guidance V03			
Limit:	30dBm			
Test setup:	Power Meter  E.U.T  Non-Conducted Table  Ground Reference Plane			
Test Instruments:	Refer to section 6.0 for details			
Test mode:	Refer to section 5.3 for details			
Test results:	Pass			

#### **Measurement Data**


Toot CH		Peak Outp	Limit(dDm)	Result		
Test CH	802.11b	802.11g	Limit(dBm)			
Lowest	8.46	7.65	7.65 7.59 7.5			
Middle	8.38	7.53	7.36	7.43	30.00	Pass
Highest	8.30	7.46	7.41	7.22		



Report No.: EBO1412008-E417

Page 14 of 57

### 7.4 Channel Bandwidth

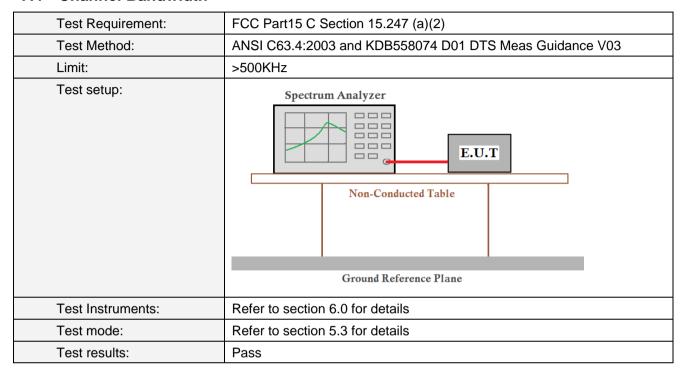

#### **Measurement Data**


Test CH		Channel Ban	Limit(KHz)	Result			
1631 011	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)	Liiiii(Ki iz)	Result	
Lowest	10.113	16.617	17.856	36.562			
Middle	10.113	16.627	17.869	36.583	>500	Pass	
Highest	10.116	16.627	17.859	36.577			

### Test plot as follows:




Report No.: EBO1412008-E417 Page 15 of 57


Test mode: 802.11b

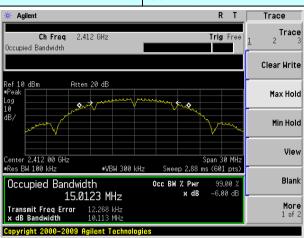

#### Lowest channel

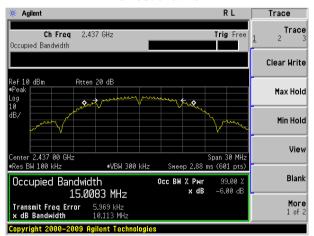

### Middle channel

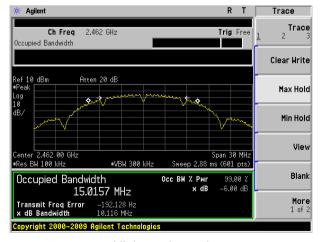


Highest channel




Report No.: EBO1412008-E417 Page 16 of 57


Test mode: 802.11g

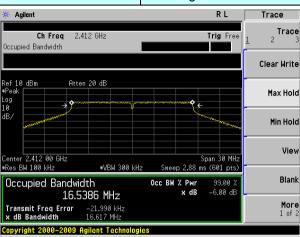

#### Lowest channel

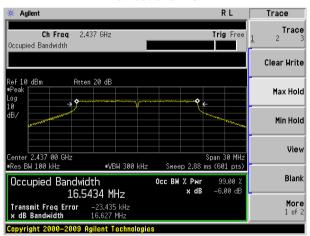

### Middle channel

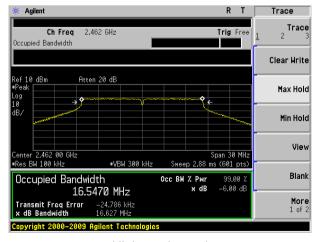


Highest channel




Report No.: EBO1412008-E417 Page 17 of 57


Test mode: 802.11n(HT20)

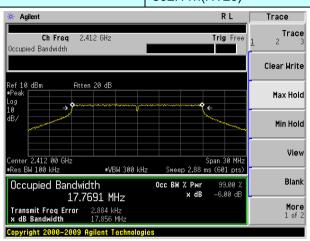

#### Lowest channel

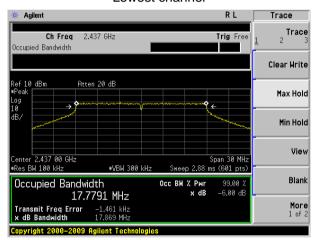

### Middle channel

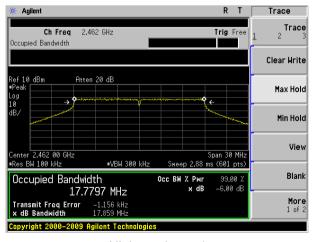


Highest channel




Report No.: EBO1412008-E417 Page 18 of 57


Test mode: 802.11n(HT40)

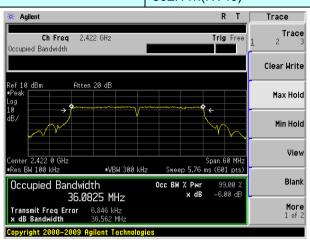

#### Lowest channel

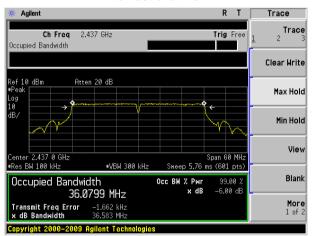

### Middle channel

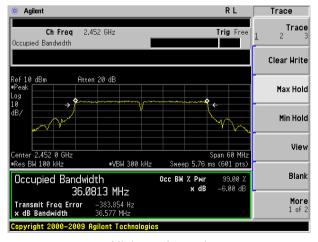


Highest channel



Report No.: EBO1412008-E417

Page 19 of 57

### 7.5 Power Spectral Density

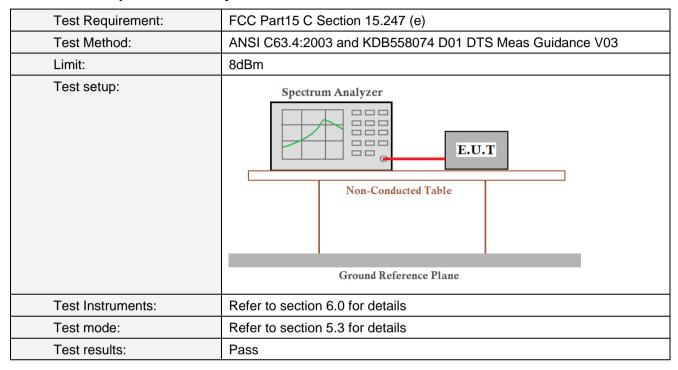

#### **Measurement Data**


Test CH		Power Spectra	Limit(dBm/3kHz)	Result			
rest CIT	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)	Limit(dBm/3Km2)	IZ620II	
Lowest	-4.67	-10.60	-11.10	-14.75			
Middle	-4.88	-10.77	-10.73	-14.77	8.00	Pass	
Highest	-4.89	-11.10	-11.06	-14.97			




Report No.: EBO1412008-E417 Page 20 of 57

#### Test plot as follows:


Test mode: 802.11b

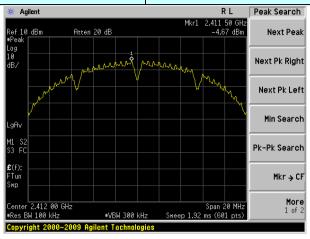

#### Lowest channel

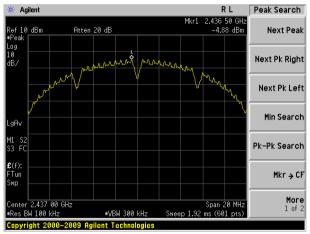

### Middle channel

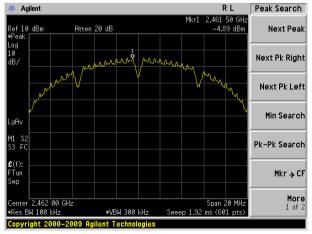


### Highest channel




Report No.: EBO1412008-E417 Page 21 of 57


Test mode: 802.11g

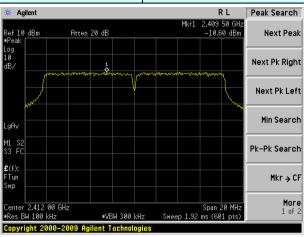

#### Lowest channel

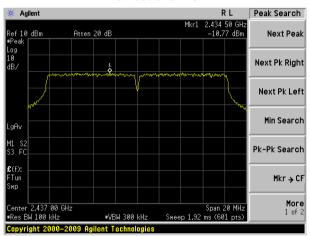

### Middle channel

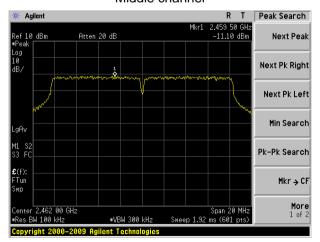


### Highest channel




Report No.: EBO1412008-E417 Page 22 of 57


Test mode: 802.11n(HT20)

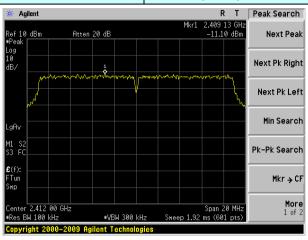

#### Lowest channel

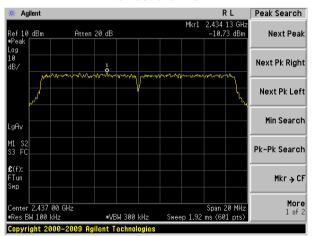

### Middle channel

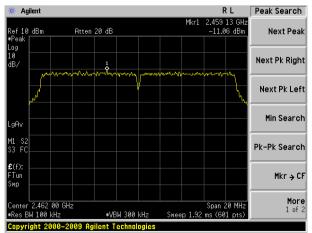


### Highest channel




Report No.: EBO1412008-E417 Page 23 of 57


Test mode: 802.11n(HT40)

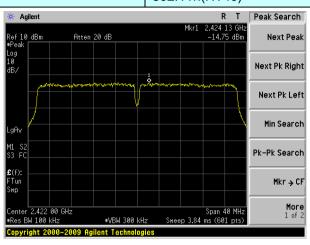

#### Lowest channel

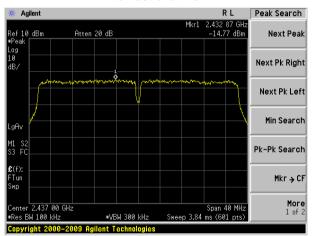

### Middle channel

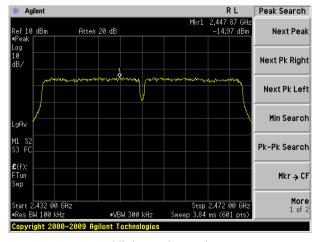

Highest channel



Report No.: EBO1412008-E417

Page 24 of 57

### 7.6 Band edges

### 7.6.1 Conducted Emission Method


Test Requirement:	FCC Part15 C Section 15.247 (d)					
Test Method:	ANSI C63.4:2003 and KDB558074 D01 DTS Meas Guidance V03					
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.					
Test setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.3 for details					
Test results:	Pass					



Report No.: EBO1412008-E417

Page 25 of 57

#### Test plot as follows:

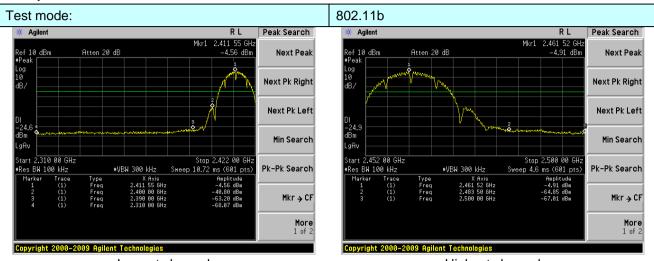


Lowest channel

Highest channel 802.11g

### Test mode: \* Agilent R L Peak Search 2.409 49 GHz -10.62 dBm Atten 20 dB Next Peak Next Pk Right Next Pk Left Min Search .310 00 GHz Stop 2.422 00 GHz Res BW 100 kHz Pk-Pk Search Sweep 10.72 ms (601 pts) Mkr → CF


Lowest channel

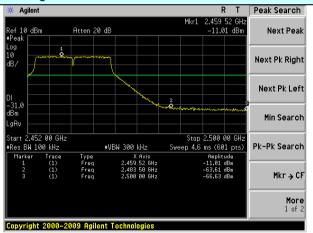

Highest channel




Report No.: EBO1412008-E417 Page 26 of 57

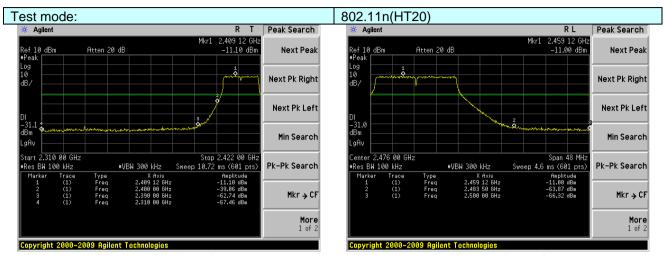

Lowest channel

Highest channel

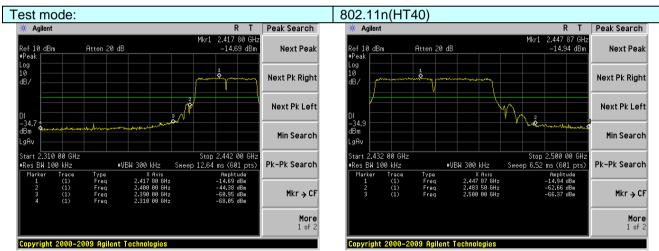

Lowest channel

Highest channel



Report No.: EBO1412008-E417 Page 27 of 57

### 7.6.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209 and 15.205										
Test Method:	ANSI C63.4: 2003										
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2390MHz to										
r cott roquerio, rtali.got	2500MHz) data		,		(2000						
Test site:	Measurement Distance: 3m										
Receiver setup:	Frequency Detector RBW VBW Value										
'	,	Peak	1MHz	3MHz	Peak						
	Above 1GHz	RMS	1MHz	3MHz	Average						
Limit:	Freque		Limit (dBuV/		Value						
		_	54.0		Average						
	Above 1	GHz	74.0		Peak						
Test setup:	Turn Table 0,8m	4m	Horn A Spectrun Analyze	1							
Test Procedure:	meter camber. The highest radiation 2. The EUT was seemounted on the 3. The antenna heidetermine the meter polarizations of 4. For each suspect antenna was turn from 0 degrees of 5. The test-receive Maximum Hold If the emission letter testing cout Otherwise the elusing peak, quasheet. 7. The radiation meters of the EUT of the state of the st	The table was rotated.  At 3 meters away from top of a variable-hight is varied from the aximum value of the antenna are secreted emission, the fined to heights from the 360 degrees to for system was set to Mode.  Bevel of the EUT in placed to stopped and missions that did no si-peak or average easurements are personance.	om the interfere eight antenna to one meter to forme field strength to make the mEUT was arrang 1 meter to 4 me ind the maximu to Peak Detect Foreak mode was the peak values of have 10dB me method as speerformed in X, N	ence-receiving a ower.  ur meters above.  Both horizontal easurement.  ged to its worst eters and the rom reading.  Tunction and Sp.  10dB lower that of the EUT wo largin would be cified and then	e the ground to al and vertical  case and then the ota table was turned  becified Bandwidth with an the limit specified, ould be reported. re-tested one by one						
Test Instruments:	Refer to section										
Test mode:	Refer to section	5.3 for details									
Test results:	Pass										



Report No.: EBO1412008-E417

Page 28 of 57

#### Measurement data:

2500.00

2483.50

2500.00

33.75

39.13

35.57

27.55

27.53

27.55

Remark: The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was reported.

`	3									
Test mode:		802.1	1b	Test channel:				Lowest		
Peak value:										
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Prear Facto (dB)	or	Level (dBuV/m)	Limit Line (dBuV/m)	I I imit	Polarization	
2390.00	49.97	27.59	5.38	30.1	8	52.76	74.00	-21.24	Horizontal	
2400.00	58.43	27.58	5.39	30.1	8	61.22	74.00	-12.78	Horizontal	
2390.00	51.54	27.59	5.38	30.1	8	54.33	74.00	-19.67	Vertical	
2400.00	59.77	27.58	5.39	30.1	8	62.56	74.00	-11.44	Vertical	
Average va	lue:									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Prear Facto (dB)	or	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
2390.00	37.22	27.59	5.38	30.1	8	40.01	54.00	-13.99	Horizontal	
2400.00	45.33	27.58	5.39	30.1	8	48.12	54.00	-5.88	Horizontal	
2390.00	38.90	27.59	5.38	30.1	8	41.69	54.00	-12.31	Vertical	
2400.00	46.33	27.58	5.39	30.1	8	49.12	54.00	-4.88	Vertical	
Test mode:		802.1	802.11b		Test channel:		Highest			
Peak value:										
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Prear Facto (dB)	or	Level (dBuV/m)	Limit Line (dBuV/m)	I I imit	Polarization	
2483.50	49.91	27.53	5.47	29.9	3	52.98	74.00	-21.02	Horizontal	
2500.00	46.28	27.55	5.49	29.9	3	49.39	74.00	-24.61	Horizontal	
2483.50	51.83	27.53	5.47	29.9	3	54.90	74.00	-19.10	Vertical	
2500.00	48.47	27.55	5.49	29.9	3	51.58	74.00	-22.42	Vertical	
Average va	lue:									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Prear Facto (dB)	or	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
2483.50	37.33	27.53	5.47	29.9	3	40.40	54.00	-13.60	Horizontal	
0500.00	00.75	07.55	F 40	00.0	_	00.00	F 4 00	47.44		

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ebotek.cn and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.ebotek.cn. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

29.93

29.93

29.93

36.86

42.20

38.68

5.49

5.47

5.49

54.00

54.00

54.00

-17.14

-11.80

-15.32

Horizontal

Vertical

Vertical



Report No.: EBO1412008-E417 Page 29 of 57

#### Remark:

- 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. The emission levels of other frequencies are very lower than the limit and not show in test report.



Report No.: EBO1412008-E417 Page 30 of 57

Test mode:		802.1	1g	Te	st channel:		Lowest	
Peak value:	:							
Frequency	Read	Antenna	Cable	Preamp	Level	Limit Line	Over	Delevi etter

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	49.29	27.59	5.38	30.18	52.08	74.00	-21.92	Horizontal
2400.00	57.51	27.58	5.39	30.18	60.30	74.00	-13.70	Horizontal
2390.00	50.81	27.59	5.38	30.18	53.60	74.00	-20.40	Vertical
2400.00	58.67	27.58	5.39	30.18	61.46	74.00	-12.54	Vertical

### Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	36.73	27.59	5.38	30.18	39.52	54.00	-14.48	Horizontal
2400.00	44.77	27.58	5.39	30.18	47.56	54.00	-6.44	Horizontal
2390.00	38.36	27.59	5.38	30.18	41.15	54.00	-12.85	Vertical
2400.00	45.71	27.58	5.39	30.18	48.50	54.00	-5.50	Vertical

Ī	Test mode:	802.11g	Test channel:	Highest
	10011110001	002.119	10010114111011	1 ligitiost

#### Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	48.93	27.53	5.47	29.93	52.00	74.00	-22.00	Horizontal
2500.00	45.52	27.55	5.49	29.93	48.63	74.00	-25.37	Horizontal
2483.50	50.71	27.53	5.47	29.93	53.78	74.00	-20.22	Vertical
2500.00	47.58	27.55	5.49	29.93	50.69	74.00	-23.31	Vertical

### Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	36.74	27.53	5.47	29.93	39.81	54.00	-14.19	Horizontal
2500.00	33.29	27.55	5.49	29.93	36.40	54.00	-17.60	Horizontal
2483.50	38.47	27.53	5.47	29.93	41.54	54.00	-12.46	Vertical
2500.00	35.08	27.55	5.49	29.93	38.19	54.00	-15.81	Vertical



Report No.: EBO1412008-E417

Page 31 of 57

#### Remark:

- 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. The emission levels of other frequencies are very lower than the limit and not show in test report.



Test mode:

# Shenzhen EBO Technology Co., Ltd.

Test channel:

Report No.: EBO1412008-E417

Lowest

Report No.: EDG	1112000
Page 32 of 57	

root mode.		002	(=0)	. 0	or oriariiroii	_	-0001	
Peak value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	49.48	27.59	5.38	30.18	52.27	74.00	-21.73	Horizontal
2400.00	57.77	27.58	5.39	30.18	60.56	74.00	-13.44	Horizontal
2390.00	51.01	27.59	5.38	30.18	53.80	74.00	-20.20	Vertical
2400.00	58.98	27.58	5.39	30.18	61.77	74.00	-12.23	Vertical
Average va	lue:							
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	36.87	27.59	5.38	30.18	39.66	54.00	-14.34	Horizontal
2400.00	44.93	27.58	5.39	30.18	47.72	54.00	-6.28	Horizontal
2390.00	38.52	27.59	5.38	30.18	41.31	54.00	-12.69	Vertical
2400.00	45.89	27.58	5.39	30.18	48.68	54.00	-5.32	Vertical
Test mode:		802.1	1n(HT20)	Te	st channel:	F	Highest	
Peak value	:							
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	49.21	27.53	5.47	29.93	52.28	74.00	-21.72	Horizontal
2500.00	45.73	27.55	5.49	29.93	48.84	74.00	-25.16	Horizontal
2483.50	51.03	27.53	5.47	29.93	54.10	74.00	-19.90	Vertical
2500.00	47.83	27.55	5.49	29.93	50.94	74.00	-23.06	Vertical
Average va	lue:							
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	36.91	27.53	5.47	29.93	39.98	54.00	-14.02	Horizontal

802.11n(HT20)

### 2500.00 Remark:

2500.00

2483.50

33.42

38.66

35.22

27.55

27.53

27.55

5.49

5.47

5.49

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ebotek.cn and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.ebotek.cn. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

29.93

29.93

29.93

36.53

41.73

38.33

54.00

54.00

54.00

-17.47

-12.27

-15.67

Horizontal

Vertical

Vertical



Report No.: EBO1412008-E417 Page 33 of 57

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. The emission levels of other frequencies are very lower than the limit and not show in test report.



Test mode:

# Shenzhen EBO Technology Co., Ltd.

Test channel:

Report No.: EBO1412008-E417 Page 34 of 57

Lowest

Over

Limit

(dB)

-14.89

-18.14

-13.22

-16.38

Polarization

Horizontal

Horizontal

Vertical

Vertical

Limit Line

(dBuV/m)

54.00

54.00

54.00

54.00

Peak value:		<u>'</u>		· ·		<u> </u>			
reak value:		1		1	1			1	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
2390.00	48.49	27.59	5.38	30.18	51.28	74.00	-22.72	Horizontal	
2400.00	56.44	27.58	5.39	30.18	59.23	74.00	-14.77	Horizontal	
2390.00	49.95	27.59	5.38	30.18	52.74	74.00	-21.26	Vertical	
2400.00	57.38	27.58	5.39	30.18	60.17	74.00	-13.83	Vertical	
Average value:									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
2390.00	36.16	27.59	5.38	30.18	38.95	54.00	-15.05	Horizontal	
2400.00	44.11	27.58	5.39	30.18	46.90	54.00	-7.10	Horizontal	
2390.00	37.72	27.59	5.38	30.18	40.51	54.00	-13.49	Vertical	
2400.00	44.99	27.58	5.39	30.18	47.78	54.00	-6.22	Vertical	
Test mode:		802.1	1n(HT40)	Te	st channel:	H	Highest		
Peak value:	!								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
2483.50	47.78	27.53	5.47	29.93	50.85	74.00	-23.15	Horizontal	
2500.00	44.62	27.55	5.49	29.93	47.73	74.00	-26.27	Horizontal	
2483.50	49.39	27.53	5.47	29.93	52.46	74.00	-21.54	Vertical	
2500.00	46.54	27.55	5.49	29.93	49.65	74.00	-24.35	Vertical	
Average va	lue:								
				•	•			•	

802.11n(HT40)

### 2500.00 Remark:

Frequency

(MHz)

2483.50

2500.00

2483.50

Read

Level

(dBuV)

36.04

32.75

37.71

34.51

Antenna

Factor

(dB/m)

27.53

27.55

27.53

27.55

Cable

Loss

(dB)

5.47

5.49

5.47

5.49

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.ebotek.cn">http://www.ebotek.cn</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.ebotek.cn">http://www.ebotek.cn</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

Preamp

Factor

(dB)

29.93

29.93

29.93

29.93

Level

(dBuV/m)

39.11

35.86

40.78

37.62



Report No.: EBO1412008-E417 Page 35 of 57

- 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. The emission levels of other frequencies are very lower than the limit and not show in test report.



Report No.: EBO1412008-E417

Page 36 of 57

# 7.7 Spurious Emission

### 7.7.1 Conducted Emission Method

Test Requirement:	FCC Part15 C Section 15.247 (d)					
Test Method:	ANSI C63.4:2003 and KDB558074 D01 DTS Meas Guidance V03					
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.					
Test setup:	Spectrum Analyzer    Non-Conducted Table   Ground Reference Plane					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.3 for details					
Test results:	Pass					




Report No.: EBO1412008-E417 Page 37 of 57

## Test plot as follows:


Test mode: 802.11b

# Lowest channel

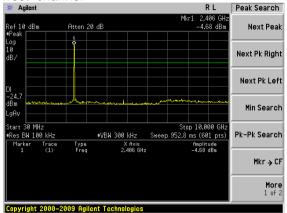


## 30MHz~10GHz

### Middle channel

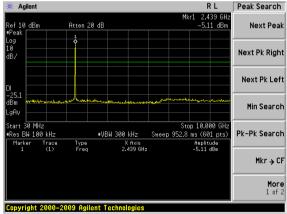


30MHz~10GHz


### Highest channel

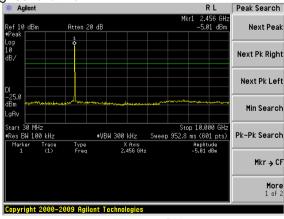


30MHz~10GHz

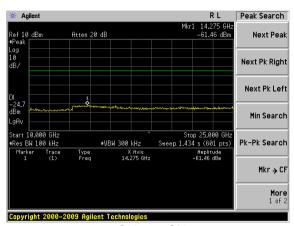

10GHz~25GHz

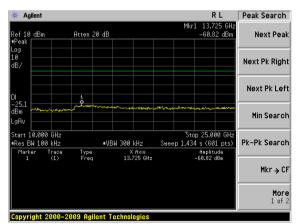

10GHz~25GHz

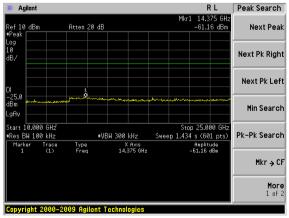

10GHz~25GHz




Report No.: EBO1412008-E417 Page 38 of 57

### Test mode:


802.11g

### Lowest channel

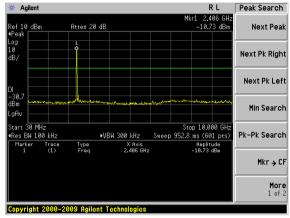


30MHz~10GHz

## Middle channel

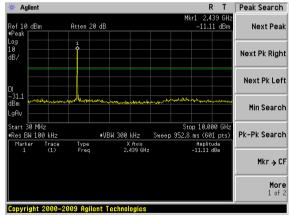


30MHz~10GHz


Highest channel

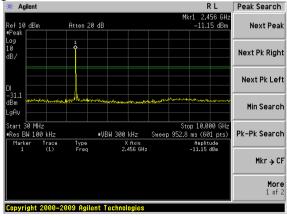


30MHz~10GHz

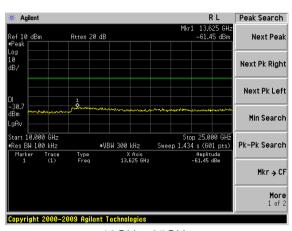

10GHz~25GHz

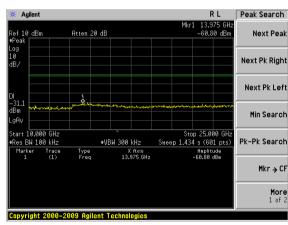

10GHz~25GHz

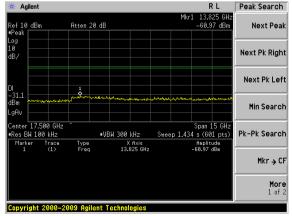

10GHz~25GHz



Report No.: EBO1412008-E417 Page 39 of 57


R T Peak Search

Next Peak

### Test mode:

## 802.11n(HT20)

### Lowest channel

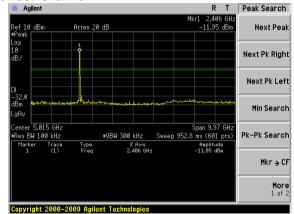


30MHz~10GHz


# 

10GHz~25GHz

### Middle channel

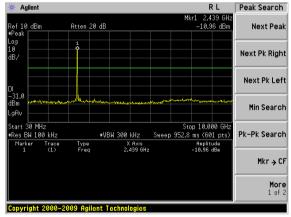


30MHz~10GHz

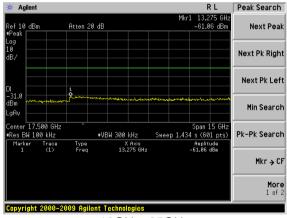


10GHz~25GHz



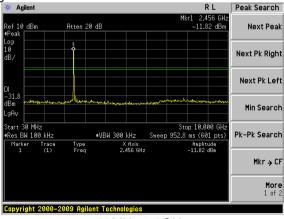

30MHz~10GHz

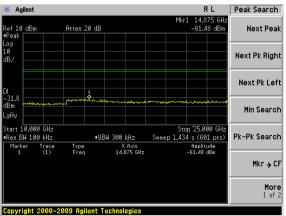

10GHz~25GHz




Report No.: EBO1412008-E417 Page 40 of 57

### Test mode:

## 802.11n(HT40)

### Lowest channel

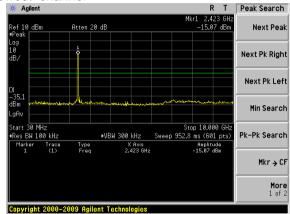


30MHz~10GHz


# 

10GHz~25GHz

### Middle channel

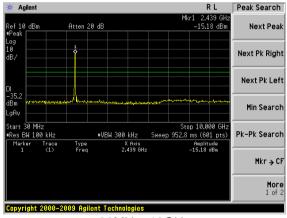


30MHz~10GHz

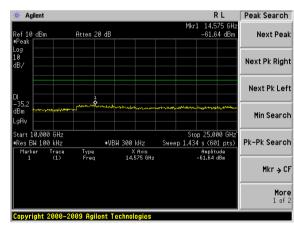


10GHz~25GHz

# Highest channel

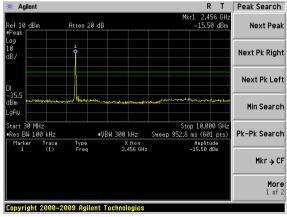

30MHz~10GHz

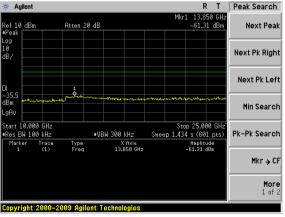

10GHz~25GHz



Report No.: EBO1412008-E417

Page 41 of 57

# 7.7.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209									
Test Method:	ANSI C63.4: 2003									
Test Frequency Range:	30MHz to 25GHz	7_								
Test site:	Measurement Dis	stance: 3m								
Receiver setup:	Frequency Detector RBW VBW Value 30MHz-1GHz Quasi-peak 120KHz 300KHz Quasi-peak									
	30MHz-1GHz	Quasi-peak								
	Above 1GHz	Peak	1MHz	3MHz	Peak					
	Above 10112	RMS	1MHz	3MHz	Average					
Limit:	Frequen	ісу	Limit (dBuV/	m @3m)	Value					
	30MHz-88	MHz	40.0	0	Quasi-peak					
	88MHz-216	6MHz	43.5	0	Quasi-peak					
	216MHz-96	0MHz	46.0	0	Quasi-peak					
	960MHz-1	GHz	54.0	0	Quasi-peak					
	Above 10	NU-	54.0	0	Average					
	Above 10	סחב	74.0	0	Peak					
Test setup:	Below 1GHz  Tum Table Osm Table Of Tound Plane  Above 1GHz	4m		Antenna Tower  Search Antenna  RF Test Receiver						



Report No.: EBO1412008-E417 Page 42 of 57

	Antenna Tower  Horn Antenna  Spectrum  Analyzer  Amplifier
Test Procedure:	1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
	<ol><li>The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li></ol>
	<ol> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> </ol>
	4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
	<ol><li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li></ol>
	6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi- peak or average method as specified and then reported in a data sheet.
	7. The radiation measurements are performed in X, Y, Z axis positioning. And found the Y axis positioning which it is worse case, only the test worst case mode is recorded in the report.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

### Remark

Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.



Report No.: EBO1412008-E417

Page 43 of 57

### **Measurement Data**

### ■ Below 1GHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
30.53	48.35	14.33	0.56	32.06	31.18	40.00	-8.82	Vertical
53.51	47.99	15.08	0.80	31.95	31.92	40.00	-8.08	Vertical
86.20	46.09	12.74	1.08	31.73	28.18	40.00	-11.82	Vertical
175.65	55.18	11.36	1.72	32.07	36.19	43.50	-7.31	Vertical
249.43	48.17	14.07	2.12	32.16	32.20	46.00	-13.80	Vertical
742.26	38.39	21.34	4.24	31.25	32.72	46.00	-13.28	Vertical
55.81	45.54	14.97	0.82	31.95	29.38	40.00	-10.62	Horizontal
68.39	49.91	11.34	0.93	31.89	30.29	40.00	-9.71	Horizontal
119.02	50.80	12.69	1.35	31.85	32.99	43.50	-10.51	Horizontal
175.65	56.69	11.36	1.72	32.07	37.70	43.50	-5.80	Horizontal
249.43	53.84	14.07	2.12	32.16	37.87	46.00	-8.13	Horizontal
287.99	51.95	14.84	2.31	32.18	36.92	46.00	-9.08	Horizontal



Report No.: EBO1412008-E417

Page 44 of 57

### **Above 1GHz**

	. •							
Test mode:		802.11b		Test	channel:	Lowe	est	
Peak value:					1			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	38.23	31.79	8.62	32.10	46.54	74.00	-27.46	Vertical
7236.00	32.91	36.19	11.68	31.97	48.81	74.00	-25.19	Vertical
9648.00	31.78	38.07	14.16	31.56	52.45	74.00	-21.55	Vertical
12060.00	*					74.00		Vertical
14472.00	*					74.00		Vertical
16884.00	*					74.00		Vertical
4824.00	37.22	31.79	8.62	32.10	45.53	74.00	-28.47	Horizontal
7236.00	32.83	36.19	11.68	31.97	48.73	74.00	-25.27	Horizontal
9648.00	31.43	38.07	14.16	31.56	52.10	74.00	-21.90	Horizontal
12060.00	*					74.00		Horizontal
14472.00	*					74.00		Horizontal
16884.00	*					74.00		Horizontal
Average val	ue:							
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	27.48	31.79	8.62	32.10	35.79	54.00	-18.21	Vertical
7236.00	21.83	36.19	11.68	31.97	37.73	54.00	-16.27	Vertical
9648.00	22.17	38.07	14.16	31.56	42.84	54.00	-11.16	Vertical
12060.00	*					54.00		Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertical
4824.00	26.87	31.79	8.62	32.10	35.18	54.00	-18.82	Horizontal
7236.00	21.44	36.19	11.68	31.97	37.34	54.00	-16.66	Horizontal
9648.00	21.21	38.07	14.16	31.56	41.88	54.00	-12.12	Horizontal
12060.00	*					54.00		Horizontal
14472.00	*					54.00		Horizontal
16884.00	*					54.00		Horizontal

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. "\*", means this data is the too weak instrument of signal is unable to test.



Report No.: EBO1412008-E417 Page 45 of 57

Test mode:		802.11b		Test	channel:	Midd	le	
Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	37.64	31.85	8.66	32.12	46.03	74.00	-27.97	Vertical
7311.00	33.21	36.37	11.71	31.91	49.38	74.00	-24.62	Vertical
9748.00	32.96	38.27	14.25	31.56	53.92	74.00	-20.08	Vertical
12185.00	*					74.00		Vertical
14622.00	*					74.00		Vertical
17059.00	*					74.00		Vertical
4874.00	38.39	31.85	8.66	32.12	46.78	74.00	-27.22	Horizontal
7311.00	31.99	36.37	11.71	31.91	48.16	74.00	-25.84	Horizontal
9748.00	32.91	38.27	14.25	31.56	53.87	74.00	-20.13	Horizontal
12185.00	*					74.00		Horizontal
14622.00	*					74.00		Horizontal
17059.00	*					74.00		Horizontal
Average val	ue:							
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	28.63	31.85	8.66	32.12	37.02	54.00	-16.98	Vertical
7311.00	21.56	36.37	11.71	31.91	37.73	54.00	-16.27	Vertical
9748.00	22.25	38.27	14.25	31.56	43.21	54.00	-10.79	Vertical
12185.00	*					54.00		Vertical
14622.00	*					54.00		Vertical
17059.00	*					54.00		Vertical
4874.00	28.59	31.85	8.66	32.12	36.98	54.00	-17.02	Horizontal
7311.00	21.10	36.37	11.71	31.91	37.27	54.00	-16.73	Horizontal
9748.00	22.65	38.27	14.25	31.56	43.61	54.00	-10.39	Horizontal
12185.00	*					54.00		Horizontal
14622.00	*					54.00		Horizontal
17059.00	*					54.00		Horizontal

## Remark:

- 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. "\*", means this data is the too weak instrument of signal is unable to test.



Report No.: EBO1412008-E417 Page 46 of 57

Test mode:		802.11b		Test	channel:	Highe	est	
Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	41.94	31.90	8.70	32.15	50.39	74.00	-23.61	Vertical
7386.00	33.11	36.49	11.76	31.83	49.53	74.00	-24.47	Vertical
9848.00	35.70	38.62	14.31	31.77	56.86	74.00	-17.14	Vertical
12310.00	*					74.00		Vertical
14772.00	*					74.00		Vertical
17234.00	*					74.00		Vertical
4924.00	41.70	31.90	8.70	32.15	50.15	74.00	-23.85	Horizontal
7386.00	32.24	36.49	11.76	31.83	48.66	74.00	-25.34	Horizontal
9848.00	31.97	38.62	14.31	31.77	53.13	74.00	-20.87	Horizontal
12310.00	*					74.00		Horizontal
14772.00	*					74.00		Horizontal
17234.00	*					74.00		Horizontal
Average val			,					
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	33.09	31.90	8.70	32.15	41.54	54.00	-12.46	Vertical
7386.00	23.09	36.49	11.76	31.83	39.51	54.00	-14.49	Vertical
9848.00	24.26	38.62	14.31	31.77	45.42	54.00	-8.58	Vertical
12310.00	*					54.00		Vertical
14772.00	*					54.00		Vertical
17234.00	*					54.00		Vertical
4924.00	32.22	31.90	8.70	32.15	40.67	54.00	-13.33	Horizontal
7386.00	21.68	36.49	11.76	31.83	38.10	54.00	-15.90	Horizontal
9848.00	21.28	38.62	14.31	31.77	42.44	54.00	-11.56	Horizontal
12310.00	*					54.00		Horizontal
14772.00	*					54.00		Horizontal
17234.00	*					54.00		Horizontal

## Remark:

- 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. "\*", means this data is the too weak instrument of signal is unable to test.



Report No.: EBO1412008-E417 Page 47 of 57

Test mode:		802.11g		Test	channel:	lowes	st	
Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	37.12	31.79	8.62	32.10	45.43	74.00	-28.57	Vertical
7236.00	32.21	36.19	11.68	31.97	48.11	74.00	-25.89	Vertical
9648.00	31.28	38.07	14.16	31.56	51.95	74.00	-22.05	Vertical
12060.00	*					74.00		Vertical
14472.00	*					74.00		Vertical
16884.00	*					74.00		Vertical
4824.00	36.28	31.79	8.62	32.10	44.59	74.00	-29.41	Horizontal
7236.00	32.21	36.19	11.68	31.97	48.11	74.00	-25.89	Horizontal
9648.00	30.97	38.07	14.16	31.56	51.64	74.00	-22.36	Horizontal
12060.00	*					74.00		Horizontal
14472.00	*					74.00		Horizontal
16884.00	*					74.00		Horizontal
Average val	ue:							
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	26.45	31.79	8.62	32.10	34.76	54.00	-19.24	Vertical
7236.00	21.15	36.19	11.68	31.97	37.05	54.00	-16.95	Vertical
9648.00	21.68	38.07	14.16	31.56	42.35	54.00	-11.65	Vertical
12060.00	*					54.00		Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertica
4824.00	25.98	31.79	8.62	32.10	34.29	54.00	-19.71	Horizontal
7236.00	20.85	36.19	11.68	31.97	36.75	54.00	-17.25	Horizontal
9648.00	20.76	38.07	14.16	31.56	41.43	54.00	-12.57	Horizontal
12060.00	*					54.00		Horizontal
14472.00	*					54.00		Horizontal
16884.00	*					54.00		Horizontal

## Remark:

- 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. "\*", means this data is the too weak instrument of signal is unable to test.



Report No.: EBO1412008-E417 Page 48 of 57

Test mode:		802.11g			Test channel: Middle		le			
Peak value:										
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Fa	amp ctor dB)	Level (dBuV/m)	Limit (dBu)		Over Limit (dB)	polarization
4874.00	36.72	31.85	8.66	32	.12	45.11	74.	00	-28.89	Vertical
7311.00	32.63	36.37	11.71	31	.91	48.80	74.	00	-25.20	Vertical
9748.00	32.55	38.27	14.25	31	.56	53.51	74.	00	-20.49	Vertical
12185.00	*						74.	00		Vertical
14622.00	*						74.	00		Vertical
17059.00	*						74.	00		Vertical
4874.00	37.61	31.85	8.66	32	.12	46.00	74.	00	-28.00	Horizontal
7311.00	31.48	36.37	11.71	31	.91	47.65	74.	00	-26.35	Horizontal
9748.00	32.53	38.27	14.25	31	.56	53.49	74.	00	-20.51	Horizontal
12185.00	*						74.	00		Horizontal
14622.00	*						74.	00		Horizontal
17059.00	*						74.	00		Horizontal
Average value			•							
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Fa	amp ctor dB)	Level (dBuV/m)	Limit (dBu)		Over Limit (dB)	polarization
4874.00	27.78	31.85	8.66	32	.12	36.17	54.	00	-17.83	Vertical
7311.00	21.00	36.37	11.71	31	.91	37.17	54.	00	-16.83	Vertical
9748.00	21.85	38.27	14.25	31	.56	42.81	54.	00	-11.19	Vertical
12185.00	*						54.	00		Vertical
14622.00	*						54.	00		Vertical
17059.00	*						54.	00		Vertical
4874.00	27.86	31.85	8.66	32	.12	36.25	54.	00	-17.75	Horizontal
7311.00	20.61	36.37	11.71	31	.91	36.78	54.	00	-17.22	Horizontal
9748.00	22.28	38.27	14.25	31	.56	43.24	54.	00	-10.76	Horizontal
12185.00	*						54.	00		Horizontal
14622.00	*						54.	00		Horizontal
17059.00	*						54.	00		Horizontal

## Remark:

- 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. "\*", means this data is the too weak instrument of signal is unable to test.



Report No.: EBO1412008-E417 Page 49 of 57

Test mode:		802.11g			Test channel: Highest		est			
Peak value:										
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Fac	amp ctor B)	Level (dBuV/m)	Limit (dBu)		Over Limit (dB)	polarization
4924.00	40.35	31.90	8.70	32	.15	48.80	74.	00	-25.20	Vertical
7386.00	32.10	36.49	11.76	31	.83	48.52	74.	00	-25.48	Vertical
9848.00	34.98	38.62	14.31	31	.77	56.14	74.	00	-17.86	Vertical
12310.00	*						74.	00		Vertical
14772.00	*						74.	00		Vertical
17234.00	*						74.	00		Vertical
4924.00	40.36	31.90	8.70	32	.15	48.81	74.	00	-25.19	Horizontal
7386.00	31.36	36.49	11.76	31	.83	47.78	74.	00	-26.22	Horizontal
9848.00	31.31	38.62	14.31	31	.77	52.47	74.	00	-21.53	Horizontal
12310.00	*						74.	00		Horizontal
14772.00	*						74.	00		Horizontal
17234.00	*						74.	00		Horizontal
Average val										
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Fac	amp ctor B)	Level (dBuV/m)	Limit (dBu)		Over Limit (dB)	polarization
4924.00	31.62	31.90	8.70	32	.15	40.07	54.	00	-13.93	Vertical
7386.00	22.12	36.49	11.76	31	.83	38.54	54.	00	-15.46	Vertical
9848.00	23.57	38.62	14.31	31	.77	44.73	54.	00	-9.27	Vertical
12310.00	*						54.	00		Vertical
14772.00	*						54.	00		Vertical
17234.00	*						54.	00		Vertical
4924.00	30.96	31.90	8.70	32	.15	39.41	54.	00	-14.59	Horizontal
7386.00	20.83	36.49	11.76	31	.83	37.25	54.	00	-16.75	Horizontal
9848.00	20.64	38.62	14.31	31	.77	41.80	54.	00	-12.20	Horizontal
12310.00	*						54.	00		Horizontal
14772.00	*						54.	00		Horizontal
17234.00	*						54.	00		Horizontal

## Remark:

- 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. "\*", means this data is the too weak instrument of signal is unable to test.



Report No.: EBO1412008-E417 Page 50 of 57

Test mode:		802.11n(H	IT20)		Test	channel:		Lowe	est	
Peak value:										
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Fa	eamp ctor dB)	Level (dBuV/m)	Limit (dBu)		Over Limit (dB)	polarization
4824.00	37.71	31.79	8.62	32	2.10	46.02	74.	00	-27.98	Vertical
7236.00	32.58	36.19	11.68	31	.97	48.48	74.	00	-25.52	Vertical
9648.00	31.55	38.07	14.16	31	.56	52.22	74.	00	-21.78	Vertical
12060.00	*						74.	00		Vertical
14472.00	*						74.	00		Vertical
16884.00	*						74.	00		Vertical
4824.00	36.78	31.79	8.62	32	2.10	45.09	74.	00	-28.91	Horizontal
7236.00	32.54	36.19	11.68	31	.97	48.44	74.	00	-25.56	Horizontal
9648.00	31.21	38.07	14.16	31	.56	51.88	74.	00	-22.12	Horizontal
12060.00	*						74.	00		Horizontal
14472.00	*						74.	00		Horizontal
16884.00	*						74.	00		Horizontal
Average val										
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Fa	eamp ctor dB)	Level (dBuV/m)	Limit (dBu)		Over Limit (dB)	polarization
4824.00	27.00	31.79	8.62	32	2.10	35.31	54.	00	-18.69	Vertical
7236.00	21.51	36.19	11.68	31	.97	37.41	54.	00	-16.59	Vertical
9648.00	21.94	38.07	14.16	31	.56	42.61	54.	00	-11.39	Vertical
12060.00	*						54.	00		Vertical
14472.00	*						54.	00		Vertical
16884.00	*						54.	00		Vertical
4824.00	26.45	31.79	8.62	32	2.10	34.76	54.	00	-19.24	Horizontal
7236.00	21.16	36.19	11.68	31	.97	37.06	54.	00	-16.94	Horizontal
9648.00	21.00	38.07	14.16	31	.56	41.67	54.	00	-12.33	Horizontal
12060.00	*						54.	00		Horizontal
14472.00	*						54.	00		Horizontal
16884.00	*						54.	00		Horizontal

## Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. "\*", means this data is the too weak instrument of signal is unable to test.



000 44±/LIT00\

# Shenzhen EBO Technology Co., Ltd.

Tast shares als

Report No.: EBO1412008-E417 Page 51 of 57

NA: al all a

54.00

54.00

Horizontal

Horizontal

Test mode:		802.11n(H	IT20)	Test	channel:	Midd	le	
Peak value:			_					
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	37.21	31.85	8.66	32.12	45.60	74.00	-28.40	Vertical
7311.00	32.94	36.37	11.71	31.91	49.11	74.00	-24.89	Vertical
9748.00	32.77	38.27	14.25	31.56	53.73	74.00	-20.27	Vertical
12185.00	*					74.00		Vertical
14622.00	*					74.00		Vertical
17059.00	*					74.00		Vertical
4874.00	38.02	31.85	8.66	32.12	46.41	74.00	-27.59	Horizontal
7311.00	31.75	36.37	11.71	31.91	47.92	74.00	-26.08	Horizontal
9748.00	32.73	38.27	14.25	31.56	53.69	74.00	-20.31	Horizontal
12185.00	*					74.00		Horizontal
14622.00	*					74.00		Horizontal
17059.00	*					74.00		Horizontal
Average val			,					
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	28.23	31.85	8.66	32.12	36.62	54.00	-17.38	Vertical
7311.00	21.30	36.37	11.71	31.91	37.47	54.00	-16.53	Vertical
9748.00	22.06	38.27	14.25	31.56	43.02	54.00	-10.98	Vertical
12185.00	*					54.00		Vertical
14622.00	*					54.00		Vertical
17059.00	*					54.00		Vertical
4874.00	28.25	31.85	8.66	32.12	36.64	54.00	-17.36	Horizontal
7311.00	20.87	36.37	11.71	31.91	37.04	54.00	-16.96	Horizontal
9748.00	22.48	38.27	14.25	31.56	43.44	54.00	-10.56	Horizontal
12185.00	*					54.00		Horizontal

## Remark:

14622.00

17059.00

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. "\*", means this data is the too weak instrument of signal is unable to test.



Report No.: EBO1412008-E417 Page 52 of 57

Test mode:		802.11n(H	IT20)	Test	channel:	Highe	est	
Peak value:		1				•		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	41.20	31.90	8.70	32.15	49.65	74.00	-24.35	Vertical
7386.00	32.64	36.49	11.76	31.83	49.06	74.00	-24.94	Vertical
9848.00	35.36	38.62	14.31	31.77	56.52	74.00	-17.48	Vertical
12310.00	*					74.00		Vertical
14772.00	*					74.00		Vertical
17234.00	*					74.00		Vertical
4924.00	41.08	31.90	8.70	32.15	49.53	74.00	-24.47	Horizontal
7386.00	31.83	36.49	11.76	31.83	48.25	74.00	-25.75	Horizontal
9848.00	31.66	38.62	14.31	31.77	52.82	74.00	-21.18	Horizontal
12310.00	*					74.00		Horizontal
14772.00	*					74.00		Horizontal
17234.00	*					74.00		Horizontal
Average val	ue:							
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	32.40	31.90	8.70	32.15	40.85	54.00	-13.15	Vertical
7386.00	22.63	36.49	11.76	31.83	39.05	54.00	-14.95	Vertical
9848.00	23.93	38.62	14.31	31.77	45.09	54.00	-8.91	Vertical
12310.00	*					54.00		Vertical
14772.00	*					54.00		Vertical
17234.00	*					54.00		Vertical
4924.00	31.63	31.90	8.70	32.15	40.08	54.00	-13.92	Horizontal
7386.00	21.28	36.49	11.76	31.83	37.70	54.00	-16.30	Horizontal
9848.00	20.98	38.62	14.31	31.77	42.14	54.00	-11.86	Horizontal
12310.00	*					54.00		Horizontal
14772.00	*					54.00		Horizontal
17234.00	*					54.00		Horizontal

## Remark:

- 1 Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2 "\*", means this data is the too weak instrument of signal is unable to test.



Report No.: EBO1412008-E417

Page 53 of 57

Test mode:		802.11n(HT40)		Test channel:			Lowe	st		
Peak value:										
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Fa	amp ctor IB)	Level (dBuV/m)	Limit (dBu)		Over Limit (dB)	polarization
4844.00	36.17	31.81	8.63	32.11		44.50	74.	00	-29.50	Vertical
7266.00	31.61	36.28	11.69	31	.94	47.64	74.	00	-26.36	Vertical
9688.00	30.85	38.13	14.21	31	.52	51.67	74.	00	-22.33	Vertical
12060.00	*						74.	00		Vertical
14472.00	*						74.	00		Vertical
16884.00	*						74.	00		Vertical
4844.00	35.48	31.81	8.63	32	.11	43.81	74.	00	-30.19	Horizontal
7266.00	31.69	36.28	11.69	31	.94	47.72	74.	00	-26.28	Horizontal
9688.00	30.57	38.13	14.21	31	.52	51.39	74.	00	-22.61	Horizontal
12060.00	*						74.	00		Horizontal
14472.00	*						74.	00		Horizontal
16884.00	*						74.	00		Horizontal

# Average value:

Average var	uo.							
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4844.00	25.58	31.81	8.63	32.11	33.91	54.00	-20.09	Vertical
7266.00	20.57	36.28	11.69	31.94	36.60	54.00	-17.40	Vertical
9688.00	21.27	38.13	14.21	31.52	42.09	54.00	-11.91	Vertical
12060.00	*					54.00		Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertical
4844.00	25.24	31.81	8.63	32.11	33.57	54.00	-20.43	Horizontal
7266.00	20.34	36.28	11.69	31.94	36.37	54.00	-17.63	Horizontal
9688.00	20.38	38.13	14.21	31.52	41.20	54.00	-12.80	Horizontal
12060.00	*					54.00		Horizontal
14472.00	*					54.00		Horizontal
16884.00	*					54.00		Horizontal

## Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. "\*", means this data is the too weak instrument of signal is unable to test.



Report No.: EBO1412008-E417 Page 54 of 57

Test mode:		802.11n(HT40)		Test channel:		Middle		
Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	35.94	31.85	8.66	32.12	44.33	74.00	-29.67	Vertical
7311.00	32.13	36.37	11.71	31.91	48.30	74.00	-25.70	Vertical
9748.00	32.19	38.27	14.25	31.56	53.15	74.00	-20.85	Vertical
12185.00	*					74.00		Vertical
14622.00	*					74.00		Vertical
17059.00	*					74.00		Vertical
4874.00	36.95	31.85	8.66	32.12	45.34	74.00	-28.66	Horizontal
7311.00	31.05	36.37	11.71	31.91	47.22	74.00	-26.78	Horizontal
9748.00	32.20	38.27	14.25	31.56	53.16	74.00	-20.84	Horizontal
12185.00	*					74.00		Horizontal
14622.00	*					74.00		Horizontal
17059.00	*					74.00		Horizontal
Average val								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	27.06	31.85	8.66	32.12	35.45	54.00	-18.55	Vertical
7311.00	20.52	36.37	11.71	31.91	36.69	54.00	-17.31	Vertical
9748.00	21.51	38.27	14.25	31.56	42.47	54.00	-11.53	Vertical
12185.00	*					54.00		Vertical
14622.00	*					54.00		Vertical
17059.00	*					54.00		Vertical
4874.00	27.24	31.85	8.66	32.12	35.63	54.00	-18.37	Horizontal
7311.00	20.19	36.37	11.71	31.91	36.36	54.00	-17.64	Horizontal
9748.00	21.97	38.27	14.25	31.56	42.93	54.00	-11.07	Horizontal
12185.00	*					54.00		Horizontal
14622.00	*					54.00		Horizontal
17059.00	*					54.00		Horizontal

### Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. "\*", means this data is the too weak instrument of signal is unable to test.



Report No.: EBO1412008-E417 Page 55 of 57

Test mode:		802.11n(H	IT40)	Test	channel:	Highest		
Peak value:		<u>'</u>				•		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4904.00	39.00	31.88	8.68	32.13	47.43	74.00	-26.57	Vertical
7356.00	31.25	36.45	11.75	31.86	47.59	74.00	-26.41	Vertical
9808.00	34.37	38.43	14.29	31.68	55.41	74.00	-18.59	Vertical
12310.00	*					74.00		Vertical
14772.00	*					74.00		Vertical
17234.00	*					74.00		Vertical
4904.00	39.22	31.88	8.68	32.13	47.65	74.00	-26.35	Horizontal
7356.00	30.62	36.45	11.75	31.86	46.96	74.00	-27.04	Horizontal
9808.00	30.75	38.43	14.29	31.68	51.79	74.00	-22.21	Horizontal
12310.00	*					74.00		Horizontal
14772.00	*					74.00		Horizontal
17234.00	*					74.00		Horizontal
Average val	ue:							
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4904.00	30.38	31.88	8.68	32.13	38.81	54.00	-15.19	Vertical
7356.00	21.29	36.45	11.75	31.86	37.63	54.00	-16.37	Vertical
9808.00	22.98	38.43	14.29	31.68	44.02	54.00	-9.98	Vertical
12310.00	*					54.00		Vertical
14772.00	*					54.00		Vertical
17234.00	*					54.00		Vertical
4904.00	29.90	31.88	8.68	32.13	38.33	54.00	-15.67	Horizontal
7356.00	20.11	36.45	11.75	31.86	36.45	54.00	-17.55	Horizontal
9808.00	20.10	38.43	14.29	31.68	41.14	54.00	-12.86	Horizontal
12310.00	*					54.00		Horizontal
14772.00	*					54.00		Horizontal
17234.00	*					54.00		Horizontal

## Remark:

- 1 Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2 "\*", means this data is the too weak instrument of signal is unable to test.



Report No.: EBO1412008-E417

Page 56 of 57

# 8 Test Setup Photo

Refer to test setup photos.



Report No.: EBO1412008-E417

Page 57 of 57

# 9 EUT Constructional Details

Refer to EUT external and internal photos.

-----End-----