

1-4F, Huafeng Science Park, Xin'an Sixth Road, 82th District, Bao'an,

Shenzhen, China.

Telephone: +86-755-29451282,

Fax: +86-755-22639141

Report No.: EBO1412008-E419

Page 1 of 32

FCC REPORT

Applicant: SIMPLEX TECNOLOGIA S.A.S

Address of Applicant: Calle 125 # 19-89 of 502, Bogota DC, Colombia

Equipment Under Test (EUT)

Product Name: TABLET PC WITH 3G FUNCTION

Brand Name: Simplex

Model No.: Miratio 600

FCC ID: 2ADT2S-MIRATIO600

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247:2013

Date of sample receipt: January 05, 2015

Date of Test: January 05, 2015 To January 09, 2015

Date of report issued: January 09, 2015

Test Result: PASS *

Authorized Signature:

Kevin Yu Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the EBO product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of EBO International Electrical Approvals or testing done by EBO International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by EBO International Electrical Approvals in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

^{*} In the configuration tested, the EUT complied with the standards specified above.



Report No.: EBO1412008-E419 Page 2 of 32

2 Version

Version No.	Date	Description
00	January 09, 2015	Original

Prepared By:	Jason	Date:	January 09, 2015
	Project Engineer		
Check By:	Reviewer	Date:	January 09, 2015



Report No.: EBO1412008-E419 Page 3 of 32

3 Contents

			Page
1	COV	/ER PAGE	1
2	VER	SION	2
3	CON	NTENTS	3
4	TES	T SUMMARY	4
5	GEN	NERAL INFORMATION	5
	5.1	CLIENT INFORMATION	
	5.2	GENERAL DESCRIPTION OF EUT	
	5.3	TEST MODE	
	5.4	DESCRIPTION OF SUPPORT UNITS	
	5.5	TEST FACILITY	
	5.6	TEST LOCATION	7
6	TES	T INSTRUMENTS LIST	8
7	TES	T RESULTS AND MEASUREMENT DATA	9
	7.1	ANTENNA REQUIREMENT	9
	7.2	CONDUCTED EMISSIONS	
	7.3	CONDUCTED OUTPUT POWER	
	7.4	CHANNEL BANDWIDTH	
	7.5	POWER SPECTRAL DENSITY	
	7.6	BAND EDGES	_
	7.6.1		
	7.6.2 7.7		
	7.7.1	Spurious Emission	
	7.7.2		
8		T SETUP PHOTO	
J	123		
a	FUT	CONSTRUCTIONAL DETAILS	22



Report No.: EBO1412008-E419

Page 4 of 32

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Output Power	15.247 (b)(3)	Pass
Channel Bandwidth	15.247 (a)(2)	Pass
Power Spectral Density	15.247 (e)	Pass
Band Edge	15.247(d)	Pass
Spurious Emission	15.205/15.209	Pass

Pass: The EUT complies with the essential requirements in the standard.



Report No.: EBO1412008-E419

Page 5 of 32

5 General Information

5.1 Client Information

Applicant:	SIMPLEX TECNOLOGIA S.A.S		
Address of Applicant:	Calle 125 # 19-89 of 502, Bogota DC, Colombia		
Manufacturer/Factory:	SHENZHEN FUHAICHUANG TECHNOLOGY CO., LTD.		
Address of	Floor 3, Building A3, Fuqiao Third Zone, Fuyong Town, Bao'an District,		
Manufacturer/Factory:	Shenzhen		

5.2 General Description of EUT

Product Name:	TABLET PC WITH 3G FUNCTION
Brand Name:	Simplex
Model No.:	Miratio 600
Operation Frequency:	2402MHz~2480MHz
Channel Numbers:	40
Channel Separation:	2MHz
Modulation Type:	GFSK
Antenna Type:	Integral antenna
Antenna Gain:	1.45dBi (declare by Applicant)
	Input: AC 100-240V, 50/60Hz
Power Supply:	Output: DC 5.0V, 2A
	DC 3.7V Li-ion Battery, 2600mAh



Report No.: EBO1412008-E419

Page 6 of 32

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
•			. !	•	• !	• !!	. !
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2442MHz
The Highest channel	2480MHz



Report No.: EBO1412008-E419

Page 7 of 32

5.3 Test mode

Transmitting mode Keep the EUT in continuously transmitting mode

Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.

5.4 Description of Support Units

None

5.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS —Registration No.: CNAS L5775

CNAS has accredited Global United Technology Services Co., Ltd. To ISO/IEC 17025 General Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• FCC —Registration No.: 600491

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fuly described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, June 28, 2013.

• Industry Canada (IC) —Registration No.: 9079A-2

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, June 26, 2013.

5.6 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen, China



Report No.: EBO1412008-E419

Page 8 of 32

6 Test Instruments list

Radi	Radiated Emission:							
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)		
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	Mar. 29 2014	Mar. 28 2015		
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A		
3	Spectrum Analyzer	Agilent	E4440A	GTS533	Jul. 01 2014	Jun 30 2015		
4	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	Jul. 01 2014	Jun 30 2015		
5	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	Jul. 01 2014	Jun 30 2015		
6	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 27 2014	June 26 2015		
7	Horn Antenna	ETS-LINDGREN	3160	GTS217	Mar. 28 2014	Mar. 27 2015		
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A		
9	Coaxial Cable	GTS	N/A	GTS213	Mar. 29 2014	Mar. 28 2015		
10	Coaxial Cable	GTS	N/A	GTS211	Mar. 29 2014	Mar. 28 2015		
11	Coaxial cable	GTS	N/A	GTS210	Mar. 29 2014	Mar. 28 2015		
12	Coaxial Cable	GTS	N/A	GTS212	Mar. 29 2014	Mar. 28 2015		
13	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	Jul. 01 2014	Jun. 30, 2015		
14	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	Jul. 01 2014	Jun. 30, 2015		
15	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 27 2014	June 26 2015		
16	Band filter	Amindeon	82346	GTS219	Mar. 29 2014	Mar. 28 2015		
17	Power Meter	Anritsu	ML2495A	GTS540	July 01 2014	June 30 2015		
18	Power Sensor	Anritsu	MA2411B	GTS541	July 01 2014	June 30 2015		

Conc	Conducted Emission:							
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)		
1	Shielding Room	ZhongYu Electron	7.0(L)x3.0(W)x3.0(H)	GTS264	July 01 2014	June 30 2015		
2	EMI Test Receiver	Rohde & Schwarz	ESCS30	GTS223	July 01 2014	June 30 2015		
3	10dB Pulse Limita	Rohde & Schwarz	N/A	GTS224	July 01 2014	June 30 2015		
4	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	July 01 2014	June 30 2015		
5	LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	GTS226	July 01 2014	June 30 2015		
6	Coaxial Cable	GTS	N/A	GTS227	July 01 2014	June 30 2015		
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A		

Gene	General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)	
1	Barometer	ChangChun	DYM3	GTS257	July 08 2014	July 07 2015	



Report No.: EBO1412008-E419

Page 9 of 32

7 Test results and Measurement Data

7.1 Antenna requirement

Standard requirement: FCC Part15 C Section 15.203 /247(c)

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

EUT Antenna:

The antenna is Integral antenna, the best case gain of the antenna is 1.45dBi



Report No.: EBO1412008-E419

Page 10 of 32

7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207	7		
•				
Test Method:	ANSI C63.4:2003			
Test Frequency Range:	150KHz to 30MHz			
Class / Severity:	Class B			
Receiver setup:	RBW=9KHz, VBW=30KHz, S	weep time=auto		
Limit:	Frequency range (MHz)	Limit (c	dBuV)	
		Quasi-peak	Average	
	0.15-0.5	66 to 56*	56 to 46*	
	0.5-5	56	46	
	5-30	60	50	
Test setup	* Decreases with the logarithr			
Test setup:	Reference Plane		-	
	AUX Equipment Test table/Insulation plane Remark E.U.T. Equipment Under Test LISN Line Impedence Stabilization Network Test table height=0.8m			
Test procedure:	 The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 			
	3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement.			
Test Instruments:	Refer to section 6.0 for details			
Test mode:	Refer to section 5.3 for details			
Test results:	Pass			




Report No.: EBO1412008-E419

Page 11 of 32

Measurement data

Line:

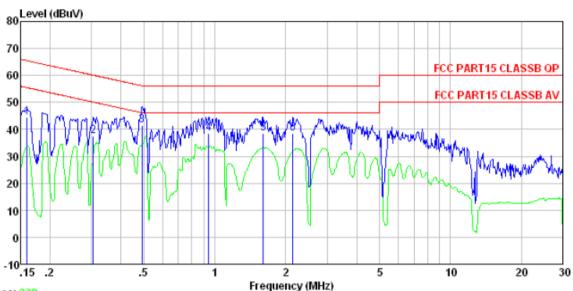

Trace: 238

: Shielded room

Condition : FCC PART15 CLASSB QP LISN-2013 LINE


	Freq		Factor			Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1 2 3 4 5 6	0. 491 0. 943	41.35 38.35	0.11 0.12 0.14 0.12	0.11 0.13	37. 48 41. 58 38. 62 38. 53	60.10 56.14 56.00 56.00	-22.62 -14.56 -17.38 -17.47	QP QP QP QP



Report No.: EBO1412008-E419

Page 12 of 32

Neutral:

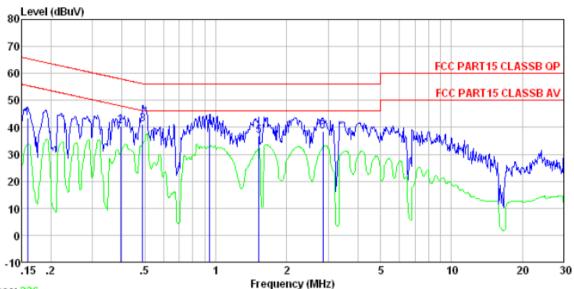

Trace: 236

Site : Shielded room

Condition : FCC PART15 CLASSB QP LISN-2013 NEUTRAL

	Freq		LISN Factor			Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1 2 3 4 5	0. 489 0. 943 1. 527	43.14 40.47 41.03 39.65 36.50	0.06 0.06 0.07 0.09	0.11 0.13 0.14	40.64 41.20 39.85 36.73	57. 95 56. 19 56. 00 56. 00	-17.31 -14.99 -16.15 -19.27	QP QP QP QP
6	2.854	38. 27	0.11	0.15	38.53	56.00	-17.47	Q٢

Notes:

- 1. An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3. Final Level =Receiver Read level + LISN Factor + Cable Loss
- 4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.



Report No.: EBO1412008-E419

Page 13 of 32

7.3 Conducted Output Power

Test Requirement:	FCC Part15 C Section 15.247 (b)(3)			
Test Method:	ANSI C63.4:2003 and KDB558074 D01 DTS Meas Guidance V03			
Limit:	30dBm			
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane			
Test Instruments:	Refer to section 6.0 for details			
Test mode:	Refer to section 5.3 for details			
Test results:	Pass			

Measurement Data


Test channel	Peak Output Power (dBm)	Limit(dBm)	Result
Lowest	-2.29		
Middle	-2.32	30.00	Pass
Highest	-2.66		




Report No.: EBO1412008-E419

Page 14 of 32


Test plot as follows:



Lowest channel



Middle channel



Highest channel



Report No.: EBO1412008-E419

Page 15 of 32

7.4 Channel Bandwidth

Test Requirement:	FCC Part15 C Section 15.247 (a)(2)			
Test Method:	ANSI C63.4:2003 and KDB558074 D01 DTS Meas Guidance V03			
Limit:	>500KHz			
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane			
Test Instruments:	Refer to section 6.0 for details			
Test mode:	Refer to section 5.3 for details			
Test results:	Pass			

Measurement Data


Test channel	Channel Bandwidth (KHz)	Limit(KHz)	Result	
Lowest	699.315			
Middle	701.187	>500	Pass	
Highest	709.523			




Report No.: EBO1412008-E419

Page 16 of 32


Test plot as follows:



Lowest channel



Middle channel



Highest channel



Report No.: EBO1412008-E419

Page 17 of 32

7.5 Power Spectral Density

Test Requirement:	FCC Part15 C Section 15.247 (e)			
Test Method:	ANSI C63.4:2003 and KDB558074 D01 DTS Meas Guidance V03			
Limit:	8dBm/3kHz			
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane			
Test Instruments:	Refer to section 6.0 for details			
Test mode:	Refer to section 5.3 for details			
Test results:	Pass			

Measurement Data


Test channel	Power Spectral Density (dBm)	Limit(dBm/3kHz)	Result
Lowest	-5.86		
Middle	-5.34	8.00	Pass
Highest	-5.64		




Report No.: EBO1412008-E419

Page 18 of 32

Test plot as follows:



Lowest channel



Middle channel



Highest channel



Report No.: EBO1412008-E419


Page 19 of 32


7.6 Band edges

7.6.1 Conducted Emission Method

Test Requirement:	FCC Part15 C Section 15.247 (d)				
Test Method:	ANSI C63.4:2003 and KDB558074 D01 DTS Meas Guidance V03				
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.				
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane				
Test Instruments:	Refer to section 6.0 for details				
Test mode:	Refer to section 5.3 for details				
Test results:	Pass				

Test plot as follows:





Lowest channel

Highest channel



Report No.: EBO1412008-E419 Page 20 of 32

7.6.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209 and 15.205						
Test Method:	ANSI C63.4: 2003						
Test Frequency Range:			ested, only	the worst ba	and's (2310MHz to		
, , ,	2500MHz) data				`		
Test site:	Measurement D	istance: 3m					
Receiver setup:	Frequency	Detector	RBW	VBW	Value		
·		Peak	1MHz	3MHz	Peak		
	Above 1GHz	RMS	1MHz	3MHz	Average		
Limit:	Freque	Frequency Limit (dBuV/m @3m)					
			54.0	0	Average		
	Above 1	GHZ	74.0	0	Peak		
Test setup:	Antenna Tower Horn Antenna Spectrum Analyzer Turn Table Amplifier						
Test Procedure:	 The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. The radiation measurements are performed in X, Y, Z axis positioning. And found the X 						
Test Instruments:	Refer to section 6.0 for details						
Test mode:	Refer to section 5.3 for details						
Test results:	Pass	2.0 .0. 00.0.10					
	1						



Report No.: EBO1412008-E419

Page 21 of 32

Measurement data:

Remark: The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.

Test channel:	Lowest

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	45.64	27.59	5.38	30.18	48.43	74.00	-25.57	Vertical
2400.00	50.08	27.58	5.39	30.18	52.87	74.00	-21.13	Vertical
2390.00	46.04	27.59	5.38	30.18	48.83	74.00	-25.17	Horizontal
2400.00	47.29	27.58	5.39	30.18	50.08	74.00	-23.92	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	35.22	27.59	5.38	30.18	38.01	54.00	-15.99	Vertical
2400.00	37.34	27.58	5.39	30.18	40.13	54.00	-13.87	Vertical
2390.00	35.29	27.59	5.38	30.18	38.08	54.00	-15.92	Horizontal
2400.00	36.05	27.58	5.39	30.18	38.84	54.00	-15.16	Horizontal

Test channel:	Highest
---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	46.98	27.53	5.47	29.93	50.05	74.00	-23.95	Vertical
2500.00	44.96	27.55	5.49	29.93	48.07	74.00	-25.93	Vertical
2483.50	44.68	27.53	5.47	29.93	47.75	74.00	-26.25	Horizontal
2500.00	45.15	27.55	5.49	29.93	48.26	74.00	-25.74	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	34.87	27.53	5.47	29.93	37.94	54.00	-16.06	Vertical
2500.00	33.78	27.55	5.49	29.93	36.89	54.00	-17.11	Vertical
2483.50	35.02	27.53	5.47	29.93	38.09	54.00	-15.91	Horizontal
2500.00	33.72	27.55	5.49	29.93	36.83	54.00	-17.17	Horizontal



Report No.: EBO1412008-E419

Page 22 of 32

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- The emission levels of other frequencies are very lower than the limit and not show in test report.



Report No.: EBO1412008-E419

Page 23 of 32

7.7 Spurious Emission

7.7.1 Conducted Emission Method

Test Requirement:	FCC Part15 C Section 15.247 (d)					
Test Method:	ANSI C63.4:2003 and KDB558074 D01 DTS Meas Guidance V03					
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.					
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.3 for details					
Test results:	Pass					




Report No.: EBO1412008-E419

Page 24 of 32


Test plot as follows:

Lowest channel




30MHz~10GHz

Middle channel




30MHz~10GHz


Highest channel




30MHz~10GHz



10GHz~25GHz



10GHz~25GHz



10GHz~25GHz



Report No.: EBO1412008-E419

Page 25 of 32

7.7.2 Radiated Emission Method

FCC Part15 C Se	ection 15.209							
ANSI C63.4: 200	3							
30MHz to 25GHz	• -							
Measurement Dis	Measurement Distance: 3m							
Frequency	Detector	RBW	VBW	Value				
30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak				
Above 1CHz	Peak	1MHz	3MHz	Peak				
Above IGHZ	RMS	1MHz	3MHz	Average				
Frequen	су	Limit (dBuV/	/m @3m)	Value				
30MHz-88	MHz	40.0	0	Quasi-peak				
88MHz-216	6MHz	43.5	0	Quasi-peak				
216MHz-96	0MHz	46.0	0	Quasi-peak				
960MHz-1	GHz	54.00		Quasi-peak				
Above 1GHz		54.0	0	Average				
Above 10)	74.0	0	Peak				
Below 1GHz Antenna Tower Search Antenna RF Test Receiver Ground Plane								
	FCC Part15 C Se ANSI C63.4: 200 30MHz to 25GHz Measurement Dis Frequency 30MHz-1GHz Above 1GHz Frequency 30MHz-88 88MHz-216 216MHz-96 960MHz-1 Above 1C	FCC Part15 C Section 15.209 ANSI C63.4: 2003 30MHz to 25GHz Measurement Distance: 3m Frequency Detector 30MHz-1GHz Quasi-peak Above 1GHz RMS Frequency 30MHz-88MHz 88MHz-216MHz 216MHz-960MHz 960MHz-1GHz Above 1GHz Below 1GHz Below 1GHz	ANSI C63.4: 2003 30MHz to 25GHz Measurement Distance: 3m Frequency Detector RBW 30MHz-1GHz Quasi-peak 120KHz Above 1GHz Peak 1MHz Frequency Limit (dBuV/ 30MHz-88MHz 40.0 88MHz-216MHz 43.5 216MHz-960MHz 46.0 960MHz-1GHz 54.0 Above 1GHz 54.0 Below 1GHz Below 1GHz	ANSI C63.4: 2003 30MHz to 25GHz Measurement Distance: 3m Frequency Detector RBW VBW 30MHz-1GHz Quasi-peak 120KHz 300KHz Above 1GHz Peak 1MHz 3MHz Frequency Limit (dBuV/m @3m) 30MHz-88MHz 40.00 88MHz-216MHz 43.50 216MHz-960MHz 46.00 960MHz-1GHz 54.00 Above 1GHz 74.00 Below 1GHz Antenna Tower Ground Plane				



Report No.: EBO1412008-E419 Page 26 of 32

	Antenna Tower Horn Antenna Spectrum Analyzer Amplifier
Test Procedure:	The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
	The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
	 The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
	4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
	The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
	6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasipeak or average method as specified and then reported in a data sheet.
	7. The radiation measurements are performed in X, Y, Z axis positioning. And found the Y axis positioning which it is worse case, only the test worst case mode is recorded in the report.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Remark

Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.



Report No.: EBO1412008-E419

Page 27 of 32

Measurement Data

■ Below 1GHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
30.00	46.42	14.33	0.55	32.06	29.24	40.00	-10.76	Vertical
53.88	48.61	15.07	0.81	31.95	32.54	40.00	-7.46	Vertical
150.01	55.09	10.26	1.57	31.98	34.94	43.50	-8.56	Vertical
176.89	54.48	11.49	1.72	32.07	35.62	43.50	-7.88	Vertical
250.30	53.31	14.07	2.12	32.16	37.34	46.00	-8.66	Vertical
300.37	50.35	15.06	2.36	32.17	35.60	46.00	-10.40	Vertical
56.79	46.77	14.89	0.83	31.95	30.54	40.00	-9.46	Horizontal
86.20	46.76	12.74	1.08	31.73	28.85	40.00	-11.15	Horizontal
150.01	54.92	10.26	1.57	31.98	34.77	43.50	-8.73	Horizontal
250.30	58.05	14.07	2.12	32.16	42.08	46.00	-3.92	Horizontal
300.37	54.89	15.06	2.36	32.17	40.14	46.00	-5.86	Horizontal
350.48	54.23	16.27	2.62	32.02	41.10	46.00	-4.90	Horizontal



Report No.: EBO1412008-E419 Page 28 of 32

■ Above 1GHz

Test channel: Lowest

Peak value:

i cak value.								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	36.01	31.78	8.60	32.09	44.30	74.00	-29.70	Vertical
7206.00	38.15	36.15	11.65	32.00	53.95	74.00	-20.05	Vertical
9608.00	36.20	37.95	14.14	31.62	56.67	74.00	-17.33	Vertical
12010.00	28.62	39.08	15.03	35.51	47.22	74.00	-26.78	Vertical
14412.00	*					74.00		Vertical
4804.00	36.27	31.78	8.60	32.09	44.56	74.00	-29.44	Horizontal
7206.00	42.48	36.15	11.65	32.00	58.28	74.00	-15.72	Horizontal
9608.00	30.70	37.95	14.14	31.62	51.17	74.00	-22.83	Horizontal
12010.00	29.01	39.08	15.03	35.51	47.61	74.00	-26.39	Horizontal
14412.00	*					74.00		Horizontal

Average value:

Average var	<u></u>							
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	26.57	31.78	8.60	32.09	34.86	54.00	-19.14	Vertical
7206.00	28.37	36.15	11.65	32.00	44.17	54.00	-9.83	Vertical
9608.00	26.39	37.95	14.14	31.62	46.86	54.00	-7.14	Vertical
12010.00	18.73	39.08	15.03	35.51	37.33	54.00	-16.67	Vertical
14412.00	*					54.00		Vertical
4804.00	26.70	31.78	8.60	32.09	34.99	54.00	-19.01	Horizontal
7206.00	32.46	36.15	11.65	32.00	48.26	54.00	-5.74	Horizontal
9608.00	21.51	37.95	14.14	31.62	41.98	54.00	-12.02	Horizontal
12010.00	18.27	39.08	15.03	35.51	36.87	54.00	-17.13	Horizontal
14412.00	*					54.00		Horizontal

Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. "*", means this data is the too weak instrument of signal is unable to test.



Test channel:

Shenzhen EBO Technology Co., Ltd.

Report No.: EBO1412008-E419 Page 29 of 32

Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4884.00	38.16	31.86	8.67	32.12	46.57	74.00	-27.43	Vertical
7326.00	36.78	36.41	11.72	31.89	53.02	74.00	-20.98	Vertical
9768.00	31.65	38.35	14.27	31.62	52.65	74.00	-21.35	Vertical
12210.00	29.33	38.89	15.16	35.65	47.73	74.00	-26.27	Vertical
14652.00	*					74.00		Vertical
4884.00	36.55	31.86	8.67	32.12	44.96	74.00	-29.04	Horizontal
7326.00	41.16	36.41	11.72	31.89	57.40	74.00	-16.60	Horizontal
9768.00	30.49	38.35	14.27	31.62	51.49	74.00	-22.51	Horizontal
12210.00	28.24	38.89	15.16	35.65	46.64	74.00	-27.36	Horizontal
14652.00	*					74.00		Horizontal
Average val	ue:							
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4884.00	27.85	31.86	8.67	32.12	36.26	54.00	-17.74	Vertical
7326.00	31.63	36.41	11.72	31.89	47.87	54.00	-6.13	Vertical

31.62

35.65

32.12

31.89

31.62

35.65

41.73

37.20

36.58

43.15

43.06

37.77

54.00

54.00

54.00

54.00

54.00

54.00

54.00

54.00

-12.27

-16.80

-17.42

-10.85

-10.94

-16.23

Vertical

Vertical

Vertical

Horizontal

Horizontal

Horizontal

Horizontal

Horizontal

Middle

14652.00 Remark:

9768.00

12210.00

14652.00

4884.00

7326.00

9768.00

12210.00

20.73

18.80

28.17

26.91

22.06

19.37

38.35

38.89

31.86

36.41

38.35

38.89

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss - Preamplifier Factor

14.27

15.16

8.67

11.72

14.27

15.16

2. "*", means this data is the too weak instrument of signal is unable to test.



Test channel:

Shenzhen EBO Technology Co., Ltd.

Report No.: EBO1412008-E419 Page 30 of 32

74.00

Horizontal

Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	34.91	31.93	8.73	32.16	43.41	74.00	-30.59	Vertical
7440.00	33.83	36.59	11.79	31.78	50.43	74.00	-23.57	Vertical
9920.00	33.03	38.81	14.38	31.88	54.34	74.00	-19.66	Vertical
12400.00	28.63	38.76	15.27	35.27	47.39	74.00	-26.61	Vertical
14880.00	*					74.00		Vertical
4960.00	33.85	31.93	8.73	32.16	42.35	74.00	-31.65	Horizontal
7440.00	39.27	36.59	11.79	31.78	55.87	74.00	-18.13	Horizontal
9920.00	28.91	38.81	14.38	31.88	50.22	74.00	-23.78	Horizontal
12400.00	29.61	38.76	15.27	35.27	48.37	74.00	-25.63	Horizontal

Highest

Average value:

14880.00

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	24.98	31.93	8.73	32.16	33.48	54.00	-20.52	Vertical
7440.00	24.51	36.59	11.79	31.78	41.11	54.00	-12.89	Vertical
9920.00	23.66	38.81	14.38	31.88	44.97	54.00	-9.03	Vertical
12400.00	19.17	38.76	15.27	35.27	37.93	54.00	-16.07	Vertical
14880.00	*					54.00		Vertical
4960.00	23.70	31.93	8.73	32.16	32.20	54.00	-21.80	Horizontal
7440.00	29.34	36.59	11.79	31.78	45.94	54.00	-8.06	Horizontal
9920.00	19.50	38.81	14.38	31.88	40.81	54.00	-13.19	Horizontal
12400.00	19.53	38.76	15.27	35.27	38.29	54.00	-15.71	Horizontal
14880.00	*					54.00		Horizontal

Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. "*", means this data is the too weak instrument of signal is unable to test.



Report No.: EBO1412008-E419

Page 31 of 32

8 Test Setup Photo

Refer to test setup photos.



Report No.: EBO1412008-E419

Page 32 of 32

9 EUT Constructional Details

Refer to EUT external and internal photos.

-----End-----