

Report No.: SHEM181100128102

Page: 1 of 30

TEST REPORT

Application No.: SHEM1811001281CR **FCC ID**: 2ADTD-DS10001

Applicant: Hangzhou Hikvision Digital Technology Co., Ltd.

Address of Applicant: No.555 Qianmo Road, Binjiang District, Hangzhou 310052, China

Manufacturer: Hangzhou Hikvision Digital Technology Co., Ltd.

Address of Manufacturer: No.555 Qianmo Road, Binjiang District, Hangzhou 310052, China

Factory: 1.Hangzhou Hikvision Technology Co., Ltd. 2.Hangzhou Hikvision Electronics Co., Ltd.

Address of Factory: 1. No.700, Dongliu Road, Binjiang District, Hangzhou City, Zhejiang,

310052, China

2. No.299, Qiushi Road, Tonglu Economic Development Zone, Tonglu

County, Hangzhou, Zhejiang, 310052, China

Equipment Under Test (EUT):

EUT Name: Digital Signage

Model No.: DS-D6055FL-B/S, DS-D6055FL-B/SF,

Please refer to section 2 of this report which indicates which model was

actually tested and which were electrically identical.

Standard(s): 47 CFR Part 15, Subpart C 15.247

Date of Receipt: 2018-11-28

Date of Test: 2018-11-29 to 2018-12-03

Date of Issue: 2018-12-05

Test Result: Pass*

Parlam Than

Parlam Zhan E&E Section Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.



Direction of the company subject to its General Conditions of Service printed overteaf, available on request or accessible at http://www.sgs.com/en/Terns-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terns-and-Conditions/Terns-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document on only and within the limits of transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: CN.Doccheck@sgs.com

NO.588 West Jindu Road,Songjiang District,Shanghai,China 201612 t(86-21) 61915666 f(86-21) 61915678 www.sgsgroup.com.cn 中国・上海・松江区金都西路5.88号 邮编: 201612 t(86-21) 61915666 f(86-21) 61915678 e sgs.china@sgs.com

^{*} In the configuration tested, the EUT complied with the standards specified above.



Report No.: SHEM181100128102 Page: 2 of 30

Revision Record					
Version	Description	Date	Remark		
00	Original	2018-12-05	/		

Authorized for issue by:		
	Vincent Zhu	
	Vincent Zhu / Project Engineer	
	Parlam zhan	
	Parlam Zhan / Reviewer	



Report No.: SHEM181100128102

Page: 3 of 30

2 Test Summary

Radio Spectrum Technical Requirement					
Item	Standard	Method	Requirement	Result	
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Customer Declaration	

Radio Spectrum Matt	Radio Spectrum Matter Part						
Item	Standard	Method	Requirement	Result			
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass			
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass			
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.9.1	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass			
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass			
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass			
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass			
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass			
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass			

Declaration of EUT Family Grouping:

Note: There are series models mentioned in this report, and they are the similar in electrical and electronic characters. Only the model DS-D6055FL-B/S was tested since their differences were the model number and appearance.



Report No.: SHEM181100128102 Page: 4 of 30

3 **Contents**

			Page
1	CO	OVER PAGE	1
2	TE	ST SUMMARY	3
3		ONTENTS	
J	CC	JN1EN15	4
4	GE	NERAL INFORMATION	5
	4.1 4.2 4.3 4.4	DETAILS OF E.U.T. DESCRIPTION OF SUPPORT UNITS MEASUREMENT UNCERTAINTY TEST LOCATION	6
	4.5 4.6 4.7	TEST FACILITY DEVIATION FROM STANDARDS ABNORMALITIES FROM STANDARD CONDITIONS	7
5	EQ	UIPMENT LIST	8
6	RA	ADIO SPECTRUM TECHNICAL REQUIREMENT	9
	6.1	ANTENNA REQUIREMENT	
7	RA	ADIO SPECTRUM MATTER TEST RESULTS	10
	7.1 7.2 7.3 7.4	CONDUCTED EMISSIONS AT AC POWER LINE (150KHz-30MHz)	14 15
	7.5 7.6 7.7 7.8	CONDUCTED BAND EDGES MEASUREMENT	17 18 19
8	TE	ST SETUP PHOTOGRAPHS	30
9	FII	IT CONSTRUCTIONAL DETAILS	30



Report No.: SHEM181100128102

Page: 5 of 30

4 General Information

4.1 Details of E.U.T.

Power supply: 100-240V AC, 50/60Hz, 2.0A

Test voltage: AC 120V 60Hz
Cable: AC Cable 1.5m

Antenna Gain 1.13dBi

Antenna Type PCB Antenna

Channel Spacing 2MHz
Modulation Type GFSK
Number of Channels 40

Operation Frequency 2402MHz to 2480MHz

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Laptop	Lenovo	ThinkPad X100e	/
SecureCRT	VanDyke	V 6.2.0	/
Serial port adapter plate	/	Test Plate 3	/



Report No.: SHEM181100128102

Page: 6 of 30

4.3 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	±7.25 x 10-8
2	Timeout	±2s
3	Duty cycle	±0.37%
4	Occupied Bandwidth	±3%
5	RF conducted power	±0.75dB
6	RF power density	±2.84dB
7	Conducted Spurious emissions	±0.75dB
8	DE Dadiated newer	±4.5dB (Below 1GHz)
0	RF Radiated power	±4.8dB (Above 1GHz)
		±4.2dB (Below 30MHz)
9	Dadiated Caurious emission test	±4.4dB (30MHz-1GHz)
9	Radiated Spurious emission test	±4.6dB (1GHz-18GHz)
		±5.2dB (Above 18GHz)
10	Temperature test	±1℃
11	Humidity test	±3%
12	Supply voltages	±1.5%
13	Time	±3%

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



Report No.: SHEM181100128102

Page: 7 of 30

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd. Shanghai Branch

588 West Jindu Road, Xinqiao, Songjiang, 201612 Shanghai, China

Tel: +86 21 6191 5666 Fax: +86 21 6191 5678

No tests were sub-contracted.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

· CNAS (No. CNAS L0599)

CNAS has accredited SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

NVLAP (Certificate No. 201034-0)

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. is accredited by the National Voluntary Laboratory Accreditation Program(NVLAP). Certificate No. 201034-0.

• FCC -Designation Number: CN5033

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been recognized as an accredited testing laboratory.

Designation Number: CN5033. Test Firm Registration Number: 479755.

Industry Canada (IC) – IC Assigned Code: 8617A

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 8617A-1.

VCCI (Member No.: 3061)

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-13868, C-14336, T-12221, G-10830 respectively.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None



Report No.: SHEM181100128102 Page: 8 of 30

Equipment List

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Conducted Emission at AC					
EMI test receiver	R&S	ESR7	SHEM162-1	2017-12-20	2018-12-19
LISN	Schwarzbeck	NSLK8127	SHEM061-1	2017-12-20	2018-12-19
LISN	EMCO	3816/2	SHEM019-1	2017-12-20	2018-12-19
Pulse limiter	R&S	ESH3-Z2	SHEM029-1	2017-12-20	2018-12-19
CE test Cable	/	CE01	/	2017-12-26	2018-12-25
Conducted Test	·		-		
Spectrum Analyzer	R&S	FSP-30	SHEM002-1	2017-12-20	2018-12-19
Spectrum Analyzer	Agilent	N9020A	SHEM181-1	2018-08-13	2019-08-12
Signal Generator	R&S	SMR20	SHEM006-1	2018-08-13	2019-08-12
Signal Generator	Agilent	N5182A	SHEM182-1	2018-08-13	2019-08-12
Communication Tester	R&S	CMW270	SHEM183-1	2018-08-13	2019-08-12
Switcher	Tonscend	JS0806	SHEM184-1	2018-08-13	2019-08-12
Power Sensor	Keysight	U2021XA * 4	SHEM184-1	2018-08-13	2019-08-12
Splitter	Anritsu	MA1612A	SHEM185-1	/	/
Coupler	e-meca	803-S-1	SHEM186-1	/	/
High-low Temp Cabinet	Suzhou Zhihe	TL-40	SHEM087-1	2017-09-25	2020-09-24
AC Power Stabilizer	WOCEN	6100	SHEM045-1	2017-12-26	2018-12-25
DC Power Supply	QJE	QJ30003SII	SHEM046-1	2017-12-26	2018-12-25
Conducted test Cable	/	RF01~RF04	/	2017-12-26	2018-12-25
Radiated Test					
EMI test Receiver	R&S	ESU40	SHEM051-1	2017-12-20	2018-12-19
Spectrum Analyzer	R&S	FSP-30	SHEM002-1	2017-12-20	2018-12-19
Loop Antenna (9kHz-30MHz)	Schwarzbeck	FMZB1519	SHEM135-1	2017-04-10	2020-04-09
Antenna (25MHz-2GHz)	Schwarzbeck	VULB9168	SHEM048-1	2017-02-28	2020-02-27
Antenna (25MHz-3GHz)	Schwarzbeck	HL562	SHEM010-1	2017-02-28	2020-02-27
Horn Antenna (1-8GHz)	Schwarzbeck	HF906	SHEM009-1	2017-10-24	2020-10-23
Horn Antenna (1-18GHz)	Schwarzbeck	BBHA9120D	SHEM050-1	2017-01-14	2020-01-13
Horn Antenna (14-40GHz)	Schwarzbeck	BBHA 9170	SHEM049-1	2017-12-03	2020-12-02
Pre-amplifier (9KHz-2GHz)	CLAVIIO	BDLNA-0001	SHEM164-1	2018-08-13	2019-08-12
Pre-amplifier (1-18GHz)	CLAVIIO	BDLNA-0118	SHEM050-2	2018-08-13	2019-08-12
High-amplifier (14-40GHz)	Schwarzbeck	10001	SHEM049-2	2017-12-20	2018-12-19
Signal Generator	R&S	SMR40	SHEM058-1	2018-08-13	2019-08-12
Band Filter	LORCH	9BRX-875/X150	SHEM156-1	/	/
Band Filter	LORCH	13BRX-1950/X500	SHEM083-2	/	/
Band Filter	LORCH	5BRX-2400/X200	SHEM155-1	/	/
Band Filter	LORCH	5BRX-5500/X1000	SHEM157-2	/	/
High pass Filter	Wainwright	WHK3.0/18G	SHEM157-1	/	/
High pass Filter	Wainwright	WHKS1700	SHEM157-3	/	/
Semi/Fully Anechoic	ST	11*6*6M	SHEM078-2	2017-07-22	2020-07-21
RE test Cable	/	RE01, RE02, RE06	/	2017-12-26	2018-12-25



Report No.: SHEM181100128102

Page: 9 of 30

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(c)

6.1.2 Conclusion

Standard Requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is PCB antenna and no consideration of replacement. The best case gain of the antenna is 1.13dBi.

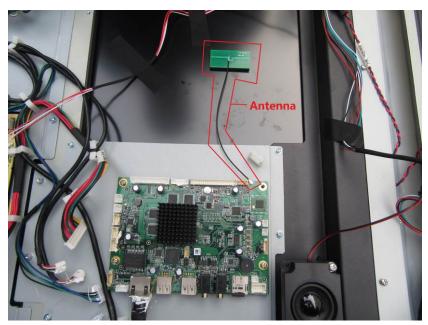



Report No.: SHEM181100128102

Page: 10 of 30

7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207 Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

Francisco (MILE)	Conducted limit(dBμV)				
Frequency of emission(MHz)	Quasi-peak	Average			
0.15-0.5	66 to 56*	56 to 46*			
0.5-5	56	46			
5-30	60	50			
*Decreases with the logarithm of the	*Decreases with the logarithm of the frequency.				

7.1.1 E.U.T. Operation


Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar

Test mode b:TX mode_Keep the EUT in continuously transmitting mode with GFSK

modulation

7.1.2 Test Setup Diagram

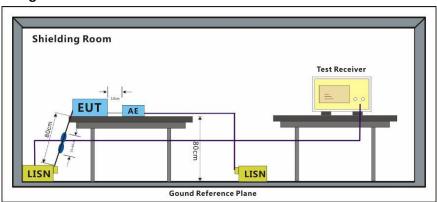

NO.588 West Jindu Road, Songjiang District, Shanghai, China 201612 中国・上海・松江区金都西路588号 邮编: 201612



Report No.: SHEM181100128102

Page: 11 of 30

7.1.3 Measurement Procedure and Data


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50 \text{ohm}/50 \mu\text{H} + 5 \text{ohm}$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: LISN=Read Level+ Cable Loss+ LISN Factor



Report No.: SHEM181100128102 Page: 12 of 30

Mode:b; Line:Live Line

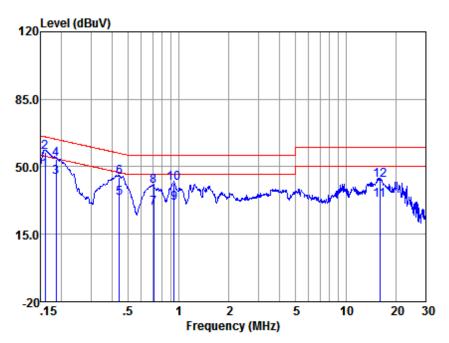

LISN : LINE EUT/Project No: 1279CR


Test mode : b

	Freq	Read	LISN	Cable	Emission	1	0ver	
		level	Factor	Loss	Level	Limit	Limit	Remark
	(MHz)	(dBuV)	(dB)	(dB)	(dBuV)	(dBuV)	(dB)	
1	0.16	38.15	0.05	9.82	48.02	55.52	-7.50	Average
2	0.16	47.88	0.05	9.82	57.75	65.52	-7.77	QP
3	0.19	34.70	0.05	9.83	44.58	54.24	-9.66	Average
4	0.19	43.84	0.05	9.83	53.72	64.24	-10.52	QP
5	0.44	24.02	0.05	9.84	33.91	47.02	-13.11	Average
6	0.44	34.67	0.05	9.84	44.56	57.02	-12.46	QP
7	0.71	18.53	0.04	9.85	28.42	46.00	-17.58	Average
8	0.71	29.83	0.04	9.85	39.72	56.00	-16.28	QP
9	0.94	21.08	0.05	9.83	30.96	46.00	-15.04	Average
10	0.94	31.52	0.05	9.83	41.40	56.00	-14.60	QP
11	15.97	22.64	0.23	9.92	32.79	50.00	-17.21	Average
12	15.97	32.94	0.23	9.92	43.09	60.00	-16.91	QP
N	otes: Er	nission L	evel = R	Read Lev	el +LISN	Factor +	Cable lo	oss



Report No.: SHEM181100128102 Page: 13 of 30

Mode:b; Line:Neutral Line

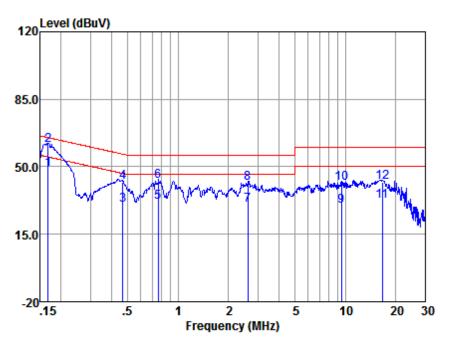

LISN : NEUTRAL EUT/Project No: 1279CR

Test mode : b

	Freq (MHz)	Read level (dBuV)	LISN Factor (dB)	Cable Loss (dB)	Emissior Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	0.17	39.02	0.06	9.83	48.91	55.08	-6.17	Average
2	0.17	51.26	0.06	9.83	61.15	65.08	-3.93	QP
3	0.47	20.22	0.05	9.82	30.09	46.58	-16.49	Average
4	0.47	32.18	0.05	9.82	42.05	56.58	-14.53	QP
5	0.76	21.82	0.05	9.86	31.73	46.00	-14.27	Average
6	0.76	32.39	0.05	9.86	42.30	56.00	-13.70	QP
7	2.62	20.08	0.07	9.88	30.03	46.00	-15.97	Average
8	2.62	31.54	0.07	9.88	41.49	56.00	-14.51	QP
9	9.50	19.73	0.20	9.87	29.80	50.00	-20.20	Average
10	9.50	31.59	0.20	9.87	41.66	60.00	-18.34	QP
11	16.66	21.95	0.26	9.93	32.14	50.00	-17.86	Average
12	16.66	32.01	0.26	9.93	42.20	60.00	-17.80	QP
N	otes: E	mission	Level =	Read Le	vel +LISN	Factor	+ Cable lo	oss



Report No.: SHEM181100128102

Page: 14 of 30

7.2 Minimum 6dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247a(2)
Test Method: ANSI C63.10 (2013) Section 11.8.1

Limit: ≥500 kHz

7.2.1 E.U.T. Operation


Operating Environment:

Temperature: 20 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar

Test mode b:TX mode_Keep the EUT in continuously transmitting mode with GFSK

modulation

7.2.2 Test Setup Diagram

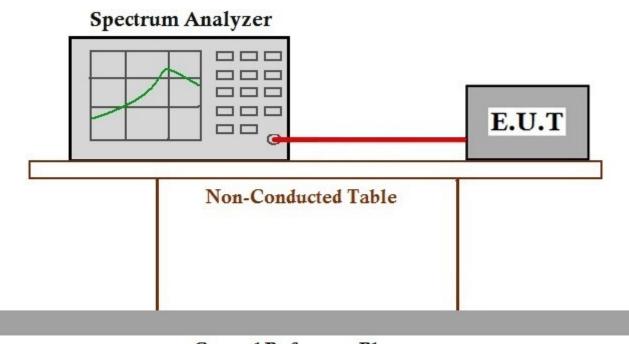

Ground Reference Plane

7.2.3 Measurement Procedure and Data

The detailed test data see: Appendix B SHEM181100128102



Report No.: SHEM181100128102

Page: 15 of 30

7.3 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)
Test Method: ANSI C63.10 (2013) Section 11.9.1

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)		
	1 for ≥50 hopping channels		
902-928	0.25 for 25≤ hopping channels <50		
	1 for digital modulation		
	1 for ≥75 non-overlapping hopping channels		
2400-2483.5	0.125 for all other frequency hopping systems		
	1 for digital modulation		
5725-5850	1 for frequency hopping systems and digital modulation		

7.3.1 E.U.T. Operation


Operating Environment:

Temperature: 20 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar

Test mode b:TX mode_Keep the EUT in continuously transmitting mode with GFSK

modulation

7.3.2 Test Setup Diagram

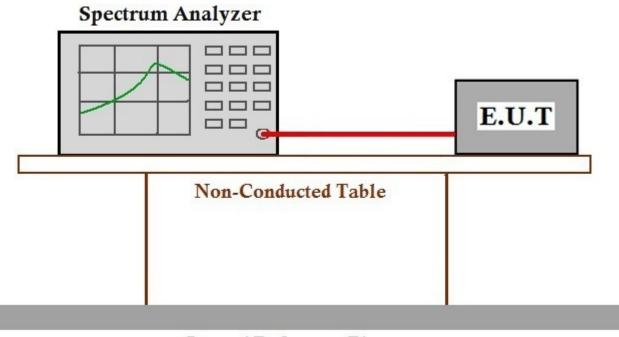

Ground Reference Plane

7.3.3 Measurement Procedure and Data

The detailed test data see: Appendix B SHEM181100128102

NO.588 West Jindu Road,Songjiang District,Shanghai,China 201612 t(86-21)619 中国・上海・松江区金都西路588号 邮编: 201612 t(86-21)619



Report No.: SHEM181100128102

Page: 16 of 30

7.4 Power Spectrum Density

Test Requirement 47 CFR Part 15, Subpart C 15.247(e)
Test Method: ANSI C63.10 (2013) Section 11.10.2

Limit: ≤8dBm in any 3 kHz band during any time interval of continuous

transmission

7.4.1 E.U.T. Operation


Operating Environment:

Temperature: 20 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar

Test mode b:TX mode_Keep the EUT in continuously transmitting mode with GFSK

modulation

7.4.2 Test Setup Diagram

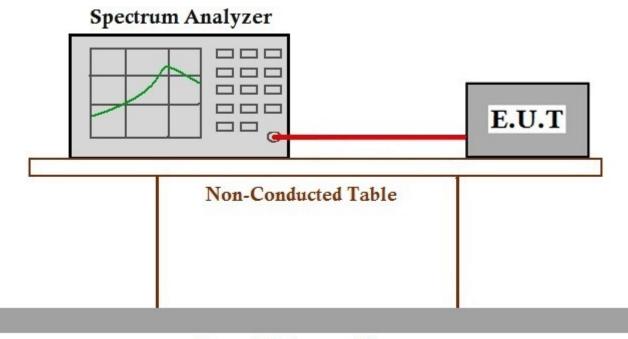

Ground Reference Plane

7.4.3 Measurement Procedure and Data

The detailed test data see: Appendix B SHEM181100128102



Report No.: SHEM181100128102

Page: 17 of 30

7.5 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)
Test Method: ANSI C63.10 (2013) Section 11.13.3.2

Limit: In

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in

§15.205(a), must also comply with the radiated emission limits specified in

§15.209(a) (see §15.205(c)

7.5.1 E.U.T. Operation


Operating Environment:

Temperature: 20 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar

Test mode b:TX mode_Keep the EUT in continuously transmitting mode with GFSK

modulation

7.5.2 Test Setup Diagram

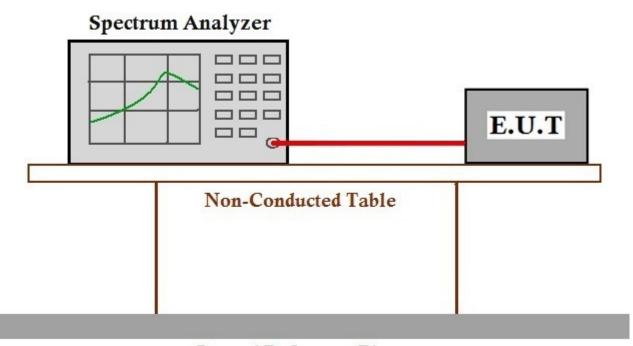

Ground Reference Plane

7.5.3 Measurement Procedure and Data

The detailed test data see: Appendix B SHEM181100128102

NO.588 West Jindu Road,Songjiang District,Shanghai,China 201612 (188-21) 61915666 (188-21) 61915667 www.sgsgroup.com.cn 中国・上海・松江区金都西路588号 邮编: 201612 (188-21) 61915666 (188-21) 61915678 esgs.china@sgs.com



Report No.: SHEM181100128102

Page: 18 of 30

7.6 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)
Test Method: ANSI C63.10 (2013) Section 11.11

Limit: In any 100 kHz bandwidth outside the frequency band in which the spread

spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition,

radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in

§15.209(a) (see §15.205(c)

7.6.1 E.U.T. Operation


Operating Environment:

Temperature: 20 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar

Test mode b:TX mode_Keep the EUT in continuously transmitting mode with GFSK

modulation

7.6.2 Test Setup Diagram

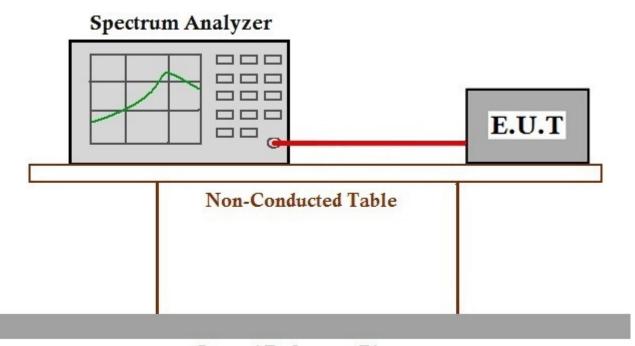

Ground Reference Plane

7.6.3 Measurement Procedure and Data

The detailed test data see: Appendix B SHEM181100128102

NO.588 West Jindu Road,Songjiang District,Shanghai,China 201612 (188-21) 61915666 (188-21) 61915667 www.sgsgroup.com.cn 中国・上海・松江区金都西路588号 邮编: 201612 (188-21) 61915666 (188-21) 61915678 esgs.china@sgs.com



Report No.: SHEM181100128102

Page: 19 of 30

7.7 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.10.5

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.7.1 E.U.T. Operation


Operating Environment:


Temperature: 20 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar


Test mode b:TX mode Keep the EUT in continuously transmitting mode with GFSK

modulation

7.7.2 Test Setup Diagram







NO.588 West Jindu Road,Songjiang District,Shanghai,China 201612 中国・上海・松江区金都西路588号 邮编: 201612 t(86-21) 61915666 f(86-21) 61915678 www.sgsgroup.com.cn t(86-21) 61915666 f(86-21) 61915678 e sgs.china@sgs.com



Report No.: SHEM181100128102

Page: 20 of 30

7.7.3 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.



Report No.: SHEM181100128102 Page: 21 of 30

Mode:b; Polarization:Horizontal; Modulation:GFSK; ; Channel:Low

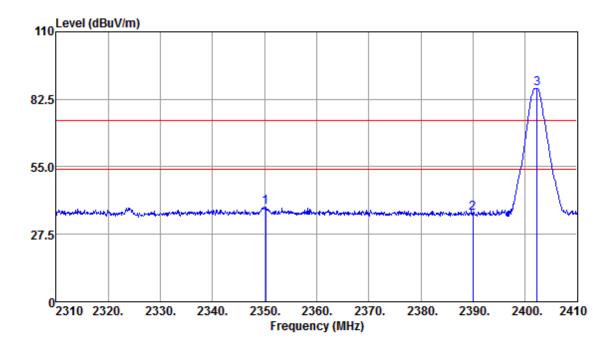


Antenna Polarity : HORIZONTAL

					Emission			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2350.20	43.63	25.98	6.40	37.36	38.65	74.00	-35.35	Peak
2390.00	40.87	26.03	6.47	37.36	36.01	74.00	-37.99	Peak
2402.30	91.85	26.05	6.50	37.35	87.05	74.00	13.05	Peak



Report No.: SHEM181100128102 Page: 22 of 30

Mode:b; Polarization:Vertical; Modulation:GFSK; ; Channel:Low

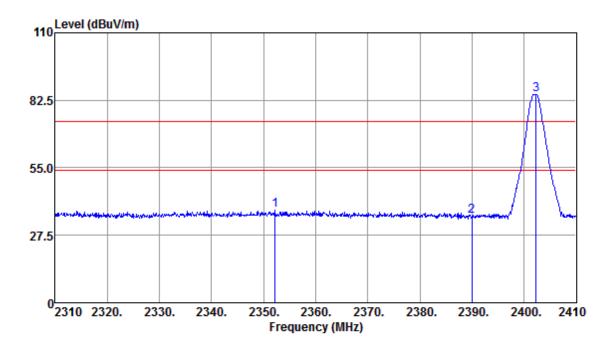


Antenna Polarity : VERTICAL

Freq					Emission Level			Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2352.20	42.63	25.98	6.42	37.36	37.67	74.00	-36.33	Peak
2390.00	40.16	26.03	6.47	37.36	35.30	74.00	-38.70	Peak
2402.30	89.73	26.05	6.50	37.35	84.93	74.00	10.93	Peak



Report No.: SHEM181100128102 Page: 23 of 30

Mode:b; Polarization:Horizontal; Modulation:GFSK; ; Channel:High

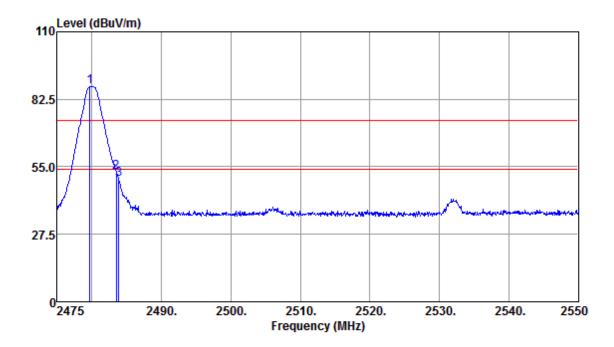


Antenna Polarity : HORIZONTAL

Freq					Emission Level			Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2479.73	92.22	26.17	6.74	37.49	87.64	74.00	13.64	Peak
2483.50	57.49	26.18	6.80	37.51	52.96	74.00	-21.04	Peak
2483.85	54.64	26.18	6.80	37.51	50.11	74.00	-23.89	Peak



Report No.: SHEM181100128102 Page: 24 of 30



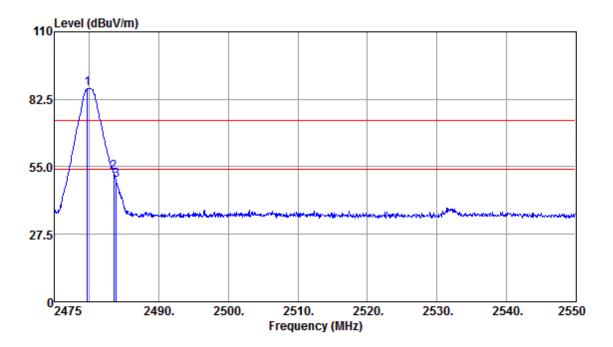

Antenna Polarity : VERTICAL

Freq					Emission Level			Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2479.73	91.40	26.17	6.74	37.49	86.82	74.00	12.82	Peak
2483.50	57.15	26.18	6.80	37.51	52.62	74.00	-21.38	Peak
2483.85	54.03	26.18	6.80	37.51	49.50	74.00	-24.50	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Note: Over the limit is fundamental emission.



Report No.: SHEM181100128102

Page: 25 of 30

7.8 Radiated Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209
Test Method: ANSI C63.10 (2013) Section 6.4,6.5,6.6

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.8.1 E.U.T. Operation


Operating Environment:


Temperature: 20 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar


Test mode b:TX mode Keep the EUT in continuously transmitting mode with GFSK

modulation

7.8.2 Test Setup Diagram







NO.588 West Jindu Road,Songjiang District,Shanghai,China 201612 中国・上海・松江区金都西路588号 邮编: 201612 t(86-21) 61915666 f(86-21) 61915678 www.sgsgroup.com.cn t(86-21) 61915666 f(86-21) 61915678 e sgs.china@sgs.com



Report No.: SHEM181100128102

Page: 26 of 30

7.8.3 Measurement Procedure and Data

a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:


Final Test Level =Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

- 3) Scan from 9kHz to 25GHz, the disturbance above 18GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown



Report No.: SHEM181100128102 Page: 27 of 30

30MHz~1GHz: HORIZONTAL:

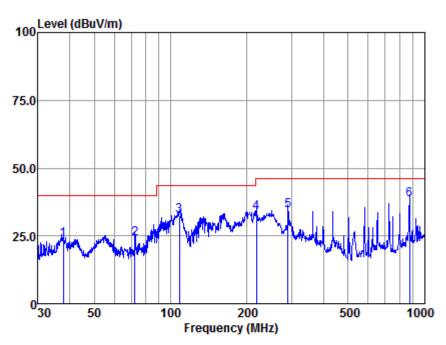

Antenna Polarity : HORIZONTAL EUT/Project :1279CR


Test mode :b

	Freq		Antenna Factor						Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
1	37.81	51.10	16.10	0.21	43.69	23.72	40.00	-16.28	QP
2	72.34	56.89	10.59	0.35	43.74	24.09	40.00	-15.91	QP
3	108.27	66.19	9.58	0.49	43.74	32.52	43.50	-10.98	QP
4	217.54	66.20	10.19	0.72	43.66	33.45	46.00	-12.55	QP
5	290.02	64.43	12.87	0.83	43.69	34.44	46.00	-11.56	QP
6	872.18	56.51	22.49	2.31	42.93	38.38	46.00	-7.62	OP



Report No.: SHEM181100128102 Page: 28 of 30

VERTICAL:

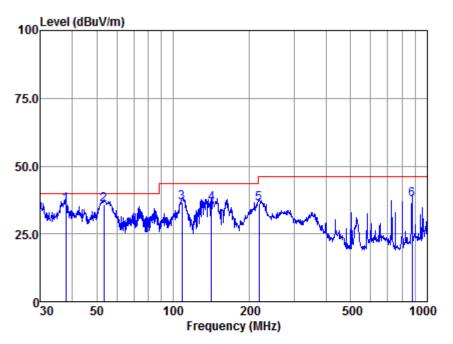

Antenna Polarity : VERTICAL EUT/Project :1279CR Test mode

		Read	Antenna	Cable	Preamp	Emission	Limit	0ver	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
1	37.81	63.20	16.10	0.21	43.69	35.82	40.00	-4.18	QP
2	53.32	67.83	11.29	0.27	43.73	35.66	40.00	-4.34	QP
3	108.27	70.07	9.58	0.49	43.74	36.40	43.50	-7.10	QP
4	141.33	67.91	11.39	0.61	43.73	36.18	43.50	-7.32	QP
5	218.31	68.73	10.22	0.72	43.66	36.01	46.00	-9.99	QP
6	872.18	55.77	22.49	2.31	42.93	37.64	46.00	-8.36	QP



Report No.: SHEM181100128102 Page: 29 of 30

Mode:b; Pol	arization:F	lorizontal;	Modulation:	GFSK; ; C	hannel:Low								
Frequency	RX_R	Factor	Emission	Limit	Over Limit	Detector							
MHz	dBuV	dB	dBuV/m	dBuV/m	dB								
4804	35.71	6.18	41.89	54	-12.11	peak							
7206	34.63	10.63	45.26	54	-8.74	peak							
9608	34.53	14.38	48.91	54	-5.09	peak							
Mode:b; Polarization:Vertical; Modulation:GFSK; ; Channel:Low													
						5							
Frequency	RX_R	Factor	Emission	Limit	Over Limit	Detector							
MHz	dBuV	dB	dBuV/m	dBuV/m	dB								
4804	39.23	6.18	45.41	54	-8.59	peak							
7206	35.92	10.63	46.55	54	-7.45	peak							
9608	37.35	14.38	51.73	54	-2.27	peak							
Mode:b; Pol	arization:L	lorizontal:	Madulation:	3E8K+ + C	hannal:midd	lo							
Frequency	RX_R	Factor	Emission	Limit	Over Limit	Detector							
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector							
4880	39.13	6.97	46.1	54	-7.9	peak							
7320	35.42	11.12	46.54	54	-7.46	peak							
9760	31.2	14.35	45.55	54 54	-8.45	peak							
3700	01.2	14.00	40.00	34	-0.43	peak							
Mode:b; Pol	arization:\	/ertical; Mo	dulation:GF	SK; ; Cha	nnel:middle								
Frequency	RX_R	Factor	Emission	Limit	Over Limit	Detector							
MHz	dBuV	dB	dBuV/m	dBuV/m	dB								
4880	34.5	6.97	41.47	54	-12.53	peak							
7320	37.24	11.12	48.36	54	-5.64	peak							
9760	33.77	14.35	48.12	54	-5.88	peak							
Mode:b; Pol	arization:F	lorizontal;		GFSK; ; C	hannel:High								
Frequency	RX_R	Factor	Emission	Limit	Over Limit	Detector							
MHz	dBuV	dB	dBuV/m	dBuV/m	dB								
4960	37.87	7.49	45.36	54	-8.64	peak							
7440	34.77	11.65	46.42	54	-7.58	peak							
9920	36.8	14.4	51.2	54	-2.8	peak							
Mode:b; Pol	arization:\	ertical; Mo	dulation:GF	SK; ; Cha	nnel:High								
Frequency	RX_R	Factor	Emission	Limit	Over Limit	Detector							
MHz	dBuV	dB	dBuV/m	dBuV/m	dB								
4960	38.61	7.49	46.1	54	-7.9	peak							
7440	36.48	11.65	48.13	54	-5.87	peak							
9920	36.4	14.4	50.8	54	-3.2	peak							



Report No.: SHEM181100128102

Page: 30 of 30

8 Test Setup Photographs

Refer to the < Test Setup photos-FCC>.

9 EUT Constructional Details

Refer to the < External Photos > & < Internal Photos >.

- End of the Report -