

Report No.: SHEM190901758001

Page: 1 of 48

### TEST REPORT

Application No.: SHEM1909017580CR

**FCC ID**: 2ADTD-I0M2000 **IC**: 20199-I0M2000

Applicant: Hangzhou Hikvision Digital Technology Co., Ltd.

Address of Applicant: No. 555 Qianmo Road, Binjiang District, Hangzhou 310052, China

Manufacturer: Hangzhou Hikvision Digital Technology Co., Ltd.

Address of Manufacturer: No. 555 Qianmo Road, Binjiang District, Hangzhou 310052, China

**Factory:** 1.Hangzhou Hikvision Technology Co., Ltd. 2.Hangzhou Hikvision Electronics Co., Ltd.

3.Hangzhou Hikvision Digital Technology Co., Ltd.

Address of Factory: 1. No.700, Dongliu Road, Binjiang District, Hangzhou City, Zhejiang,

310052, China

2. No.299, Qiushi Road, Tonglu Economic Development Zone, Tonglu

County, Hangzhou, Zhejiang, 310052, China

3. No. 555, Qianmo Road, Binjiang District, Hangzhou City, Zhejiang

Province, China

**Equipment Under Test (EUT):** 

**EUT Name:** NETWORK CAMERA **Model No.:** DS-2CV2021G2-IDW

Trade mark: HIKVISION

Standard(s): 47 CFR Part 15, Subpart C 15.247

RSS-247 Issue 2, February 2017 RSS-Gen Issue 5, April 2018

**Date of Receipt:** 2019-09-29

**Date of Test:** 2019-10-16 to 2019-10-23

**Date of Issue:** 2019-10-24

Test Result: Pass\*

Parlam Zhan E&E Section Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

检验检测专用章 Inspection & Testing Services S-CSTO Line & Technical Services Services Services

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, resemble (SM Doceane).

NO.588 West Jindu Road,Songjiang District,Shanghai,China 201612 中国・上海・松江区金都西路588号 邮编: 201612 t(86-21) 61915666 f(86-21)61915678 www.sgsgroup.com.cn t(86-21) 61915666 f(86-21)61915678 e sgs.china@sgs.com

<sup>\*</sup> In the configuration tested, the EUT complied with the standards specified above.



Report No.: SHEM190901758001

Page: 2 of 48

Revision Record								
Version Description Date Remark								
00	Original	2019-10-24	/					

Authorized for issue by:			
	Michael Mil		
	Micheal Niu / Project Engineer	_	
	Darlam zhan		
	Parlam Zhan / Reviewer	-	



Report No.: SHEM190901758001

Page: 3 of 48

### 2 Test Summary

Radio Spectrum Technical Requirement								
Item	FCC Requirement	FCC Requirement IC Requirement		Result				
Antenna Requirement	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	RSS-Gen Clause 6.8	N/A	Customer Declaration				

Radio Spectrum Matt	er Part			
Item	FCC Requirement	IC Requirement	Method	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.207	RSS-Gen Clause 8.8	ANSI C63.10 (2013) Section 6.2	Pass
Minimum 6dB 47 CFR Part 15, Bandwidth Subpart C 15.247a(		RSS-247 Clause 5.2(a)	ANSI C63.10 (2013) Section 11.8.1	Pass
Conducted Average Output Power	47 CFR Part 15, Subpart C 15.247(b)(3)	RSS-247 Clause 5.4(d)	ANSI C63.10 (2013) Section 11.9.2	Pass
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247(e)	RSS-247 Clause 5.2(b)	ANSI C63.10 (2013) Section 11.10.3	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247(d)	RSS-247 Clause 5.5	ANSI C63.10 (2013) Section 11.13.3.2	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247(d)	RSS-247 Clause 5.5	ANSI C63.10 (2013) Section 11.11	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Section 3.3 & RSS-Ger Section 8.9	ANSI C63.10 (2013) Section 6.10.5	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Section 3.3 & RSS-Ger Section 8.9	ANSI C63.10 (2013) Section 6.4,6.5,6.6	Pass
99% Bandwidth	•	RSS-Gen Section 6.6	ANSI C63.10 Section 6.9.3	Pass
Frequency Stability	-	RSS-Gen Section 8.11	RSS-Gen Section 6.11	Pass

Remark: Frequency stability requested in RSS GEN S8.11 has been complied since the result of band edge can demonstrate.



Report No.: SHEM190901758001

Page: 4 of 48

### 3 Contents

1	CO/	/ER PAGE	Page 1						
2		TEST SUMMARY3							
3	CON	ITENTS	4						
4	GEN	IERAL INFORMATION	5						
	4.1	DETAILS OF E.U.T.	5						
	4.2	POWER LEVEL SETTING USING IN TEST:							
	4.3	DESCRIPTION OF SUPPORT UNITS	5						
	4.4	MEASUREMENT UNCERTAINTY	6						
	4.5	TEST LOCATION							
	4.6	TEST FACILITY							
	4.7	DEVIATION FROM STANDARDS							
	4.8	ABNORMALITIES FROM STANDARD CONDITIONS	7						
5	EQL	JIPMENT LIST	8						
6	RAD	DIO SPECTRUM TECHNICAL REQUIREMENT	9						
	6.1	ANTENNA REQUIREMENT	g						
7	RAD	DIO SPECTRUM MATTER TEST RESULTS	10						
	7.1	CONDUCTED EMISSIONS AT AC POWER LINE (150kHz-30MHz)	10						
	7.2	MINIMUM 6DB BANDWIDTH	14						
	7.3	CONDUCTED AVERAGE OUTPUT POWER							
	7.4	Power Spectrum Density							
	7.5	CONDUCTED BAND EDGES MEASUREMENT							
	7.6	CONDUCTED SPURIOUS EMISSIONS							
	7.7	RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS							
	7.8	RADIATED SPURIOUS EMISSIONS							
	7.9	99% BANDWIDTH	47						
8	TES	T SETUP PHOTOGRAPHS	48						
0	EUT	CONSTRUCTIONAL DETAILS	40						



Report No.: SHEM190901758001

Page: 5 of 48

#### 4 General Information

#### 4.1 Details of E.U.T.

Power supply: Adapter

Model: DSA-12PFT-12 FUS

Input:100-240V~50/60Hz MAX 0.5A

Output: DC12V/1A

Test voltage: AC 120V/60Hz

Cable: DC to Adapter Cable 250cm

Antenna Gain Antenna 1:2.15dBi; Antenna 2: 2.15dBi

MIMO Antenna:5.15dBi

Antenna Type Dipole Antenna

Channel Spacing 5MHz

Modulation Type 802.11b: DSSS (CCK, DQPSK, DBPSK)

802.11g/n: OFDM (64QAM, 16QAM, QPSK, BPSK)

Number of Channels 802.11b/g/n(HT20):11

802.11n(HT40):7

Operation Frequency 802.11b/g/n(HT20): 2412MHz to 2462MHz

802.11n(HT40): 2422MHz to 2452MHz

#### 4.2 Power level setting using in test:

	Channel	802.11b	802.11g	802.11n(HT20)	
	1	38	40	40	
	6	6 38		40	
	11 38		40	40	
	Channel	802.11n(HT40)			
	3	40			
6		40			
9		40			

#### 4.3 Description of Support Units

Description	Description Manufacturer		Serial No.
Laptop	Lenovo	ThinkPad X100e	/
Serial port adapter plate	/	Test Plate 3	/
SecureCRT	VanDyke	V 6.2.0	/



Report No.: SHEM190901758001

Page: 6 of 48

#### 4.4 Measurement Uncertainty

No.	Item	Measurement Uncertainty		
1	Radio Frequency	±8.4 x 10 <sup>-8</sup>		
2	Timeout	±2s		
3	Duty cycle	±0.37%		
4	Occupied Bandwidth	±3%		
5	RF conducted power	±0.6dB		
6	RF power density	±2.84dB		
7	Conducted Spurious emissions	±0.75dB		
8	DE Dadiated newer	±4.6dB (Below 1GHz)		
0	RF Radiated power	±4.1dB (Above 1GHz)		
		±4.2dB (Below 30MHz)		
9	Redicted Spurious emission test	±4.4dB (30MHz-1GHz)		
9	Radiated Spurious emission test	±4.8dB (1GHz-18GHz)		
		±5.2dB (Above 18GHz)		
10	Temperature test	±1°C		
11	Humidity test	±3%		
12	Supply voltages	±1.5%		
13	Time	±3%		

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



Report No.: SHEM190901758001

Page: 7 of 48

#### 4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd. Shanghai Branch 588 West Jindu Road, Xinqiao, Songjiang, 201612 Shanghai, China

Tel: +86 21 6191 5666 Fax: +86 21 6191 5678

No tests were sub-contracted.

#### 4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### • CNAS (No. CNAS L0599)

CNAS has accredited SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

#### • NVLAP (Certificate No. 201034-0)

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. is accredited by the National Voluntary Laboratory Accreditation Program(NVLAP). Certificate No. 201034-0.

#### • FCC -Designation Number: CN5033

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been recognized as an accredited testing laboratory.

Designation Number: CN5033. Test Firm Registration Number: 479755.

#### • Innovation, Science and Economic Development Canada

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

IC Registration No.: 8617A-1. CAB identifier: CN0020.

#### VCCI (Member No.: 3061)

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-13868, C-14336, T-12221, G-10830 respectively.

#### 4.7 Deviation from Standards

None

#### 4.8 Abnormalities from Standard Conditions

None



Report No.: SHEM190901758001

Page: 8 of 48

### 5 Equipment List

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Conducted Emission at Ma	ins Terminals (	(150kHz-30MHz)			
EMI test receiver	R&S	ESR7	SHEM162-1	2018-12-20	2019-12-19
LISN	Schwarzbeck	NSLK8127	SHEM061-1	2018-12-20	2019-12-19
LISN	EMCO	3816/2	SHEM019-1	2018-12-20	2019-12-19
Pulse limiter	R&S	ESH3-Z2	SHEM029-1	2018-12-20	2019-12-19
Shielding Room	ZHONGYU	8*4*3M	SHEM079-2	2017-12-20	2020-12-19
CE test Cable	/	CE01	/	2018-12-26	2019-12-25
RF Conducted Test					
Spectrum Analyzer	R&S	FSP-30	SHEM002-1	2018-12-20	2019-12-19
Spectrum Analyzer	Agilent	N9020A	SHEM181-1	2019-08-13	2020-08-12
Signal Generator	R&S	SMR20	SHEM006-1	2019-08-13	2020-08-12
Signal Generator	Agilent	N5182A	SHEM182-1	2019-08-13	2020-08-12
Communication Tester	R&S	CMW270	SHEM183-1	2019-08-13	2020-08-12
Switcher	Tonscend	JS0806	SHEM184-1	2019-08-13	2020-08-12
Power Sensor	Keysight	U2021XA * 4	SHEM184-1	2019-08-13	2020-08-12
Splitter	Anritsu	MA1612A	SHEM185-1	/	/
Coupler	e-meca	803-S-1	SHEM186-1	/	/
High-low Temp Cabinet	Suzhou Zhihe	TL-40	SHEM087-1	2017-09-25	2020-09-24
AC Power Stabilizer	WOCEN	6100	SHEM045-1	2018-12-26	2019-12-25
DC Power Supply	MCN	MCH-303A	SHEM210-1	2018-12-26	2019-12-25
Conducted test Cable	/	RF01~RF04	/	2018-12-26	2019-12-25
RF Radiated Test					
EMI test Receiver	R&S	ESU40	SHEM051-1	2018-12-20	2019-12-19
Spectrum Analyzer	R&S	FSP-30	SHEM002-1	2018-12-20	2019-12-19
Loop Antenna (9kHz-30MHz)	Schwarzbeck	FMZB1519	SHEM135-1	2017-04-10	2020-04-09
Antenna (25MHz-2GHz)	Schwarzbeck	VULB9168	SHEM048-1	2017-02-28	2020-02-27
Antenna (25MHz-2GHz)	Schwarzbeck	VULB9168	SHEM202-1	2019-04-30	2022-04-29
Horn Antenna (1-18GHz)	Schwarzbeck	HF906	SHEM009-1	2017-10-24	2020-10-23
Horn Antenna (1-18GHz)	Schwarzbeck	BBHA9120D	SHEM050-1	2017-01-14	2020-01-13
Horn Antenna (14-40GHz)	Schwarzbeck	BBHA 9170	SHEM049-1	2017-12-03	2020-12-02
Pre-amplifier (9KHz-2GHz)	CLAVIIO	BDLNA-0001	SHEM164-1	2019-08-13	2020-08-12
Pre-amplifier (1-18GHz)	CLAVIIO	BDLNA-0118	SHEM050-2	2019-08-13	2020-08-12
High-amplifier (14-40GHz)	Schwarzbeck	10001	SHEM049-2	2018-12-20	2019-12-19
Signal Generator	R&S	SMR40	SHEM058-1	2019-08-13	2020-08-12
Band Filter	LORCH	9BRX-875/X150	SHEM156-1	1	/
Band Filter	LORCH	13BRX-1950/X500	SHEM083-2	1	/
Band Filter	LORCH	5BRX-2400/X200	SHEM155-1	1	/
Band Filter	LORCH	5BRX-5500/X1000	SHEM157-2	1	1
High pass Filter	Wainwright	WHK3.0/18G	SHEM157-1	1	/
High pass Filter	Wainwright	WHKS1700	SHEM157-3	1	1
Semi/Fully Anechoic	ST	11*6*6M	SHEM078-2	2017-07-22	2020-07-21
RE test Cable	/	RE01, RE02, RE06	/	2018-12-26	2019-12-25



Report No.: SHEM190901758001

Page: 9 of 48

### 6 Radio Spectrum Technical Requirement

#### 6.1 Antenna Requirement

#### 6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(c)

#### 6.1.2 Conclusion

#### Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **EUT Antenna:**

The antenna is dipole antenna and no consideration of replacement. The best case gain of the antenna is antenna 1:2.15dBi; antenna 2: 2.15dBi.





Report No.: SHEM190901758001

Page: 10 of 48

### 7 Radio Spectrum Matter Test Results

#### 7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207 Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

Fraguency of omission/MU=)	Conducted limit(dBµV)			
Frequency of emission(MHz)	Quasi-peak	Average		
0.15-0.5	66 to 56*	56 to 46*		
0.5-5	56	46		
5-30	60	50		
5-30 Decreases with the logarithm of the from				

#### 7.1.1 E.U.T. Operation

**Operating Environment:** 


Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1020 mbar

Test mode a:TX mode\_Keep the EUT in continuously transmitting mode with all modulation

types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40).

Only the data of worst case is recorded in the report.

#### 7.1.2 Test Setup Diagram

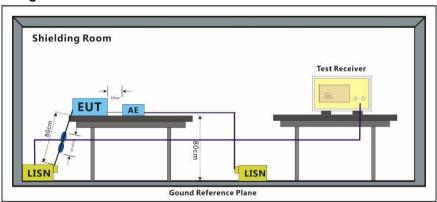

NO.588 West Jindu Road, Songjiang District, Shanghai, China 201612 中国・上海・松江区金都西路588号 邮編: 201612 t(86-21)61915666 f(86-21)61915678 www.sgsgroup.com.cn t(86-21)61915666 f(86-21)61915678 e sgs.china@sgs.com



Report No.: SHEM190901758001

Page: 11 of 48

#### 7.1.3 Measurement Procedure and Data

1) The mains terminal disturbance voltage test was conducted in a shielded room.

- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a  $50 \text{ohm}/50 \mu\text{H} + 5 \text{ohm}$  linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.


Remark: LISN=Read Level+ Cable Loss+ LISN Factor



Report No.: SHEM190901758001

Page: 12 of 48

Mode:a; Line:Live Line

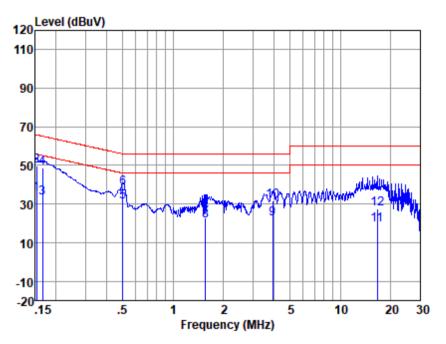

LISN : LINE

EUT/Project No: 17580CR

Test Mode : a

	Freq (MHz)	Read level (dBuV)	LISN Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	0.15	24.96	0.09	9.97	35.02	55.87	-20.85	Average
2	0.15	39.93	0.09	9.97	49.99	65.87	-15.88	QP
3	0.17	22.89	0.08	9.99	32.96	55.16	-22.20	Average
4	0.17	38.48	0.08	9.99	48.55	65.16	-16.61	QP
5	0.50	21.21	0.08	9.97	31.26	46.00	-14.74	Average
6	0.50	28.15	0.08	9.97	38.20	56.00	-17.80	QP
7	1.56	12.55	0.12	10.06	22.73	46.00	-23.27	Average
8	1.56	10.89	0.12	10.06	21.07	56.00	-34.93	QP
9	3.94	12.05	0.13	10.31	22.49	46.00	-23.51	Average
10	3.94	21.10	0.13	10.31	31.54	56.00	-24.46	QP
11	16.66	8.61	0.29	10.40	19.30	50.00	-30.70	Average
12	16.66	16.92	0.29	10.40	27.61	60.00	-32.39	QP


Notes: Emission Level = Read Level +LISN Factor + Cable loss



Report No.: SHEM190901758001

Page: 13 of 48

Mode:a; Line:Neutral Line

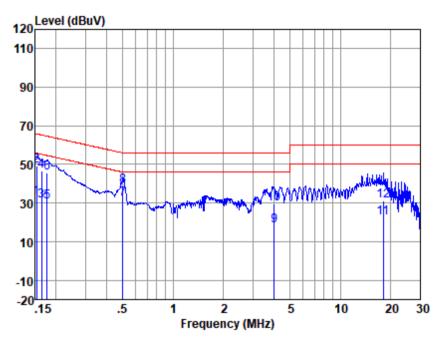

LISN : NEUTRAL EUT/Project No : 17580CR

Test Mode : a

	Freq (MHz)	Read level (dBuV)	LISN Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	0.15	22.70	0.07	9.97	32.74	55.87	-23.13	Average
2	0.15	38.99	0.07	9.97	49.03	65.87	-16.84	QP
3	0.16	21.04	0.07	9.99	31.10	55.30	-24.20	Average
4	0.16	36.82	0.07	9.99	46.88	65.30	-18.42	QP
5	0.18	20.51	0.07	10.01	30.59	54.64	-24.05	Average
6	0.18	35.69	0.07	10.01	45.77	64.64	-18.87	QP
7	0.50	22.38	0.06	9.97	32.41	46.00	-13.59	Average
8	0.50	28.86	0.06	9.97	38.89	56.00	-17.11	QP
9	4.03	7.97	0.13	10.32	18.42	46.00	-27.58	Average
10	4.03	18.93	0.13	10.32	29.38	56.00	-26.62	QP
11	18.14	11.55	0.27	10.39	22.21	50.00	-27.79	Average
12	18.14	20.54	0.27	10.39	31.20	60.00	-28.80	QP

Notes: Emission Level = Read Level +LISN Factor + Cable loss



Report No.: SHEM190901758001

Page: 14 of 48

#### 7.2 Minimum 6dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247a(2)
Test Method: ANSI C63.10 (2013) Section 11.8.1

#### 7.2.1 E.U.T. Operation

Operating Environment:


Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1002 mbar

Test mode a:TX mode\_Keep the EUT in continuously transmitting mode with all modulation

types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40).

Only the data of worst case is recorded in the report.

#### 7.2.2 Test Setup Diagram

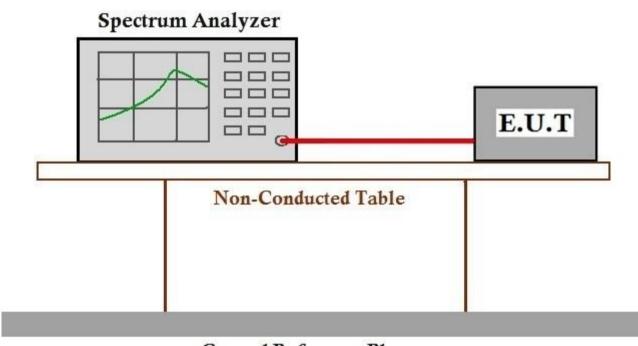

#### Ground Reference Plane

#### 7.2.3 Measurement Procedure and Data

The detailed test data see: Appendix A for SHEM190901758001



Report No.: SHEM190901758001

Page: 15 of 48

#### 7.3 Conducted Average Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)
Test Method: ANSI C63.10 (2013) Section 11.9.2

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)					
	1 for ≥50 hopping channels					
902-928	0.25 for 25≤ hopping channels <50					
	1 for digital modulation					
	1 for ≥75 non-overlapping hopping channels					
2400-2483.5	0.125 for all other frequency hopping systems					
	1 for digital modulation					
5725-5850	1 for frequency hopping systems and digital modulation					

#### 7.3.1 E.U.T. Operation

Operating Environment:


Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1002 mbar

Test mode a:TX mode\_Keep the EUT in continuously transmitting mode with all modulation

types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40).

Only the data of worst case is recorded in the report.

#### 7.3.2 Test Setup Diagram

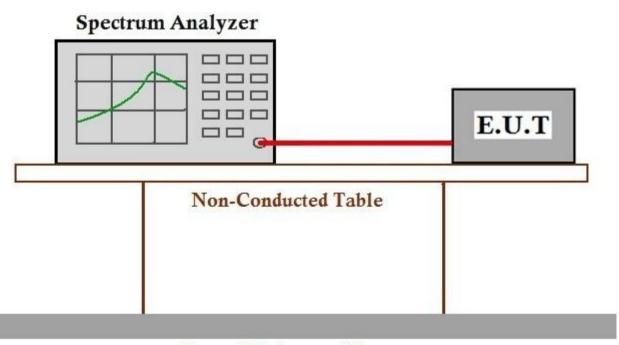

#### Ground Reference Plane

#### 7.3.3 Measurement Procedure and Data

The detailed test data see: Appendix A for SHEM190901758001

NO.588 West Jindu Road,Songjiang District,Shanghai,China 201612 中国・上海・松江区金都西路588号 邮编: 201612 t(86-21) 61915666 f(86-21) 61915678 www.sgsgroup.com.cn t(86-21) 61915666 f(86-21) 61915678 e sgs.china@sgs.com



Report No.: SHEM190901758001

Page: 16 of 48

#### 7.4 Power Spectrum Density

Test Requirement 47 CFR Part 15, Subpart C 15.247(e)
Test Method: ANSI C63.10 (2013) Section 11.10.3

Limit: ≤8dBm in any 3 kHz band during any time interval of continuous

transmission

#### 7.4.1 E.U.T. Operation

Operating Environment:


Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1002 mbar

Test mode a:TX mode Keep the EUT in continuously transmitting mode with all modulation

types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40).

Only the data of worst case is recorded in the report.

#### 7.4.2 Test Setup Diagram

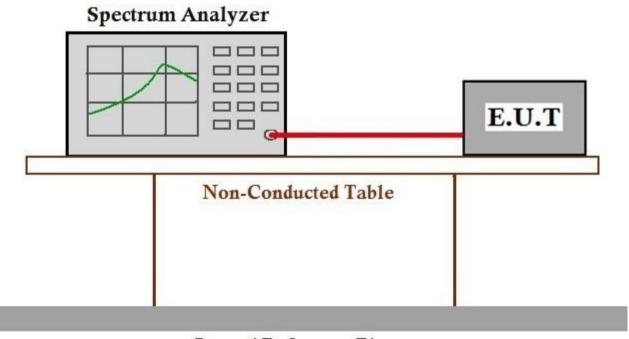

#### Ground Reference Plane

#### 7.4.3 Measurement Procedure and Data

The detailed test data see: Appendix A for SHEM190901758001



Report No.: SHEM190901758001

Page: 17 of 48

#### 7.5 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)
Test Method: ANSI C63.10 (2013) Section 11.13.3.2

Limit: In any 100 kHz bandwidth outside th

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in

§15.205(a), must also comply with the radiated emission limits specified in

§15.209(a) (see §15.205(c)

#### 7.5.1 E.U.T. Operation

Operating Environment:


Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1002 mbar

Test mode a:TX mode\_Keep the EUT in continuously transmitting mode with all modulation

types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40).

Only the data of worst case is recorded in the report.

#### 7.5.2 Test Setup Diagram

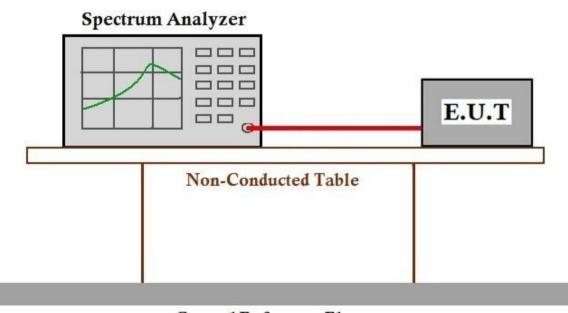

#### Ground Reference Plane

#### 7.5.3 Measurement Procedure and Data

The detailed test data see: Appendix A for SHEM190901758001

t(86-21) 61915666 f(86-21) 61915678 www.sgsgroup.com.cn t(86-21) 61915666 f(86-21) 61915678 e sgs.china@sgs.com

NO.588 West Jindu Road, Songjiang District, Shanghai, China 201612 中国・上海・松江区金都西路588号 邮编: 201612



Report No.: SHEM190901758001

Page: 18 of 48

#### 7.6 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)
Test Method: ANSI C63.10 (2013) Section 11.11

Limit: In any 100 kHz bandwidth outside the frequency b

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in

§15.205(a), must also comply with the radiated emission limits specified in

§15.209(a) (see §15.205(c)

#### 7.6.1 E.U.T. Operation

Operating Environment:


Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1002 mbar

Test mode a:TX mode\_Keep the EUT in continuously transmitting mode with all modulation

types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40).

Only the data of worst case is recorded in the report.

#### 7.6.2 Test Setup Diagram

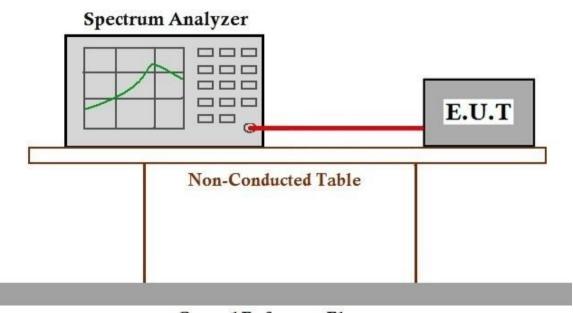

#### Ground Reference Plane

#### 7.6.3 Measurement Procedure and Data

The detailed test data see: Appendix A for SHEM190901758001

t(86-21) 61915666 f(86-21) 61915678 www.sgsgroup.com.cn t(86-21) 61915666 f(86-21) 61915678 e sgs.china@sgs.com

NO.588 West Jindu Road, Songjiang District, Shanghai, China 201612 中国・上海・松江区金都西路588号 邮编: 201612



Report No.: SHEM190901758001

Page: 19 of 48

#### 7.7 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.209 & 15.247(d)

Test Method: ANSI C63.10 (2013) Section 6.10.5

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.



Report No.: SHEM190901758001

Page: 20 of 48

#### 7.7.1 E.U.T. Operation

Operating Environment:


Temperature: 20 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar


Test mode a:TX mode\_Keep the EUT in continuously transmitting mode with all modulation


types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40).

Only the data of worst case is recorded in the report.

#### 7.7.2 Test Setup Diagram







NO.588 West Jindu Road,Songjiang District,Shanghai,China 201612 中国・上海・松江区金都西路588号 邮编: 201612

# SGS

### SGS-CSTC Standards Technical Services Co., Ltd. Shanghai Branch

Report No.: SHEM190901758001

Page: 21 of 48

#### 7.7.3 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.
- Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
- Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.


Remark 3: This test item was investigated while operating in SISO and MIMO mode, however, it was determined that SISO antenna 1 operation for b/g modulation and MIMO antenna operation for n modulation produced the worst emissions. So the emissions produced from other operation are not recorded in report.



Report No.: SHEM190901758001

Page: 22 of 48

Mode:a; Polarization:Horizontal; Modulation:b; bandwidth:20MHz; Channel:Low

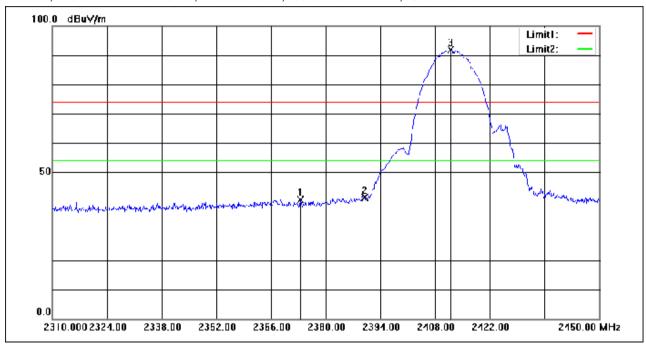


No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2373.560	62.04	-21.43	40.61	74.00	-33.39	peak
2	2390.000	62.71	-21.37	41.34	74.00	-32.66	peak
3	2412.060	113.25	-21.29	91.96	74.00	17.96	peak



Report No.: SHEM190901758001

Page: 23 of 48

Mode:a; Polarization:Vertical; Modulation:b; bandwidth:20MHz; Channel:Low

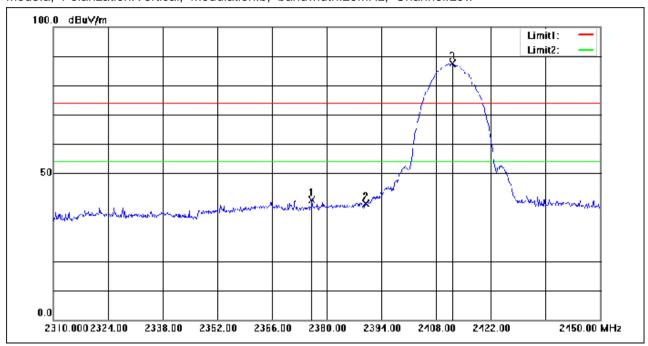


No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2376.220	62.33	-21.42	40.91	74.00	-33.09	peak
2	2390.000	61.02	-21.37	39.65	74.00	-34.35	peak
3	2412.200	108.82	-21.29	87.53	74.00	13.53	peak



Report No.: SHEM190901758001

Page: 24 of 48

Mode:a; Polarization:Horizontal; Modulation:b; bandwidth:20MHz; Channel:High

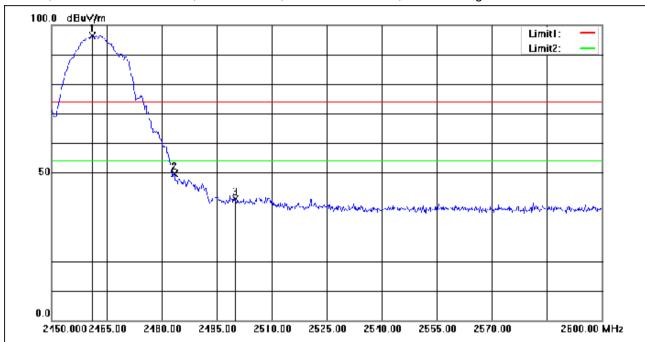


No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2461.100	117.51	-21.12	96.39	74.00	22.39	peak
2	2483.500	70.77	-21.05	49.72	74.00	-24.28	peak
3	2500.000	62.00	-20.99	41.01	74.00	-32.99	peak



Report No.: SHEM190901758001

Page: 25 of 48

Mode:a; Polarization: Vertical; Modulation:b; bandwidth: 20MHz; Channel: High

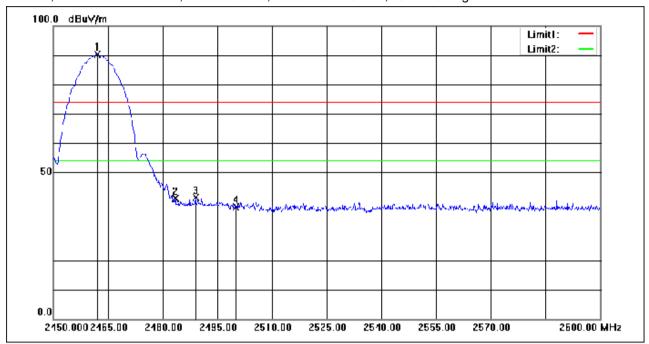


No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2462.000	111.40	-21.12	90.28	74.00	16.28	peak
2	2483.500	62.21	-21.05	41.16	74.00	-32.84	peak
3	2489.000	62.51	-21.03	41.48	74.00	-32.52	peak
4	2500.000	59.00	-20.99	38.01	74.00	-35.99	peak



Report No.: SHEM190901758001

Page: 26 of 48

Mode:a; Polarization:Horizontal; Modulation:g; bandwidth:20MHz; Channel:Low

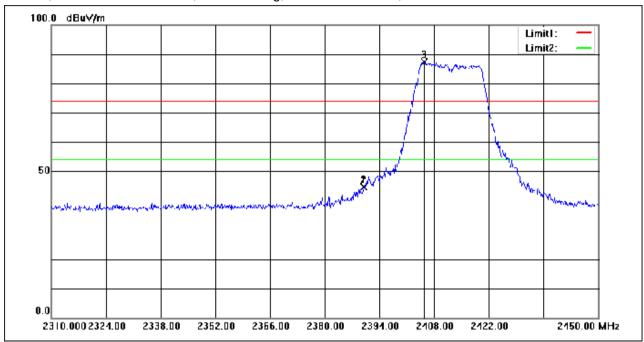


No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2389.940	65.99	-21.37	44.62	74.00	-29.38	peak
2	2390.000	65.94	-21.37	44.57	74.00	-29.43	peak
3	2405.480	108.74	-21.32	87.42	74.00	13.42	peak



Report No.: SHEM190901758001

Page: 27 of 48

Mode:a; Polarization:Vertical; Modulation:g; bandwidth:20MHz; Channel:Low

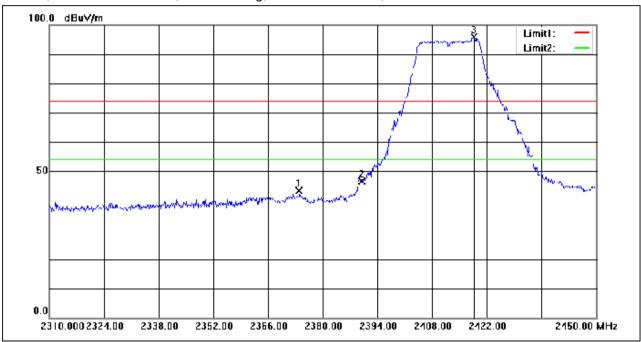


No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2373.980	64.73	-21.43	43.30	74.00	-30.70	peak
2	2390.000	67.92	-21.37	46.55	74.00	-27.45	peak
3	2418.640	117.18	-21.27	95.91	74.00	21.91	peak



Report No.: SHEM190901758001

Page: 28 of 48

Mode:a; Polarization:Horizontal; Modulation:g; bandwidth:20MHz; Channel:High

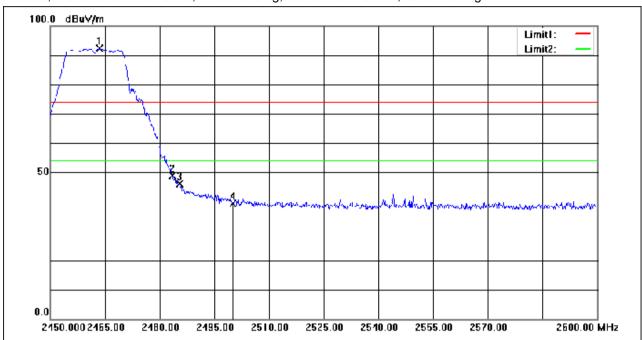


No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2463.500	113.41	-21.12	92.29	74.00	18.29	peak
2	2483.500	69.86	-21.05	48.81	74.00	-25.19	peak
3	2485.400	67.11	-21.04	46.07	74.00	-27.93	peak
4	2500.000	60.25	-20.99	39.26	74.00	-34.74	peak



Report No.: SHEM190901758001

Page: 29 of 48

Mode:a; Polarization:Vertical; Modulation:g; bandwidth:20MHz; Channel:High

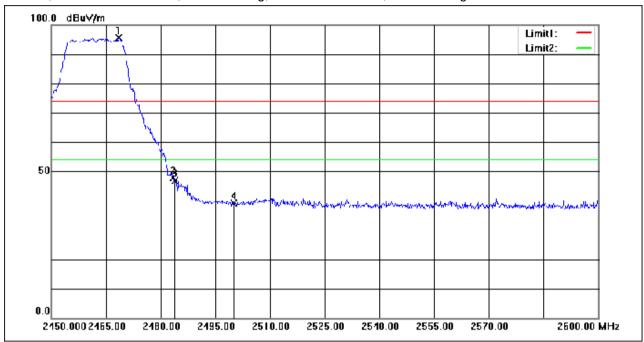


No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2468.450	116.62	-21.10	95.52	74.00	21.52	peak
2	2483.500	68.82	-21.05	47.77	74.00	-26.23	peak
3	2483.900	67.88	-21.05	46.83	74.00	-27.17	peak
4	2500.000	60.19	-20.99	39.20	74.00	-34.80	peak



Report No.: SHEM190901758001

Page: 30 of 48

Mode:a; Polarization:Horizontal; Modulation:n; bandwidth:20MHz; Channel:Low

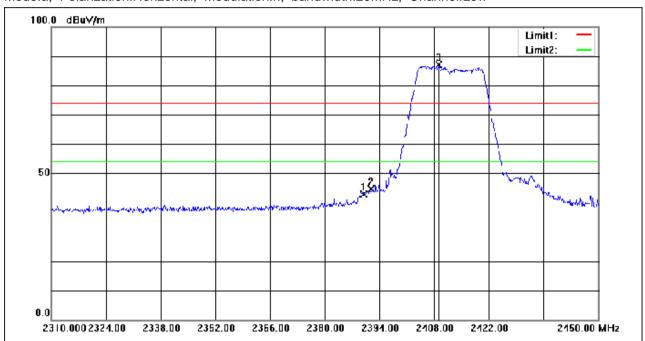


No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2390.000	64.37	-21.37	43.00	74.00	-31.00	peak
2	2391.900	65.90	-21.36	44.54	74.00	-29.46	peak
3	2409.260	108.54	-21.30	87.24	74.00	13.24	peak



Report No.: SHEM190901758001

Page: 31 of 48

Mode:a; Polarization:Vertical; Modulation:n; bandwidth:20MHz; Channel:Low

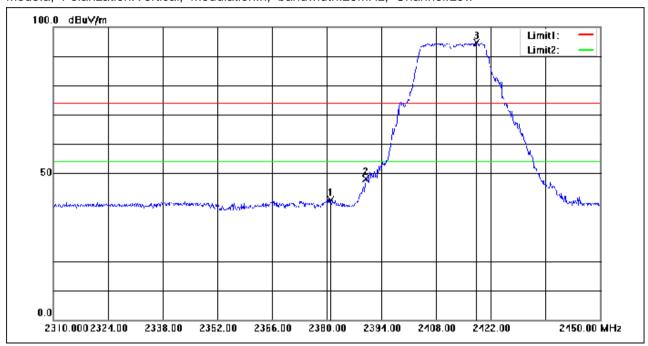


No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2380.980	62.34	-21.40	40.94	74.00	-33.06	peak
2	2390.000	69.44	-21.37	48.07	74.00	-25.93	peak
3	2418.360	115.92	-21.27	94.65	74.00	20.65	peak



Report No.: SHEM190901758001

Page: 32 of 48

Mode:a; Polarization:Horizontal; Modulation:n; bandwidth:20MHz; Channel:High

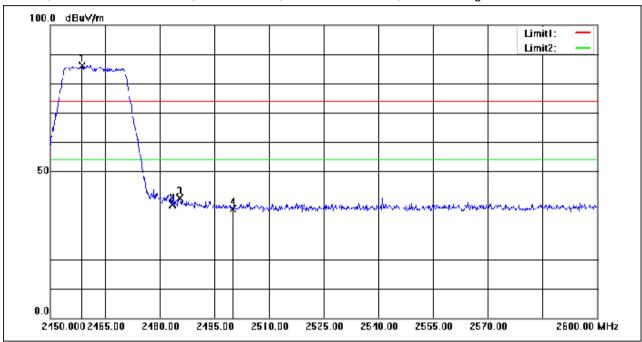


No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2458.700	107.32	-21.13	86.19	74.00	12.19	peak
2	2483.500	59.75	-21.05	38.70	74.00	-35.30	peak
3	2485.400	61.93	-21.04	40.89	74.00	-33.11	peak
4	2500.000	58.19	-20.99	37.20	74.00	-36.80	peak



Report No.: SHEM190901758001

Page: 33 of 48

Mode:a; Polarization:Vertical; Modulation:n; bandwidth:20MHz; Channel:High

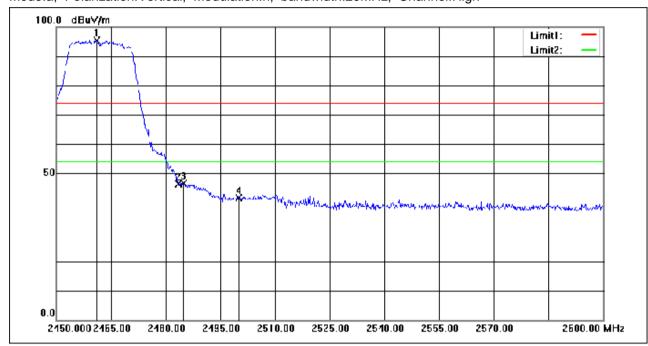


No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2461.100	116.59	-21.12	95.47	74.00	21.47	peak
2	2483.500	67.36	-21.05	46.31	74.00	-27.69	peak
3	2484.950	67.70	-21.04	46.66	74.00	-27.34	peak
4	2500.000	62.59	-20.99	41.60	74.00	-32.40	peak



Report No.: SHEM190901758001

Page: 34 of 48

Mode:a; Polarization:Horizontal; Modulation:n; bandwidth:40MHz; Channel:Low

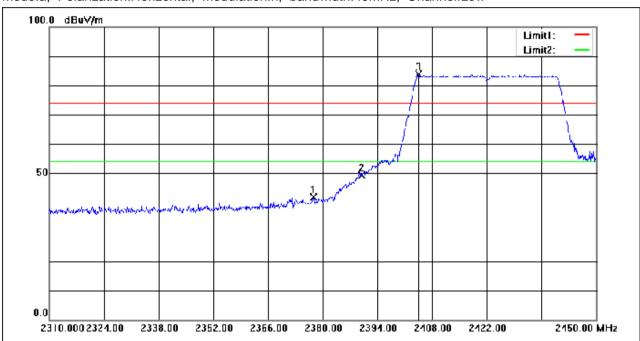


No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2377.620	63.31	-21.41	41.90	74.00	-32.10	peak
2	2390.000	70.71	-21.37	49.34	74.00	-24.66	peak
3	2404.500	105.10	-21.32	83.78	74.00	9.78	peak



Report No.: SHEM190901758001

Page: 35 of 48

Mode:a; Polarization:Vertical; Modulation:n; bandwidth:40MHz; Channel:Low

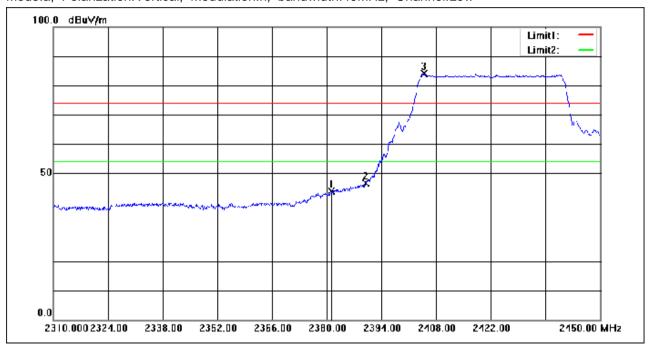


No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2381.260	65.26	-21.40	43.86	74.00	-30.14	peak
2	2390.000	67.88	-21.37	46.51	74.00	-27.49	peak
3	2404.920	105.48	-21.32	84.16	74.00	10.16	peak



Report No.: SHEM190901758001

Page: 36 of 48

Mode:a; Polarization:Horizontal; Modulation:n; bandwidth:40MHz; Channel:High

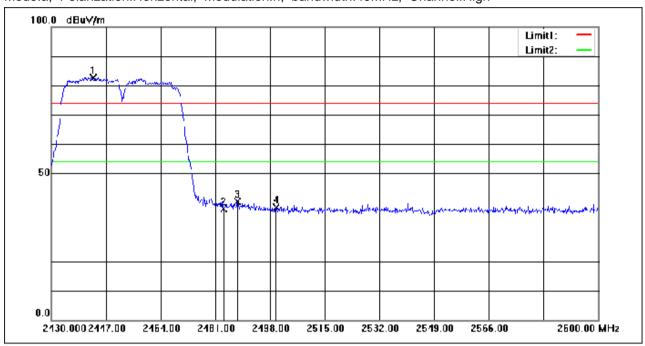


1	۷o.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
		(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
•	1	2442.920	103.93	-21.19	82.74	74.00	8.74	peak
2	2	2483.500	58.93	-21.05	37.88	74.00	-36.12	peak
:	3	2487.970	61.41	-21.03	40.38	74.00	-33.62	peak
4	1	2500.000	59.35	-20.99	38.36	74.00	-35.64	peak



Report No.: SHEM190901758001

Page: 37 of 48

Mode:a; Polarization: Vertical; Modulation:n; bandwidth: 40MHz; Channel: High

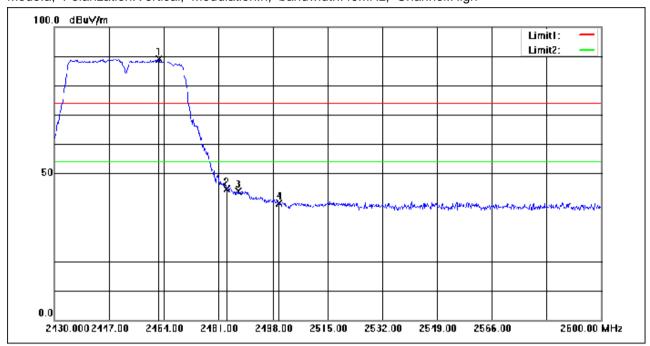

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2462.470	110.34	-21.12	89.22	74.00	15.22	peak
2	2483.500	65.57	-21.05	44.52	74.00	-29.48	peak
3	2487.290	65.02	-21.03	43.99	74.00	-30.01	peak
4	2500.000	60.87	-20.99	39.88	74.00	-34.12	peak



Report No.: SHEM190901758001

Page: 38 of 48

#### 7.8 Radiated Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.209 & 15.247(d)

Test Method: ANSI C63.10 (2013) Section 6.4,6.5,6.6

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.



Report No.: SHEM190901758001

Page: 39 of 48

#### 7.8.1 E.U.T. Operation

Operating Environment:


Temperature: 20 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar


Test mode a:TX mode\_Keep the EUT in continuously transmitting mode with all modulation


types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40).

Only the data of worst case is recorded in the report.

#### 7.8.2 Test Setup Diagram







NO.588 West Jindu Road,Songjiang District,Shanghai,China 201612 中国・上海・松江区金都西路588号 邮编: 201612

# SGS

### SGS-CSTC Standards Technical Services Co., Ltd. Shanghai Branch

Report No.: SHEM190901758001

Page: 40 of 48

#### 7.8.3 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

#### Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

- 3) Scan from 9kHz to 25GHz, the disturbance above 18GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown
- 5) This test item was investigated while operating in SISO and MIMO mode, however, it was determined that SISO antenna 1 operation for b/g modulation and MIMO antenna operation for n modulation produced the worst emissions. So the emissions produced from other operation are not recorded in report.




Report No.: SHEM190901758001

Page: 41 of 48

#### 30MHz-1GHz

Mode:a; Polarization:Horizontal

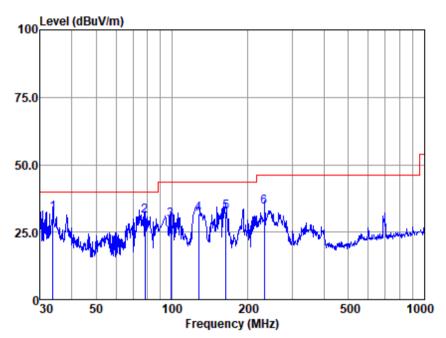

Antenna Polarity :HORIZONTAL EUT/Project :17580CR

Test mode :a

		Read	Antenna	Cable	Preamp	Emission	n Limit	0ver	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	33.680	50.34	23.74	0.53	42.36	32.25	40.00	-7.75	QP
2	78.139	62.42	10.04	0.73	42.27	30.92	40.00	-9.08	QP
3	98.833	57.74	12.85	1.10	42.32	29.37	43.50	-14.13	QP
4	127.665	57.40	15.03	1.41	42.27	31.57	43.50	-11.93	QP
5	163.755	58.11	15.04	1.48	42.22	32.41	43.50	-11.09	QP
6	232.532	58.92	15.51	2.08	42.13	34.38	46.00	-11.62	QP


Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor



Report No.: SHEM190901758001

Page: 42 of 48

Mode:a; Polarization:Vertical

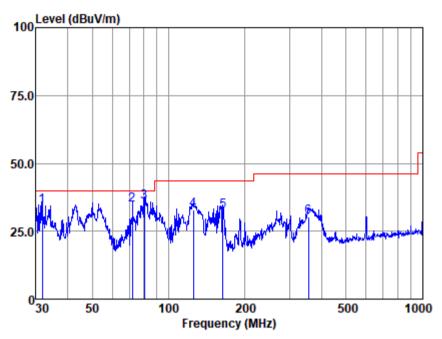

Antenna Polarity :VERTICAL EUT/Project :17580CR Test mode :a

		Read	Antenna	Cable	Preamp	Emissio	n Limit	0ver	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	31.731	51.68	24.54	0.45	42.37	34.30	40.00	-5.70	QP
2	72.084	66.90	9.34	0.66	42.26	34.64	40.00	-5.36	QP
3	80.362	66.95	10.34	0.78	42.27	35.80	40.00	-4.20	QP
4	125.446	58.86	14.89	1.39	42.27	32.87	43.50	-10.63	QP
5	163.755	58.29	15.04	1.48	42.22	32.59	43.50	-10.91	QP
6	355.427	50.99	18.47	2.91	41.94	30.43	46.00	-15.57	OP

Note: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor



Report No.: SHEM190901758001

Page: 43 of 48

#### Above 1GHz

Mode:a; Pol	arization:l	Horizontal;	Modulation	:b; bandwi	dth:20MHz;	Channel:Low
Frequency	RX_R	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
4824	42.07	6.40	48.47	54	-5.53	peak
7236	39.81	10.76	50.57	54	-3.43	peak
9648	35.40	14.37	49.77	54	-4.23	peak
						r
Mode:a; Pol	arization:\	√ertical; M	odulation:b;	bandwidth	n:20MHz; C	hannel:Low
Frequency	$RX_R$	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
4824	42.95	6.40	49.35	54	-4.65	peak
7236	40.53	10.76	51.29	54	-2.71	peak
9648	31.80	14.37	46.17	54	-7.83	peak
Mode:a; Pol	arization:l	Horizontal;	Modulation	:b; bandwi	dth:20MHz;	Channel:middle
Frequency	$RX_R$	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
4874	41.78	6.92	48.70	54	-5.30	peak
7311	39.19	11.08	50.27	54	-3.73	peak
9748	36.48	14.36	50.84	54	-3.16	peak
						r
Mode:a: Pol	arization:\	√ertical: M	odulation:b:	bandwidth	n:20MHz: C	hannel:middle
Frequency	RX R	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
4874	40.10	6.92	47.02	54	-6.98	peak
7311	34.36	11.08	45.44	54	-8.56	peak
9748	33.52	14.36	47.88	54	-6.12	peak
0.10	00.02			٠.	02	poun
Modera: Pol	arization·l	Horizontal:	Modulation	·b· bandwi	dth:20MHz:	Channel:High
Frequency	RX_R	Factor	Emission	Limit	Over Limit	•
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Dottoctor
4924	40.77	7.31	48.08	54	-5.92	peak
7386	37.43	11.41	48.84	54	-5.16	peak
9848	36.94	14.38	51.32	54	-2.68	peak
3040	30.34	14.50	31.32	34	-2.00	peak
Madara: Dal	orizotion:\	/ortical: M	adulation:b:	handwidth		hannal: High
Mode:a; Pol Frequency	RX_R	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
						n a a l
4924	40.42	7.31	47.73	54	-6.27	peak
7386	39.94	11.41	51.35	54	-2.65	peak
9848	32.75	14.38	47.13	54	-6.87	peak
Madaia: Dil	ori-oti !	Jori-ort-l	Madulatia	الماحمطية	dth.00141  -	Channeld
				-		Channel:Low
Frequency	RX_R	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	1
4824	42.77	6.40	49.17	54	-4.83	peak
7236	37.28	10.76	48.04	54	-5.96	peak
9648	33.45	14.37	47.82	54	-6.18	peak

NO.588 West Jindu Road, Songjiang District, Shanghai, China 201612 t(86-21) 61915666 f(86-21) 61915678 www.sgsgroup.com.cn 中国・上海・松江区金都西路588号 邮编: 201612 t(86-21) 61915666 f(86-21) 61915678 e sgs.china@sgs.com



Report No.: SHEM190901758001

Page: 44 of 48

Mode:a; Pol	arization:\	/ertical; M	odulation:g;	bandwidth	:20MHz; C	hannel:Low
Frequency	RX_R	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
4824	43.44	6.40	49.84	54	-4.16	peak
7236	35.62	10.76	46.38	54	-7.62	peak
9648	32.32	14.37	46.69	54	-7.31	peak
						•
Mode:a; Pol	arization:l	Horizontal;	Modulation	g; bandwid	dth:20MHz;	Channel:middle
Frequency	$RX_R$	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
4874	41.96	6.92	48.88	54	-5.12	peak
7311	38.11	11.08	49.19	54	-4.81	peak
9748	33.21	14.36	47.57	54	-6.43	peak
						·
Mode:a; Pol	arization:\	√ertical; M	odulation:g;	bandwidth	:20MHz; C	hannel:middle
Frequency	RX_R	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
4874	40.93	6.92	47.85	54	-6.15	peak
7311	39.24	11.08	50.32	54	-3.68	peak
9748	33.98	14.36	48.34	54	-5.66	peak
00	00.00			•	0.00	p c c
Mode:a: Pol	arization:l	Horizontal:	Modulation	a: bandwid	dth:20MHz:	Channel:High
Frequency	RX_R	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
4924	43.53	7.31	50.84	54	-3.16	peak
7386	35.08	11.41	46.49	54	-7.51	peak
9848	36.44	14.38	50.82	54	-3.18	peak
3040	00.44	14.00	00.02	0-1	0.10	pour
Mode:a; Pol	arization·\	/ertical: M	odulation.a.	handwidth	·20MHz· C	hannel·High
Frequency	RX_R	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	200000
4924	41.69	7.31	49.00	54	-5.00	peak
7386	38.38	11.41	49.79	54	-4.21	peak
9848	34.54	14.38	48.92	54	-5.08	peak
3040	04.04	14.00	40.02	0-1	0.00	pour
Modera: Pol	arization·l	Horizontal·	Modulation	n: handwid	th.20MHz.	Channel:Low
Frequency	RX_R	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Botootoi
4824	38.71	6.40	45.11	54	-8.89	peak
7236	39.41	10.76	50.17	54	-3.83	peak
9648	34.16	14.37	48.53	54	-5.47	peak
3040	34.10	14.57	40.55	34	-3.47	peak
Mode:a; Pol	arization·\	/ertical: M	odulation:n:	bandwidth	·20MHz· C	hannel·l ow
Frequency	RX_R	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
4824	40.60	6.40	47.00	54	-7.00	peak
7236	43.16	10.76	53.92	54	-0.08	peak
9648	33.60	14.37	47.97	54	-6.03	peak
55.10	22.00			<b>.</b>	2.00	F

NO.588 West Jindu Road,Songjiang District,Shanghai,China 201612 中国・上海・松江区金都西路588号 邮编: 201612  $\begin{array}{lll} t(86\text{-}21)\,61915666 & f(86\text{-}21)\,61915678 & \text{www.sgsgroup.com.cn} \\ t(86\text{-}21)\,61915666 & f(86\text{-}21)\,61915678 & \text{e.sgs.china@sgs.com} \end{array}$ 



Report No.: SHEM190901758001

Page: 45 of 48

Mode:a; Pol	arization:	-			dth:20MHz;	Channel:middle
Frequency	$RX_R$	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
4874	39.44	6.92	46.36	54	-7.64	peak
7311	39.51	11.08	50.59	54	-3.41	peak
9748	32.71	14.36	47.07	54	-6.93	peak
-		-	•			hannel:middle
Frequency	RX_R	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
4874	42.47	6.92	49.39	54	-4.61	peak
7311	37.48	11.08	48.56	54	-5.44	peak
9748	34.09	14.36	48.45	54	-5.55	peak
	arization:	Horizontal;			dth:20MHz;	Channel:High
Frequency	$RX_R$	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
4924	42.87	7.31	50.18	54	-3.82	peak
7386	35.87	11.41	47.28	54	-6.72	peak
9848	35.98	14.38	50.36	54	-3.64	peak
Mode:a; Pol	arization:	Vertical; M	odulation:n;	bandwidth	:20MHz; C	hannel:High
Frequency	RX_R	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
4924	39.13	7.31	46.44	54	-7.56	peak
7386	35.78	11.41	47.19	54	-6.81	peak
9848	32.14	14.38	46.52	54	-7.48	peak
						,
Mode:a: Pol	arization:	Horizontal:	Modulation	n: bandwid	dth:40MHz:	Channel:Low
Frequency	RX R	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
4844	41.87	6.60	48.47	54	-5.53	peak
7266	34.68	10.89	45.57	54	-8.43	peak
9688	31.22	14.35	45.57	54	-8.43	peak
0000	01.22	1 1.00	10.01	0.	0.10	pour
Mode:a; Pol	arization.	Vertical M	odulation:n:	handwidth	·40MHz· C	hannel·l ow
Frequency	RX_R	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	20100101
4844	42.60	6.60	49.20	54	-4.80	peak
7266	37.41	10.89	48.30	54	-5.70	peak
9688	35.33	14.35	49.68	5 <del>4</del>	-4.32	peak
9000	33.33	14.55	43.00	34	-4.52	peak
Mode:a; Pol	arization:	Horizontal;	Modulation	:n; bandwid	dth:40MHz;	Channel:middle
Frequency	RX_R	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
4874	39.63	6.92	46.55	54	-7.45	peak
7311	38.72	11.08	49.80	54	-4.20	peak
9748	35.68	14.36	50.04	54	-3.96	peak
						1

NO.588 West Jindu Road,Songjiang District,Shanghai,China 201612 中国・上海・松江区金都西路588号 邮编: 201612  $\begin{array}{lll} t(86\text{-}21)\,61915666 & f(86\text{-}21)\,61915678 & \text{www.sgsgroup.com.cn} \\ t(86\text{-}21)\,61915666 & f(86\text{-}21)\,61915678 & \text{e.sgs.china@sgs.com} \end{array}$ 



Report No.: SHEM190901758001

Page: 46 of 48

Mode:a; Polarization:Vertical; Modulation:n; bandwidth:40MHz; Channel:middle								
Frequency	RX_R	Factor	Emission	Limit	Margin	Detector		
MHz	dBuV	dB	dBuV/m	dBuV/m	dB			
4874	40.06	6.92	46.98	54	-7.02	peak		
7311	34.93	11.08	46.01	54	-7.99	peak		
9748	32.17	14.36	46.53	54	-7.47	peak		
Mode:a; Pol	arization:l	Horizontal;	Modulation:	n; bandwid	dth:40MHz;	Channel:High		
Frequency	$RX_R$	Factor	Emission	Limit	Margin	Detector		
MHz	dBuV	dB	dBuV/m	dBuV/m	dB			
4904	39.78	7.22	47.00	54	-7.00	peak		
7356	34.28	11.28	45.56	54	-8.44	peak		
9808	35.23	14.37	49.60	54	-4.40	peak		

Mode:a; Polarization:Vertical; Modulation:n; bandwidth:40MHz; Channel:High

Frequency	RX_R	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
4904	40.73	7.22	47.95	54	-6.05	peak
7356	36.20	11.28	47.48	54	-6.52	peak
9808	33.28	14.37	47.65	54	-6.35	peak



Report No.: SHEM190901758001

Page: 47 of 48

#### 7.9 99% Bandwidth

Test Requirement RSS-Gen Section 6.6
Test Method: ANSI C63.10 Section 6.9.3

#### 7.9.1 E.U.T. Operation

Operating Environment:


Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1002 mbar

Test mode a:TX mode\_Keep the EUT in continuously transmitting mode with all modulation

types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40).

Only the data of worst case is recorded in the report.

#### 7.9.2 Test Setup Diagram

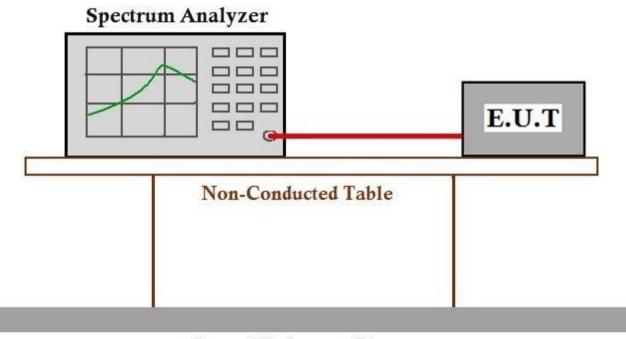

#### Ground Reference Plane

#### 7.9.3 Measurement Procedure and Data

The detailed test data see: Appendix A for SHEM190901758001



Report No.: SHEM190901758001

Page: 48 of 48

### 8 Test Setup Photographs

Refer to the < Test Setup photos-FCC>.

### 9 EUT Constructional Details

Refer to the < External Photos > & < Internal Photos >.

- End of the Report -