

# FCC RF Test Report

**APPLICANT** : Jessup L.L.C.  
**EQUIPMENT** : Wireless Remote  
**MODEL NAME** : DR49WK  
**FCC ID** : 2ADU9-3876  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : (DTS) Digital Transmission System

The testing completed on May 19, 2015. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager



**SPORTON INTERNATIONAL INC.**  
No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.

Report No. : FR4D3036-01A

Report Version : Rev. 02

Page Number : 1 of 26

Report Template No.: BU5-FR15CWL MA Version 1.0

# TABLE OF CONTENTS

<b>REVISION HISTORY</b> .....	<b>3</b>
<b>SUMMARY OF TEST RESULT</b> .....	<b>4</b>
<b>1 GENERAL DESCRIPTION</b> .....	<b>5</b>
1.1 Applicant .....	5
1.2 Product Feature of Equipment Under Test.....	5
1.3 Product Specification subjective to this standard .....	5
1.4 Modification of EUT .....	5
1.5 Testing Location .....	6
1.6 Applicable Standards.....	6
<b>2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST</b> .....	<b>7</b>
2.1 Carrier Frequency and Channel .....	7
2.2 Pre-Scanned RF Power.....	8
2.3 Test Mode.....	8
2.4 Connection Diagram of Test System.....	8
2.5 Support Unit used in test configuration and system .....	9
2.6 EUT Operation Test Setup .....	9
2.7 Measurement Results Explanation Example.....	9
<b>3 TEST RESULT</b> .....	<b>10</b>
3.1 6dB Bandwidth Measurement .....	10
3.2 Peak Output Power Measurement .....	12
3.3 Power Spectral Density Measurement .....	13
3.4 Conducted Band Edges and Spurious Emission Measurement .....	15
3.5 Radiated Band Edges and Spurious Emission Measurement .....	19
3.6 Antenna Requirements .....	24
<b>4 LIST OF MEASURING EQUIPMENT</b> .....	<b>25</b>
<b>5 UNCERTAINTY OF EVALUATION</b> .....	<b>26</b>

## APPENDIX A. CONDUCTED TEST RESULTS

## APPENDIX B. RADIATED TEST RESULTS

## REVISION HISTORY

## SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm/3kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 5.31 dB at 71.040 MHz
-	15.207	AC Conducted Emission	15.207(a)	Not Required	EUT doesn't have a power port
3.6	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-

# 1 General Description

## 1.1 Applicant

Jessup L.L.C.

5251 West 116th Place, Suite 200,  
Leawood, Kansas 66221

## 1.2 Product Feature of Equipment Under Test

Product Feature	
Equipment	Wireless Remote
Model Name	DR49WK
FCC ID	2ADU9-3876
EUT supports Radios application	WLAN 11a/g

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.3 Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum Output Power to antenna	11.46 dBm (0.014 W)
Antenna Type	Fixed Internal Antenna with gain 1.70 dBi
Type of Modulation	OFDM (BPSK / QPSK / 16QAM)

## 1.4 Modification of EUT

No modifications are made to the EUT during all test items.

## 1.5 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

<b>Test Site</b>	SPORTON INTERNATIONAL INC.	
<b>Test Site Location</b>	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	
	TH02-HY	03CH07-HY

**Note:** The test site complies with ANSI C63.4 2009 requirement.

## 1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02
- ANSI C63.10-2009

### Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. FCC permits the use of the 1.5 meter table for frequency above 1GHz as an alternative in C63.10-2013 through inquiry tracking number 961829.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

## 2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		

## 2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test shown in the following tables.

802.11g					
Data Rate (MHz)	6M bps	9M bps	12M bps	18M bps	24M bps
Peak Power (dBm)	11.46	11.26	11.13	11.04	11.02


## 2.3 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates from the power table described in section 2.2.

### Single Antenna

Modulation	Data Rate
802.11g	6 Mbps

## 2.4 Connection Diagram of Test System

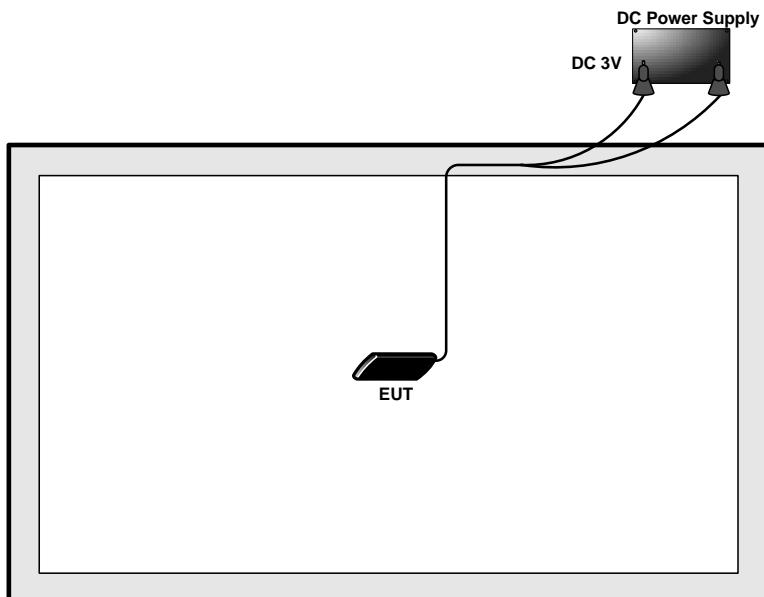

## 2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	Topward	3303D	N/A	N/A	Unshielded, 1.8 m

## 2.6 EUT Operation Test Setup

For WLAN function, programmed RF utility, “Tera Term” installed in the notebook make the EUT provide functions like channel selection and power level for continuous transmitting and receiving signals.

## 2.7 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

$Offset = RF\ cable\ loss + attenuator\ factor.$

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$Offset(dB) = RF\ cable\ loss(dB) + attenuator\ factor(dB).$

$= 4.2 + 10 = 14.2\ (dB)$

### 3 Test Result

#### 3.1 6dB Bandwidth Measurement

##### 3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures


1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v03r02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. Measure and record the results in the test report.

##### 3.1.4 Test Setup

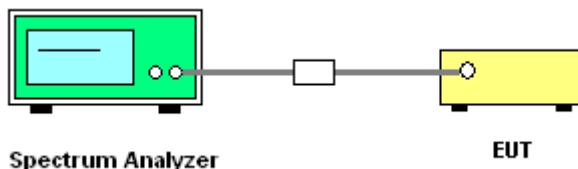

### 3.1.5 Test Result of 6dB Occupied Bandwidth

Please refer to Appendix A of this test report.

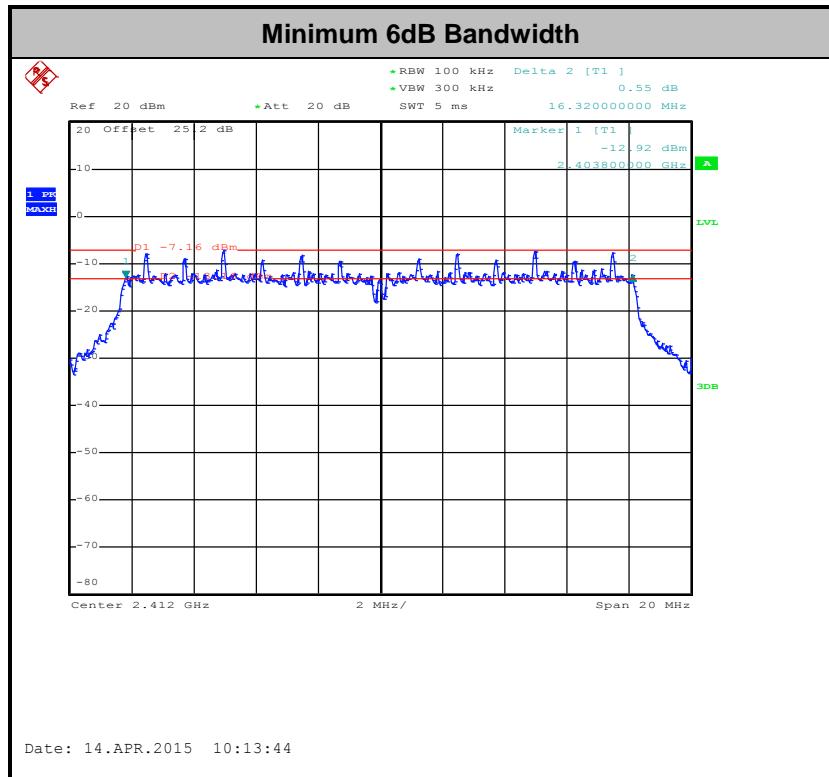

## 3.2 Peak Output Power Measurement

### 3.2.1 Limit of Peak Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r02 section 9.1.2 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

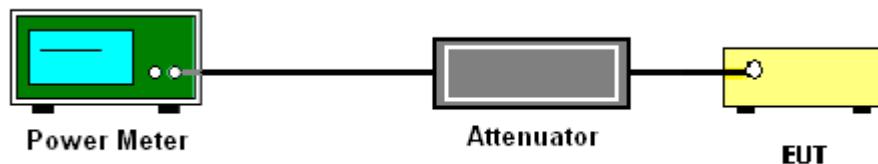

### 3.2.5 Test Result of Peak Output Power

Please refer to Appendix A of this test report.

### 3.2.6 Test Result of Average output Power (Reporting Only)

Please refer to Appendix A of this test report.

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures


1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

#### 3.3.4 Test Setup

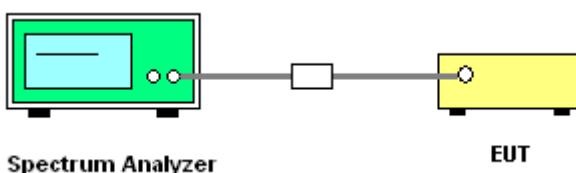

### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A of this test report.

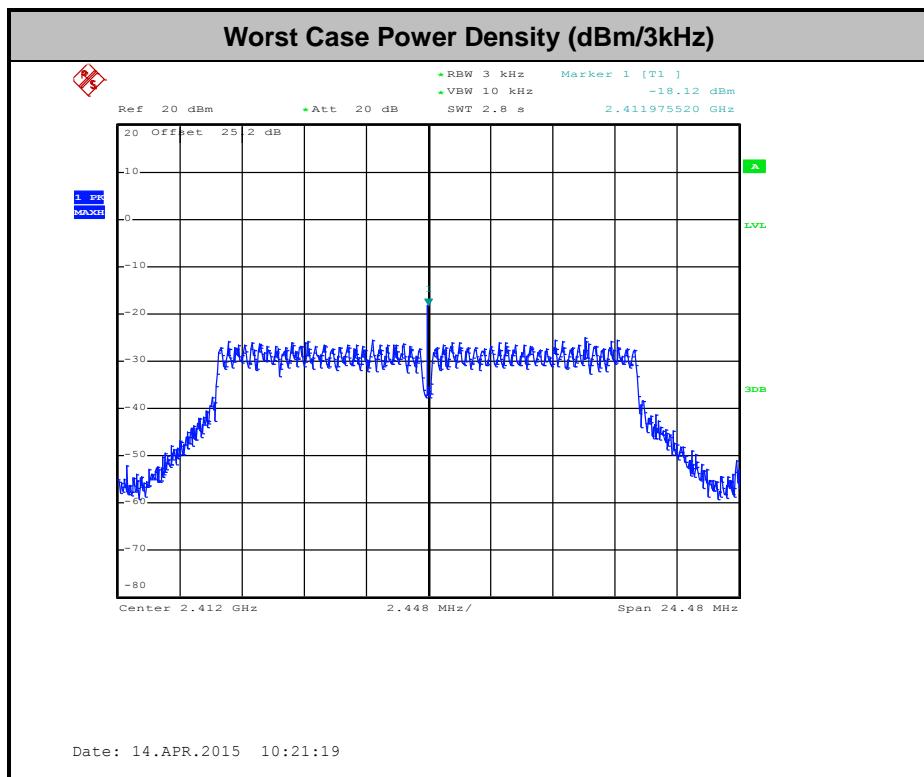

## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.4.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


### 3.4.4 Test Setup

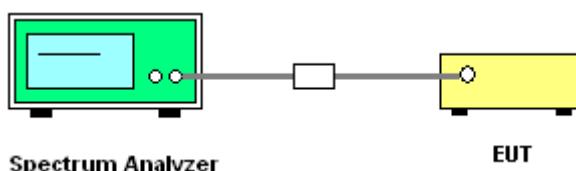

### 3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Number of TX = 1, Ant. 1 (Measured)


Number of TX	1	Ant. :	1
Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~54%
Test Channel :	01	Test Engineer :	Tommy Lee

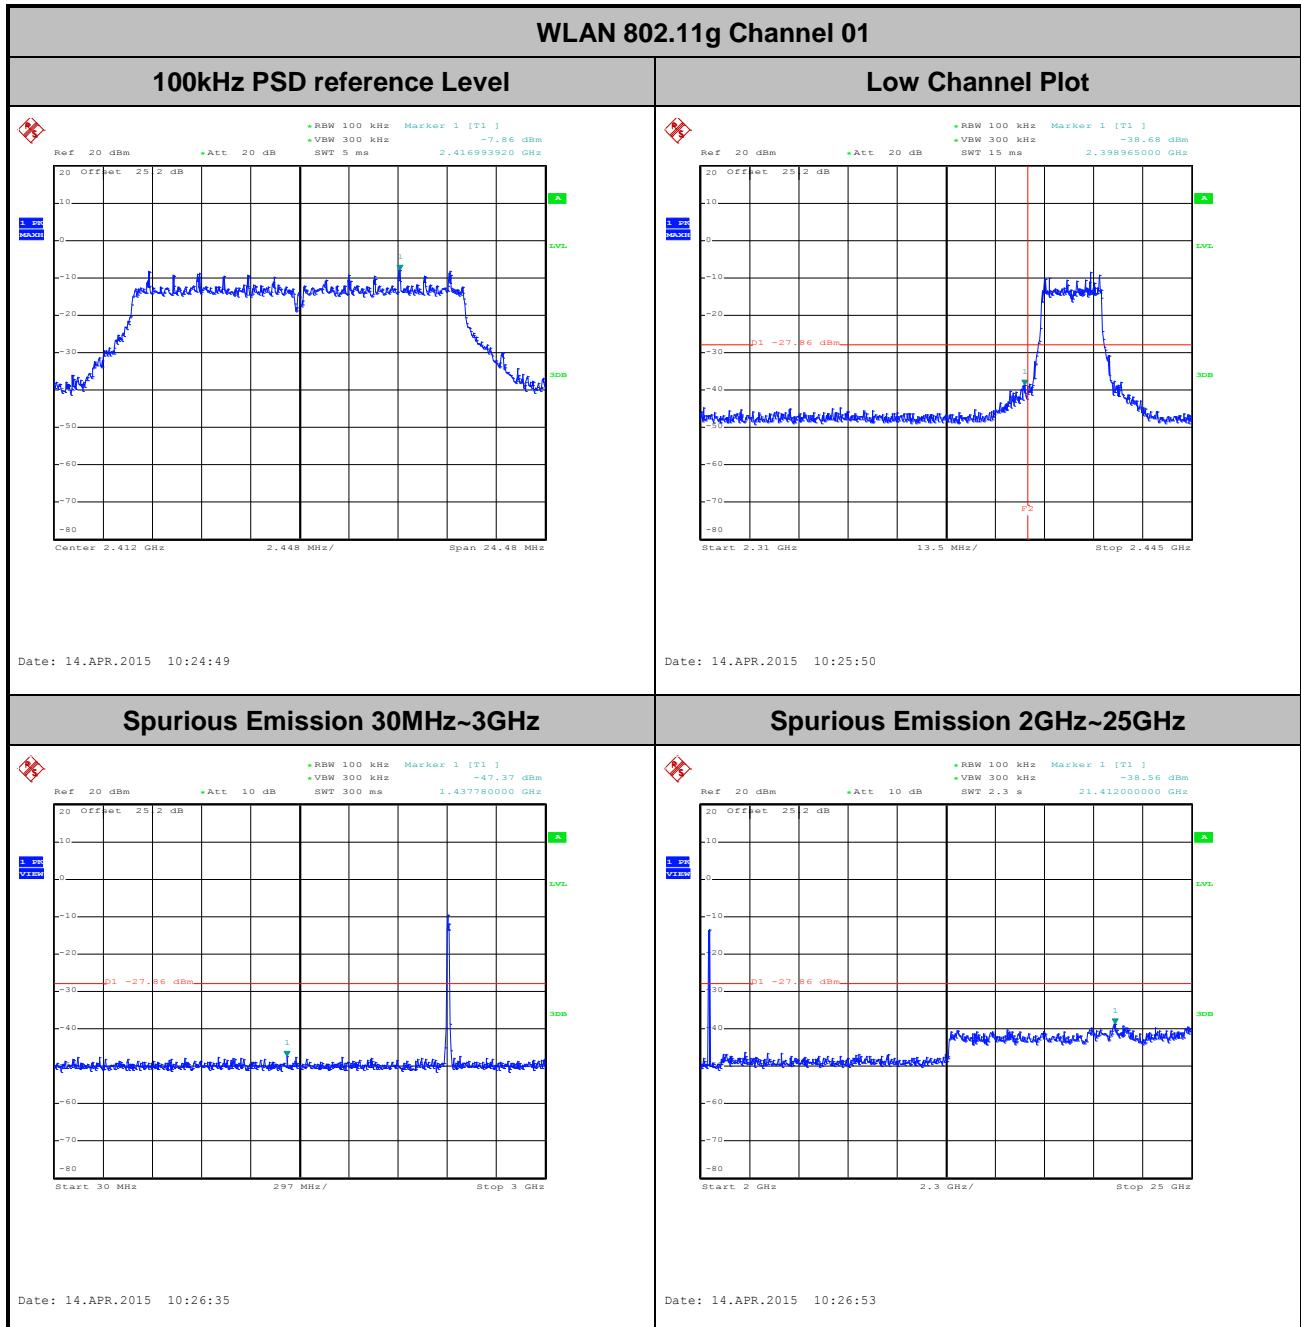

<b>Number of TX :</b>	1	<b>Ant. :</b>	1
<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	21~25°C
<b>Test Band :</b>	2.4GHz Mid.	<b>Relative Humidity :</b>	51~54%
<b>Test Channel :</b>	06	<b>Test Engineer :</b>	Tommy Lee


### WLAN 802.11g Channel 06

#### 100kHz PSD reference Level

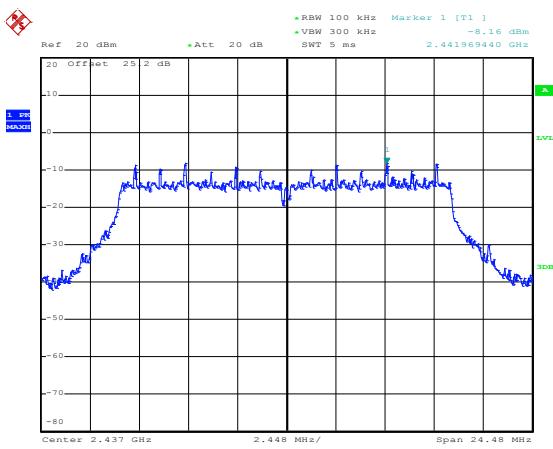


Date: 14.APR.2015 10:32:46

#### Spurious Emission 30MHz~3GHz

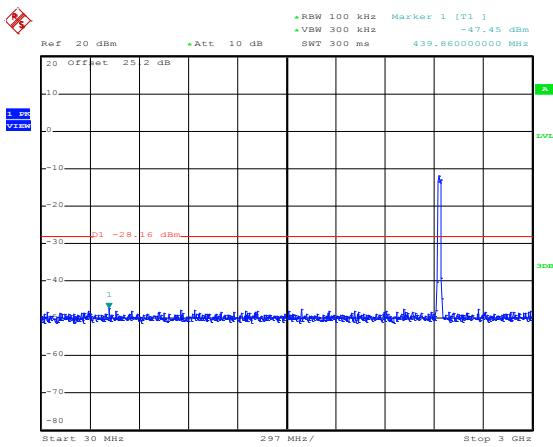

Date: 14.APR.2015 10:34:06

#### Spurious Emission 2GHz~25GHz

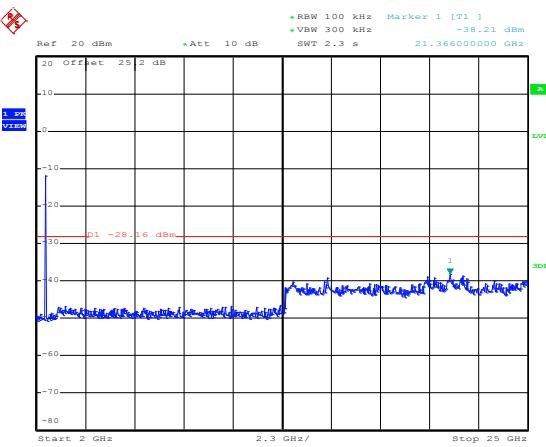

Date: 14.APR.2015 10:34:24


Report No. : FR4D3036-01A

Report Version : Rev. 02

Page Number : 17 of 26

Report Template No.: BU5-FR15CWL MA Version 1.0

<b>Number of TX :</b>	1	<b>Ant. :</b>	1
<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	21~25°C
<b>Test Band :</b>	2.4GHz High	<b>Relative Humidity :</b>	51~54%
<b>Test Channel :</b>	11	<b>Test Engineer :</b>	Tommy Lee

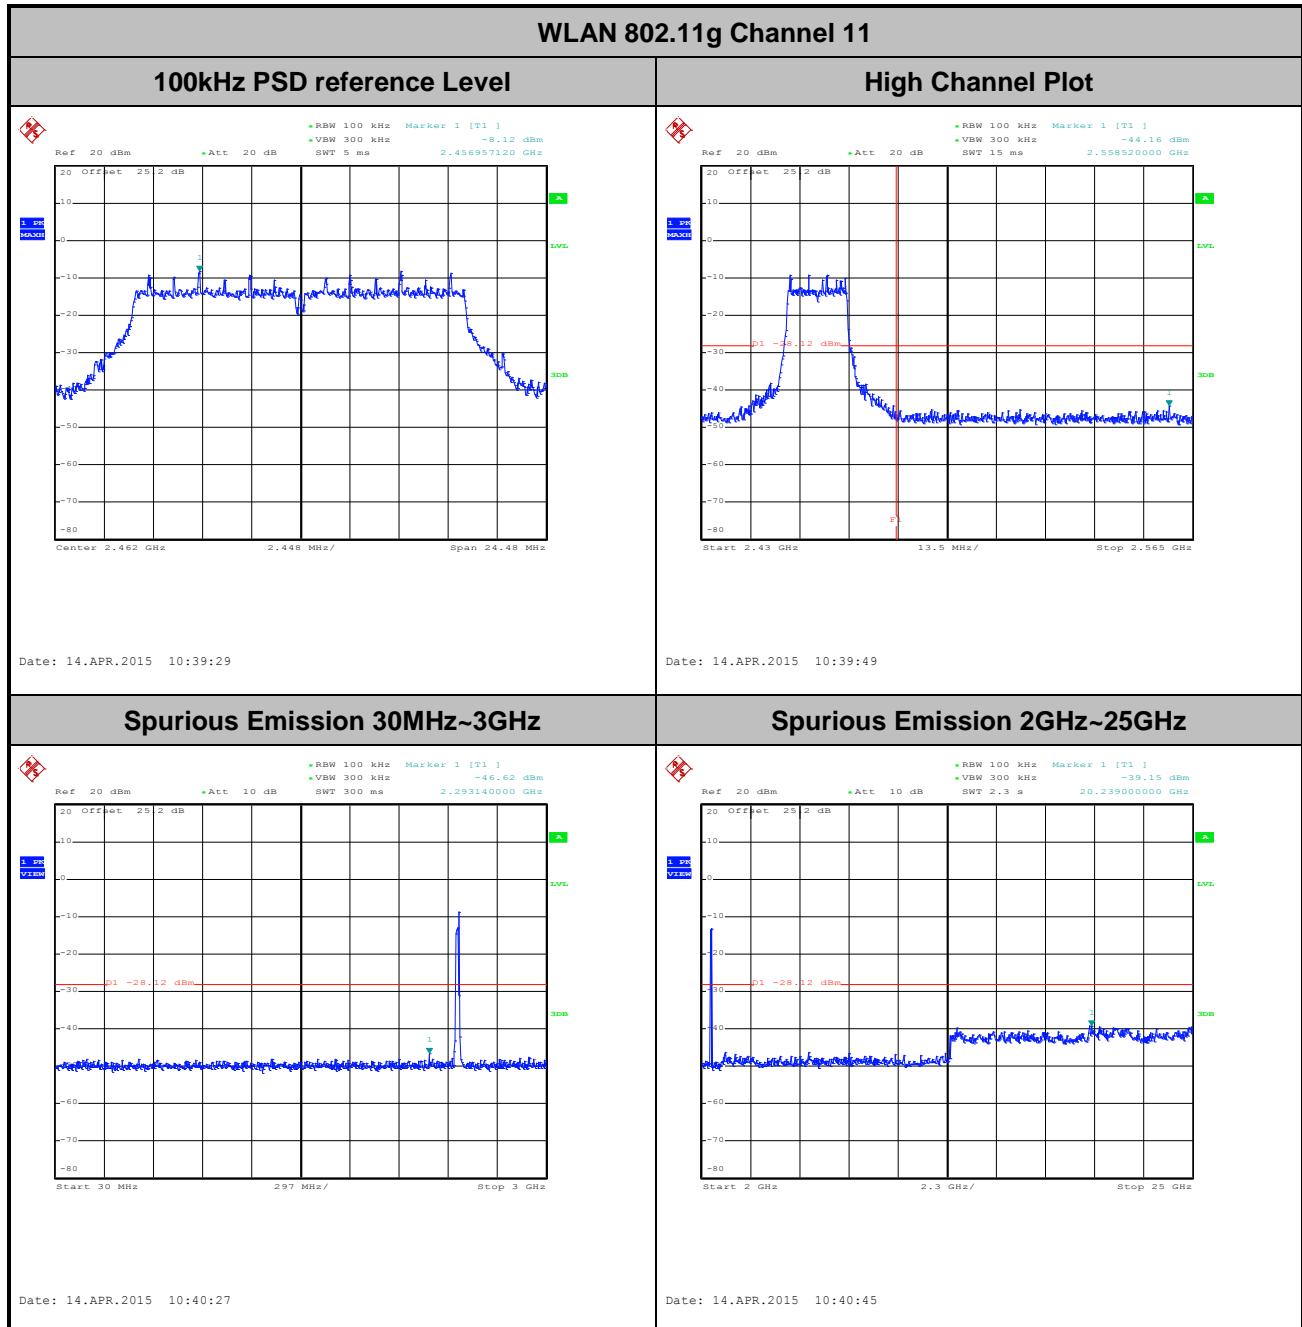

## 3.5 Radiated Band Edges and Spurious Emission Measurement

### 3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.5.3 Test Procedure

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.


For average measurement:

- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW  $\geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
1	802.11g	48.95	1400	0.71	1kHz

### 3.5.4 Test Setup


For radiated emissions below 30MHz

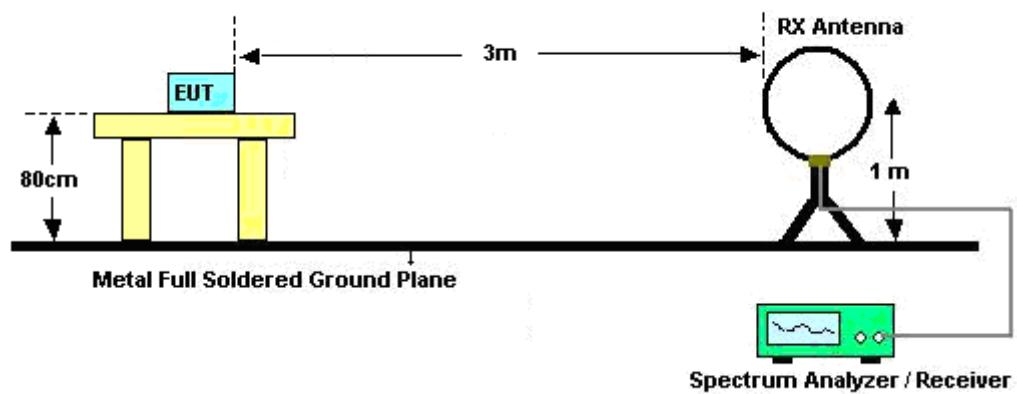

For radiated emissions from 30MHz to 1GHz

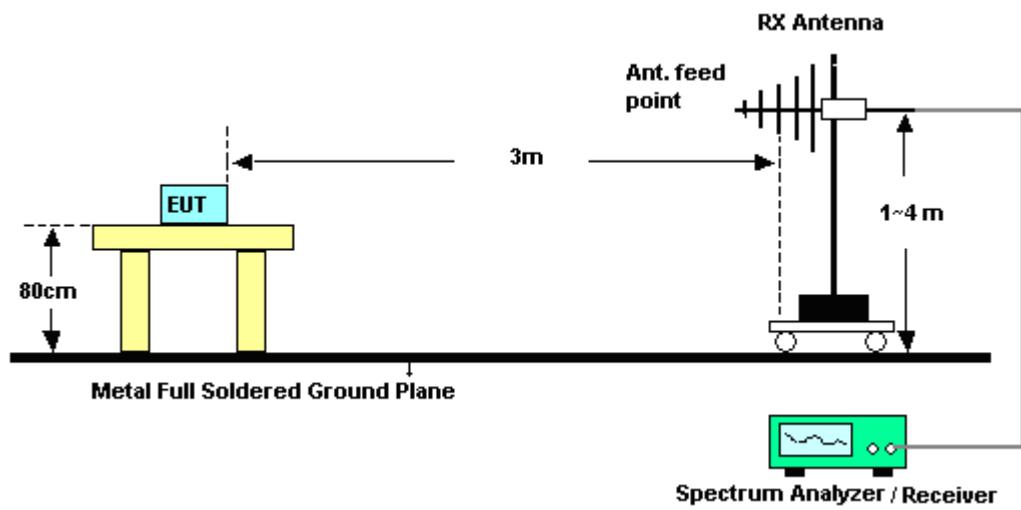

For radiated emissions above 1GHz

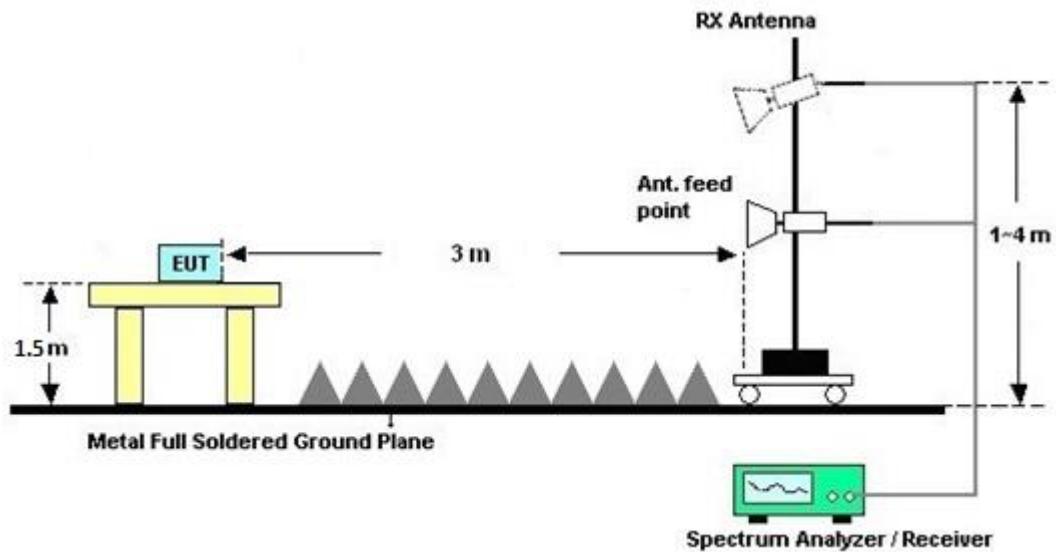


### 3.5.5 Test Results of Radiated Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

### 3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B of this test report.

### 3.5.7 Duty Cycle

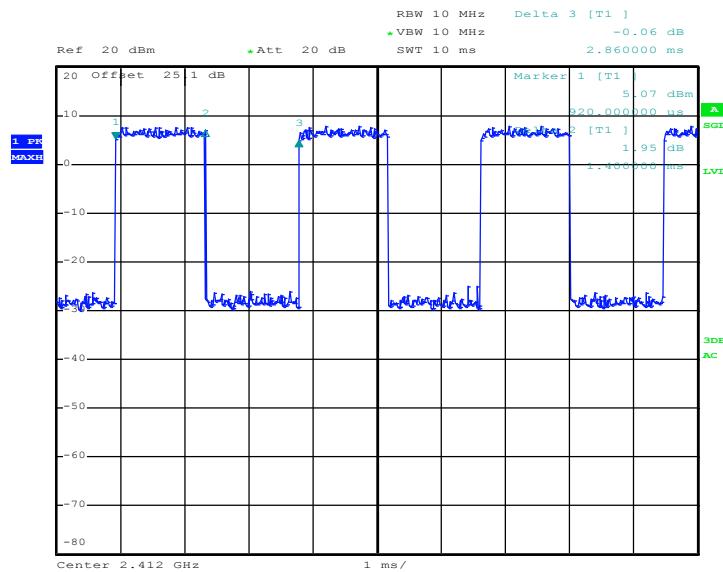

Date: 30.APR.2015 14:42:05

### 3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)

Please refer to Appendix B of this test report.

## **3.6 Antenna Requirements**

### **3.6.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### **3.6.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.6.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 09, 2014	Apr. 08, 2015~May 19, 2015	Jun. 08, 2015	Conducted (TH02-HY)
Power Meter	Anritsu	ML2495A	1036004	300MHz~40GHz	Aug. 09, 2014	Apr. 08, 2015~May 19, 2015	Aug. 08, 2015	Conducted (TH02-HY)
Power Sensor	Anritsu	MA2411B	1027253	300MHz~40GHz	Aug. 09, 2014	Apr. 08, 2015~May 19, 2015	Aug. 08, 2015	Conducted (TH02-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9 kHz~7 GHz	Aug. 30, 2014	Apr. 16, 2015~Apr. 17, 2015	Aug. 29, 2015	Radiation (03CH07-HY)
Signal Analyzer	Rohde & Schwarz	FSV 30	100895	9kHz~30GHz	Mar. 24, 2015	Apr. 16, 2015~Apr. 17, 2015	Mar. 23, 2016	Radiation (03CH07-HY)
Loop Antenna	R&S	HFH2-Z2	100315	9 kHz~30 MHz	Jul. 28, 2014	Apr. 16, 2015~Apr. 17, 2015	Jul. 27, 2015	Radiation (03CH07-HY)
Bilog Antenna	Schaffner	CBL6111C	2726	30MHz ~ 1GHz	Sep. 27, 2014	Apr. 16, 2015~Apr. 17, 2015	Sep. 26, 2015	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	75962	1GHz~18GHz	Aug. 19, 2014	Apr. 16, 2015~Apr. 17, 2015	Aug. 18, 2015	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170 251	18GHz~40GHz	Oct. 02, 2014	Apr. 16, 2015~Apr. 17, 2015	Oct. 01, 2015	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10 MHz ~ 1000MHz	Mar. 12, 2015	Apr. 16, 2015~Apr. 17, 2015	Mar. 11, 2016	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A023 62	1 GHz~26.5 GHz	Oct. 21, 2014	Apr. 16, 2015~Apr. 17, 2015	Oct. 20, 2015	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590074	DC~18 GHz	Jul. 07, 2014	Apr. 16, 2015~Apr. 17, 2015	Jul. 06, 2015	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590075	DC~18 GHz	Apr. 21, 2014	Apr. 16, 2015~Apr. 17, 2015	Apr. 20, 2015	Radiation (03CH07-HY)
Turn Table	ChainTek	ChainTek 3000	N/A	0 ~ 360 degree	N/A	Apr. 16, 2015~Apr. 17, 2015	N/A	Radiation (03CH07-HY)
Antenna Mast	ChainTek	ChainTek 3000	N/A	N/A	N/A	Apr. 16, 2015~Apr. 17, 2015	N/A	Radiation (03CH07-HY)

## 5 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.50
---	------

## Appendix A. Conducted Test Results

Test Engineer:	Tommy Lee	Temperature:	21~25	°C
Test Date:	2015/04/08~ 2015/5/19	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

2.4GHz Band								
Mod.	Data Rate	N <sub>tx</sub>	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
11g	6Mbps	1	1	2412	18.30	16.32	0.50	Pass
11g	6Mbps	1	6	2437	18.35	16.32	0.50	Pass
11g	6Mbps	1	11	2462	18.30	16.32	0.50	Pass

**TEST RESULTS DATA**  
**Peak Power Table**

2.4GHz Band										
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
11g	6Mbps	1	1	2412	11.42	30.00	1.70	13.12	36.00	Pass
11g	6Mbps	1	6	2437	11.46	30.00	1.70	13.16	36.00	Pass
11g	6Mbps	1	11	2462	11.24	30.00	1.70	12.94	36.00	Pass

**TEST RESULTS DATA**  
**Average Power Table**  
***(Reporting Only)***

2.4GHz Band						
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
11g	6Mbps	1	1	2412	3.10	4.59
11g	6Mbps	1	6	2437	3.10	4.66
11g	6Mbps	1	11	2462	3.10	4.46

**TEST RESULTS DATA**  
**Peak Power Density**

2.4GHz Band								
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
11g	6Mbps	1	1	2412	-18.12	1.70	8.00	Pass
11g	6Mbps	1	6	2437	-18.93	1.70	8.00	Pass
11g	6Mbps	1	11	2462	-26.13	1.70	8.00	Pass

## Appendix B. Radiated Spurious Emission

<b>Test Engineer :</b>	Nick Yu, Ken Wu, and James Chiu	<b>Temperature :</b>		21~23°C	
		<b>Relative Humidity :</b>		47~49%	

15C 2.4GHz 2400~2483.5MHz

WIFI 802.11g (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dB $\mu$ V/m )	( dB )	( dB $\mu$ V/m )	( dB $\mu$ V )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11g CH 01 2412MHz		2389.29	62.67	-11.33	74	57.01	32.18	7.75	34.27	145	350	P	H
		2389.65	48.19	-5.81	54	42.53	32.18	7.75	34.27	145	350	A	H
	*	2412	97.22	-	-	91.57	32.2	7.75	34.3	145	350	P	H
	*	2412	86.33	-	-	80.68	32.2	7.75	34.3	145	350	A	H
													H
													H
		2389.83	61.78	-12.22	74	56.15	32.18	7.75	34.3	212	94	P	V
		2390	47.52	-6.48	54	41.89	32.18	7.75	34.3	212	94	A	V
	*	2412	97.29	-	-	91.64	32.2	7.75	34.3	212	94	P	V
	*	2412	86.27	-	-	80.62	32.2	7.75	34.3	212	94	A	V
802.11g CH 06 2437MHz													V
		2368.95	58.55	-15.45	74	52.98	32.16	7.68	34.27	102	6	P	H
		2364.99	45.02	-8.98	54	39.48	32.13	7.68	34.27	102	6	A	H
	*	2437	96.23	-	-	90.51	32.24	7.83	34.35	102	6	P	H
	*	2437	85.44	-	-	79.72	32.24	7.83	34.35	102	6	A	H
		2487.88	58.7	-15.3	74	52.92	32.3	7.91	34.43	102	6	P	H
		2485	45.12	-8.88	54	39.36	32.28	7.91	34.43	102	6	A	H
		2358.96	58.06	-15.94	74	52.5	32.13	7.68	34.25	105	74	P	V
		2355.36	45.02	-8.98	54	39.46	32.13	7.68	34.25	105	74	A	V
	*	2437	96.11	-	-	90.39	32.24	7.83	34.35	105	74	P	V
	*	2437	85.39	-	-	79.67	32.24	7.83	34.35	105	74	A	V
		2487.56	58.67	-15.33	74	52.89	32.3	7.91	34.43	105	74	P	V
		2486.36	45.14	-8.86	54	39.38	32.28	7.91	34.43	105	74	A	V

<b>802.11g CH 11 2462MHz</b>	*	2462	96.19	-	-	90.41	32.26	7.91	34.39	123	9	P	H	
	*	2462	85.62	-	-	79.84	32.26	7.91	34.39	123	9	A	H	
		2483.68	59.11	-14.89	74	53.35	32.28	7.91	34.43	123	9	P	H	
		2483.76	46.09	-7.91	54	40.33	32.28	7.91	34.43	123	9	A	H	
													H	
													H	
	*	2462	94.8	-	-	89.02	32.26	7.91	34.39	101	74	P	V	
	*	2462	84.6	-	-	78.82	32.26	7.91	34.39	101	74	A	V	
		2493.24	59.57	-14.43	74	53.84	32.3	7.91	34.48	101	74	P	V	
		2483.6	46.56	-7.44	54	40.8	32.28	7.91	34.43	101	74	A	V	
													V	
													V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													

**15C 2.4GHz 2400~2483.5MHz**

**WIFI 802.11g (Harmonic @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dB $\mu$ V/m )	( dB )	( dB $\mu$ V/m )	( dB $\mu$ V )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11g CH 01 2412MHz		4824	44.28	-29.72	74	57.79	34.26	11.16	58.93	100	0	P	H
													H
													H
													H
		4824	43.59	-30.41	74	57.1	34.26	11.16	58.93	100	0	P	V
													V
													V
													V
802.11g CH 06 2437MHz		4872	44.38	-29.62	74	57.7	34.3	11.21	58.83	100	0	P	H
		7311	44.98	-29.02	74	52.03	35.6	15.08	57.73	100	0	P	H
													H
		4874	43.38	-30.62	74	56.7	34.3	11.21	58.83	100	0	P	V
		7311	43.37	-30.63	74	50.42	35.6	15.08	57.73	100	0	P	V
													V
													V
802.11g CH 11 2462MHz		4926	41.54	-32.46	74	54.66	34.34	11.27	58.73	100	0	P	H
		7386	43.82	-30.18	74	50.88	35.6	15.14	57.8	100	0	P	H
													H
													H
		4924	42.59	-31.41	74	55.71	34.34	11.27	58.73	100	0	P	V
		7386	43.22	-30.78	74	50.28	35.6	15.14	57.8	100	0	P	V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**15C Emission below 1GHz**

**2.4GHz WIFI 802.11g (LF)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dB $\mu$ V/m )	( dB )	( dB $\mu$ V/m )	(dB $\mu$ V)	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
<b>2.4GHz</b>													
<b>802.11g</b>													
<b>LF</b>													
		48.9	17.65	-22.35	40	37.98	9.1	1.77	31.2	-	-	P	H
		60.78	20.59	-19.41	40	43.81	6	2.06	31.28	100	93	P	H
		110.46	20.9	-22.6	43.5	38.86	10.85	2.38	31.19	-	-	P	H
		549.9	22.69	-23.31	46	29.68	19.8	4.01	30.8	-	-	P	H
		561.8	23.07	-22.93	46	29.86	19.95	4.01	30.75	-	-	P	H
		979	28.81	-25.19	54	29.18	24.98	4.94	30.29	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
		71.04	34.69	-5.31	40	57.43	6.48	2.06	31.28	173	52	P	V
		112.89	26.89	-16.61	43.5	44.72	10.96	2.38	31.17	-	-	P	V
		184.44	26.92	-16.58	43.5	46.41	8.82	2.69	31	-	-	P	V
		496	23.75	-22.25	46	32.67	17.95	3.77	30.64	-	-	P	V
		556.2	23.14	-22.86	46	29.98	19.92	4.01	30.77	-	-	P	V
		907.6	27.86	-18.14	46	29.94	23.44	4.8	30.32	-	-	P	V
													V
													V
													V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against limit line.												

**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency per 15.209(c).
!	Test result is <b>over limit</b> line.
P/A	<b>Peak or Average</b>
H/V	<b>Horizontal or Vertical</b>

A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		( MHz )	( dB $\mu$ V/m )	( dB )	( dB $\mu$ V/m )	( dB $\mu$ V )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11b CH 01 2412MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dB $\mu$ V/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dB $\mu$ V) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dB $\mu$ V/m) – Limit Line(dB $\mu$ V/m)

**For Peak Limit @ 2390MHz:**

1. Level(dB $\mu$ V/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dB $\mu$ V) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dB $\mu$ V) – 35.86 (dB)

= 55.45 (dB $\mu$ V/m)

2. Over Limit(dB)

= Level(dB $\mu$ V/m) – Limit Line(dB $\mu$ V/m)

= 55.45(dB $\mu$ V/m) – 74(dB $\mu$ V/m)

= -18.55(dB)

**For Average Limit @ 2390MHz:**

1. Level(dB $\mu$ V/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dB $\mu$ V) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dB $\mu$ V) – 35.86 (dB)

= 43.54 (dB $\mu$ V/m)

2. Over Limit(dB)

= Level(dB $\mu$ V/m) – Limit Line(dB $\mu$ V/m)

= 43.54(dB $\mu$ V/m) – 54(dB $\mu$ V/m)

= -10.46(dB)

**Both peak and average measured complies with the limit line, so test result is “PASS”.**