

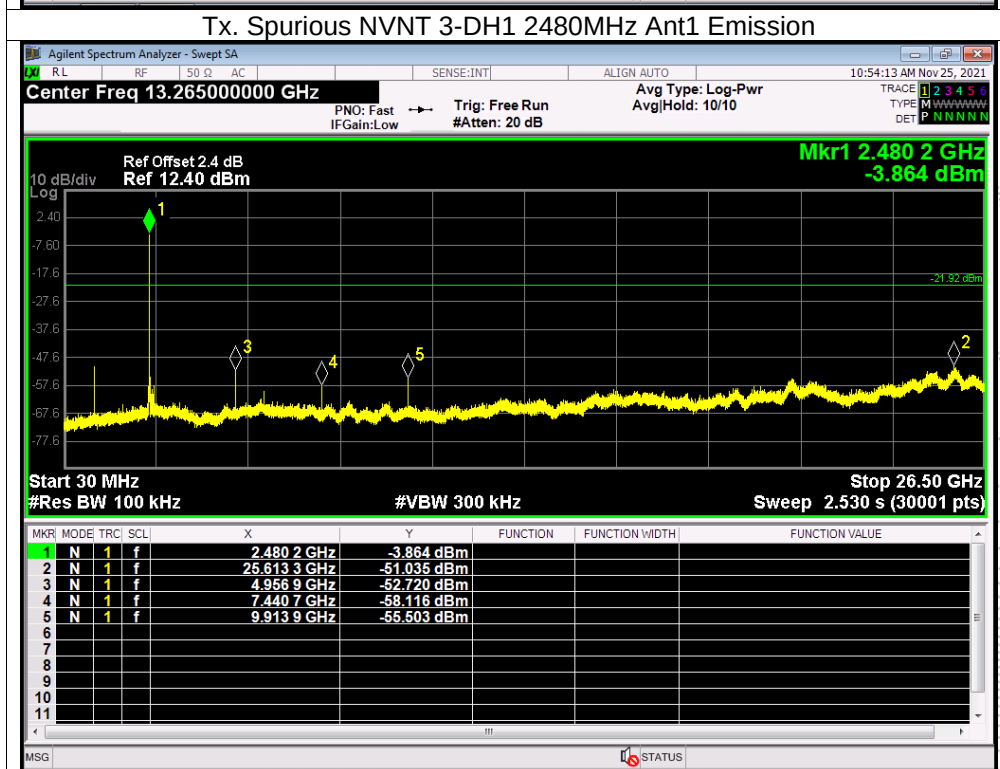


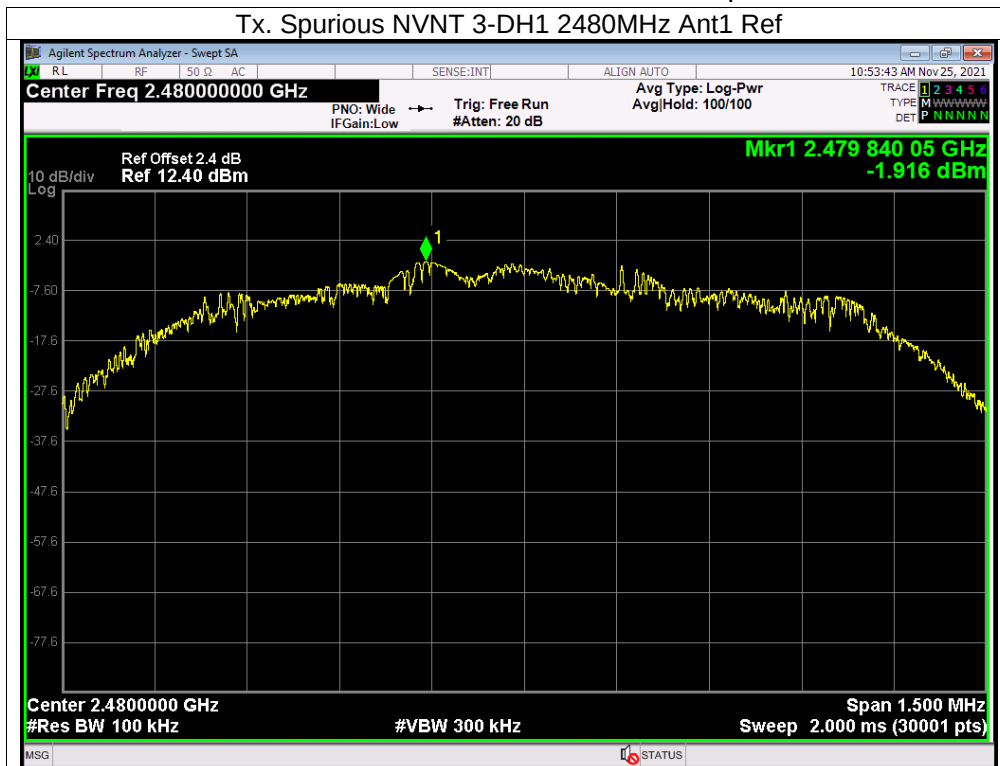


Band Edge



Test Graphs



Band Edge NVNT 1-DH1 2402MHz Ant1 No-Hopping Ref


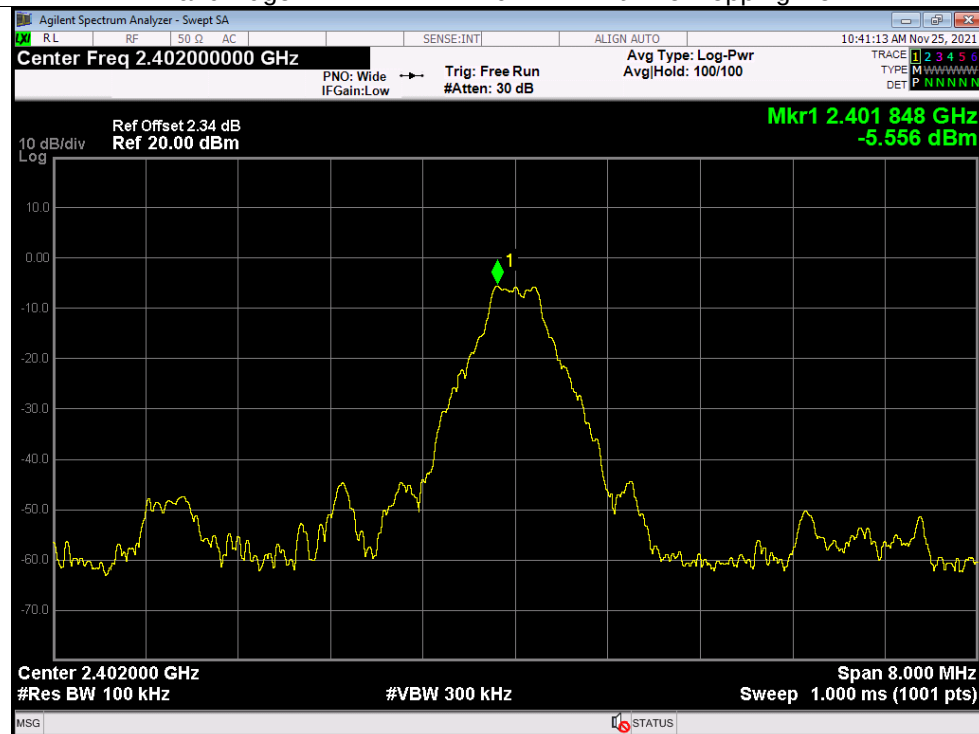




Band Edge NVNT 1-DH1 2402MHz Ant1 No-Hopping Emission


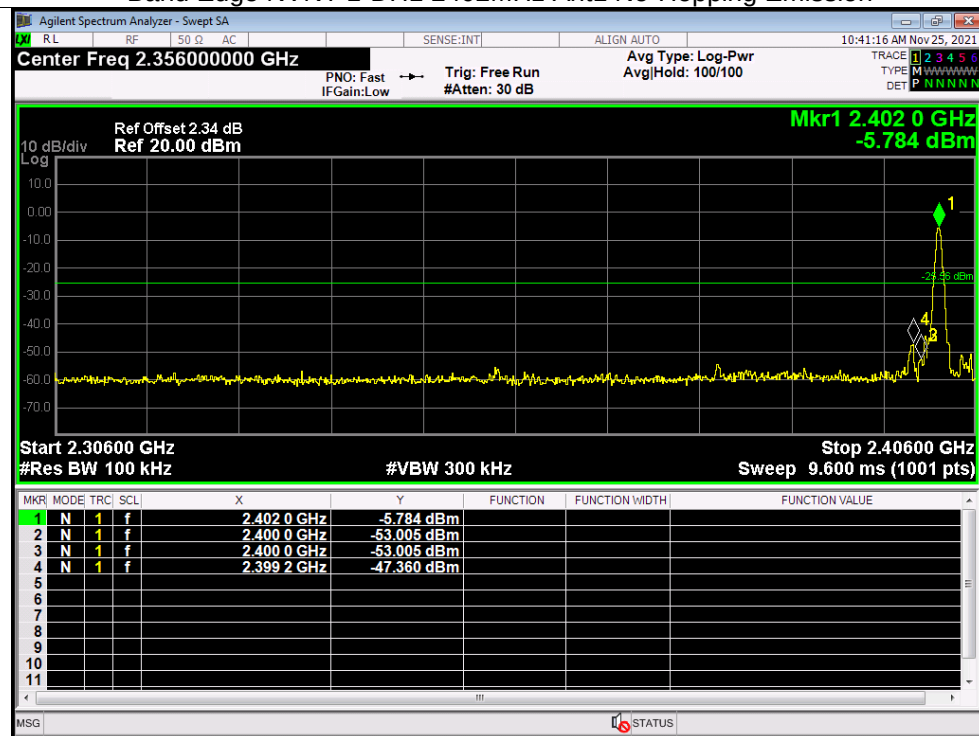


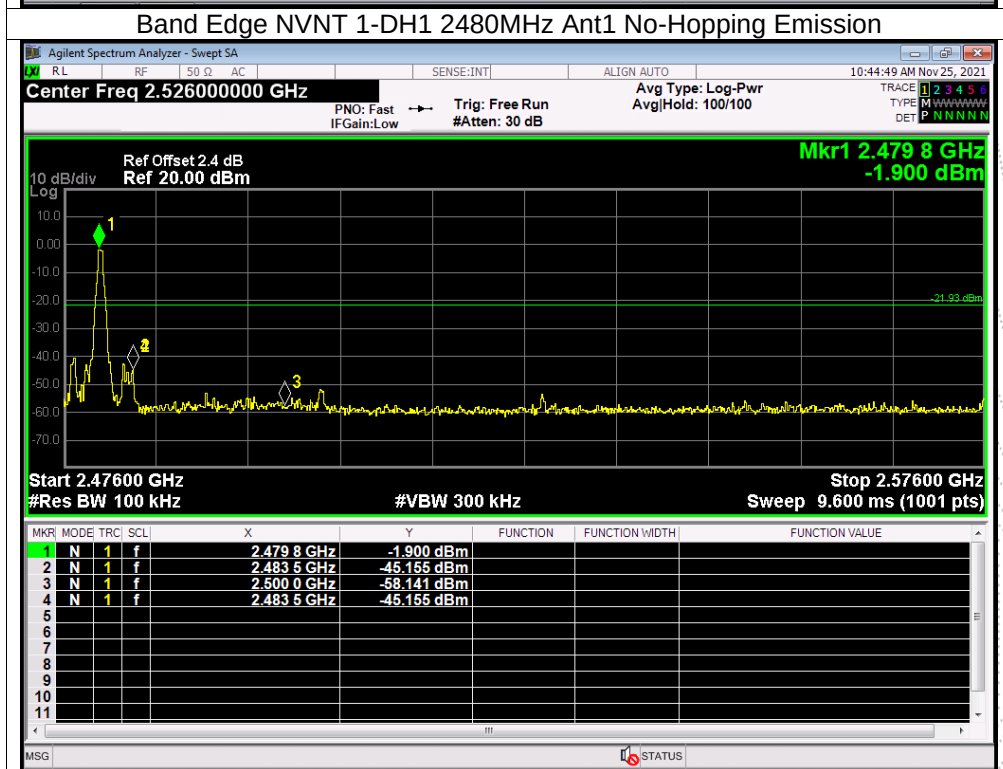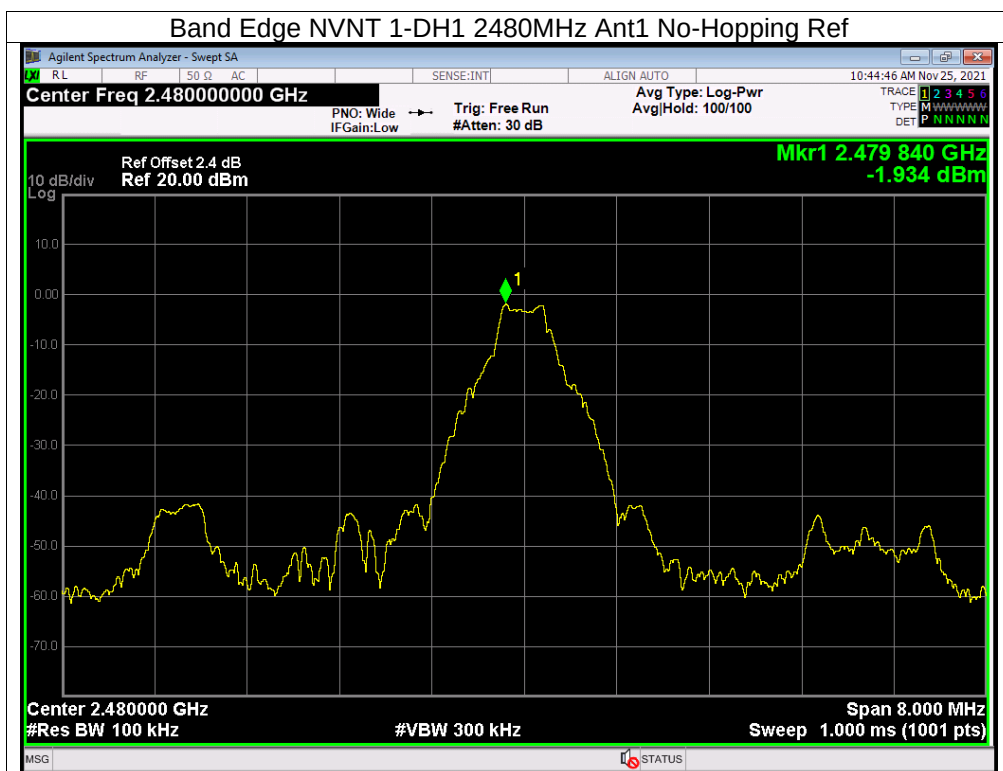

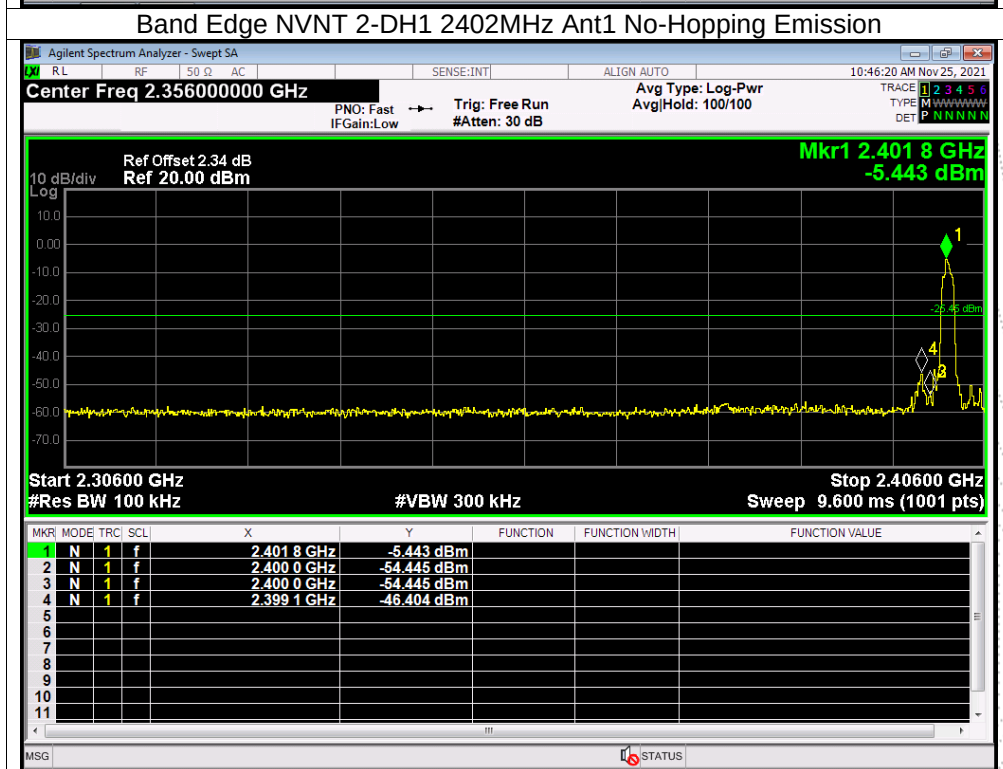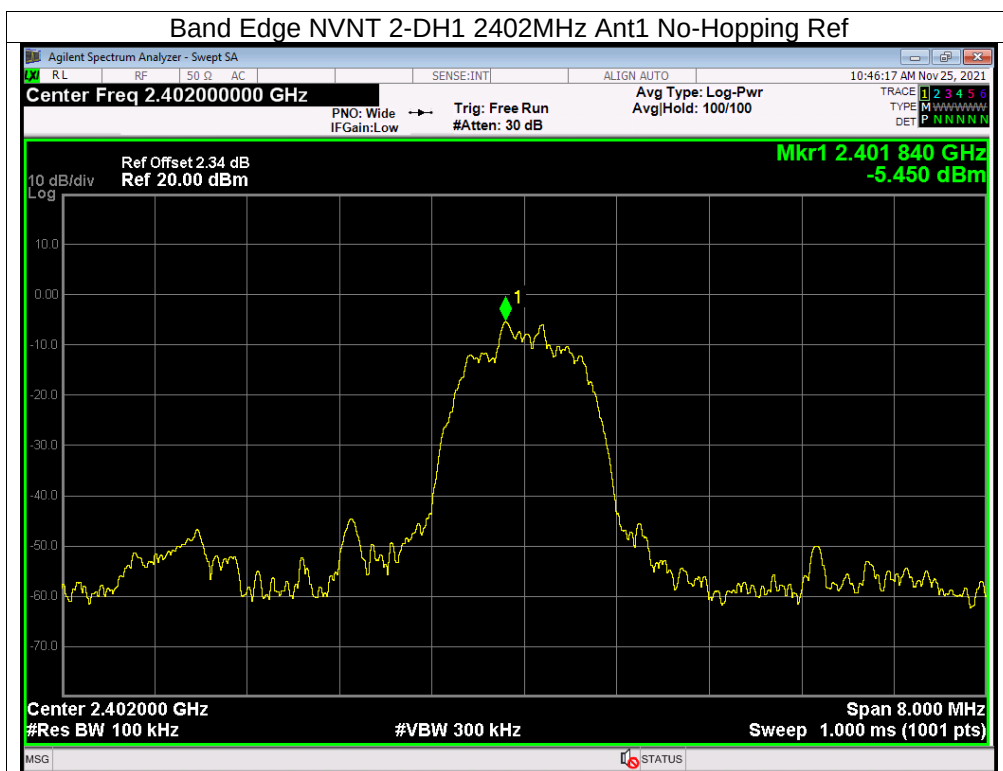

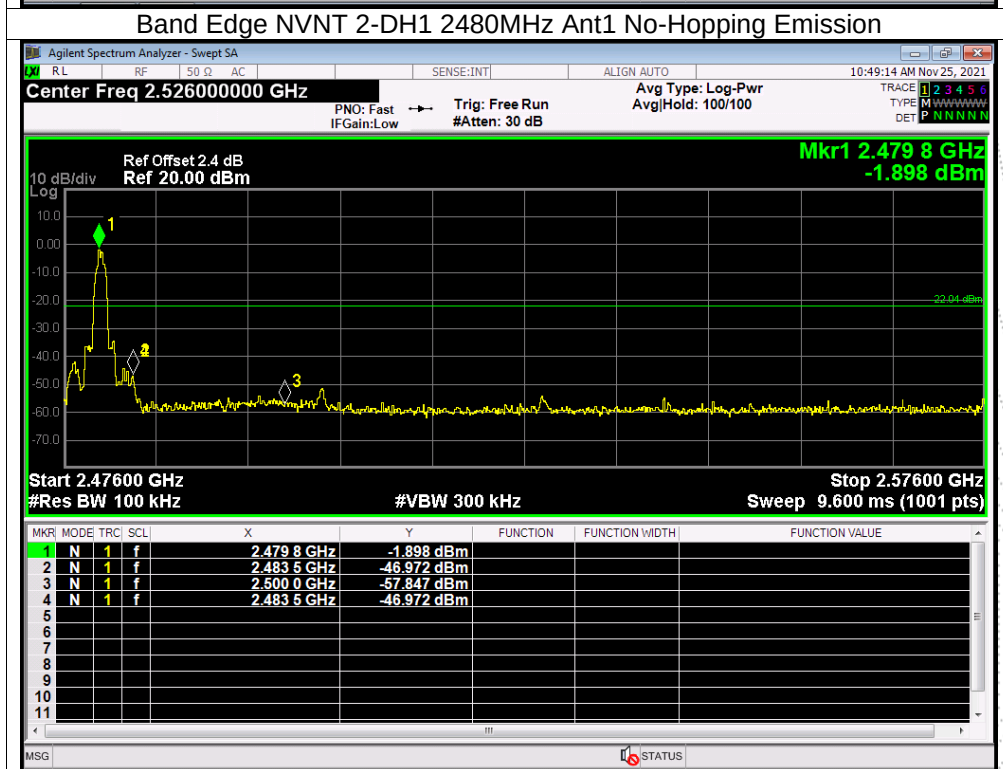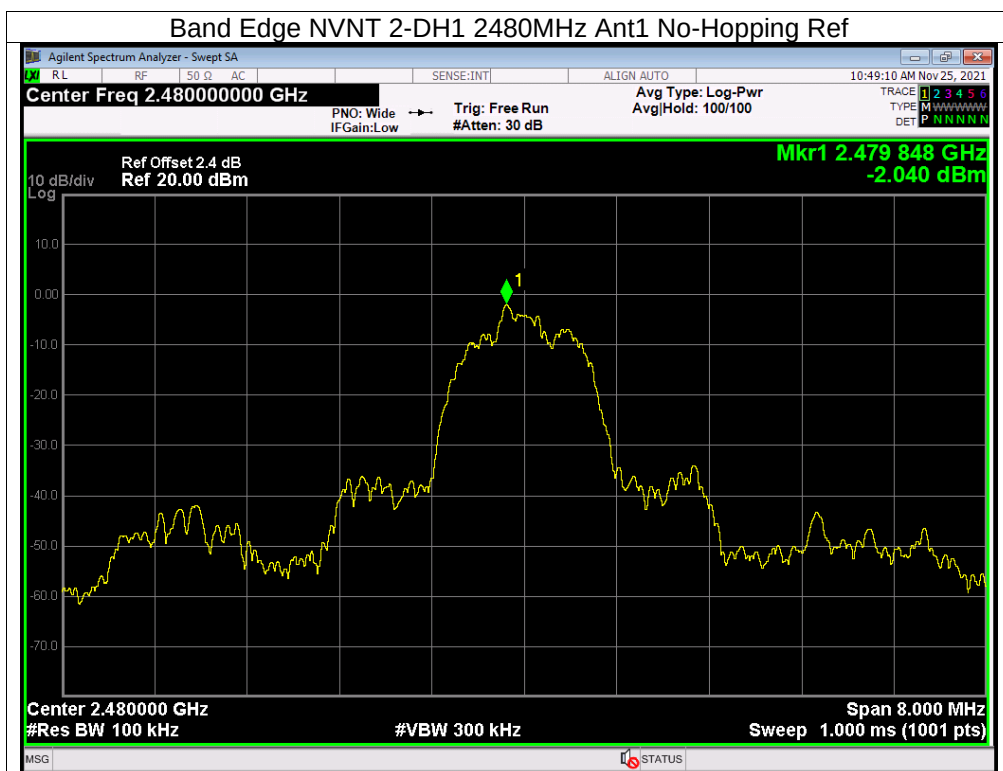

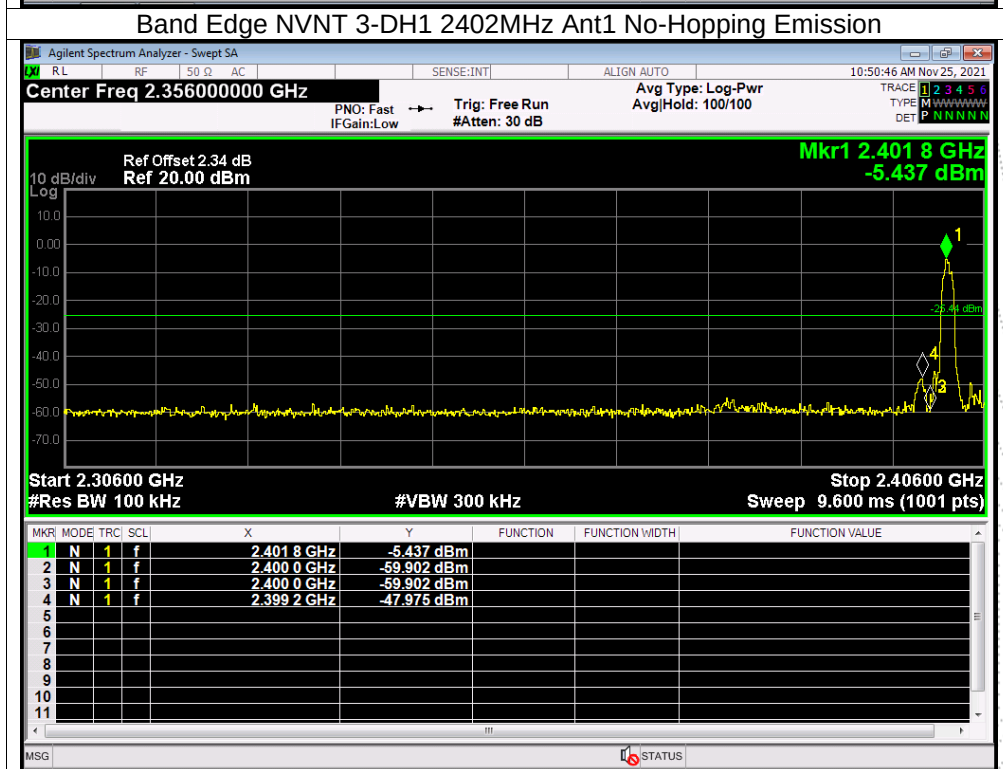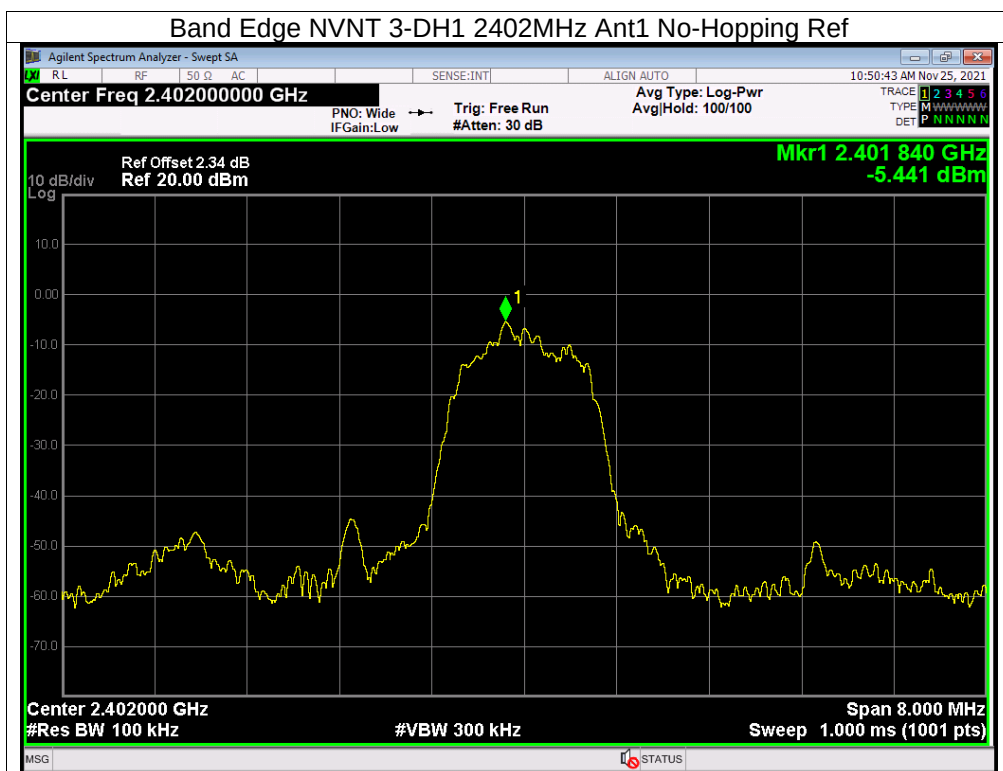

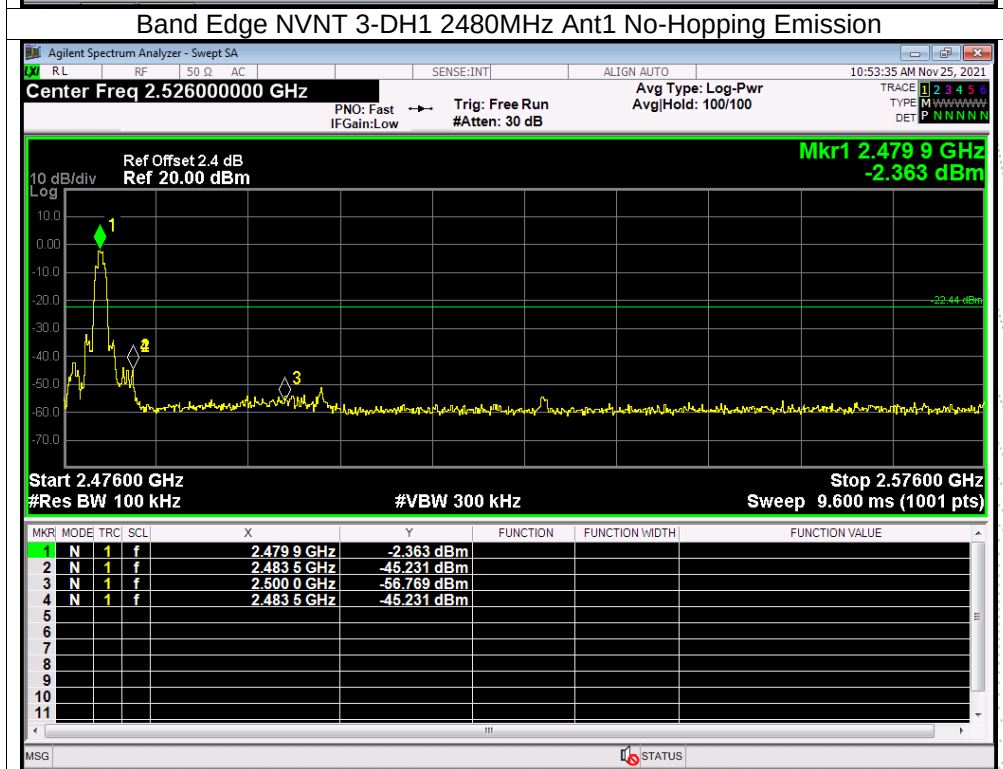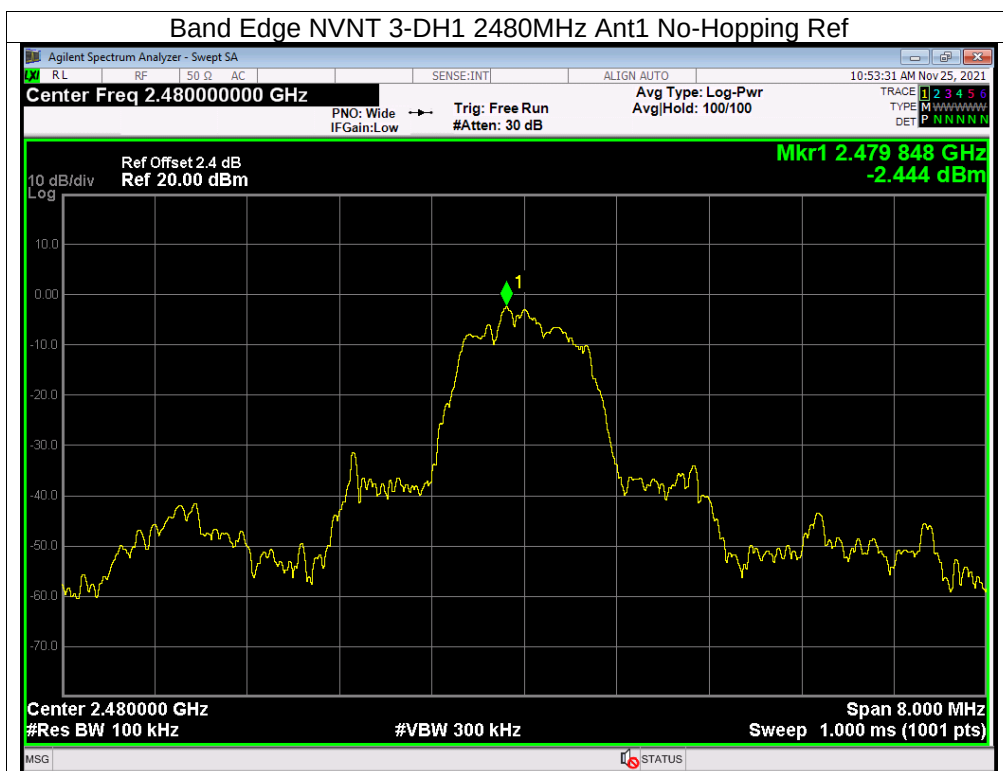


Band Edge(Hopping)


Test Graphs

Band Edge(Hopping) NVNT 1-DH1 2402MHz Ant1 Hopping Ref



Band Edge(Hopping) NVNT 1-DH1 2402MHz Ant1 Hopping Emission

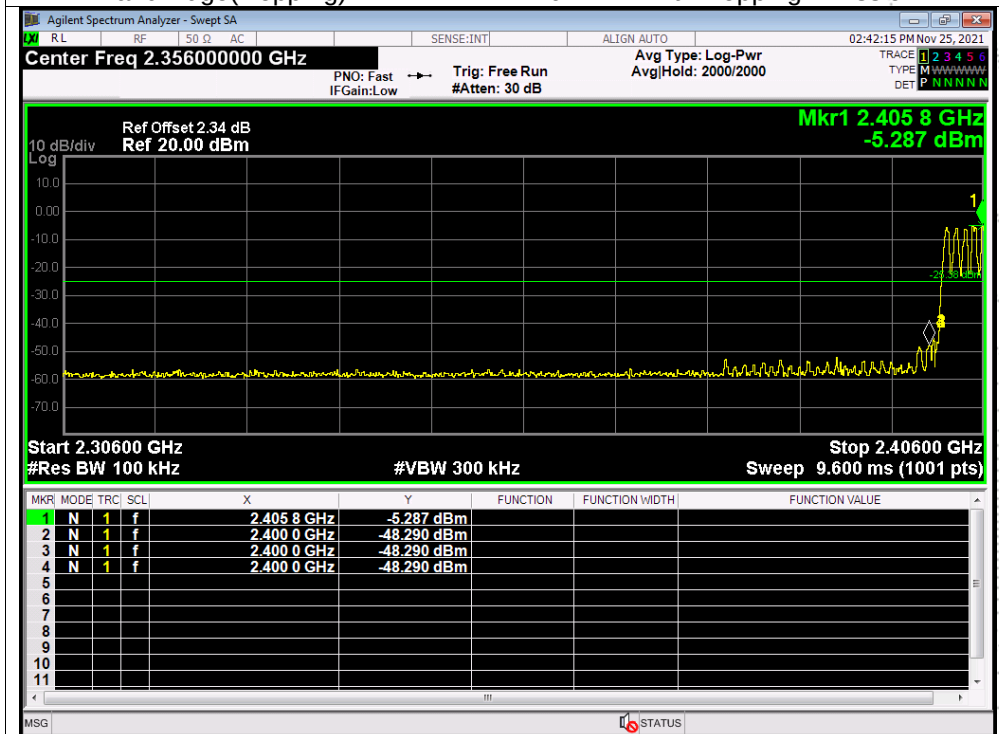

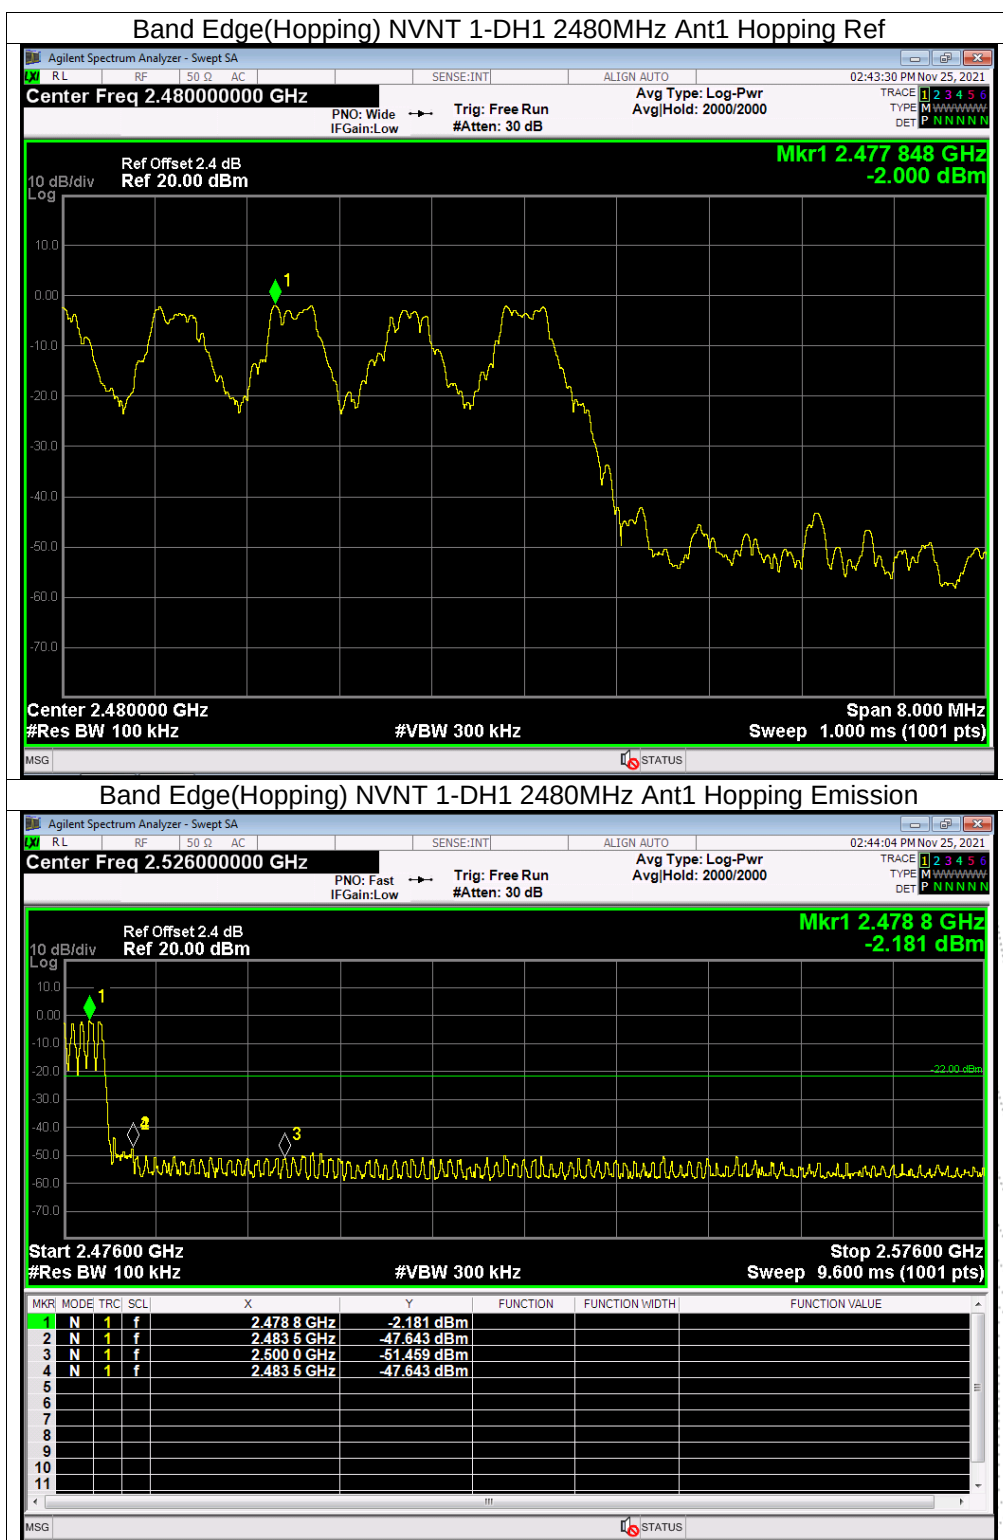









10. 20 DB Bandwidth

10.1 Block Diagram Of Test Setup



10.2 Limit

N/A


10.3 Test Procedure

1. Set RBW = 30kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission. .

10.4 Test Result


Temperature :	26℃	Relative Humidity :	54%
Test Voltage :	DC 3.7V	Remark	N/A

Modulation	Test Channel	Bandwidth(MHz)
GFSK	Low	0.880
GFSK	Middle	0.853
GFSK	High	0.871
$\pi/4$ DQPSK	Low	1.205
$\pi/4$ DQPSK	Middle	1.231
$\pi/4$ DQPSK	High	1.240
8DPSK	Low	1.211
8DPSK	Middle	1.215
8DPSK	High	1.216

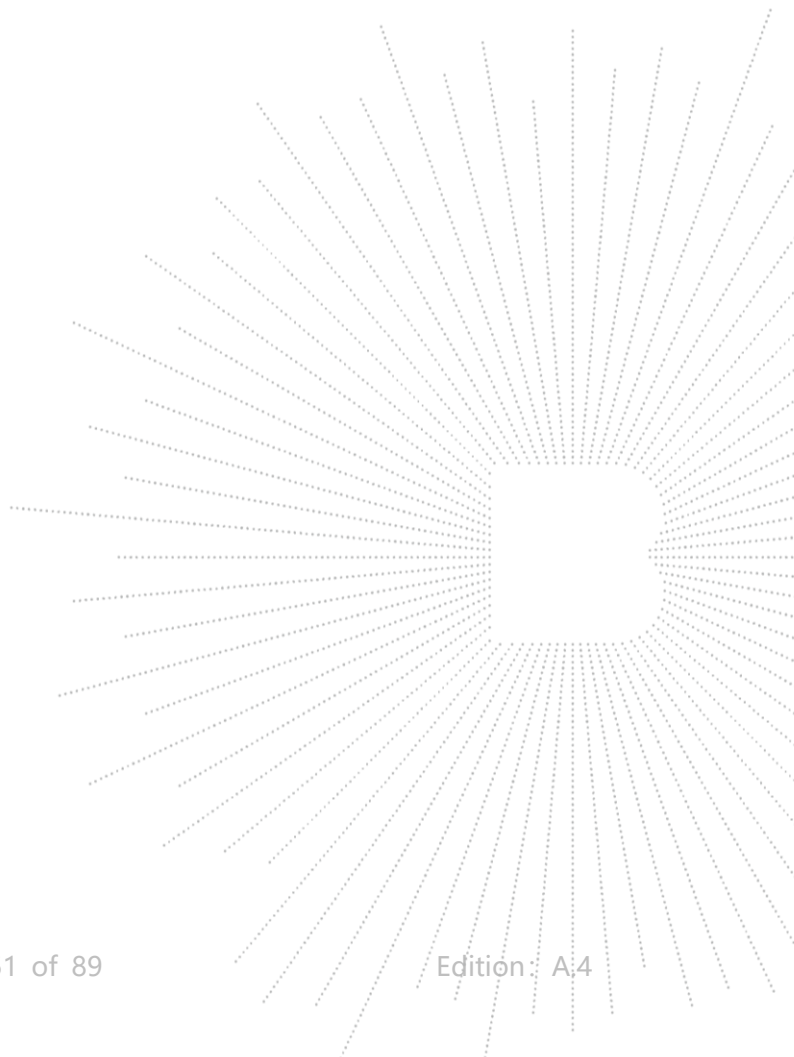



Test Graphs



-20dB Bandwidth NVNT 1-DH1 2402MHz Ant1


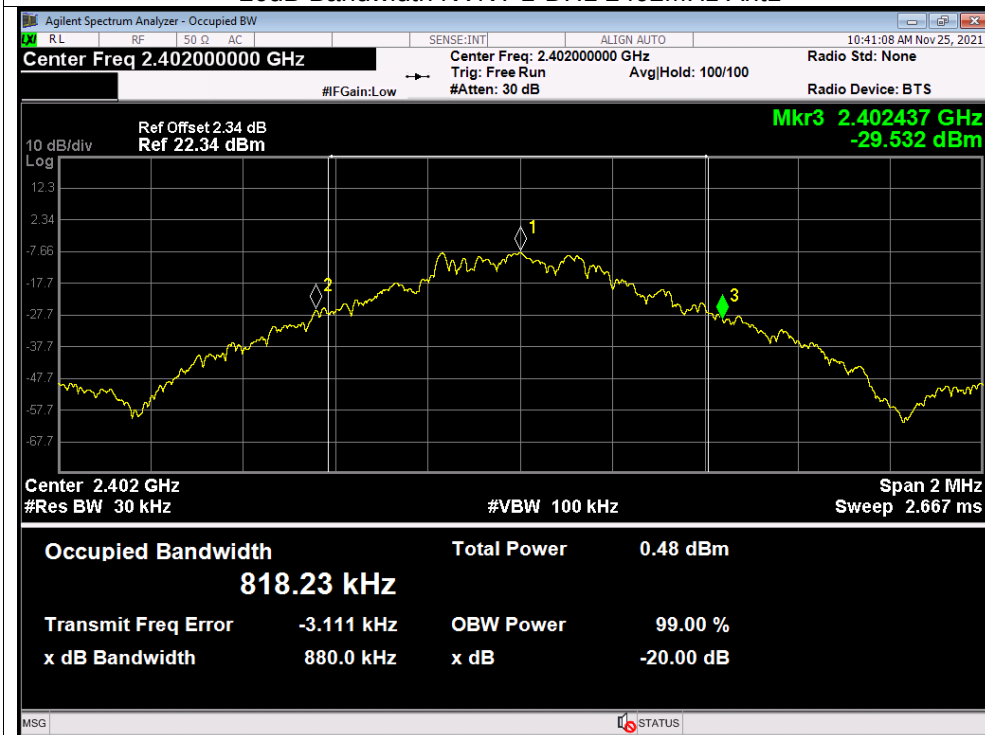



-20dB Bandwidth NVNT 1-DH1 2441MHz Ant1



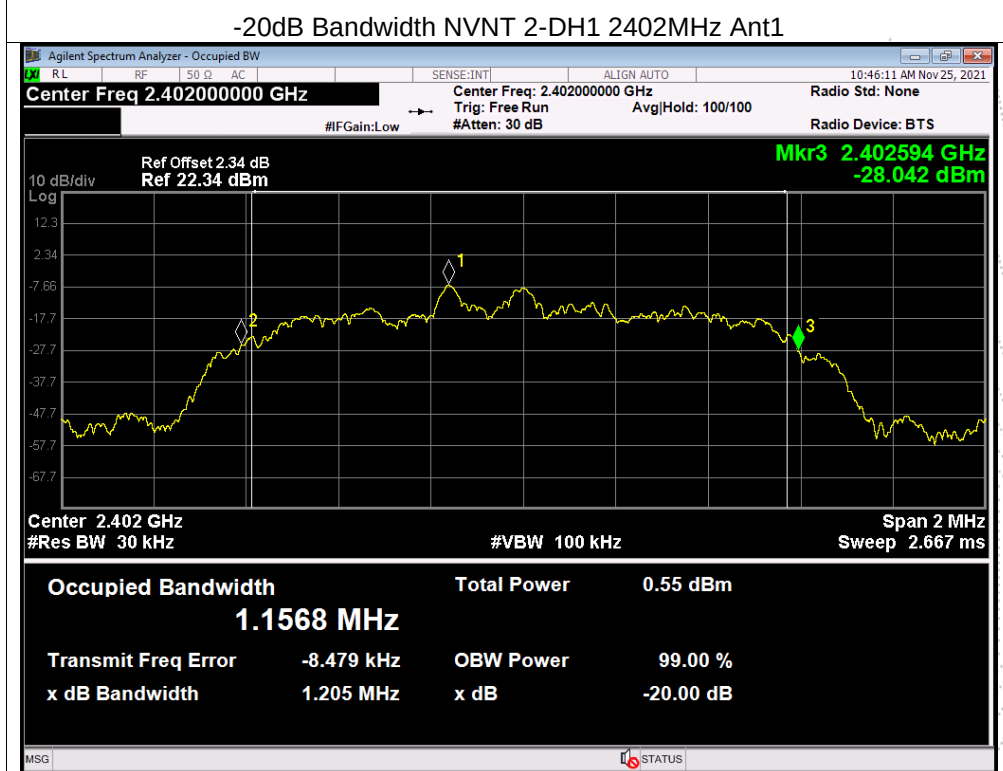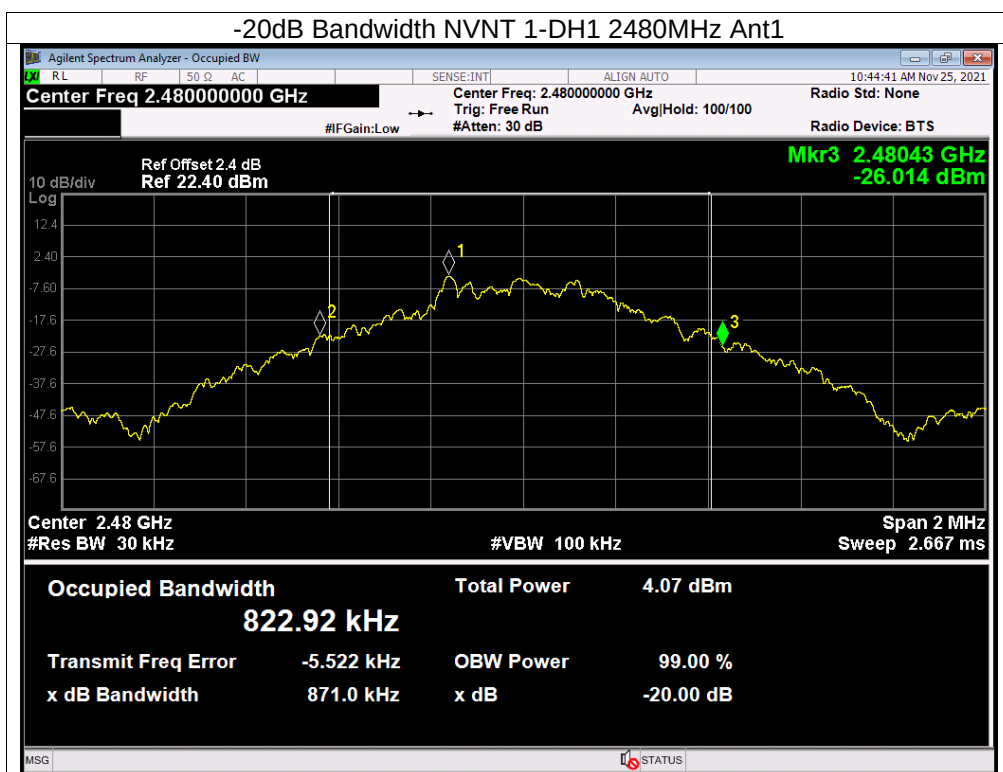

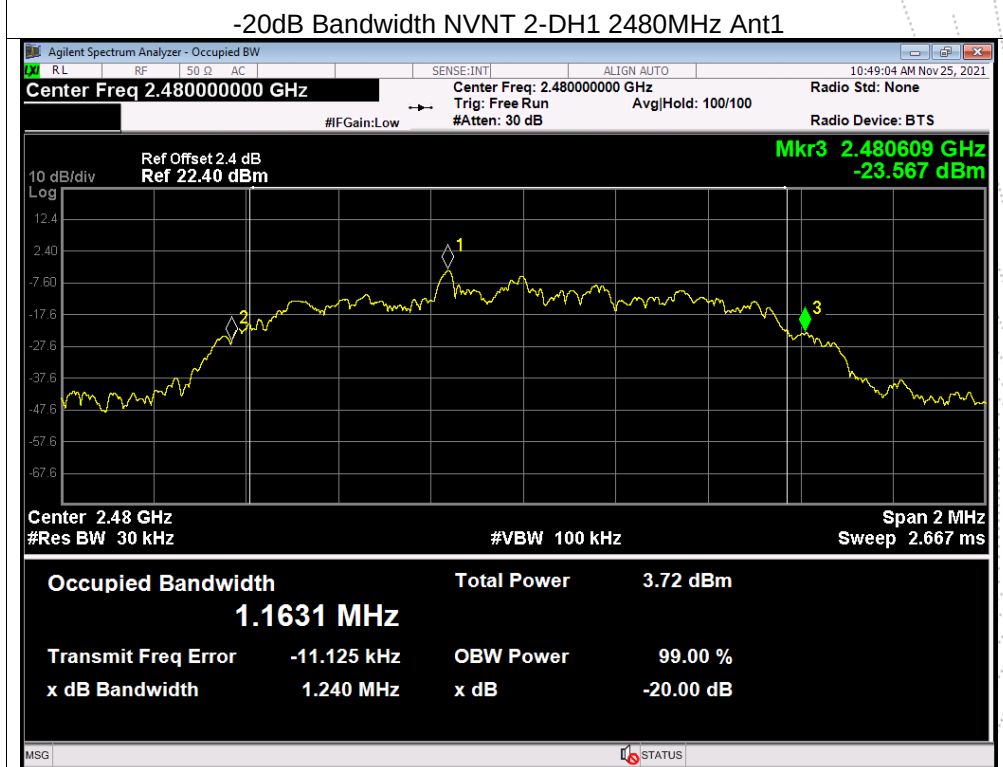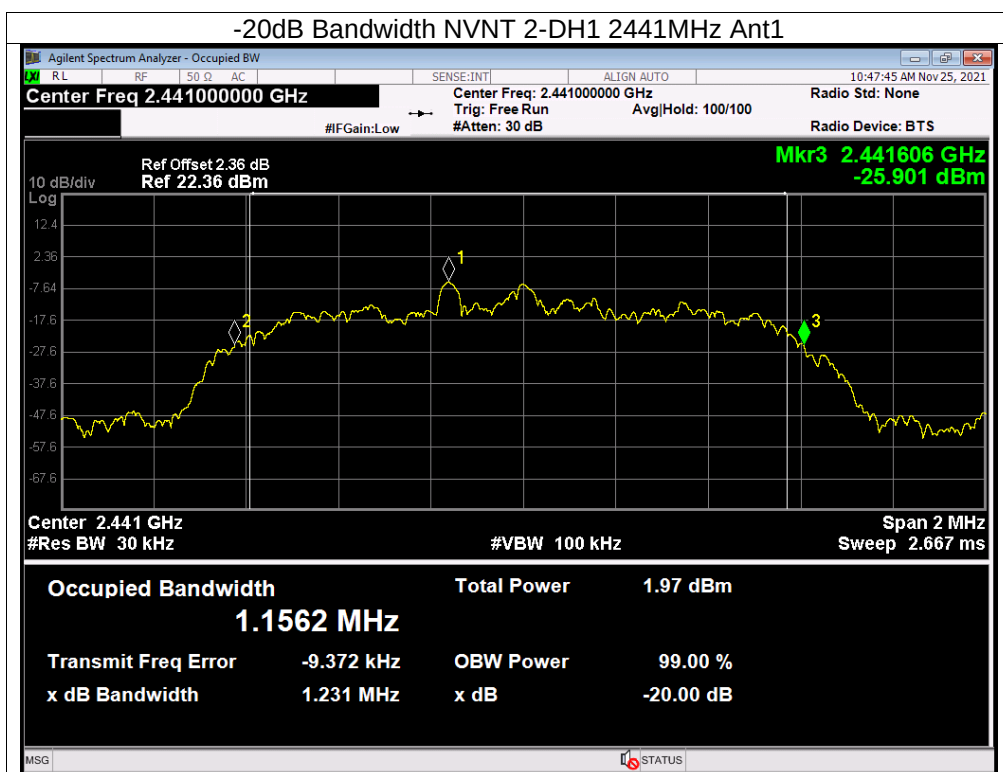

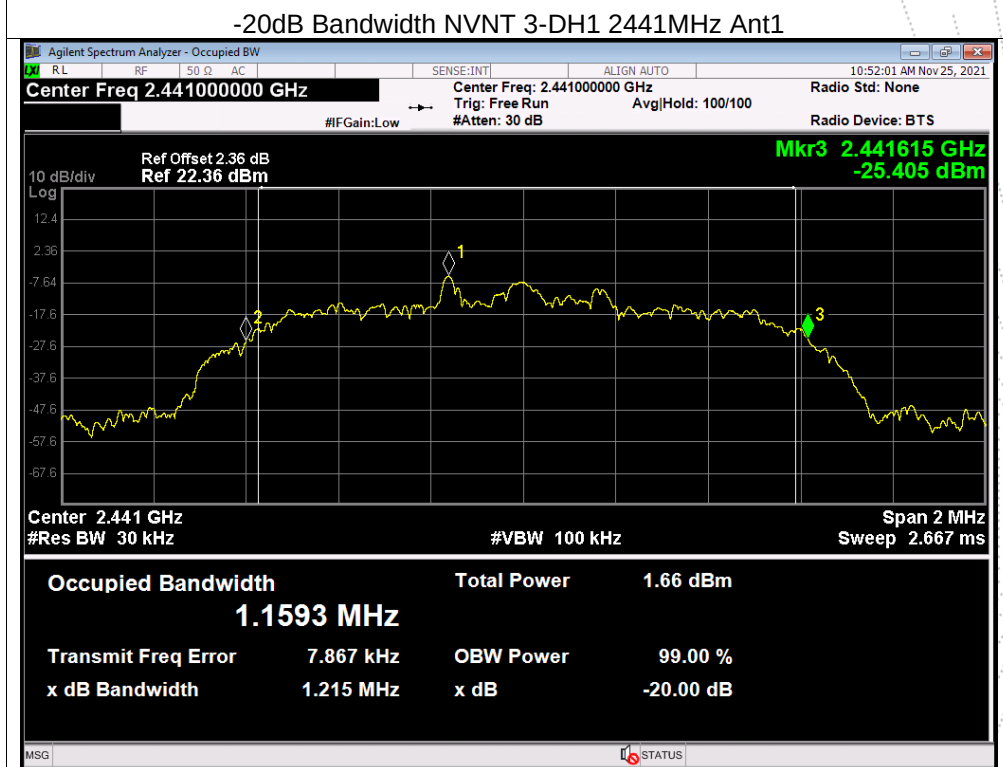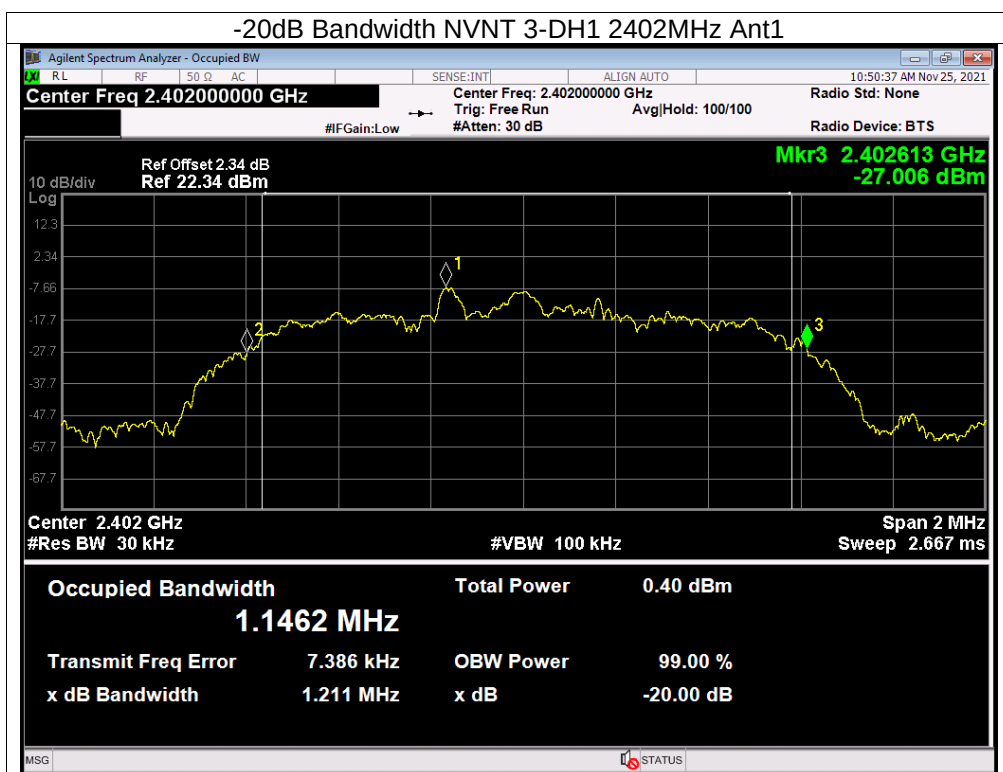

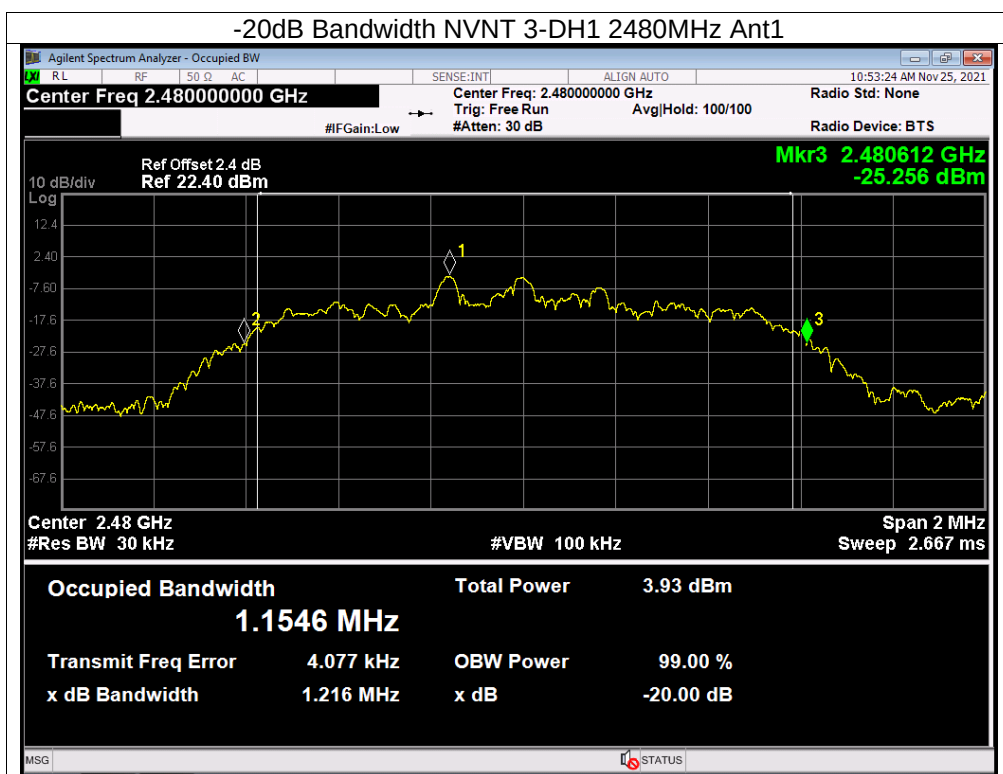

11. Maximum Peak Output Power

11.1 Block Diagram Of Test Setup



11.2 Limit

FCC Part15 (15.247), Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(1)	Peak Output Power	0.125 watt or 21dBm	2400-2483.5	PASS



11.3 Test Procedure



1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.



11.4 Test Result



Temperature :	26℃	Relative Humidity :	54%
Test Voltage :	DC 3.7V	Remark:	N/A



Modulation	Test Channel	Output Power (dBm)	Limit (dBm)
GFSK	Low	-5.42	21
GFSK	Middle	-3.91	21
GFSK	High	-1.91	21
$\pi/4$ DQPSK	Low	-4.5	21
$\pi/4$ DQPSK	Middle	-3.02	21
$\pi/4$ DQPSK	High	-1.36	21
8DPSK	Low	-3.92	21
8DPSK	Middle	-2.49	21
8DPSK	High	-1.02	21

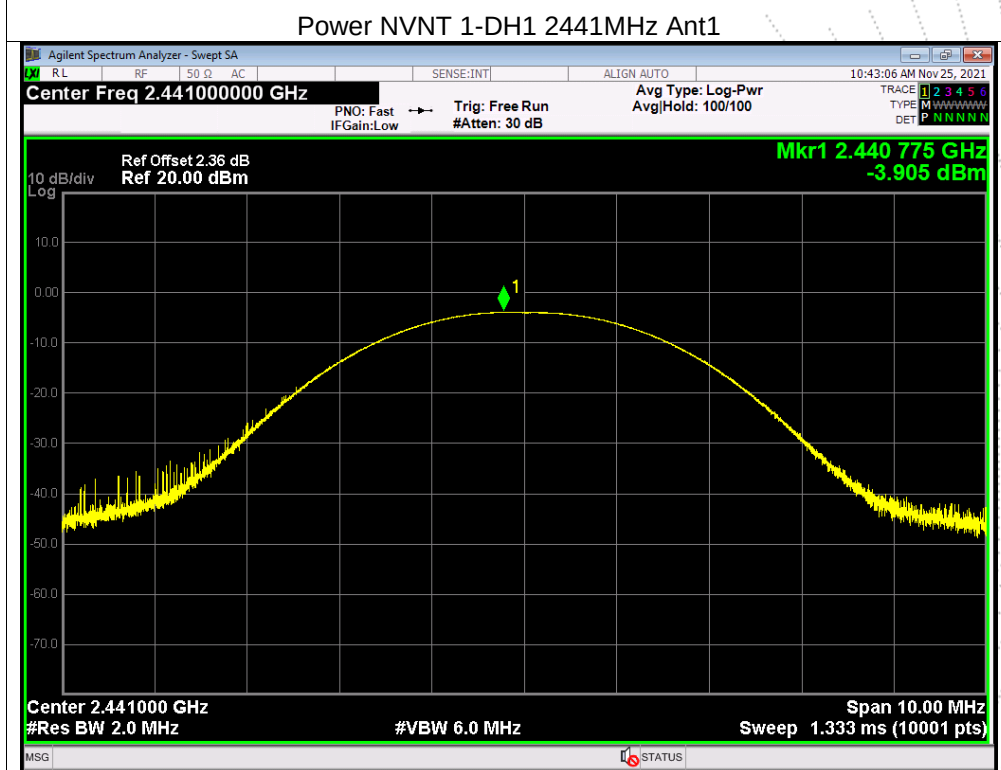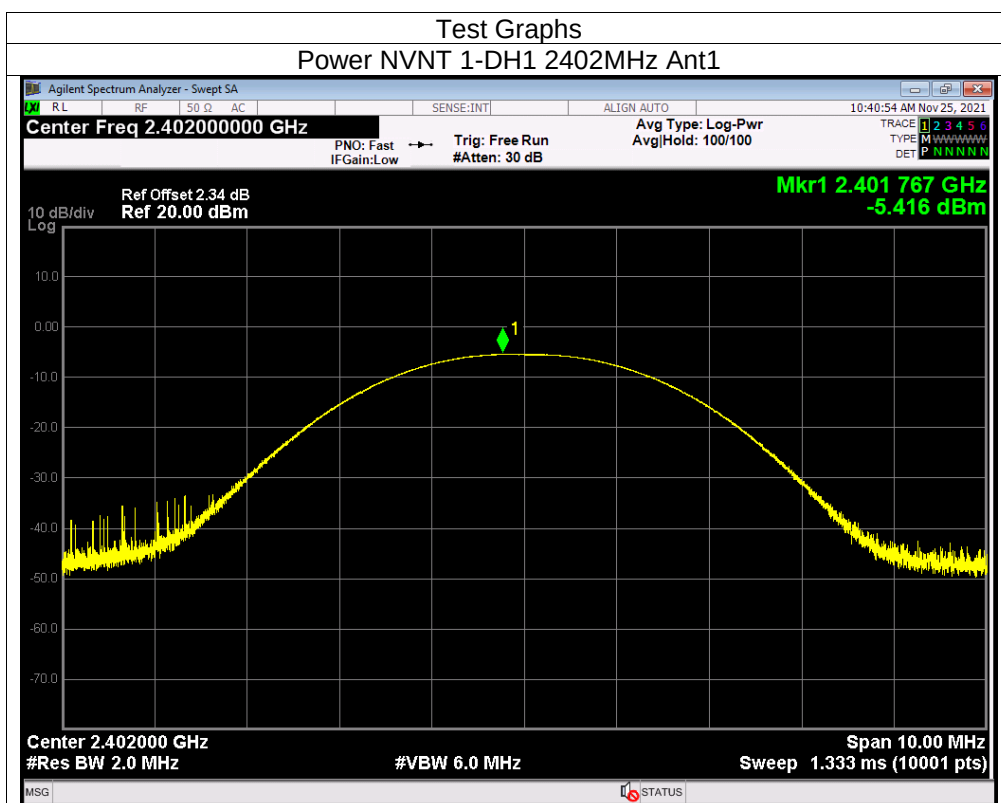

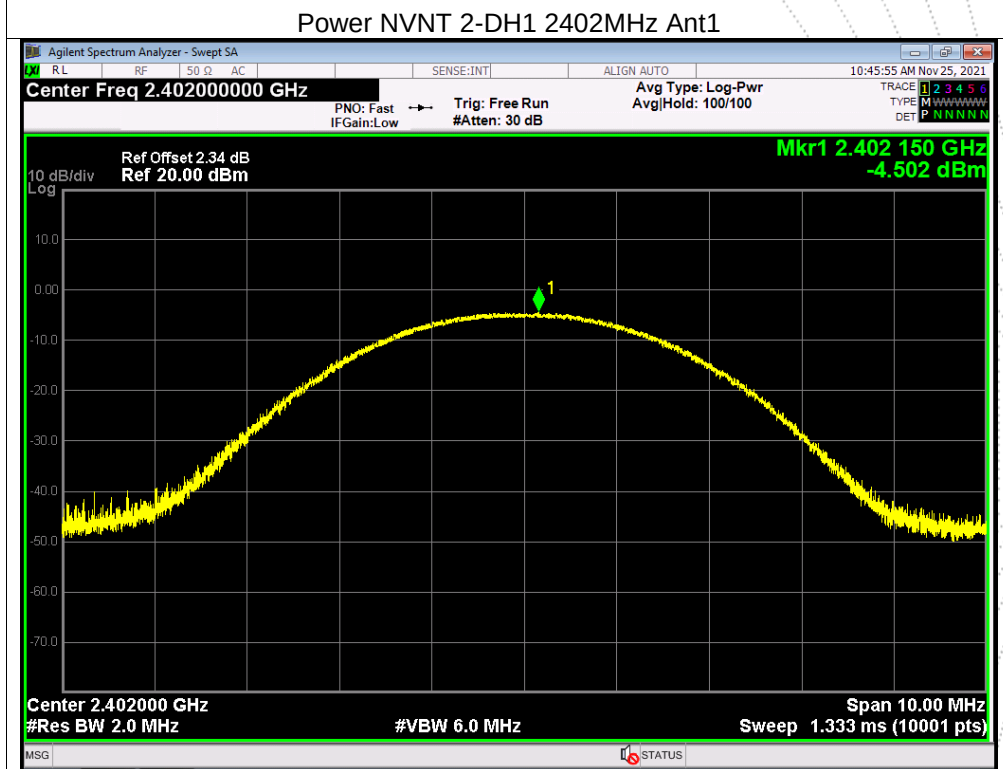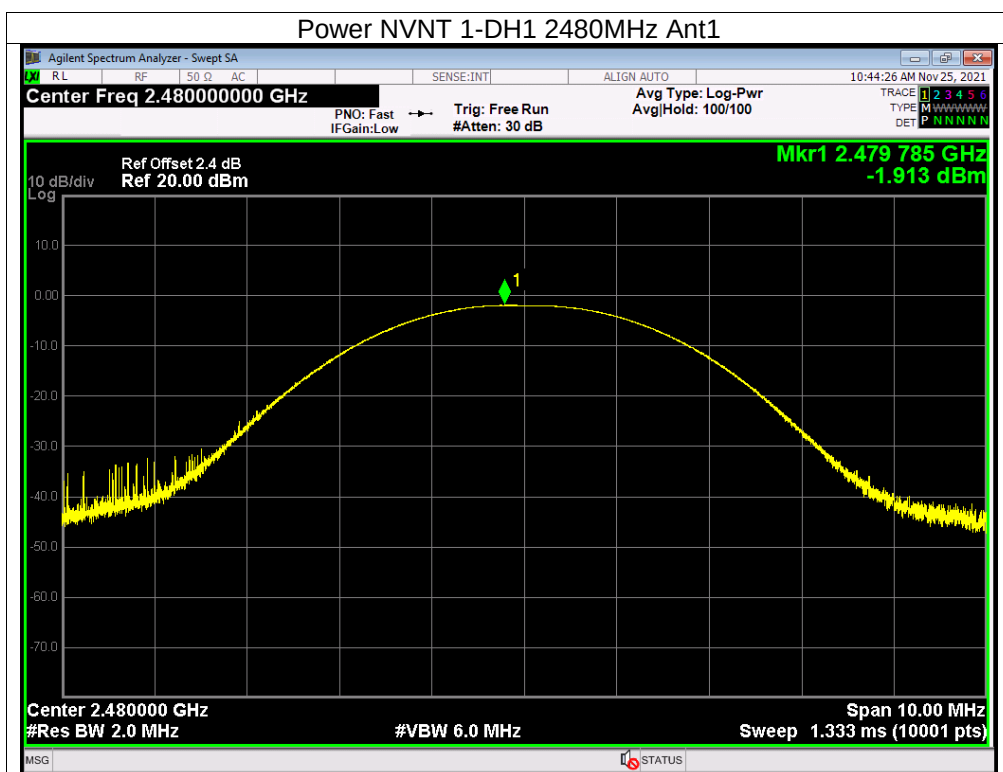

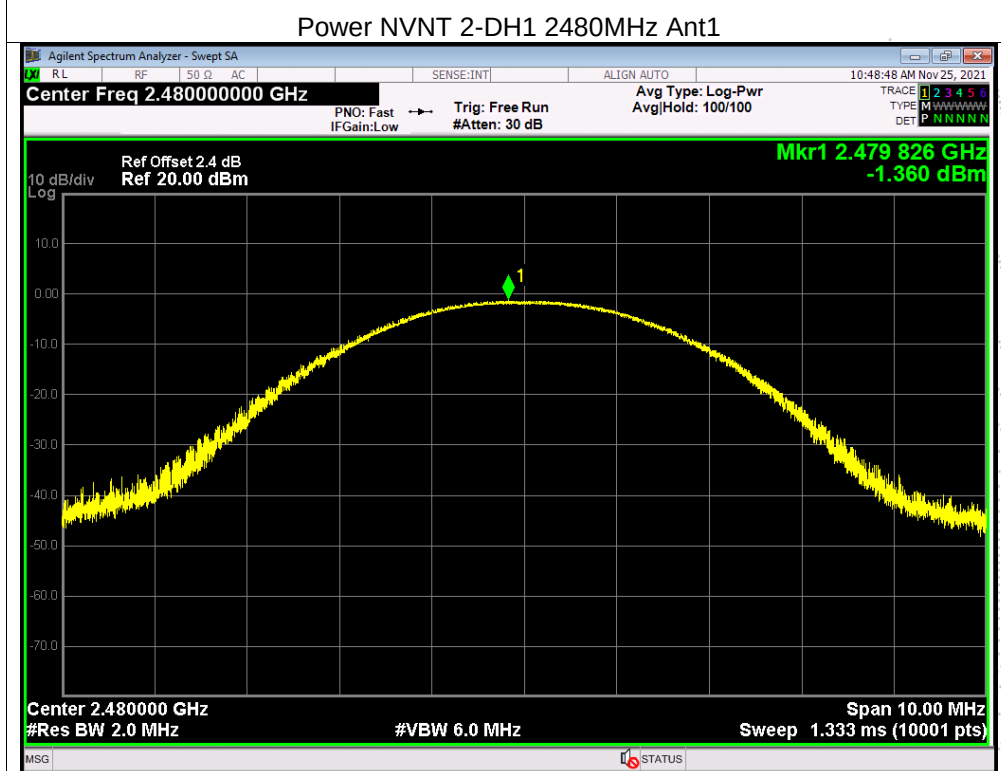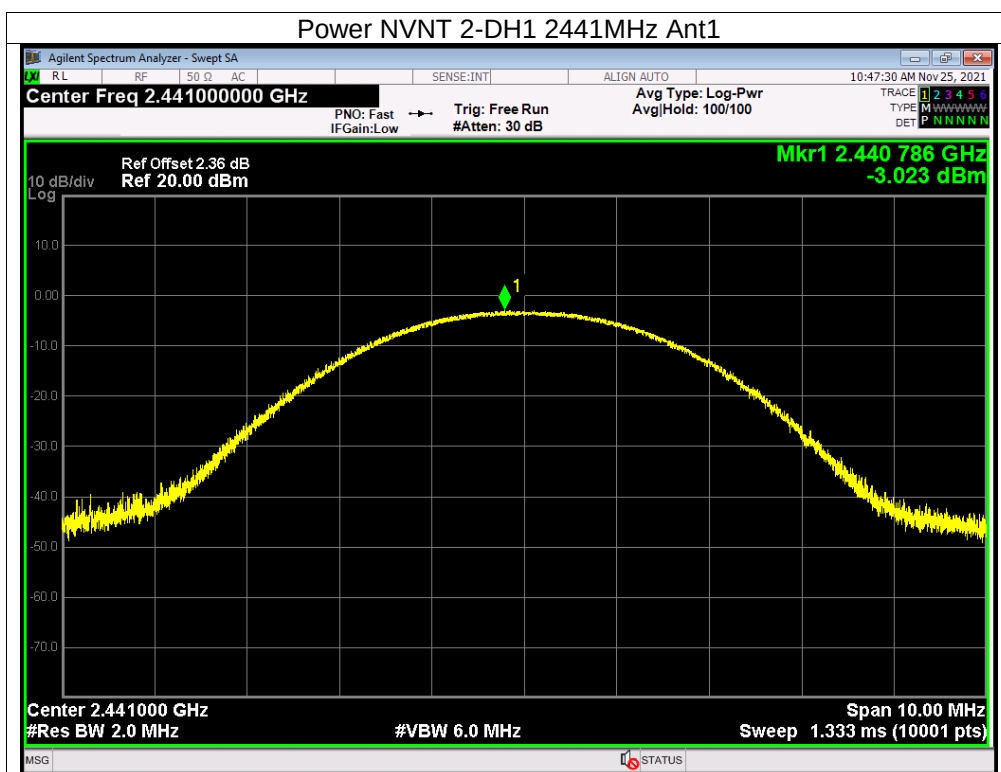

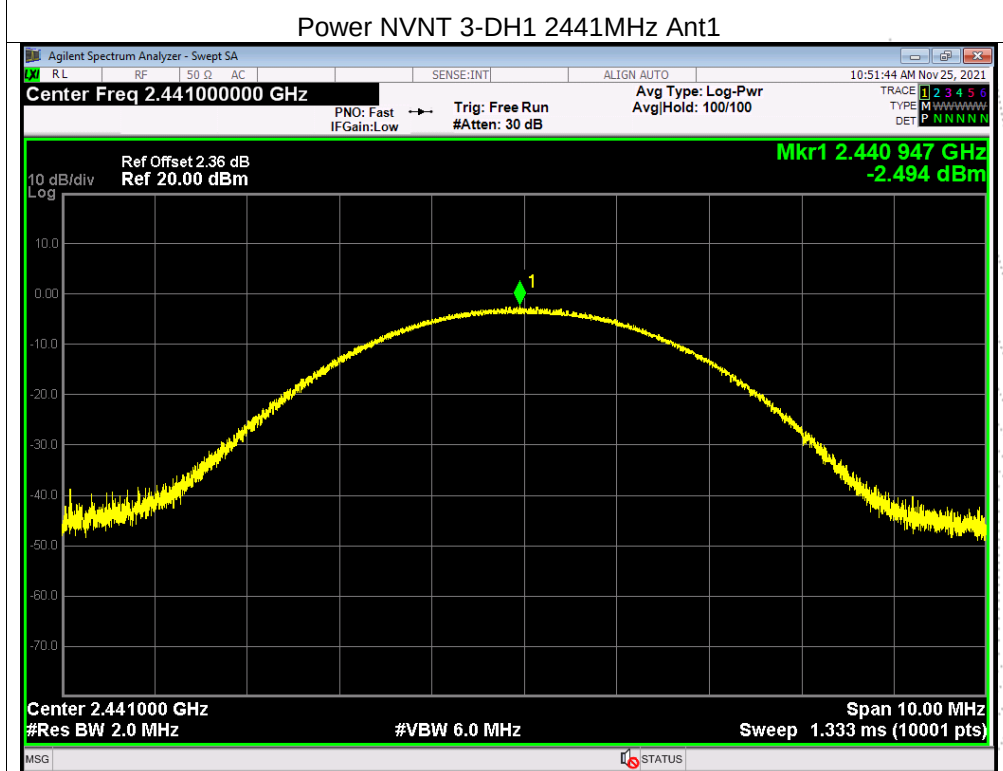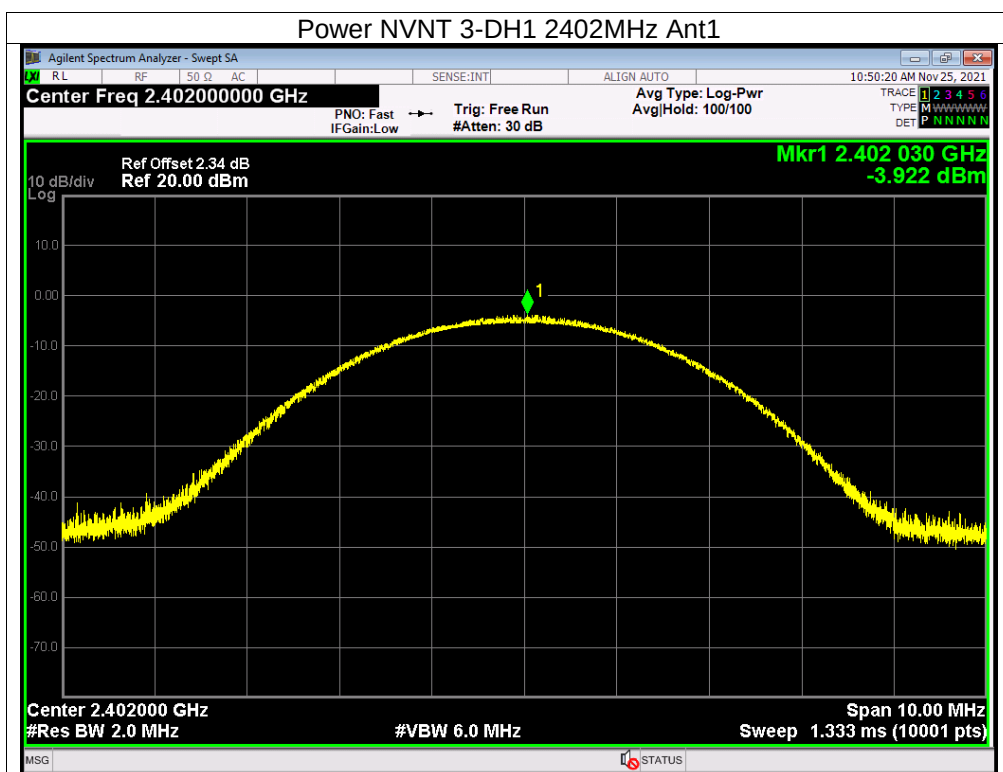

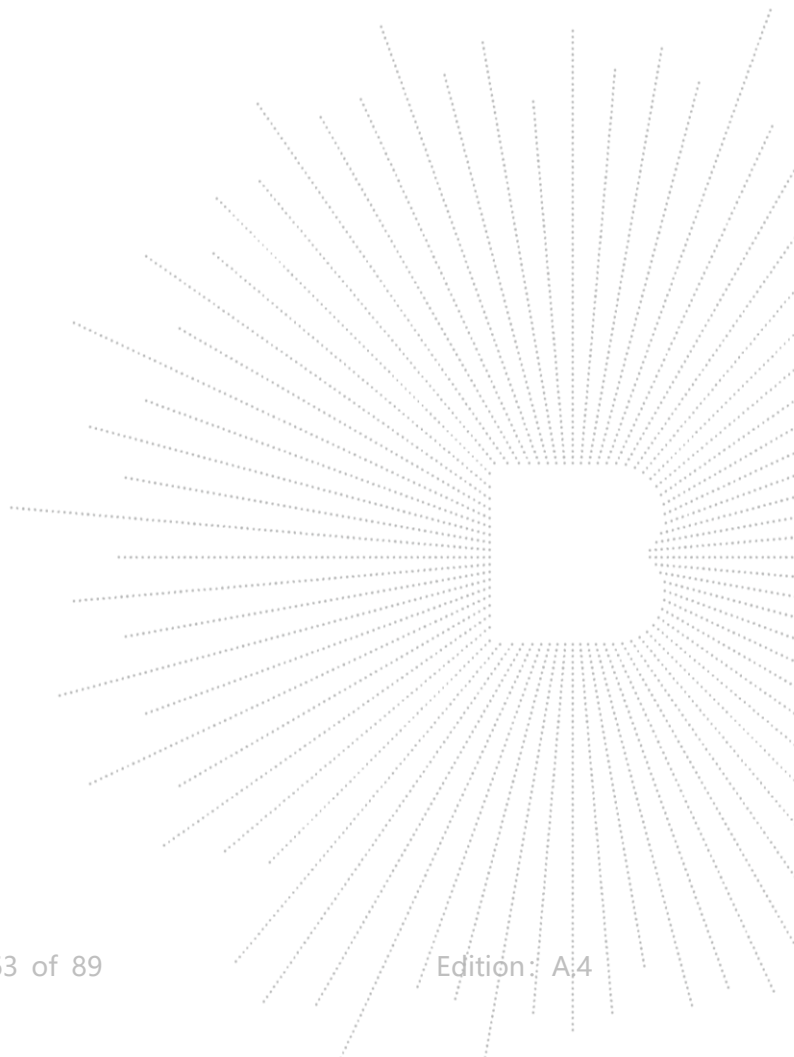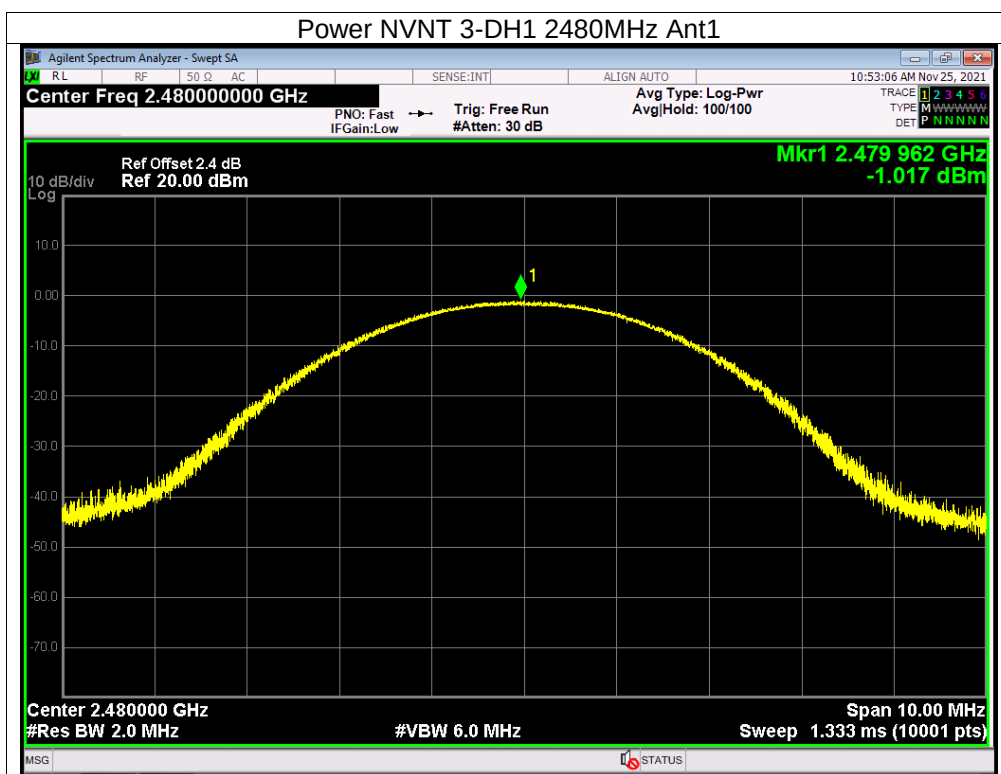

12. Hopping Channel Separation

12.1 Block Diagram Of Test Setup



12.2 Limit


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

12.3 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 2.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

12.4 Test Result

Modulation	Test Channel	Separation (MHz)	Limit(MHz)	Result
GFSK	Low	1.000	0.587	PASS
GFSK	Middle	1.000	0.569	PASS
GFSK	High	1.000	0.581	PASS
$\pi/4$ DQPSK	Low	1.000	0.803	PASS
$\pi/4$ DQPSK	Middle	1.000	0.821	PASS
$\pi/4$ DQPSK	High	1.000	0.827	PASS
8DPSK	Low	1.000	0.807	PASS
8DPSK	Middle	1.000	0.810	PASS
8DPSK	High	1.000	0.811	PASS

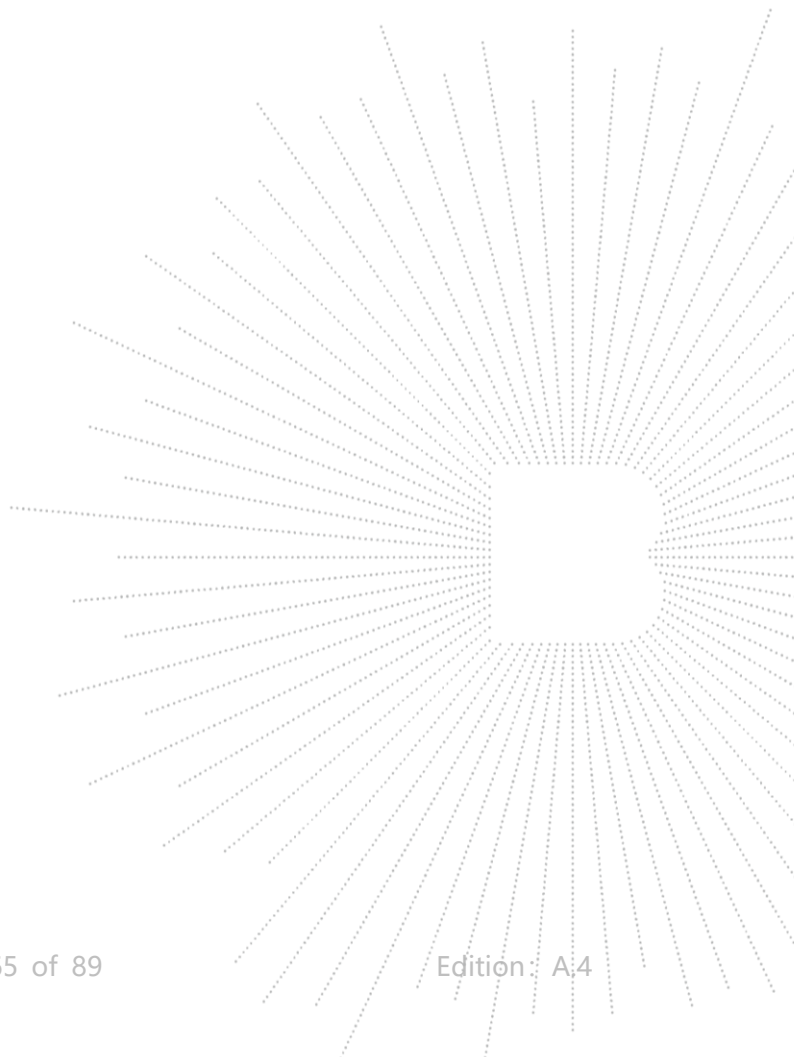

Test plots GFSK Low Channel



GFSK Middle Channel



GFSK High Channel



$\pi/4$ DQPSK Low Channel



$\pi/4$ DQPSK Middle Channel

 $\pi/4$ DQPSK High Channel


8DPSK Low Channel



8DPSK Middle Channel



8DPSK High Channel



13. Number Of Hopping Frequency

13.1 Block Diagram Of Test Setup




13.2 Limit



Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

13.3 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

13.4 Test Result

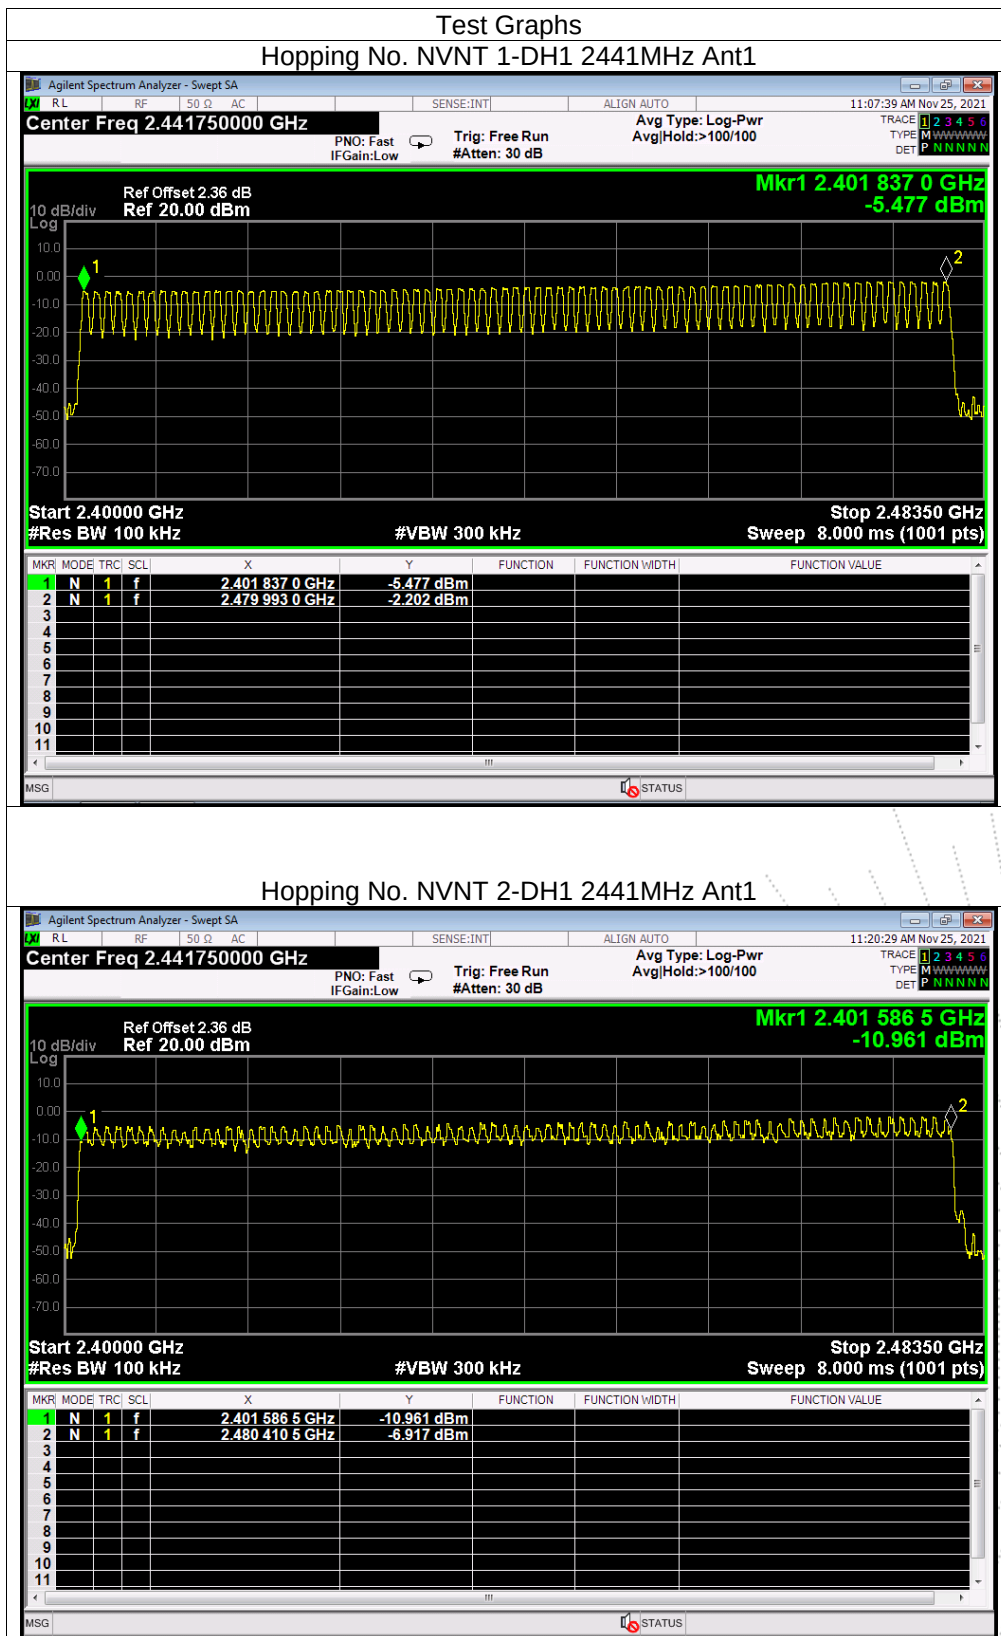

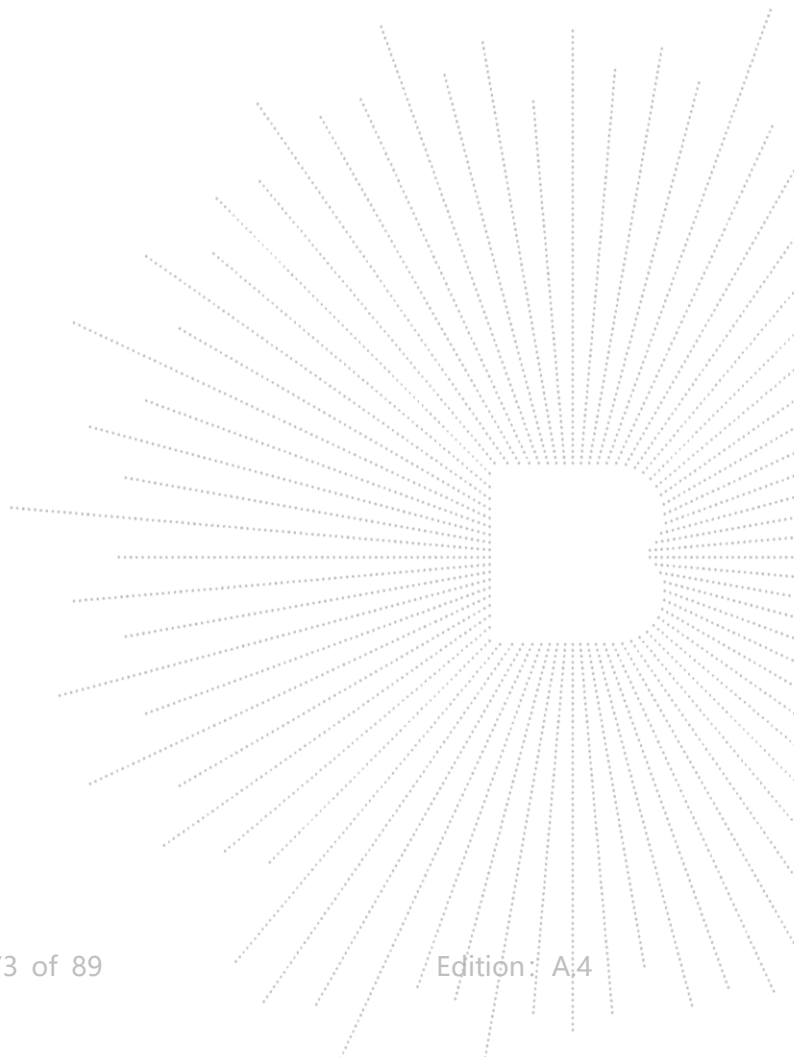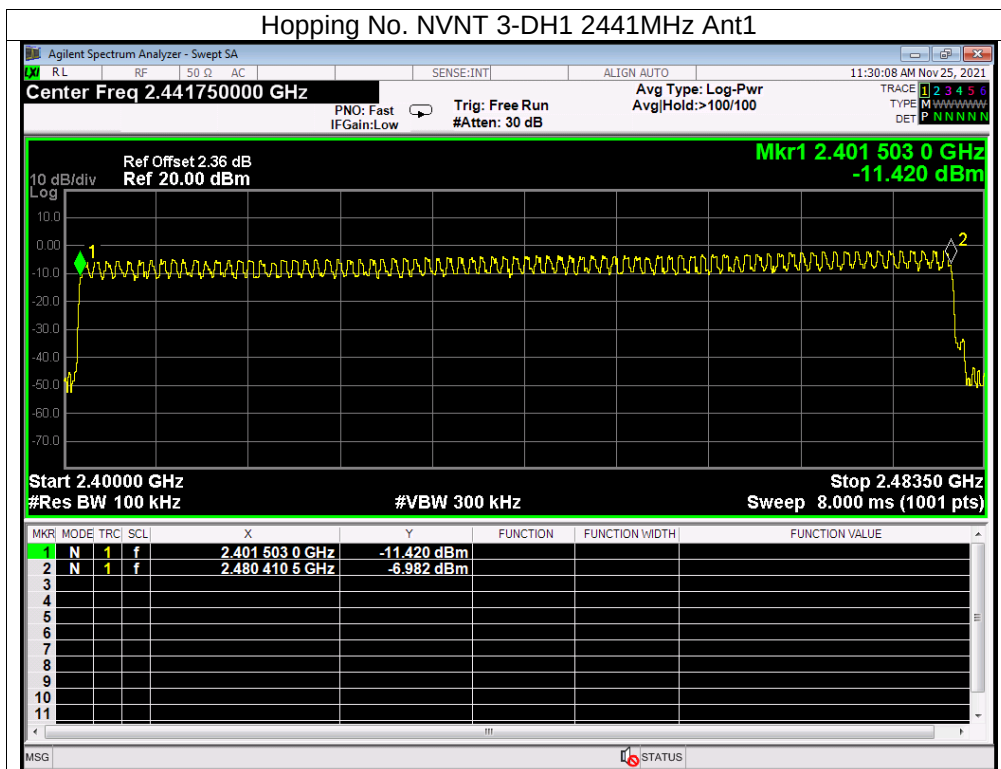

14. Dwell Time

14.1 Block Diagram Of Test Setup



14.2 Limit


Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.



14.3 Test Procedure



1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).



14.4 Test Result



Modulation	Channel Data	Packet	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
GFSK	Middle	DH1	0.377	117.624	312	31600	400	Pass
		DH3	1.632	256.224	157	31600	400	Pass
		DH5	2.868	281.064	98	31600	400	Pass
$\pi/4$ DQPSK	Middle	2DH1	0.386	121.59	315	31600	400	Pass
		2DH3	1.637	258.646	158	31600	400	Pass
		2DH5	2.885	291.385	101	31600	400	Pass
8DPSK	Middle	3DH1	0.387	122.679	317	31600	400	Pass
		3DH3	1.637	252.098	154	31600	400	Pass
		3DH5	2.887	277.152	96	31600	400	Pass


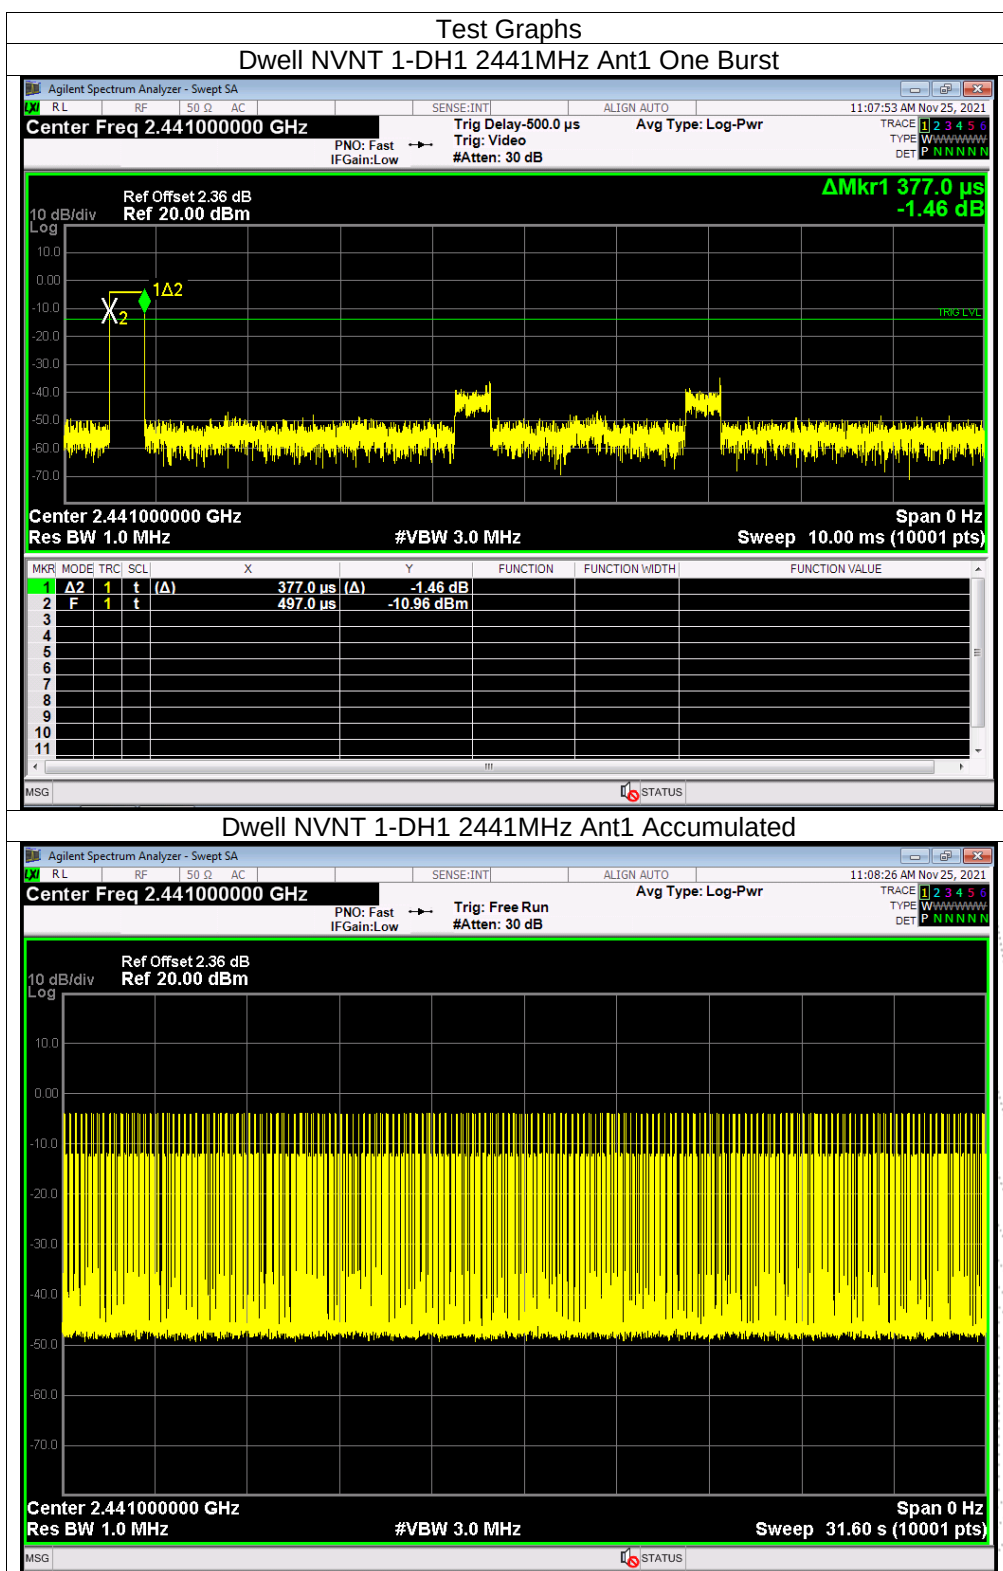


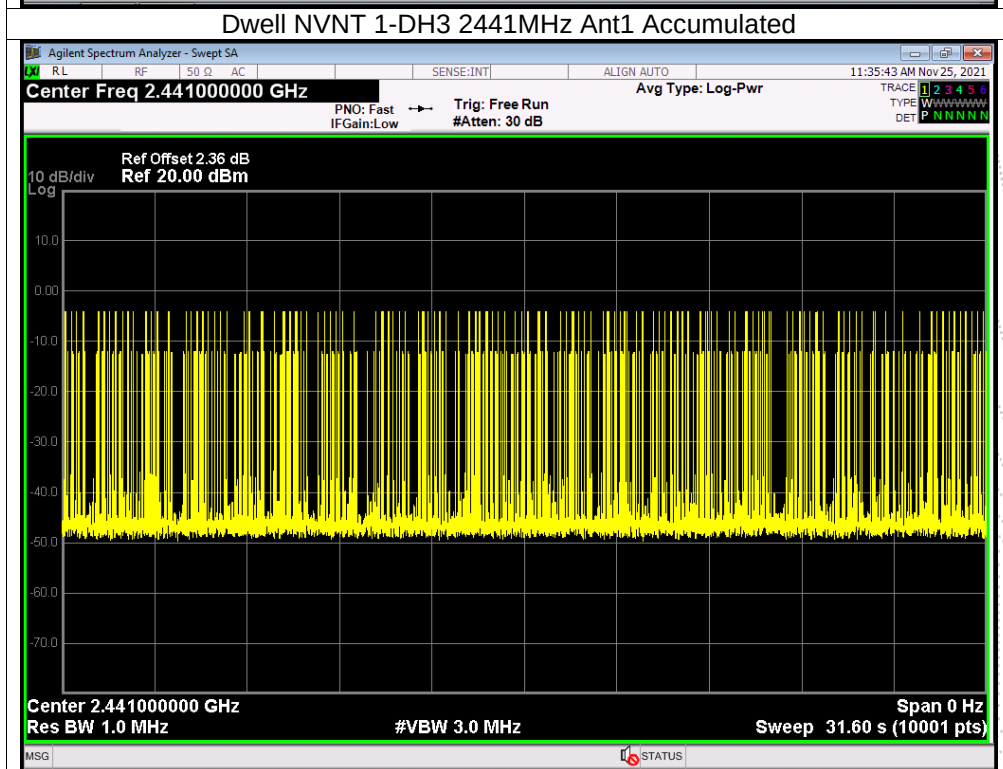
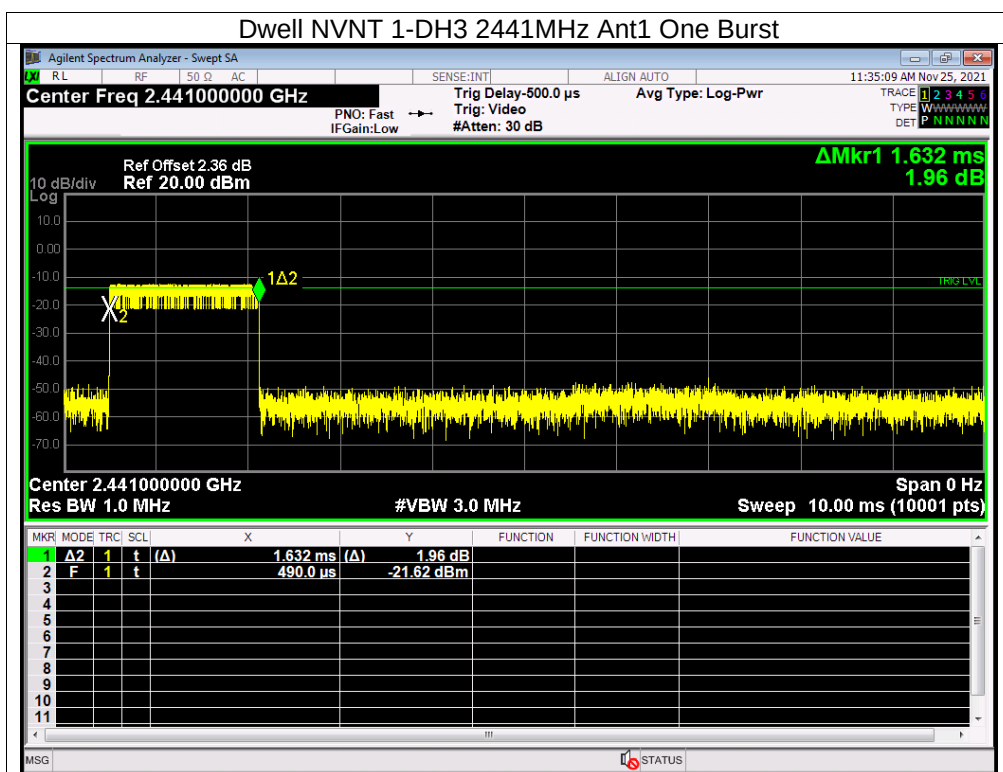


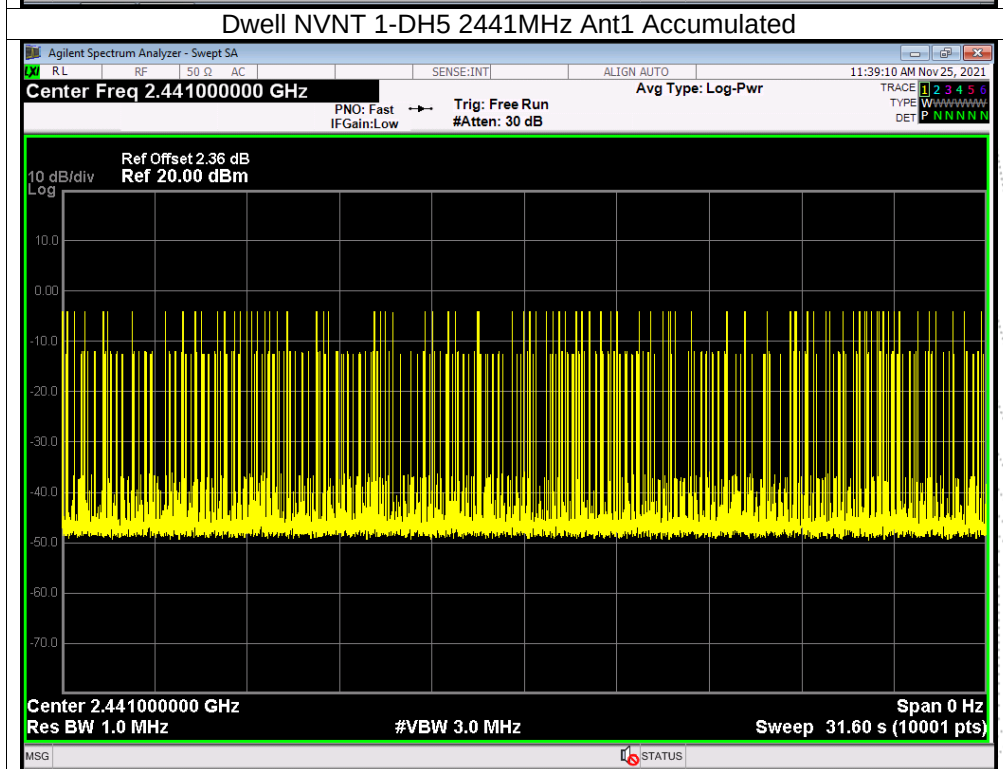
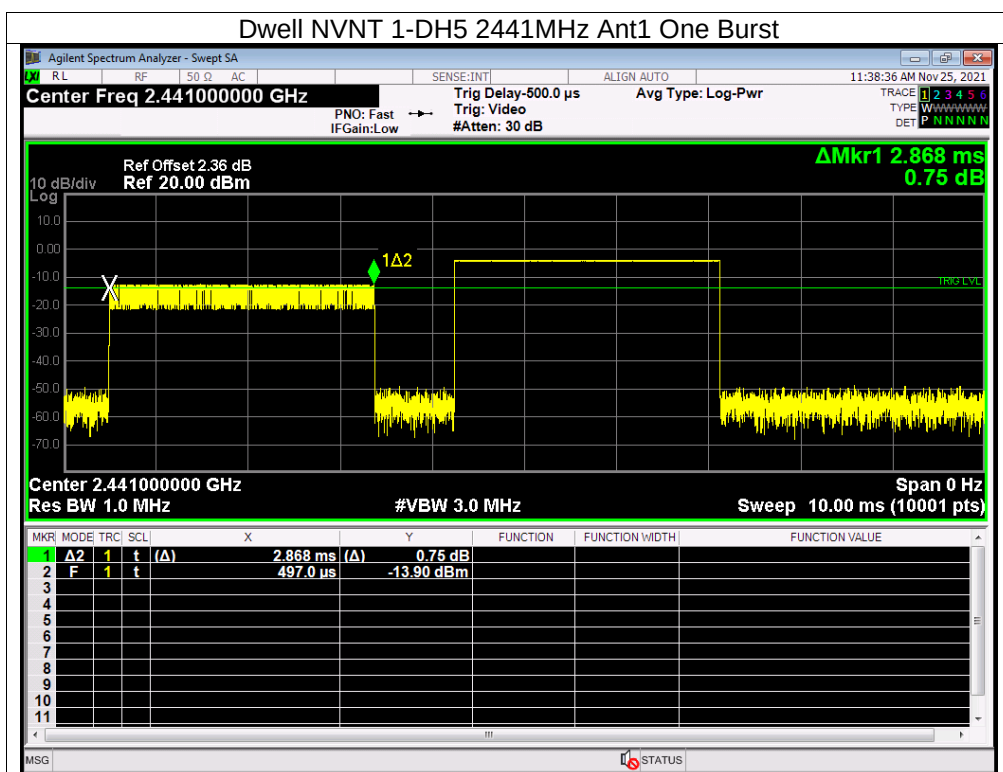


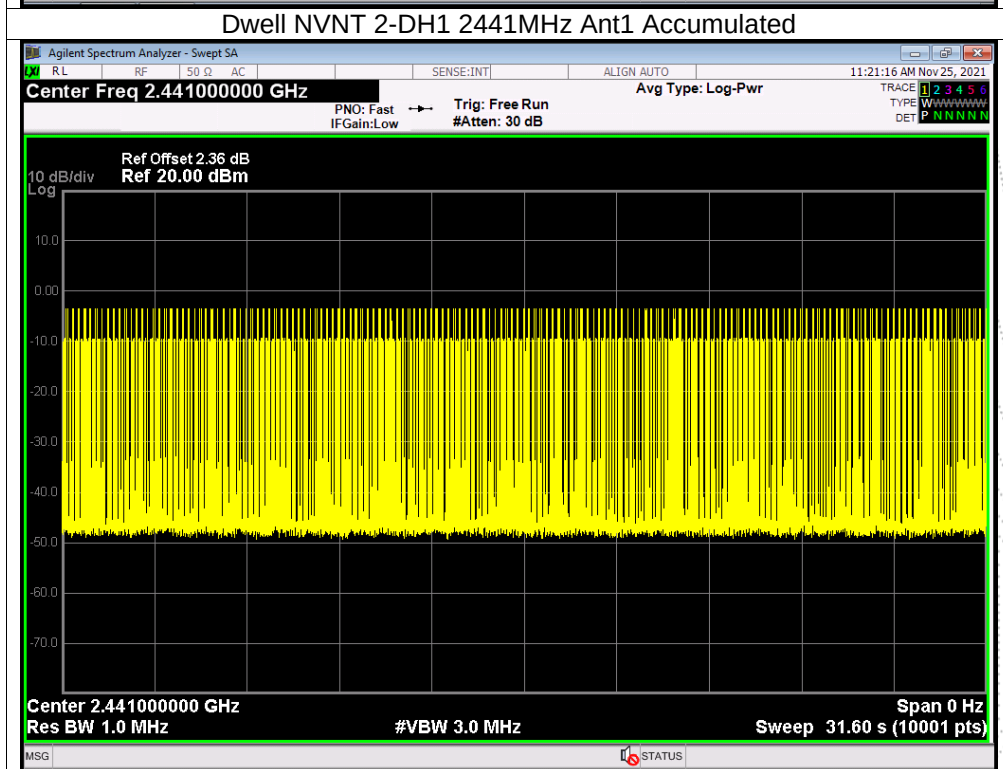
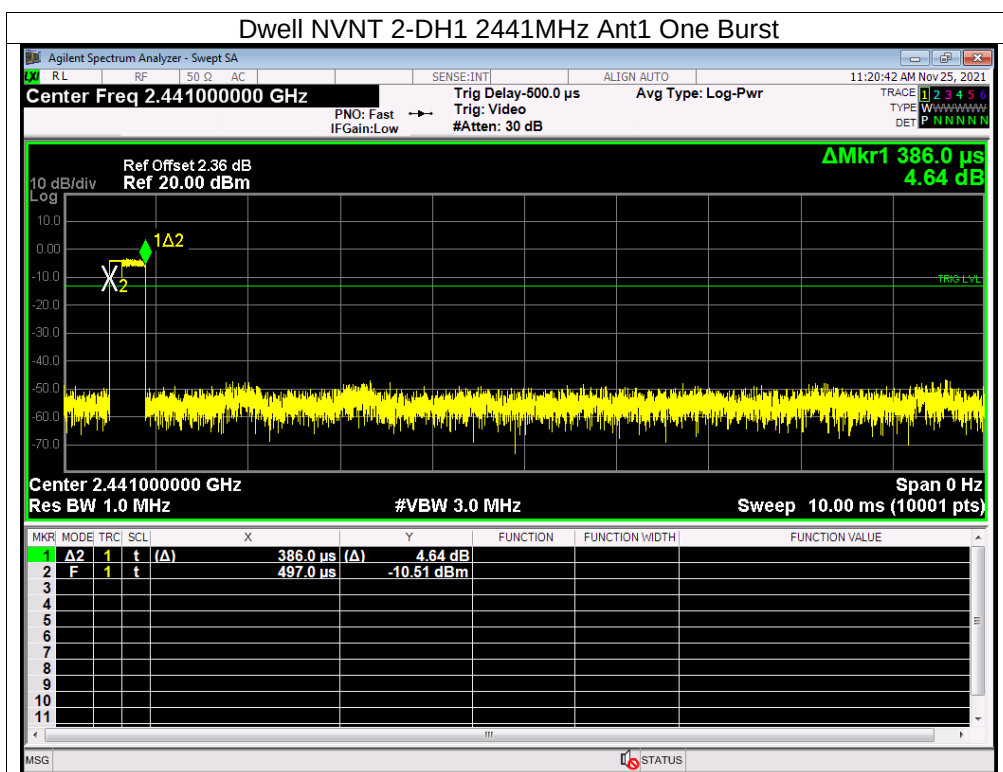


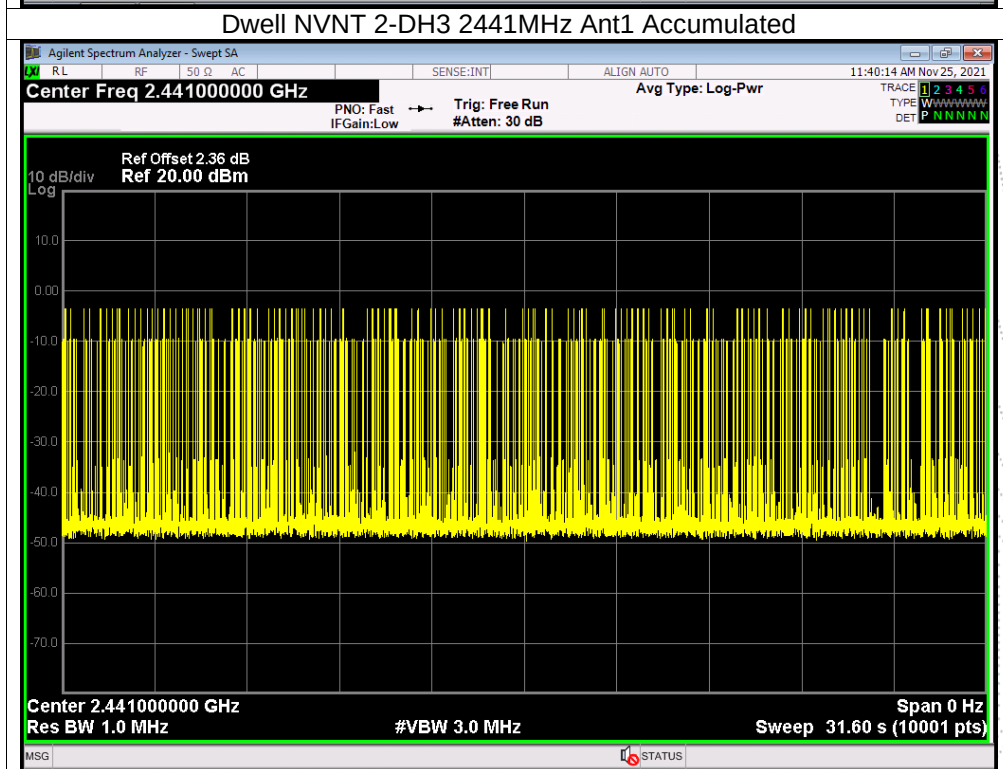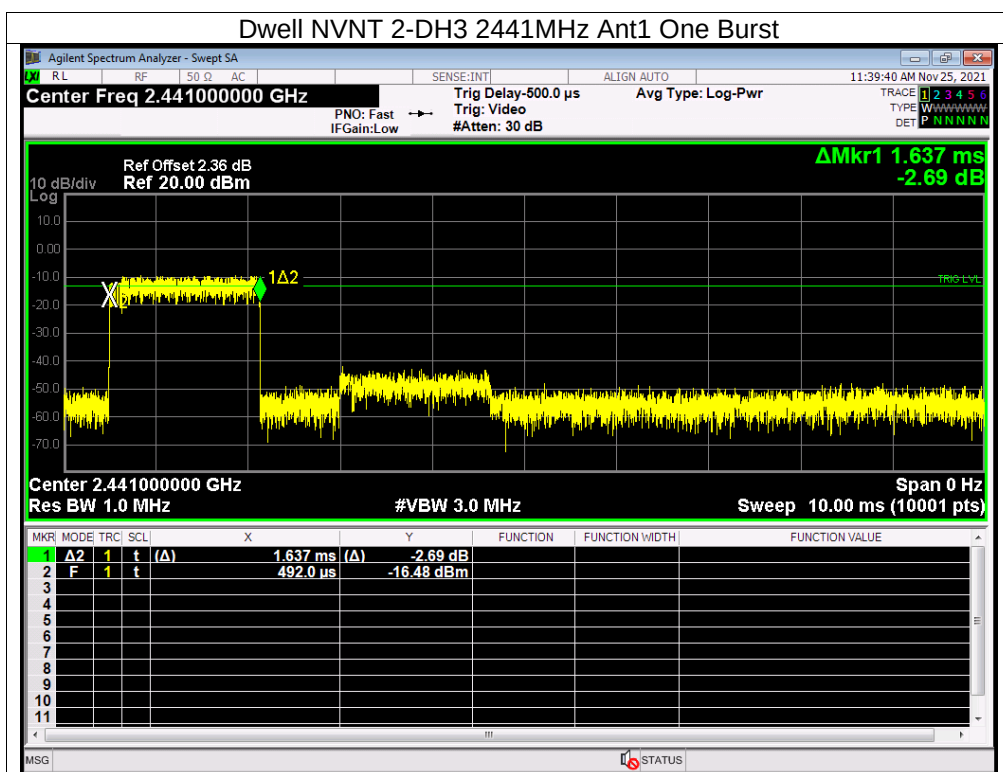

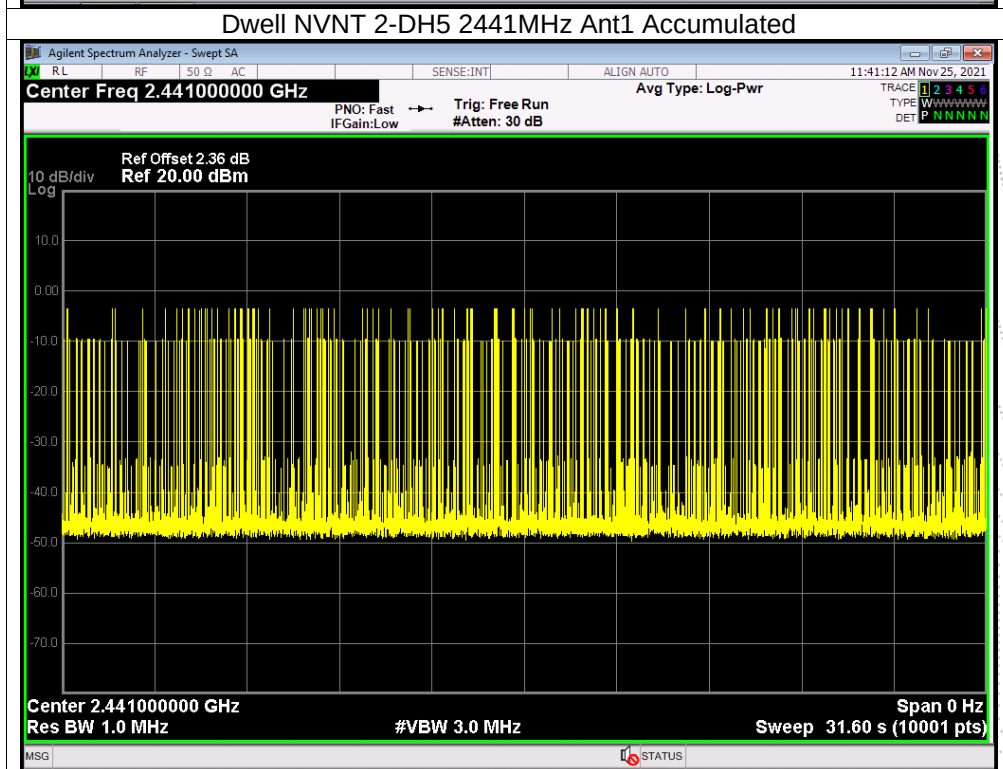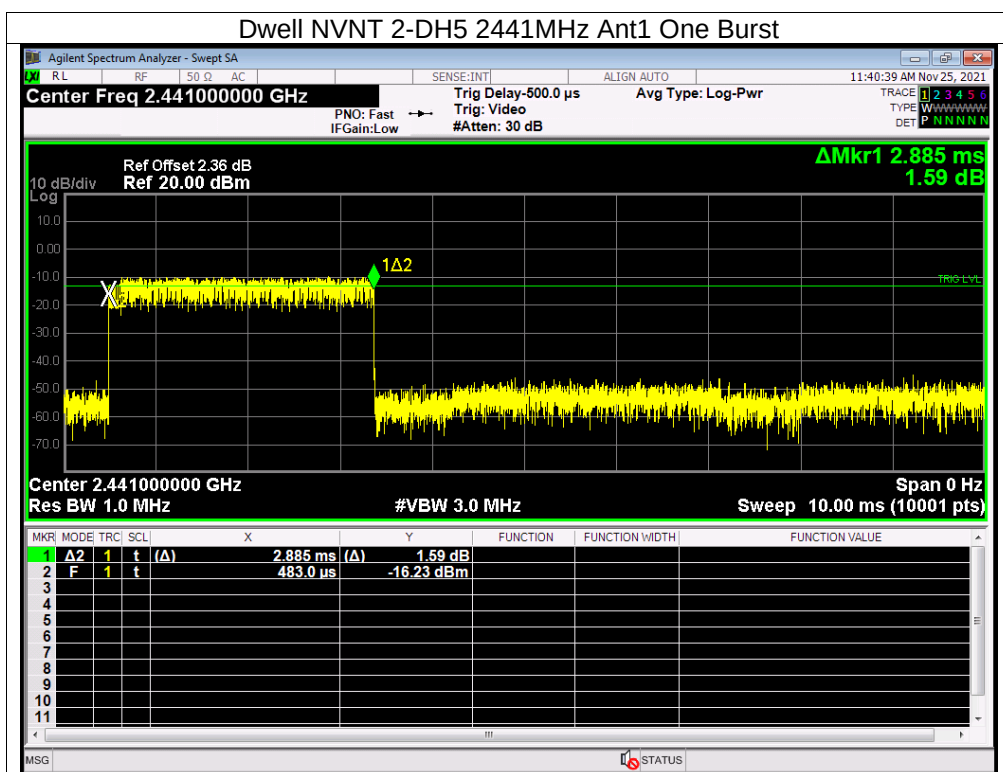

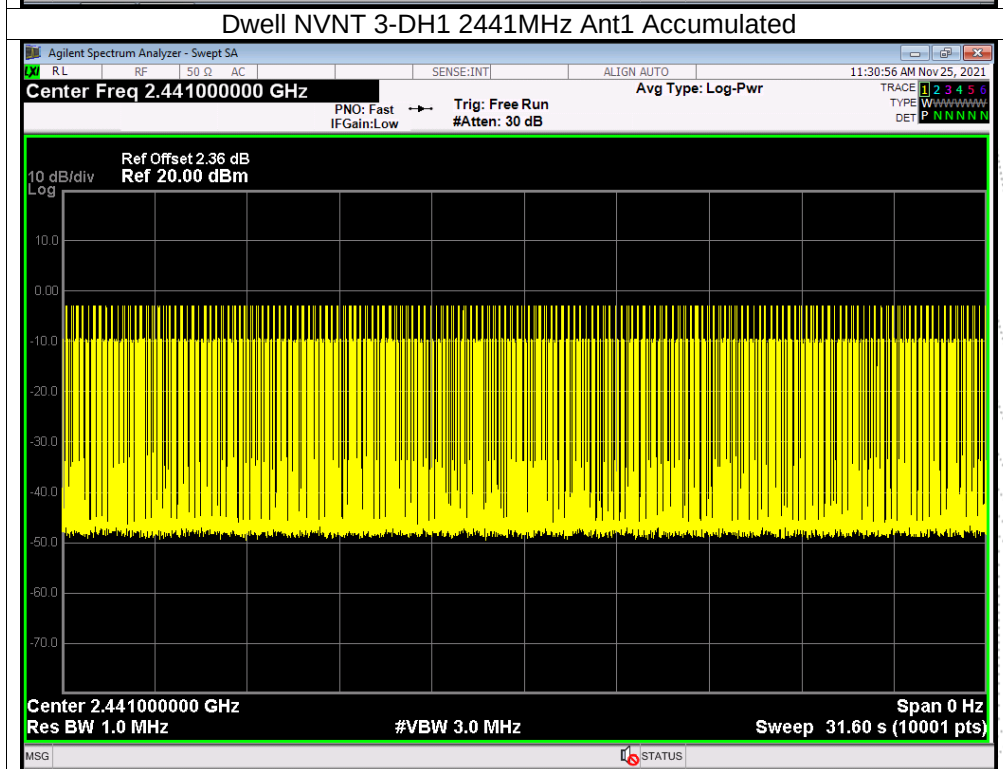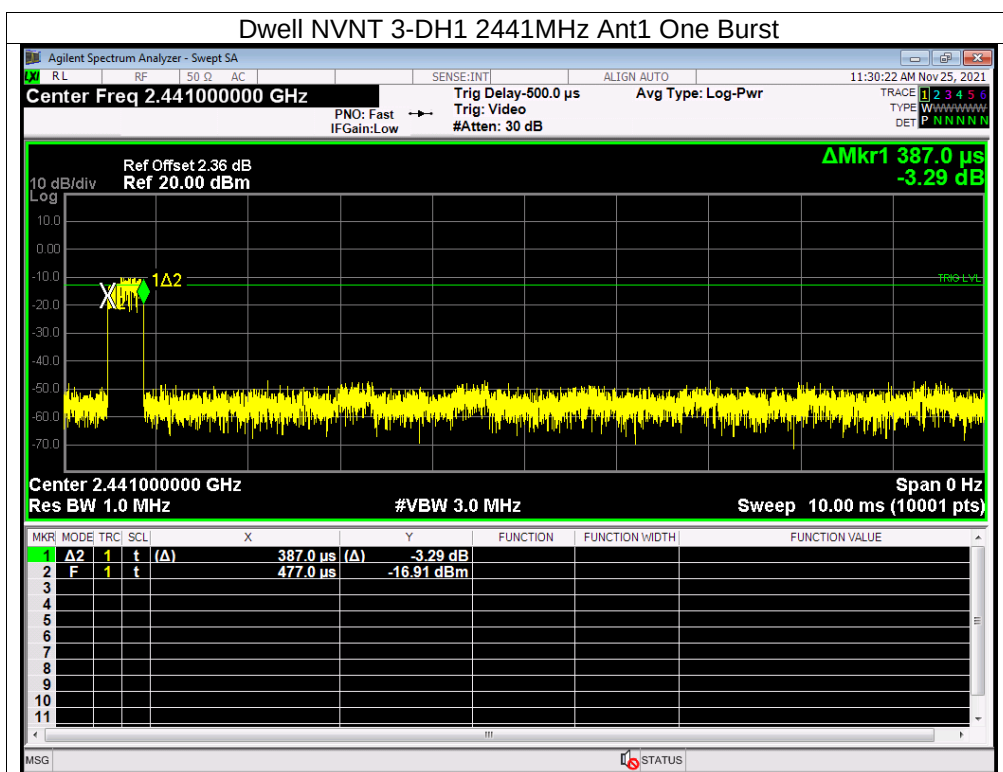

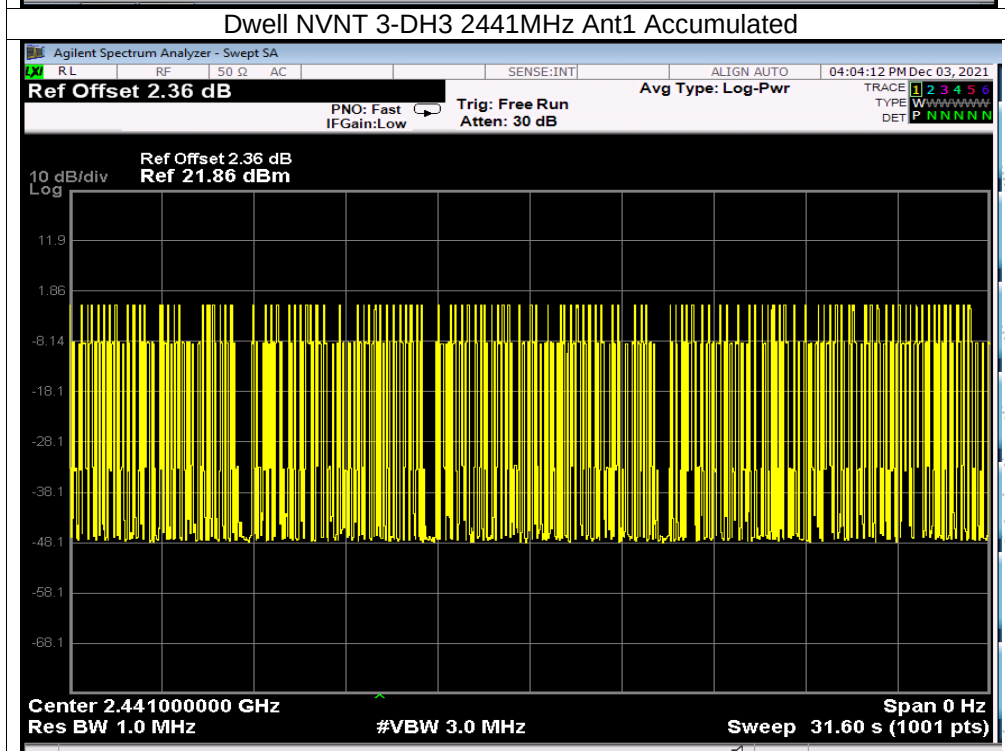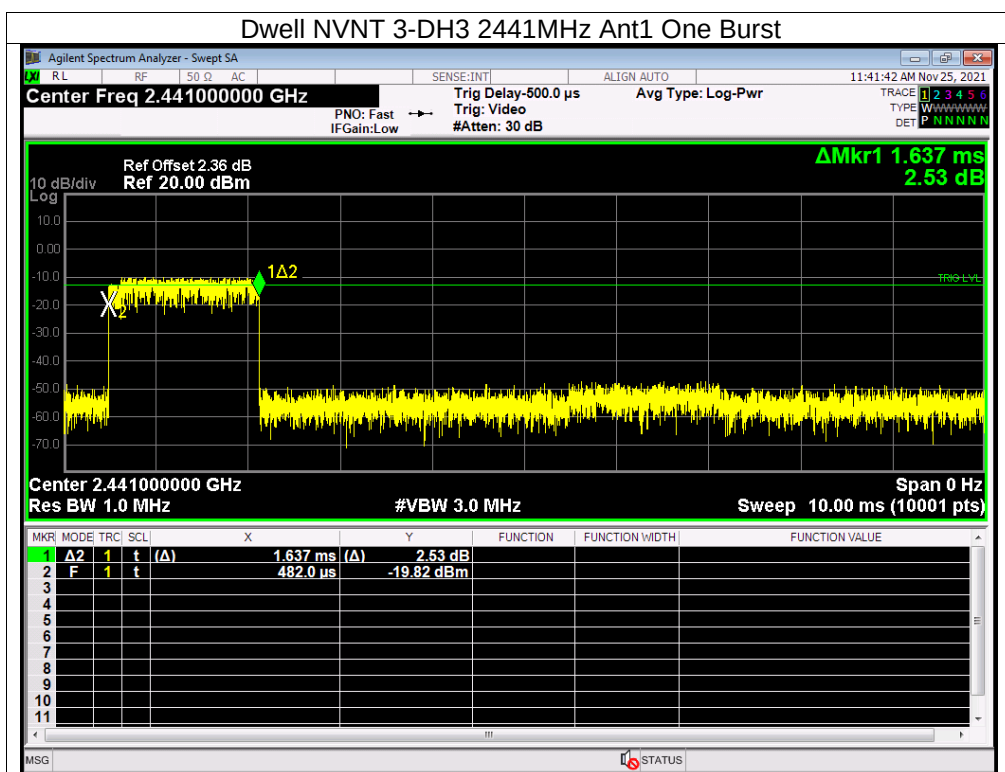

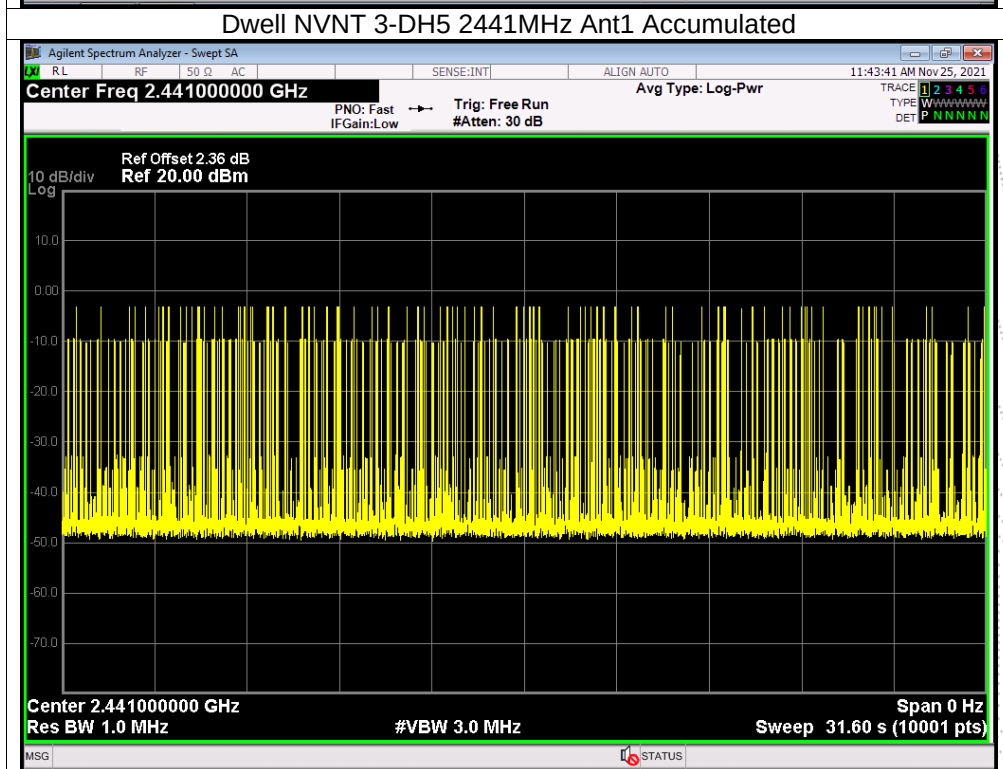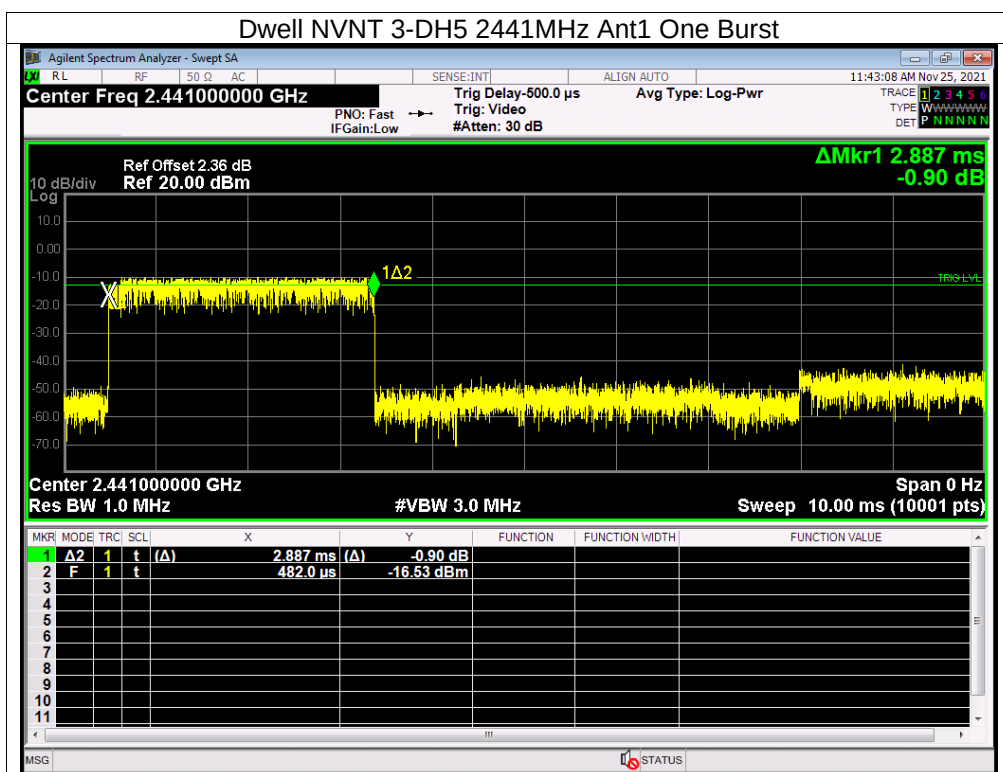


15. Antenna Requirement

15.1 Limit

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


15.2 Test Result

The EUT antenna is PCB antenna, fulfill the requirement of this section.

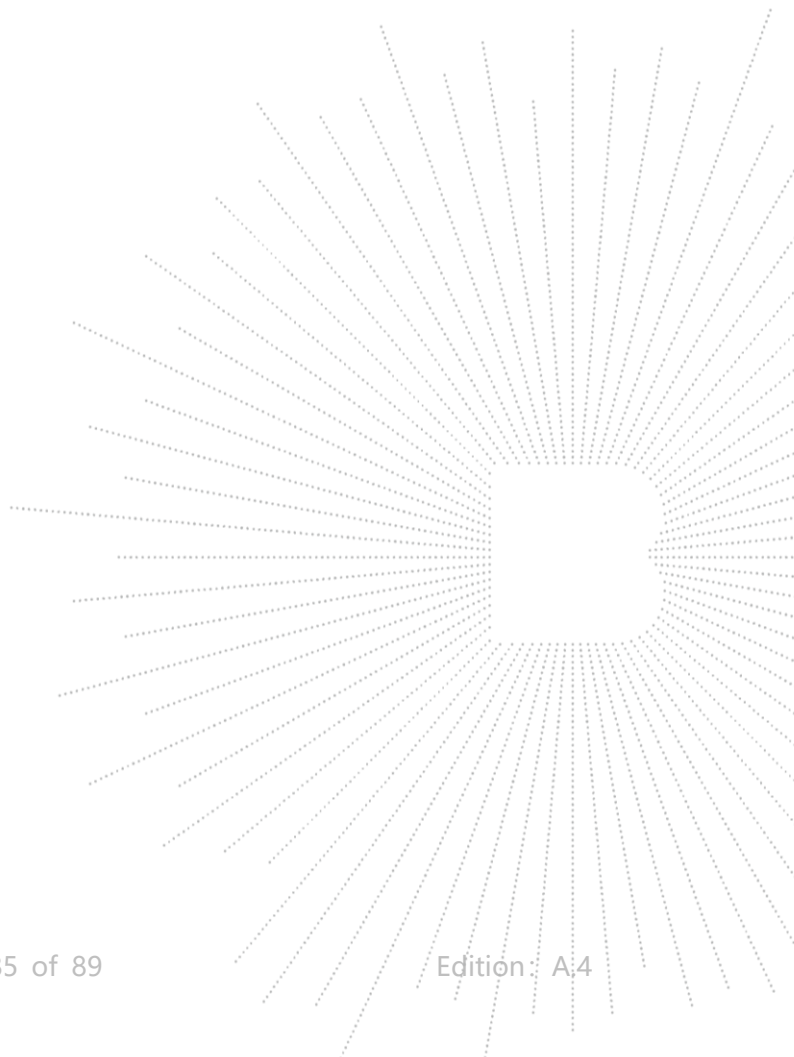


16. EUT Photographs

EUT Photo 1

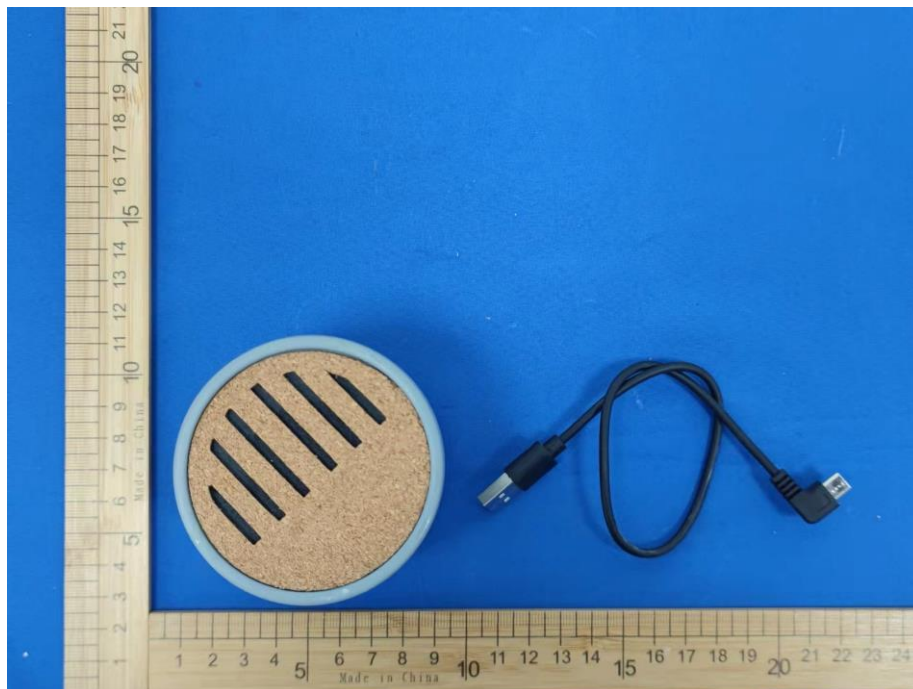

EUT Photo 2

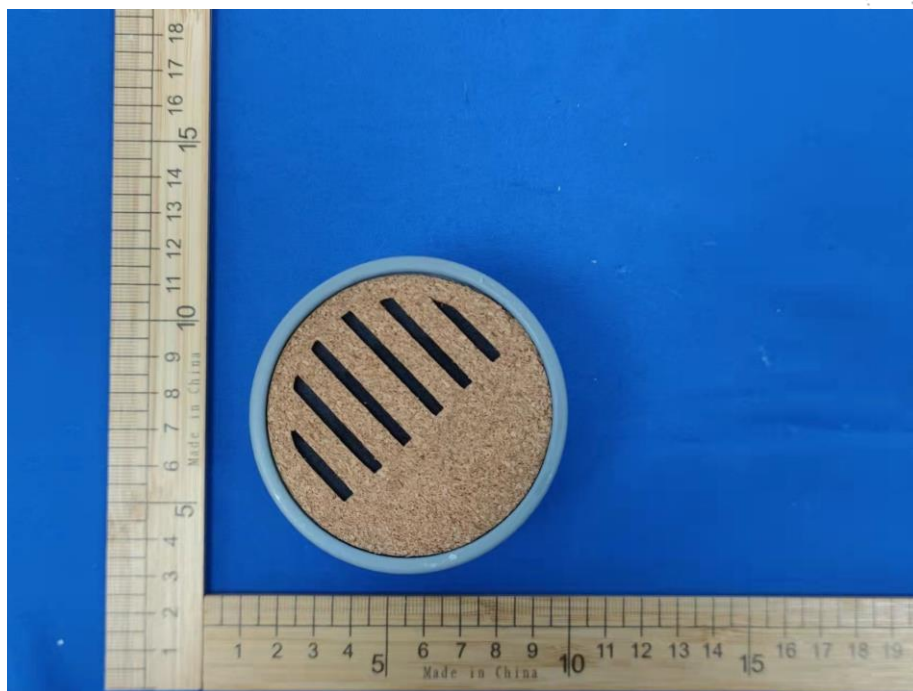


17. EUT Test Setup Photographs

Conducted Measurement Photos



Radiated Measurement Photos

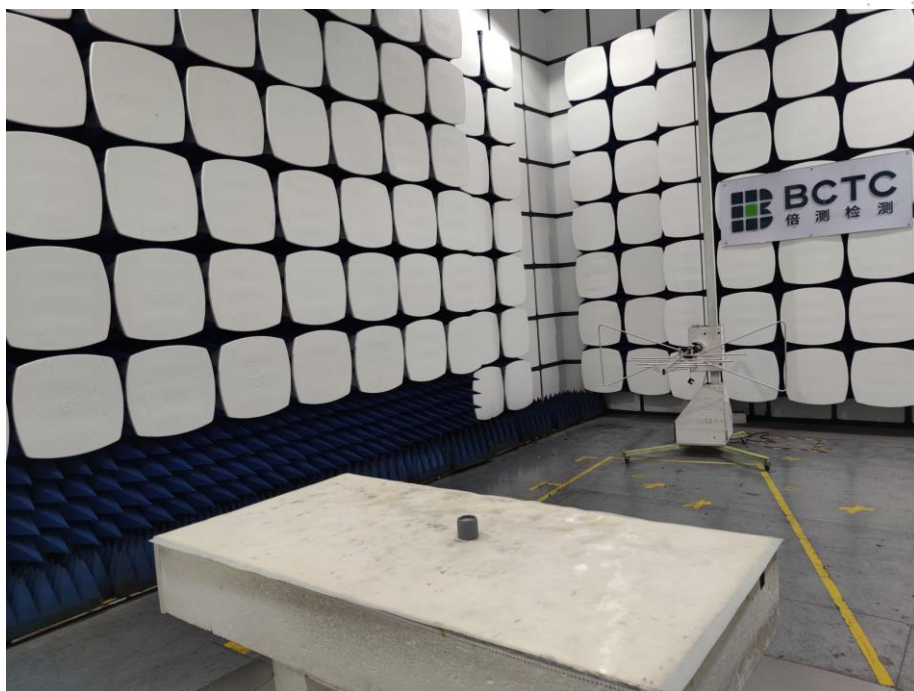



STATEMENT

- 1.The equipment lists are traceable to the national reference standards.
- 2.The test report can not be partially copied unless prior written approval is issued from our lab.
- 3.The test report is invalid without stamp of laboratory.
- 4.The test report is invalid without signature of person(s) testing and authorizing.
- 5.The test process and test result is only related to the Unit Under Test.
- 6.The quality system of our laboratory is in accordance with ISO/IEC17025.
- 7.If there is any objection to report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: <http://www.chnbctc.com>

E-Mail: bctc@bctc-lab.com.cn

******* END *******