

# SAR EVALUATION REPORT

For

# Telecell Mobile (H.K) Ltd.

RM 801 Metro Ctr II, 21 Lam Hing Street, Kln Bay, Hong Kong

**FCC ID: 2ADX301** 

Report Type:
Original Report

Report Number:
RESZ161222003-20

Report Date:
2017-03-07
Oscar Ye
Engineer

Prepared By:
Bay Area Compliance Laboratories Corp. (Kunshan)
No.248 Chenghu Road, Kunshan, Jiangsu province, China
Tel: +86-0512-86175000
Fax: +86-0512-88934268
www.baclcorp.com.cn

Attestation of Test Results							
	EUT Description	Mobile Phone					
<b>131</b> 1/15	Model Number	Tested model : O1 Multiple model : Orbit					
EUT Information	FCC ID	2ADX3O1					
	Serial Number	16122200321					
	Test Date	2017-02-15 ~ 2017-02-19					
MO	DE	Max. SAR Level(s) Reported(W/Kg)	Limit (W/Kg)				
GG2.5.0.50	1g Head SAR	0.33					
GSM 850	1g Body SAR	0.39					
DCG 1000	1g Head SAR	0.21					
PCS 1900	1g Body SAR	0.85					
WCDMA D12	1g Head SAR	0.29					
WCDMA Band 2	1g Body SAR	1.25	1.6				
WCDMA Dand 5	1g Head SAR	0.32					
WCDMA Band 5	1g Body SAR	0.33					
	1g Head SAR	0.63					
Simultaneous	1g Body SAR	1.40					
	1g Body SAR	1.40 (Hotspot)					
Applicable Standards	Electromagnetic Filed ANSI / IEEE C95.3 IEEE Recommended Electromagnetic Field GHz. FCC 47 CFR part 2 Radiofrequency radia IEEE1528:2013 IEEE Recommended Absorption Rate (SA Measurement Techni IEC 62209-2:2010	afety Levels with Respect to Human Exposure to Rads, 3 kHz to 300 GHz.  : 2002  Practice for Measurements and Computations of Rads With Respect to Human Exposure to SuchFields, 1093  ation exposure evaluation: portable devices  Practice for Determining the Peak Spatial-Average R) in the Human Head from Wireless Communicating the Peak Spatial-Average R) in the Human Head from Wireless Communicating the Peak Spatial-Average R) in the Human Head from Wireless Communicating the Peak Spatial-Average R) in the Human Head from Wireless Communicating the Peak Spatial-Average R) in the Human Head from Wireless Communicating the Peak Spatial-Average R) in the Human Head from Wireless Communicating the Peak Spatial-Average R) in the Human Head from Wireless Communicating the Peak Spatial-Average R) in the Human Head from Wireless Communicating the Peak Spatial-Average R) in the Human Head from Wireless Communicating the Peak Spatial-Average R) in the Human Head from Wireless Communicating the Peak Spatial-Average R) in the Human Head from Wireless Communicating the Peak Spatial-Average R) in the Human Head from Wireless Communicating the Peak Spatial-Average R) in the Human Head from Wireless Communicating the Peak Spatial-Average R) in the Human Head from Wireless Communicating the Peak Spatial-Average R) in the Human Head from Wireless Communicating the Peak Spatial-Average R) in the Human Head from Wireless Communicating the Peak Spatial-Average R) in the Human Head from Wireless Communicating the Peak Spatial-Average R) in the Human Head from Wireless Communicating the Peak Spatial-Average R) in the Human Head from Wireless Communicating the Peak Spatial-Average R) in the Human Head from Wireless Communicating the Peak Spatial-Average R) in the Human Head from Wireless Communicating the Peak Spatial-Average R) in the Human Head from Wireless Communicating the Peak Spatial-Average R) in the Human Head from Wireless Communicating the Peak Spatial-Average R) in the Human Head from Wireless Communicating the Peak Spatial-	adio Frequency 100 kHz—300 Specific ions Devices:				
Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices-Human models, instrumentation, and procedures-Part 2: Proced to determine the specific absorption rate (SAR) for wireless communication devices use close proximity to the human body (frequency range of 30 MHz to 6 GHz)  KDB procedures  KDB 447498 D01 General RF Exposure Guidance v06  KDB 648474 D04 Handset SAR v01r03  KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04  KDB 865664 D02 RF Exposure Reporting v01r02  KDB 941225 D01 3G SAR Procedures v03r01  KDB 941225 D06 Hotspot Mode v02r01							

Report No: RSZ161222003-20

**Note:** This wireless device has been shown to be capable of compliance for localized specific absorption rate (SAR) for General Population/Uncontrolled Exposure limits specified in ANSI/IEEE Standards and has been tested in accordance with the measurement procedures specified in IEEE 1528-2013 and RF exposure KDB procedures.

The results and statements contained in this report pertain only to the device(s) evaluated.

SAR Evaluation Report 2 of 51

# **TABLE OF CONTENTS**

DOCUMENT REVISION HISTORY	4
EUT DESCRIPTION	5
TECHNICAL SPECIFICATION	5
REFERENCE, STANDARDS, AND GUILDELINES	6
SAR LIMITS	7
FACILITIES	8
DESCRIPTION OF TEST SYSTEM	9
EQUIPMENT LIST AND CALIBRATION	14
EQUIPMENTS LIST & CALIBRATION INFORMATION	
SAR MEASUREMENT SYSTEM VERIFICATION	15
Liquid Verification	17
EUT TEST STRATEGY AND METHODOLOGY	
TEST POSITIONS FOR DEVICE OPERATING NEXT TO A PERSON'S EAR	
CHEEK/TOUCH POSITION	
EAR/TILT POSITION	23
TEST POSITIONS FOR BODY-WORN AND OTHER CONFIGURATIONS  TEST DISTANCE FOR SAR EVALUATION	
SAR EVALUATION PROCEDURE	
TEST METHODOLOGY	25
CONDUCTED OUTPUT POWER MEASUREMENT	26
PROVISION APPLICABLE	
TEST PROCEDURE	
MAXIMUM TARGET OUTPUT POWER	29
TEST RESULTS:	30
SAR MEASUREMENT RESULTS	
SAR TEST DATA	
SAR MEASUREMENT VARIABILITY	38
SAR SIMULTANEOUS TRANSMISSION DESCRIPTION	39
SAR PLOTS	43
APPENDIX A MEASUREMENT UNCERTAINTY	44
APPENDIX B EUT TEST POSITION PHOTOS	46
Liquid depth ≥ 15cm	
BODY(WORN) BACK SETUP PHOTO(10MM)	
BODY LEFT SETUP PHOTO(10MM)BODY RIGHT SETUP PHOTO(10MM)	
BODY BOTTOM SETUP PHOTO(10MM)	48
HEAD LEFT CHEEK SETUP PHOTO.	
HEAD LEFT TILT SETUP PHOTO	
HEAD RIGHT TILT SETUP PHOTO	
APPENDIX C CALIRDATION CERTIFICATES	51

## **DOCUMENT REVISION HISTORY**

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	RSZ161222003-20	Original Report	2017-03-07

Report No: RSZ161222003-20

SAR Evaluation Report 4 of 51

#### **EUT DESCRIPTION**

This report has been prepared on behalf of *Telecell Mobile (H.K) Ltd.* and their product *Mobile Phone*, Tested Model: *O1*, FCC ID: *2ADX3O1* or the EUT (Equipment under Test) as referred to in the rest of this report.

Report No: RSZ161222003-20

Notes: This series products model: O1 and Orbit are identical; they have the identical schematics, only named differently. Model O1 was selected for fully testing, the detailed information can be referred to the declaration which was stated and guaranteed by the applicant.

\*All measurement and test data in this report was gathered from production sample serial number: 16122200321 (Assigned by BACL, Kunshan). The EUT supplied by the applicant was received on 2016-12-22.

#### **Technical Specification**

Device Type:	Portable	
Exposure Category:	Population / Uncontrolled	
Antenna Type(s):	Internal Antenna	
Body-Worn Accessories:	Headset	
Face-Head Accessories:	None	
	GSM Voice, GPRS Data, WCDMA( R99 (Voice+Data), HSUPA, HSDPA )	
Operation Mode :	WLAN	
	Bluetooth	
Frequency Band:	GSM 850: 824-849 MHz(TX); 869-894 MHz(RX) PCS 1900: 1850-1910 MHz(TX); 1930-1990 MHz(RX) WCDMA Band 2: 1850-1910 MHz(TX); 1930-1990 MHz(RX) WCDMA Band 5: 824-849 MHz(TX); 869-894 MHz(RX) WLAN: 2412 -2462 MHz Bluetooth: 2402 MHz-2480 MHz	
Conducted RF Power:	GSM 850 : 33.32 dBm PCS 1900: 28.53 dBm WCDMA Band 2: 22.40 dBm WCDMA Band 5: 22.64 dBm WLAN: 8.15 dBm Bluetooth(BDR/EDR): 5.34 dBm	
Dimensions (L*W*H):	125.7 mm (L) × 65.6 mm (W) × 10.8 mm (H)	
Power Source:	urce: 3.7 VDC Rechargeable Battery	
Normal Operation:	Head and Body-worn	

SAR Evaluation Report 5 of 51

### REFERENCE, STANDARDS, AND GUILDELINES

#### FCC:

The Report and Order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g as recommended by the ANSI/IEEE standard C95.1-1992 [6] for an uncontrolled environment (Paragraph 65). According to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

Report No: RSZ161222003-20

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in North America is 1.6 mW/g average over 1 gram of tissue mass.

#### CE:

The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 2 mW/g as recommended by EN62209-1 for an uncontrolled environment. According to the Standard, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in Europe is 2 mW/g average over 10 gram of tissue mass.

The test configurations were laid out on a specially designed test fixture to ensure the reproducibility of measurements. Each configuration was scanned for SAR. Analysis of each scan was carried out to characterize the above effects in the device.

SAR Evaluation Report 6 of 51

#### **SAR Limits**

#### **FCC Limit**

Report No: RSZ161222003-20

	SAR (W/kg)				
EXPOSURE LIMITS	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)			
Spatial Average (averaged over the whole body)	0.08	0.4			
Spatial Peak (averaged over any 1 g of tissue)	1.60	8.0			
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0			

#### **CE Limit**

	SAR (W/kg)					
	(General Population /	(Occupational /				
EXPOSURE LIMITS	Uncontrolled Exposure	Controlled Exposure				
	Environment)	Environment)				
Spatial Average (averaged over the whole body)	0.08	0.4				
Spatial Peak (averaged over any 10 g of tissue)	2.0	10				
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0				

Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

General Population/Uncontrolled environments Spatial Peak limit 1.6W/kg (FCC) & 2 W/kg (CE) applied to the EUT.

SAR Evaluation Report 7 of 51

### **FACILITIES**

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Report No: RSZ161222003-20

SAR Evaluation Report 8 of 51


### **DESCRIPTION OF TEST SYSTEM**

These measurements were performed with the automated near-field scanning system DASY5 from Schmid & Partner Engineering AG (SPEAG) which is the Fifth generation of the system shown in the figure hereinafter:



### **DASY5 System Description**

The DASY5 system for performing compliance tests consists of the following items:

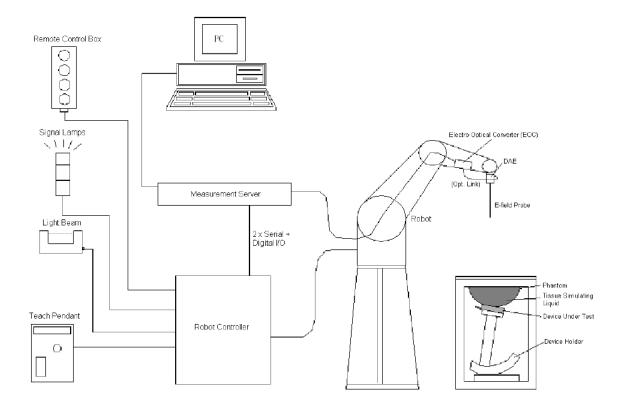

SAR Evaluation Report 9 of 51

- A standard high precision 6-axis robot (Staubli TX=RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal application, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7 professional operating system and the DASY52 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

#### **DASY5 Measurement Server**

The DASY5 measurement server is based on a PC/104 CPU board with a 400MHz Intel ULV Celeron, 128MB chip-disk and 128MB RAM. The necessary circuits for communication with the DAE4 (or DAE3) electronics box, as well as the 16 bit AD-converter system for optical detection and digital I/O interface are contained on the DASY5 I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all real-time data evaluation of field measurements and surface detection, controls robot movements and handles safety operation. The PC operating system cannot interfere with these time critical



processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with an expansion port which is reserved for future applications. Please note that this expansion port does not have a standardized point out, and therefore only devices provided by SPEAG can be connected. Devices from any other supplier could seriously damage the measurement server.

#### **Data Acquisition Electronics**

The data acquisition electronics (DAE4) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

The input impedance of both the DAE4 as well as of the DAE3 box is 200MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

SAR Evaluation Report 10 of 51

#### **EX3DV4 E-Field Probes**

Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	$\pm$ 0.3 dB in TSL (rotation around probe axis) $\pm$ 0.5 dB in TSL (rotation normal to probe axis)
Dynamic Range	10 $\mu$ W/g to > 100 mW/g Linearity: $\pm$ 0.2 dB (noise: typically < 1 $\mu$ W/g)
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.
Compatibility	DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI

#### **SAM Twin Phantom**

The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region, where shell thickness

increases to 6 mm). The phantom has three measurement areas:

- \_ Left hand
- Right hand
- Flat phantom

The phantom table for the DASY systems based on the TX90XL and RX160L robots have the size of 100 x 50 x 85 cm (L x W x H).

The phantom table for the compact DASY systems based on the RX60L robot have the size of 100 x 75 x 91 cm (L x W x H); these tables are reinforced for mounting of the robot onto the table.

For easy dislocation these tables have fork lift cut outs at the bottom.

The bottom plate contains three pairs of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. Only one device holder is necessary if two phantoms are used (e.g., for different liquids)

A white cover is provided to cover the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on top of this phantom cover are possible. Three reference marks are provided on the phantom counter. These reference marks are used to teach the absolute phantom position relative to the robot.



SAR Evaluation Report 11 of 51

#### **Triple Flat Phantom**

The SAM twin phantom is a fiberglass shell phantom with  $2mm(\pm 0.2 \text{ mm})$  shell thickness. The phantom shell is compatible with SPEAG tissue simulating liquids (sugar and oil based). Use of other liquids may render the phantom warranty void (see note or consult SPEAG support).

The phantom table for the DASY systems based on the TX90XL and RX160L robots have the size of 100 x 50 x 85 cm (L x W x H).

The phantom table for the compact DASY systems based on the RX60L robot have the size of 100 x 75 x 91 cm (L x W x H);

these tables are reinforced for mounting of the robot onto the table.

For easy dislocation these tables have fork lift cut outs at the bottom.

The bottom plate contains three pairs of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. Only one device holder is necessary if two phantoms are used (e.g., for different liquids)



Report No: RSZ161222003-20

A white cover is provided to cover the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on top of this phantom cover are possible. Three reference marks are provided on the phantom counter. These reference marks are used to teach the absolute phantom position relative to the robot.

#### Robots

The DASY5 system uses the high precision industrial robots TX90XL from Staubli SA (France). The TX robot family is the successor of the well known RX robot family and offers the same features important for our application:

- High precision (repeatability 0.02mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements (brushless synchrony motors; no stepper motors)
- Low ELF interference (motor control fields shielded via the closed metallic construction shields)

The above mentioned robots are controlled by the Staubli CS8c robot controllers. All information regarding the use and maintenance of the robot arm and the robot controller is contained on the CDs delivered along with the robot. Paper manuals are available upon request direct from Staubli.

#### **Area Scans**

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 15mm 2 step integral, with 1.5mm interpolation used to locate the peak SAR area used for zoom scan assessments.

Where the system identifies multiple SAR peaks (which are within 25% of peak value) the system will provide the user with the option of assessing each peak location individually for zoom scan averaging.

SAR Evaluation Report 12 of 51

#### **Zoom Scan (Cube Scan Averaging)**

The averaging zoom scan volume utilized in the DASY5 software is in the shape of a cube and the side dimension of a 1 g or 10 g mass is dependent on the density of the liquid representing the simulated tissue. A density of 1000 kg/m³ is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1g cube is 10mm, with the side length of the 10g cube is 21.5mm.

Report No: RSZ161222003-20

When the cube intersects with the surface of the phantom, it is oriented so that 3 vertices touch the surface of the shell or the center of a face is tangent to the surface. The face of the cube closest to the surface is modified in order to conform to the tangent surface.

The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications (including FCC) utilize a physical step of 7 x7 x 7 (5mmx5mmx5mm) providing a volume of 30 mm in the X & Y & Z axis.

#### **Tissue Dielectric Parameters for Head and Body Phantoms**

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

#### Recommended Tissue Dielectric Parameters for Head and Body

Frequency	Head	Tissue	Body	y Tissue
(MHz)	εr	O'(S/m)	εr	O' (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800-2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

SAR Evaluation Report 13 of 51

# **EQUIPMENT LIST AND CALIBRATION**

# **Equipments List & Calibration Information**


Equipment	Model S/N		Calibration Date	Calibration Due Date
Robot	RX90	D03688	N/A	N/A
DASY5 Test Software	DASY52.8	N/A	N/A	N/A
DASY5 Measurement Server	DASY5 4.5.12	1567	N/A	N/A
Data Acquisition Electronics	DAE3	379	2016/10/04	2017/10/03
E-Field Probe	EX3DV4	7431	2016/10/04	2017/10/03
Dipole, 835 MHz	D835V2	453	2015/08/17	2018/08/16
Dipole, 1900 MHz	D1900V2	5d206	2015/07/14	2018/07/13
R&S, universal Radio Communication Tester	CMU200	110605	2016/11/25	2017/11/24
Wideband Radio Communication Tester	CMW500 1201.002K50-116218-UY		2016/10/8	2017/10/7
Mounting Device	MD4HHTV5	BJPCTC0152	N/A	N/A
Twin SAM	Twin SAM V5.0	1412	N/A	N/A
Triple Flat Phantom 5.1C	QD 000 P51 CA	1130	N/A	N/A
Simulated Tissue 835 MHz Head	TS-835-H	1610083501	Each Time	/
Simulated Tissue 835 MHz Body	TS-835-B	1610083502	Each Time	/
Simulated Tissue 1900 MHz Head	TS-1900-H	1610190001	Each Time	/
Simulated Tissue 1900 MHz Body	TS-1900-B	1610190002	Each Time	/
Network Analyzer	8753B	2625A00809	2016/10/6	2017/10/5
S-Parameter Test Set	85047A	3033A02428	2016/10/6	2017/10/5
Dielectric probe kit	85070B	US33020324	2016/6/13	2017/6/12
Signal Generator	SMBV100A	261558	2016/7/4	2017/7/4
Power Meter	E4419B	MY41291878	2017/1/7	2018/1/6
Power Meter Sensor	8481A	2702A68993	2016/5/30	2017/5/29
Power Amplifier	10S1G4M1	18060	N/A	N/A
Directional Coupler	488Z	N/A	N/A	N/A
Attenuator	20dB, 100W	N/A	N/A	N/A
Attenuator	3dB, 150W	N/A	N/A	N/A

Report No: RSZ161222003-20

SAR Evaluation Report 14 of 51

### SAR MEASUREMENT SYSTEM VERIFICATION

### **Liquid Verification**

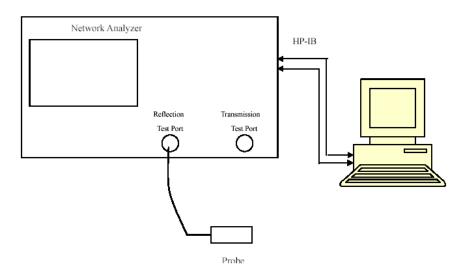

Report No: RSZ161222003-20

Liquid Verification Setup Block Diagram

### **Liquid Verification Results**

Frequency Liquid Tomo		-	-		8		lta 6)	Tolerance
(MHz)	Liquid Type	ε <sub>r</sub>	O' (S/m)	$\epsilon_{ m r}$	O' (S/m)	$\Delta \epsilon_{ m r}$	ΔΟ΄ (S/m)	(%)
1850.2	Simulated Tissue 1900 MHz Body	52.665	1.517	53.3	1.52	-1.19	-0.2	±5
1852.4	Simulated Tissue 1900 MHz Body	52.554	1.519	53.3	1.52	-1.4	-0.07	±5
1880	Simulated Tissue 1900 MHz Body	52.093	1.542	53.3	1.52	-2.26	1.45	±5
1900	Simulated Tissue 1900 MHz Body	52.169	1.57	53.3	1.52	-2.12	3.29	±5
1907.6	Simulated Tissue 1900 MHz Body	52.12	1.57	53.3	1.52	-2.21	3.29	±5
1909.8	Simulated Tissue 1900 MHz Body	52.115	1.573	53.3	1.52	-2.22	3.49	±5

<sup>\*</sup>Liquid Verification above was performed on 2017/02/15.

Frequency Liquid Time		Liquid Parameter		Target Value		Delta (%)		Tolerance
(MHz)	Liquid Type	ε <sub>r</sub>	O' (S/m)	$\epsilon_{ m r}$	O' (S/m)	$\Delta \epsilon_{ m r}$	ΔΟ΄ (S/m)	(%)
1850.2	Simulated Tissue 1900 MHz Head	38.514	1.387	40	1.4	-3.71	-0.93	±5
1852.4	Simulated Tissue 1900 MHz Head	38.508	1.397	40	1.4	-3.73	-0.21	±5
1880	Simulated Tissue 1900 MHz Head	38.217	1.415	40	1.4	-4.46	1.07	±5
1900	Simulated Tissue 1900 MHz Head	38.245	1.436	40	1.4	-4.39	2.57	±5
1907.6	Simulated Tissue 1900 MHz Head	38.208	1.441	40	1.4	-4.48	2.93	±5
1909.8	Simulated Tissue 1900 MHz Head	38.205	1.438	40	1.4	-4.49	2.71	±5

<sup>\*</sup>Liquid Verification above was performed on 2017/02/15.

SAR Evaluation Report 15 of 51

Frequency Liquid Type		Liquid Parameter		Target Value		Delta (%)		Tolerance
(MHz)	Liquid Type	$\epsilon_{ m r}$	O' (S/m)	$\epsilon_{ m r}$	O' (S/m)	$\Delta \epsilon_{ m r}$	ΔΟ΄ (S/m)	(%)
824.2	Simulated Tissue 835 MHz Body	53.77	0.978	55.24	0.97	-2.66	0.82	±5
826.4	Simulated Tissue 835 MHz Body	53.825	0.979	55.23	0.97	-2.54	0.93	±5
835	Simulated Tissue 835 MHz Body	54.174	0.997	55.2	0.97	-1.86	2.78	±5
836.6	Simulated Tissue 835 MHz Body	54.134	0.999	55.2	0.97	-1.93	2.99	±5
846.6	Simulated Tissue 835 MHz Body	54.3	1.006	55.16	0.98	-1.56	2.65	±5
848.8	Simulated Tissue 835 MHz Body	54.067	0.988	55.16	0.99	-1.98	-0.2	±5

<sup>\*</sup>Liquid Verification above was performed on 2017/02/19.

Frequency	Liquid Tuno	Liquid Parameter		Target Value		Delta (%)		Tolerance
(MHz)	Liquid Type	ε <sub>r</sub>	O' (S/m)	$\epsilon_{ m r}$	O' (S/m)	$\Delta \epsilon_{ m r}$	ΔΟ΄ (S/m)	(%)
824.2	Simulated Tissue 835 MHz Head	40.142	0.889	41.56	0.9	-3.41	-1.22	±5
826.4	Simulated Tissue 835 MHz Head	40.243	0.887	41.54	0.9	-3.12	-1.44	±5
835	Simulated Tissue 835 MHz Head	40.505	0.907	41.5	0.9	-2.4	0.78	±5
836.6	Simulated Tissue 835 MHz Head	40.472	0.905	41.5	0.9	-2.48	0.56	±5
846.6	Simulated Tissue 835 MHz Head	40.614	0.913	41.5	0.91	-2.13	0.33	±5
848.8	Simulated Tissue 835 MHz Head	40.403	0.897	41.5	0.91	-2.64	-1.43	±5


<sup>\*</sup>Liquid Verification above was performed on 2017/02/19.

SAR Evaluation Report 16 of 51

### **System Accuracy Verification**

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of  $\pm 10\%$ . The validation results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

### **System Verification Setup Block Diagram**

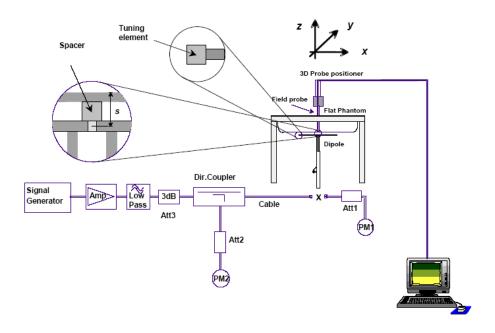

#### **System Accuracy Check Results**

Date	Frequency Band	Liquid Type	Measured SAR (W/Kg)		Target Value(W/Kg)	Delta (%)	Tolerance (%)
2017/02/19	835	835MHz Head	1g	9.86	9.43	4.56	±10
2017/02/19	835	835MHz Body	1g	9.55	9.55	0.00	±10
2017/02/15	1900	1900MHz Head	1g	39.2	40.7	-3.69	±10
2017/02/15	1900	1900MHz Body	1g	40.7	40.8	-0.25	±10

SAR Evaluation Report 17 of 51

#### SAR SYSTEM VALIDATION DATA

#### System Performance 835 MHz Head

DUT: D835V2; Type: 835 MHz; Serial: 453

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: f = 835 MHz;  $\sigma = 0.907$  S/m;  $\varepsilon_r = 40.505$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

#### DASY5 Configuration:

Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;

• Sensor-Surface: 1.4mm (Mechanical Surface Detection)

• Electronics: DAE3 Sn379; Calibrated: 2016/10/4

• Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1412

• Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 10.7 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 100.1 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 15.1 W/kg

SAR(1 g) = 9.86 W/kg; SAR(10 g) = 6.37 W/kg

Maximum value of SAR (measured) = 10.7 W/kg

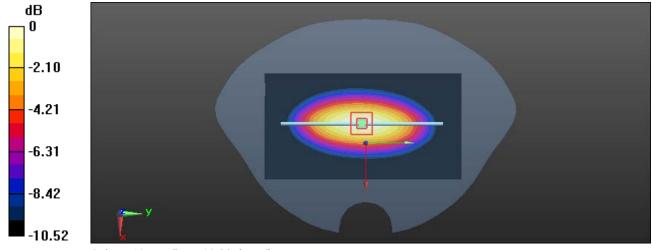

0 dB = 10.7 W/kg = 10.29 dBW/kg

SAR Evaluation Report 18 of 51

#### System Performance 835 MHz Body

#### D UT: D835V2; Type: 835 MHz; Serial: 453

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: f = 835 MHz;  $\sigma = 0.997$  S/m;  $\varepsilon_r = 54.174$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

#### DASY5 Configuration:

Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE3 Sn379; Calibrated: 2016/10/4

Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130

Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 12.2 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 104.6 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 14.5 W/kg

SAR(1 g) = 9.55 W/kg; SAR(10 g) = 6.28 W/kg

Maximum value of SAR (measured) = 12.5 W/kg

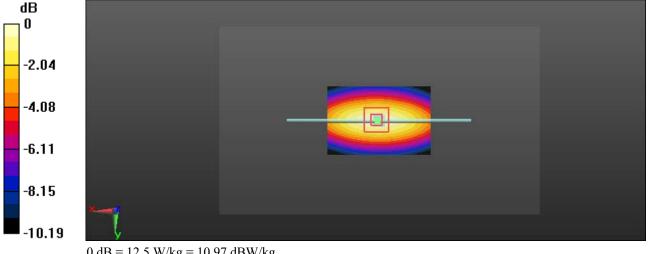

0 dB = 12.5 W/kg = 10.97 dBW/kg

SAR Evaluation Report 19 of 51

#### System Performance 1900 MHz Head

#### DUT: D1900V2; Type: 1900 MHz; Serial: 5d206

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: f = 1900 MHz;  $\sigma = 1.436 \text{ S/m}$ ;  $\varepsilon_r = 38.245$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### DASY5 Configuration:

• Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;

• Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE3 Sn379; Calibrated: 2016/10/4

• Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1412

• Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 46.6 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 167.8 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 75.5 W/kg

SAR(1 g) = 39.2 W/kg; SAR(10 g) = 20.4 W/kg

Maximum value of SAR (measured) = 45.7 W/kg

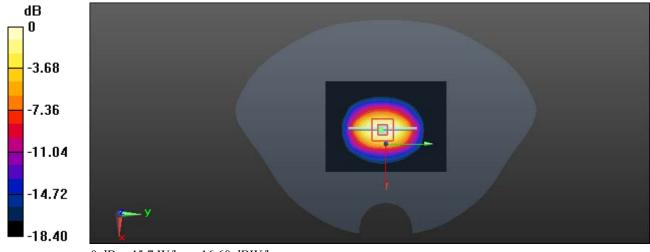

0 dB = 45.7 W/kg = 16.60 dBW/kg

SAR Evaluation Report 20 of 51

#### System Performance 1900 MHz Body

#### DUT: D1900V2; Type: 1900 MHz; Serial: 5d206

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: f = 1900 MHz;  $\sigma = 1.57 \text{ S/m}$ ;  $\varepsilon_r = 52.169$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Left Section

#### DASY5 Configuration:

• Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;

• Sensor-Surface: 1.4mm (Mechanical Surface Detection)

• Electronics: DAE3 Sn379; Calibrated: 2016/10/4

• Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130

• Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 48.3 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 168.4 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 75.8 W/kg

SAR(1 g) = 40.7 W/kg; SAR(10 g) = 21.5 W/kg

Maximum value of SAR (measured) = 46.5 W/kg

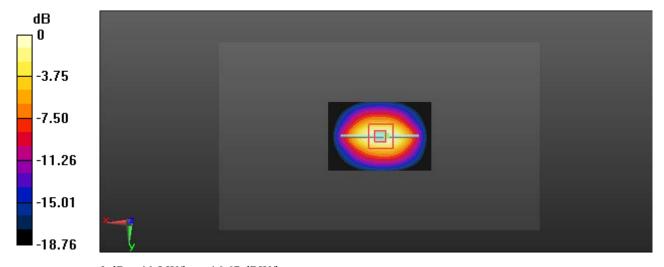

0 dB = 46.5 W/kg = 16.67 dBW/kg


SAR Evaluation Report 21 of 51


#### **EUT TEST STRATEGY AND METHODOLOGY**

#### Test Positions for Device Operating Next to a Person's Ear

This category includes most wireless handsets with fixed, retractable or internal antennas located toward the top half of the device, with or without a foldout, sliding or similar keypad cover. The handset should have its earpiece located within the upper ¼ of the device, either along the centerline or off-centered, as perceived by its users. This type of handset should be positioned in a normal operating position with the "test device reference point" located along the "vertical centerline" on the front of the device aligned to the "ear reference point". The "test device reference point" should be located at the same level as the center of the earpiece region. The "vertical centerline" should bisect the front surface of the handset at its top and bottom edges. A "ear reference point" is located on the outer surface of the head phantom on each ear spacer. It is located 1.5 cm above the center of the ear canal entrance in the "phantom reference plane" defined by the three lines joining the center of each "ear reference point" (left and right) and the tip of the mouth.

A handset should be initially positioned with the earpiece region pressed against the ear spacer of a head phantom. For the SCC-34/SC-2 head phantom, the device should be positioned parallel to the "N-F" line defined along the base of the ear spacer that contains the "ear reference point". For interim head phantoms, the device should be positioned parallel to the cheek for maximum RF energy coupling. The "test device reference point" is aligned to the "ear reference point" on the head phantom and the "vertical centerline" is aligned to the "phantom reference plane". This is called the "initial ear position". While maintaining these three alignments, the body of the handset is gradually adjusted to each of the following positions for evaluating SAR:



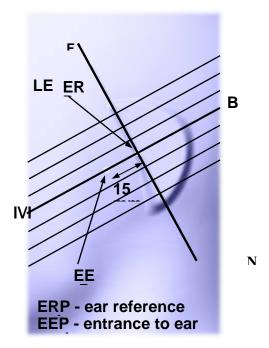

Report No: RSZ161222003-20

SAR Evaluation Report 22 of 51

#### **Cheek/Touch Position**

The device is brought toward the mouth of the head phantom by pivoting against the "ear reference point" or along the "N-F" line for the SCC-34/SC-2 head phantom.

This test position is established:


When any point on the display, keypad or mouthpiece portions of the handset is in contact with the phantom.

Report No: RSZ161222003-20

(or) When any portion of a foldout, sliding or similar keypad cover opened to its intended self-adjusting normal use position is in contact with the cheek or mouth of the phantom.

For existing head phantoms – when the handset loses contact with the phantom at the pivoting point, rotation should continue until the device touches the cheek of the phantom or breaks its last contact from the ear spacer.

#### **Cheek / Touch Position**

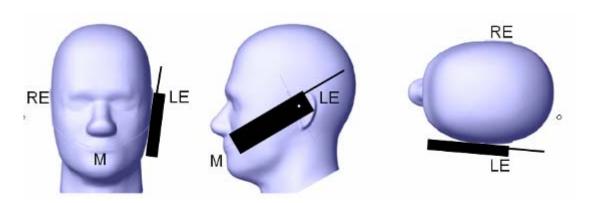

#### **Ear/Tilt Position**


With the handset aligned in the "Cheek/Touch Position":

- 1) If the earpiece of the handset is not in full contact with the phantom's ear spacer (in the "Cheek/Touch position") and the peak SAR location for the "Cheek/Touch" position is located at the ear spacer region or corresponds to the earpiece region of the handset, the device should be returned to the "initial ear position" by rotating it away from the mouth until the earpiece is in full contact with the ear spacer.
- 2) (otherwise) The handset should be moved (translated) away from the cheek perpendicular to the line passes through both "ear reference points" (note: one of these ear reference points may not physically exist on a split head model) for approximate 2-3 cm. While it is in this position, the device handset is tilted away from the mouth with respect to the "test device reference point" until the inside angle between the vertical centerline on the front surface of the phone and the horizontal line passing through the ear reference point is by 15 80°. After the tilt, it is then moved (translated) back toward the head perpendicular to the line passes through both "ear reference points" until the device touches the phantom or the ear spacer. If the antenna touches the head first, the positioning process should be repeated with a tilt angle less than 15° so that the device and its antenna would touch the phantom simultaneously. This test position may require a device holder or positioner to achieve the translation and tilting with acceptable positioning repeatability.

If a device is also designed to transmit with its keypad cover closed for operating in the head position, such positions should also be considered in the SAR evaluation. The device should be tested on the left and right side of the head phantom in the "Cheek/Touch" and "Ear/Tilt" positions. When applicable, each configuration should be tested with the antenna in its fully extended and fully retracted positions. These test configurations should be tested at the high, middle and low frequency channels of each operating mode; for example, AMPS, CDMA, and TDMA. If the SAR measured at the middle channel for each test configuration (left, right, Cheek/Touch, Tilt/Ear, extended and retracted) is at least 2.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s). If the transmission band of the test device is less than 10 MHz, testing at the high and low frequency channels is optional.

SAR Evaluation Report 23 of 51

#### Ear /Tilt 15° Position

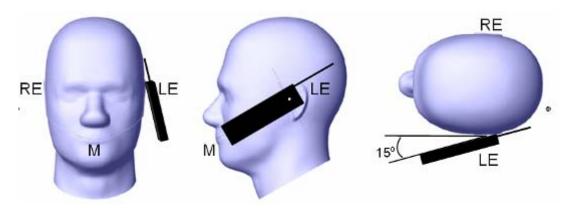

#### Test positions for body-worn and other configurations

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a headset output should be tested with a headset connected to the device. When multiple accessories that do not contain metallic components are supplied with the device, the device may be tested with only the accessory that dictates the closest spacing to the body. When multiple accessories that contain metallic components are supplied with the device, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (e.g., the same metallic belt-clip used with different holsters with no other metallic components), only the accessory that dictates the closest spacing to the body must be tested.

Body-worn accessories may not always be supplied or available as options for some devices that are intended to be authorized for body-worn use. A separation distance of 1.5 cm between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances. Other separation distances may be used, but they should not exceed 2.5 cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

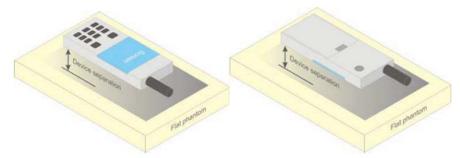


Figure 5 - Test positions for body-worn devices

#### **Test Distance for SAR Evaluation**

For this case the EUT(Equipment Under Test) is set 10mm away from the phantom, the test distance is 10mm.

SAR Evaluation Report 24 of 51

#### **SAR Evaluation Procedure**

The evaluation was performed with the following procedure:

Step 1: Measurement of the SAR value at a fixed location above the ear point or central position was used as a reference value for assessing the power drop. The SAR at this point is measured at the start of the test and then again at the end of the testing.

Report No: RSZ161222003-20

Step 2: The SAR distribution at the exposed side of the head was measured at a distance of 4 mm from the inner surface of the shell. The area covered the entire dimension of the head or radiating structures of the EUT, the horizontal grid spacing was 15 mm x 15 mm, and the SAR distribution was determined by integrated grid of 1.5mm x 1.5mm. Based on these data, the area of the maximum absorption was determined by spline interpolation. The first Area Scan covers the entire dimension of the EUT to ensure that the hotspot was correctly identified.

Step 3: Around this point, a volume of 30 mm x 30 mm x 30 mm was assessed by measuring 7x 7 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:

- 1) The data at the surface were extrapolated, since the center of the dipoles is 1.2 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
- 2) The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one dimensional splines with the "Not a knot"-condition (in x, y and z-directions). The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the averages.

All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement of the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation was repeated.

#### Test methodology

KDB 447498 D01 General RF Exposure Guidance v06

KDB 648474 D04 Handset SAR v01r03

KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04

KDB 865664 D02 RF Exposure Reporting v01r02

KDB 941225 D01 3G SAR Procedures v03r01

KDB 941225 D06 Hotspot Mode v02r01

SAR Evaluation Report 25 of 51

#### CONDUCTED OUTPUT POWER MEASUREMENT


#### **Provision Applicable**

The measured peak output power should be greater and within 5% than EMI measurement.

#### **Test Procedure**

The RF output of the transmitter was connected to the input of the EMI Test Receiver through sufficient attenuation.

Report No: RSZ161222003-20

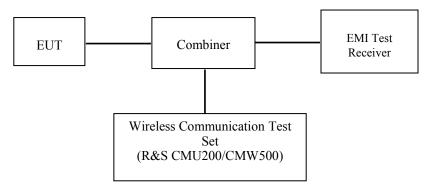

GSM/WCDMA/LTE

### **Radio Configuration**

The power measurement was configured by the Wireless Communication Test Set.

#### **GSM/GPRS/EGPRS**

Function: Menu select > GSM Mobile Station > GSM 850/1900

Press Connection control to choose the different menus

Press RESET > choose all the reset all settings

Connection Press Signal Off to turn off the signal and change settings

Network Support > GSM + GPRS or GSM + EGSM

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off

MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting

- > Slot configuration > Uplink/Gamma
- > 33 dBm for GPRS 850
- > 30 dBm for GPRS 1900
- > 27 dBm for EGPRS 850
- > 26 dBm for EGPRS 1900

BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset > + 0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stabe)

BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0 > 4 dB

Slot Config > Unchanged (if already set under MS signal)

TCH > choose desired test channel

Hopping > Off

Main Timeslot > 3

Network Coding Scheme > CS4 (GPRS) and MCS5 (EGPRS)

Bit Stream > 2E9-1 PSR Bit Stream

AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

SAR Evaluation Report 26 of 51

Connection Press Signal on to turn on the signal and change settings

#### **WCDMA Release 99**

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification. The EUT has a nominal maximum output power of 24dBm (+1.7/-3.7).

Report No: RSZ161222003-20

	Loopback Mode	Test Mode 1
WCDMA	Rel99 RMC	12.2kbps RMC
General Settings	Power Control Algorithm	Algorithm2
	$\beta_c/\beta_d$	8/15

#### **HSDPA**

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSDPA	HSDPA	HSDPA	HSDPA		
	Subset	1	2	3	4		
	Loopback Mode			Test Mode	1		
	Rel99 RMC		1	12.2kbps RM	IC		
	HSDPA FRC			H-Set1			
WCDMA	Power Control Algorithm			Algorithm2	2		
General	$\beta_{\rm c}$	2/15	12/15	15/15	15/15		
Settings	$\beta_{d}$	15/15	15/15	8/15	4/15		
	$\beta_d(SF)$	64					
	$\beta_{\rm c}/\beta_{\rm d}$	2/15	12/15	15/8	15/4		
	$eta_{ m hs}$	4/15	24/15	30/15	30/15		
	MPR(dB)	0	0	0.5	0.5		
	DACK			8			
	DNAK			8			
HSDPA	DCQI			8			
Specific	Ack-Nack repetition			3			
Settings	factor	3					
Settings	CQI Feedback	4ms 2					
	CQI Repetition Factor						
	Ahs=βhs/ βc			30/15			

SAR Evaluation Report 27 of 51

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

Report No: RSZ161222003-20

	Mode	HSUPA	HSUPA	HSUPA	HSUPA	HSUPA			
	Subset	1	2	3	4	5			
	Loopback Mode								
	Rel99 RMC	12.2kbps RMC							
	HSDPA FRC	H-Set1							
	HSUPA Test	HSUPA Loopback							
	Power Control			Algorithm2					
WCDMA	Algorithm		T		T				
General	$\beta_{\rm c}$	11/15	6/15	15/15	2/15	15/15			
Settings	$\beta_d$	15/15	15/15	9/15	15/15	0			
	$eta_{ m ec}$	209/225	12/15	30/15	2/15	5/15			
	$\beta_c/\beta_d$	11/15	6/15	15/9	2/15	-			
	$\beta_{hs}$	22/15	12/15	30/15	4/15	5/15			
	CM(dB)	1.0	3.0	2.0	3.0	1.0			
	MPR(dB)	0	2	1	2	0			
	DACK			8					
	DNAK			8					
	DCQI			8					
HSDPA	Ack-Nack			3					
Specific	repetition factor								
Settings	CQI Feedback			4ms					
	CQI Repetition			2					
	Factor								
	Ahs= $\beta_{hs}/\beta_{c}$		T	30/15	T				
	DE-DPCCH	6	8	8	5	7			
	DHARQ	0	0	0	0	0			
	AG Index	20	12	15	17	21			
	ETFCI	75	67	92	71	81			
	Associated Max	242.1	174.9	482.8	205.8	308.9			
	UL Data Rate kbps		17 1.5	102.0	200.0	300.9			
HSUPA Specific Settings	Reference E_FCls	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27		E-TFCI 11 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI PO27				

SAR Evaluation Report 28 of 51

# **Maximum Target Output Power**

	Max Target Power(dBm)							
M. J./D J	Channel							
Mode/Band	Low	Middle	High					
GSM 850	32.6	32.6	32.6					
GPRS 1 TX Slot	33.4	33.4	33.4					
GPRS 2 TX Slot	31.2	31.2	31.2					
GPRS 3 TX Slot	29.4	29.4	29.4					
GPRS 4 TX Slot	27.8	27.8	27.8					
PCS 1900	28.6	28.6	28.6					
GPRS 1 TX Slot	28.3	28.3	28.3					
GPRS 2 TX Slot	26	26	26					
GPRS 3 TX Slot	24.5	24.5	24.5					
GPRS 4 TX Slot	22.6	22.6	22.6					
WCDMA Band 2	22.5	22.5	22.5					
HSDPA	21.4	21.4	21.4					
HSUPA	21.5	21.5	21.5					
WCDMA Band 5	22.7	22.7	22.7					
HSDPA	21.8	21.8	21.8					
HSUPA	21.9	21.9	21.9					
WLAN(802.11b)	8.5	8.5	8.5					
WLAN(802.11g)	8.5	8.5	8.5					
WLAN(802.11n HT20)	8.5	8.5	8.5					
Bluetooth BDR/EDR	5.5	5.5	5.5					

Report No: RSZ161222003-20

SAR Evaluation Report 29 of 51

#### **Test Results:**

#### GSM:

Dand	Channel No	Frequency	RF Output Power
Band	Channel No.	(MHz)	(dBm)
	128	824.2	32.48
GSM 850	190	836.6	32.50
	251	848.8	32.19
	512	1850.2	28.53
PCS 1900	661	1880	28.41
	810	1909.8	28.49

Report No: RSZ161222003-20

#### **GPRS**:

Band	Channel Frequency		RF Output Power (dBm)				
Danu	No.	(MHz)	1 slot	2 slots	3 slots	4 slots	
	128	824.2	33.29	31.11	29.31	27.73	
GSM 850	190	836.6	33.32	30.94	29.15	27.67	
	251	848.8	33.15	30.90	29.08	27.42	
	512	1850.2	28.13	25.86	24.25	22.46	
PCS 1900	661	1880	28.11	25.85	24.35	22.39	
	810	1909.8	28.20	25.82	24.44	22.41	

For SAR, the time based average power is relevant, the difference in between depends on the duty cycle of the TDMA signal.

Number of Time slot	1	2	3	4
Duty Cycle	1:8	1:4	1:2.66	1:2
Time based Ave. power compared to slotted Ave. power	-9 dB	-6 dB	-4.25 dB	-3 dB
Crest Factor	8	4	2.66	2

#### The time based average power for GPRS

Dand	Channel	Frequency	Time based average Power (dBm)				
Band	No.	(MHz)	1 slot	2 slot	3 slots	4 slots	
	128	824.2	24.29	25.11	25.06	24.73	
GSM 850	190	836.6	24.32	24.94	24.9	24.67	
	251	848.8	24.15	24.9	24.83	24.42	
	512	1850.2	19.13	19.86	20	19.46	
PCS 1900	661	1880	19.11	19.85	20.1	19.39	
	810	1909.8	19.2	19.82	20.19	19.41	

SAR Evaluation Report 30 of 51

#### Note:

- 1. Rohde & Schwarz Radio Communication Tester (CMU200) was used for the measurement of GSM peak and average output power for active timeslots.
- 2 .For GSM voice, 1 timeslot has been activated with power level 5 (850 MHz band) and 0 (1900 MHz band).

Report No: RSZ161222003-20

- 3 .For GPRS, 1, 2, 3 and 4 timeslots has been activated separately with power level 3(850 MHz band) and 3(1900 MHz band).
- 4. According to KDB941225D01-SAR for EGPRS mode are not required when the source-based time-averaged output power for data mode is lower than that in the normal GPRS mode.

#### **WCDMA:**

#### Results (12.2kbps RMC)

Band	Frequency (MHz)	RF Output Power (dBm)
WCDMA Band 2	1852.4	22.40
	1880	22.10
	1907.6	21.95
	826.4	22.51
WCDMA Band 5	836.6	22.64
	846.6	22.57

#### **Results (HSDPA)**

Dand	Frequency	RF Output Power (dBm)					
Band	(MHz)	Subset 1	Subset 2	Subset 3	Subset 4		
	1852.4	21.23	21.30	21.03	21.25		
WCDMA Band 2	1880	21.03	20.96	20.92	20.85		
	1907.6	21.12	21.10	21.09	21.16		
WCDMA Band 5	826.4	21.58	21.59	21.73	21.54		
	836.6	21.53	21.54	21.42	21.52		
	846.6	21.42	21.52	21.44	21.48		

#### **Results (HSUPA)**

Dand	Frequency		(dBm)			
Band	(MHz)	Subset 1	Subset 2	Subset 3	Subset 3         Subset 4           20.96         21.13           20.98         20.91           21.04         20.94           21.48         21.45           21.53         21.47           21.80         21.78	Subset 5
WCDMA Band 2	1852.4	21.28	21.38	20.96	21.13	21.25
	1880	20.99	20.99	20.98	20.91	20.90
	1907.6	21.16	21.00	21.04	20.94	20.95
	826.4	21.65	21.72	21.48	21.45	21.68
WCDMA Band 5	836.6	21.46	21.47	21.53	21.47	21.76
	846.6	21.66	21.81	21.80	21.78	21.78

SAR Evaluation Report 31 of 51

#### Note:

- 1. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in Test Loop Model 1.
- 2. KDB 941225 D01-Body SAR is not required for HSDPA/HSUPA when the maximum average output of each RF channel is less than ¼ dB higher than measured 12.2kbps RMC or the maximum SAR for 12.2kbps RMC is < 75% of SAR limit.

#### WLAN:

Mode	Channel frequency (MHz)	RF Output Power (dBm)
	2412	7.37
802.11b	2437	7.97
	2462	7.83
	2412	7.32
802.11g	2437	8.01
	2462	7.53
002.11	2412	7.31
802.11b 2412 2437 2462 2412 802.11g 2437 2462	8.15	
11120	2462	7.88

**Note:** The output power was tested under data rate 1Mbps for 802.11b, 6Mbps for 802.11g, and MCS0 for 802.11n HT20.

#### **Bluetooth:**

Mode	Channel frequency (MHz)	RF Output Power (dBm)		
	2402	2.52		
BDR(GFSK)	2441	2.57		
	2480	3.08		
	2402	4.08		
EDR(4-DQPSK)	2441	4.15		
	2480	4.82		
	2402	4.58		
EDR(8-DPSK)	2441	4.82		
	2480	5.34		

SAR Evaluation Report 32 of 51

## SAR MEASUREMENT RESULTS

This page summarizes the results of the performed dosimetric evaluation.

Report No: RSZ161222003-20

### **SAR Test Data**

#### **Environmental Conditions**

Temperature:	21.5-22.3 ℃	22.2-23.8 °C
Relative Humidity:	48 %	51 %
ATM Pressure:	1021 mbar	1007 mbar
Test Date:	2017/02/15	2017/02/19

Testing was performed by Edison Hu, Zack Huang, Peter Lee.

SAR Evaluation Report 33 of 51

Report No: RSZ161222003-20

#### **GSM 850:**

DITT	F	T4	Power	Max.	Max.	1g SAR (W/Kg)			
EUT Position	Frequency (MHz)	Test Mode	Drift (dB)	Meas. Power (dBm)	Rated Power (dBm)	Scaled Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	824.2	GSM	/	/	/	/	/	/	/
	836.6	GSM	-0.11	32.5	32.6	1.023	0.327	0.33	1#
	848.8	GSM	/	/	/	/	/		/
	824.2	GSM	/	/	/	/	/	/	/
Head Left Tilt	836.6	GSM	0.09	32.5	32.6	1.023	0.151	0.15	2#
	848.8	GSM	/	/	/	/	/	Scaled SAR  / 0.33  / 0.15  / 0.26  / 0.13  / 0.39  / 0.39  / 0.20	/
	824.2	GSM	/	/	/	/	/	/	/
Head Right Cheek	836.6	GSM	-0.16	32.5	32.6	1.023	0.253	0.26	3#
	848.8	GSM	/	/	/	/	/	Scaled SAR  /	/
	824.2	GSM	/	/	/	/	/	+	/
Head Right Tilt	836.6	GSM	0.08	32.5	32.6	1.023	0.123	0.13	4#
	848.8	GSM	/	/	/	/	/	Scaled SAR  / 0.33  / 0.15  / 0.26  / 0.13  / 0.39  / 0.20  / 0.10  / 0.13	/
	824.2	GSM	/	/	/	/	/	/	/
Body Worn Back (10mm)	836.6	GSM	0.01	32.5	32.6	1.023	0.378	0.39	5#
(1011111)	848.8	GSM	/	/	/	/	/	Scaled SAR  / 0.33  / 0.15  / 0.26  / 0.13  / 0.39  / 0.39  / 0.30  / 0.10  / 0.13	/
	824.2	GPRS	/	/	/	/	/	/	/
Body Back (10mm)	836.6	GPRS	0.02	30.94	31.2	1.062	0.364	0.39	6#
(1011111)	848.8	GPRS	/	/	/	/	/	/	/
	824.2	GPRS	/	/	/	/	/	/	/
Body Left (10mm)	836.6	GPRS	-0.05	30.94	31.2	1.062	0.193	0.20	7#
(Tollill)	848.8	GPRS	/	/	/	/	/	Scaled SAR  / 0.33  / 0.15  / 0.26  / 0.13  / 0.39  / 0.39  / 0.30  / 0.10  / 0.13	/
	824.2	GPRS	/	/	/	/	/	/	/
Body Right (10mm)	836.6	GPRS	-0.04	30.94	31.2	1.062	0.096	0.10	8#
(1011111)	848.8	GPRS	/	/	/	/	/	SAR	/
	824.2	GPRS	/	/	/	/	/	/	/
Body Bottom (10mm)	836.6	GPRS	-0.04	30.94	31.2	1.062	0.121	0.13	9#
(1011111)	848.8	GPRS	/	/	/	/	0.151	/	

#### Note:

- 1. When the 1-g SAR is  $\leq$  0.8W/Kg, testing for other channels are optional.
- 2. The EUT transmit and receive through the same GSM antenna while testing SAR.
- 3. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
- 4. When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel must be used.
- 5. The Multi-slot Classes of EUT is Class 12 which has maximum 4 Downlink slots and 4 Uplink slots, the maximum active slots is 5, when perform the multiple slots scan, 3DL+2UL is the worst case.

SAR Evaluation Report 34 of 51

#### **GSM 1900:**

EUT	E	Tank	Power	Max.	Max. Rated	1g SAR (W/Kg)			
Position	Frequency (MHz)	Test Mode	Drift (dB)	Meas. Power (dBm)	Power (dBm)	Scaled Factor	Meas. SAR	Scaled SAR	Plot
	1850.2	GSM	/	/	/	/	/	/	/
Head Left Cheek	1880	GSM	-0.19	28.41	28.6	1.045	0.124	0.13	10#
	1909.8	GSM	/	/	/	/	/	S. Scaled SAR PI  /	/
	1850.2	GSM	/	/	/	/	/	/	/
Head Left Tilt	1880	GSM	-0.17	28.41	28.6	1.045	0.056	0.06	11#
	1909.8	GSM	/	/	/	/	/	Scaled SAR  / 0.13  / 0.06  / 0.21  / 0.06  / 0.66  0.83  0.85  / 0.70  / 0.03  / / 0.04  / / / / / / / / / / / / / / / / / /	/
	1850.2	GSM	/	/	/	/	/	/	/
Head Right Cheek	1880	GSM	0.19	28.41	28.6	1.045	0.204	0.21	12#
	1909.8	GSM	/	/	/	/	/	Scaled SAR	/
	1850.2	GSM	/	/	/	/	/	/	/
Head Right Tilt	1880	GSM	0.05	28.41	28.6	1.045	0.053	0.06	13#
	1909.8	GSM	/	/	/	/	/	0.06 / 0.66 0.83	/
	1850.2	GSM	-0.19	28.53	28.6	1.016	0.646	0.66	14#
Body Worn Back (10mm)	1880	GSM	0.07	28.41	28.6	1.045	0.796	0.83	15#
(1011111)	1909.8	GSM	0.06	28.49	28.6	1.026	0.833	0.85	16#
	1850.2	GPRS	/	/	/	/	/	/	/
Body Back (10mm)	1880	GPRS	0.02	24.35	24.5	1.035	0.672	0.70	17#
(1011111)	1909.8	GPRS	/	/	/	/	/	/	/
	1850.2	GPRS	/	/	/	/	/	/	/
Body Left (10mm)	1880	GPRS	-0.01	24.35	24.5	1.035	0.033	0.03	18#
(1011111)	1909.8	GPRS	/	/	/	/	/	/	/
	1850.2	GPRS	/	/	/	/	/	/	/
Body Right (10mm)	1880	GPRS	-0.09	24.35	24.5	1.035	0.036	0.04	19#
(1911111)	1909.8	GPRS	/	/	/	/	/	SAR  / 0.13  / 0.06  / 0.21  / 0.06  / 0.66  0.83  0.85  / 0.70  / 0.03  / 0.04  / 0.40	/
	1850.2	GPRS	/	/	/	/	/	/	/
Body Bottom (10mm)	1880	GPRS	-0.08	24.35	24.5	1.035	0.383	0.40	20#
(======)	1909.8	GPRS	/	/	/	/	0.796	/	/

#### Note:

- 1. When the 1-g SAR is  $\leq$  0.8W/Kg, testing for other channels are optional.
- 2. The EUT transmit and receive through the same GSM antenna while testing SAR.
- 3. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
- 4. When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel must be used.
- 5. The Multi-slot Classes of EUT is Class 12 which has maximum 4 Downlink slots and 4 Uplink slots, the maximum active slots is 5, when perform the multiple slots scan, 2DL+3UL is the worst case.

SAR Evaluation Report 35 of 51

### WCDMA Band 2:

EUT	E	T4	Power	Max.	Max.	1g SAR (W/Kg)			
Position	Frequency (MHz)	Test Mode	Drift (dB)	Meas. Power (dBm)	Rated Power (dBm)	Scaled Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	1852.4	RMC	/	/	/	/	/	/	/
	1880	RMC	0.04	22.1	22.5	1.096	0.187	0.21	21#
	1907.6	RMC	/	/	/	/	Meas.   Scaled   SAR	/	
	1852.4	RMC	/	/	/	/	/	/	/
Head Left Tilt	1880	RMC	0.17	22.1	22.5	1.096	0.078	0.09	22#
	1907.6	RMC	/	/	/	/	/	Scaled SAR  / 0.21  / 0.09  / 0.29  / 0.09  / 0.09  / 0.09  / 0.07  / 0.10  / 0.72	/
	1852.4	RMC	/	/	/	/	/	/	/
Head Right Cheek	1880	RMC	-0.10	22.1	22.5	1.096	0.263	0.29	23#
Troud raight Check	1907.6	RMC	/	/	/	/	/	/	/
	1852.4	RMC	/	/	/	/	/	/	/
Head Right Tilt	1880	RMC	0.01	22.1	22.5	1.096	0.084	0.09	24#
	1907.6	RMC	/	/	/	/	/	Scaled SAR  / 0.21  / 0.09  / 0.29  / 0.09  / 1.04 1.25 1.21  / 0.07  / 0.10  / 0.72 0.96	/
	1852.4	RMC	0.04	22.4	22.5	1.023	1.02	1.04	25#
Body Back (10mm)	1880	RMC	0.13	22.1	22.5	1.096	1.14	1.25	26#
(10mm)	1907.6	RMC	0.02	21.95	22.5	1.135	1.07	1.21	27#
	1852.4	RMC	/	/	/	/	/	/	/
Body Left (10mm)	1880	RMC	-0.01	22.1	22.5	1.096	0.062	0.07	28#
(1011111)	1907.6	RMC	/	/	/	/	/	SAR	/
	1852.4	RMC	/	/	/	/	/	/	/
Body Right (10mm)	1880	RMC	-0.02	22.1	22.5	1.096	0.093	0.10	29#
(1011111)	1907.6	RMC	/	/	/	/	/	Scaled SAR  / 0.21  / 0.09  / 0.29  / 0.09  / 1.04 1.25 1.21  / 0.07  / 0.10  / 0.72 0.96	/
	1852.4	RMC	-0.14	22.4	22.5	1.023	0.705	0.72	30#
Body Bottom (10mm)	1880	RMC	-0.12	22.1	22.5	1.096	0.879	0.96	31#
(1011111)	1907.6	RMC	-0.05	21.95	22.5	1.135	0.819	0.93	32#

SAR Evaluation Report 36 of 51

#### **WCDMA Band 5:**

EUT	Eugguenes	Test	Power	Max. Meas.	Max. Rated	1g SAR (W/Kg)				
Position	Frequency (MHz)	Mode	Drift (dB)	Power (dBm)	Power (dBm)	Scaled Factor	Meas. SAR	Scaled SAR	Plot	
	826.4	RMC	/	/	/	/	/	/	/	
Head Left Cheek	836.6	RMC	0.12	22.64	22.7	1.014	0.311	0.32	33#	
	846.6	RMC	/	/	/	/	/	/	/	
	826.4	RMC	/	/	/	/	/	/	/	
Head Left Tilt	836.6	RMC	-0.02	22.64	22.7	1.014	0.140	0.14	34#	
	846.6	RMC	/	/	/	/	/	/	/	
	826.4	RMC	/	/	/	/	/	/	/	
Head Right Cheek	836.6	RMC	0.09	22.64	22.7	1.014	0.247	0.25	35#	
	846.6	RMC	/	/	/	/	/	/	/	
	826.4	RMC	/	/	/	/	/	/	/	
Head Right Tilt	836.6	RMC	0.05	22.64	22.7	1.014	0.120	0.12	36#	
	846.6	RMC	/	/	/	/	/	/	/	
	826.4	RMC	/	/	/	/	/	/	/	
Body Back (10mm)	836.6	RMC	-0.11	22.64	22.7	1.014	0.328	0.33	37#	
(1011111)	846.6	RMC	/	/	/	/	/	/	/	
	826.4	RMC	/	/	/	/	/	/	/	
Body Left (10mm)	836.6	RMC	-0.03	22.64	22.7	1.014	0.196	0.20	38#	
(1011111)	846.6	RMC	/	/	/	/	/	/	/	
	826.4	RMC	/	/	/	/	/	/	/	
Body Right (10mm)	836.6	RMC	-0.15	22.64	22.7	1.014	0.100	0.10	39#	
(1011111)	846.6	RMC	/	/	/	/	/	/	/	
	826.4	RMC	/	/	/	/	/	/	/	
Body Bottom (10mm)	836.6	RMC	0.01	22.64	22.7	1.014	0.126	0.13	40#	
(10.1111)	846.6	RMC	/	/	/	/	/	/	/	

### Note:

- 1. When the 1-g SAR is  $\leq$  0.8W/Kg, testing for other channels are optional.
- 2. The EUT transmit and receive through the same antenna while testing SAR.
- 3. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in Test Loop Model.
- 4. KDB 941225 D01-Body SAR is not required for HSDPA/HSUPA/HSPA+ when the maximum average output of each RF channel is less than  $\frac{1}{4}$  dB higher than measured 12.2kbps RMC or the maximum SAR for 12.2kbps RMC is < 75% of SAR limit.
- 5. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.

SAR Evaluation Report 37 of 51

### **SAR Measurement Variability**

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz v01. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results

Report No: RSZ161222003-20

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg.
- When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is  $\ge 1.45$  W/kg ( $\sim 10\%$  from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

### The Highest Measured SAR Configuration in Each Frequency Band

#### Head

			Meas. SA	Largest to	
Frequency Band	Freq.(MHz)	EUT Position	Original	Repeated	Smallest SAR Ratio
/	/	/	/	/	/

### Body

			Meas. SA	Largest to		
Frequency Band	requency Band Freq.(MHz) EUT Position		Original	Repeated	Smallest SAR Ratio	
(1810-2000 MHz) WCDMA Band 2	1880	Body Back	1.14	1.05	1.09	


#### Note:

- 1. Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20.
- 2. The measured SAR results **do not** have to be scaled to the maximum tune-up tolerance to determine if repeated measurements are required.
- 3. SAR measurement variability must be assessed for each frequency band, which is determined by the **SAR probe calibration point and tissue-equivalent medium** used for the device measurements..

SAR Evaluation Report 38 of 51

## SAR SIMULTANEOUS TRANSMISSION DESCRIPTION

### **Antennas Location:**

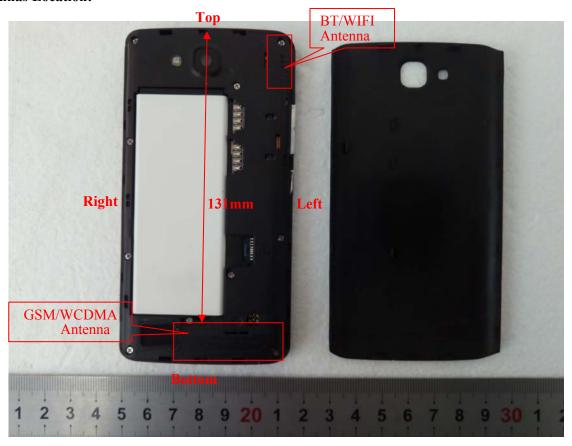

### **Simultaneous Transmission:**

Description of Simultaneous Transmit Capabilities								
Transmitter Combination	Simultaneous?	Hotspot?						
GSM + WCDMA	×	×						
GSM + Bluetooth	√	×						
GSM + WLAN	√	√						
WCDMA + Bluetooth	√	×						
WCDMA + WLAN	√	√						

**SAR Evaluation Report** 39 of 51

#### Standalone SAR test exclusion considerations

Mode	Frequency (MHz)	Pavg (dBm)	Pavg (mW)	Distance (mm)	Calculated value	Threshold (1-g)	SAR Test Exclusion
WLAN	2462	8.5	7.08	0	2.2	3	YES
Bluetooth	2480	5.5	3.55	0	1.1	3	YES

Report No: RSZ161222003-20

#### NOTE:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq$  50 mm are determined by:

[( max. power of channel, including tune-up tolerance, mW )/( min. test separation distance, mm)]

 $[\sqrt{f(GHz)}] \le 3.0$  for 1-g SAR and  $\le 7.5$  for 10-g extremity SAR, where

- 1. f(GHz) is the RF channel transmit frequency in GHz.
- 2. Power and distance are rounded to the nearest mW and mm before calculation.
- 3. The result is rounded to one decimal place for comparison.
- 4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

#### **Standalone SAR estimation:**

Mode	Frequency (MHz)	Pavg (dBm)	Pavg (mW)	Distance (mm)	Estimated 1-g (W/kg)
WLAN Head	2462	8.5	7.08	0	0.30
WLAN Body	2462	8.5	7.08	10	0.15
BT Head	2480	5.5	3.55	0	0.15
BT Body	2480	5.5	3.55	10	0.08

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

[( max. power of channel, including tune-up tolerance , mW)/( min. test separation distance,mm)]  $\cdot$  [ $\sqrt{f(GHz)/x}$  ]

W/kg for test separation distances ≤50 mm;

where x = 7.5 for 1-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion

SAR Evaluation Report 40 of 51

Mode(CAD1+CAD2)	Position	Reported S	Reported SAR(W/kg)			
Mode(SAR1+SAR2)	r ostuon	SAR1	SAR2	1.6W/kg		
	Head Left Cheek	0.33	0.15	0.48		
	Head Left Tilt	0.15	0.15	0.30		
	Head Right Cheek	0.26	0.15	0.41		
	Head Right Tilt	0.13	0.15	0.28		
GSM 850+Bluetooth	Body Worn Back	0.39	0.08	0.47		
	Body Back	0.39	0.08	0.47		
	Body Left	0.20	0.08	0.28		
	Body Right	0.10	0.08	0.18		
	Body Bottom	0.13	0.08	0.21		
	Head Left Cheek	0.13	0.15	0.28		
	Head Left Tilt	0.06	0.15	0.21		
	Head Right Cheek	0.21	0.15	0.36		
	Head Right Tilt	0.06	0.15	0.21		
PCS1900 +Bluetooth	Body Worn Back	0.85	0.08	0.93		
	Body Back	0.70	0.08	0.78		
	Body Left	0.03	0.08	0.11		
	Body Right	0.04	0.08	0.12		
	Body Bottom	0.40	0.08	0.48		
	Head Left Cheek	0.21	0.15	0.36		
	Head Left Tilt	0.09	0.15	0.24		
	Head Right Cheek	0.29	0.15	0.44		
WCDMA Band	Head Right Tilt	0.09	0.15	0.24		
2+Bluetooth	Body Back	1.25	0.08	1.33		
	Body Left	0.07	0.08	0.15		
	Body Right	0.10	0.08	0.18		
	Body Bottom	0.96	0.08	1.04		
	Head Left Cheek	0.32	0.15	0.47		
	Head Left Tilt	0.14	0.15	0.29		
	Head Right Cheek	0.25	0.15	0.40		
WCDMA Band	Head Right Tilt	0.12	0.15	0.27		
5+Bluetooth	Body Back	0.33	0.08	0.41		
	Body Left	0.20	0.08	0.28		
	Body Right	0.10	0.08	0.18		
	Body Bottom	0.13	0.08	0.21		

Report No: RSZ161222003-20

SAR Evaluation Report 41 of 51

Mode(SAR1+SAR2)	Position	Reported S	Reported SAR(W/kg)		
		SAR1	SAR2	1.6W/kg	
	Head Left Cheek	0.33	0.30	0.63	
	Head Left Tilt	0.15	0.30	0.45	
GSM 850+ WLAN	Head Right Cheek	0.26	0.30	0.56	
	Head Right Tilt	0.13	0.30	0.43	
	Body Worn Back	0.39	0.15	0.54	
	Body Back	0.39	0.15	0.54	
GPRS 850 + WLAN	Body Left	0.20	0.15	0.35	
(Hotspot)	Body Right	0.10	0.15	0.25	
	Body Bottom	0.13	0.15	0.28	
	Head Left Cheek	0.13	0.30	0.43	
	Head Left Tilt	0.06	0.30	0.36	
PCS1900 + WLAN	Head Right Cheek	0.21	0.30	0.51	
,	Head Right Tilt	0.06	0.30	0.36	
	Body Worn Back	0.85	0.15	1.00	
	Body Back	0.70	0.15	0.85	
GPRS 1900 + WLAN	Body Left	0.03	0.15	0.18	
(Hotspot)	Body Right	0.04	0.15	0.19	
	Body Bottom	0.40	0.15	0.55	
	Head Left Cheek	0.21	0.30	0.51	
WCDMA David 2 L WILANI	Head Left Tilt	0.09	0.30	0.39	
WCDMA Band 2+ WLAN	Head Right Cheek	0.29	0.30	0.59	
	Head Right Tilt	0.09	0.30	0.39	
	Body Back	1.25	0.15	1.40	
WCDMA Band 2+ WLAN	Body Left	0.07	0.15	0.22	
(Hotspot)	Body Right	0.10	0.15	0.25	
	Body Bottom	0.96	0.15	1.11	
	Head Left Cheek	0.32	0.30	0.62	
WCDMA Dog 15   WI AND	Head Left Tilt	0.14	0.30	0.44	
WCDMA Band 5+ WLAN	Head Right Cheek	0.25	0.30	0.55	
	Head Right Tilt	0.12	0.30	0.42	
	Body Back	0.33	0.15	0.48	
WCDMA Band 5+ WLAN	Body Left	0.20	0.15	0.35	
(Hotspot)	Body Right	0.10	0.15	0.25	
	Body Bottom	0.13	0.15	0.28	

### Note:

- Hotspot mode SAR is only required for the edges within 25mm from the transmitting antenna located.
   Hotspot Mode is not feasible during voice calls.

### **Conclusion:**

Sum of SAR:  $\Sigma$  SAR < 1.6 W/kg therefore simultaneous transmission SAR with Volume Scans is **not** required.

SAR Evaluation Report 42 of 51

Bay Area Compliance Laboratories Corp. (Kunshan)	Report No: RSZ161222003-20
SAR Plots	
Please Refer to the Attachment.	

SAR Evaluation Report 43 of 51

# APPENDIX A MEASUREMENT UNCERTAINTY

The uncertainty budget has been determined for the measurement system and is given in the following Table.

Report No: RSZ161222003-20

### Measurement uncertainty evaluation for IEEE1528-2013 SAR test

Source of uncertainty	Tolerance/ uncertainty ± %	Probability distribution	Divisor	ci (1 g)	ci (10 g)	Standard uncertainty ± %, (1 g)	Standard uncertainty ± %, (10 g)
	<u>I</u>	Measuremer	nt system	l			L
Probe calibration	6.55	N	1	1	1	6.6	6.6
Axial Isotropy	4.7	R	√3	1	1	2.7	2.7
Hemispherical Isotropy	9.6	R	√3	0	0	0.0	0.0
Boundary effect	1.0	R	√3	1	1	0.6	0.6
Linearity	4.7	R	√3	1	1	2.7	2.7
Detection limits	1.0	R	√3	1	1	0.6	0.6
Readout electronics	0.3	N	1	1	1	0.3	0.3
Response time	0.0	R	√3	1	1	0.0	0.0
Integration time	0.0	R	√3	1	1	0.0	0.0
RF ambient conditions – noise	1.0	R	√3	1	1	0.6	0.6
RF ambient conditions–reflections	1.0	R	√3	1	1	0.6	0.6
Probe positioner mech. Restrictions	0.8	R	√3	1	1	0.5	0.5
Probe positioning with respect to phantom shell	6.7	R	√3	1	1	3.9	3.9
Post-processing	2.0	R	√3	1	1	1.2	1.2
		Test sample	e related				
Test sample positioning	2.8	N	1	1	1	2.8	2.8
Device holder uncertainty	6.3	N	1	1	1	6.3	6.3
Drift of output power	5.0	R	√3	1	1	2.9	2.9
		Phantom an	d set-up				
Phantom uncertainty (shape and thickness tolerances)	4.0	R	√3	1	1	2.3	2.3
Liquid conductivity target)	5.0	R	√3	0.64	0.43	1.8	1.2
Liquid conductivity meas.)	2.5	N	1	0.64	0.43	1.6	1.1
Liquid permittivity target)	5.0	R	√3	0.6	0.49	1.7	1.4
Liquid permittivity meas.)	2.5	N	1	0.6	0.49	1.5	1.2
Combined standard uncertainty		RSS				12.2	12.0
Expanded uncertainty 95 % confidence interval)						24.3	23.9

SAR Evaluation Report 44 of 51

Liquid conductivity (meas.)

Liquid permittivity (meas.)

Temp. unc. - Conductivity

Temp. unc. - Permittivity

Combined standard

uncertainty
Expanded uncertainty 95 %

confidence interval)

2.5

2.5

1.7

0.3

Report No: RSZ161222003-20

Source of uncertainty	Tolerance/ uncertainty ± %	Probability distribution	Divisor	ci (1 g)	ci (10 g)	Standard uncertainty ± %, (1 g)	Standard uncertainty ± %, (10 g)
		Measuremer	nt system				
Probe calibration	6.55	N	1	1	1	6.6	6.6
Axial Isotropy	4.7	R	√3	1	1	2.7	2.7
Hemispherical Isotropy	9.6	R	√3	0	0	0.0	0.0
Linearity	4.7	R	√3	1	1	2.7	2.7
Modulation Response	0.0	R	√3	1	1	0.0	0.0
Detection limits	1.0	R	√3	1	1	0.6	0.6
Boundary effect	1.0	R	√3	1	1	0.6	0.6
Readout electronics	0.3	N	1	1	1	0.3	0.3
Response time	0.0	R	√3	1	1	0.0	0.0
Integration time	0.0	R	√3	1	1	0.0	0.0
RF ambient conditions – noise	1.0	R	√3	1	1	0.6	0.6
RF ambient conditions—reflections	1.0	R	√3	1	1	0.6	0.6
Probe positioner mech. Restrictions	0.8	R	√3	1	1	0.5	0.5
Probe positioning with respect to phantom shell	6.7	R	√3	1	1	3.9	3.9
Post-processing	2.0	R	√3	1	1	1.2	1.2
		Test sample	e related				
Device holder Uncertainty	6.3	N	1	1	1	6.3	6.3
Test sample positioning	2.8	N	1	1	1	2.8	2.8
Power scaling	4.5	R	√3	1	1	2.6	2.6
Drift of output power	5.0	R	√3	1	1	2.9	2.9
		Phantom an	d set-up				
Phantom uncertainty (shape and thickness tolerances)	4.0	R	√3	1	1	2.3	2.3
Algorithm for correcting SAR for deviations in permittivity and conductivity	1.9	N	1	1	0.84	1.1	0.9
<del></del>		<del></del>		<b>-</b>	<b>—</b>		

SAR Evaluation Report 45 of 51

Ν

Ν

R

R

RSS

1

1

√3

√3

0.64

0.6

0.78

0.23

0.43

0.49

0.71

0.26

1.6

1.5

8.0

0.0

12.2

24.5

1.1

1.2

0.7


0.0

12.1

24.2

# APPENDIX B EUT TEST POSITION PHOTOS

# Liquid depth ≥ 15cm

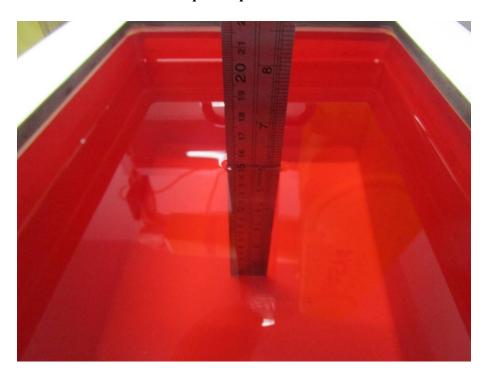

SAR Evaluation Report 46 of 51

## Body(Worn) Back Setup Photo(10mm)




**Body Left Setup Photo(10mm)** 



SAR Evaluation Report 47 of 51

## **Body Right Setup Photo(10mm)**

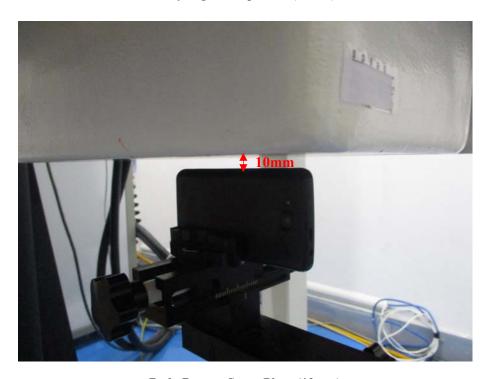

**Body Bottom Setup Photo(10mm)** 




SAR Evaluation Report 48 of 51

# **Head Left Cheek Setup Photo**




**Head Left Tilt Setup Photo** 

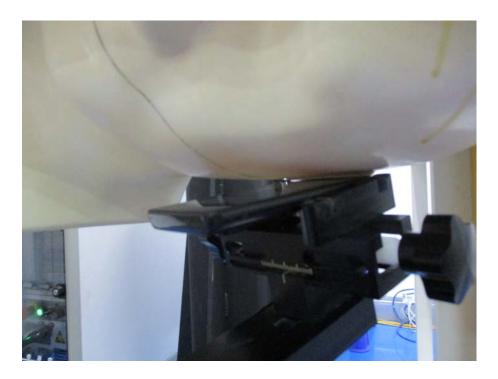

SAR Evaluation Report 49 of 51

## **Head Right Cheek Setup Photo**

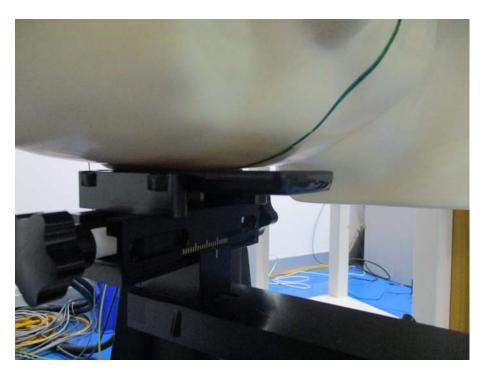

**Head Right Tilt Setup Photo** 



SAR Evaluation Report 50 of 51

# **APPENDIX C CALIBRATION CERTIFICATES**

Please Refer to the Attachment.

\*\*\*\*\* END OF REPORT \*\*\*\*\*

Report No: RSZ161222003-20

SAR Evaluation Report 51 of 51