

Report No.: SZAWW181224002-03 FCC ID: 2ADXG-SHOCK Page 1 of 14

# **FCC TEST REPORT**

Client Name : VELVETWIRE LLC

Address 1200 Pacific Ave, Suite 350, Santa Cruz, California,

United States 95060

Product Name : Stickershock

Date : Apr. 01, 2019

## **Shenzhen Anbotek Compliance Laboratory Limited**



Report No.: SZAWW181224002-03 FCC ID: 2ADXG-SHOCK Page 2

## **Contents**

1. 9	General Information
	1.1. Client Information
	1.2. Description of Device (EUT)
	1.3. Auxiliary Equipment Used During Test
	1.4. Test Equipment List
	1.5. Measurement Uncertainty
	1.6. Description of Test Facility
2.1	Measurement and Result
	2.1. Requirements
	2.2. Test Setup
	2.3. Test Procedure
	2.4. Test Result
	2.4.1. Equipment Approval Considerations item 5.b of KDB 680106 D01 v03
	2.4.2. Environmental evaluation and exposure limit according to FCC CFR 47 part 1, 1.1307(b
	1.1310
AP	PENDIX I TEST SETUP PHOTOGRAPH



Report No.: SZAWW181224002-03 FCC ID: 2ADXG-SHOCK Page 3 of 14

## TEST REPORT

Applicant : VELVETWIRE LLC

Manufacturer : ShenZhen Tailhoo Technology Co., Ltd.

Product Name : Stickershock

Model No. : 100501

Trade Mark : Velvetwire®

Rating(s) : Input: DC 5V, 225mA(with DC 3.75V, 180mAh battery inside)

Test Standard(s) : FCC Part 1.1310, 1.1307(b)

Test Method(s) : KDB680106 D01 RF Exposure Wireless Charging Apps v03

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 1.1307 & KDB680106 D01 requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt
Date of Test
Dec. 25, 2018
Dec. 25, 2018–Apr. 01, 2019

Prepared By

(Engineer / Oliay Yang)

Reviewer

(Supervisor / Snowy Meng)

Approved & Authorized Signer

(Manager / Sally Zhang)

Shenzhen Anbotek Compliance Laboratory Limited



Report No.: SZAWW181224002-03

## 1. General Information

## 1.1. Client Information

Applicant	: VELVETWIRE LLC
Address	: 1200 Pacific Ave, Suite 350, Santa Cruz, California, United States 95060
Manufacturer	: ShenZhen Tailhoo Technology Co., Ltd.
Address	Floor 1&2, Building 5, Tang East, Honggang industrial area, Baoan, Shenzhen
Factory	: ShenZhen Tailhoo Technology Co., Ltd.
Address	Floor 1&2, Building 5, Tang East, Honggang industrial area, Baoan, Shenzhen

### 1.2. Description of Device (EUT)

:	Stickershock	poten Anbotek Anbotek Anbote
:	100501	Anboten Anno Anbotek Anbotek
:	Velvetwire <sup>®</sup>	Anbotes Anbotek Anbotek Anbote
:	AC 120V, 60Hz for adapter	Anbote Anbotek Anbotek Anbo
:	S1(Normal Sample), S2(Engi	neering Sample)
	Operation Frequency:	111~205KHz
	Modulation Type:	MSK
-	Antenna Type:	Inductive loop coil Antenna
	Antenna Gain(Peak):	0 dBi
		<ul> <li>100501</li> <li>Velvetwire®</li> <li>AC 120V, 60Hz for adapter</li> <li>S1(Normal Sample), S2(Enging)</li> <li>Operation Frequency:</li> <li>Modulation Type:</li> <li>Antenna Type:</li> </ul>

Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

## 1.3. Auxiliary Equipment Used During Test

7			Manufacturer: ZTE M/N: STC-A2050I1000USBA-C			nbote
3.	Adapter	:	S/N: 201202102100876			Aup
0			Input: 100-240V~ 50/60Hz, 0.3A			P.
			Output: DC 5V, 1000mA		ok hotel	4

**Shenzhen Anbotek Compliance Laboratory Limited** 



Report No.: SZAWW181224002-03 FCC ID: 2ADXG-SHOCK

#### 1.4. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1 <sub>ek</sub>	Magnetic field meter	NARDA	ELT-400	423623	Dec. 24, 2018	1 Year
2	E-Field Probe	Narda	EF0391	Q15221	Dec. 24, 2018	3 Year
3	H-Field Probe	Narda	HF3061	Q15835	Dec. 24, 2018	3 Year

#### 1.5. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horiz	contal)	etek anb	otek Anbote	K DU
P		Ur = 3.8 dB (Vertic	cal)	otek k.	nbotek Ant	jote.
		ek abotek	Anboten A	inbo wotek	anbotek	Aupolo
Conduction Uncertainty	:	Uc = 3.4 dB	Anbote	Ann	Anbotek	Anbore

#### 1.6. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registed and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, July 31, 2017.

#### ISED-Registration No.: 8058A-1

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A-1, June 13, 2016.

#### **Test Location**

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'ar District, Shenzhen, Guangdong, China. 518102

400-003-0500



Report No.: SZAWW181224002-03 FCC ID: 2ADXG-SHOCK

### 2. Measurement and Result

#### 2.1. Requirements

According to the item 5.b) of KDB 680106 D01v03:

Inductive wireless power transfer applications that meet all of the following requirements are excluded from submitting an RF exposure evaluation.

- 1) Power transfer frequency is less that 1 MHz
- 2) Output power from each primary coil is less than or equal to 15 watts.
- 3) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils
- 4) Client device is inserted in or placed directly in contact with the transmitter
- 5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion)
- 6) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

Limits For Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm²)	Averaging time (minutes)
	(A) Limits for Occ	cupational/Controlled Ex	posures	•
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f <sup>2</sup> )	6
30-300	61.4	0.163	1.0	6
300-1500	1	1	f/300	6
1500-100,000	/	1	5	6
	(B) Limits for Genera	l Population/Uncontrolle	d Exposure	+
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30-300	27.5	0.073	0.2	30
300-1500	1	1	f/1500	30
1500-100,000	/	1	1.0	30

F=frequency in MHz

RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz:614V/m,1.63A/m).

Code:AB-RF-05-a


400-003-0500

<sup>\*=</sup>Plane-wave equivalent power density



Report No.: SZAWW181224002-03 FCC ID: 2ADXG-SHOCK

#### 2.2. Test Setup

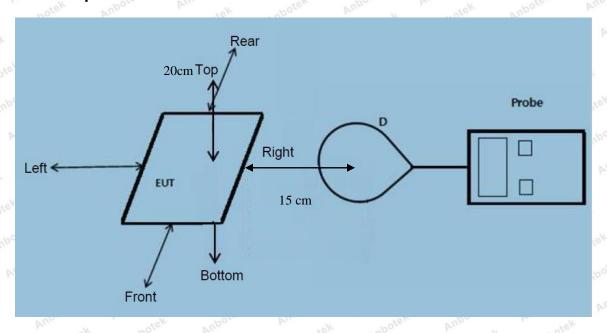

Note: Measurements should be made at 15 cm surrounding the EUT and 20cm above the top surface of the EUT.

#### 2.3. Test Procedure

- 1) The RF exposure test was performed in anechoic chamber.
- 2) The measurement probe was placed at required test distance which is between the edge of the charger and the geometric center of probe.
- 3) The highest emission level was recorded and compared with limit as soon as measurement of each
- (A, B, C, D, E) were completed. (A is the right, B is the back, C is the left, D is the front, and E is the top.)
- 4) The EUT was measured according to the dictates of KDB 680106 D01 v03.

The EUT's test position A, B, C, D and E is valid for the E and H field measurements.

#### 2.4. Test Result

- 2.4.1. Equipment Approval Considerations item 5.b of KDB 680106 D01 v03.
- 1) Power transfer frequency is less that 1 MHz
- The device operate in the frequency range 111~205KHz
- 2) Output power from each primary coil is less than 15 watts
  - The maximum output power of the primary coil is 5W.

Shenzhen Anbotek Compliance Laboratory Limited



Report No.: SZAWW181224002-03 FCC ID: 2ADXG-SHOCK Page 8 of 14

- 3) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils
- The transfer system including a charging system with only single primary coils is to detect and allow only between individual pairs of coils.
- 4) Client device is inserted in or placed directly in contact with the transmitter
- Client device is placed directly in contact with the transmitter.
- 5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion)
  - The EUT is a Mobile Power Pack with Wireless Charger
- 6) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.
- Conducted the measurement with the required distance and the test results please refer to the section 2.4.2



Report No.: SZAWW181224002-03 FCC ID: 2ADXG-SHOCK Page 9 of 14

2.4.2. Environmental evaluation and exposure limit according to FCC CFR 47 part 1, 1.1307(b), 1.1310

Temperature:	23.9°C	Relative Humidity:	54 %
Pressure:	1012 hPa	Test Voltage:	AC 120V, 60Hz for adapter

E-Field Strength at 15 cm surrounding the EUT and 20cm above the top surface of the EUT

Battery power	Frequency Range (KHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Reference Limit (V/m)	Limits Test (V/m)
1%	111~205	0.35	0.33	0.25	0.48	0.84	307	614
50%	111~205	1.32	1.25	1.20	1.34	1.23	307	614
99%	111~205	2.26	2.17	2.25	2.31	2.32	307	614
Stand-b y	111~205	0.37	0.44	0.74	0.82	0.57	307	614



Report No.: SZAWW181224002-03 FCC ID: 2ADXG-SHOCK Page 10 of

### H-Field Strength at 15 cm surrounding the EUT and 20cm above the top surface of the EUT


Battery	Frequency Range	Test Position	Test Position	Test Position	Test Position	Test Position	Reference Limit	Limits Test
power	(KHz)	Antotek	Babote	Cymbo	Otek D	nbote <sup>k</sup> E	(A/m)	(A/m)
Anbotek	K Anbor	Anbot	sk Aup	oten Pu	Pokek	Anbotek	Anbore	Annotel
1%	111~205	0.043	0.053	0.058	0.033	0.054	0.815	1.63
stek Ani	potek Yup,	otek W.	anbotek	Anbote	Anumotel	Anbote	Anbore	ek Air
abotek	Anbotek A	upo otek	Anbotek	Anbole	K Nu	tek Anb	otek Anbo	rek P
50%	111~205	0.22	0.44	0.59	0.34	0.42	0.815	1.63
	Anbotek	Anbo	k W.	tek Ant	ore, v	up notek	Anbotek	Anbore
Vu.	k Anbotek	Aupo	stek A	botek	Aupole	And	Anbotek	Anbore
99%	111~205	0.51	0.56	0.47	0.31	0.31	0.815	1.63
	notek A	botek	Anbore	Air	Anboter	K Aupo	tek Anbol	ek A
nbore.	hotek .	Anbotek	Aupor	An abote	k Aupo	re. Vup.	notek ar	botek
Stand-b	111~205	0.47	0.27	0.30	0.55	0.35	0.815	1.63
Anbotek	K Ann hotek	Anbote	K Anbo	tek Vii	abotek	Anbotek	Anbo	Anbotek



Report No.: SZAWW181224002-03 FCC ID: 2ADXG-SHOCK Page 11 of

## **APPENDIX I -- TEST SETUP PHOTOGRAPH**

Photo of MPE Measurement

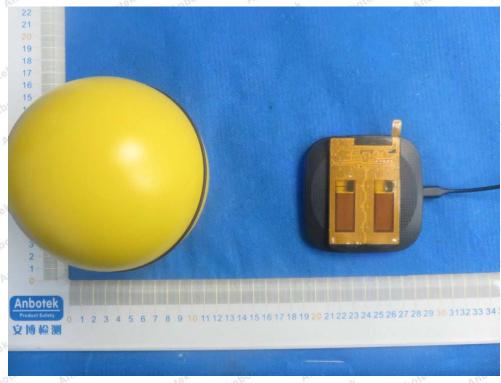




#### Shenzhen Anbotek Compliance Laboratory Limited



Report No.: SZAWW181224002-03 FCC ID: 2ADXG-SHOCK Page 12 of




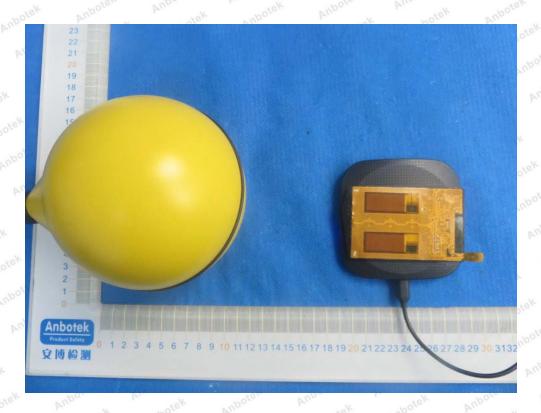

#### Shenzhen Anbotek Compliance Laboratory Limited



Report No.: SZAWW181224002-03 FCC ID: 2ADXG-SHOCK Page 13 of

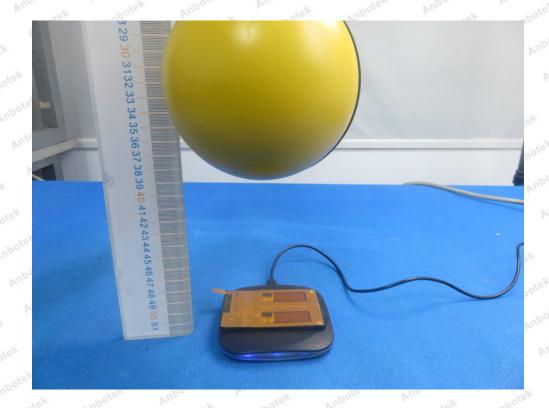



FCC ID: 2ADXG-SHOCK Report No.: SZAWW181224002-03 Page 14 of **End of Report** 

> Hotline 400-003-0500 www.anbotek.com

Code: AB-RF-05-a

Shenzhen Anbotek Compliance Laboratory Limited