

SAR Plots

- Verification Plots
- SAR Test Plots

DT&C Co., Ltd.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN726

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2450$ MHz; $\sigma = 1.778$ S/m; $\epsilon_r = 39.459$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3930; ConvF(7.69, 7.69, 7.69); Calibrated: 7/26/2021 Electronics: DAE3 Sn520
Sensor-Surface: 2mm (Mechanical Surface Detection)
Phantom: SAM with CRP_2013_10_08_right; Type: QD000P40CD; Serial: TP:1785
Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2022-02-09; Ambient Temp: 21.5; Tissue Temp: 21.4

2450 MHz System Verification (100 mW)


Area Scan (6x8x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = 0.13 dB

Peak SAR (extrapolated) = 10.8 W/kg

SAR(1 g) = 5.22 W/kg; SAR(10 g) = 2.41 W/kg

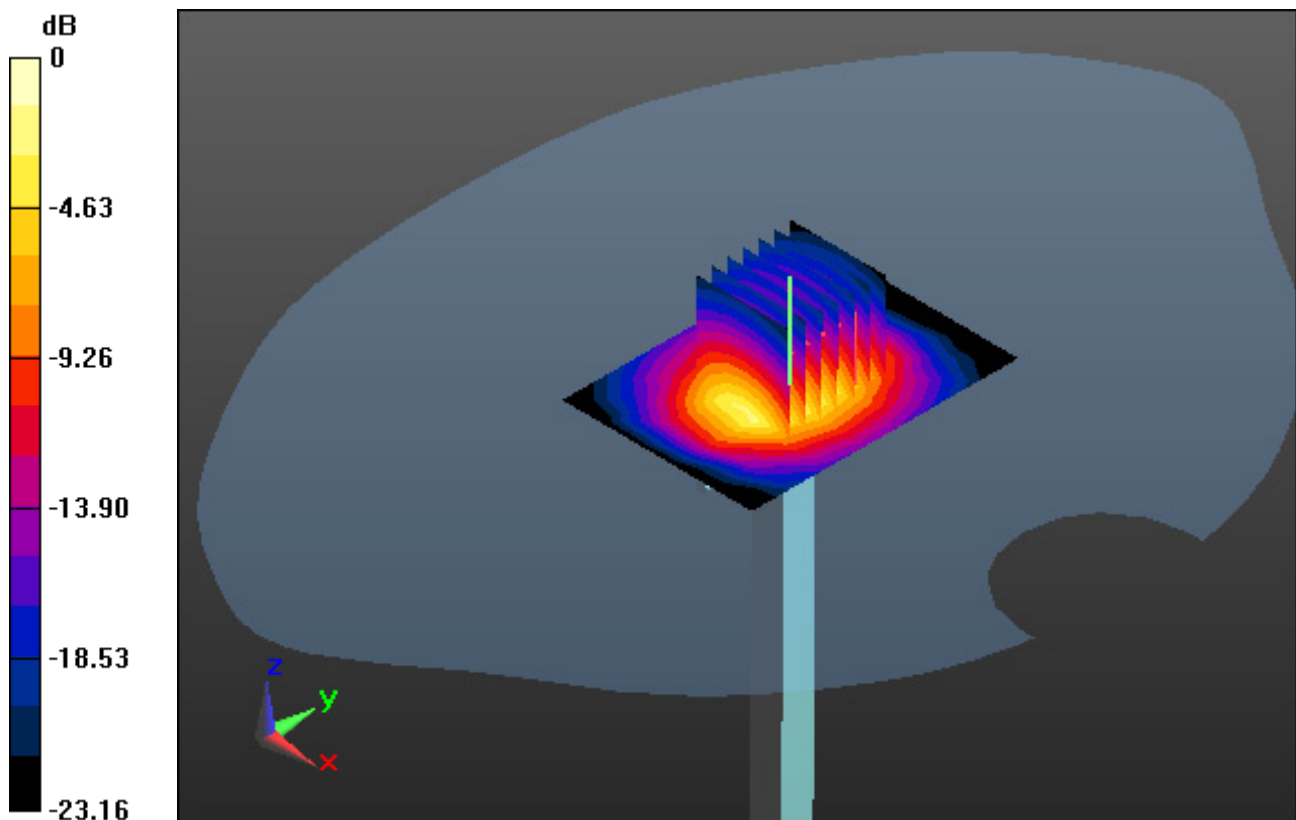

DT&C Co., Ltd.

DUT: Dipole 5000 MHz; Type: D5GHzV2; Serial: D5GHzV2 - SN:1103

Communication System: UID 0, CW (0); Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5300$ MHz; $\sigma = 4.932$ S/m; $\epsilon_r = 36.013$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3930; ConvF(5.38, 5.38, 5.38); Calibrated: 7/26/2021 Electronics: DAE3 Sn520

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Phantom: SAM with CRP_2013_10_08_right; Type: QD000P40CD; Serial: TP:1785

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2022-02-10; Ambient Temp: 21.1; Tissue Temp: 21.0

5300 MHz System Verification (100 mW)


Area Scan (8x8x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm, Graded Ratio: 1.4

Power Drift = 0.17 dB

Peak SAR (extrapolated) = 38.5 W/kg

SAR(1 g) = 8.53 W/kg; SAR(10 g) = 2.46 W/kg

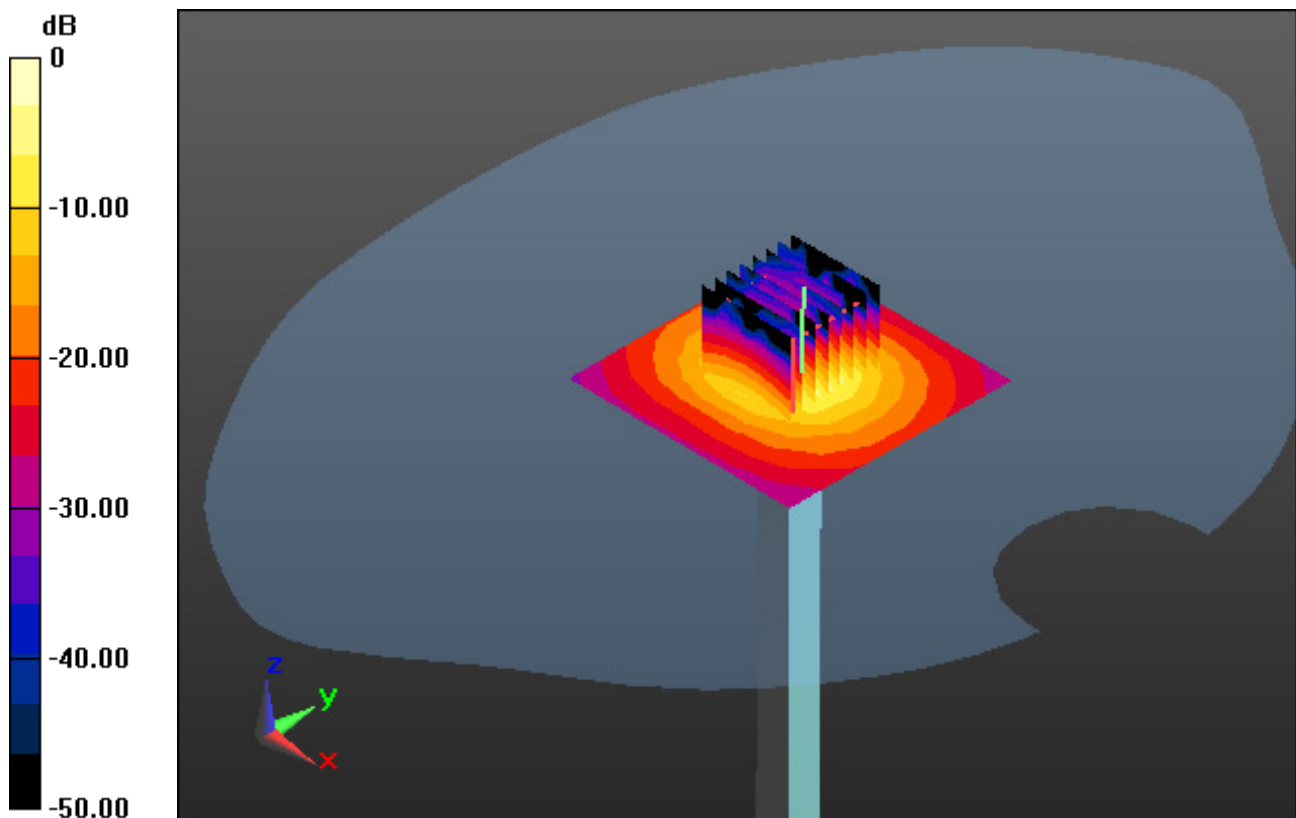

0 dB = 25.6 W/kg

DT&C Co., Ltd.

DUT: Dipole 5000 MHz; Type: D5GHzV2; Serial: D5GHzV2 - SN:1103

Communication System: UID 0, CW (0); Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5500$ MHz; $\sigma = 5.044$ S/m; $\epsilon_r = 35.213$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3930; ConvF(5, 5, 5); Calibrated: 7/26/2021 Electronics: DAE3 Sn520

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Phantom: SAM with CRP_2013_10_08_right; Type: QD000P40CD; Serial: TP:1785

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2022-02-11; Ambient Temp: 21.0; Tissue Temp: 20.9

5500 MHz System Verification (100 mW)


Area Scan (7x9x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm, Graded Ratio: 1.4

Power Drift = 0.17 dB

Peak SAR (extrapolated) = 39.5 W/kg

SAR(1 g) = 8.91 W/kg; SAR(10 g) = 2.53 W/kg

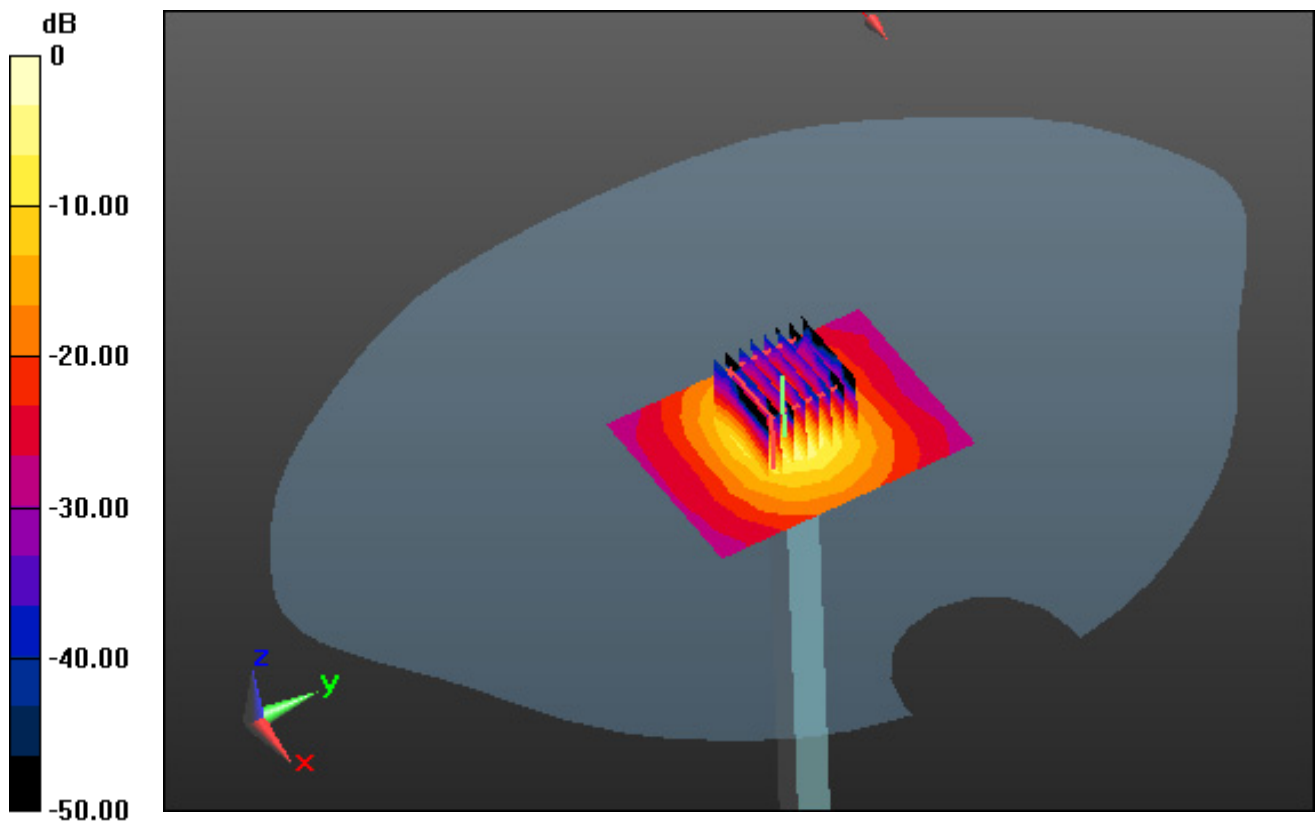

0 dB = 27.4 W/kg

DT&C Co., Ltd.

DUT: Dipole 5000 MHz; Type: D5GHzV2; Serial: D5GHzV2 - SN:1103

Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.172$ S/m; $\epsilon_r = 35.006$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3930; ConvF(4.9, 4.9, 4.9); Calibrated: 7/26/2021 Electronics: DAE3 Sn520

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Phantom: SAM with CRP_2013_10_08_right; Type: QD000P40CD; Serial: TP:1785

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2022-02-11; Ambient Temp: 21.0; Tissue Temp: 20.9

5600 MHz System Verification (100 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm, Graded Ratio: 1.4

Power Drift = -0.11 dB

Peak SAR (extrapolated) = 36.6 W/kg

SAR(1 g) = 8.71 W/kg; SAR(10 g) = 2.51 W/kg

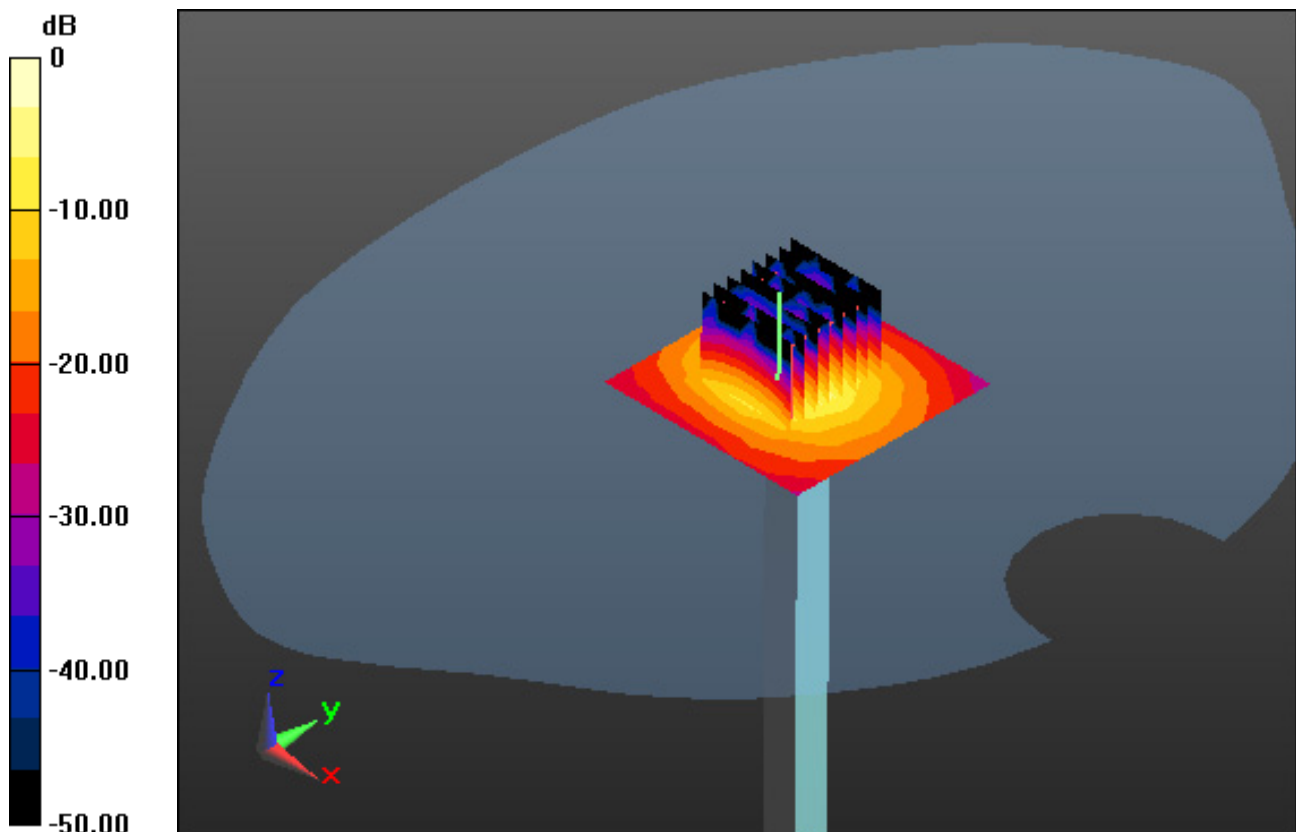

0 dB = 21.4 W/kg

DT&C Co., Ltd.

DUT: Dipole 5000 MHz; Type: D5GHzV2; Serial: D5GHzV2 - SN:1103

Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5800$ MHz; $\sigma = 5.291$ S/m; $\epsilon_r = 34.033$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3930; ConvF(4.85, 4.85, 4.85); Calibrated: 7/26/2021 Electronics: DAE3 Sn520

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Phantom: SAM with CRP_2013_10_08_right; Type: QD000P40CD; Serial: TP:1785

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2022-02-14; Ambient Temp: 21.1; Tissue Temp: 21.0

5800 MHz System Verification (100 mW)


Area Scan (7x8x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm, Graded Ratio: 1.4

Power Drift = 0.17 dB

Peak SAR (extrapolated) = 33.1 W/kg

SAR(1 g) = 8.46 W/kg; SAR(10 g) = 2.39 W/kg

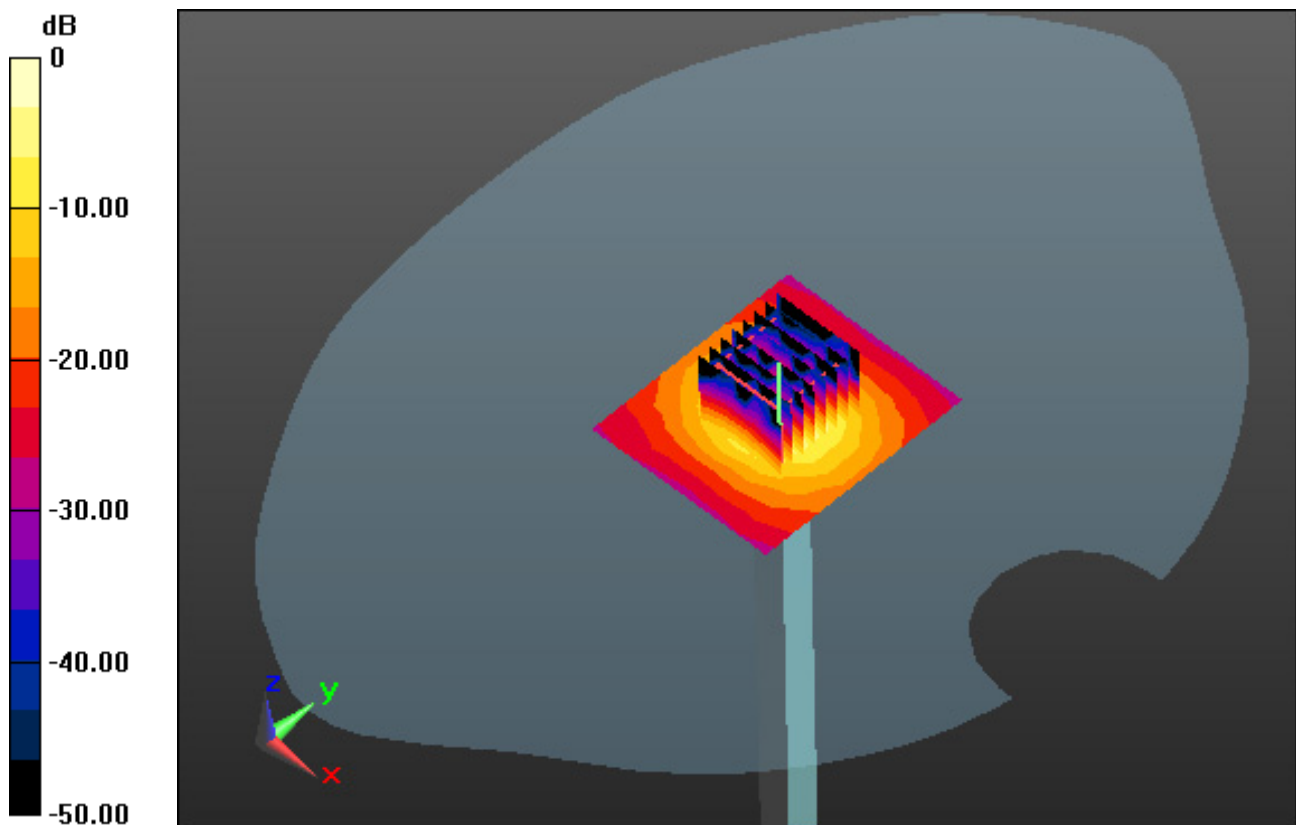

0 dB = 17.1 W/kg

DT&C Co., Ltd.

DUT: LK-P34LW3; Type: Mobile Printer

Communication System: UID 0, 2.4 GHz W-LAN (0); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.791 \text{ S/m}$; $\epsilon_r = 39.424$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3930; ConvF(7.69, 7.69, 7.69); Calibrated: 7/26/2021 Electronics: DAE3 Sn520
Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: SAM with CRP_2013_10_08_right; Type: QD000P40CD; Serial: TP:1785

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2022-02-09; Ambient Temp: 21.5; Tissue Temp: 21.4

Touch from Body, Front #2, WLAN(802.11b) Ch. 11, Ant Internal


Area Scan (12x16x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.05 W/kg

SAR(1 g) = 1.32 W/kg; SAR(10 g) = 0.607 W/kg

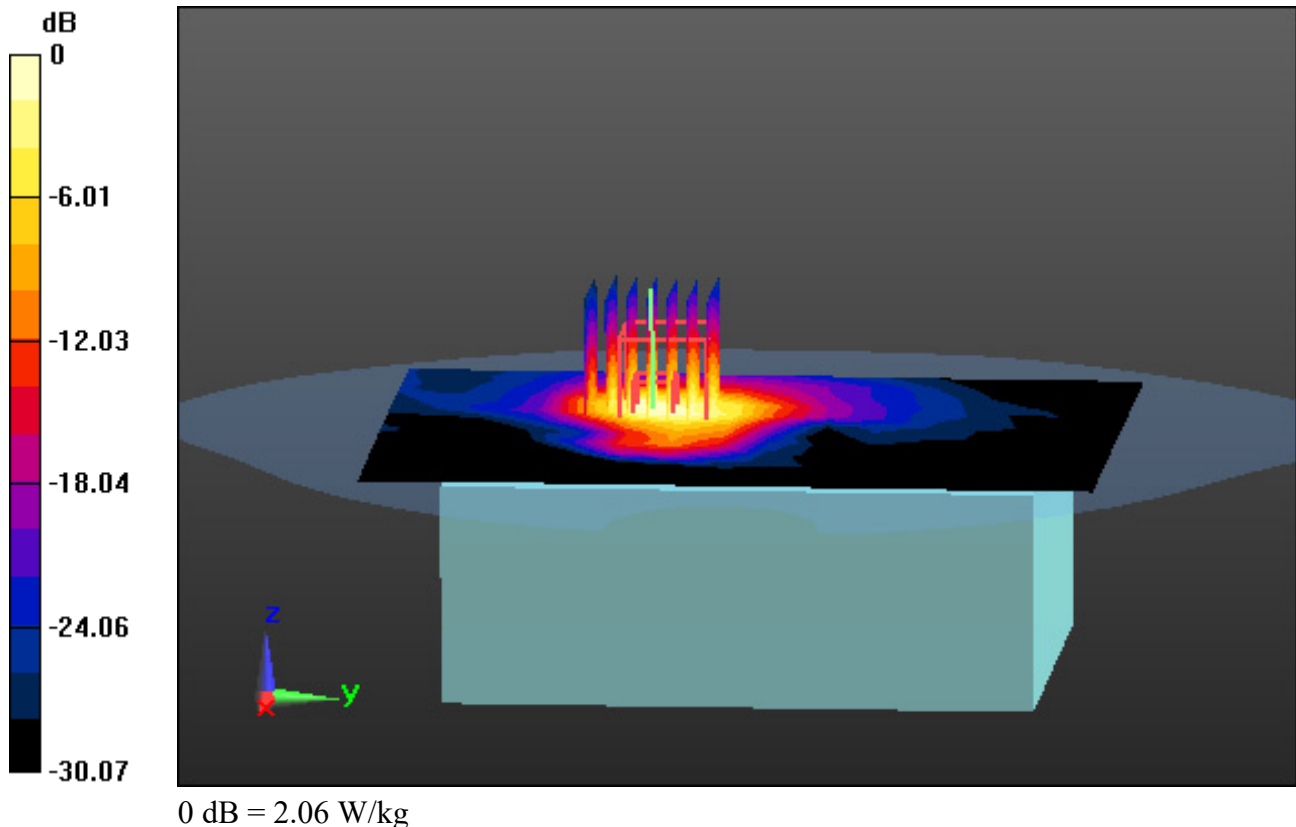

DT&C Co., Ltd.

DUT: LK-P34LW3; Type: Mobile Printer

Communication System: UID 0, 2.4 GHz W-LAN (0); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.791 \text{ S/m}$; $\epsilon_r = 39.424$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3930; ConvF(7.69, 7.69, 7.69); Calibrated: 7/26/2021 Electronics: DAE3 Sn520
Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: SAM with CRP_2013_10_08_right; Type: QD000P40CD; Serial: TP:1785

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2022-02-09; Ambient Temp: 21.5; Tissue Temp: 21.4

Touch from Body, Front #2, WLAN(802.11g) Ch. 11, Ant Internal


Area Scan (12x16x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.13 dB

Peak SAR (extrapolated) = 2.64 W/kg

SAR(1 g) = 1.1 W/kg; SAR(10 g) = 0.514 W/kg

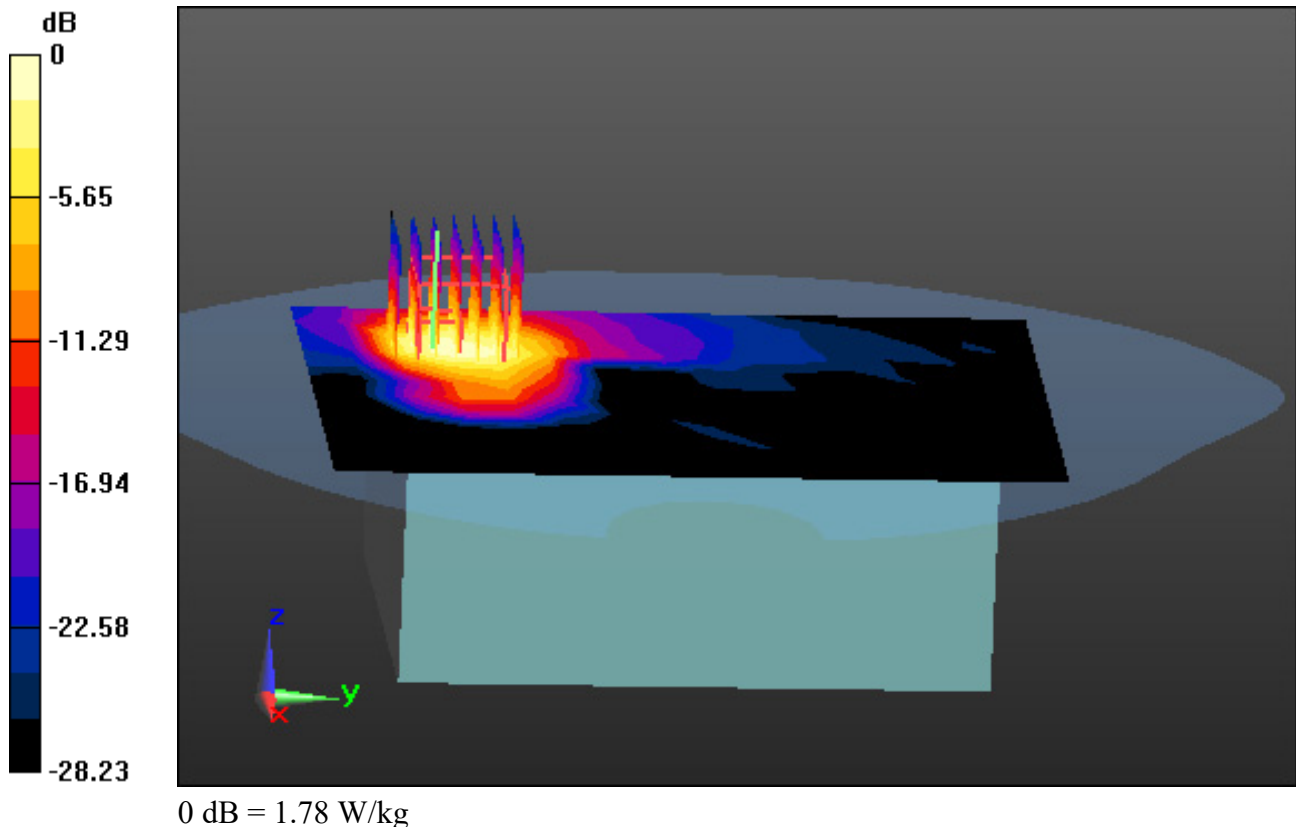

DT&C Co., Ltd.

DUT: LK-P34LW3; Type: Mobile Printer

Communication System: UID 0, 2.4 GHz W-LAN (0); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.791 \text{ S/m}$; $\epsilon_r = 39.424$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3930; ConvF(7.69, 7.69, 7.69); Calibrated: 7/26/2021 Electronics: DAE3 Sn520
Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: SAM with CRP_2013_10_08_right; Type: QD000P40CD; Serial: TP:1785

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2022-02-09; Ambient Temp: 21.5; Tissue Temp: 21.4

Touch from Body, Front #2, WLAN(802.11n HT20) Ch. 11, Ant Internal


Area Scan (12x16x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x8x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.62 W/kg

SAR(1 g) = 0.691 W/kg; SAR(10 g) = 0.321 W/kg

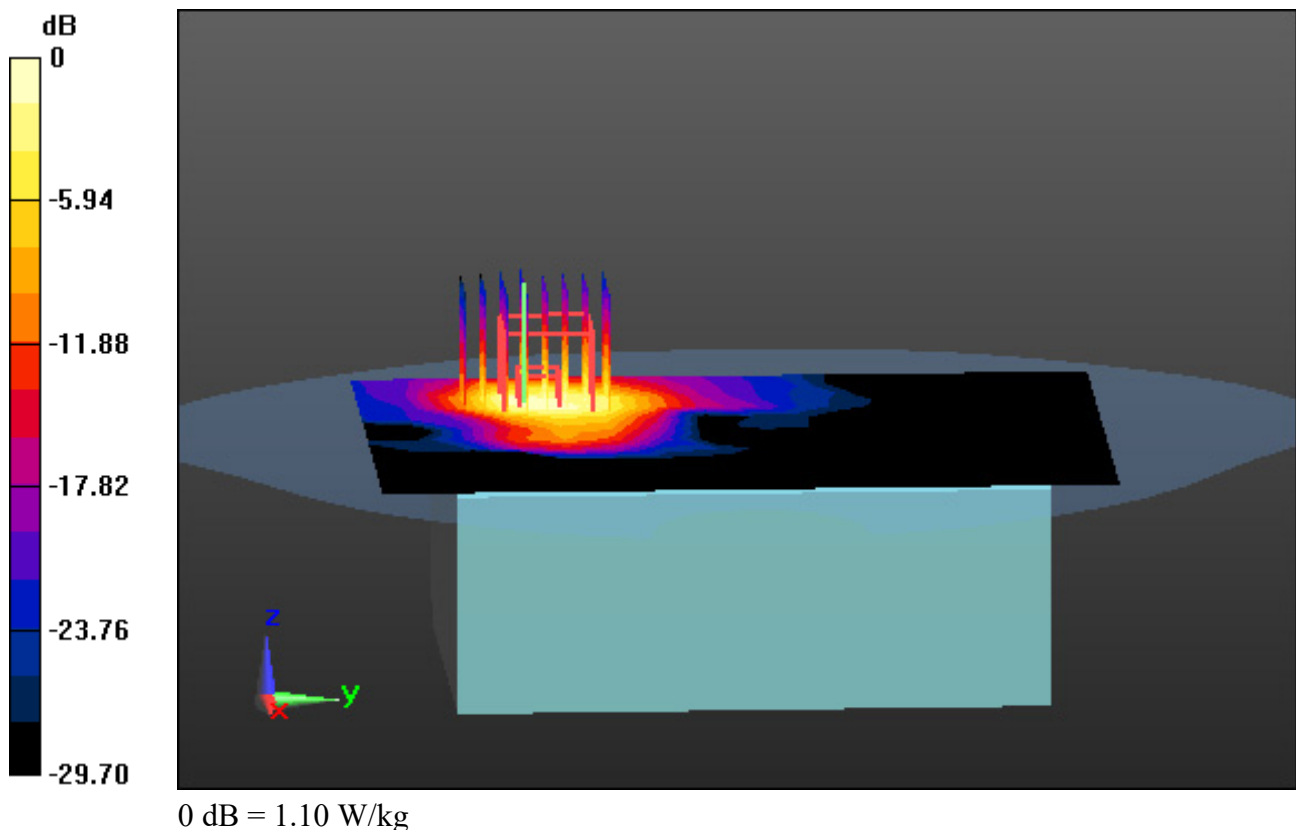

DT&C Co., Ltd.

DUT: LK-P34LW3; Type: Mobile Printer

Communication System: UID 0, W-LAN 5G (0); Frequency: 5260 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5260$ MHz; $\sigma = 4.873$ S/m; $\epsilon_r = 36.069$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3930; ConvF(5.38, 5.38, 5.38); Calibrated: 7/26/2021 Electronics: DAE3 Sn520

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Phantom: SAM with CRP_2013_10_08_right; Type: QD000P40CD; Serial: TP:1785

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2022-02-10; Ambient Temp: 21.1; Tissue Temp: 21.0

Touch from Body, Front #2, WLAN(802.11a) Ch. 52, Ant Internal


Area Scan (13x18x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm, Graded Ratio:1.4

Power Drift = -0.08 dB

Peak SAR (extrapolated) = 3.14 W/kg

SAR(1 g) = 0.848 W/kg; SAR(10 g) = 0.300 W/kg

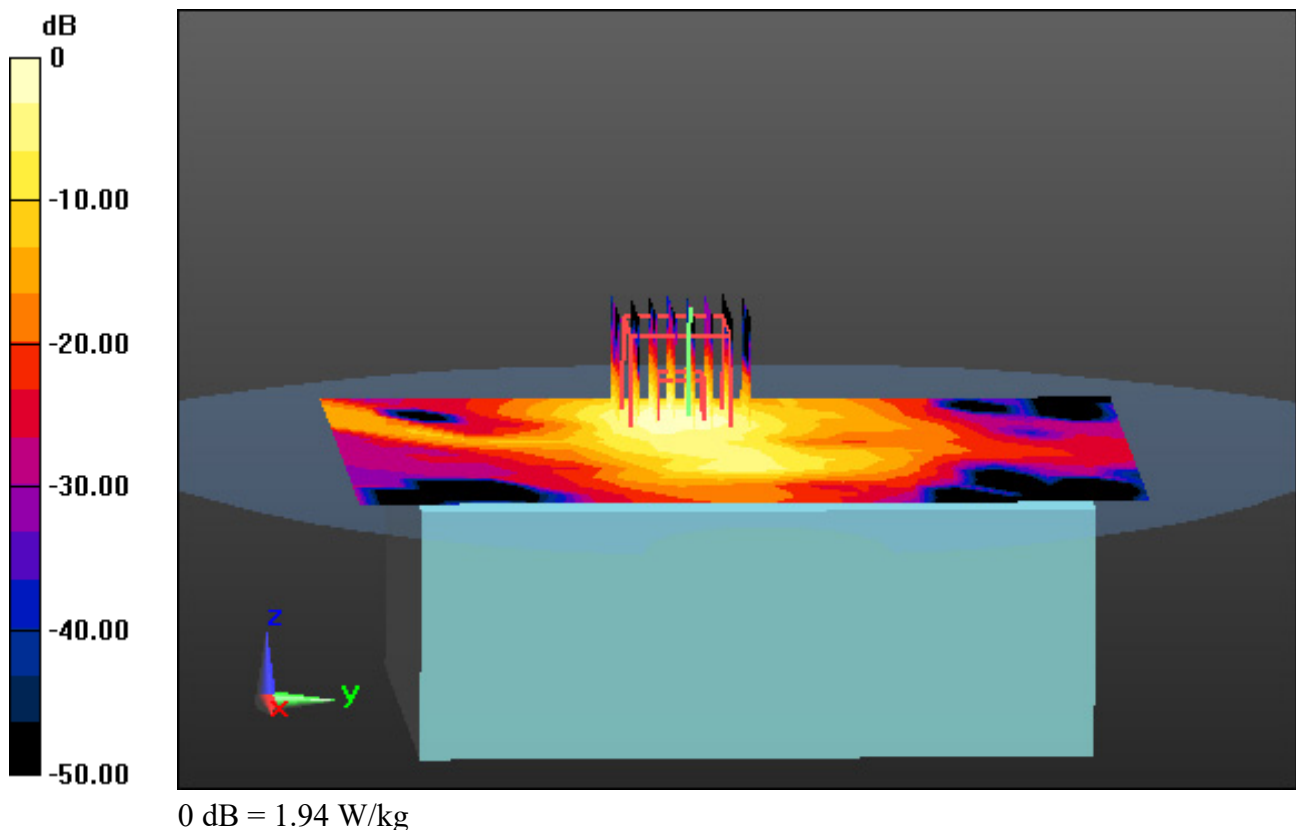

DT&C Co., Ltd.

DUT: LK-P34LW3; Type: Mobile Printer

Communication System: UID 0, W-LAN 5G (0); Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.172$ S/m; $\epsilon_r = 35.006$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3930; ConvF(4.9, 4.9, 4.9); Calibrated: 7/26/2021 Electronics: DAE3 Sn520
Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Phantom: SAM with CRP_2013_10_08_right; Type: QD000P40CD; Serial: TP:1785

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2022-02-11; Ambient Temp: 21.0; Tissue Temp: 20.9

Touch from Body, Front #2, WLAN(802.11a) Ch. 120, Ant Internal


Area Scan (13x18x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm, Graded Ratio:1.4

Power Drift = -0.01 dB

Peak SAR (extrapolated) = 4.43 W/kg

SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.379 W/kg

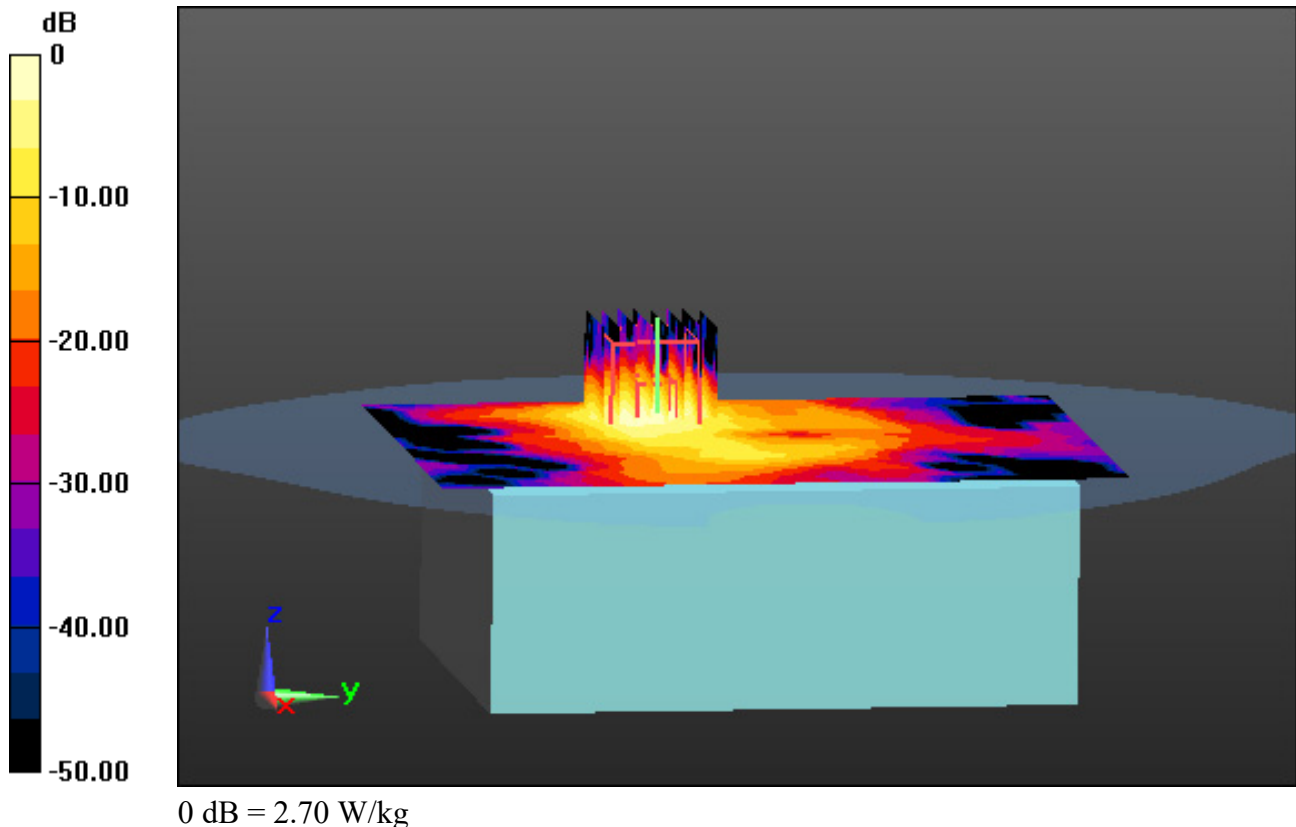

DT&C Co., Ltd.

DUT: LK-P34LW3; Type: Mobile Printer

Communication System: UID 0, W-LAN 5G (0); Frequency: 5745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.227 \text{ S/m}$; $\epsilon_r = 34.148$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3930; ConvF(4.85, 4.85, 4.85); Calibrated: 7/26/2021 Electronics: DAE3 Sn520

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Phantom: SAM with CRP_2013_10_08_right; Type: QD000P40CD; Serial: TP:1785

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2022-02-14; Ambient Temp: 21.1; Tissue Temp: 21.0

Touch from Body, Front #2, WLAN(802.11a) Ch. 149, Ant Internal

Area Scan (13x18x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$, Graded Ratio: 1.4

Power Drift = 0.01 dB

Peak SAR (extrapolated) = 4.02 W/kg

SAR(1 g) = 0.958 W/kg; SAR(10 g) = 0.318 W/kg

