

TEST REPORT

Applicant Name : TECNO MOBILE LIMITED
Address : FLAT 39 8/F BLOCK D WAH LOK INDUSTRIAL CENTRE 31-35 SHAN MEI STREET FOTAN NT Hong Kong
Report Number : SZNS211209-63796E-RF-00A-M3
FCC ID: 2ADYY-BD4A

Test Standard (s)
FCC PART 15.247

Sample Description

Product Type: Mobile Phone
Model No.: BD4a
Multiple Model(s) No.: N/A
Trade Mark: TECNO
Date Received: 2021/12/09 (SZNS211209-63796E-RF-S1)
2024/02/01 (SZNS211209-63796E-RF-S2)
Date of Test: 2021/12/17~2021/12/30 for CE&RE Test
2024/12/23 for RF conducted test
Report Date: 2024/12/23

Test Result:	Pass*
--------------	-------

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Roger.Ling

Roger Ling
EMC Engineer

Approved By:

Bob.Liao

Bob.Liao
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".
Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "*". Customer model name, addresses, names, trademarks etc. are not considered data.
This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.
Tel: +86 755-26503290 Fax: +86 755-26503396 Web: www.atc-lab.com

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	5
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	6
TEST FACILITY	6
SYSTEM TEST CONFIGURATION.....	7
DESCRIPTION OF TEST CONFIGURATION	7
EUT EXERCISE SOFTWARE	7
SPECIAL ACCESSORIES.....	7
EQUIPMENT MODIFICATIONS	7
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS	9
TEST EQUIPMENT LIST	10
FCC §15.247 (I), §1.1307 (B) (1) & §2.1093 – RF EXPOSURE	12
APPLICABLE STANDARD	12
FCC §15.203 – ANTENNA REQUIREMENT	13
APPLICABLE STANDARD	13
ANTENNA CONNECTOR CONSTRUCTION	13
FCC §15.207 (A) – AC LINE CONDUCTED EMISSIONS	14
APPLICABLE STANDARD	14
EUT SETUP.....	14
EMI TEST RECEIVER SETUP.....	14
TEST PROCEDURE	14
TRNSD FACTOR & MARGIN CALCULATION	15
TEST DATA	15
FCC §15.205, §15.209 & §15.247(D) – RADIATED EMISSIONS	18
APPLICABLE STANDARD	18
EUT SETUP.....	18
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	19
TEST PROCEDURE	19
FACTOR & MARGIN CALCULATION	19
TEST DATA	19
FCC §15.247(A) (1)-CHANNEL SEPARATION TEST	25
APPLICABLE STANDARD	25
TEST PROCEDURE	25
TEST DATA	25
FCC §15.247(A) (1) – 20 DB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH	26
APPLICABLE STANDARD	26
TEST PROCEDURE	26
TEST DATA	27

FCC §15.247(A) (1) (III)-QUANTITY OF HOPPING CHANNEL TEST28
 APPLICABLE STANDARD28
 TEST PROCEDURE28
 TEST DATA28

FCC §15.247(A) (1) (III) - TIME OF OCCUPANCY (DWELL TIME).....29
 APPLICABLE STANDARD29
 TEST PROCEDURE29
 TEST DATA29

FCC §15.247(B) (1) - PEAK OUTPUT POWER MEASUREMENT30
 APPLICABLE STANDARD30
 TEST PROCEDURE30
 TEST DATA30

FCC §15.247(D) - BAND EDGES TESTING.....31
 APPLICABLE STANDARD31
 TEST PROCEDURE31
 TEST DATA31

APPENDIX32
 APPENDIX A: 20DB EMISSION BANDWIDTH32
 APPENDIX B: OCCUPIED CHANNEL BANDWIDTH38
 APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER.....44
 APPENDIX D: CARRIER FREQUENCY SEPARATION50
 APPENDIX E: TIME OF OCCUPANCY53
 APPENDIX F: NUMBER OF HOPPING CHANNELS63
 APPENDIX G: BAND EDGE MEASUREMENTS66

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
Rev.00	SZNS211209-63796E-RF-00A	Original Report	2022/01/05
Rev.01	SZNS211209-63796E-RF-00A-M3	Retest and Update RF Conducted Test Data	2024/12/23

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Frequency Range	Bluetooth: 2402~2480MHz
Maximum conducted Peak output power	Bluetooth: 6.94dBm
Modulation Technique	Bluetooth: GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna Specification*	-0.5 dBi (provided by the applicant)
Voltage Range	DC 3.87V from battery or DC 5V from adapter
Sample serial number	SZNS211209-63796E-RF-S1 for CE & RE Test SZNS211209-63796E-RF-S2 for RF Conducted Test (Assigned by ATC)
Sample/EUT Status	Good condition
Adapter information	Model: U050TSA Input: AC 100-240V, 50/60Hz, Max 0.2A Output: DC 5.0V, 1.0A

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

Unless otherwise stated there are no any additions to, deviations, or exclusions from the method.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF output power, conducted		0.3dB
Unwanted Emission, conducted		1.2dB
AC Line Conducted emission		2.72dB
Emissions, Radiated	30MHz - 1GHz	4.28dB
	1GHz - 18GHz	4.98dB
	18GHz - 26.5GHz	5.06dB
Temperature		1°C
Humidity		6%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 809509, the FCC Designation No.: CN1403.

Accredited by American Association for Laboratory Accreditation (A2LA). The Certificate Number is 4297.01

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode.

EUT Exercise Software

EUT was test in engineering mode and the power level is default*, which provided by manufacturer.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
TECNO	Earphone	Unknown	Unknown

External I/O Cable


Cable Description	Length (m)	From Port	To
/	/	/	/

Block Diagram of Test Setup

For conducted emission:

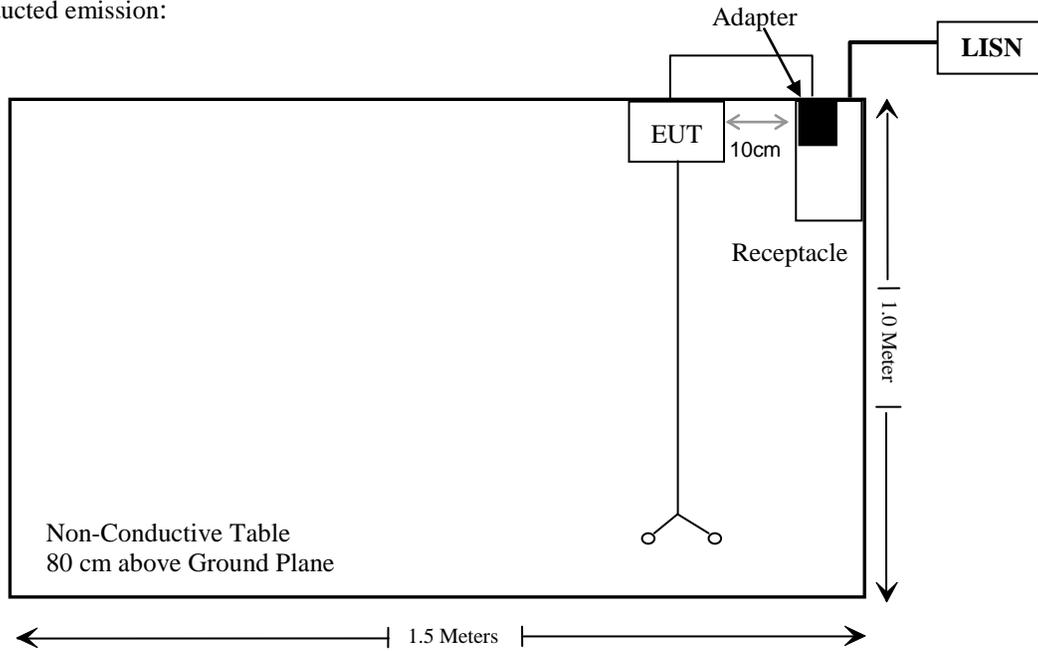

For conducted emission:

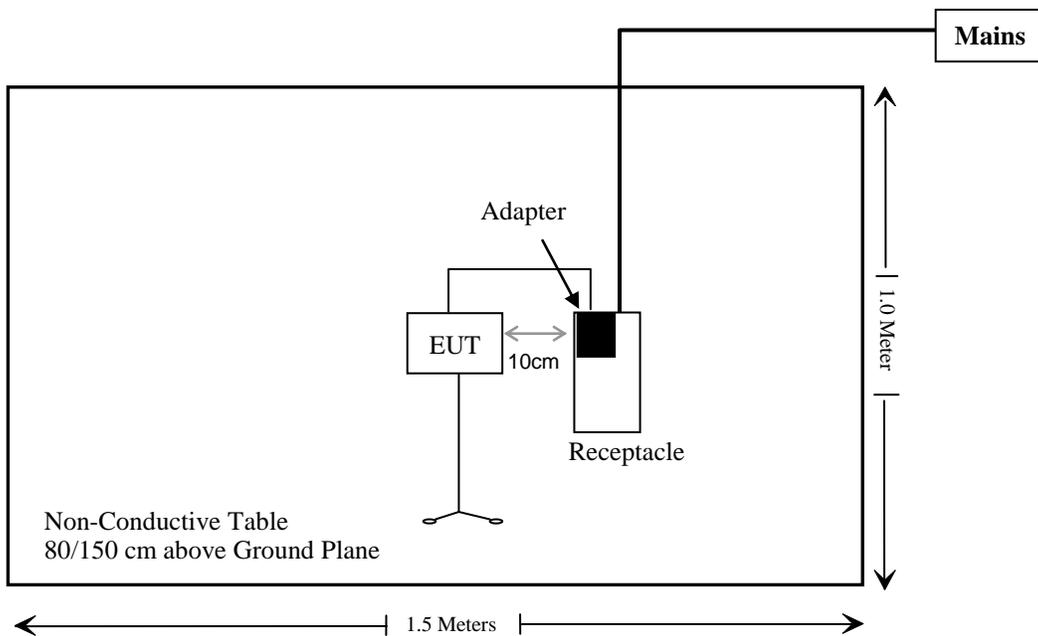

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result	Note
§15.247 (i), §1.1307 (b) (1) & §2.1093	RF Exposure	Compliant	From Original
§15.203	Antenna Requirement	Compliant	From Original
§15.207(a)	AC Line Conducted Emissions	Compliant	From Original
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliant	From Original
§15.247(a)(1)	20 dB Emission Bandwidth & 99% Occupied Bandwidth	Compliant*	Retested
§15.247(a)(1)	Channel Separation Test	Compliant*	Retested
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant*	Retested
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliant*	Retested
§15.247(b)(1)	Peak Output Power Measurement	Compliant*	Retested
§15.247(d)	Band edges	Compliant*	Retested

Compliant* – Annotations as below:

Note 1: The test item was retested and updated the data.

Note 2: The test software and power setting level were same as the original testing which on page 7 of the report.

Note 3: The retested RF power is almost the same as the original report.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted emission test					
Rohde& Schwarz	EMI Test Receiver	ESCI	100784	2021/12/13	2022/12/12
Rohde & Schwarz	L.I.S.N.	ENV216	101314	2021/12/13	2022/12/12
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2021/12/13	2022/12/12
Conducted Emission Test Software: e3 19821b (V9)					
Radiated emission test					
Rohde& Schwarz	Test Receiver	ESR	102725	2021/12/13	2022/12/12
Rohde&Schwarz	Spectrum Analyzer	FSV40	101949	2021/12/13	2022/12/12
SONOMA INSTRUMENT	Amplifier	310 N	186131	2021/11/09	2022/11/08
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2021/11/09	2022/11/08
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2021/11/11	2022/11/10
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2020/01/05	2023/01/04
Wainwright	High Pass Filter	WHKX3.6/18 G-10SS	5	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.10	N050	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.11	N1000	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.15	N600	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.16	N650	2021/12/14	2022/12/13
Radiated Emission Test Software: e3 19821b (V9)					

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101495	2024/10/08	2025/10/07
Rohde & Schwarz	Open Switch and Control Unit	OSP120+ OSP-B157	101244+ 100866	2024/10/08	2025/10/07
Agilent	10dB Attenuator	8491B	A5825	2024/10/08	2025/10/07
Unknown	RF Coaxial Cable	No.31	RF-01	2024/10/08	2025/10/07

*** Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.247 (i), §1.1307 (b) (1) & §2.1093 – RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

Measurement Result

For worst case:

Mode	Frequency (MHz)	Max tune-up conducted power (dBm)	Max tune-up conducted power (mW)	Distance (mm)	Calculated value	Threshold (1-g SAR)	SAR Test Exclusion
BT	2402-2480	8.0	6.31	5	2.0	3.0	Yes

Result: Compliant.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one internal antenna, which was permanently attached, and the maximum antenna gain is -0.5dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

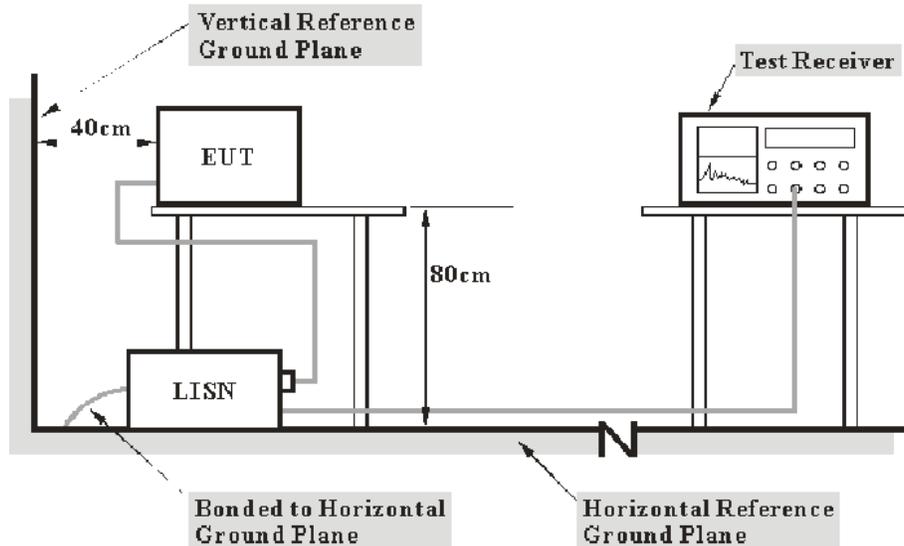

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Transd Factor & Margin Calculation

The Transd factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Transd Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Test Data


Environmental Conditions

Temperature:	23 °C
Relative Humidity:	60 %
ATM Pressure:	101.0 kPa

The testing was performed by Bin Duan on 2021-12-30.


EUT operation mode: Transmitting (the worst case is GFSK Mode, Low channel)

AC 120V/60 Hz, Line

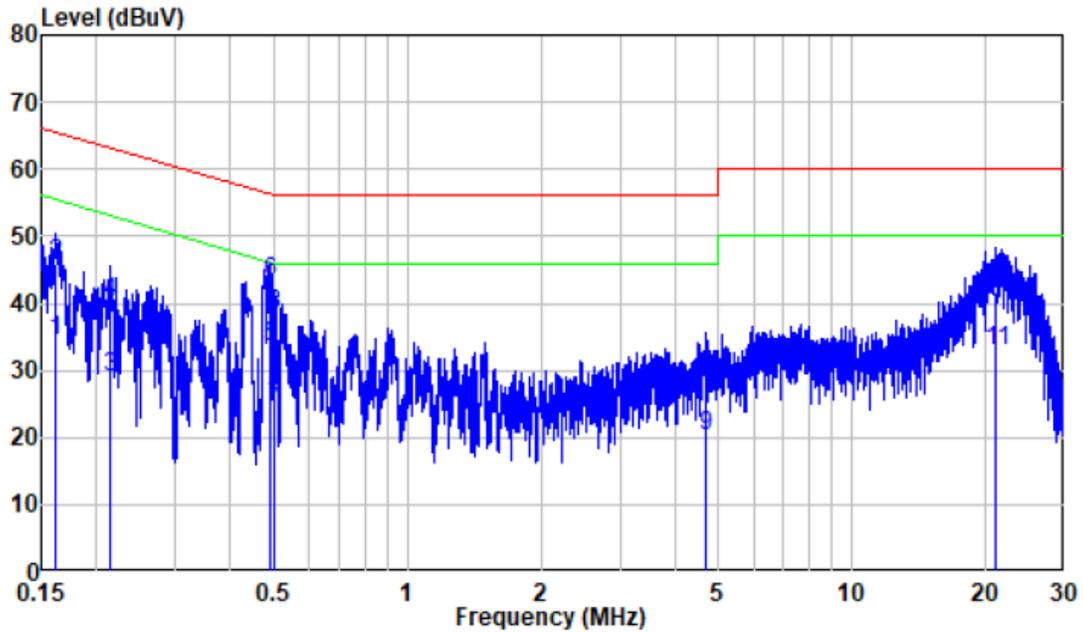

	Freq	Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB
1	0.162	9.87	24.67	34.54	55.37	-20.83 Average
2	0.162	9.87	36.13	46.00	65.37	-19.37 QP
3	0.215	9.80	19.16	28.96	53.01	-24.05 Average
4	0.215	9.80	30.25	40.05	63.01	-22.96 QP
5	0.492	9.80	23.57	33.37	46.13	-12.76 Average
6	0.492	9.80	33.43	43.23	56.13	-12.90 QP
7	0.502	9.80	14.64	24.44	46.00	-21.56 Average
8	0.502	9.80	28.41	38.21	56.00	-17.79 QP
9	4.665	9.98	10.11	20.09	46.00	-25.91 Average
10	4.665	9.98	18.29	28.27	56.00	-27.73 QP
11	21.105	10.24	22.81	33.05	50.00	-16.95 Average
12	21.105	10.24	31.37	41.61	60.00	-18.39 QP

AC 120V/60 Hz, Neutral

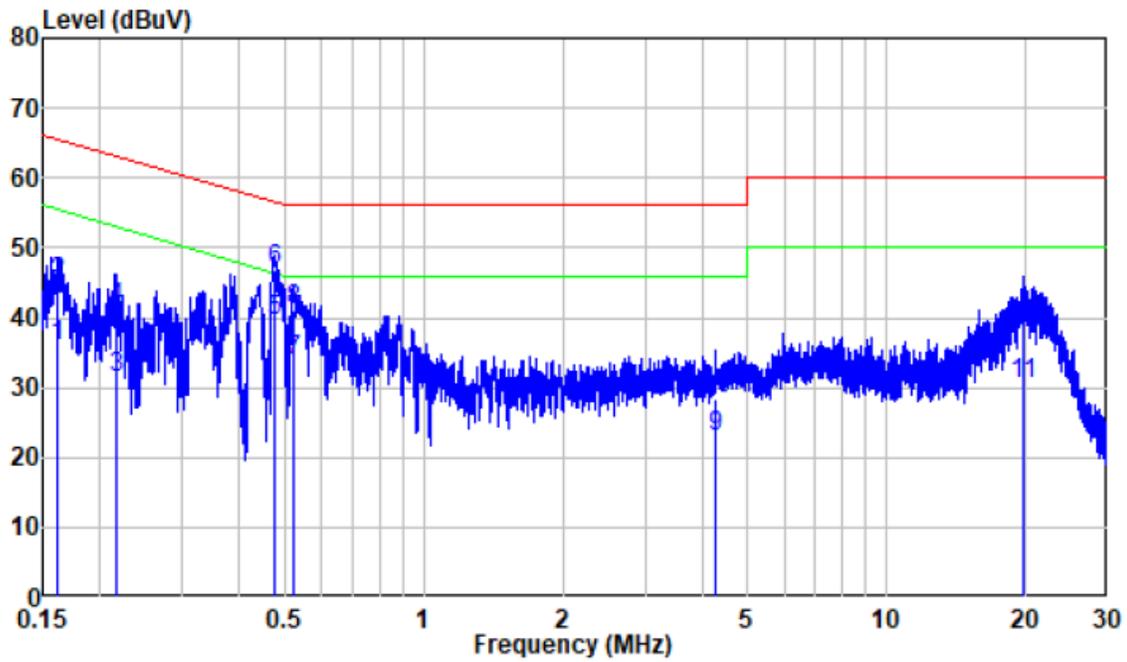

	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.162	9.93	25.92	35.85	55.38	-19.53	Average
2	0.162	9.93	35.08	45.01	65.38	-20.37	QP
3	0.217	9.99	21.50	31.49	52.93	-21.44	Average
4	0.217	9.99	31.22	41.21	62.93	-21.72	QP
5	0.474	9.91	29.57	39.48	46.44	-6.96	Average
6	0.474	9.91	36.88	46.79	56.44	-9.65	QP
7	0.523	9.91	23.79	33.70	46.00	-12.30	Average
8	0.523	9.91	31.24	41.15	56.00	-14.85	QP
9	4.266	10.04	12.93	22.97	46.00	-23.03	Average
10	4.266	10.04	18.22	28.26	56.00	-27.74	QP
11	19.661	10.19	20.16	30.35	50.00	-19.65	Average
12	19.661	10.19	27.68	37.87	60.00	-22.13	QP


FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

Applicable Standard


FCC §15.205; §15.209; §15.247(d)

EUT Setup

Below 1 GHz:

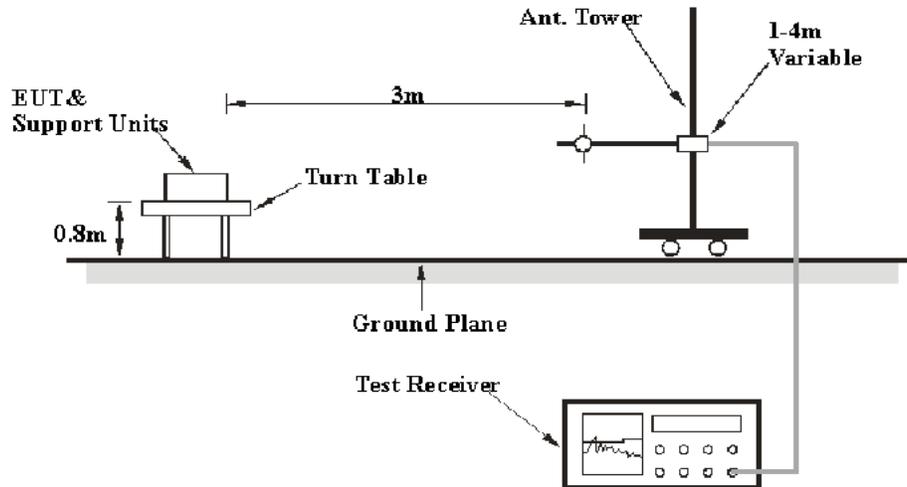

Above 1GHz:

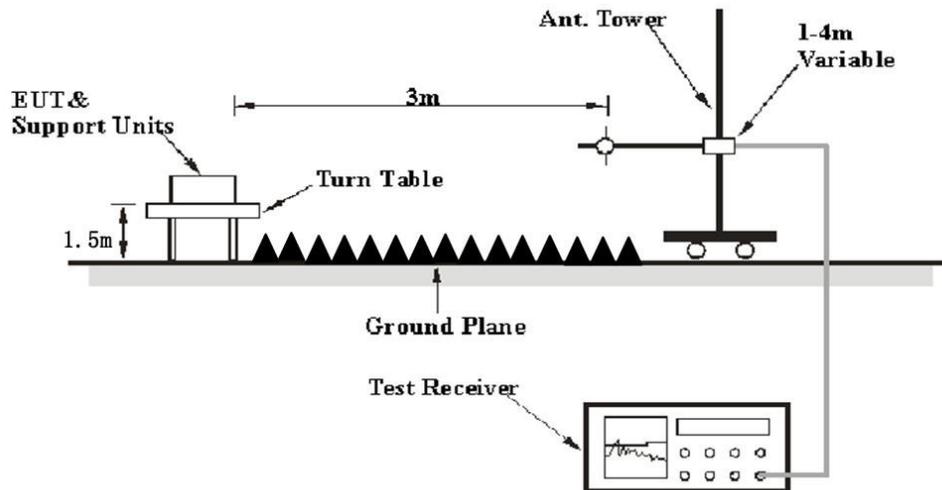

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1 MHz	10 Hz	/	Average

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Factor & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Level} / \text{Corrected Amplitude} - \text{Limit} \\ \text{Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

Test Data

Environmental Conditions


Temperature:	25~25.5°C
Relative Humidity:	50~64 %
ATM Pressure:	101.0 kPa

The testing was performed by Bin Deng on 2021-12-30 for below 1GHz and by Caro hu on 2021-12-17 and Bin Deng 2021-12-30 for above 1GHz.

EUT operation mode: Transmitting (Pre-scan in the X,Y and Z axes of orientation, the worst case of Z orientation was recorded)


30MHz-1GHz: (worst case is 8DPSK Mode, Low channel)

Horizontal:

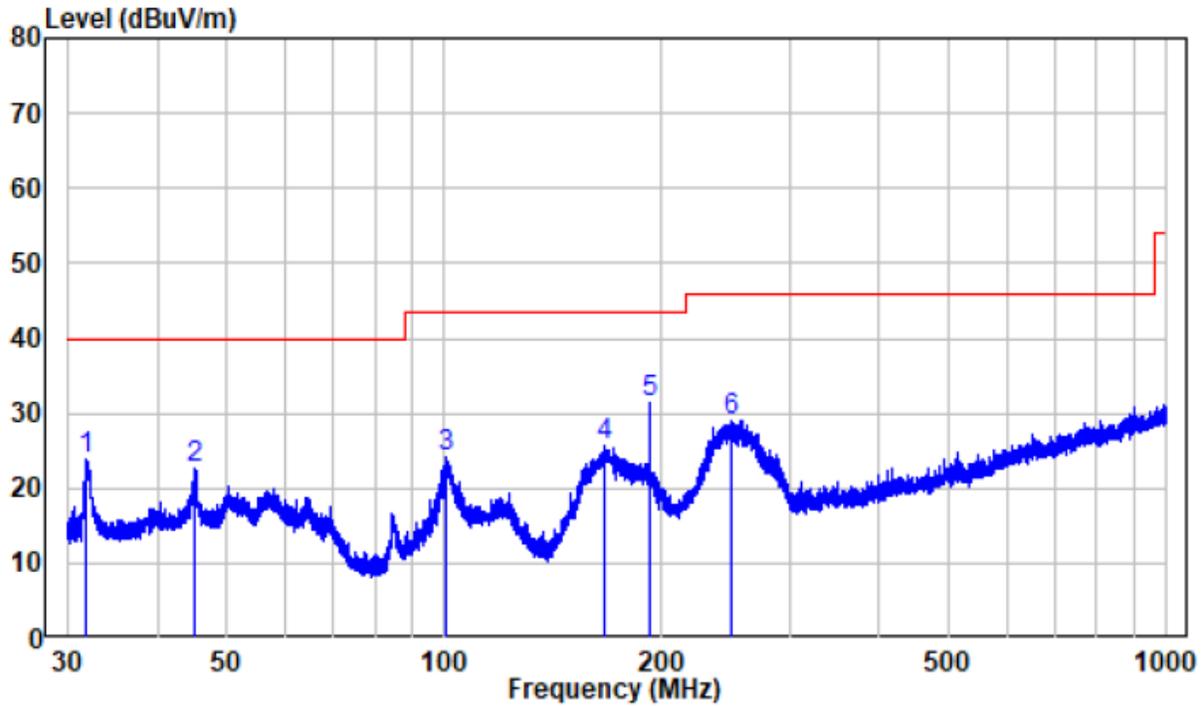

	Freq	Factor	Read Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	31.955	-12.17	35.95	23.78	40.00	-16.22 Peak
2	45.157	-9.95	32.46	22.51	40.00	-17.49 Peak
3	100.361	-11.75	35.82	24.07	43.50	-19.43 Peak
4	166.725	-13.91	39.60	25.69	43.50	-17.81 Peak
5	191.997	-11.25	42.57	31.32	43.50	-12.18 Peak
6	250.301	-10.74	39.68	28.94	46.00	-17.06 Peak

Vertical

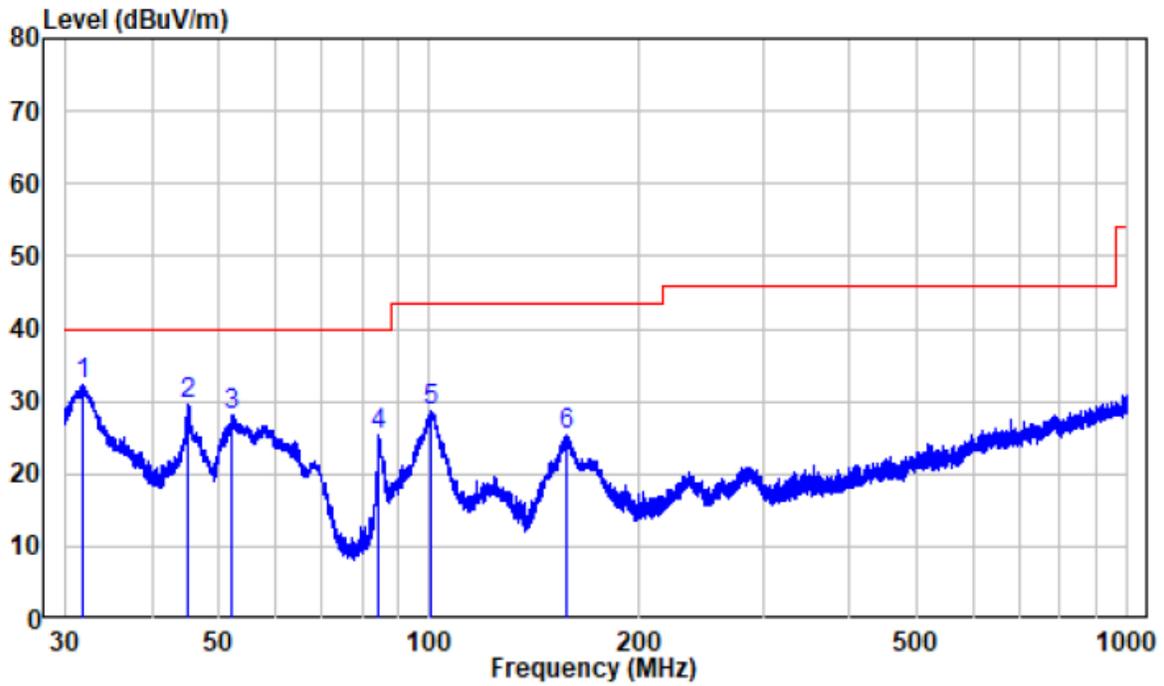

	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	31.857	-12.19	44.43	32.24	40.00	-7.76	Peak
2	44.979	-9.94	39.63	29.69	40.00	-10.31	Peak
3	52.139	-10.00	38.04	28.04	40.00	-11.96	Peak
4	84.702	-15.75	41.06	25.31	40.00	-14.69	Peak
5	100.581	-11.73	40.29	28.56	43.50	-14.94	Peak
6	156.801	-14.70	40.14	25.44	43.50	-18.06	Peak

Above 1GHz: (worst case is 8DPSK Mode)

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	PK/QP/Ave.		Height (m)	Polar (H/V)				
Low Channel (2402 MHz)									
2310	67.82	PK	16	2.4	H	-7.25	60.57	74	-13.43
2310	53.54	AV	16	2.4	H	-7.25	46.29	54	-7.71
2390	68.82	PK	319	2	H	-7.23	61.59	74	-12.41
2390	54.13	AV	319	2	H	-7.23	46.9	54	-7.1
2310	67.96	PK	75	2.2	V	-7.25	60.71	74	-13.29
2310	53.67	AV	75	2.2	V	-7.25	46.42	54	-7.58
2390	68.95	PK	317	2.5	V	-7.23	61.72	74	-12.28
2390	54.19	AV	317	2.5	V	-7.23	46.96	54	-7.04
4804	54.61	PK	141	2	H	-3.51	51.1	74	-22.9
4804	54.75	PK	225	1.6	V	-3.51	51.24	74	-22.76
Middle Channel (2441 MHz)									
4882	55.09	PK	215	1.3	H	-3.28	51.81	74	-22.19
4882	55.16	PK	193	2.3	V	-3.28	51.88	74	-22.12
High Channel (2480 MHz)									
2483.5	69.42	PK	85	1.3	H	-7.18	62.24	74	-11.76
2483.5	54.79	AV	85	1.3	H	-7.18	47.61	54	-6.39
2500	68.55	PK	200	2.4	H	-7.18	61.37	74	-12.63
2500	54.67	AV	200	2.4	H	-7.18	47.49	54	-6.51
2483.5	69.66	PK	136	2	V	-7.18	62.48	74	-11.52
2483.5	54.98	AV	136	2	V	-7.18	47.8	54	-6.2
2500	68.69	PK	305	1	V	-7.18	61.51	74	-12.49
2500	54.73	AV	305	1	V	-7.18	47.55	54	-6.45
4960	54.93	PK	54	1.7	H	-3.04	51.89	74	-22.11
4960	55.1	PK	8	1.6	V	-3.04	52.06	74	-21.94

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading

Margin = Corrected. Amplitude - Limit


The other spurious emission which is in the noise floor level was not recorded.

The test result of peak was less than the limit of average, so just peak value were recorded.


1-18GHz

Pre-scan for High channel

Horizontal:

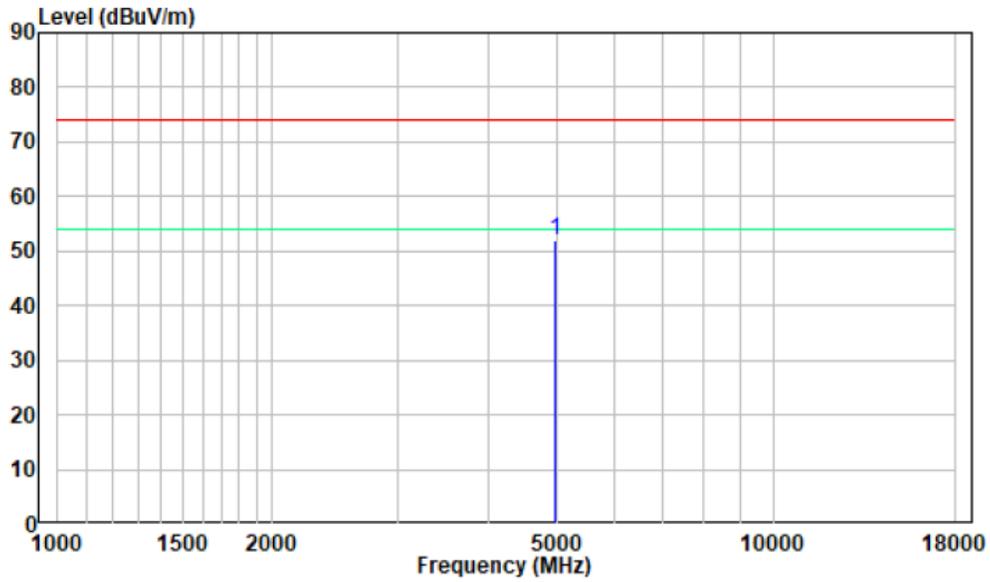


Vertical:

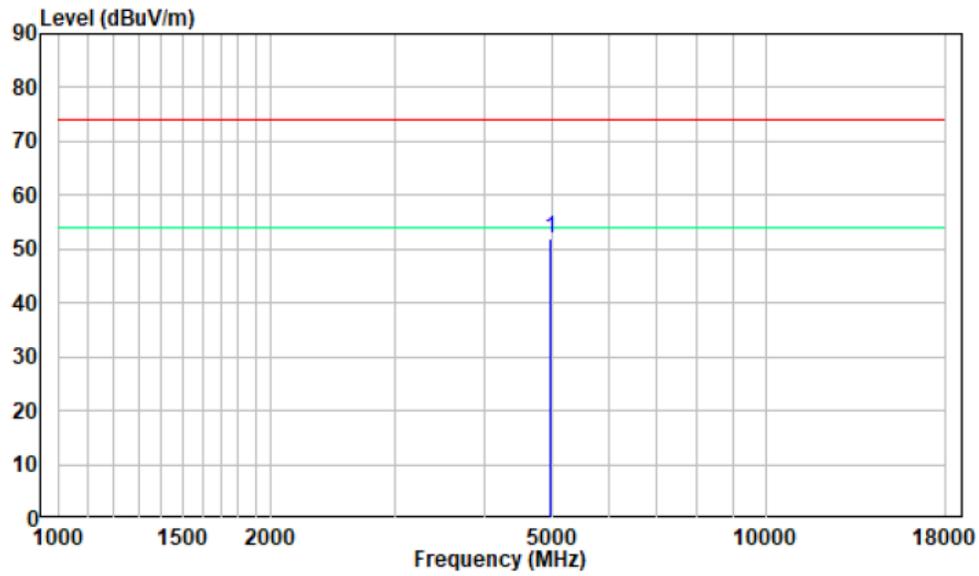


18-25GHz

Pre-scan for High channel

Horizontal:

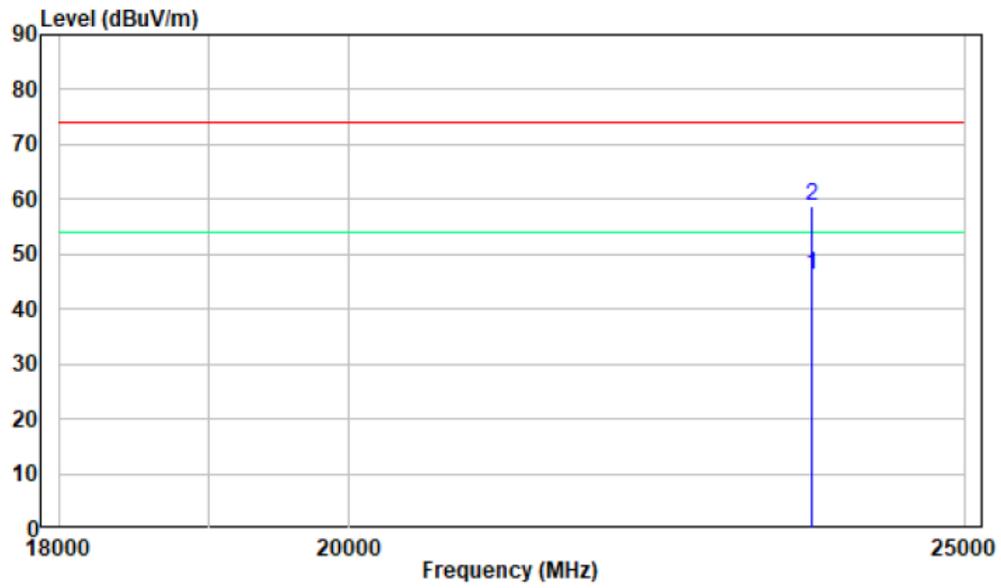

Vertical:

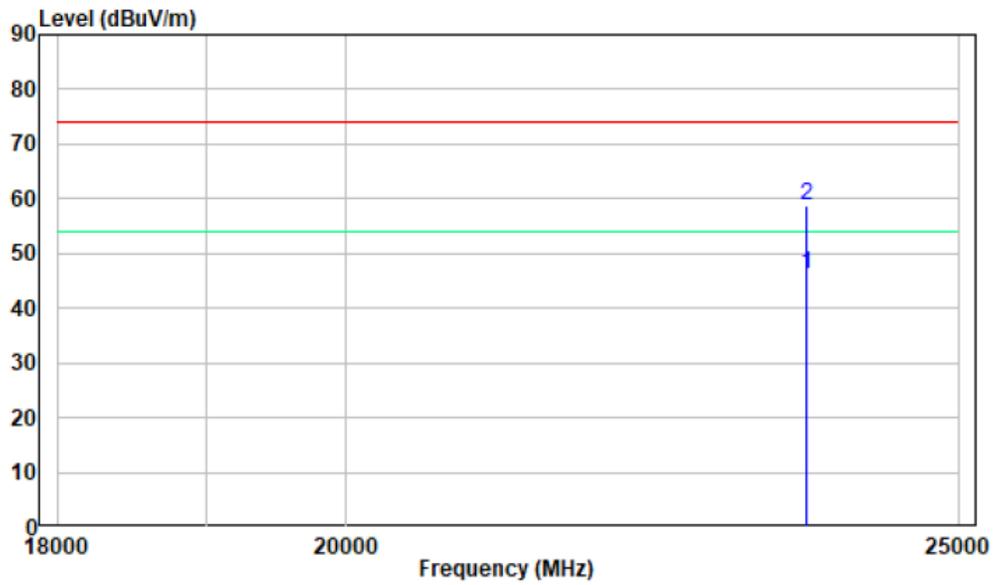


FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.



Test Data

Environmental Conditions

Temperature:	19 °C
Relative Humidity:	34 %
ATM Pressure:	100.9 kPa

The testing was performed by Matt Liang on 2024-12-23.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


Test Procedure

The following conditions shall be observed for measuring the occupied bandwidth and 20 dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / 20 dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / 20 dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).



Test Data**Environmental Conditions**

Temperature:	19 °C
Relative Humidity:	34 %
ATM Pressure:	100.9 kPa

The testing was performed by Matt Liang on 2024-12-23.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.


FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.



Test Data

Environmental Conditions

Temperature:	19 °C
Relative Humidity:	34 %
ATM Pressure:	100.9 kPa

The testing was performed by Matt Liang on 2024-12-23.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.


FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. The EUT was worked in channel hopping.
2. Set the RBW to: 1MHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to 0Hz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Recorded the time of single pulses



Test Data

Environmental Conditions

Temperature:	19 °C
Relative Humidity:	34 %
ATM Pressure:	100.9 kPa

The testing was performed by Matt Liang on 2024-12-23.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.


FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Data

Environmental Conditions

Temperature:	19 °C
Relative Humidity:	34 %
ATM Pressure:	100.9 kPa

The testing was performed by Matt Liang on 2024-12-23.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.


FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

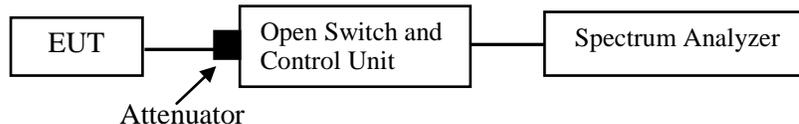

Test Data

Environmental Conditions

Temperature:	19 °C
Relative Humidity:	34 %
ATM Pressure:	100.9 kPa

The testing was performed by Matt Liang on 2024-12-23.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.


APPENDIX

Appendix A: 20dB Emission Bandwidth


Test Result

Test Mode	Antenna	Freq(MHz)	20dB EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.96	2401.55	2402.51	---	---
		2441	0.96	2440.55	2441.51	---	---
		2480	0.96	2479.55	2480.51	---	---
2DH5	Ant1	2402	1.19	2401.43	2402.61	---	---
		2441	1.19	2440.43	2441.61	---	---
		2480	1.19	2479.43	2480.62	---	---
3DH5	Ant1	2402	1.20	2401.44	2402.64	---	---
		2441	1.20	2440.44	2441.64	---	---
		2480	1.20	2479.44	2480.64	---	---

Test Graphs

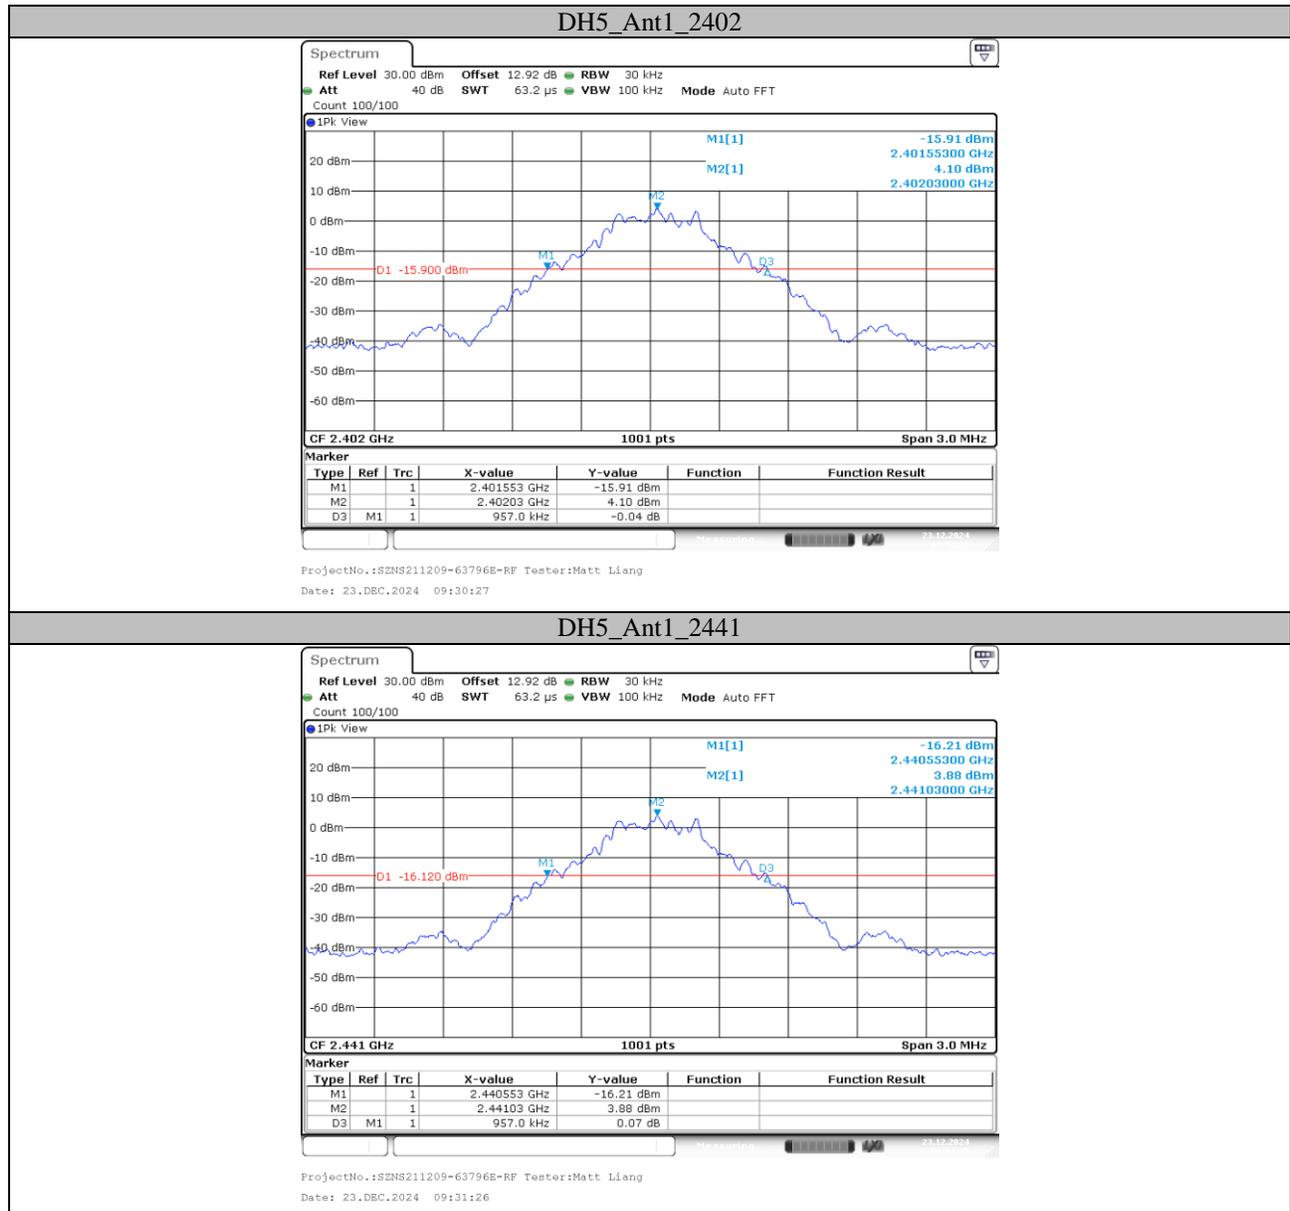


DH5_Ant1_2480

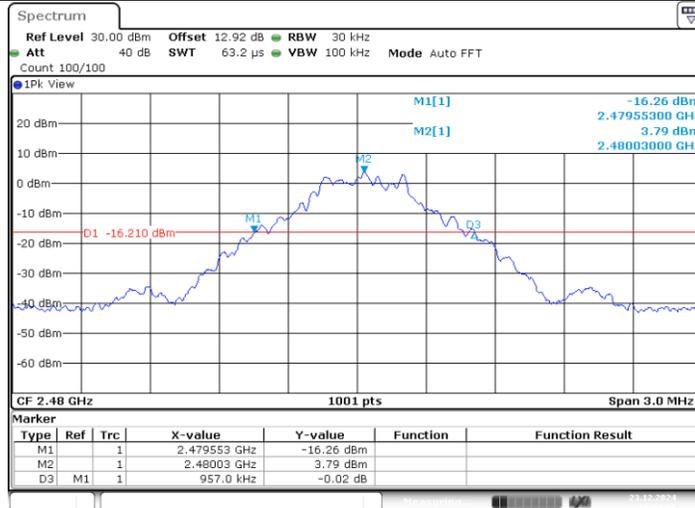


ProjectNo.:SZNS211209-63796E-RF Tester:Matt Liang
 Date: 23.DEC.2024 10:04:06

2DH5_Ant1_2402

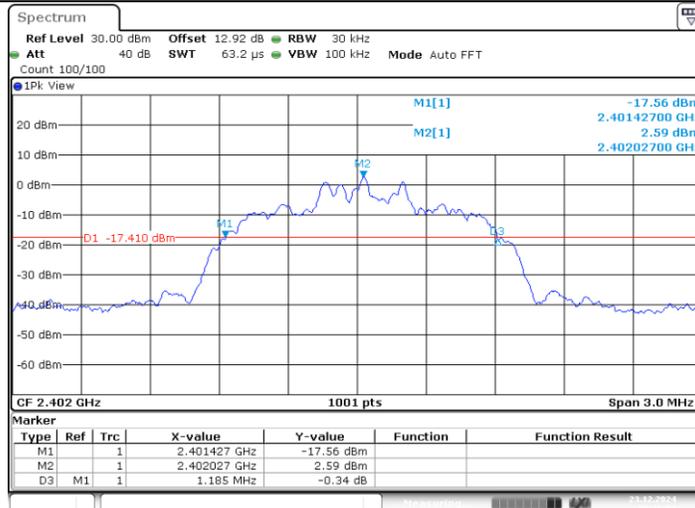


ProjectNo.:SZNS211209-63796E-RF Tester:Matt Liang
 Date: 23.DEC.2024 09:35:03

2DH5_Ant1_2441

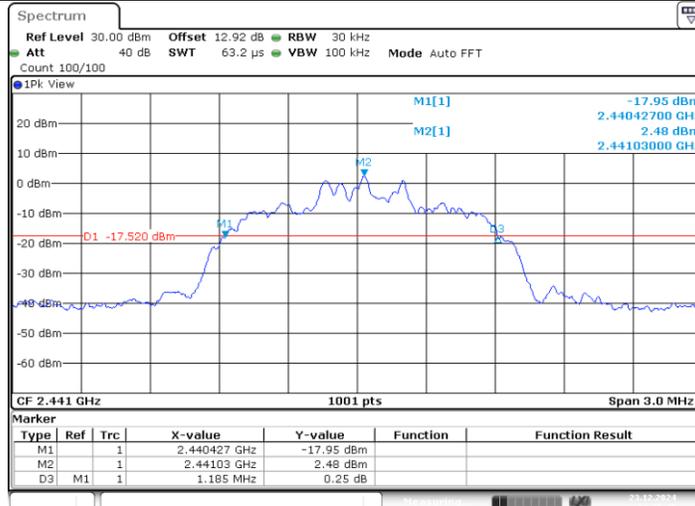


ProjectNo.:SZNS211209-63796E-RF Tester:Matt Liang
 Date: 23.DEC.2024 09:35:45

2DH5_Ant1_2480

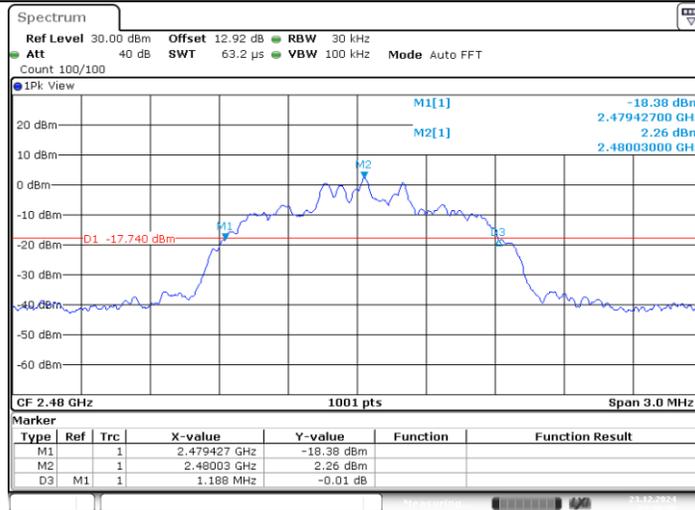


ProjectNo.:SZNS211209-63796E-RF Tester:Matt Liang
 Date: 23.DEC.2024 09:36:38

3DH5_Ant1_2402

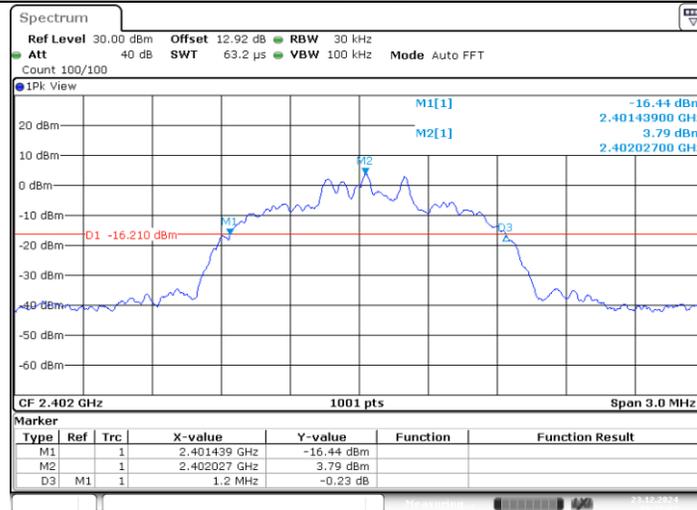


ProjectNo.:SZNS211209-63796E-RF Tester:Matt Liang
 Date: 23.DEC.2024 09:38:01

3DH5_Ant1_2441

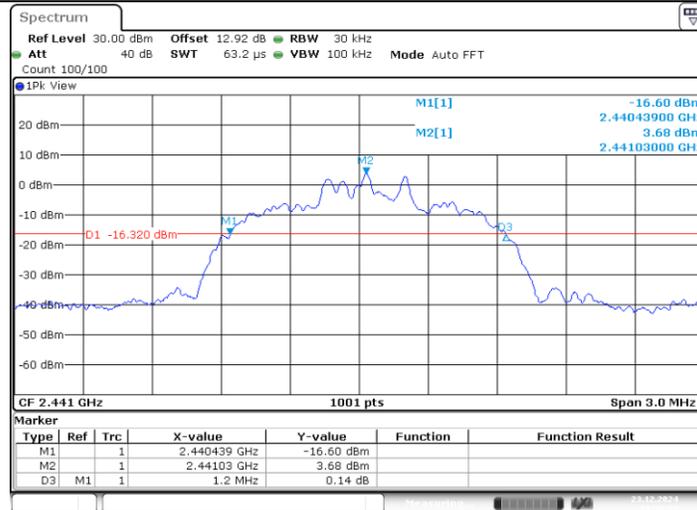


ProjectNo.:SZNS211209-63796E-RF Tester:Matt Liang
 Date: 23.DEC.2024 09:38:53

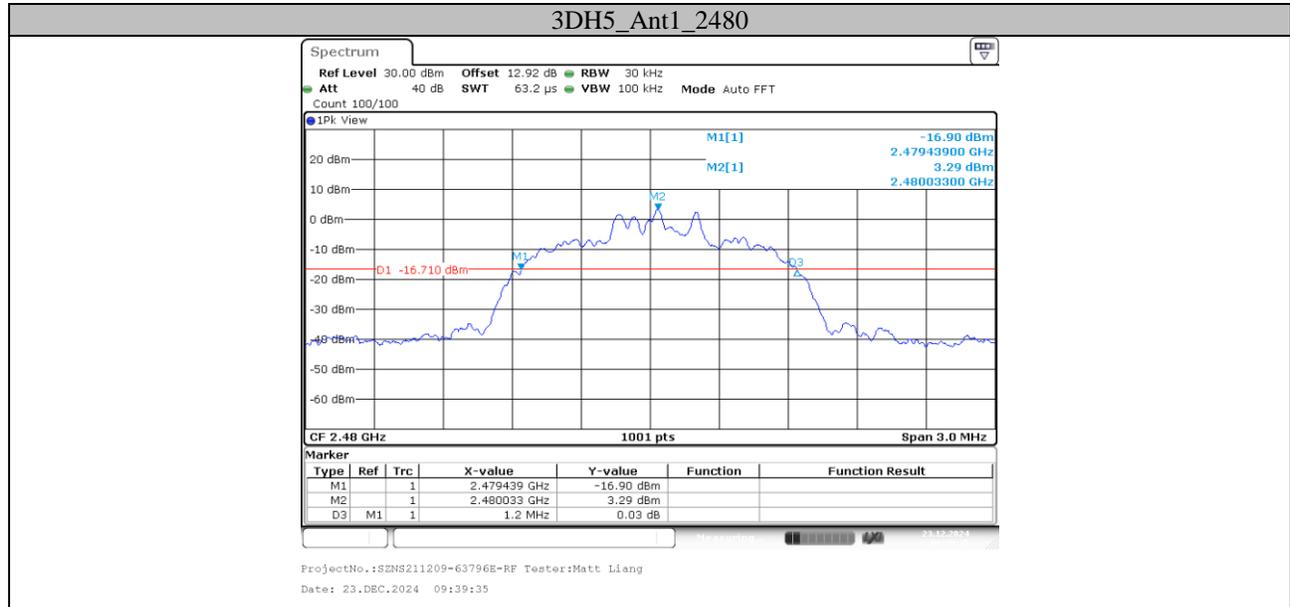


Appendix B: Occupied Channel Bandwidth**Test Result**

Test Mode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.869	2401.5894	2402.4585	---	---
		2441	0.866	2440.5924	2441.4585	---	---
		2480	0.869	2479.5894	2480.4585	---	---
2DH5	Ant1	2402	1.121	2401.4665	2402.5874	---	---
		2441	1.127	2440.4635	2441.5904	---	---
		2480	1.124	2479.4665	2480.5904	---	---
3DH5	Ant1	2402	1.121	2401.4695	2402.5904	---	---
		2441	1.121	2440.4695	2441.5904	---	---
		2480	1.124	2479.4695	2480.5934	---	---

Test Graphs

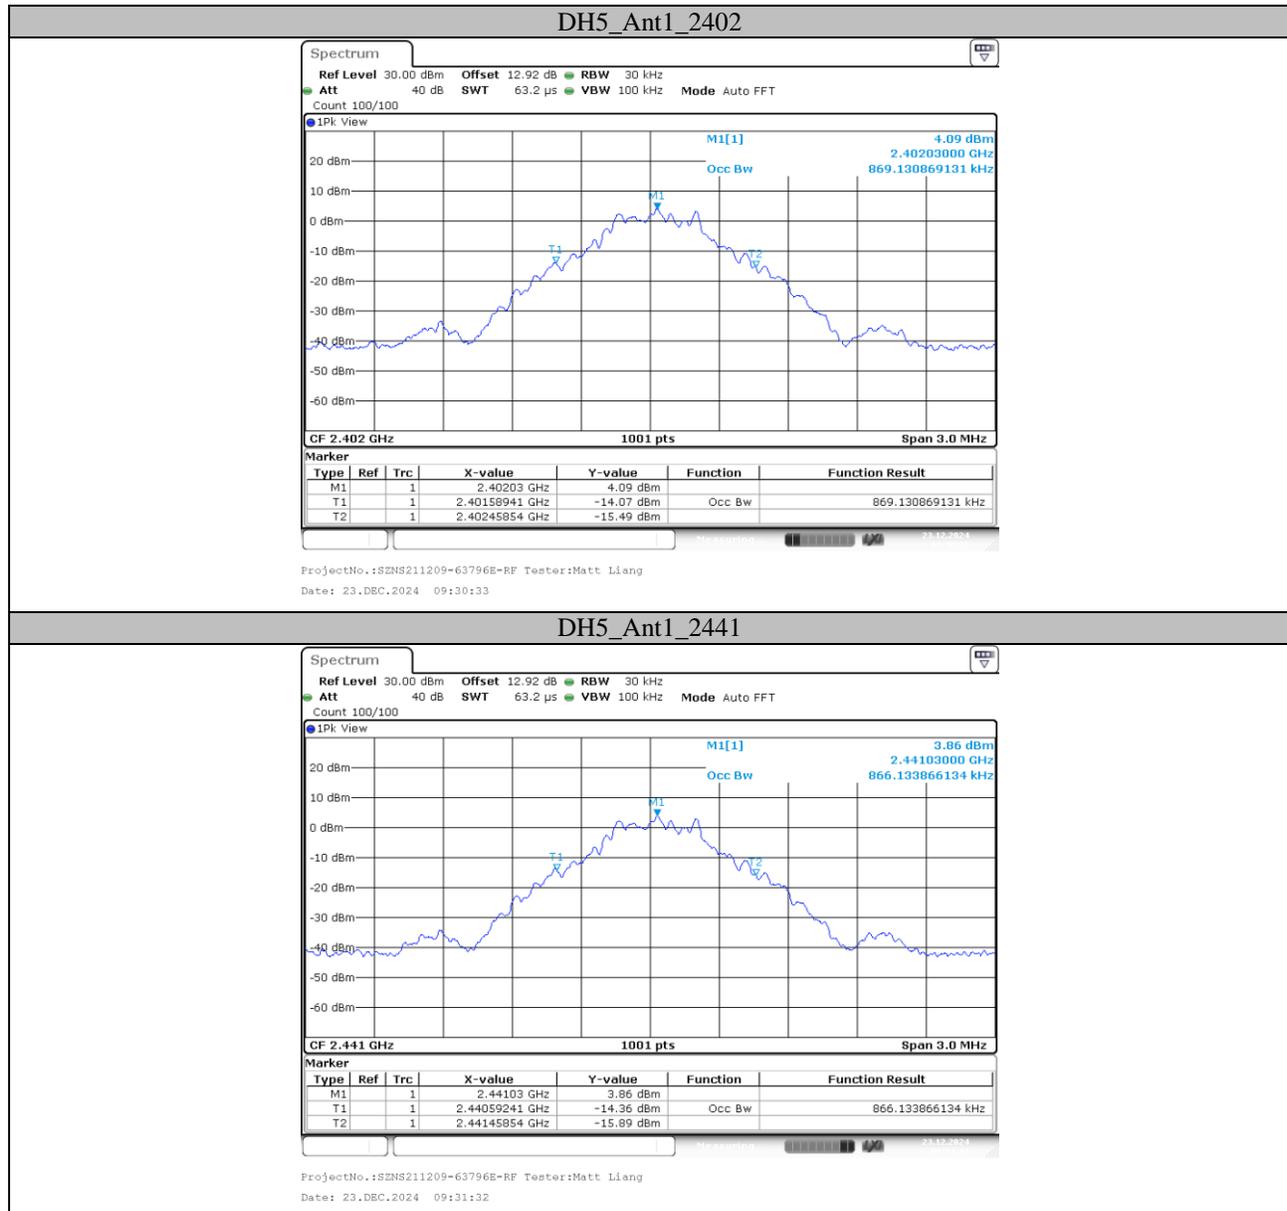

DH5_Ant1_2480

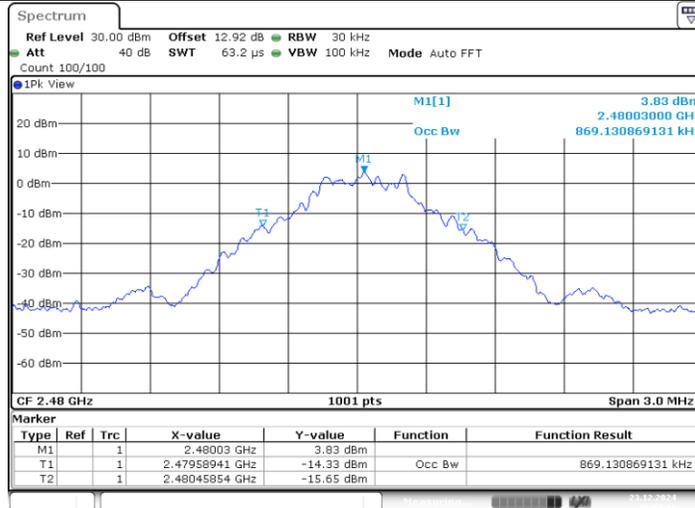


ProjectNo.:SZNS211209-63796E-RF Tester:Matt Liang
 Date: 23.DEC.2024 10:04:12

2DH5_Ant1_2402




ProjectNo.:SZNS211209-63796E-RF Tester:Matt Liang
 Date: 23.DEC.2024 09:35:09

2DH5_Ant1_2441

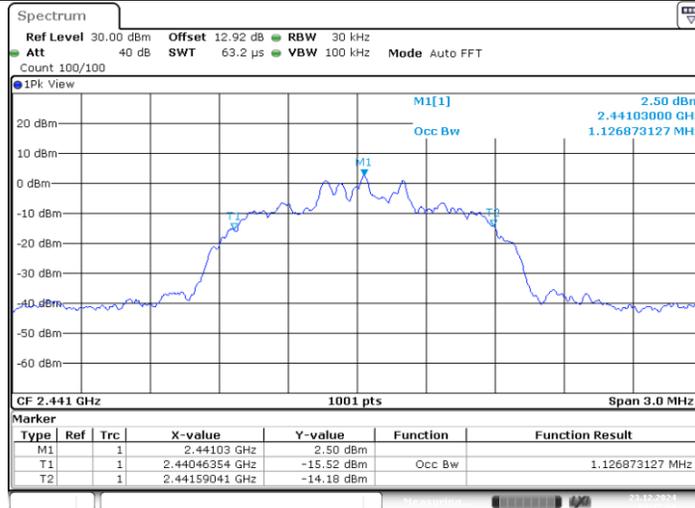


ProjectNo.:SZNS211209-63796E-RF Tester:Matt Liang
 Date: 23.DEC.2024 09:35:51

2DH5_Ant1_2480

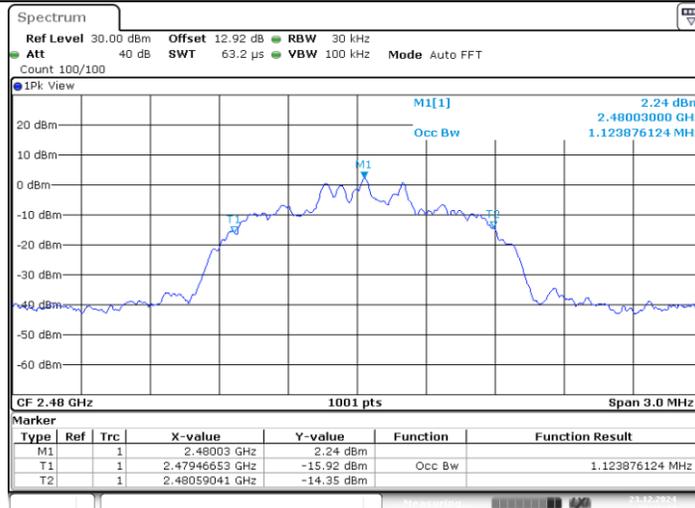



ProjectNo.:SZNS211209-63796E-RF Tester:Matt Liang
 Date: 23.DEC.2024 09:36:44

3DH5_Ant1_2402

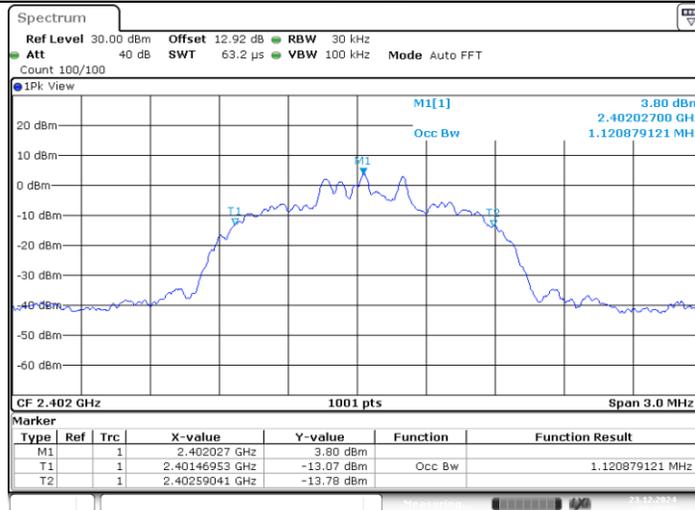

3DH5_Ant1_2441

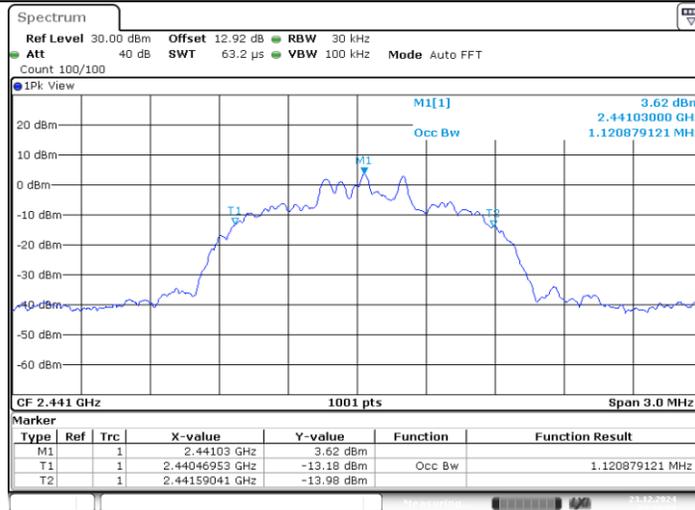


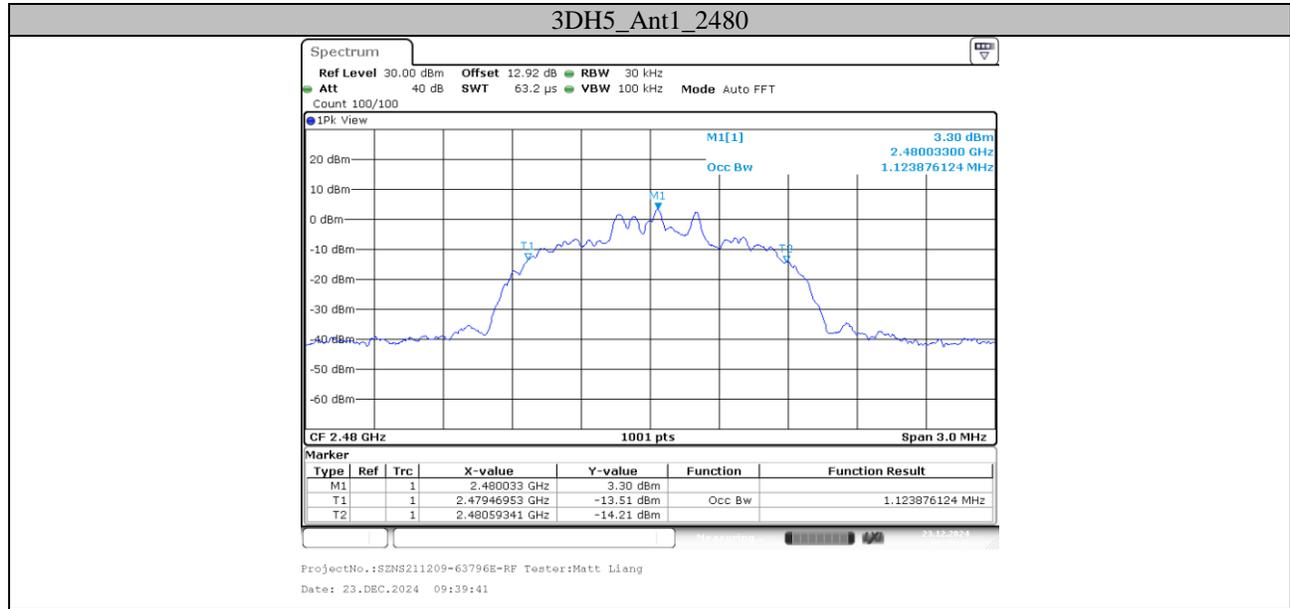


Appendix C: Maximum Conducted Output Power**Test Result Peak**

Test Mode	Antenna	Freq(MHz)	Conducted Peak Power[dBm]	Limit[dBm]	Verdict
DH5	Ant1	2402	6.82	≤20.97	PASS
		2441	6.27	≤20.97	PASS
		2480	6.94	≤20.97	PASS
2DH5	Ant1	2402	5.65	≤20.97	PASS
		2441	5.75	≤20.97	PASS
		2480	5.18	≤20.97	PASS
3DH5	Ant1	2402	5.91	≤20.97	PASS
		2441	5.8	≤20.97	PASS
		2480	5.35	≤20.97	PASS

Test Graphs

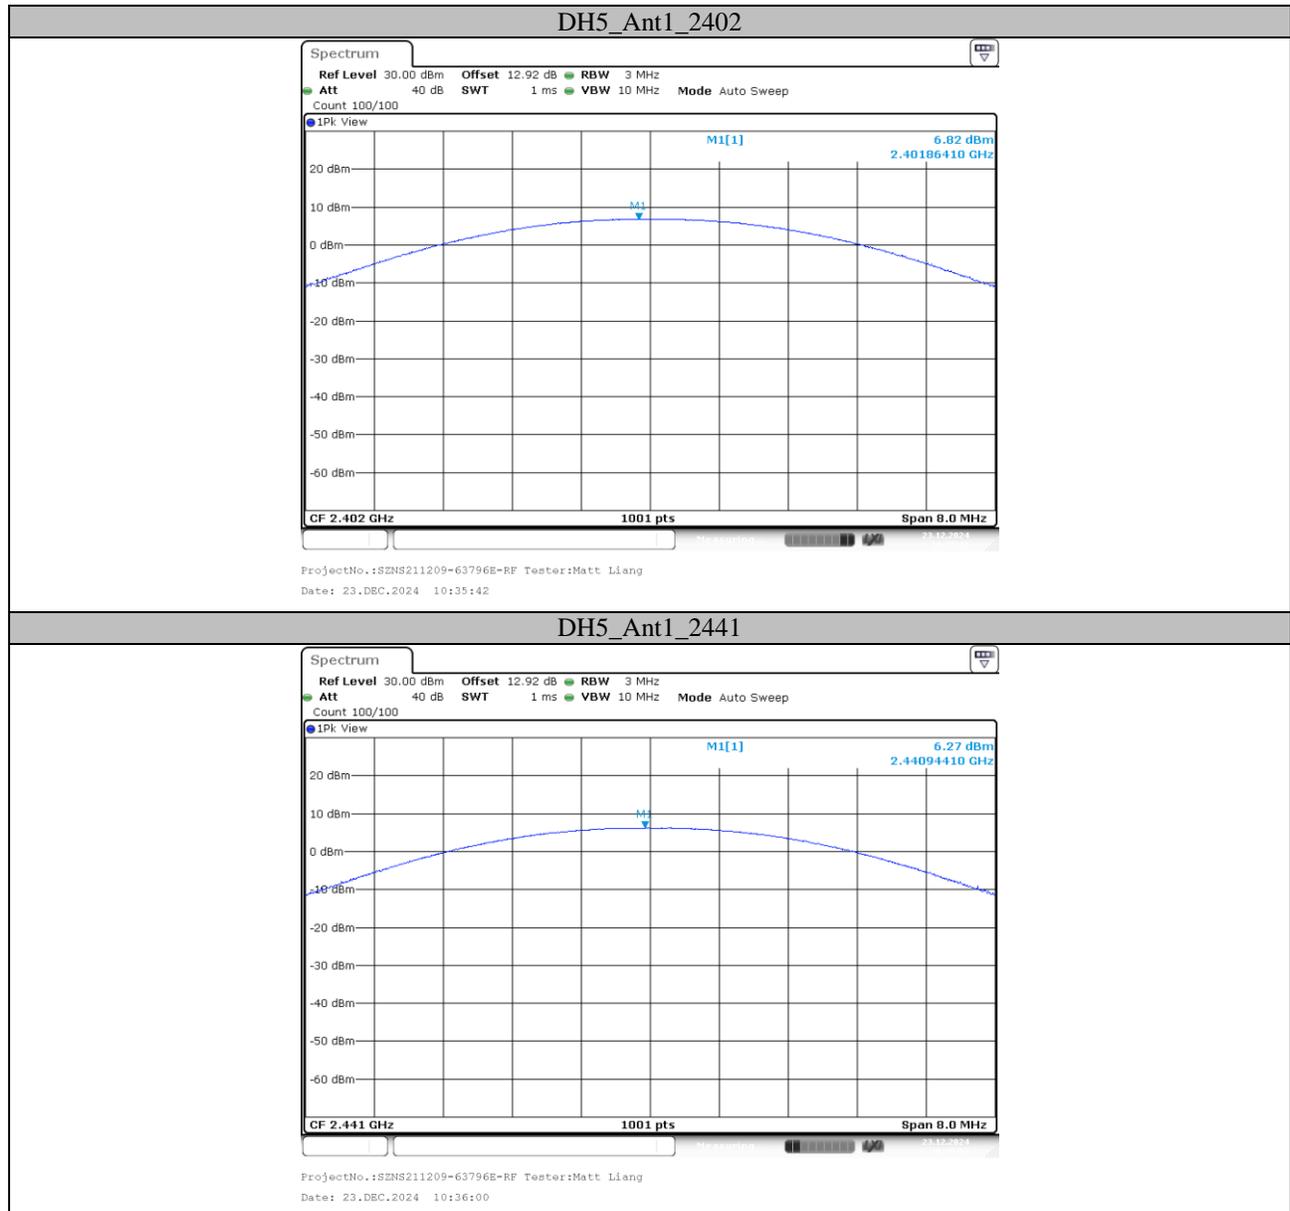


DH5_Ant1_2480

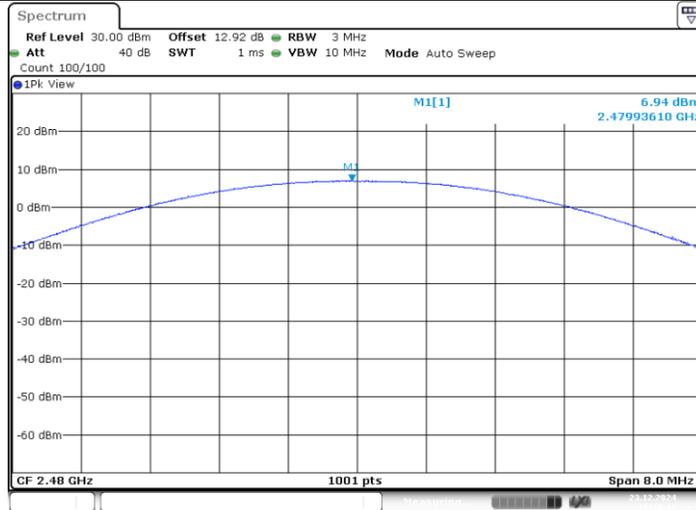


ProjectNo.:SZNS211209-63796E-RF Tester:Matt Liang
Date: 23.DEC.2024 10:37:13

2DH5_Ant1_2402

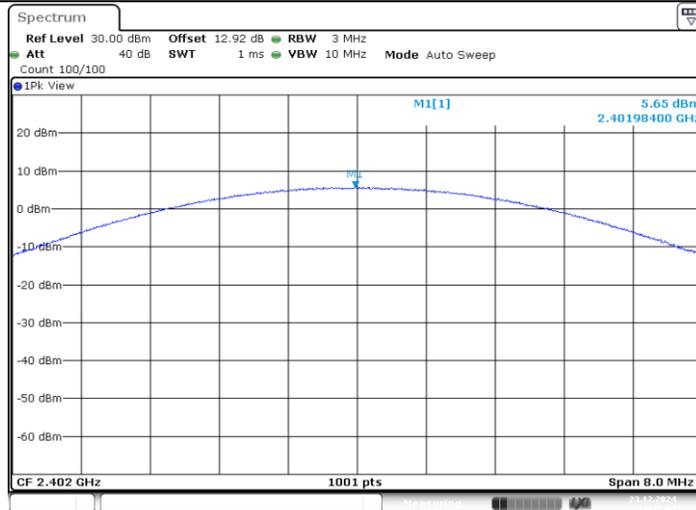


ProjectNo.:SZNS211209-63796E-RF Tester:Matt Liang
Date: 23.DEC.2024 10:42:05

2DH5_Ant1_2441

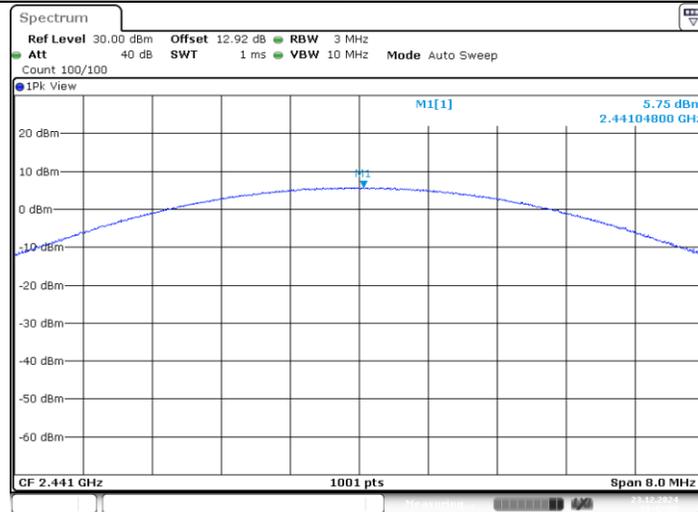

ProjectNo.:SZNS211209-63796E-RF Tester:Matt Liang
Date: 23.DEC.2024 10:42:56

2DH5_Ant1_2480

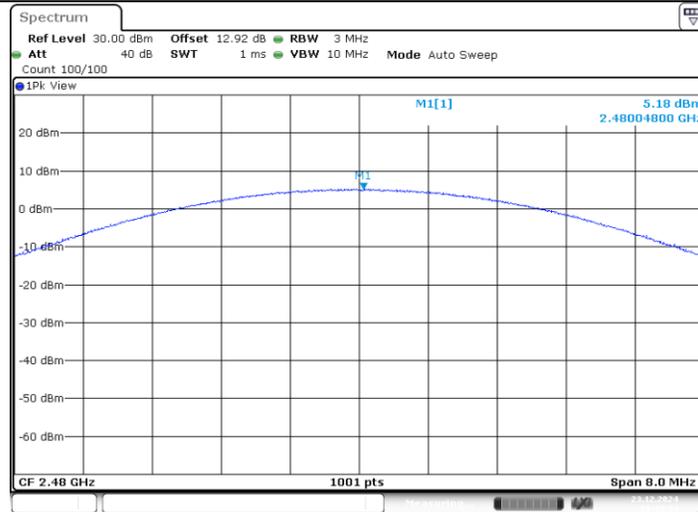


ProjectNo.:SZNS211209-63796E-RF Tester:Matt Liang
Date: 23.DEC.2024 10:43:34

3DH5_Ant1_2402




ProjectNo.:SZNS211209-63796E-RF Tester:Matt Liang
Date: 23.DEC.2024 10:44:25

3DH5_Ant1_2441

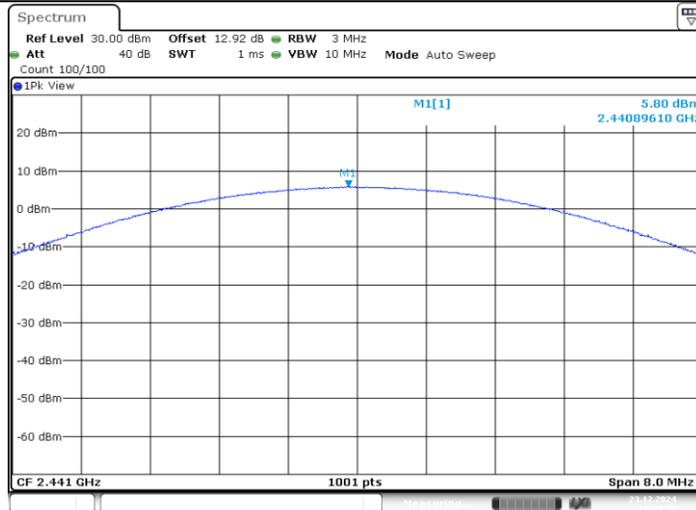

ProjectNo.:SZNS211209-63796E-RF Tester:Matt Liang
Date: 23.DEC.2024 10:44:38

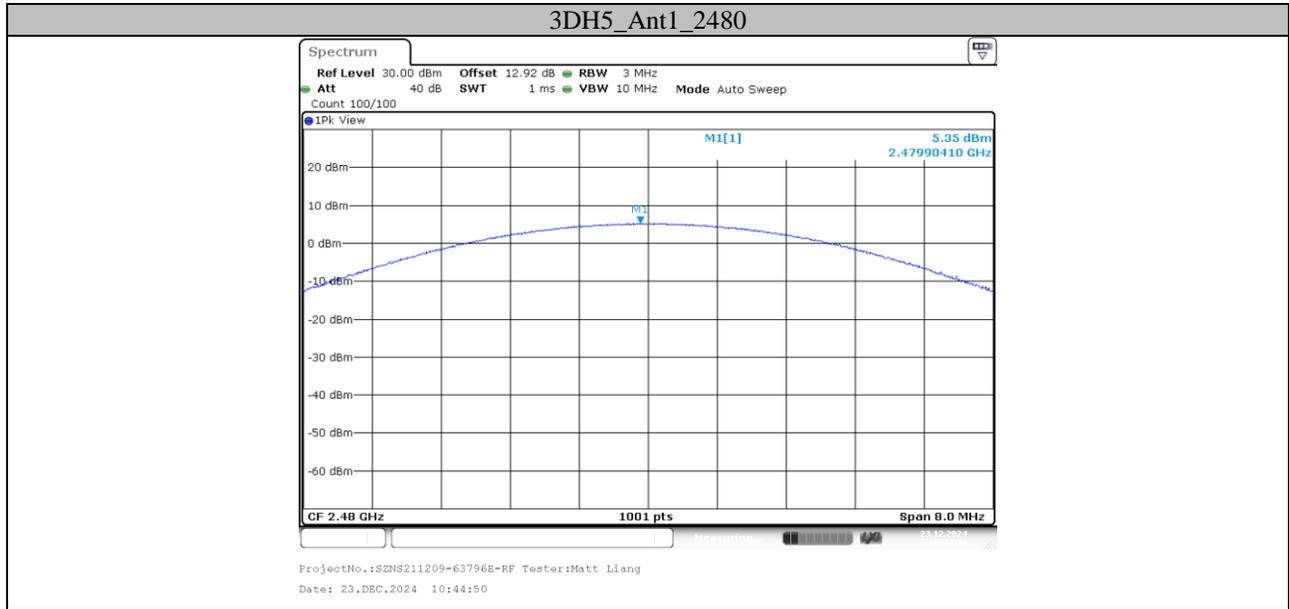


Appendix D: Carrier Frequency Separation**Test Result**

Test Mode	Antenna	Freq(MHz)	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	1	≥ 0.640	PASS
2DH5	Ant1	Hop	1	≥ 0.793	PASS
3DH5	Ant1	Hop	1.006	≥ 0.800	PASS

Test Graphs




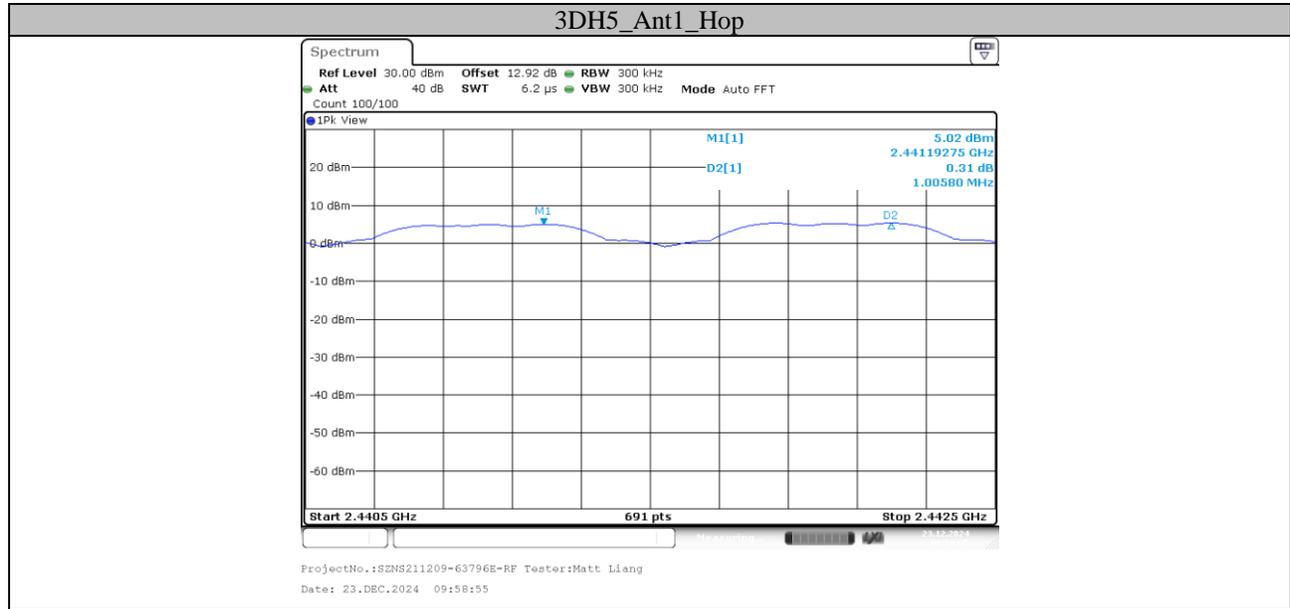



Appendix E: Time of Occupancy**Test Result**


Test Mode	Antenna	Freq(MHz)	Burst Width [ms]	Total Hops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.405	320	0.13	≤0.4	PASS
DH3	Ant1	Hop	1.653	180	0.298	≤0.4	PASS
DH5	Ant1	Hop	2.893	110	0.318	≤0.4	PASS
2DH1	Ant1	Hop	0.414	320	0.132	≤0.4	PASS
2DH3	Ant1	Hop	1.659	170	0.282	≤0.4	PASS
2DH5	Ant1	Hop	2.899	110	0.319	≤0.4	PASS
3DH1	Ant1	Hop	0.415	330	0.137	≤0.4	PASS
3DH3	Ant1	Hop	1.656	160	0.265	≤0.4	PASS
3DH5	Ant1	Hop	2.899	110	0.319	≤0.4	PASS


Test Graphs

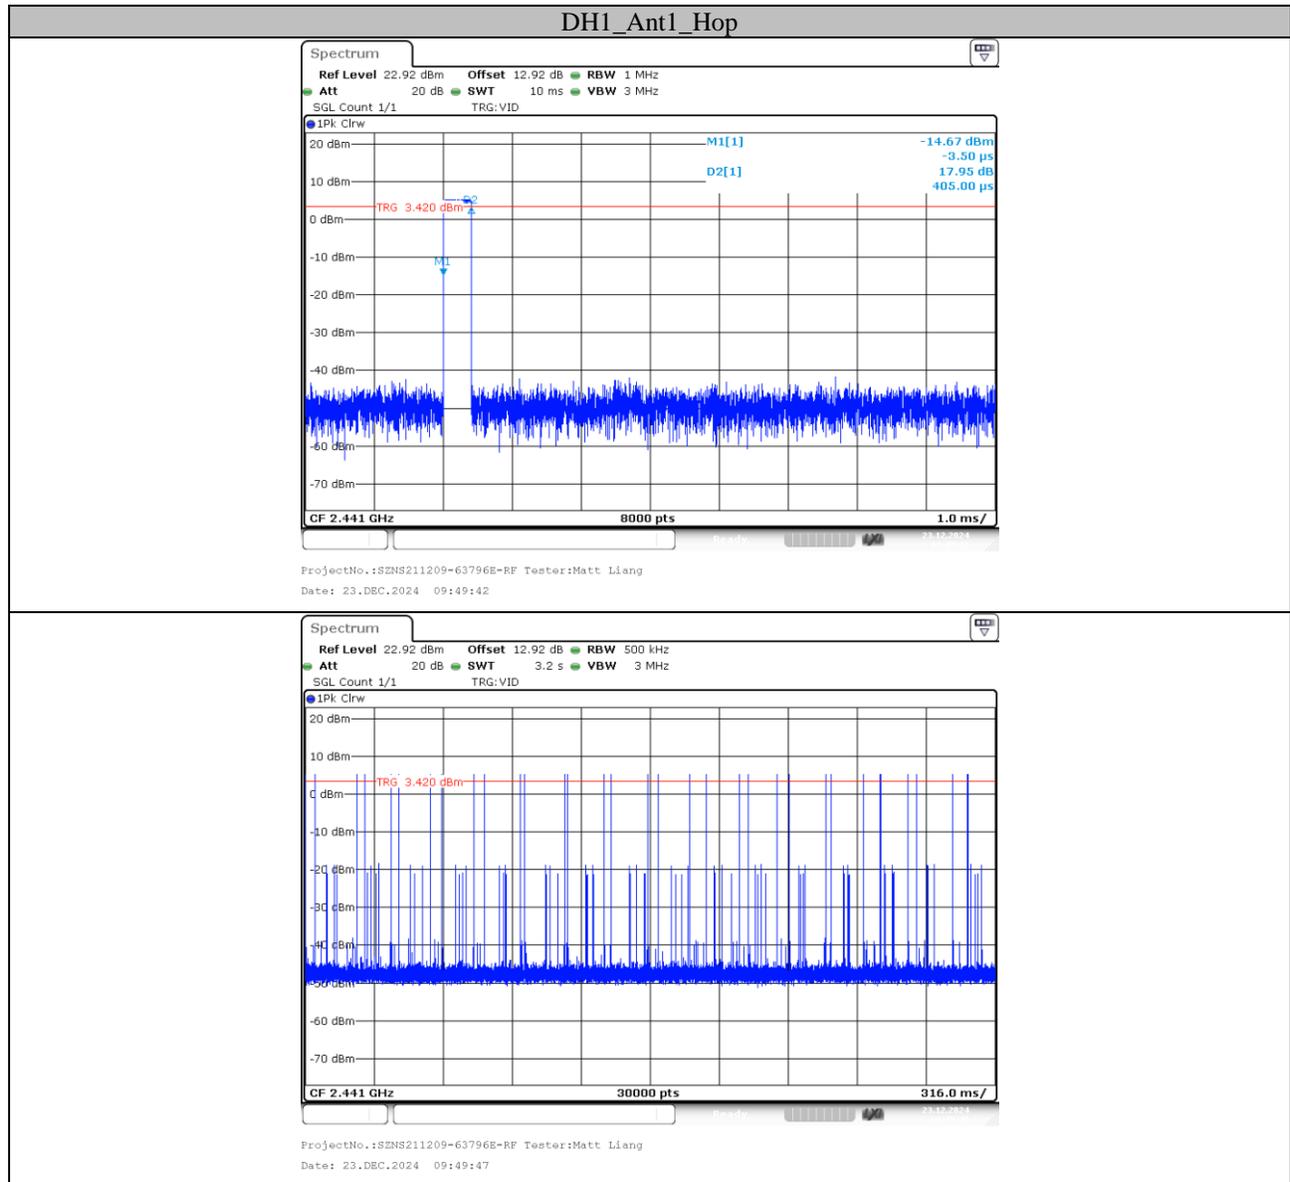


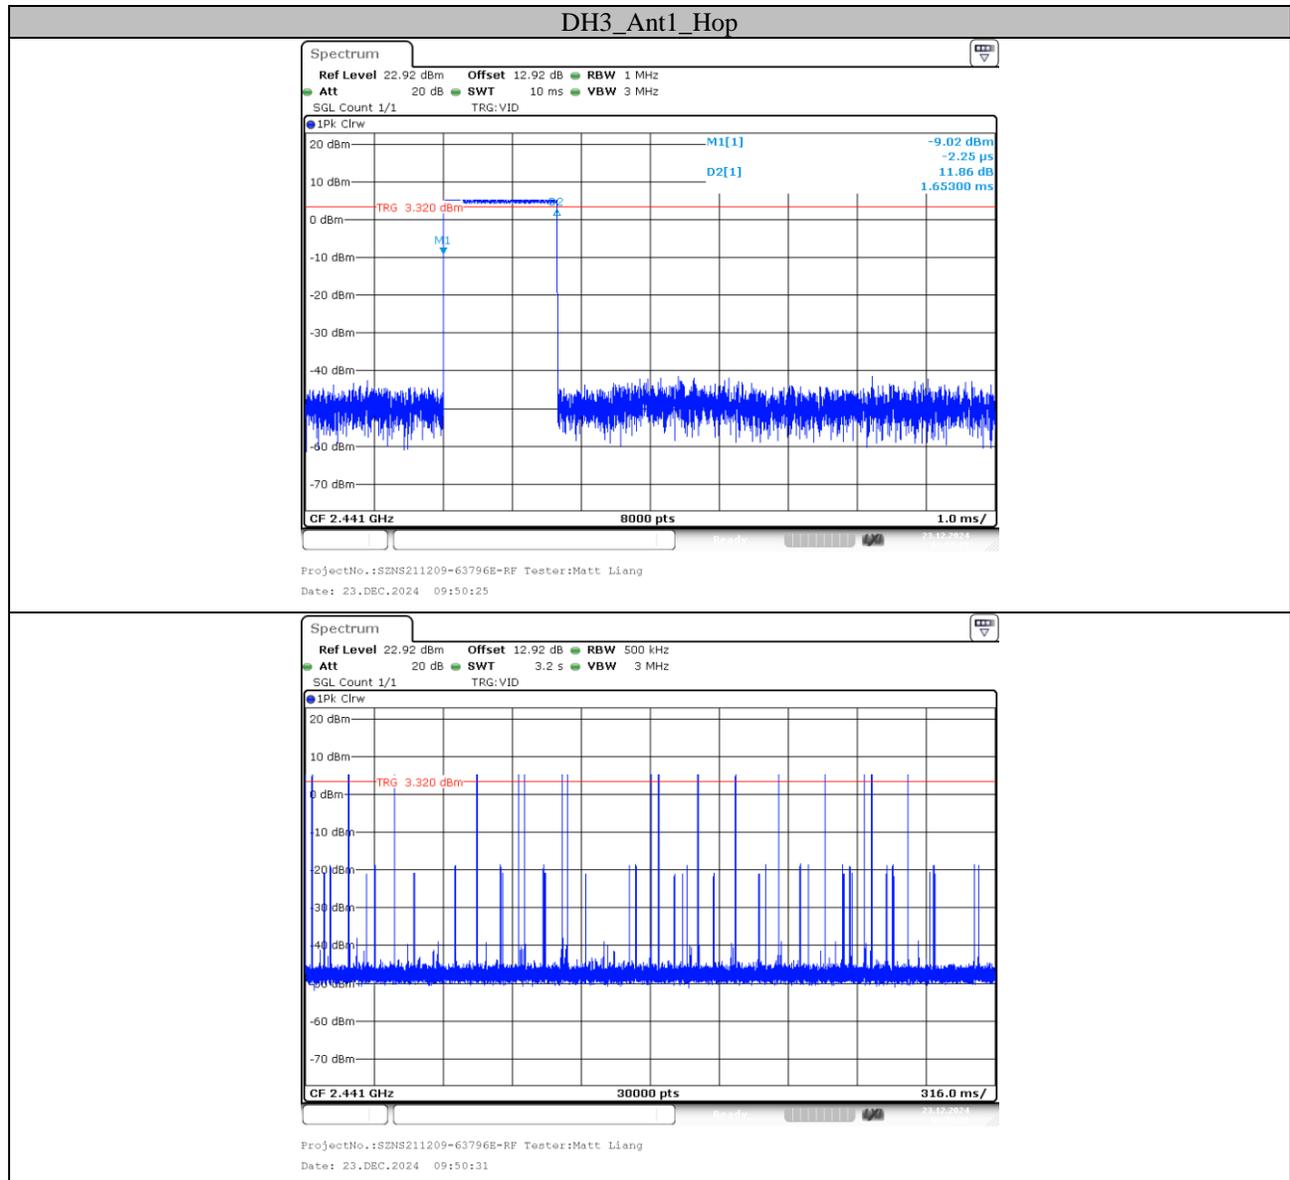

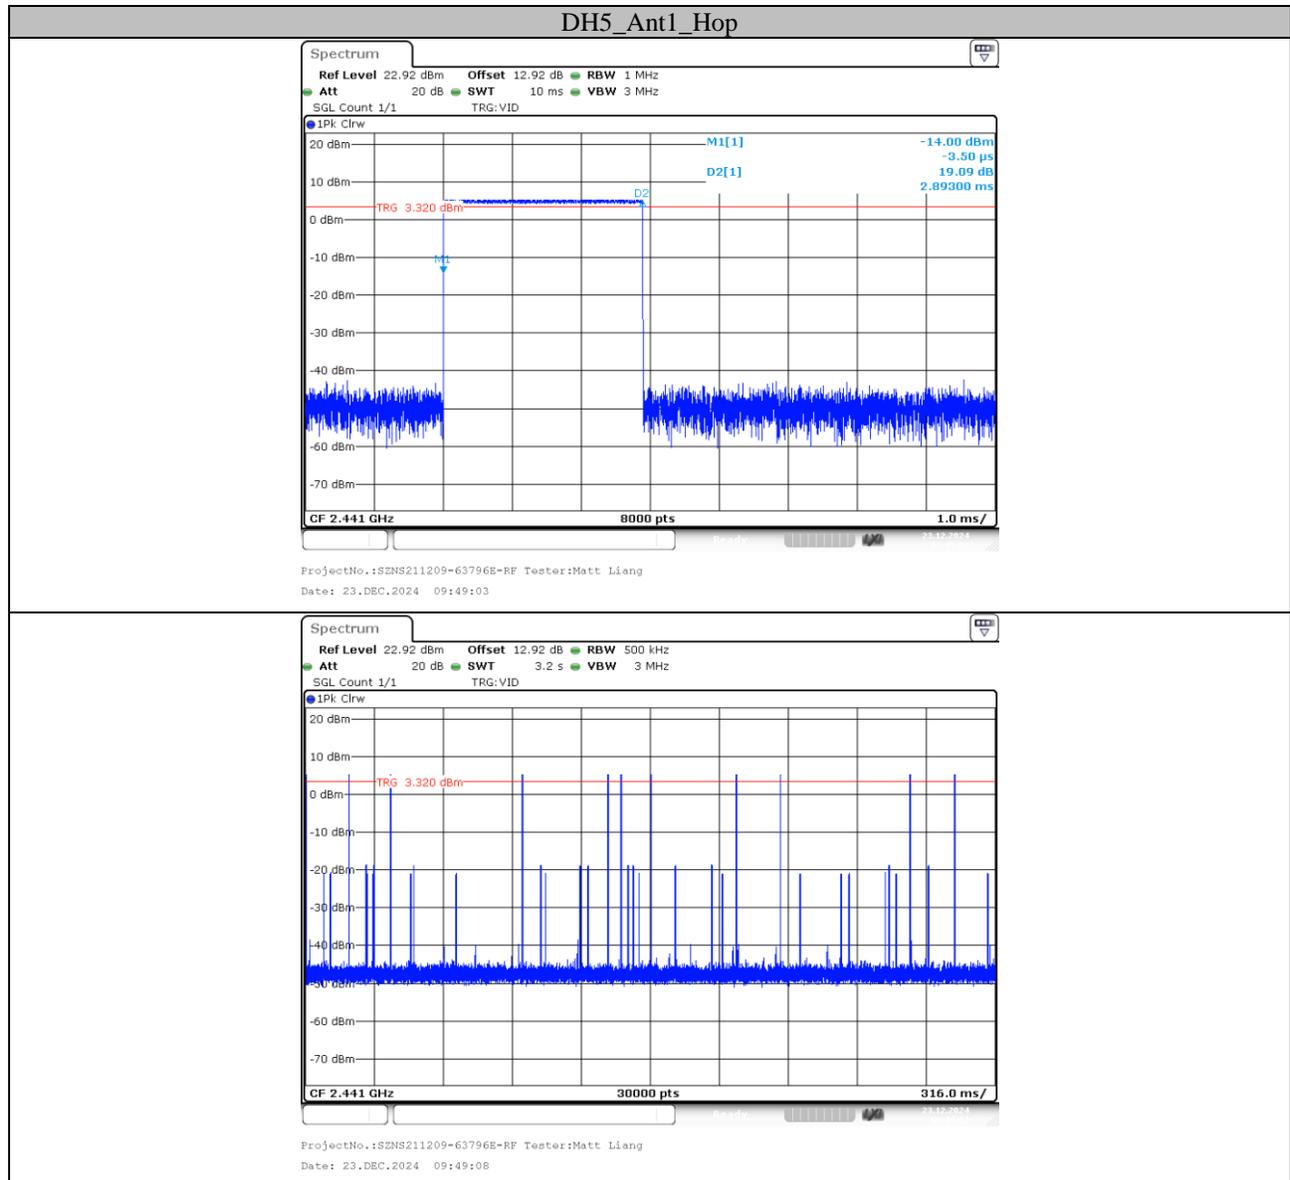


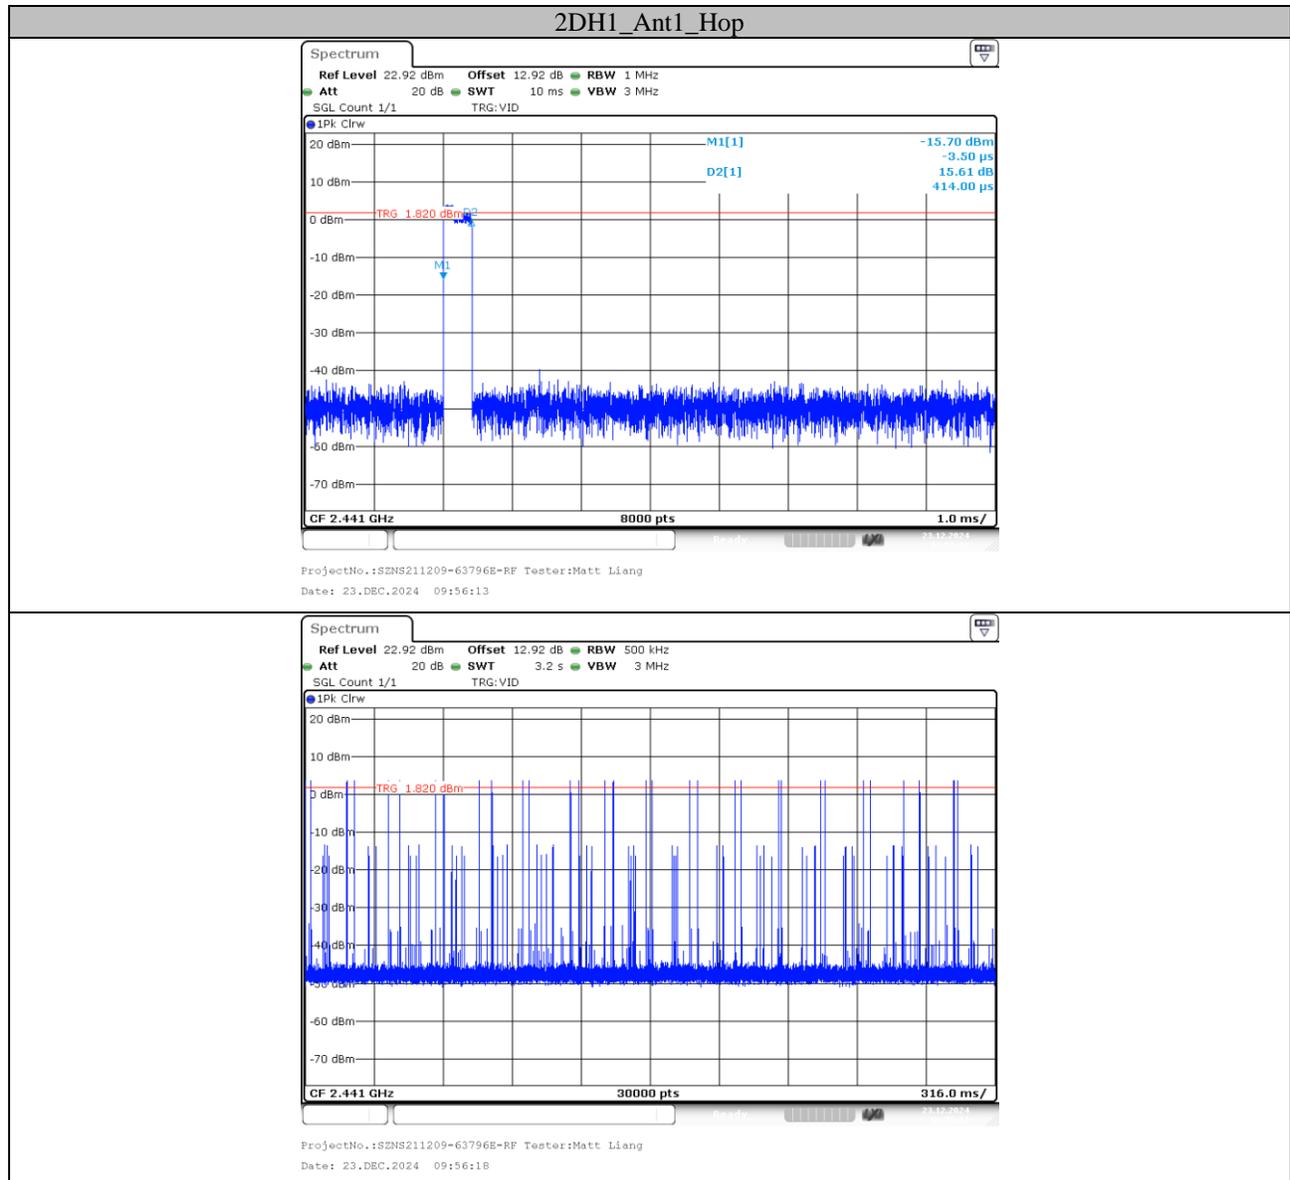

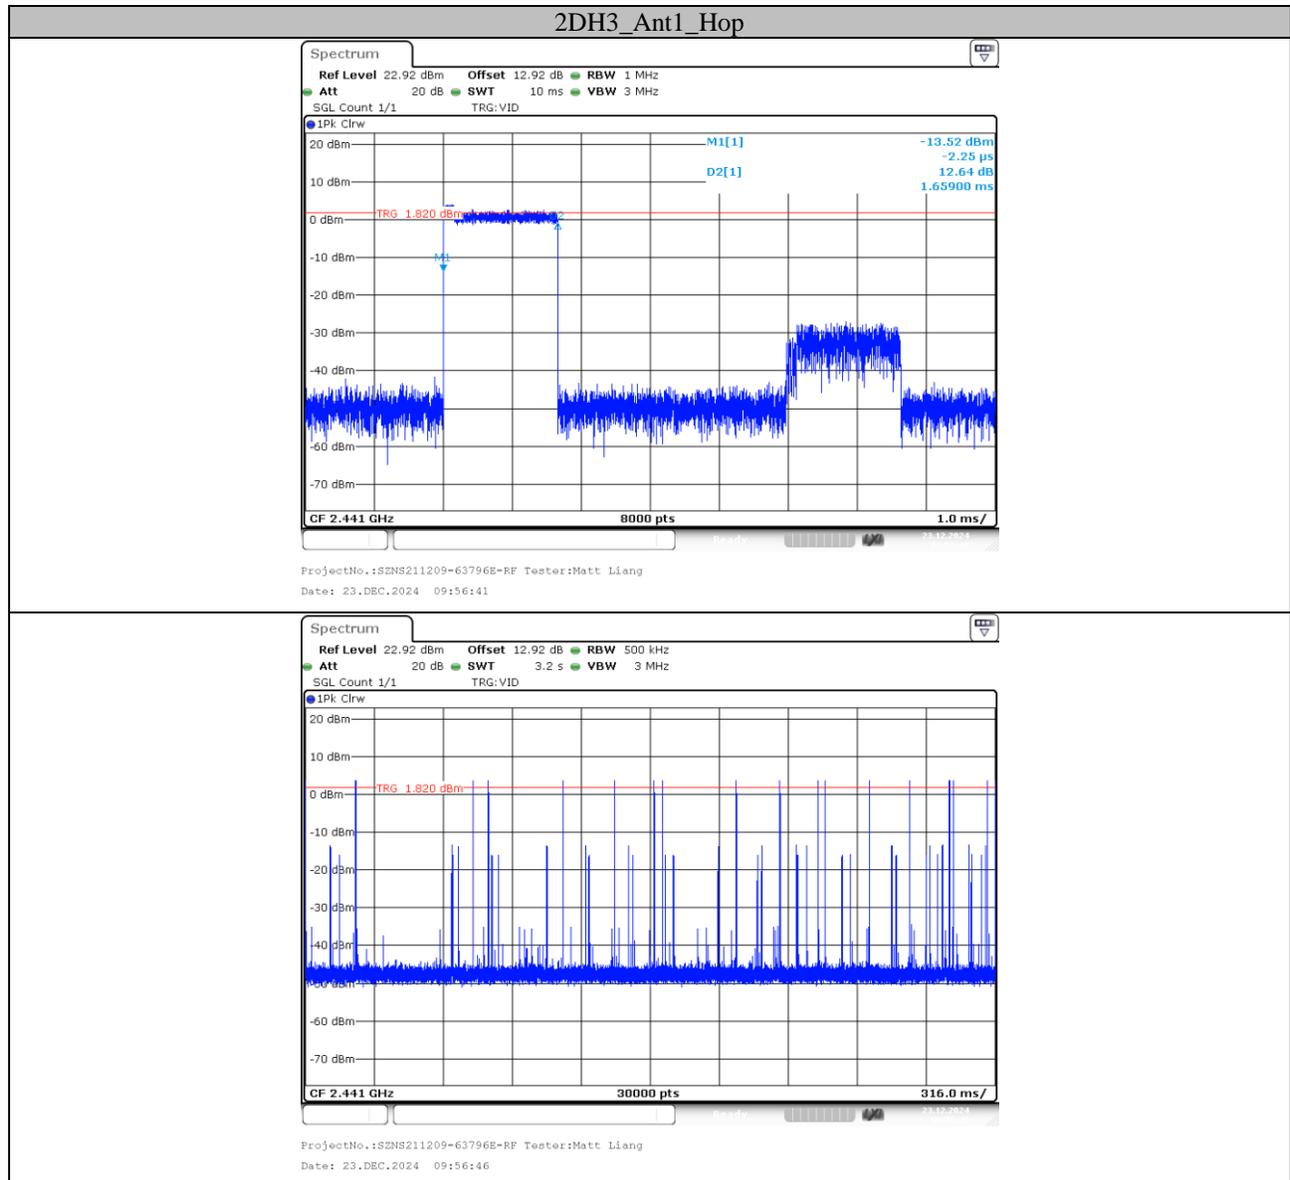


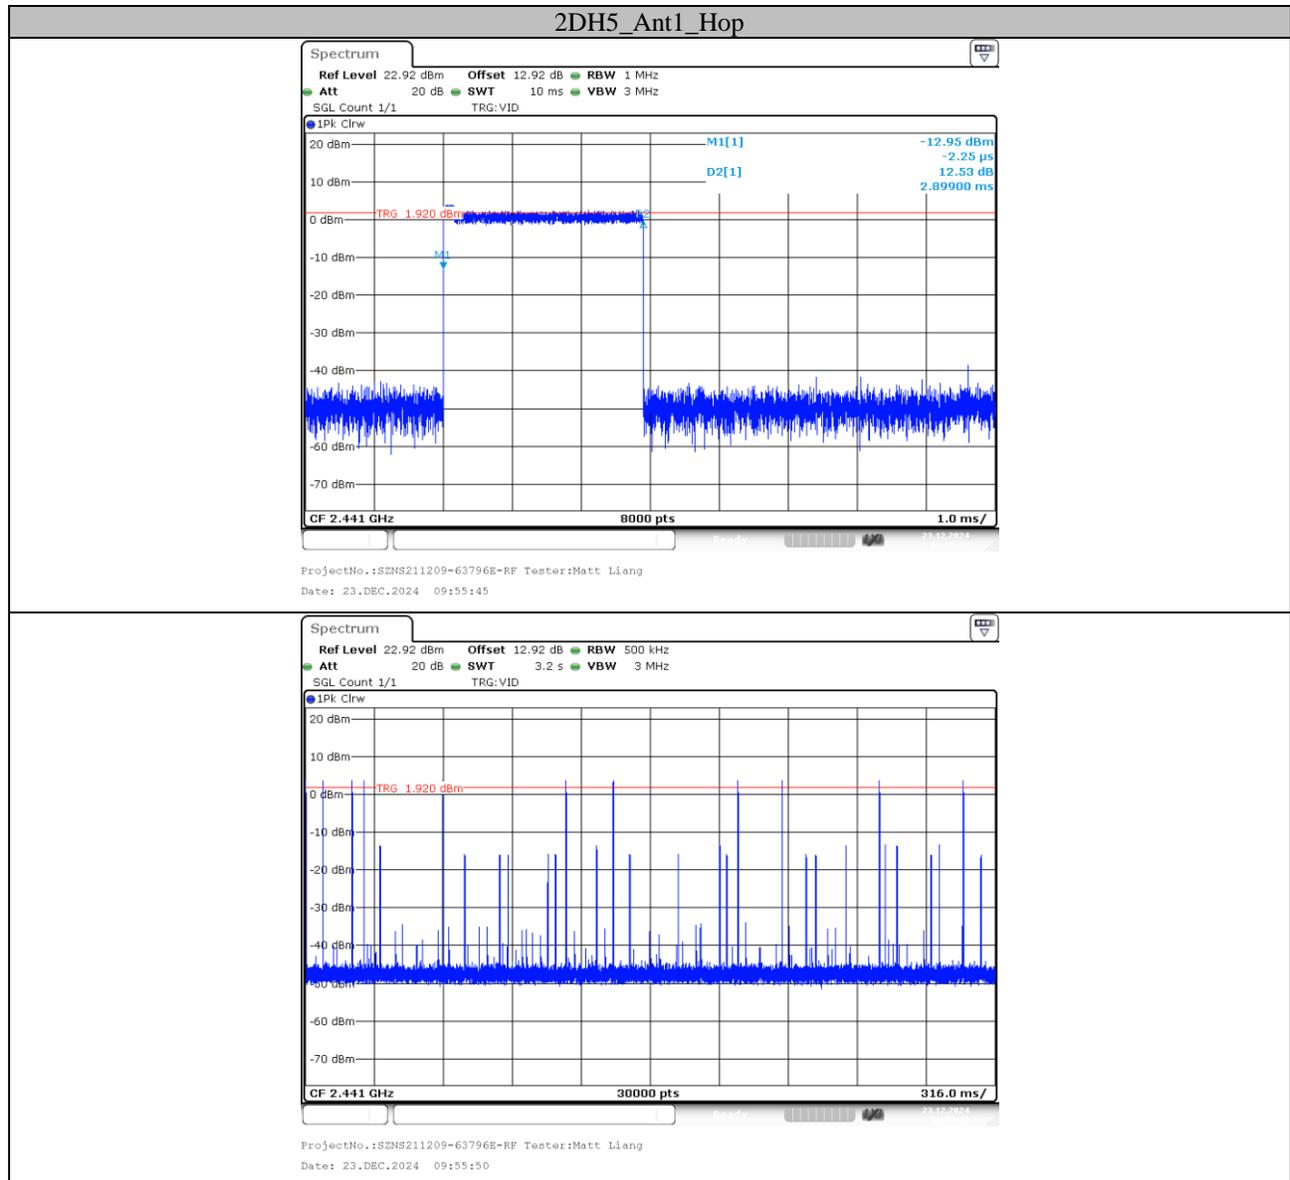


3DH1_Ant1_Hop

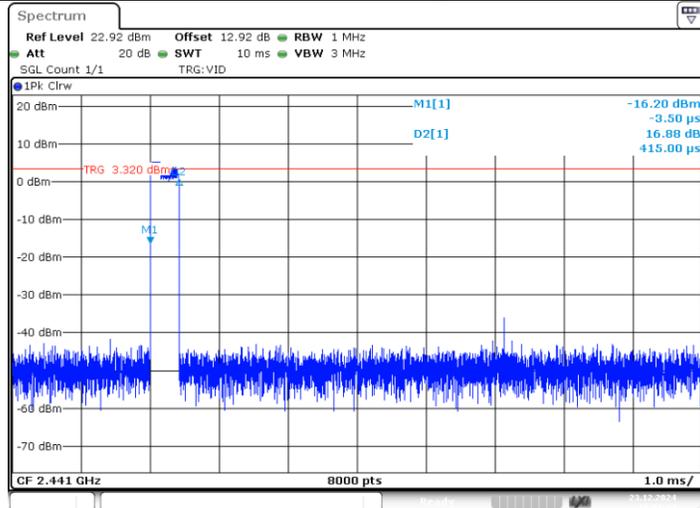


ProjectNo.:SZNS211209-63796E-RF Tester:Matt Liang
Date: 23.DEC.2024 10:01:44

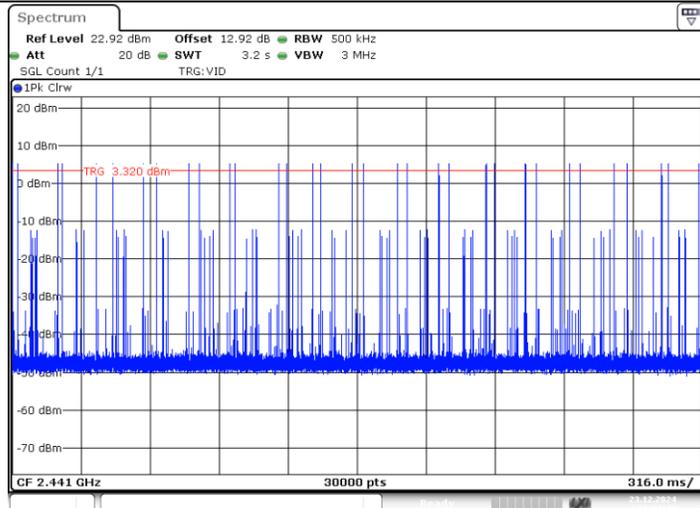

ProjectNo.:SZNS211209-63796E-RF Tester:Matt Liang
Date: 23.DEC.2024 10:01:50

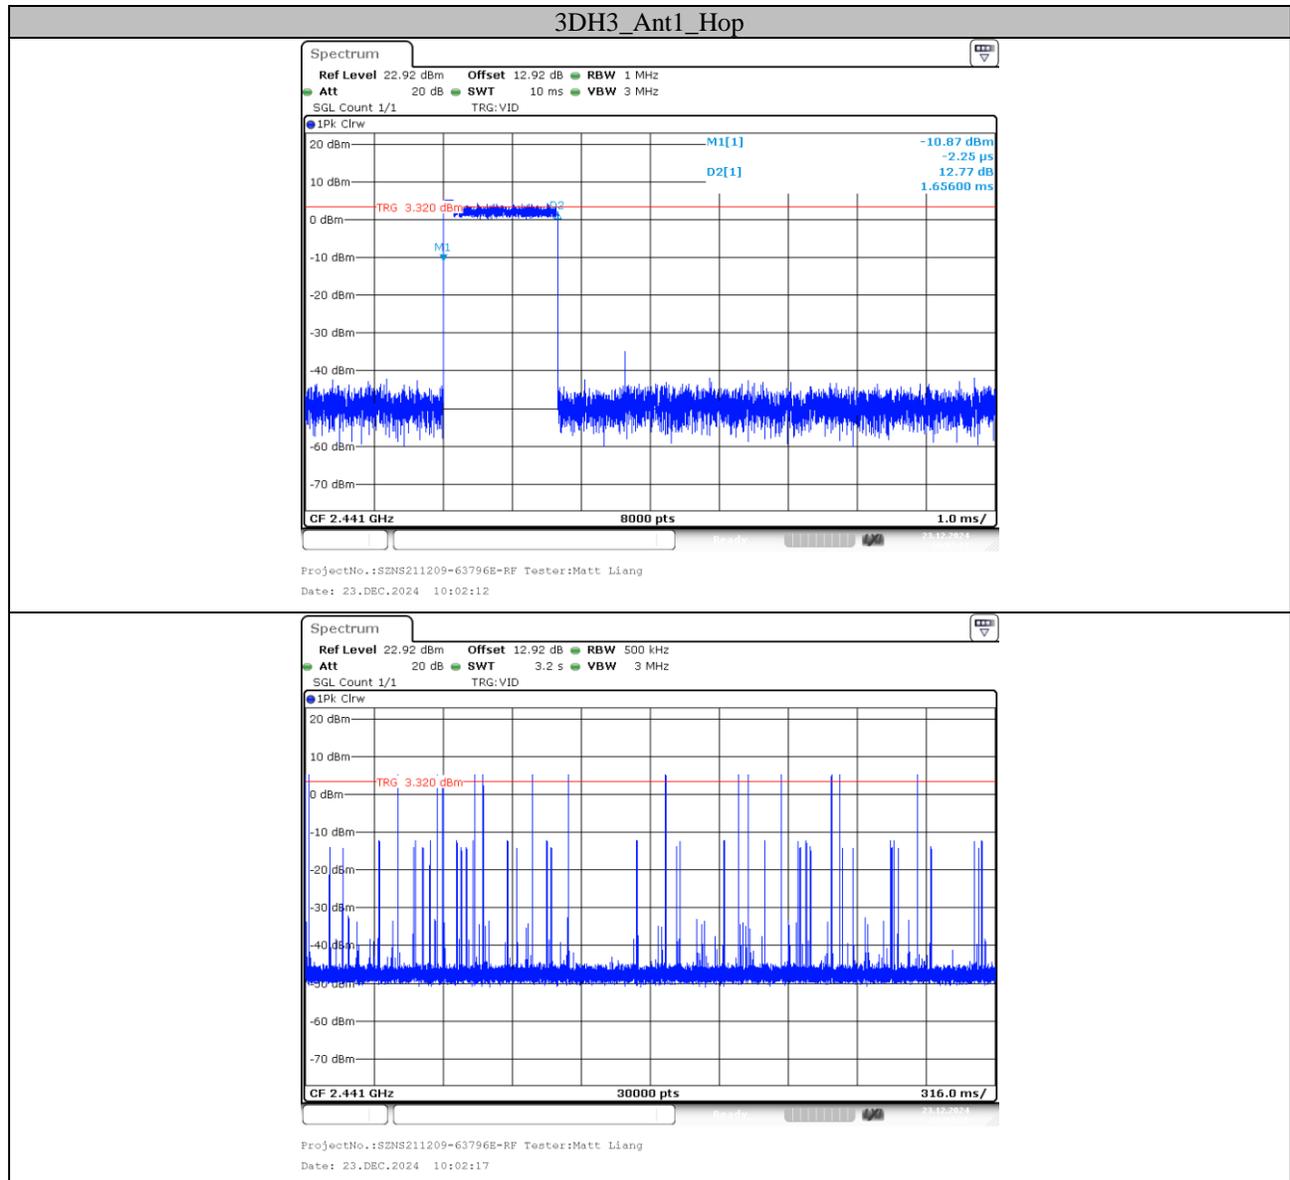


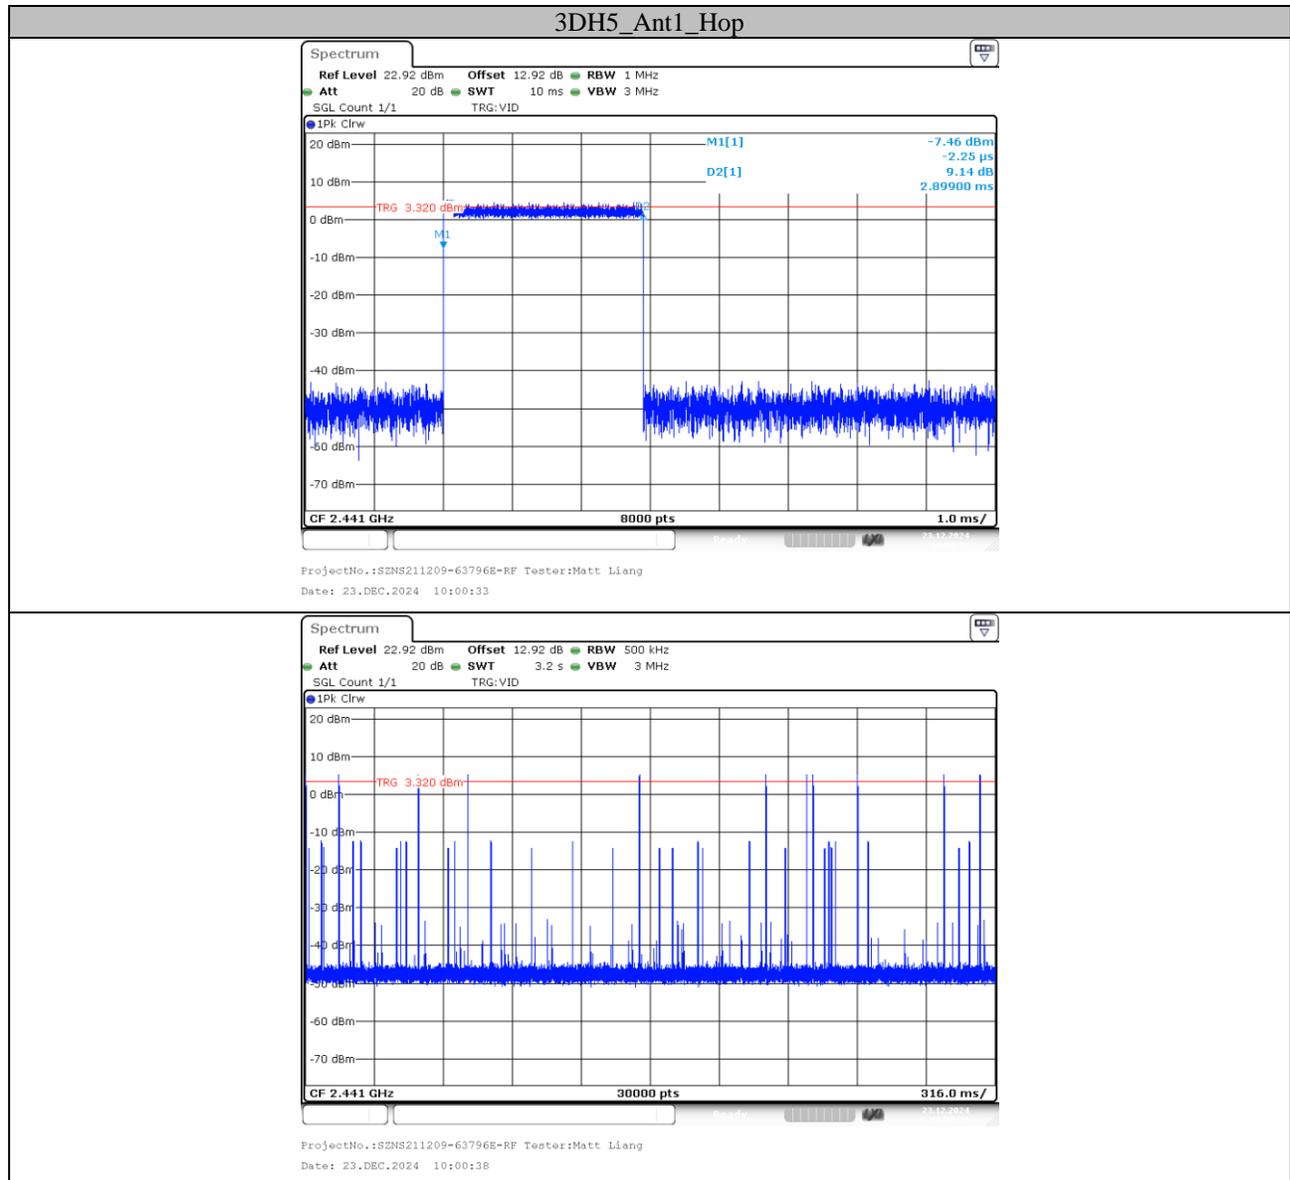


Appendix F: Number of Hopping Channels**Test Result**

Test Mode	Antenna	Freq(MHz)	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥ 15	PASS
2DH5	Ant1	Hop	79	≥ 15	PASS
3DH5	Ant1	Hop	79	≥ 15	PASS

Test Graphs


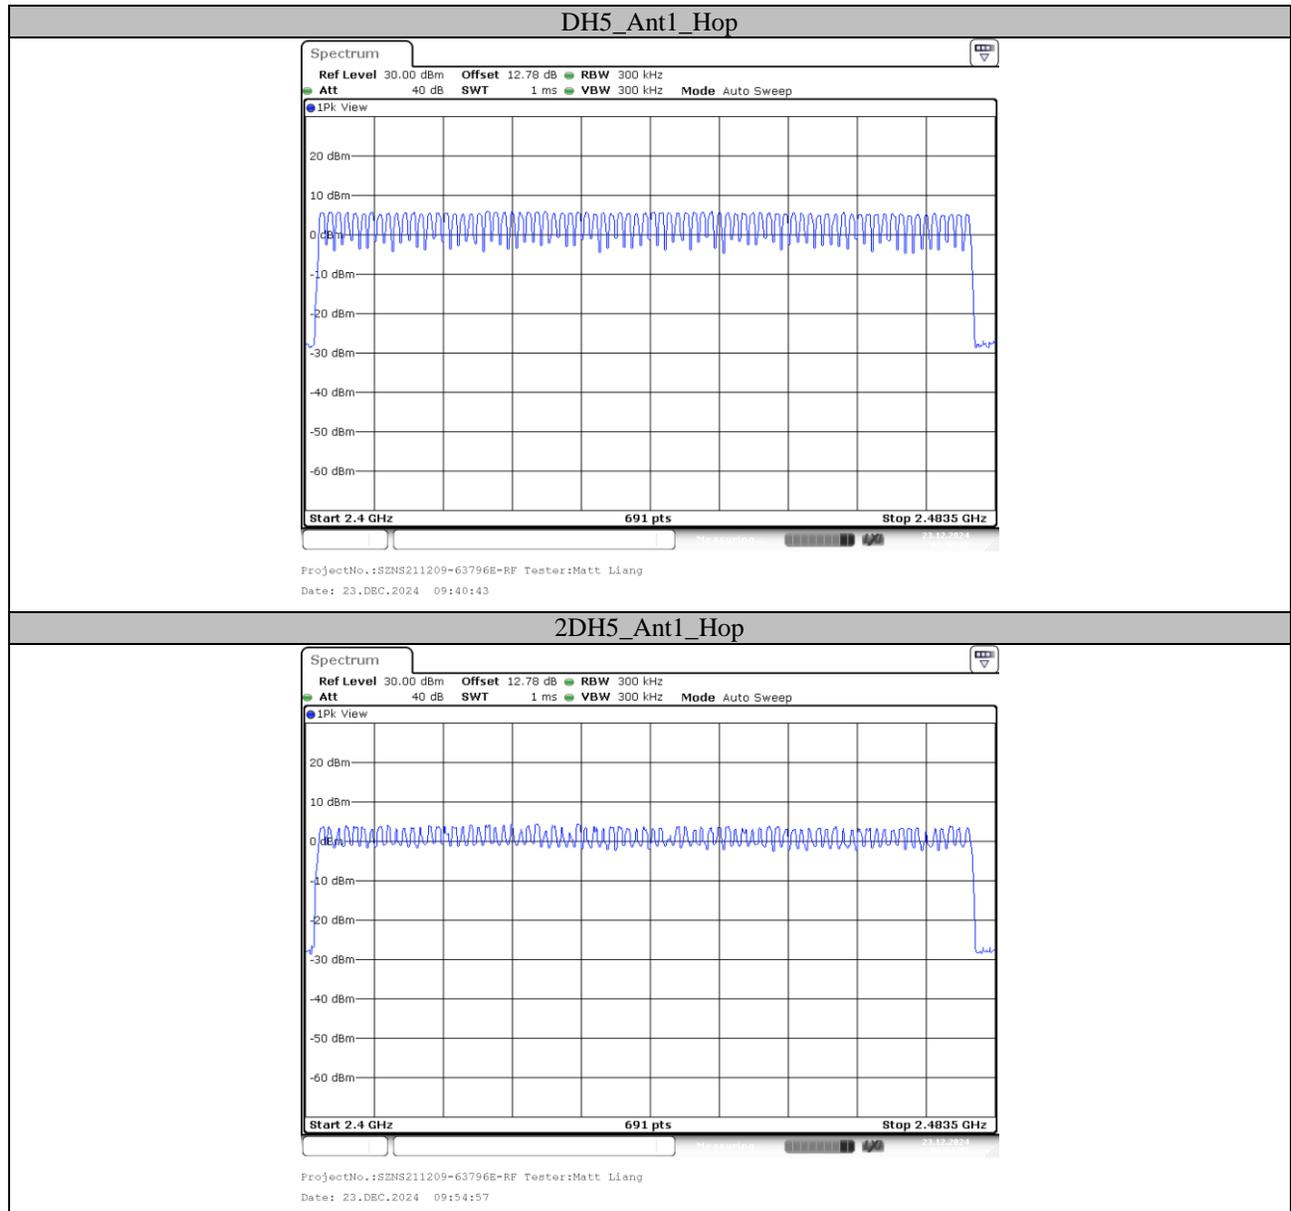


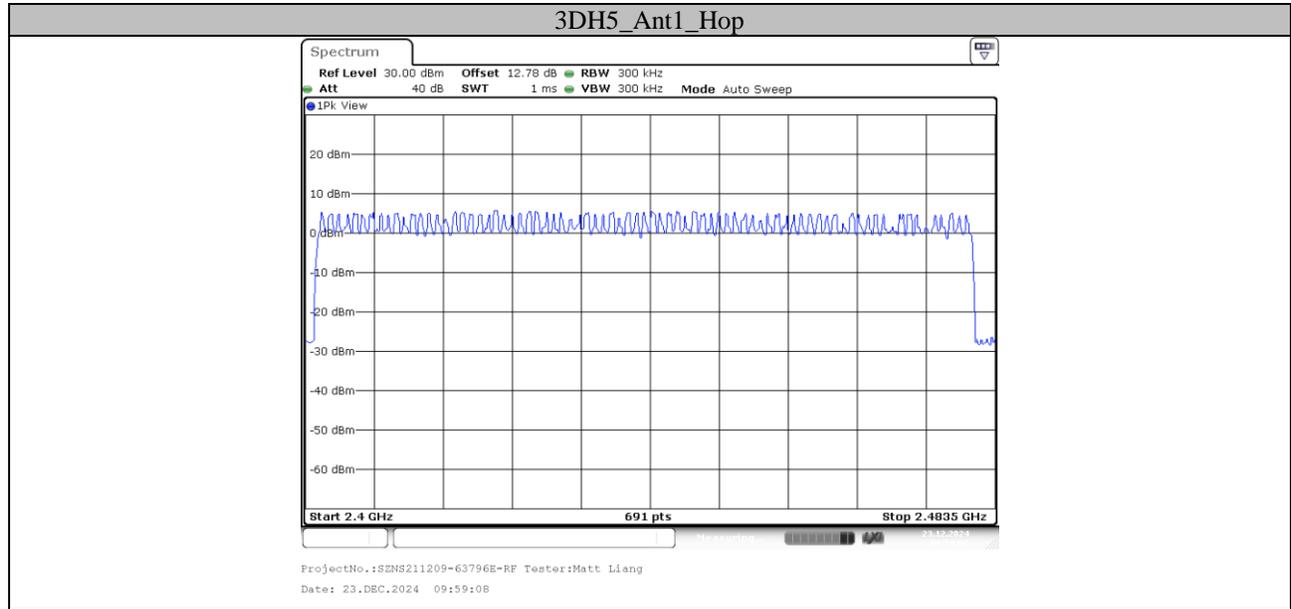


Appendix G: Band Edge Measurements**Test Result**

Test Mode	Antenna	ChName	Freq(MHz)	Ref Level [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	5.31	-45.45	≤-14.69	PASS
		High	2480	5.14	-40.5	≤-14.86	PASS
		Low	Hop_2402	4.76	-45.79	≤-15.24	PASS
		High	Hop_2480	4.67	-40.37	≤-15.33	PASS
2DH5	Ant1	Low	2402	3.84	-43.66	≤-16.16	PASS
		High	2480	3.62	-39.97	≤-16.38	PASS
		Low	Hop_2402	2.87	-45.15	≤-17.13	PASS
		High	Hop_2480	3.06	-40.43	≤-16.94	PASS
3DH5	Ant1	Low	2402	5.03	-44.68	≤-14.97	PASS
		High	2480	4.64	-39.9	≤-15.36	PASS
		Low	Hop_2402	-0.68	-44.96	≤-20.68	PASS
		High	Hop_2480	4.38	-40.12	≤-15.62	PASS

Test Graphs

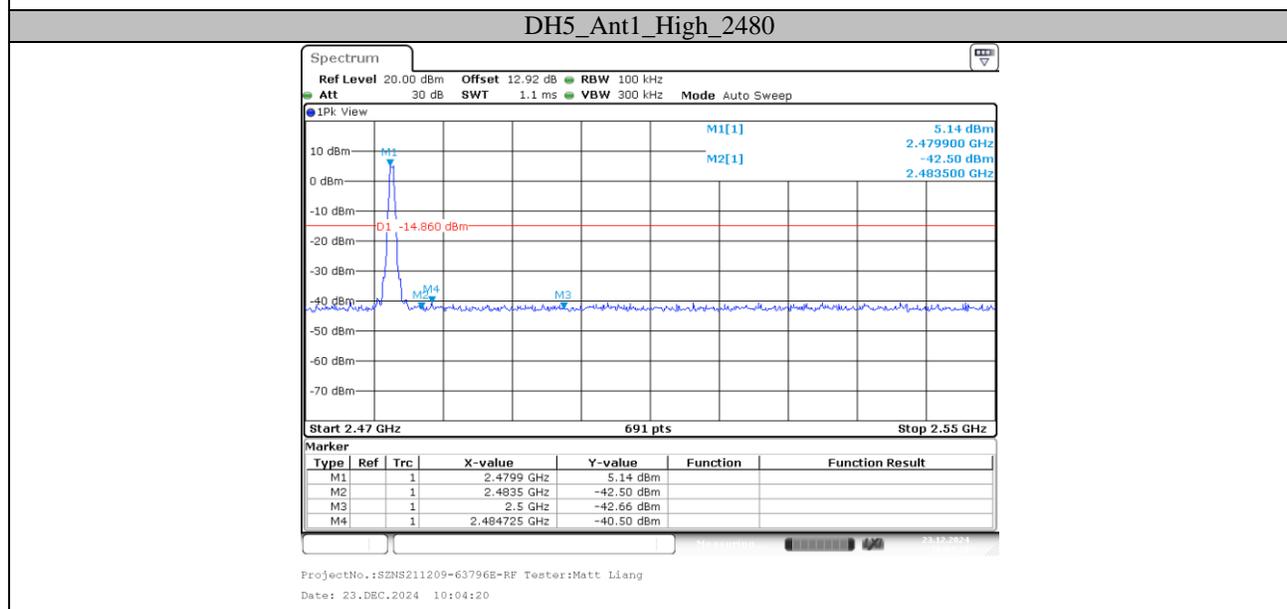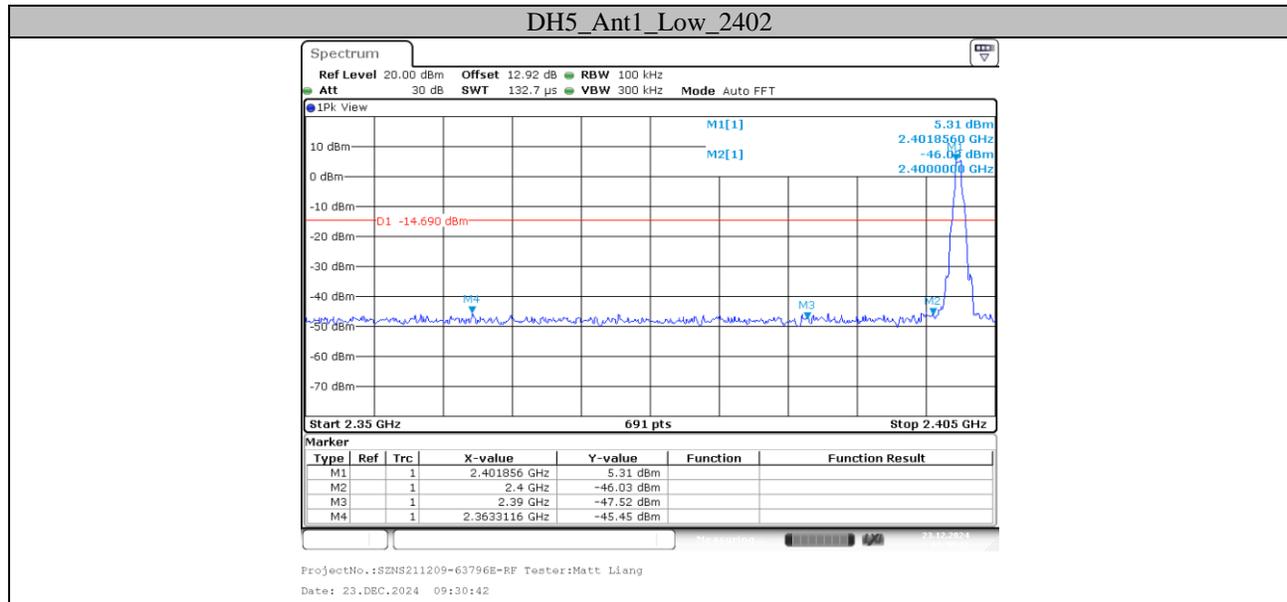


DH5_Ant1_Low_Hop_2402

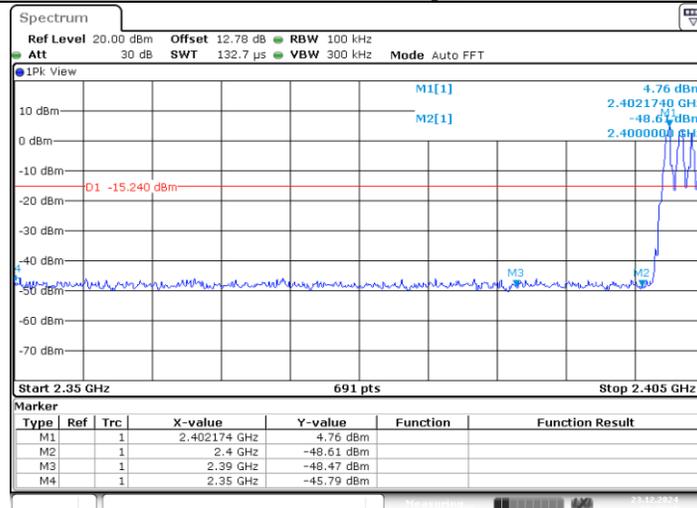


ProjectNo.:SZNS211209-63796E-RF Tester:Matt Liang
 Date: 23.DEC.2024 09:40:16

DH5_Ant1_High_Hop_2480

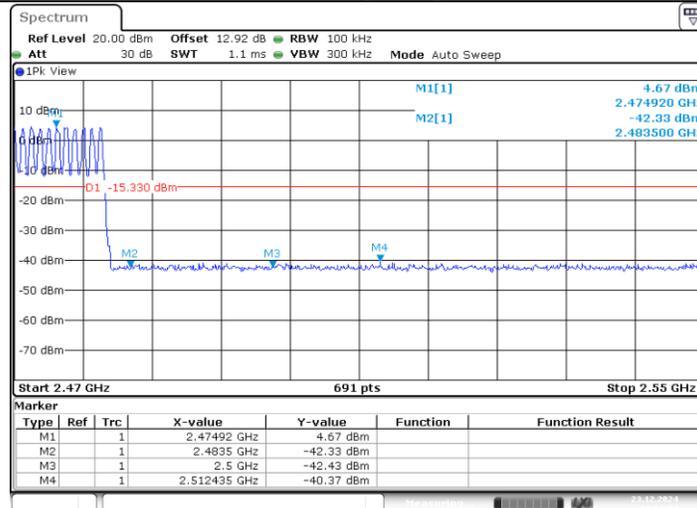


ProjectNo.:SZNS211209-63796E-RF Tester:Matt Liang
 Date: 23.DEC.2024 09:51:05

2DH5_Ant1_Low_2402

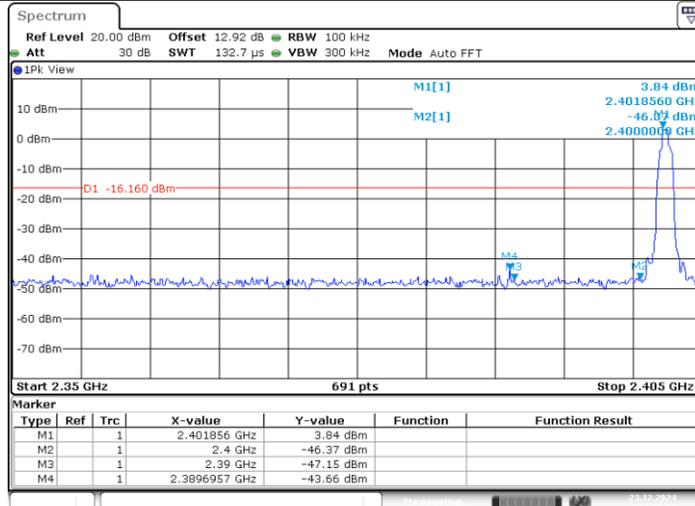


ProjectNo.:SZNS211209-63796E-RF Tester:Matt Liang
 Date: 23.DEC.2024 09:35:18

2DH5_Ant1_High_2480

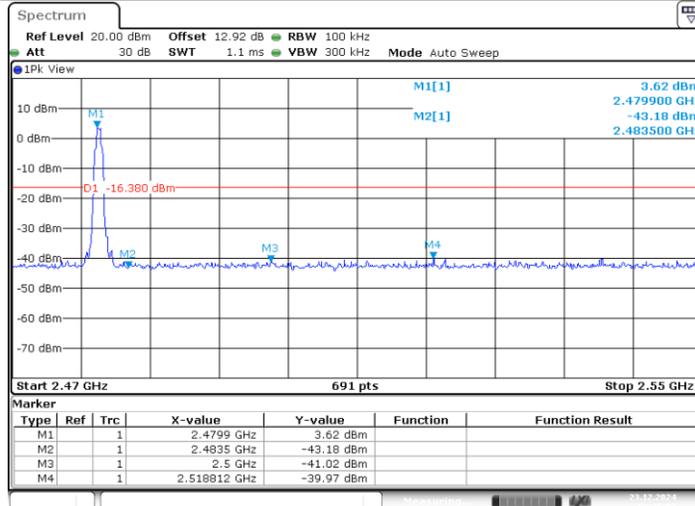


ProjectNo.:SZNS211209-63796E-RF Tester:Matt Liang
 Date: 23.DEC.2024 09:36:53

2DH5_Ant1_Low_Hop_2402

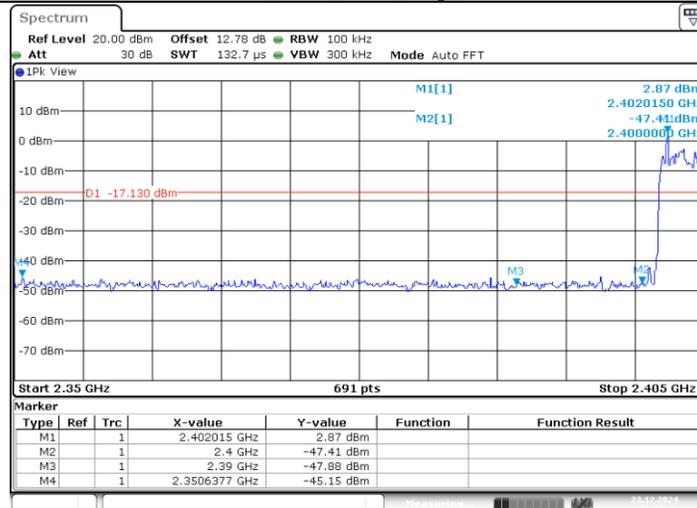


ProjectNo.:SZNS211209-63796E-RF Tester:Matt Liang
 Date: 23.DEC.2024 09:52:19

2DH5_Ant1_High_Hop_2480

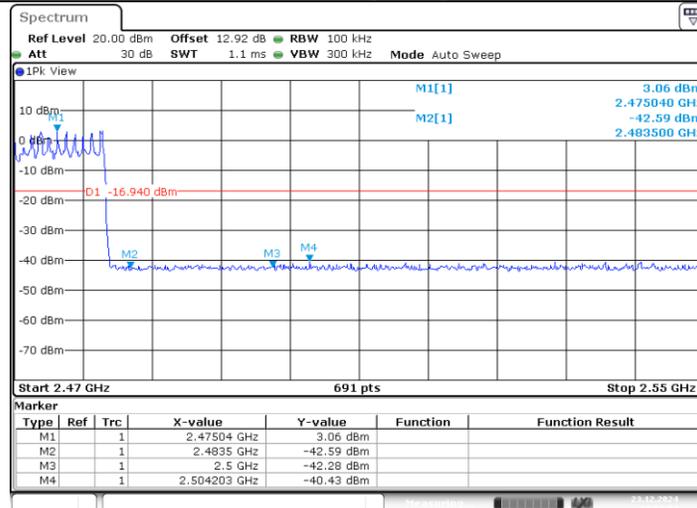


ProjectNo.:SZNS211209-63796E-RF Tester:Matt Liang
 Date: 23.DEC.2024 09:57:05

3DH5_Ant1_Low_2402


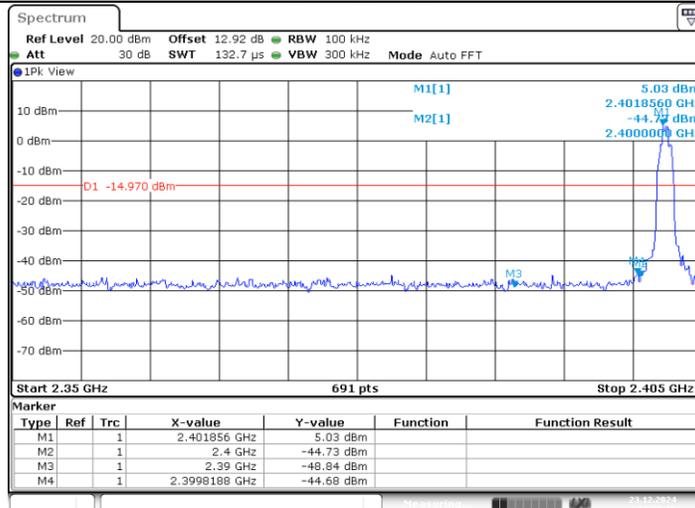


ProjectNo.:SZNS211209-63796E-RF Tester:Matt Liang
 Date: 23.DEC.2024 09:38:16

3DH5_Ant1_High_2480

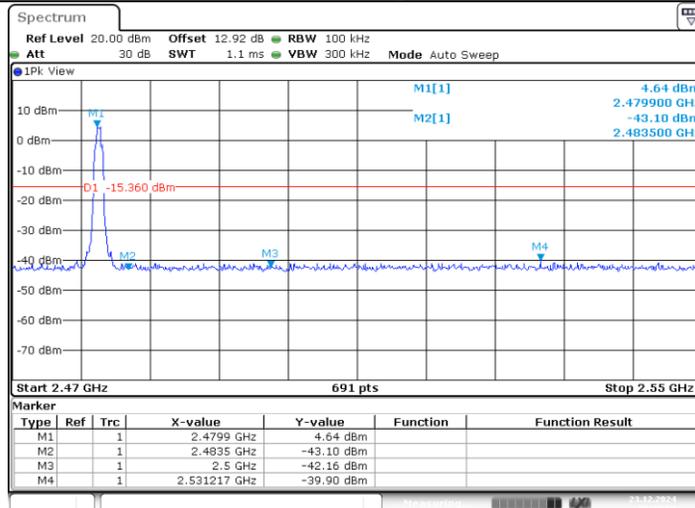

ProjectNo.:SZNS211209-63796E-RF Tester:Matt Liang
 Date: 23.DEC.2024 09:39:50

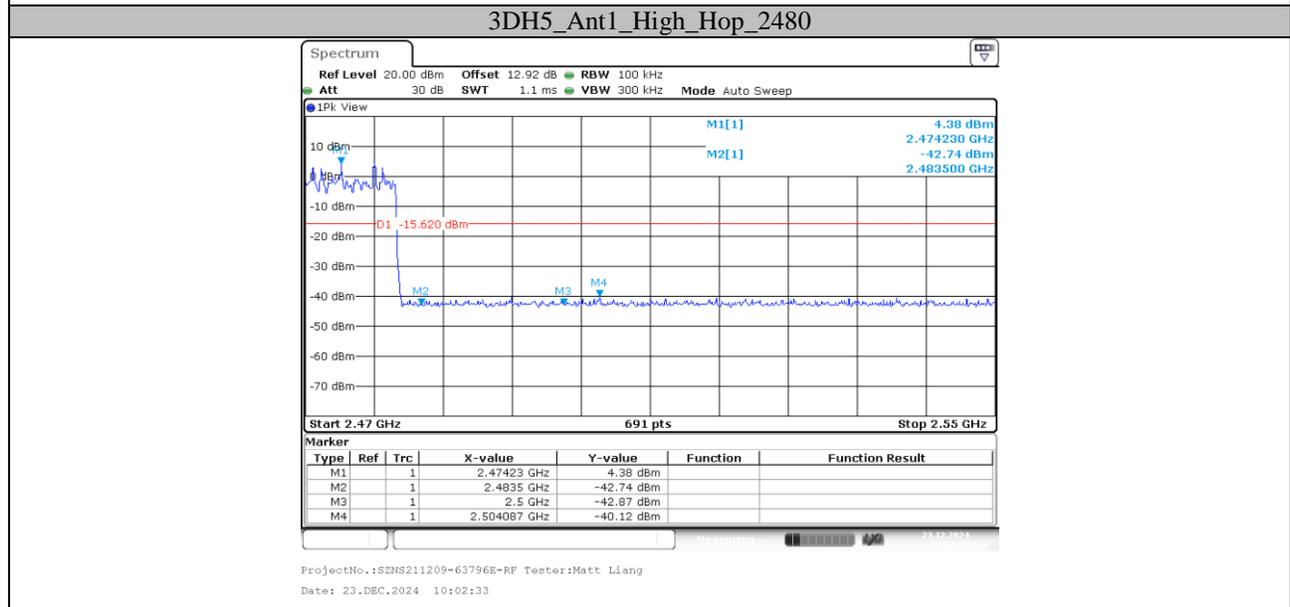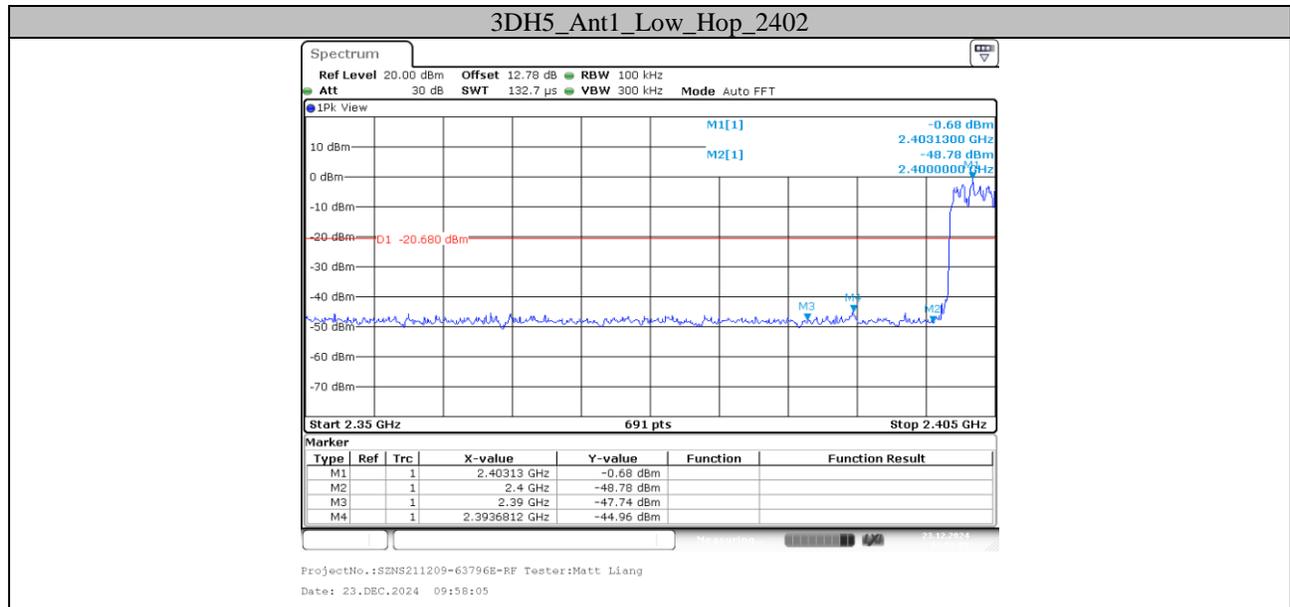

******* END OF REPORT *******