

FCC SAR REPORT

Applicant: TECNO MOBILE LIMITED

Address of Applicant: FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE
19-25 SHAN MEI STREET FOTAN NT HONGKONG

Equipment Under Test (EUT)

Product Name: Mobile Phone

Model No.: BF7

Trade mark: TECNO

FCC ID: 2ADYY-BF7

Applicable standards: FCC 47 CFR Part 2.1093

Date of Test: 30 Sep., 2022 ~ 17 Oct., 2022

Test Result: Maximum Reported 1-g SAR (W/kg)
Head: 1.060 Body: 0.600 Hotspot: 0.637

Authorized Signature:



Bruce Zhang
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the JYT product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	15 Nov., 2022	Original
01	16 Nov., 2022	Updated on page 7

Tested by:*Eric Wang***Date:***15 Nov., 2022*

Test Engineer**Reviewed by:***Janet. Wei***Date:***15 Nov., 2022*

Project Engineer

3 Contents

1	COVER PAGE	1
2	VERSION	2
3	CONTENTS	3
4	SAR RESULTS SUMMARY	5
5	GENERAL INFORMATION	7
5.1	CLIENT INFORMATION.....	7
5.2	GENERAL DESCRIPTION OF EUT	7
5.3	MAXIMUM RF OUTPUT POWER	9
5.4	ENVIRONMENT OF TEST SITE	10
5.5	TEST SAMPLE PLAN	10
5.6	TEST LOCATION	10
6	INTRODUCTION	11
6.1	INTRODUCTION	11
6.2	SAR DEFINITION	11
7	RF EXPOSURE LIMITS	12
7.1	UNCONTROLLED ENVIRONMENT.....	12
7.2	CONTROLLED ENVIRONMENT	12
7.3	RF EXPOSURE LIMITS	12
8	SAR MEASUREMENT SYSTEM	13
8.1	E-FIELD PROBE.....	14
8.2	ROBOT	15
8.3	PHANTOM.....	16
8.4	DEVICE HOLDER.....	16
8.5	TEST EQUIPMENT LIST	17
9	TISSUE SIMULATING LIQUIDS	18
10	SAR SYSTEM VERIFICATION	20
11	EUT TESTING POSITION	22
11.1	HANDSET REFERENCE POINTS	22
11.2	POSITIONING FOR CHEEK / TOUCH	23
11.3	POSITIONING FOR EAR / 15° TILT	23
11.4	SAR EVALUATIONS NEAR THE MOUTH/JAW REGIONS OF THE SAM PHANTOM	24
11.5	BODY WORN ACCESSORY CONFIGURATIONS	24
11.6	WIRELESS ROUTER (HOTSPOT) CONFIGURATIONS	25
12	MEASUREMENT PROCEDURES	26
12.1	SPATIAL PEAK SAR EVALUATION	26
12.2	POWER REFERENCE MEASUREMENT.....	27
12.3	AREA & ZOOM SCAN PROCEDURES.....	27
12.4	VOLUME SCAN PROCEDURES	28
12.5	SAR AVERAGED METHODS	28
12.6	POWER DRIFT MONITORING	28
13	CONDUCTED RF OUTPUT POWER	29
13.1	GSM CONDUCTED POWER	29
13.2	WCDMA CONDUCTED POWER	31
13.3	LTE CONDUCTED POWER	34
13.4	WLAN 2.4 GHz BAND CONDUCTED POWER	65
13.5	WLAN 5.2GHz BAND CONDUCTED POWER	66
13.6	WLAN 5.8GHz BAND CONDUCTED POWER	67
13.7	BLUETOOTH CONDUCTED POWER	68
14	EXPOSURE POSITIONS CONSIDERATION	69
14.1	EUT ANTENNA LOCATIONS.....	69
14.2	TEST POSITIONS CONSIDERATION	70
15	SAR TEST RESULTS SUMMARY	71
15.1	STANDALONE HEAD SAR DATA.....	71
15.2	STANDALONE BODY SAR	75

15.3	BODY SAR IN HOTSPOT MODE	78
15.4	REPEATED SAR MEASUREMENT	81
15.5	MULTI-BAND SIMULTANEOUS TRANSMISSION CONSIDERATIONS.....	82
15.6	SAR SIMULTANEOUS TRANSMISSION ANALYSIS.....	83
15.7	MEASUREMENT UNCERTAINTY.....	84
16	REFERENCE.....	85
APPENDIX A: PLOTS OF SAR SYSTEM CHECK		86
APPENDIX B: PLOTS OF SAR TEST DATA		95
APPENDIX C: SYSTEM CALIBRATION CERTIFICATE.....		131

4 SAR Results Summary

The maximum results of Specific Absorption Rate (SAR) found during test as below:
 <Highest Reported standalone SAR Summary>

Exposure Position	Frequency Band	Reported 1-g SAR (W/kg)	Equipment Class	Highest Reported 1-g SAR (W/kg)
Head	GSM 850	0.623	PCE	1.060
	PCS 1900	0.787		
	WCDMA Band II	1.060		
	WCDMA Band IV	0.461		
	WCDMA Band V	0.589		
	LTE Band 2	1.045		
	LTE Band 5	0.625		
	LTE Band 7	0.777		
	LTE Band 12&Band 17	0.314		
	LTE Band 41&Band 38	0.606		
	LTE Band 66&Band 4	0.940		
	WLAN 2.4 GHz	0.265	DTS	
	WLAN 5.2 GHz	0.361	NII	
	WLAN 5.8 GHz	0.372	DSS	
Body (10 mm Gap)	GSM 850	0.337	PCE	0.600
	PCS 1900	0.343		
	WCDMA Band II	0.478		
	WCDMA Band IV	0.209		
	WCDMA Band V	0.186		
	LTE Band 2	0.385		
	LTE Band 5	0.190		
	LTE Band 7	0.473		
	LTE Band 12&Band 17	0.101		
	LTE Band 41&Band 38	0.600		
	LTE Band 66&Band 4	0.425		
	WLAN 2.4 GHz	0.073	DTS	
	WLAN 5.2 GHz	0.212	NII	
	WLAN 5.8 GHz	0.171	DSS	
Hotspot (10 mm Gap)	GSM 850	0.337	PCE	0.637
	PCS 1900	0.400		
	WCDMA Band II	0.637		
	WCDMA Band IV	0.232		
	WCDMA Band V	0.186		
	LTE Band 2	0.609		
	LTE Band 5	0.190		
	LTE Band 7	0.473		
	LTE Band 12&Band 17	0.101		
	LTE Band 41&Band 38	0.600		
	LTE Band 66&Band 4	0.524		
	WLAN 2.4 GHz	0.073	DTS	
	WLAN 5.2 GHz	0.212	NII	
	WLAN 5.8 GHz	0.171	DSS	
Bluetooth	0.019	DSS		

<Highest Reported simultaneous SAR Summary>

Exposure Position	Frequency Band	Reported 1-g SAR (W/kg)	Equipment Class	Highest Reported Simultaneous Transmission 1-g SAR (W/kg)
Right Tilted	WWAN	1.060	PCE	1.364
	WLAN 5.8 GHz	0.304	NII	

Note:

1. The highest simultaneous transmission is scalar summation of Reported standalone SAR per FCC KDB 690783 D01 v01r03, and scalar SAR summation of all possible simultaneous transmission scenarios are < 1.6W/kg.
2. This device is compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-2005, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013.
3. For FDD-LTE Band 17 is full covered by FDD-LTE Band 12, so only FDD-LTE Band 12 was tested.
4. For TDD-LTE Band 38 is full covered by TDD-LTE Band 41, so only TDD-LTE Band 41 was tested.
5. For FDD-LTE Band 4 is full covered by FDD-LTE Band 66, so only FDD-LTE Band 66 was tested.

5 General Information

5.1 Client Information

Applicant:	TECNO MOBILE LIMITED
Address of Applicant:	FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG
Manufacturer:	TECNO MOBILE LIMITED
Address of Manufacturer:	FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG
Factory:	SHENZHEN TECNO TECHNOLOGY CO.,LTD.
Address of Factory:	101,Building 24,Waijing Industrial Park,Fumin Community,Fucheng Street,Longhua District,Shenzhen City,P.R.China

5.2 General Description of EUT

Product Name:	Mobile Phone			
Model No.:	BF7			
Category of device	Portable device			
Operation Frequency:	GSM :	GSM850: 824.2~848.8 MHz	PCS 1900: 1850.2~1909.8 MHz	
	WCDMA :	Band II: 1852.4~1907.6 MHz	Band V: 826.4~846.6 MHz	
		Band IV: 1712.4~1752.6 MHz		
	LTE :	Band 2 :1850MHz~1910MHz	Band 4 :1710MHz~1755MHz	
		Band 5 :824MHz~849MHz	Band 7: 2500MHz~2570MHz	
		Band 12: 698MHz~716MHz	Band 17: 704MHz~716MHz	
		Band 38: 2570MHz~2620MHz	Band 41: 2535MHz~2655MHz	
		Band 66 :1710MHz~1780MHz		
Wi-Fi:	2412MHz~2462MHz	5150MHz-5250MHz		
	5725MHz-5850MHz			
Bluetooth: 2402 MHz ~ 2480 MHz				
Modulation technology:	GSM:	<input checked="" type="checkbox"/> Voice(GMSK)	<input checked="" type="checkbox"/> GPRS(GMSK)	<input checked="" type="checkbox"/> EGPRS(GMSK, 8PSK)
	WCDMA:	<input checked="" type="checkbox"/> RMC(QPSK)	<input checked="" type="checkbox"/> HSUPA(QPSK)	<input checked="" type="checkbox"/> HSDPA(QPSK, 16QAM)
	LTE:	<input checked="" type="checkbox"/> QPSK	<input checked="" type="checkbox"/> 16QAM	<input checked="" type="checkbox"/> 64QAM
	Wi-Fi:	<input checked="" type="checkbox"/> 802.11b(DSSS)		<input checked="" type="checkbox"/> 802.11a/g/n/ac (OFDM)
	Bluetooth:	<input checked="" type="checkbox"/> BDR(GFSK)	<input checked="" type="checkbox"/> EDR($\pi/4$ -DQPSK, 8DPSK)	<input checked="" type="checkbox"/> LE(GFSK)
Antenna Type:	Internal Antenna			
Antenna Gain:	GSM 850: -4.2 dBi; PCS 1900: 1.6 dBi WCDMA Band V: -4.2 dBi ;WCDMA Band II: 1.6 dBi; WCDMA Band IV: 1.7 dBi LTE Band 2: 1.6 dBi; LTE Band 4: 1.7 dBi LTE Band 5: -4.2 dBi; LTE Band 7: 0.4 dBi LTE Band 12: -5.4 dBi; LTE Band 17:-5.4 dBi LTE Band 38: 0.4 dBi; LTE Band 41: 0.4 dBi LTE Band 66: 1.7dBi Bluetooth: 1.1 dBi; 2.4G Wi-Fi: 1.1 dBi; 5G Wi-Fi: 2.3 dBi			
(E)GPRS Class:	(E)GPRS Class: 12			
Dimensions (L*W*H):	164 mm (L)× 76 mm (W)× 9 mm (H)			

Accessories information:	Adapter: Model: U100TSA Input: AC100-240V, 50/60Hz, 0.3A Output: DC 5.0V, 2.0A	Battery: Rechargeable Li-ion Polymer Battery DC3.85V, 4900mAh
		Headset: Support headset

5.3 Maximum RF Output Power

Mode	Average Power (dBm)	
	GSM 850	GSM 1900
GSM (Voice)	33.26	30.07
GPRS (1 TX Slot)	33.12	30.05
GPRS (2 TX Slots)	32.23	29.17
GPRS (3 TX Slots)	30.31	27.28
GPRS (4 TX Slots)	29.19	26.19
EGPRS (1 TX Slot)	27.60	26.85
EGPRS (2 TX Slots)	26.36	25.86
EGPRS (3 TX Slots)	23.98	23.89
EGPRS (4 TX Slots)	22.66	22.84

Mode	Average Power (dBm)		
	WCDMA Band V	WCDMA Band IV	WCDMA Band II
AMR 12.2 kbps	23.80	23.71	23.54
RMC 12.2 kbps	23.81	23.75	23.57
HSDPA Sub-test 1	22.85	22.78	22.59
HSDPA Sub-test 2	22.33	22.20	21.99
HSDPA Sub-test 3	22.34	22.24	22.00
HSDPA Sub-test 4	22.33	22.19	22.03
HSUPA Sub-test 1	20.88	20.77	20.53
HSUPA Sub-test 2	21.37	21.23	21.05
HSUPA Sub-test 3	21.86	21.71	21.54
HSUPA Sub-test 4	20.88	20.77	20.56
HSUPA Sub-test 5	22.88	22.71	22.56

Mode	Average Power (dBm)					
	LTE Band 2	LTE Band 5	LTE Band 7	LTE Band 12	LTE Band 41	LTE Band 66
BW/1.4 MHz	23.53	23.59	/	23.66	/	23.34
BW/3.0 MHz	23.45	23.61	/	23.65	/	23.25
BW/5.0 MHz	23.51	23.62	22.16	23.68	23.17	23.38
BW/10 MHz	23.55	23.72	22.27	23.74	23.32	23.40
BW/15 MHz	23.40	/	22.13	/	23.19	23.34
BW/20 MHz	23.46	/	22.19	/	23.31	23.45

WLAN 2.4 GHz Band Average Power (dBm)				
Mode/Band	b	g	n (HT-20)	n (HT-40)
WLAN 2.4GHz	16.68	14.16	14.04	13.92

WLAN 5.2 GHz Band Average Power (dBm)						
Mode/Band	a	ac 20	ac 40	ac 80	n 20	n 40
WLAN 5.2GHz	13.69	13.88	13.37	13.13	13.39	13.36

WLAN 5.8 GHz Band Average Power (dBm)						
Mode/Band	a	ac 20	ac 40	ac 80	n 20	n 40
WLAN 5.8GHz	12.77	12.82	10.98	10.46	12.20	11.00

Bluetooth Average Power (dBm)							
Mode/Band	1 Mbps (GFSK)	2 Mbps ($\pi/4$ DQPSK)	3 Mbps (8DPSK)	BLE PHY 1M	BLE PHY 2M	BLE Coded PHY S=2	BLE Coded PHY S=8
Bluetooth	4.10	3.37	3.40	-2.59	-2.64	-2.62	-2.61

5.4 Environment of Test Site

Temperature:	18°C ~25 °C
Humidity:	35%~75% RH
Atmospheric Pressure:	1010 mbar

5.5 Test Sample Plan

Sample Number	Used for Test Items
2#	SAR
<i>Remark: JianYan Testing Group Shenzhen Co., Ltd. is only responsible for the test project data of the above samples, and will keep the above samples for a month.</i>	

5.6 Test Location

JianYan Testing Group Shenzhen Co., Ltd.
 No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street,
 Bao'an District, Shenzhen, Guangdong, People's Republic of China.
 Tel: +86-755-23118282, Fax: +86-755-23116366
 Email: info-JYTee@lets.com, Website: <http://jyt.lets.com>

6 Introduction

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = C \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength. However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

7 RF Exposure Limits

7.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

7.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

7.3 RF Exposure Limits

SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
SPATIAL PEAK SAR Brain	1.6	8.0
SPATIAL AVERAGE SAR Whole Body	0.08	0.4
SPATIAL PEAK SAR Hands, Feet, Ankles, Wrists	4.0	20

Note:

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

8 SAR Measurement System

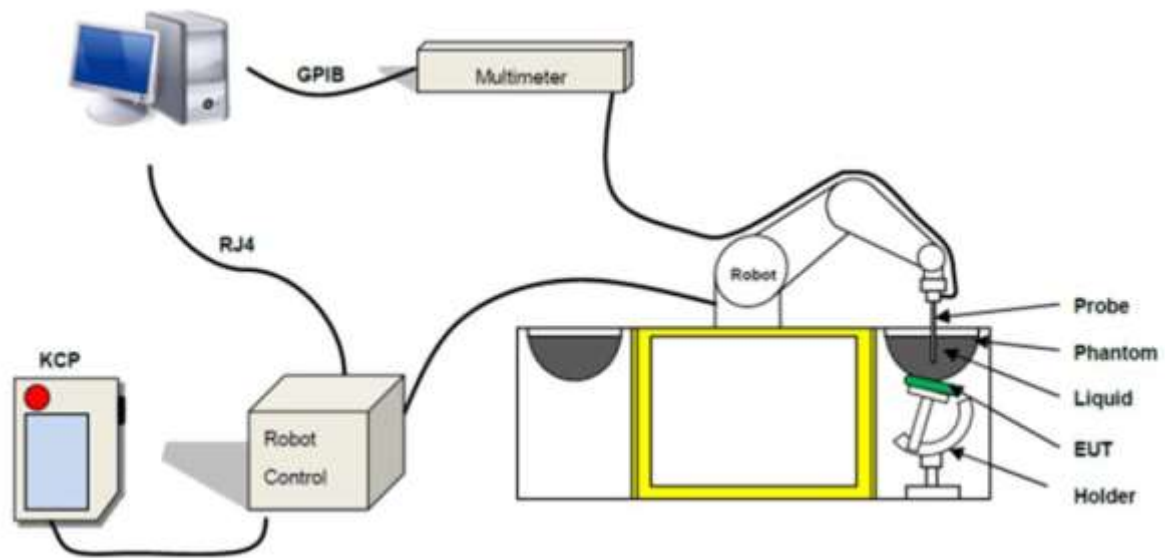


Fig. 8.1 MVG COMOSAR System Configurations

These measurements were performed with the automated near-field scanning system COMOSAR from MVG. The system is based on a high precision robot (working range: 850 mm), which positions the probes with a positional repeatability of better than ± 0.02 mm. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines to the data acquisition unit.

The SAR measurements were conducted with dosimetric probe (manufactured by MVG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the procedure described in SAR standard with accuracy of better than $\pm 10\%$. The spherical isotropy was evaluated with the procedure described in SAR standard and found to be better than ± 0.25 dB. The phantom used was the SAM Phantom as described in FCC supplement C, IEEE P1528.

The MVG COMOSAR system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

8.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by MVG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

➤ **E-Field Probe Specification**


Device Type	COMOSAR DOSIMETRIC E FIELD PROBE
Model	SSE2
Frequency Range	150 MHz to 6 GHz
Dynamic Range	0.01W/kg to 100W/kg
Probe linearity	<0.25dB
Dimensions	Overall length: 330 mm Tip diameter: 2.5 mm Distance between dipoles / probe extremity: 1 mm



Fig. 8.2 Photo of E-Field Probe

➤ **E-Field Probe Calibration**

Probe calibration is realized, in compliance with EN/IEC 62209-1/-2 and IEEE 1528 std, with CALISAR, MVG proprietary calibration system. The calibration is performed with the technique using reference waveguide.

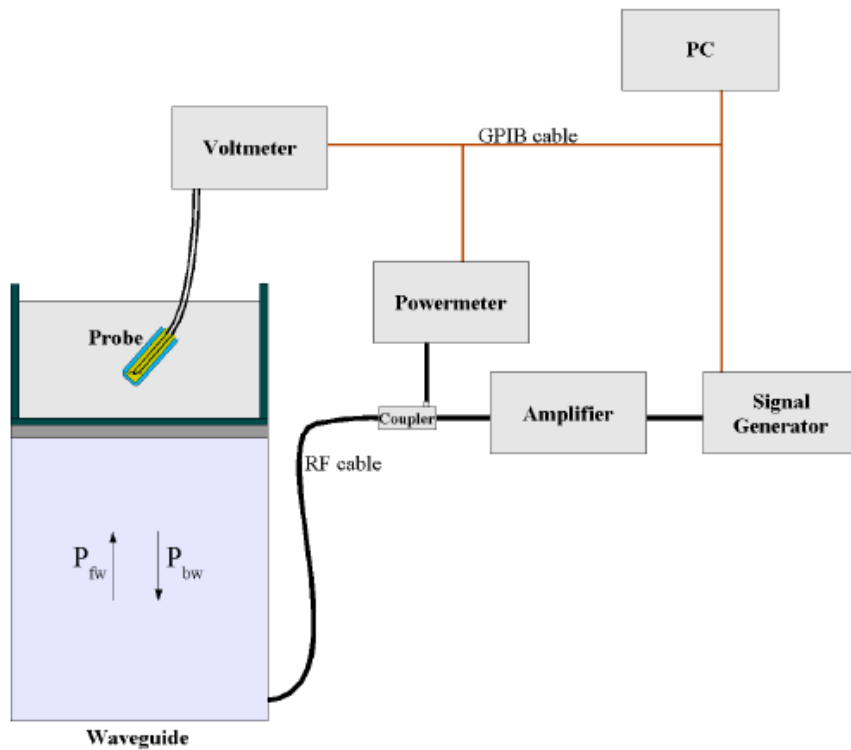

$$SAR = \frac{4(P_{fw} - P_{bw})}{ab\sigma} \cos^2 \left(\pi \frac{y}{a} \right) e^{-(2\pi/\sigma)z}$$

Where :

- P_{fw} = Forward Power
- P_{bw} = Backward Power
- a and b = Waveguide Dimensions
- σ = Skin Depth

Keithley configuration

Rate=Medium; Filter=ON; RDGS=10; FILTER TYPE=MOVING AVERAGE; RANGE AUTO

After each calibration, a SAR measurement performed on a validation dipole and compared with a NPL calibrated probe, to verify it.

The Calibration factors, CF(N), for the 3 sensors corresponding to dipole 1, dipole 2 and dipole 3 are:

$$CF(N) = SAR(N) / V_{lin}(N) \quad (N=1,2,3)$$

The linearized output voltage V_{lin}(N) is obtained from the displayed output voltage V(N) using

$$V_{lin}(N) = V(N) * (1 + V(N) / DCP(N)) \quad N=1,2,3$$

Where the DCP is the dipole compression point in mV

8.2 Robot

The COMOSAR system uses the high precision robots from KUKA. For the 6-axis controller system, the robot controller version (KUKA-KRC2sr) from KUKA is used. The KUKA robot series have many features that are important for our application:

- High precision (repeatability 0.02 mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements
- Low ELF interference (motor control fields shielded via the closed metallic construction shields)



Fig. 8.4 Photo of Robot

8.3 Phantom

<SAM Phantom>


Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume Dimensions	Approx. 27 liters Length: 1000mm; Width: 500mm; Height: 200mm	
Material	Fiberglass based	
Relative permittivity	3-4	
Loss tangent	0.02	
Measurement Areas	Left Head, Right Head, Flat phantom	

Fig. 8.7 Photo of SAM Phantom

The phantom developed by MVG is produced in accordance with the specified in the standards. It has been designed to fit the COMOSAR phantom tables and is delivered with a plastic cover to prevent liquid evaporation.

8.4 Device Holder

The positioning system is made of an extremely stable material, which ensures easy handling and reproducible positioning. It also allows correct positioning of the dipoles referenced by the IEEE, ANSI and IEC.

<Device Holder for SAM Phantom>


Model	Handset Positioning System	
Material properties	The positioning system is made of PETP. This material offers a low permittivity of 3.2 and low loss, with a loss tangent of 0.005 to minimize the influence of the DUT on measurement results.	
Mechanical properties	The positioning system developed by MVG allows a positioning resolution better than 1 mm. The system is fixed on a bottom rail “x axis” so that the positioning system can be quickly moved from the right to the left part of the phantom. In addition, it can be moved on a perpendicular “y axis” and the height can be adapted. The system is also composed of three rotation points for accurate positioning of the device’s acoustical output.	
Accuracy and precision	A curved rail on the top part allows the fast switch from the cheek to the tilt position. The required 15° angle for the tilt position can be easily checked thanks to a printed scale on the curved rail with a tolerance of ± 1°	

Fig. 8.9 Photo of Device Holder

8.5 Test Equipment List

Manufacturer	Equipment Description	Model	Management Number	Cal. Information	
				Last Cal.	Due Date
MVG	COMOSAR DOSIMETRIC E FIELD PROBE	SSE2	WXJ076	06.30.2022	06.29.2023
MVG	COMOSAR 750 MHz REFERENCE DIPOLE	SID750	WXJ076-4	01.14.2021	01.13.2024
MVG	COMOSAR 835 MHz REFERENCE DIPOLE	SID835	WXJ076-5	01.14.2021	01.13.2024
MVG	COMOSAR 1750 MHz REFERENCE DIPOLE	SID1750	WXJ076-8	01.14.2021	01.13.2024
MVG	COMOSAR 1900 MHz REFERENCE DIPOLE	SID1900	WXJ076-9	01.14.2021	01.13.2024
MVG	COMOSAR 2450 MHz REFERENCE DIPOLE	SID2450	WXJ076-12	01.14.2021	01.13.2024
MVG	COMOSAR 2600 MHz REFERENCE DIPOLE	SID2600	WXJ076-13	01.14.2021	01.13.2024
MVG	COMOSAR 5200-5800 MHz REFERENCE DIPOLE	SID5000	WXJ076-21	01.14.2021	01.13.2024
KEITHLEY	DIGIT MULTIMETER	DMM6500	WXJ076-1	12.17.2019	12.16.2022
MVG	MVG Measurement Software	OpenSAR	Version: V5_01_09	N.C.R	N.C.R
MVG	COMOSAR IEEE SAM PHANTOM	N/A	WXG009-2	N.C.R	N.C.R
MVG	COMOSAR IEEE SAM PHANTOM	N/A	WXG009-3	N.C.R	N.C.R
MVG	MOBILE PHONE POSITIONNING SYSTEM	N/A	WXG009-4	N.C.R	N.C.R
KUKA	Robot	KR 6 R900 sixx	WXG009-1	N.C.R	N.C.R
Anritsu	Universal Radio Communication Analyzer	MT8820C	WXJ008-5	03.03.2021	03.02.2023
R&S	Universal Radio Communication Tester	CMU200	WXJ008-2	03.30.2022	03.29.2024
KEYSIGHT	Network Analyzer	E5071C	WXJ091	03.30.2022	03.29.2023
KEYSIGHT	EPM Series Power Meter	N1914A	WXJ075	06.29.2022	06.28.2023
KEYSIGHT	E-Series Power Sensor	E9300H	WXJ075-1	06.29.2022	06.28.2023
KEYSIGHT	E-Series Power Sensor	E9300H	WXJ075-2	06.29.2022	06.28.2023
KEYSIGHT	Signal Generator	N5173B	WXJ006-3	06.29.2022	06.28.2023
Huber Suhner	RF Cable	SUCOFLEX	WXG008-13	See Note 3	
Huber Suhner	RF Cable	SUCOFLEX	WXG008-14	See Note 3	
Huber Suhner	RF Cable	SUCOFLEX	WXG008-15	See Note 3	
Weinschel	Attenuator	23-3-34	WXG008-16	See Note 3	
Anritsu	Directional Coupler	MP654A	WXG008-17	See Note 3	
MVG	LIMESAR DIELECTRIC PROBE	SCLMP	WXG009-5	See Note 4	
TXC	Broadband Amplifier	BBA018000	WXG008-11	See Note 5	

Note:

1. The calibration certificate of MVG can be referred to appendix C of this report.
2. Referring to KDB 865664 D01v01r04, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
3. The Insertion Loss calibration of Dual Directional Coupler and Attenuator were characterized via the network analyzer and compensated during system check.
4. The dielectric probe kit was calibrated via the network analyzer, with the specified procedure (calibrated in pure water) and calibration kit (standard) short circuit, before the dielectric measurement. The specific procedure and calibration kit are provided by MVG.
5. In system check we need to monitor the level on the spectrum analyzer, and adjust the power amplifier level to have precise power level to the dipole; the measured SAR will be normalized to 1 W input power according to the ratio of 1 W to the input power to the dipole. For system check, the calibration of the power amplifier is deemed not critically required for correct measurement; the spectrum analyzer is critical and we do have calibration for it
6. Attenuator insertion loss is calibrated by the network Analyzer, which the calibration is valid, before system check.
7. N.C.R means No Calibration Requirement.

9 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 9.1, for body SAR testing, the liquid height from the center of the flat phantom to liquid top surface is larger than 15 cm, which is shown in Fig. 9.2.



Fig. 9.1 Photo of Liquid Height for Head SAR
(depth>15cm)

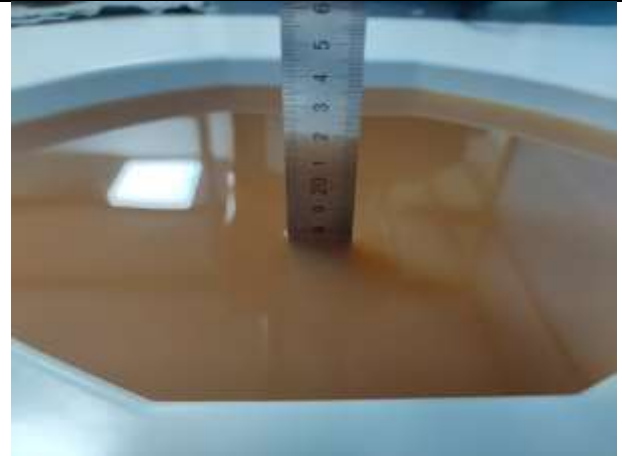


Fig. 9.2 Photo of Liquid Height for Body SAR
(depth>15cm)

The relative permittivity and conductivity of the tissue material should be within $\pm 5\%$ of the values given in the table below recommended by the FCC OET 65 supplement C and RSS 102 Issue 5.

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800-2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

(ϵ_r = relative permittivity, σ = conductivity and ρ = 1000 kg/m

The dielectric parameters of liquids were verified prior to the SAR evaluation using a MVG Liquid measurement Kit and an Agilent Network Analyzer.

The following table shows the measuring results for simulating liquid.

Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target(σ)	Permittivity Target(ϵ_r)	Delta (σ)%	Delta (ϵ_r)%	Limit (%)	Date (dd/mm/yy)
750	22.3	0.87	41.76	0.89	41.90	-2.25	-0.33	±5	28.10.2022
835	22.3	0.89	41.33	0.90	41.50	-1.11	-0.41	±5	28.10.2022
1750	22.1	1.38	41.20	1.37	40.10	0.73	2.74	±5	02.11.2022
1900	22.1	1.43	40.78	1.40	40.00	2.14	1.95	±5	02.11.2022
2450	22.7	1.77	38.89	1.80	39.20	-1.67	-0.79	±5	05.11.2022
2600	22.7	1.95	38.78	1.96	39.00	-0.51	-0.56	±5	05.11.2022
5200	22.5	4.57	35.25	4.66	36.00	-1.93	-2.08	±5	08.11.2022
5800	22.5	5.16	34.66	5.27	35.30	-2.09	-1.81	±5	08.11.2022

10 SAR System Verification

Each ComoSAR system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the OpenSAR software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

➤ Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

➤ System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

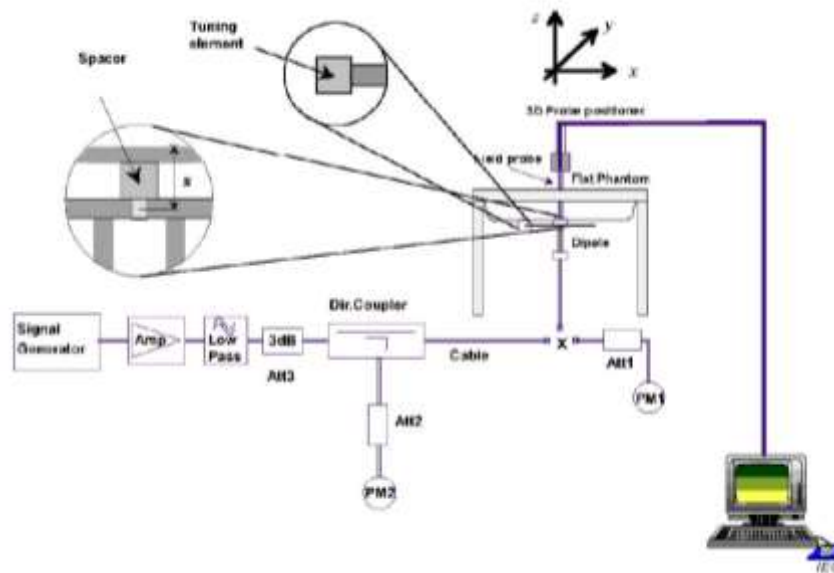


Fig.10.1 System Verification Setup Diagram

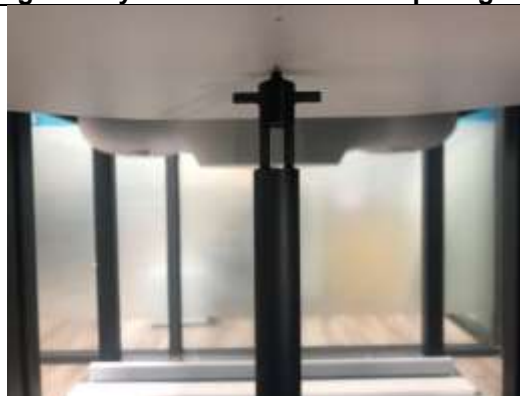


Fig.10.2 Photo of Dipole setup

➤

➤ **System Verification Results**

Comparing to the original SAR value provided by MVG, the verification data should be within its specification of 10%. The table as below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix C of this report.

Date (dd/mm/yy)	Frequency (MHz)	Power fed onto dipole (mW)	Measured 1g SAR (W/kg)	Normalized to 1W 1g SAR (W/kg)	1W Target 1g SAR (W/kg)	Deviation (%)
28.10.2022	750	100	0.846	8.46	8.57	-1.28
28.10.2022	835	100	0.937	9.37	9.57	-2.09
02.11.2022	1750	100	3.711	37.11	36.5	1.67
02.11.2022	1900	100	3.980	39.80	39.6	0.51
05.11.2022	2450	40	2.026	50.65	52.92	-4.29
05.11.2022	2600	40	2.112	52.80	55.47	-4.81
08.11.2022	5200	40	2.987	74.68	76.67	-2.60
08.11.2022	5800	40	3.012	75.30	78.36	-3.91

11 EUT Testing Position

This EUT was tested in nine different positions. They are right cheek/right tilted/left cheek/left tilted for head, Front/Back/ Left /Right /Top of the EUT with phantom 10 mm gap, as illustrated below, please refer to Appendix B for the test setup photos.

11.1 Handset Reference Points

- The vertical centreline passes through two points on the front side of the handset – the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.
- The horizontal line is perpendicular to the vertical centreline and passes the center of the acoustic output. The horizontal line is also tangential to the handset at point A.
- The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centreline is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.



Fig.11.1 Illustration for Front, Back and Side of SAM Phantom

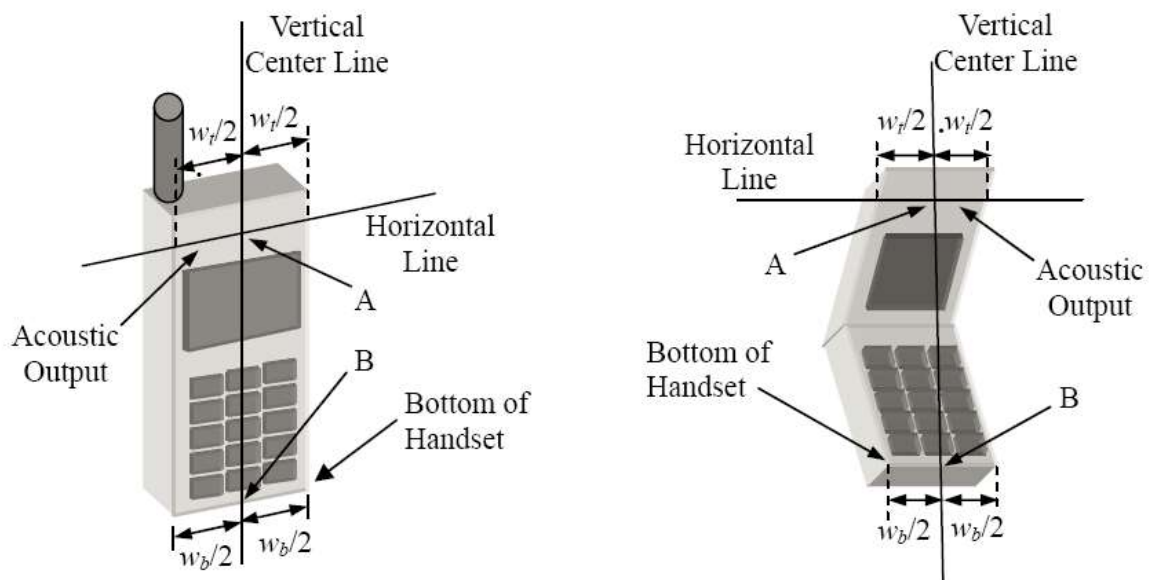


Fig. 11.2 Illustration for Handset Vertical and Horizontal Reference Lines

11.2 Positioning for Cheek / Touch

- To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see below figure)



Fig. 11.3 Illustration for Cheek Position

11.3 Positioning for Ear / 15° Tilt

- To position the device in the “cheek” position described above.
- While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see figure below).



Fig.11.4 Illustration for Tilted Position

11.4 SAR Evaluations near the Mouth/Jaw Regions of the SAM Phantom

Antennas located near the bottom of a phone may require SAR measurements around the mouth and jaw regions of the SAM head phantom. This typically applies to clam-shell style phones that are generally longer in the unfolded normal use positions or to certain older style long rectangular phones.

Under these circumstances, the following procedures apply, adopted from the FCC guidance on SAR handsets document FCC KDB Publication 648474 D04v01r03. The SAR required in these regions of SAM should be measured using a flat phantom. The phone should be positioned with a separation distance of 4 mm between the ear reference point (ERP) and the outer surface of the flat phantom shell. While maintaining this distance at the ERP location, the low (bottom) edge of the phone should be lowered from the phantom to establish the same separation distance between the peak SAR locations identified by the truncated partial SAR distribution measured with the SAM phantom. The distance from the peak SAR location to the phone is determined by the straight line passing perpendicularly through the phantom surface. When it is not feasible to maintain 4 mm separation at the ERP while also establishing the required separation at the peak SAR location, the top edge of the phone will be allowed to touch the phantom with a separation < 4 mm at the ERP. The phone should not be tilted to the left or right while placed in this inclined position to the flat phantom.

11.5 Body Worn Accessory Configurations

- To position the device parallel to the phantom surface with either keypad up or down.
- To adjust the device parallel to the flat phantom.
- To adjust the distance between the device surface and the flat phantom to 10 mm or holster surface and the flat phantom to 0 mm.

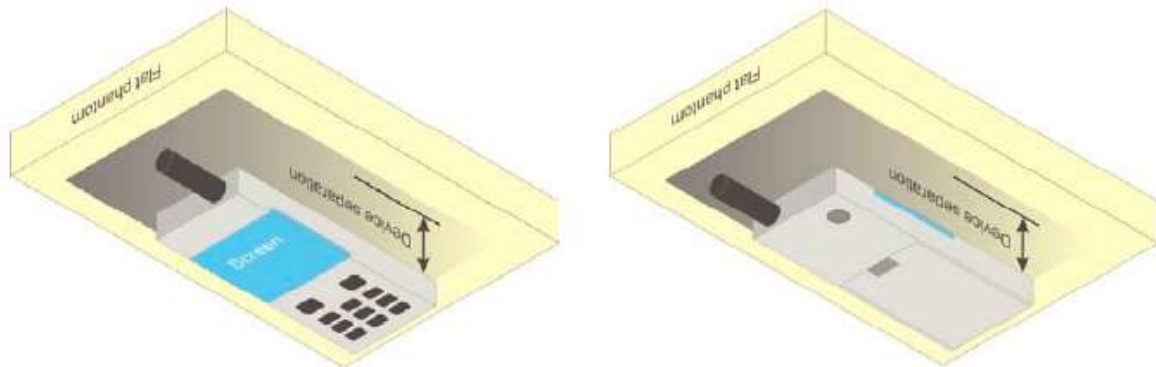


Fig.11.5 Illustration for Body Worn Position

11.6 Wireless Router (Hotspot) Configurations

Some battery-operated handsets have the capability to transmit and receive internet connectivity through simultaneous transmission of WIFI in conjunction with a separate licensed transmitter. The FCC has provided guidance in KDB Publication 941225 D06 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 mm from the front, back and edges of the device with antennas 2.5 cm or closer to the edge of the device, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions. Therefore, SAR must be evaluated for each frequency transmission and mode separately and summed with the WIFI transmitter according to KDB 648474 publication procedures. The “Portable Hotspot” feature on the handset was NOT activated, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal.

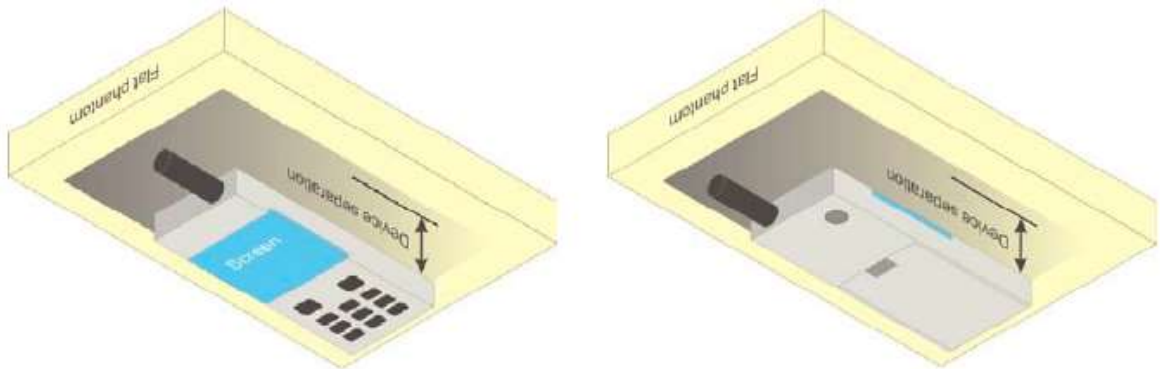


Fig.11.6 Illustration for Hotspot Position

12 Measurement Procedures

The measurement procedures are as below:

<Conducted power measurement>

- For WWAN power measurement, use base station simulator to configure EUT WWAN transition in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- Read the WWAN RF power level from the base station simulator.
- For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band.
- Connect EUT RF port through RF cable to the power meter or spectrum analyzer, and measure WLAN/BT output power.

<Conducted power measurement>

- Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- Place the EUT in positions as Appendix B demonstrates.
- Set scan area, grid size and other setting on the OpenSAR software.
- Measure SAR results for the highest power channel on each testing position.
- Find out the largest SAR result on these testing positions of each band.
- Measure SAR results for other channels in worst SAR testing position if the Reported SAR or highest power channel is larger than 0.8 W/kg.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- Power reference measurement
- Area scan
- Zoom scan
- Power drift measurement

12.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The OpenSAR software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a “cube” measurement. The measured volume must include the 1g and 10 g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine. The system always gives the maximum values for 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- Extraction of the measured data (grid and values) from the Zoom Scan.
- Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters).
- Generation of a high-resolution mesh within the measured volume.
- Interpolation of all measured values from the measurement grid to the high-resolution grid
- Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- Calculation of the averaged SAR within masses of 1g and 10g.

12.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurement are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

12.3 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10g. Area scan and zoom scan resolution setting follows KDB 865664 D01v01r04 quoted below.

		≤ 3 GHz	> 3 GHz	
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm	
Maximum probe angle from probe axis to phantom surface normal at the measurement location		$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$	
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$		≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm	
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.		
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
<p>Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.</p> <p>* When zoom scan is required and the <u>reported</u> SAR from the <u>area scan based 1-g SAR estimation</u> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.</p>				

12.4 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remains in the same test position for all measurements and all volume scans use the same spatial resolution and grid spacing. When all volume scans are completed, the software can combine and subsequently superpose these measurement data to calculate the multiband SAR.

12.5 SAR Averaged Methods

In the COMOSAR system, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method, which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1g and 10g cubes, the extrapolation distance should not be larger than 5 mm.

12.6 Power Drift Monitoring

All SAR testing is under the EUT with a full charged battery and maximum output power. In OpenSAR measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR testing. Both these procedures measure the field at a specified reference position before and after the SAR testing. If the power drifts more than 5%, the SAR will be retested.

13 Conducted RF Output Power

13.1 GSM Conducted Power

Band: GSM 850 Channel	Burst Average Power (dBm)			Frame-Average Power(dBm)		
	128	190	251	128	190	251
Frequency (MHz)	824.2	836.6	848.8	824.2	836.6	848.8
GSM (GMSK, Voice)	33.14	33.26	33.15	24.11	24.23	24.12
GPRS (GMSK, 1 TX slot)	32.99	33.12	33.00	23.96	24.09	23.97
GPRS (GMSK, 2 TX slots)	32.11	32.23	32.12	26.09	26.21	26.10
GPRS (GMSK, 3 TX slots)	30.19	30.31	30.21	25.93	26.05	25.95
GPRS (GMSK, 4 TX slots)	29.09	29.19	29.10	26.08	26.18	26.09
EGPRS (8PSK, 1 TX slot)	27.52	27.33	27.60	18.49	18.30	18.57
EGPRS (8PSK, 2 TX slots)	26.33	26.17	26.36	20.31	20.15	20.34
EGPRS (8PSK, 3 TX slots)	23.97	23.81	23.98	19.71	19.55	19.72
EGPRS (8PSK, 4 TX slots)	22.51	22.50	22.66	19.50	19.49	19.65

Remark:

- The frame-averaged power is linearly reported the maximum burst averaged power over 8 time slots. The calculated method are shown as below:
The duty cycle “x” of different time slots as below:
1 TX slot is 1/8, 2 TX slots is 2/8, 3 TX slots is 3/8 and 4 TX slots is 4/8
Based on the calculation formula:
Frame-averaged power = Burst averaged power + 10 log (x)
So,
Frame-averaged power (1 TX slot) = Burst averaged power (1 TX slot)– 9.03
Frame-averaged power (2 TX slots) = Burst averaged power (2 TX slots)– 6.02
Frame-averaged power (3 TX slots) = Burst averaged power (3 TX slots)– 4.26
Frame-averaged power (4 TX slots) = Burst averaged power (4 TX slots) – 3.01
- CS1 coding scheme was used in GPRS conducted power measurements and SAR testing, MCS5 coding scheme was used in EGPRS conducted power measurements and SAR testing (if necessary).

Note:

- For Head SAR testing, GSM Voice mode should be evaluated, therefore the EUT was set in GSM 850 Voice mode.
- For Body worn SAR testing, GSM Voice mode should be evaluated, therefore the EUT was set in GSM 850 Voice mode.
- For Hotspot mode SAR testing, GPRS and EGPRS mode should be evaluated, therefore the EUT was set in GPRS 2 TX slots mode due to the highest frame-averaged power.
- For GPRS multi time slots SAR measurement, when the measured maximum output power levels are within 0.25 dB of each other, test the configuration with the most number of time slots.
- Per KDB447498 D04v01, the maximum output power channel is used for SAR testing and for further SAR test reduction.
- The EUT do not support DTM and VoIP function.

Band: PCS 1900 Channel	Burst Average Power (dBm)			Frame-Average Power(dBm)		
	512	661	810	512	661	810
Frequency (MHz)	1850.2	1880.0	1909.8	1850.2	1880.0	1909.8
GSM (GMSK, Voice)	30.07	30.03	29.97	21.04	21.00	20.94
GPRS (GMSK, 1 TX slot)	30.05	30.04	29.98	21.02	21.01	20.95
GPRS (GMSK, 2 TX slots)	29.17	29.17	29.13	23.15	23.15	23.11
GPRS (GMSK, 3 TX slots)	27.27	27.28	27.27	23.01	23.02	23.01
GPRS (GMSK, 4 TX slots)	26.14	26.19	26.17	23.13	23.18	23.16
EGPRS (8PSK, 1 TX slot)	26.78	26.85	26.70	17.75	17.82	17.67
EGPRS (8PSK, 2 TX slots)	25.86	25.85	25.67	19.84	19.83	19.65
EGPRS (8PSK, 3 TX slots)	23.79	23.89	23.76	19.53	19.63	19.50
EGPRS (8PSK, 4 TX slots)	22.72	22.84	22.63	19.71	19.83	19.62

Remark:

3. The frame-averaged power is linearly reported the maximum burst averaged power over 8 time slots. The calculated method are shown as below:
The duty cycle "x" of different time slots as below:
1 TX slot is 1/8, 2 TX slots is 2/8, 3 TX slots is 3/8 and 4 TX slots is 4/8
Based on the calculation formula:
Frame-averaged power = Burst averaged power + 10 log (x)
So,
Frame-averaged power (1 TX slot) = Burst averaged power (1 TX slot)– 9.03
Frame-averaged power (2 TX slots) = Burst averaged power (2 TX slots)– 6.02
Frame-averaged power (3 TX slots) = Burst averaged power (3 TX slots)– 4.26
Frame-averaged power (4 TX slots) = Burst averaged power (4 TX slots) – 3.01
4. CS1 coding scheme was used in GPRS conducted power measurements and SAR testing, MCS5 coding scheme was used in EGPRS conducted power measurements and SAR testing (if necessary).

Note:

1. For Head SAR testing, GSM Voice mode should be evaluated, therefore the EUT was set in GSM 1900 Voice mode.
2. For Body worn SAR testing, GSM Voice mode should be evaluated, therefore the EUT was set in GSM Voice 1900 mode.
3. For Hotspot mode SAR testing, GPRS and EGPRS mode should be evaluated, therefore the EUT was set in GPRS 4 TX slots mode due to the highest frame-averaged power.
4. Per KDB447498 D04v01, the maximum output power channel is used for SAR testing and for further SAR test reduction.
5. The EUT do not support DTM and VoIP function.

13.2 WCDMA Conducted Power

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Rohde & Schwarz CMU200 referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table 1

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	CM (dB) ⁽²⁾
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 ⁽³⁾	15/15 ⁽³⁾	64	12/15 ⁽³⁾	24/15	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$
 Note 2: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$.
 Note 3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

HSDPA Sub-test setup configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Rohde & Schwarz CMU200 referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table 2

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.

Note 6: β_{ed} cannot be set directly; it is set by Absolute Grant Value.

HSUPA Sub-test setup configuration

WCDMA Conducted Power:

WCDMA Average power (dBm)			
Band	WCDMA Band V		
Channel	4132	4183	4233
Frequency (MHz)	826.4	836.6	846.6
AMR 12.2 kbps	23.63	23.80	23.73
RMC 12.2 kbps	23.61	23.81	23.71
HSDPA Sub-test 1	22.68	22.85	22.79
HSDPA Sub-test 2	22.14	22.33	22.26
HSDPA Sub-test 3	22.16	22.34	22.28
HSDPA Sub-test 4	22.12	22.33	22.25
HSUPA Sub-test 1	20.69	20.88	20.78
HSUPA Sub-test 2	21.17	21.37	21.30
HSUPA Sub-test 3	21.68	21.86	21.77
HSUPA Sub-test 4	20.72	20.88	20.82
HSUPA Sub-test 5	22.68	22.88	22.78

WCDMA Average power (dBm)			
Band	WCDMA Band IV		
Channel	1312	1413	1513
Frequency (MHz)	1712.4	1732.6	1752.6
AMR 12.2 kbps	23.45	23.71	23.52
RMC 12.2 kbps	23.46	23.75	23.61
HSDPA Sub-test 1	22.51	22.78	22.64
HSDPA Sub-test 2	21.99	22.20	22.13
HSDPA Sub-test 3	22.02	22.24	22.15
HSDPA Sub-test 4	21.97	22.19	22.11
HSUPA Sub-test 1	20.51	20.77	20.64
HSUPA Sub-test 2	21.00	21.23	21.13
HSUPA Sub-test 3	21.48	21.71	21.59
HSUPA Sub-test 4	20.51	20.77	20.66
HSUPA Sub-test 5	22.50	22.71	22.64

WCDMA Average power (dBm)			
Band	WCDMA Band II		
Channel	9262	9400	9538
Frequency (MHz)	1852.4	1880.0	1907.6
AMR 12.2 kbps	23.37	23.54	23.51
RMC 12.2 kbps	23.45	23.57	23.57
HSDPA Sub-test 1	22.47	22.59	22.57
HSDPA Sub-test 2	21.92	21.99	21.97
HSDPA Sub-test 3	21.90	21.99	22.00
HSDPA Sub-test 4	21.90	22.03	22.03
HSUPA Sub-test 1	20.46	20.53	20.50
HSUPA Sub-test 2	20.95	21.05	21.01
HSUPA Sub-test 3	21.42	21.54	21.50
HSUPA Sub-test 4	20.49	20.56	20.51
HSUPA Sub-test 5	22.43	22.56	22.52

Note:

1. Applying the subtest setup in Table C.11.1.3 of 3GPP TS 34.121-1
2. Per KDB 941225 D01, RMC 12.2kbps mode is used to evaluate SAR due the highest output power. If AMR 12.2 kbps power is < 0.25dB higher than RMC 12.2kbps, SAR tests with AMR 12.2 kbps can be excluded.
3. AMR, HSDPA RF power will not be larger than RMC 12.2kbps, detailed information is included in Tune-up Procure exhibit.

13.3 LTE Conducted Power

13.3.1 Largest channel bandwidth standalone SAR test requirements

QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel.⁸ When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

QPSK with 50% RB allocation

The procedures required for 1 RB allocation in section 4.2.1 are applied to measure the SAR for QPSK with 50% RB allocation.⁹

QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100% RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in sections 4.2.1 and 4.2.2 are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in sections 4.2.1, 5.2.2 and 4.2.3 to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

13.3.2 Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section 4.2 to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> \frac{1}{2}$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg. The equivalent channel configuration for the RB allocation, RB offset and modulation etc. is determined for the smaller channel bandwidth according to the same number of RB allocated in the largest channel bandwidth. For example, 50 RB in 10 MHz channel bandwidth does not apply to 5 MHz channel bandwidth; therefore, this cannot be tested in the smaller channel bandwidth. However, 50% RB allocation in 10 MHz channel bandwidth is equivalent to 100% RB allocation in 5 MHz channel bandwidth; therefore, these are the equivalent configurations to be compared to determine the specific channel and configuration in the smaller channel bandwidth that need SAR testing.

13.3.3 TDD LTE configuration setup for SAR measurement

According to KDB 941225 D05v02r03 and April 2013 TCB workshop slides, SAR must be tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- see 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- “special subframe S” contains both uplink and downlink transmissions and must be taken into consideration to determine the transmission duty factor
 - according to the worst case uplink and downlink cyclic prefix requirements for UpPTS to determine the highest SAR test duty factor

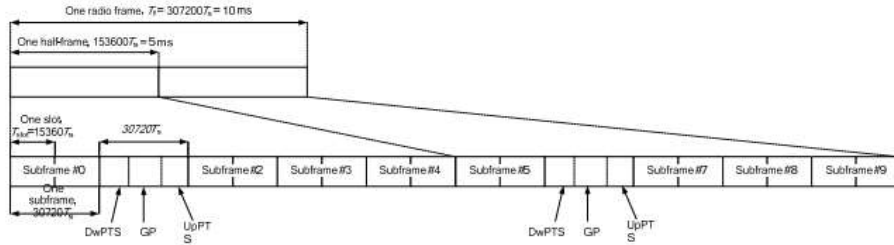


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity)

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS)

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink				
	DwPTS	UpPTS		DwPTS	UpPTS			
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$		
1	$19760 \cdot T_s$			$20480 \cdot T_s$				
2	$21952 \cdot T_s$			$23040 \cdot T_s$				
3	$24144 \cdot T_s$			$25600 \cdot T_s$				
4	$26336 \cdot T_s$			$7680 \cdot T_s$				
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$				
7	$21952 \cdot T_s$			$12800 \cdot T_s$				
8	$24144 \cdot T_s$			-			-	-
9	$13168 \cdot T_s$			-			-	-

Per 3GPP 36.211 section 4.2, each radio frame of length $T_f=37200 \cdot T_s = 10$ ms consists of two half-frames of length $153600 \cdot T_s = 5$ ms each. Each half-frame consists of five subframes of length $30720 \cdot T_s = 1$ ms. So, the uplink duty factor in special subframe as below:

Special Subframe configuration	Normal cyclic prefix in downlink		Extended cyclic prefix in downlink	
	Duty factor of Uplink		Duty factor of Uplink	
	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	7.14%	8.33%	7.14%	8.33%
1	7.14%	8.33%	7.14%	8.33%
2	7.14%	8.33%	7.14%	8.33%
3	7.14%	8.33%	7.14%	8.33%
4	7.14%	8.33%	14.27%	16.67%
5	14.27%	16.67%	14.27%	16.67%
6	14.27%	16.67%	14.27%	16.67%
7	14.27%	16.67%	14.27%	16.67%
8	14.27%	16.67%	/	/
9	14.27%	16.67%	/	/

Table 4.2-2: Uplink-downlink configurations

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

According to above table:

1. The highest duty factor is configuration 0;
2. The duty factor of uplink in one half-frame with normal cyclic prefix is: $(3\text{ms} + 0.143\text{ms})/5\text{ms}=62.86\%$;
3. The duty factor of uplink in one half-frame with extended cyclic prefix is: $(3\text{ms} + 0.167\text{ms})/5\text{ms}=63.34\%$;
4. For purpose to get the worst case SAR test duty factor, the duty factor of normal cyclic prefix in uplink scaled-up to the extended cyclic prefix in uplink, the scaling factor is $63.34\%/62.86\%=1.008$, and the scaling factor will be taken into the final measured SAR.

LTE Band 2 part:

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					18607	18900	19193
					1850.7MHz	1880.0MHz	1909.3MHz
Band 2	1.4	QPSK	1	0	23.26	23.33	23.34
			1	2	23.39	23.43	23.53
			1	5	23.30	23.33	23.34
			3	0	23.40	23.42	23.42
			3	1	23.38	23.41	23.39
			3	2	23.40	23.42	23.42
		16QAM	6	0	22.37	22.41	22.45
			1	0	22.43	22.43	22.24
			1	2	22.54	22.60	22.41
			1	5	22.40	22.45	22.25
			3	0	22.27	22.31	22.24
			3	1	22.30	22.37	22.21
		64QAM	3	2	22.29	22.35	22.24
			6	0	21.43	21.33	21.45
			1	0	21.76	21.44	21.59
			1	2	21.56	21.68	21.50
			1	5	21.40	21.81	21.73
			3	0	21.62	21.33	21.54
			3	1	21.73	21.58	21.70
			3	2	21.37	21.83	21.72
			6	0	20.73	20.76	20.82

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					18615	18900	19185
					1851.5MHz	1880.0MHz	1908.5MHz
Band 2	3	QPSK	1	0	23.30	23.39	23.39
			1	7	23.27	23.40	23.41
			1	14	23.24	23.38	23.45
			8	0	22.36	22.41	22.46
			8	4	22.34	22.40	22.43
			8	7	22.27	22.36	22.47
			15	0	22.30	22.40	22.41
		16QAM	1	0	22.51	22.58	22.31
			1	7	22.44	22.53	22.33
			1	14	22.43	22.51	22.32
			8	0	21.41	21.42	21.46
			8	4	21.41	21.40	21.52
			8	7	21.33	21.40	21.47
			15	0	21.27	21.34	21.33
		64QAM	1	0	21.80	21.61	21.45
			1	7	21.68	21.58	21.55
			1	14	21.52	21.67	21.55
			8	0	20.80	20.91	20.69
			8	4	20.87	20.69	20.80
			8	7	20.35	20.90	20.79
			15	0	20.66	20.56	20.34

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					18625	18900	19175
					1852.5MHz	1880.0MHz	1907.5MHz
Band 2	5	QPSK	1	0	23.27	23.38	23.37
			1	12	23.34	23.42	23.51
			1	24	23.21	23.33	23.42
			12	0	22.25	22.36	22.39
			12	6	22.25	22.39	22.40
			12	11	22.24	22.45	22.43
			25	0	22.26	22.42	22.42
		16QAM	1	0	22.27	22.52	22.39
			1	12	22.36	22.61	22.54
			1	24	22.17	22.57	22.42
			12	0	21.28	21.44	21.41
			12	6	21.27	21.46	21.43
			12	11	21.27	21.44	21.35
			25	0	21.29	21.37	21.47
		64QAM	1	0	21.63	21.82	21.51
			1	12	21.41	21.99	21.57
			1	24	21.56	21.84	21.60
			12	0	20.30	20.68	20.57
			12	6	20.28	20.91	20.90
			12	11	20.48	20.78	20.81
			25	0	20.43	20.56	20.56

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					18650	18900	19150
					1855.0MHz	1880.0MHz	1905.0MHz
Band 2	10	QPSK	1	0	23.26	23.31	23.32
			1	24	23.44	23.47	23.55
			1	49	23.15	23.33	23.42
			25	0	22.28	22.46	22.48
			25	12	22.28	22.43	22.45
			25	24	22.28	22.48	22.45
			50	0	22.30	22.42	22.44
		16QAM	1	0	22.43	22.50	22.25
			1	24	22.40	22.64	22.35
			1	49	22.38	22.53	22.32
			25	0	21.31	21.50	21.52
			25	12	21.28	21.50	21.49
			25	24	21.29	21.53	21.50
			50	0	21.24	21.45	21.44
		64QAM	1	0	21.63	21.91	21.32
			1	24	21.57	21.71	21.55
			1	49	21.50	21.66	21.40
			25	0	20.76	20.80	20.61
			25	12	20.54	20.81	20.75
			25	24	20.70	20.57	20.72
			50	0	20.28	20.49	20.59

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					18675	18900	19125
					1857.5MHz	1880.0MHz	1902.5MHz
Band 2	15	QPSK	1	0	23.20	23.20	23.22
			1	37	23.22	23.40	23.31
			1	74	23.08	23.20	23.27
			36	0	22.29	22.47	22.44
			36	16	22.29	22.52	22.45
			36	35	22.28	22.48	22.45
			75	0	22.27	22.48	22.48
		16QAM	1	0	22.41	22.49	22.09
			1	37	22.43	22.66	22.25
			1	74	22.27	22.52	22.20
			36	0	21.22	21.49	21.40
			36	16	21.20	21.53	21.37
			36	35	21.23	21.48	21.34
			75	0	21.23	21.44	21.45
		64QAM	1	0	21.85	21.56	21.43
			1	37	21.63	21.86	21.34
			1	74	21.35	21.81	21.50
			36	0	20.70	20.61	20.74
			36	16	20.23	20.91	20.79
			36	35	20.61	20.53	20.56
			75	0	20.42	20.80	20.87

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					18700	18900	19100
					1860.0MHz	1880.0MHz	1900.0MHz
Band 2	20	QPSK	1	0	23.06	23.08	22.92
			1	49	23.37	23.46	23.34
			1	99	23.07	23.08	23.06
			50	0	22.19	22.37	22.38
			50	24	22.24	22.39	22.43
			50	49	22.19	22.38	22.34
			100	0	22.25	22.41	22.33
		16QAM	1	0	22.15	22.28	22.01
			1	49	22.48	22.67	22.39
			1	99	22.08	22.28	22.18
			50	0	21.19	21.44	21.42
			50	24	21.20	21.40	21.49
			50	49	21.18	21.39	21.42
			100	0	21.24	21.41	21.35
		64QAM	1	0	21.35	21.35	21.17
			1	49	21.98	21.89	21.74
			1	99	21.08	21.62	21.67
			50	0	20.55	20.84	20.80
			50	24	20.48	20.40	20.77
			50	49	20.42	20.65	20.56
			100	0	20.27	20.64	20.59

LTE Band 5 part:

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20407	20525	20643
					824.7MHz	836.5MHz	848.3MHz
Band 5	1.4	QPSK	1	0	23.38	23.47	23.37
			1	2	23.51	23.57	23.59
			1	5	23.41	23.54	23.34
			3	0	23.40	23.57	23.44
			3	1	23.41	23.54	23.48
			3	2	23.41	23.53	23.47
		16QAM	6	0	22.41	22.55	22.45
			1	0	22.53	22.40	22.48
			1	2	22.56	22.55	22.74
			1	5	22.55	22.41	22.44
			3	0	22.33	22.40	22.35
			3	1	22.32	22.36	22.35
		64QAM	3	2	22.31	22.35	22.36
			6	0	21.32	21.56	21.50
			1	0	21.72	21.46	21.77
			1	2	21.95	21.89	21.91
			1	5	21.83	21.74	21.63
			3	0	21.44	21.51	21.75
			3	1	21.44	21.58	21.69
			3	2	21.48	21.82	21.71
			6	0	20.54	20.68	20.55

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20415	20525	20635
					825.5MHz	836.5MHz	847.5MHz
Band 5	3	QPSK	1	0	23.39	23.59	23.50
			1	7	23.46	23.51	23.44
			1	14	23.44	23.61	23.45
			8	0	22.42	22.57	22.46
			8	4	22.42	22.54	22.49
			8	7	22.48	22.59	22.50
			15	0	22.41	22.56	22.47
		16QAM	1	0	22.61	22.76	22.38
			1	7	22.60	22.68	22.39
			1	14	22.60	22.69	22.31
			8	0	21.50	21.59	21.52
			8	4	21.48	21.60	21.53
			8	7	21.52	21.64	21.48
			15	0	21.44	21.53	21.39
		64QAM	1	0	21.80	21.93	21.54
			1	7	21.99	21.97	21.85
			1	14	21.63	21.87	21.66
			8	0	20.81	20.98	20.88
			8	4	20.89	20.76	20.97
			8	7	20.90	20.83	20.97
			15	0	20.94	20.60	20.61

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20425	20525	20625
					826.5MHz	836.5MHz	846.5MHz
Band 5	5	QPSK	1	0	23.39	23.53	23.51
			1	12	23.55	23.62	23.59
			1	24	23.47	23.57	23.48
			12	0	22.42	22.58	22.54
			12	6	22.38	22.57	22.57
			12	11	22.40	22.58	22.53
			25	0	22.44	22.60	22.49
		16QAM	1	0	22.38	22.76	22.54
			1	12	22.53	22.76	22.61
			1	24	22.50	22.77	22.48
			12	0	21.38	21.60	21.53
			12	6	21.34	21.60	21.54
			12	11	21.34	21.59	21.48
			25	0	21.43	21.55	21.55
		64QAM	1	0	21.81	22.14	21.79
			1	12	21.64	21.91	21.66
			1	24	21.84	21.92	21.78
			12	0	20.43	20.73	20.93
			12	6	20.57	21.06	20.87
			12	11	20.45	20.95	20.80
			25	0	20.53	20.99	20.86

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20450	20525	20600
					829MHz	836.5MHz	844MHz
Band 5	10	QPSK	1	0	23.36	23.50	23.52
			1	24	23.58	23.72	23.71
			1	49	23.49	23.53	23.45
			25	0	22.44	22.64	22.65
			25	12	22.48	22.60	22.70
			25	24	22.45	22.64	22.65
			50	0	22.51	22.63	22.57
		16QAM	1	0	22.54	22.71	22.44
			1	24	22.75	22.80	22.59
			1	49	22.64	22.73	22.41
			25	0	21.42	21.66	21.72
			25	12	21.46	21.65	21.70
			25	24	21.42	21.66	21.70
			50	0	21.53	21.66	21.59
		64QAM	1	0	21.57	21.88	21.70
			1	24	21.87	21.83	22.00
			1	49	22.02	21.95	21.58
			25	0	20.88	20.83	21.19
			25	12	20.58	20.70	21.06
			25	24	20.74	20.99	21.11
			50	0	20.93	20.74	20.90

LTE Band 7 part:

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20775	21100	21425
					2502.5MHz	2535MHz	2567.5MHz
Band 7	5	QPSK	1	0	21.90	22.01	22.07
			1	12	22.04	22.08	22.16
			1	24	21.89	21.99	22.12
			12	0	21.02	21.06	21.10
			12	6	20.95	21.03	21.15
			12	11	20.94	21.01	21.14
			25	0	21.05	21.08	21.19
		16QAM	1	0	20.99	21.23	21.09
			1	12	21.11	21.29	21.26
			1	24	20.94	21.19	21.11
			12	0	20.00	20.11	20.20
			12	6	20.00	20.13	20.15
			12	11	20.01	20.15	20.17
			25	0	20.06	20.11	20.23
		64QAM	1	0	20.10	20.60	20.42
			1	12	20.31	20.68	20.49
			1	24	19.97	20.28	20.32
			12	0	19.26	19.44	19.35
			12	6	19.40	19.23	19.58
			12	11	19.07	19.53	19.32
			25	0	19.52	19.49	19.42

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20800	21100	21400
					2505MHz	2535MHz	2565MHz
Band 7	10	QPSK	1	0	21.91	21.96	22.10
			1	24	21.99	22.17	22.27
			1	49	21.90	21.99	22.15
			25	0	20.98	21.11	21.17
			25	12	21.01	21.10	21.16
			25	24	20.97	21.07	21.15
			50	0	21.02	21.10	21.16
		16QAM	1	0	21.10	21.18	21.03
			1	24	21.18	21.40	21.11
			1	49	21.16	21.24	21.03
			25	0	20.02	20.21	20.27
			25	12	20.05	20.24	20.23
			25	24	20.04	20.16	20.25
			50	0	20.06	20.15	20.20
		64QAM	1	0	20.21	20.18	20.24
			1	24	20.61	20.66	20.22
			1	49	20.61	20.63	20.51
			25	0	19.52	19.71	19.30
			25	12	19.17	19.31	19.39
			25	24	19.13	19.58	19.35
			50	0	19.32	19.53	19.58

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20825	21100	21375
					2507.5MHz	2535MHz	2562.5MHz
Band 7	15	QPSK	1	0	21.83	21.88	21.98
			1	37	21.95	22.04	22.13
			1	74	21.84	21.86	22.05
			36	0	20.98	21.10	21.14
			36	16	20.96	21.10	21.12
			36	35	21.01	21.09	21.10
			75	0	21.04	21.14	21.19
		16QAM	1	0	21.05	21.21	20.93
			1	37	21.18	21.36	20.95
			1	74	21.03	21.21	20.97
			36	0	19.94	20.13	20.09
			36	16	19.97	20.15	20.08
			36	35	19.96	20.14	20.07
			75	0	19.98	20.13	20.15
		64QAM	1	0	20.23	20.32	20.36
			1	37	20.46	20.84	20.08
			1	74	20.53	20.69	19.98
			36	0	19.44	19.37	19.53
			36	16	19.42	19.55	19.21
			36	35	19.29	19.64	19.51
			75	0	19.12	19.33	19.26

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20850	21100	21350
					2510MHz	2535MHz	2560MHz
Band 7	20	QPSK	1	0	21.77	21.76	21.70
			1	49	22.11	22.19	22.08
			1	99	21.77	21.77	21.78
			50	0	20.82	21.00	21.08
			50	24	20.83	20.98	21.05
			50	49	20.85	21.04	21.09
			100	0	20.91	21.00	21.08
		16QAM	1	0	20.83	20.95	20.87
			1	49	21.21	21.36	21.15
			1	99	20.82	21.02	20.94
			50	0	19.92	20.10	20.17
			50	24	19.92	20.05	20.22
			50	49	19.89	20.13	20.16
			100	0	19.97	20.03	20.10
		64QAM	1	0	20.24	20.14	20.36
			1	49	20.41	20.55	20.29
			1	99	20.11	20.14	20.40
			50	0	19.25	19.53	19.41
			50	24	19.13	19.14	19.33
			50	49	18.90	19.39	19.23
			100	0	19.20	19.22	19.30

LTE Band 12 part:

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					23017	23095	23175
					699.7MHz	707.5MHz	715.3MHz
Band 12	1.4	QPSK	1	0	23.42	23.56	23.49
			1	2	23.66	23.60	23.59
			1	5	23.44	23.48	23.49
			3	0	23.48	23.54	23.60
			3	1	23.55	23.56	23.60
			3	2	23.53	23.58	23.63
		6	0	22.46	22.49	22.55	
		16QAM	1	0	22.64	22.44	22.68
			1	2	22.81	22.52	22.81
			1	5	22.61	22.42	22.66
			3	0	22.44	22.40	22.52
			3	1	22.50	22.43	22.55
			3	2	22.48	22.45	22.54
		64QAM	6	0	21.40	21.51	21.59
			1	0	22.10	21.44	21.71
			1	2	22.30	21.79	22.00
			1	5	21.83	21.76	21.97
			3	0	21.68	21.52	21.53
			3	1	21.82	21.87	21.79
			3	2	21.61	21.51	21.97
		6	0	20.60	20.71	20.96	

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					23025	23095	23165
					700.5MHz	707.5MHz	714.5MHz
Band 12	3	QPSK	1	0	23.47	23.50	23.62
			1	7	23.44	23.56	23.65
			1	14	23.49	23.50	23.60
			8	0	22.51	22.47	22.59
			8	4	22.49	22.48	22.62
			8	7	22.51	22.48	22.61
			15	0	22.48	22.53	22.56
		16QAM	1	0	22.68	22.73	22.50
			1	7	22.69	22.70	22.53
			1	14	22.74	22.63	22.50
			8	0	21.59	21.52	21.64
			8	4	21.59	21.52	21.69
			8	7	21.57	21.56	21.64
			15	0	21.56	21.44	21.57
		64QAM	1	0	21.68	21.96	21.91
			1	7	21.82	22.00	21.89
			1	14	21.88	21.79	21.81
			8	0	20.96	20.88	20.93
			8	4	20.70	20.53	20.99
			8	7	20.83	21.03	20.83
			15	0	20.86	20.47	20.69

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					23035	23095	23155
					701.5MHz	707.5MHz	713.5MHz
Band 12	5	QPSK	1	0	23.49	23.48	23.52
			1	12	23.61	23.62	23.68
			1	24	23.52	23.57	23.59
			12	0	22.53	22.49	22.64
			12	6	22.53	22.50	22.64
			12	11	22.55	22.46	22.61
			25	0	22.50	22.58	22.67
		16QAM	1	0	22.54	22.71	22.53
			1	12	22.66	22.82	22.68
			1	24	22.54	22.74	22.60
			12	0	21.54	21.53	21.66
			12	6	21.52	21.58	21.65
			12	11	21.57	21.49	21.70
			25	0	21.55	21.56	21.73
		64QAM	1	0	21.68	21.74	21.79
			1	12	22.15	21.84	21.78
			1	24	21.99	21.91	21.93
			12	0	21.00	20.86	20.69
			12	6	21.01	20.76	20.84
			12	11	20.58	20.66	20.96
			25	0	20.60	21.06	21.21

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					23060	23095	23130
					704MHz	707.5MHz	711MHz
Band 12	10	QPSK	1	0	23.48	23.47	23.55
			1	24	23.74	23.71	23.68
			1	49	23.56	23.58	23.65
			25	0	22.67	22.53	22.57
			25	12	22.69	22.60	22.60
			25	24	22.66	22.59	22.59
			50	0	22.69	22.59	22.58
		16QAM	1	0	22.73	22.73	22.44
			1	24	22.91	22.85	22.58
			1	49	22.74	22.79	22.57
			25	0	21.72	21.68	21.65
			25	12	21.72	21.67	21.67
			25	24	21.73	21.65	21.67
			50	0	21.69	21.68	21.61
		64QAM	1	0	21.96	21.88	21.68
			1	24	22.07	21.93	22.00
			1	49	22.04	21.98	21.79
			25	0	21.02	20.99	20.85
			25	12	21.19	20.79	20.81
			25	24	21.17	20.79	20.68
			50	0	21.10	20.95	20.66

LTE Band 41 part:

LTE Band	Band-width (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)				
					40065	40355	40640	40750	41215
					2537.5MHz	2566.5MHz	2595.0MHz	2624.0MHz	2652.5MHz
Band 41	5	QPSK	1	0	22.94	22.90	23.09	22.96	22.86
			1	12	23.06	23.01	23.17	23.06	22.96
			1	24	23.00	22.91	23.10	22.97	22.82
			12	0	22.07	22.03	22.11	22.06	21.99
			12	6	22.11	22.07	22.11	22.08	22.02
			12	11	22.05	22.03	22.11	22.06	22.01
			25	0	22.09	22.06	22.16	22.09	22.03
		16QAM	1	0	22.27	22.24	22.35	22.27	22.20
			1	12	22.40	22.34	22.49	22.39	22.27
			1	24	22.27	22.22	22.38	22.27	22.17
			12	0	21.16	21.09	21.07	21.08	21.02
			12	6	21.14	21.08	21.12	21.09	21.01
			12	11	21.10	21.07	21.15	21.09	21.03
			25	0	21.16	21.11	21.21	21.14	21.06
		64QAM	1	0	22.27	22.24	22.35	22.27	22.20
			1	12	22.40	22.34	22.49	22.39	22.27
			1	24	22.27	22.22	22.38	22.27	22.17
			12	0	21.16	21.09	21.07	21.08	21.02
			12	6	21.14	21.08	21.12	21.09	21.01
			12	11	21.10	21.07	21.15	21.09	21.03
			25	0	21.16	21.11	21.21	21.14	21.06

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)				
					40090	40365	40640	40915	41190
					2540.0MHz	2567.5MHz	2595.0MHz	2622.5MHz	2650.0MHz
Band 41	10	QPSK	1	0	23.05	23.05	23.09	23.06	23.04
			1	24	23.26	23.25	23.32	23.27	23.23
			1	49	23.00	22.98	23.13	23.03	22.95
			25	0	22.11	22.08	22.26	22.14	22.05
			25	12	22.11	22.10	22.24	22.14	22.08
			25	24	22.09	22.08	22.23	22.13	22.07
			50	0	22.15	22.09	22.22	22.13	22.03
		16QAM	1	0	22.42	22.20	22.48	22.29	21.97
			1	24	22.60	22.37	22.65	22.46	22.14
			1	49	22.34	22.11	22.42	22.21	21.88
			25	0	21.19	21.14	21.31	21.19	21.08
			25	12	21.19	21.12	21.31	21.18	21.05
			25	24	21.20	21.14	21.28	21.19	21.08
			50	0	21.08	21.05	21.24	21.11	21.02
		64QAM	1	0	21.47	21.27	21.59	21.37	21.06
			1	24	21.97	21.59	21.82	21.67	21.21
			1	49	21.77	21.53	21.90	21.65	21.28
			25	0	20.66	20.39	20.68	20.49	20.12
			25	12	20.20	20.30	20.72	20.44	20.40
			25	24	20.66	20.47	20.68	20.54	20.27
			50	0	20.32	20.29	20.64	20.41	20.26

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)				
					40115	40375	40640	40900	41165
					2542.5MHz	2568.5MHz	2595.0MHz	2673.5MHz	2647.5MHz
Band 41	15	QPSK	1	0	22.96	23.01	23.05	23.02	23.05
			1	37	23.12	23.13	23.19	23.15	23.14
			1	74	22.91	22.94	23.04	22.97	22.97
			36	0	22.15	22.14	22.24	22.17	22.12
			36	16	22.12	22.11	22.27	22.16	22.09
			36	35	22.12	22.13	22.24	22.17	22.14
			75	0	22.17	22.13	22.27	22.18	22.09
		16QAM	1	0	22.33	22.21	22.41	22.27	22.08
			1	37	22.45	22.31	22.52	22.38	22.17
			1	74	22.33	22.15	22.33	22.21	21.96
			36	0	21.12	21.09	21.27	21.15	21.05
			36	16	21.10	21.09	21.22	21.13	21.08
			36	35	21.11	21.10	21.23	21.14	21.09
			75	0	21.17	21.14	21.25	21.18	21.11
		64QAM	1	0	21.73	21.61	21.82	21.68	21.48
			1	37	21.72	21.52	22.01	21.68	21.32
			1	74	21.81	21.45	21.55	21.48	21.09
			36	0	20.23	20.20	20.46	20.29	20.17
			36	16	20.17	20.14	20.23	20.17	20.11
			36	35	20.16	20.19	20.73	20.37	20.22
			75	0	20.64	20.56	20.43	20.52	20.48

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)				
					40140	40390	40640	40890	41140
					2545.0MHz	2570.0MHz	2595.0MHz	2620.0MHz	2645.0MHz
Band 41	20	QPSK	1	0	22.81	22.86	22.91	22.88	22.91
			1	49	23.25	23.24	23.31	23.26	23.23
			1	99	22.78	22.77	22.90	22.81	22.76
			50	0	22.01	22.01	22.19	22.07	22.00
			50	24	22.05	22.05	22.19	22.09	22.04
			50	49	22.00	22.05	22.16	22.09	22.10
			100	0	22.04	22.04	22.16	22.08	22.04
		16QAM	1	0	22.00	21.76	22.07	21.86	21.52
			1	49	22.40	22.14	22.47	22.25	21.88
			1	99	21.98	21.71	22.07	21.83	21.43
			50	0	21.04	21.08	21.16	21.10	21.11
			50	24	21.08	21.09	21.19	21.12	21.10
			50	49	21.06	21.08	21.21	21.12	21.10
			100	0	21.07	21.08	21.16	21.11	21.09
		64QAM	1	0	21.33	20.99	21.34	21.10	20.64
			1	49	21.68	21.46	21.89	21.60	21.23
			1	99	21.04	20.89	21.57	21.12	20.74
			50	0	20.05	20.13	20.62	20.29	20.21
			50	24	20.24	20.31	20.34	20.32	20.37
			50	49	20.55	20.38	20.31	20.36	20.21
			100	0	20.41	20.33	20.65	20.44	20.25

Note:

1. KDB 447498 D04v01 section 3.1.6, the required test channels number is 5 for LTE Band 41.

LTE Band 66 part:

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					131979	132322	132665
					1710.70MHz	1745.00MHz	1779.3MHz
Band 66	1.4	QPSK	1	0	23.01	23.14	23.21
			1	2	23.13	23.26	23.34
			1	5	23.05	23.15	23.22
			3	0	23.12	23.20	23.29
			3	1	23.12	23.21	23.29
			3	2	23.11	23.21	23.27
		16QAM	6	0	22.07	22.21	22.26
			1	0	22.13	22.24	22.09
			1	2	22.34	22.64	22.30
			1	5	22.14	22.27	22.07
			3	0	21.98	22.12	22.09
			3	1	22.01	22.11	22.13
		64QAM	3	2	21.99	22.09	22.12
			6	0	21.15	21.09	21.26
			1	0	21.61	21.30	21.23
			1	2	21.56	21.68	21.62
			1	5	21.63	21.40	21.51
			3	0	21.21	21.23	21.41
			3	1	21.06	21.41	21.59
			3	2	21.10	21.11	21.56
			6	0	20.42	20.36	20.67

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					131987	132322	132657
					1711.50MHz	1745.00MHz	1778.50MHz
Band 66	3	QPSK	1	0	22.97	23.17	23.25
			1	7	23.04	23.12	23.25
			1	14	23.07	23.10	23.20
			8	0	22.07	22.16	22.29
			8	4	22.06	22.18	22.31
			8	7	22.04	22.14	22.25
			15	0	22.01	22.13	22.20
		16QAM	1	0	22.18	22.31	22.15
			1	7	22.17	22.31	22.12
			1	14	22.26	22.26	22.11
			8	0	21.10	21.16	21.22
			8	4	21.12	21.19	21.30
			8	7	21.10	21.14	21.24
			15	0	21.04	21.05	21.18
		64QAM	1	0	21.49	21.35	21.48
			1	7	21.44	21.36	21.32
			1	14	21.66	21.41	21.31
			8	0	20.16	20.54	20.44
			8	4	20.29	20.36	20.55
			8	7	20.16	20.27	20.39
			15	0	20.37	20.08	20.61

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					131997	132322	132647
					1712.50MHz	1745.00MHz	1777.50MHz
Band 66	5	QPSK	1	0	22.96	23.14	23.21
			1	12	23.15	23.22	23.38
			1	24	22.99	23.10	23.20
			12	0	22.03	22.13	22.23
			12	6	22.01	22.13	22.24
			12	11	21.98	22.14	22.22
			25	0	22.00	22.13	22.24
		16QAM	1	0	21.95	22.35	22.15
			1	12	22.14	22.36	22.35
			1	24	22.09	22.24	22.21
			12	0	21.02	21.12	21.26
			12	6	21.02	21.16	21.27
			12	11	21.01	21.11	21.27
			25	0	21.03	21.17	21.27
		64QAM	1	0	21.08	21.48	21.26
			1	12	21.35	21.57	21.40
			1	24	21.11	21.29	21.60
			12	0	20.10	20.60	20.62
			12	6	20.15	20.58	20.31
			12	11	20.49	20.55	20.61
			25	0	20.11	20.64	20.40

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					132022	132322	132622
					1715.00MHz	1745.00MHz	1775.00MHz
Band 66	10	QPSK	1	0	22.95	23.17	23.27
			1	24	23.21	23.29	23.40
			1	49	23.17	23.14	23.20
			25	0	22.07	22.15	22.33
			25	12	22.07	22.15	22.35
			25	24	22.07	22.13	22.35
			50	0	22.12	22.14	22.31
		16QAM	1	0	22.15	22.29	22.21
			1	24	22.36	22.30	22.29
			1	49	22.37	22.21	22.10
			25	0	21.10	21.20	21.37
			25	12	21.10	21.17	21.36
			25	24	21.08	21.23	21.40
			50	0	21.14	21.21	21.31
		64QAM	1	0	21.52	21.51	21.57
			1	24	21.56	21.63	21.62
			1	49	21.85	21.70	21.43
			25	0	20.47	20.44	20.84
			25	12	20.43	20.51	20.80
			25	24	20.49	20.62	20.78
			50	0	20.19	20.28	20.47

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					132047	132322	132597
					1717.50MHz	1745.00MHz	1772.50MHz
Band 66	15	QPSK	1	0	22.90	23.07	23.19
			1	37	23.15	23.19	23.34
			1	74	23.18	23.06	23.13
			36	0	22.14	22.21	22.37
			36	16	22.16	22.21	22.38
			36	35	22.15	22.23	22.39
			75	0	22.19	22.25	22.35
		16QAM	1	0	22.05	22.45	22.10
			1	37	22.32	22.46	22.23
			1	74	22.32	22.35	22.04
			36	0	21.08	21.29	21.26
			36	16	21.09	21.25	21.28
			36	35	21.09	21.27	21.32
			75	0	21.13	21.24	21.31
		64QAM	1	0	21.09	21.76	21.47
			1	37	21.41	21.52	21.65
			1	74	21.48	21.49	21.53
			36	0	20.25	20.40	20.41
			36	16	20.57	20.66	20.51
			36	35	20.16	20.43	20.63
			75	0	20.36	20.34	20.68

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					132072	132322	132572
					1720.00MHz	1745.00MHz	1770.00MHz
Band 66	20	QPSK	1	0	22.85	23.05	22.88
			1	49	23.45	23.35	23.23
			1	99	23.16	23.01	22.89
			50	0	22.18	22.18	22.37
			50	24	22.14	22.18	22.35
			50	49	22.19	22.21	22.37
			100	0	22.23	22.18	22.30
		16QAM	1	0	21.83	22.27	22.01
			1	49	22.43	22.47	22.39
			1	99	22.18	22.12	22.03
			50	0	21.19	21.23	21.41
			50	24	21.22	21.25	21.42
			50	49	21.19	21.23	21.40
			100	0	21.20	21.16	21.29
		64QAM	1	0	21.00	21.48	21.27
			1	49	21.63	21.86	21.57
			1	99	21.20	21.58	21.13
			50	0	20.27	20.44	20.62
			50	24	20.41	20.69	20.87
			50	49	20.60	20.25	20.56
			100	0	20.67	20.64	20.35

13.4 WLAN 2.4 GHz Band Conducted Power

Average Power (dBm)				
Channel	Frequency (MHz)	802.11 b	802.11 g	802.11n (HT20)
CH 01	2412	16.49	13.85	13.76
CH 06	2437	16.68	14.16	14.04
CH 11	2462	16.30	13.93	13.80

Average Power (dBm)		
Channel	Frequency (MHz)	802.11n (HT40)
CH 03	2422	13.93
CH 06	2437	13.72
CH 09	2452	13.56

Note:

1. SAR test of WLAN 2.4GHz is performed.
2. Per KDB 248227 D01v02r02, choose the highest output power channel to test SAR and determine further SAR exclusion.
3. Per KDB 248227 D01v02r02, In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. SAR is not required for the following 2.4 GHz OFDM conditions:
 - 1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
 - 2) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
4. The output power of all data rate were pre-scan, just the worst case (the lowest data rate) of all mode were shown in report.
5. Per KDB 248227 D01V02r02 section 2.2, when the EUT in continuously transmitting mode, the actual duty cycle is 100%, so the duty cycle factor is 1.

13.5 WLAN 5.2GHz Band Conducted Power

Average Power (dBm)				
Channel	Frequency (MHz)	802.11 a	802.11 ac20	802.11 n20
CH 36	5180	13.69	13.73	13.21
CH 40	5200	13.32	13.67	13.12
CH 48	5240	13.56	13.88	13.39

Average Power (dBm)			
Channel	Frequency (MHz)	802.11 ac40	802.11 n40
CH 38	5190	13.10	13.21
CH 46	5230	13.37	13.36

Average Power (dBm)		
Channel	Frequency (MHz)	802.11 ac80
CH 42	5210	13.13

Note:

6. SAR test of WLAN 5.2GHz is performed.
7. Per KDB 248227 D01v02r02, choose the highest output power channel to test SAR and determine further SAR exclusion.
8. The output power of all data rate were pre-scan, just the worst case (the lowest data rate) of all mode were shown in report.
9. Per KDB 248227 D01V02r02 section 2.2, when the EUT in continuously transmitting mode, the actual duty cycle is 100%, so the duty cycle factor is 1.

13.6 WLAN 5.8GHz Band Conducted Power

Average Power (dBm)				
Channel	Frequency (MHz)	802.11 a	802.11 ac20	802.11 n20
CH 149	5745	11.06	11.44	11.38
CH 157	5785	12.28	12.28	12.02
CH 165	5825	12.77	12.82	12.20

Average Power (dBm)			
Channel	Frequency (MHz)	802.11 ac40	802.11 n40
CH 151	5755	10.24	10.22
CH 159	5795	10.98	11.00

Average Power (dBm)		
Channel	Frequency (MHz)	802.11 ac80
CH 155	5775	10.46

Note:

10. SAR test of WLAN 5.8GHz is performed.
11. Per KDB 248227 D01v02r02, choose the highest output power channel to test SAR and determine further SAR exclusion.
12. The output power of all data rate were pre-scan, just the worst case (the lowest data rate) of all mode were shown in report.
13. Per KDB 248227 D01V02r02 section 2.2, when the EUT in continuously transmitting mode, the actual duty cycle is 100%, so the duty cycle factor is 1.

13.7 Bluetooth Conducted Power

Average Power (dBm)				
Channel	Frequency (MHz)	GFSK	$\pi/4$ -DQPSK	8DPSK
CH 00	2402	3.08	2.33	2.34
CH 39	2441	4.10	3.37	3.40
CH 78	2480	3.22	2.54	2.60

Average Power (dBm)					
Channel	Frequency (MHz)	BLE PHY 1M	BLE PHY 2M	BLE Coded PHY S=2	BLE Coded PHY S=8
CH 00	2402	-3.72	-3.63	-3.66	-3.70
CH 20	2442	-2.59	-2.64	-2.62	-2.61
CH 39	2480	-3.56	-3.48	-3.55	-3.55

Note:

1. SAR test of Bluetooth is performed and the mode with highest average power is selected for SAR testing.
2. Per KDB 447498 D04v01 section 2.1.2: 1-mW Test Exemption, SAR test for BLE is not required.
3. The output power of all data rate were pre-scan, just the worst case of all mode were shown in report.
4. Per KDB 248227 D01V02r02 section 2.2, when the EUT in continuously transmitting mode, the actual duty cycle is 100%, so the duty cycle factor is 1.

14 Exposure Positions Consideration

14.1 EUT Antenna Locations

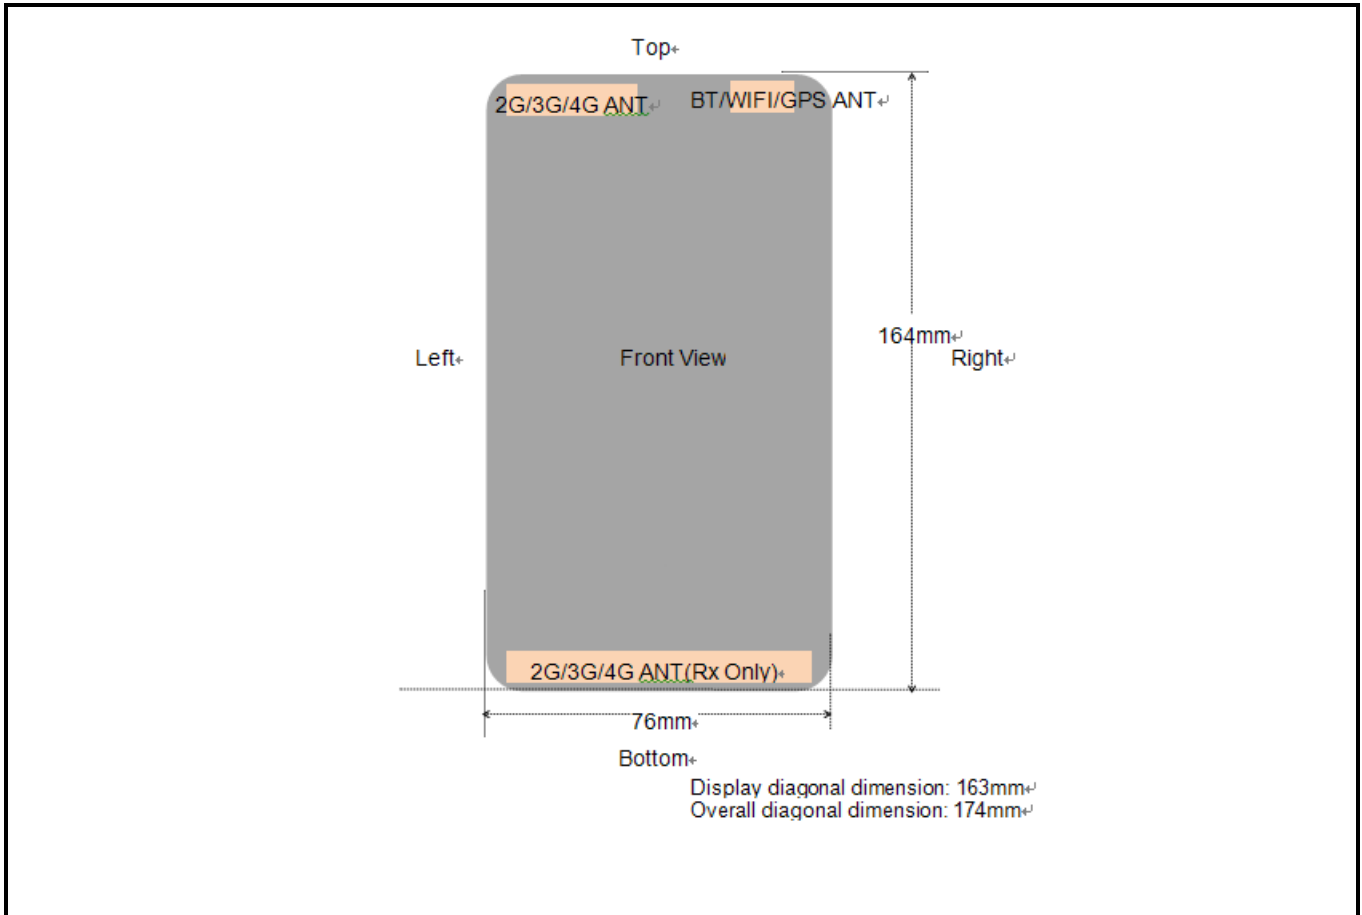


Fig.14.1 EUT Antenna Locations

Note: This antenna diagram is only used as a reference for the distance from the antenna to each edge. For the specific shape of the antenna, please refer to the physical photo.

14.2 Test Positions Consideration

Distance of Antennas to EUT edge/surface Test distance: 10mm						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
2G/3G/4G	<25mm	<25mm	<25mm	148mm	36mm	<25mm
WLAN & Bluetooth	<25mm	<25mm	<25mm	148mm	<25mm	58mm

Test Positions Test distance: 10mm						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
2G/3G/4G	Yes	Yes	Yes	No	No	Yes
WLAN & Bluetooth	Yes	Yes	Yes	No	Yes	No

Note:

1. Head/Body-worn/Hotspot mode SAR assessments are required.
2. Referring to KDB 941225 D06 v02r01, when the overall device length and width are $\geq 9\text{cm} * 5\text{cm}$, the test distance is 10mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.
3. Per KDB 447498 D04v01, for handsets the test separation distance is determined by the smallest distance between the outer surface of the device and the user, which is 0 mm for head SAR, 10 mm for hotspot SAR, and 10 mm for body-worn SAR.
4. Per KDB 648474 D04 v01r03, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR $> 1.2 \text{ W/kg}$

15 SAR Test Results Summary

15.1 Standalone Head SAR Data

> GSM Head SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
1	GSM850/Voice	Right Cheek	190	836.6	33.26	-1.02	33.5	0.589	1.057	0.623
	GSM850/Voice	Right Tilted	190	836.6	33.26	1.25	33.5	0.516	1.057	0.545
	GSM850/Voice	Left Cheek	190	836.6	33.26	0.32	33.5	0.474	1.057	0.501
	GSM850/Voice	Left Tilted	190	836.6	33.26	0.02	33.5	0.420	1.057	0.444
	PCS1900/Voice	Right Cheek	512	1850.2	30.07	0.94	30.5	0.506	1.104	0.559
2	PCS1900/Voice	Right Tilted	512	1850.2	30.07	-0.99	30.5	0.713	1.104	0.787
	PCS1900/Voice	Left Cheek	512	1850.2	30.07	0.06	30.5	0.380	1.104	0.420
	PCS1900/Voice	Left Tilted	512	1850.2	30.07	0.71	30.5	0.468	1.104	0.517
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g			

> WCDMA Head SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band II/RMC	Right Cheek	9400	1880	23.57	1.63	24.0	0.625	1.104	0.690
	Band II/RMC	Right Tilted	9400	1880	23.57	-1.94	24.0	0.932	1.104	1.029
	Band II/RMC	Left Cheek	9400	1880	23.57	0.18	24.0	0.482	1.104	0.532
	Band II/RMC	Left Tilted	9400	1880	23.57	1.45	24.0	0.610	1.104	0.673
	3	Band II/RMC	Right Tilted	9262	1852.4	23.45	-0.56	24.0	0.934	1.135
Band II/RMC		Right Tilted	9538	1907.6	23.57	1.30	24.0	0.909	1.104	1.004
Band II/RMC		Right Tilted	9262	1852.4	23.45	-0.25	24.0	0.930	1.135	1.056
4	Band IV/RMC	Right Cheek	1413	1732.6	23.75	0.48	24.0	0.284	1.059	0.301
	Band IV/RMC	Right Tilted	1413	1732.6	23.75	-3.41	24.0	0.435	1.059	0.461
	Band IV/RMC	Left Cheek	1413	1732.6	23.75	1.26	24.0	0.186	1.059	0.197
	Band IV/RMC	Left Tilted	1413	1732.6	23.75	-0.58	24.0	0.259	1.059	0.274
	5	Band V/RMC	Right Cheek	4183	836.6	23.81	0.37	24.0	0.522	1.045
Band V/RMC		Right Tilted	4183	836.6	23.81	-1.31	24.0	0.564	1.045	0.589
Band V/RMC		Left Cheek	4183	836.6	23.81	0.67	24.0	0.456	1.045	0.477
	Band V/RMC	Left Tilted	4183	836.6	23.81	1.46	24.0	0.478	1.045	0.500
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g			

> FDD-LTE Band 2(20MHz) QPSK Head SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)	
	Band2/1RB#49	Right Cheek	18900	1880	23.46	-0.06	24.0	0.523	1.132	0.592	
	Band2/1RB#49	Right Tilted	18900	1880	23.46	-1.71	24.0	0.891	1.132	1.009	
	Band2/1RB#49	Left Cheek	18900	1880	23.46	0.17	24.0	0.422	1.132	0.478	
	Band2/1RB#49	Left Tilted	18900	1880	23.46	0.49	24.0	0.674	1.132	0.763	
	Band2/50%RB#24	Right Cheek	19100	1900	22.43	1.54	22.5	0.498	1.016	0.506	
	Band2/50%RB#24	Right Tilted	19100	1900	22.43	1.73	22.5	0.774	1.016	0.786	
	Band2/50%RB#24	Left Cheek	19100	1900	22.43	1.44	22.5	0.372	1.016	0.378	
	Band2/50%RB#24	Left Tilted	19100	1900	22.43	1.46	22.5	0.631	1.016	0.641	
	Band2/100%RB#0	Right Tilted	18900	1880	22.41	-1.98	22.5	0.692	1.021	0.707	
	6	Band2/1RB#49	Right Tilted	18700	1860	23.37	0.32	24.0	0.895	1.156	1.035
		Band2/1RB#49	Right Tilted	19100	1900	23.34	-1.54	24.0	0.898	1.164	1.045
		Band2/1RB#49	Right Tilted	19100	1900	23.37	0.51	24.0	0.890	1.156	1.029
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g				

➤ FDD-LTE Band 5(10MHz) QPSK Head SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
7	Band5/1RB#24	Right Cheek	20525	836.5	23.72	1.37	24.0	0.513	1.067	0.547
	Band5/1RB#24	Right Tilted	20525	836.5	23.72	-3.15	24.0	0.586	1.067	0.625
	Band5/1RB#24	Left Cheek	20525	836.5	23.72	0.33	24.0	0.482	1.067	0.514
	Band5/1RB#24	Left Tilted	20525	836.5	23.72	1.86	24.0	0.534	1.067	0.570
	Band5/50%RB#12	Right Cheek	20600	844	22.70	1.47	23.0	0.442	1.072	0.474
	Band5/50%RB#12	Right Tilted	20600	844	22.70	1.97	23.0	0.498	1.072	0.534
	Band5/50%RB#12	Left Cheek	20600	844	22.70	0.86	23.0	0.406	1.072	0.435
	Band5/50%RB#12	Left Tilted	20600	844	22.70	0.56	23.0	0.458	1.072	0.491
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g			

➤ FDD-LTE Band 7(20MHz) QPSK Head SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
8	Band7/1RB#49	Right Cheek	21100	2535	22.19	1.09	22.5	0.506	1.074	0.543
	Band7/1RB#49	Right Tilted	21100	2535	22.19	-1.36	22.5	0.723	1.074	0.777
	Band7/1RB#49	Left Cheek	21100	2535	22.19	0.07	22.5	0.392	1.074	0.421
	Band7/1RB#49	Left Tilted	21100	2535	22.19	0.57	22.5	0.548	1.074	0.589
	Band7/50%RB#49	Right Cheek	21350	2560	21.09	0.14	21.5	0.413	1.099	0.454
	Band7/50%RB#49	Right Tilted	21350	2560	21.09	0.72	21.5	0.646	1.099	0.710
	Band7/50%RB#49	Left Cheek	21350	2560	21.09	0.67	21.5	0.322	1.099	0.354
	Band7/50%RB#49	Left Tilted	21350	2560	21.09	-1.86	21.5	0.468	1.099	0.514
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g			

➤ FDD-LTE Band 12(10MHz) QPSK Head SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
9	Band12/1RB#24	Right Cheek	23060	704	23.74	-0.21	24.0	0.296	1.062	0.314
	Band12/1RB#24	Right Tilted	23060	704	23.74	1.87	24.0	0.246	1.062	0.261
	Band12/1RB#24	Left Cheek	23060	704	23.74	-0.96	24.0	0.274	1.062	0.291
	Band12/1RB#24	Left Tilted	23060	704	23.74	1.59	24.0	0.223	1.062	0.237
	Band12/50%RB#12	Right Cheek	23060	704	22.69	1.65	23.0	0.268	1.074	0.288
	Band12/50%RB#12	Right Tilted	23060	704	22.69	0.49	23.0	0.196	1.074	0.211
	Band12/50%RB#12	Left Cheek	23060	704	22.69	-2.68	23.0	0.232	1.074	0.249
	Band12/50%RB#12	Left Tilted	23060	704	22.69	1.85	23.0	0.172	1.074	0.185
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g			

➤ TDD-LTE Band 41(20MHz) QPSK Head SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
10	Band41/1RB#49	Right Cheek	40640	2595	23.31	0.83	23.5	0.402	1.045	1.008	0.423
	Band41/1RB#49	Right Tilted	40640	2595	23.31	-1.15	23.5	0.575	1.045	1.008	0.606
	Band41/1RB#49	Left Cheek	40640	2595	23.31	1.76	23.5	0.334	1.045	1.008	0.352
	Band41/1RB#49	Left Tilted	40640	2595	23.31	0.72	23.5	0.452	1.045	1.008	0.476
	Band41/50%RB#0	Right Cheek	40640	2595	22.19	0.89	22.5	0.362	1.074	1.008	0.392
	Band41/50%RB#0	Right Tilted	40640	2595	22.19	0.95	22.5	0.522	1.074	1.008	0.565
	Band41/50%RB#0	Left Cheek	40640	2595	22.19	-1.33	22.5	0.282	1.074	1.008	0.305
	Band41/50%RB#0	Left Tilted	40640	2595	22.19	0.05	22.5	0.386	1.074	1.008	0.418
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g				

➤ FDD-LTE Band 66(20MHz) QPSK Head SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
11	Band66/1RB#49	Right Cheek	132072	1720	23.45	-1.59	23.5	0.742	1.012		0.751
	Band66/1RB#49	Right Tilted	132072	1720	23.45	-0.69	23.5	0.929	1.012		0.940
	Band66/1RB#49	Left Cheek	132072	1720	23.45	0.56	23.5	0.685	1.012		0.693
	Band66/1RB#49	Left Tilted	132072	1720	23.45	0.54	23.5	0.756	1.012		0.765
	Band66/50%RB#49	Right Cheek	132572	1770	22.37	1.68	22.5	0.622	1.03		0.641
	Band66/50%RB#49	Right Tilted	132572	1770	22.37	-1.48	22.5	0.774	1.03		0.797
	Band66/50%RB#49	Left Cheek	132572	1770	22.37	1.89	22.5	0.568	1.03		0.585
	Band66/50%RB#49	Left Tilted	132572	1770	22.37	0.55	22.5	0.692	1.03		0.713
	Band66/100%RB#0	Right Tilted	132572	1770	22.30	-1.48	22.5	0.704	1.047		0.737
	Band66/1RB#49	Right Tilted	132322	1745	23.35	-0.90	23.5	0.901	1.035		0.933
Band66/1RB#49	Right Tilted	132572	1770	23.23	-2.29	23.5	0.811	1.064		0.863	
Band66/1RB#49	Right Tilted	132072	1720	23.45	-0.82	23.5	0.922	1.012		0.933	
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g				

➤ WLAN 2.4 GHz Head SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
12	2.4GHz/802.11b	Right Cheek	6	2437	16.68	0.29	17.0	0.182	1.076	1.000	0.196
	2.4GHz/802.11b	Right Tilted	6	2437	16.68	-2.93	17.0	0.246	1.076	1.000	0.265
	2.4GHz/802.11b	Left Cheek	6	2437	16.68	-0.91	17.0	0.145	1.076	1.000	0.156
	2.4GHz/802.11b	Left Tilted	6	2437	16.68	1.18	17.0	0.190	1.076	1.000	0.204
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g				

➤ WLAN 5.2 GHz Head SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
13	5.2GHz/802.11a	Right Cheek	36	5180	13.69	1.95	14.0	0.206	1.074	1.000	0.221
	5.2GHz/802.11a	Right Tilted	36	5180	13.69	1.57	14.0	0.258	1.074	1.000	0.277
	5.2GHz/802.11a	Left Cheek	36	5180	13.69	0.82	14.0	0.274	1.074	1.000	0.294
	5.2GHz/802.11a	Left Tilted	36	5180	13.69	-2.23	14.0	0.336	1.074	1.000	0.361
	ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g			

> WLAN 5.8GHz Head SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	5.8GHz/802.11a	Right Cheek	165	5825	12.77	-1.98	13.0	0.264	1.054	1.000	0.278
	5.8GHz/802.11a	Right Tilted	165	5825	12.77	1.45	13.0	0.288	1.054	1.000	0.304
	5.8GHz/802.11a	Left Cheek	165	5825	12.77	0.29	13.0	0.302	1.054	1.000	0.318
14	5.8GHz/802.11a	Left Tilted	165	5825	12.77	-0.67	13.0	0.353	1.054	1.000	0.372
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g				

> Bluetooth Head SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	BT/GFSK	Right Cheek	39	2441	4.10	0.82	4.5	0.014	1.096	1.000	0.015
	BT/GFSK	Right Tilted	39	2441	4.10	0.16	4.5	0.013	1.096	1.000	0.014
15	BT/GFSK	Left Cheek	39	2441	4.10	0.27	4.5	0.018	1.096	1.000	0.020
	BT/GFSK	Left Tilted	39	2441	4.10	1.48	4.5	0.017	1.096	1.000	0.019
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g				

Note:

- Per KDB 447498 D04v01, for each exposure position, if the highest output power channel Reported SAR ≤ 0.8 W/kg, other channels SAR testing is not necessary.
- Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is ≥ 0.8 W/kg.
- Per KDB 941225 D05v02r05, 100% RB allocation SAR measurement is not required when the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg.
- Per KDB 248227 D01v02r02, for 802.11b DSSS, when the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required in that exposure configuration.
- Per KDB 248227 D01v02r02, OFDM SAR is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg. Cuz the maximum output power specified for OFDM and DSSS are 28.18mW(14.5dBm) and 50.12mW(17.0dBm), the scaled SAR would be $0.265 \times (28.18/50.12) = 0.149$ W/Kg < 1.2 W/kg, therefore, SAR is not required for OFDM.
- According to KDB 865664 D02v01r02, SAR plot is required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination.

15.2 Standalone Body SAR

➤ GSM Body SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	GPRS850/2 slots	Front	190	836.6	32.23	1.48	32.5	0.192	1.064	0.204
16	GPRS850/2 slots	Back	190	836.6	32.23	-1.52	32.5	0.317	1.064	0.337
	GPRS1900/4 slots	Front	661	1880	26.19	0.89	26.5	0.202	1.074	0.217
17	GPRS1900/4 slots	Back	661	1880	26.19	-2.61	26.5	0.319	1.074	0.343
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g			

➤ WCDMA Body SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band II/RMC	Front	9400	1880	23.57	3.85	24.0	0.201	1.104	0.222
18	Band II/RMC	Back	9400	1880	23.57	-0.72	24.0	0.433	1.104	0.478
	Band IV/RMC	Front	1413	1732.6	23.75	1.78	24.0	0.113	1.059	0.120
19	Band IV/RMC	Back	1413	1732.6	23.75	0.03	24.0	0.197	1.059	0.209
	Band V/RMC	Front	4183	836.6	23.81	-4.95	24.0	0.081	1.045	0.085
20	Band V/RMC	Back	4183	836.6	23.81	2.40	24.0	0.178	1.045	0.186
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g			

➤ FDD-LTE Band 2(20MHz) QPSK Body SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band2/1RB#49	Front	18900	1880	23.46	2.59	24.0	0.233	1.132	0.264
21	Band2/1RB#49	Back	18900	1880	23.46	-4.09	24.0	0.340	1.132	0.385
	Band2/50%RB#24	Front	19100	1900	22.43	1.14	22.5	0.191	1.016	0.194
	Band2/50%RB#24	Back	19100	1900	22.43	1.94	22.5	0.277	1.016	0.281
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g			

➤ FDD-LTE Band 5(10MHz) QPSK Body SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band5/1RB#24	Front	20525	836.5	23.72	0.09	24.0	0.071	1.067	0.076
22	Band5/1RB#24	Back	20525	836.5	23.72	1.82	24.0	0.178	1.067	0.190
	Band5/50%RB#12	Front	20600	844	22.70	0.29	23.0	0.053	1.072	0.057
	Band5/50%RB#12	Back	20600	844	22.70	1.92	23.0	0.134	1.072	0.144
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g			

➤ FDD-LTE Band 7(20MHz) QPSK Body SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)	
	Band7/1RB#49	Front	21100	2535	22.19	0.83	22.5	0.242	1.074	0.260	
23	Band7/1RB#49	Back	21100	2535	22.19	-2.67	22.5	0.440	1.074	0.473	
	Band7/50%RB#49	Front	21350	2560	21.09	0.41	21.5	0.204	1.099	0.224	
	Band7/50%RB#49	Back	21350	2560	21.09	0.84	21.5	0.348	1.099	0.382	
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g				

➤ FDD-LTE Band 12(10MHz) QPSK Body SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)	
	Band12/1RB#24	Front	23060	704	23.74	-0.67	24.0	0.077	1.062	0.082	
24	Band12/1RB#24	Back	23060	704	23.74	-0.09	24.0	0.095	1.062	0.101	
	Band12/50%RB#12	Front	23060	704	22.69	-0.23	23.0	0.062	1.074	0.067	
	Band12/50%RB#12	Back	23060	704	22.69	-0.88	23.0	0.075	1.074	0.081	
ANSI / IEEE C912.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g				

➤ TDD-LTE Band 41(20MHz) QPSK Body SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	Band41/1RB#49	Front	40640	2595	23.31	0.27	23.5	0.216	1.045	1.008	0.228
25	Band41/1RB#49	Back	40640	2595	23.31	1.93	23.5	0.570	1.045	1.008	0.600
	Band41/50%RB#0	Front	40640	2595	22.19	-0.87	22.5	0.188	1.074	1.008	0.204
	Band41/50%RB#0	Back	40640	2595	22.19	1.16	22.5	0.486	1.074	1.008	0.526
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g				

➤ FDD-LTE Band 66(20MHz) QPSK Body SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)	
	Band66/1RB#49	Front	132072	1720	23.45	0.57	23.5	0.278	1.012	0.281	
26	Band66/1RB#49	Back	132072	1720	23.45	-0.73	23.5	0.420	1.012	0.425	
	Band66/50%RB#49	Front	132572	1770	22.37	0.88	22.50	0.243	1.030	0.250	
	Band66/50%RB#49	Back	132572	1770	22.37	1.57	22.50	0.376	1.030	0.387	
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g				

➤ WLAN 2.4 GHz Body SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	2.4GHz/802.11b	Front	6	2437	16.68	-3.74	17.0	0.031	1.076	1.000	0.033
27	2.4GHz/802.11b	Back	6	2437	16.68	-4.89	17.0	0.068	1.076	1.000	0.073
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g				

> WLAN 5.2 GHz Body SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	5.2GHz/802.11a	Front	36	5180	13.69	1.54	14.0	0.098	1.074	1.000	0.105
28	5.2GHz/802.11a	Back	36	5180	13.69	0.18	14.0	0.197	1.074	1.000	0.212
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g				

> WLAN 5.8 GHz Body SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	5.8GHz/802.11a	Front	165	5825	12.77	1.13	13.0	0.074	1.054	1.000	0.078
29	5.8GHz/802.11a	Back	165	5825	12.77	-0.51	13.0	0.162	1.054	1.000	0.171
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g				

> Bluetooth Body SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	BT/GFSK	Front	39	2441	4.10	-0.04	4.5	0.008	1.096	1.000	0.009
30	BT/GFSK	Back	39	2441	4.10	-3.64	4.5	0.017	1.096	1.000	0.019
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g				

Note:

1. Body-worn SAR testing was performed at 10mm separation, and this distance is determined by the handset manufacturer that there will be body-worn accessories that users may acquire at the time of equipment certification, to enable users to purchase aftermarket body-worn accessories with the required minimum separation.
2. Per KDB 941225 D06v02r01, when the same wireless modes and device transmission configurations are required for testing body-worn accessories and hotspot mode, it is not necessary to test body-worn accessory SAR for the same device orientation if the test separation distance for hotspot mode is more conservative than that used for body-worn accessories.
3. Body-worn exposure conditions are intended to voice call operations, therefore GSM voice call is selected to be tested.
4. Per KDB 648474 D04v01r03, when the *Reported* SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.
5. The WLAN SAR perform the front and back position, due considered the simultaneous SAR for body-worn.
6. Per KDB 447498 D04v01, for each exposure position, if the highest output channel Reported SAR ≤ 0.8 W/kg, other channels SAR testing is not necessary.
7. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is ≥ 0.8 W/kg.
8. Per KDB 941225 D05v02r05, 100% RB allocation SAR measurement is not required when the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg.
9. According to KDB 865664 D02v01r02, SAR plot is required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination.
10. Highlight part of test data means repeated test.

15.3 Body SAR in Hotspot Mode

➤ GSM Body SAR in Hotspot mode

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	GPRS850/2 slots	Front	190	836.6	32.23	1.48	32.5	0.192	1.064	0.204
16	GPRS850/2 slots	Back	190	836.6	32.23	-1.52	32.5	0.317	1.064	0.337
	GPRS850/2 slots	Left	190	836.6	32.23	0.60	32.5	0.125	1.064	0.133
	GPRS850/2 slots	Top	190	836.6	32.23	0.73	32.5	0.198	1.064	0.211
	GPRS1900/4 slots	Front	661	1880	26.19	0.89	26.5	0.202	1.074	0.217
	GPRS1900/4 slots	Back	661	1880	26.19	-2.61	26.5	0.319	1.074	0.343
	GPRS1900/4 slots	Left	661	1880	26.19	1.55	26.5	0.104	1.074	0.112
31	GPRS1900/4 slots	Top	661	1880	26.19	-2.26	26.5	0.372	1.074	0.400
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g			

➤ WCDMA Body SAR in Hotspot mode

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band II/RMC	Front	9400	1880	23.57	3.85	24.0	0.201	1.104	0.222
	Band II/RMC	Back	9400	1880	23.57	-0.72	24.0	0.433	1.104	0.478
	Band II/RMC	Left	9400	1880	23.57	1.52	24.0	0.102	1.104	0.113
32	Band II/RMC	Top	9400	1880	23.57	0.50	24.0	0.577	1.104	0.637
	Band IV/RMC	Front	1413	1732.6	23.75	1.78	24.0	0.113	1.059	0.120
	Band IV/RMC	Back	1413	1732.6	23.75	0.03	24.0	0.197	1.059	0.209
	Band IV/RMC	Left	1413	1732.6	23.75	-1.16	24.0	0.060	1.059	0.064
33	Band IV/RMC	Top	1413	1732.6	23.75	-0.64	24.0	0.219	1.059	0.232
	Band V/RMC	Front	4183	836.6	23.81	-4.95	24.0	0.081	1.045	0.085
20	Band V/RMC	Back	4183	836.6	23.81	2.40	24.0	0.178	1.045	0.186
	Band V/RMC	Left	4183	836.6	23.81	0.37	24.0	0.044	1.045	0.046
	Band V/RMC	Top	4183	836.6	23.81	0.07	24.0	0.153	1.045	0.160
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g			

➤ FDD-LTE Band 2(20MHz) QPSK Body SAR in Hotspot mode

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band2/1RB#49	Front	18900	1880	23.46	2.59	24.0	0.233	1.132	0.264
	Band2/1RB#49	Back	18900	1880	23.46	-4.09	24.0	0.340	1.132	0.385
	Band2/1RB#49	Left	18900	1880	23.46	0.52	24.0	0.114	1.132	0.129
34	Band2/1RB#49	Top	18900	1880	23.46	-0.79	24.0	0.538	1.132	0.609
	Band2/50%RB#24	Front	19100	1900	22.43	1.14	22.5	0.191	1.016	0.194
	Band2/50%RB#24	Back	19100	1900	22.43	1.94	22.5	0.277	1.016	0.281
	Band2/50%RB#24	Left	19100	1900	22.43	0.45	22.5	0.093	1.016	0.094
	Band2/50%RB#24	Top	19100	1900	22.43	0.53	22.5	0.417	1.016	0.424
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g			

➤ FDD-LTE Band 5(10MHz) QPSK Body SAR in Hotspot mode

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band5/1RB#24	Front	20525	836.5	23.72	0.09	24.0	0.071	1.067	0.076
22	Band5/1RB#24	Back	20525	836.5	23.72	1.82	24.0	0.178	1.067	0.190
	Band5/1RB#24	Left	20525	836.5	23.72	0.35	24.0	0.038	1.067	0.041
	Band5/1RB#24	Top	20525	836.5	23.72	-0.88	24.0	0.132	1.067	0.141
	Band5/50%RB#12	Front	20600	844	22.70	0.29	23.0	0.053	1.072	0.057
	Band5/50%RB#12	Back	20600	844	22.70	1.92	23.0	0.134	1.072	0.144
	Band5/50%RB#12	Left	20600	844	22.70	1.07	23.0	0.029	1.072	0.031
	Band5/50%RB#12	Top	20600	844	22.70	1.53	23.0	0.103	1.072	0.110
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g			

➤ FDD-LTE Band 7(20MHz) QPSK Body SAR in Hotspot mode

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band7/1RB#49	Front	21100	2535	22.19	0.83	22.5	0.242	1.074	0.260
23	Band7/1RB#49	Back	21100	2535	22.19	-2.67	22.5	0.440	1.074	0.473
	Band7/1RB#49	Left	21100	2535	22.19	1.59	22.5	0.117	1.074	0.126
	Band7/1RB#49	Top	21100	2535	22.19	0.62	22.5	0.300	1.074	0.322
	Band7/50%RB#49	Front	21350	2560	21.09	0.41	21.5	0.204	1.099	0.224
	Band7/50%RB#49	Back	21350	2560	21.09	0.84	21.5	0.348	1.099	0.382
	Band7/50%RB#49	Left	21350	2560	21.09	-1.07	21.5	0.101	1.099	0.111
	Band7/50%RB#49	Top	21350	2560	21.09	0.94	21.5	0.246	1.099	0.270
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g			

➤ FDD-LTE Band 12(10MHz) QPSK Body SAR in Hotspot mode

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band12/1RB#24	Front	23060	704	23.74	-0.67	24.0	0.077	1.062	0.082
24	Band12/1RB#24	Back	23060	704	23.74	-0.09	24.0	0.095	1.062	0.101
	Band12/1RB#24	Left	23060	704	23.74	0.92	24.0	0.023	1.062	0.024
	Band12/1RB#24	Top	23060	704	23.74	-0.82	24.0	0.046	1.062	0.049
	Band12/50%RB#12	Front	23060	704	22.69	-0.23	23.0	0.062	1.074	0.067
	Band12/50%RB#12	Back	23060	704	22.69	-0.88	23.0	0.075	1.074	0.081
	Band12/50%RB#12	Left	23060	704	22.69	1.57	23.0	0.018	1.074	0.019
	Band12/50%RB#12	Top	23060	704	22.69	1.73	23.0	0.036	1.074	0.039
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g			

➤ TDD-LTE Band 41(20MHz) QPSK Body SAR in Hotspot mode

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	Band41/1RB#49	Front	40640	2595	23.31	0.27	23.5	0.216	1.045	1.008	0.228
25	Band41/1RB#49	Back	40640	2595	23.31	1.93	23.5	0.570	1.045	1.008	0.600
	Band41/1RB#49	Left	40640	2595	23.31	1.55	23.5	0.098	1.045	1.008	0.103
	Band41/1RB#49	Top	40640	2595	23.31	0.44	23.5	0.296	1.045	1.008	0.312
	Band41/50%RB#0	Front	40640	2595	22.19	-0.87	22.5	0.188	1.074	1.008	0.204
	Band41/50%RB#0	Back	40640	2595	22.19	1.16	22.5	0.486	1.074	1.008	0.526
	Band41/50%RB#0	Left	40640	2595	22.19	0.75	22.5	0.086	1.074	1.008	0.093
	Band41/50%RB#0	Top	40640	2595	22.19	1.28	22.5	0.273	1.074	1.008	0.296
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g				

➤ FDD-LTE Band 66(20MHz) QPSK Body SAR in Hotspot mode

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	Band66/1RB#49	Front	132072	1720	23.45	0.57	23.5	0.278	1.012	1.012	0.281
	Band66/1RB#49	Back	132072	1720	23.45	-0.73	23.5	0.420	1.012	1.012	0.425
	Band66/1RB#49	Left	132072	1720	23.45	1.85	23.5	0.122	1.012	1.012	0.123
35	Band66/1RB#49	Top	132072	1720	23.45	0.78	23.5	0.518	1.012	1.012	0.524
	Band66/50%RB#49	Front	132572	1770	22.37	0.88	22.50	0.243	1.030	1.030	0.250
	Band66/50%RB#49	Back	132572	1770	22.37	1.57	22.50	0.376	1.030	1.030	0.387
	Band66/50%RB#49	Left	132572	1770	22.37	0.02	22.50	0.102	1.030	1.030	0.105
	Band66/50%RB#49	Top	132572	1770	22.37	0.74	22.50	0.447	1.030	1.030	0.460
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g				

➤ WLAN 2.4 GHz Body SAR in Hotspot mode

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	2.4GHz/802.11b	Front	6	2437	16.68	-3.74	17.0	0.031	1.076	1.000	0.033
27	2.4GHz/802.11b	Back	6	2437	16.68	-4.89	17.0	0.068	1.076	1.000	0.073
	2.4GHz/802.11b	Right	6	2437	16.68	-1.79	17.0	0.018	1.076	1.000	0.019
	2.4GHz/802.11b	Top	6	2437	16.68	0.23	17.0	0.060	1.076	1.000	0.065
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g				

➤ WLAN 5.2 GHz Body SAR in Hotspot mode

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	5.2GHz/802.11a	Front	36	5180	13.69	1.54	14.0	0.098	1.074	1.000	0.105
28	5.2GHz/802.11a	Back	36	5180	13.69	0.18	14.0	0.197	1.074	1.000	0.212
	5.2GHz/802.11a	Right	36	5180	13.69	-0.13	14.0	0.058	1.074	1.000	0.062
	5.2GHz/802.11a	Top	36	5180	13.69	0.99	14.0	0.162	1.074	1.000	0.174
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g				

> WLAN 5.8 GHz Body SAR in Hotspot mode

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	5.8GHz/802.11a	Front	165	5825	12.77	1.13	13.0	0.074	1.054	1.000	0.078
29	5.8GHz/802.11a	Back	165	5825	12.77	-0.51	13.0	0.162	1.054	1.000	0.171
	5.8GHz/802.11a	Right	165	5825	12.77	1.07	13.0	0.044	1.054	1.000	0.046
	5.8GHz/802.11a	Top	165	5825	12.77	-2.08	13.0	0.143	1.054	1.000	0.151
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g				

> Bluetooth Body SAR in Hotspot mode

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	BT/GFSK	Front	39	2441	4.10	-0.04	4.5	0.008	1.096	1.000	0.009
30	BT/GFSK	Back	39	2441	4.10	-3.64	4.5	0.017	1.096	1.000	0.019
	BT/GFSK	Right	39	2441	4.10	1.21	4.5	0.005	1.096	1.000	0.005
	BT/GFSK	Top	39	2441	4.10	3.34	4.5	0.016	1.096	1.000	0.018
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g				

Note:

- Per KDB 447498 D04v01, for each exposure position, if the highest output channel Reported SAR ≤ 0.8 W/kg, other channels SAR testing is not necessary.
- Additional WLAN SAR testing was performed for simultaneous transmission analysis.
- For Hotspot SAR testing, per KDB 941225 D06v02r01, for EUT dimension ≥ 9 cm*5cm, the test distance is 10mm. SAR must be measured for all surfaces and sides with a transmitting antenna located within 2.5cm from that surface or edge.
- Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA output power is < 0.25 dB higher than RMC 12.2kbps, or Reported SAR with RMC 12.2kbps setting is ≤ 1.2 W/kg, HSDPA SAR evaluation can be excluded.
- Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is ≥ 0.8 W/kg.
- Per KDB 648474 D04v01r03, when the Reported SAR for a body-worn accessory measured without a headset connected to the handset is > 1.2 W/kg, SAR testing with a headset connected to the handset is required.
- Per KDB 941225 D05v02r05, 100% RB allocation SAR measurement is not required when the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel.
- According to KDB 865664 D02v01r02, SAR plot is required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination.
- Highlight part of test data means repeated test.

15.4 Repeated SAR measurement

Band/ Mode	Test Position	CH.	Freq. (MHz)	Measured SAR (W/kg)				
				Original	1 st Repeated		2 nd Repeated	
					Value	Ratio	Value	Ratio
Band II/RMC	Right Tilted	9262	1852.4	0.934	0.930	1	/	/
Band2/1RB#49	Right Tilted	19100	1900	0.898	0.890	1.01	/	/
Band66/1RB#49	Right Tilted	132072	1720	0.929	0.922	1.01	/	/
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population				1.6 W/kg (mW/g) Averaged over 1g				

Note:

- Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg
- Per KDB 865664 D01v01r04, if the ratio of *original* and *repeated* is ≤ 1.2 and the measured SAR < 1.45 W/kg, only one repeated measurement is required.

15.5 Multi-Band Simultaneous Transmission Considerations

➤ **Simultaneous Transmission Capabilities**

According to FCC KDB Publication 447498 D04v01, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds. Possible transmission paths for the EUT are shown in below Figure and are color-coded to indicate communication modes which share the same path. Modes which share the same transmission path cannot transmit simultaneously with one another.



Fig.15.1 Simultaneous Transmission Paths

➤ **Multi-Band simultaneous Transmission Consideration**

Simultaneous Transmission Consideration	Position	Applicable Combination
	Head	
		WWAN (Voice) + Bluetooth
Body		WWAN (Voice) + WLAN 2.4 GHz/5.2GHz/5.8GHz
		WWAN (Voice) + Bluetooth
Hotspot		WWAN (Data) + WLAN 2.4 GHz/5.2GHz/5.8GHz
		WWAN (Data) + Bluetooth

Note:

1. WLAN 2.4GHz Band, WLAN 5.2GHz Band, WLAN 5.8GHz Band and Bluetooth share the same antenna, and cannot transmit simultaneously.
2. GSM/WCDMA/LTE shares the same antenna, and cannot transmit simultaneously.
3. The Report SAR summation is calculated based on the same configuration and test position.
4. Per KDB 447498 D04v01, simultaneous transmission SAR is compliant if,
 - i. Scalar SAR summation < 1.6 W/kg.
 - ii. $SPLSR = (SAR_1 + SAR_2)^{1.5} / (min. \text{ separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$, where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated peak SAR locations in the zoom scan. If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - iii. Simultaneously transmission SAR measurement, and the Reported multi-band SAR < 1.6 W/kg

15.6 SAR Simultaneous Transmission Analysis

➤ **Simultaneous Transmission**

Position		Standalone SAR(W/kg)				Σ SAR _{1g} (W/kg)		
		1	2	3	4	1+2	1+3	1+4
		WWAN	2.4 GWLAN	5G WLAN	BT			
Head	Right Cheek	0.751	0.196	0.278	0.015	0.947	1.029	0.766
	Right Tilted	1.060	0.265	0.304	0.014	1.325	1.364	1.074
	Left Cheek	0.693	0.156	0.318	0.020	0.849	1.011	0.713
	Left Tilted	0.765	0.204	0.372	0.019	0.969	1.137	0.784
Body-worn	Front	0.281	0.033	0.105	0.009	0.314	0.386	0.290
	Back	0.600	0.073	0.171	0.019	0.673	0.771	0.619
Hotspot	Front	0.281	0.033	0.105	0.009	0.314	0.386	0.290
	Back	0.600	0.073	0.171	0.019	0.673	0.771	0.619
	Left	0.133	0.000	0.000	0.000	0.133	0.133	0.133
	Right	0.000	0.019	0.062	0.005	0.019	0.062	0.005
	Top	0.637	0.065	0.174	0.018	0.702	0.811	0.655
	Bottom	0.000	0.000	0.000	0.000	0.000	0.000	0.000

➤ **Simultaneous Transmission Conclusion**

The above numerical summed SAR results for all the case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D04v01.

15.7 Measurement Uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

16 Reference

- [1]. FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”
- [2]. ANSI/IEEE Std. C95.1-1992, “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz”, September 1992
- [3]. IEEE Std. 1528-2013, “Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, September 2013
- [4]. OpenSAR V5 Software User Manual
- [5]. FCC KDB 248227 D01 v02r02, “SAR GUIDANCE FOR IEEE 802.11 (Wi-Fi) TRANSMITTERS”, October 2015
- [6]. FCC KDB 447498 D04 v01, “RF EXPOSURE PROCEDURES AND EQUIPMENT AUTHORIZATION POLICIES FOR MOBILE AND PORTABLE DEVICES”, November 2021
- [7]. FCC KDB 648474 D04 v01r03, “SAR EVALUATION CONSIDERATIONS FOR WIRELESS HANDSETS”, October 2015
- [8]. FCC KDB 941225 D01 v03r01, “3G SAR MEASUREMENT PROCEDURES”, October 2015
- [9]. FCC KDB 941225 D05 v02r05, “SAR EVALUATION CONSIDERATIONS FOR LTE DEVICES”, Dec 2015
- [10]. FCC KDB 941225 D06 v02r01, “SAR EVALUATION PROCEDURES FOR PORTABLE DEVICES WITH WIRELESS ROUTER CAPABILITIES”, October 2015
- [11]. FCC KDB 865664 D01 v01r04, “SAR MEASUREMENT REQUIREMENTS FOR 100 MHz TO 6 GHz”, August 2015

Appendix A: Plots of SAR System Check

System check at 750 MHz

Date of measurement: 28/10/2022


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	1.70
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW750
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	750.000000
Relative permittivity (real part)	41.760000
Conductivity (S/m)	0.870000

C. SAR Surface and Volume

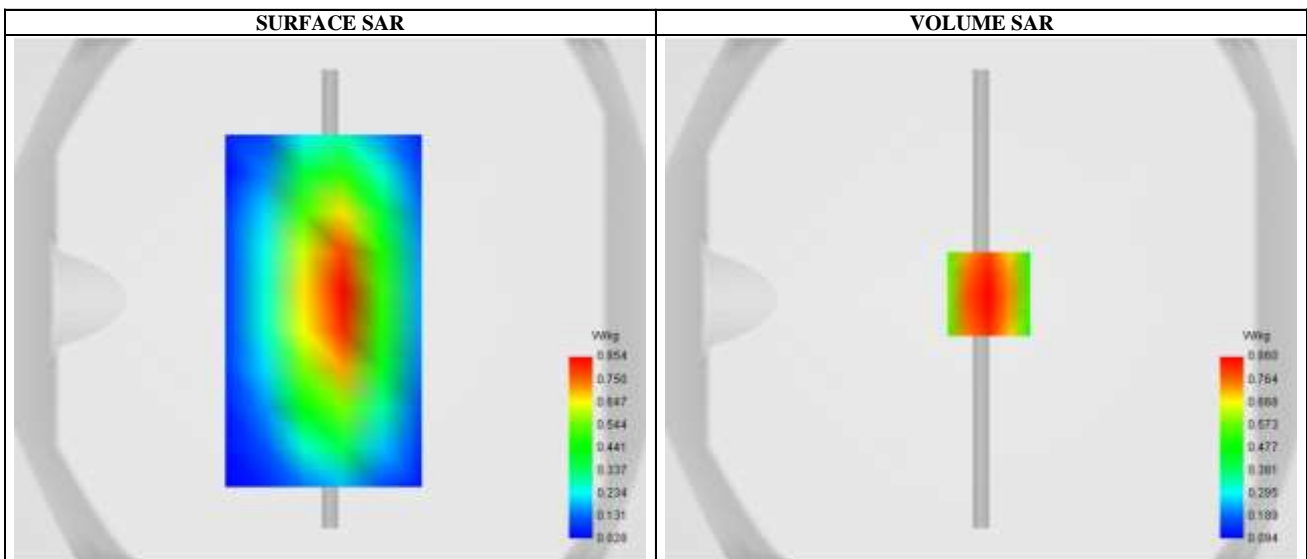


Maximum location: X=3.00, Y=2.00 ; SAR Peak: 1.13 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.547944
SAR 1g (W/Kg)	0.846170
Variation (%)	1.650000

E. Z Axis Scan

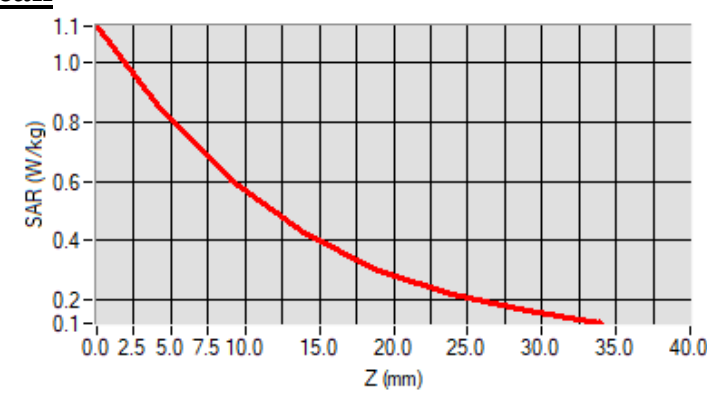

System check at 835 MHz

Date of measurement: 28/10/2022


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	1.73
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW835
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	835.000000
Relative permittivity (real part)	41.330000
Conductivity (S/m)	0.892245

C. SAR Surface and Volume

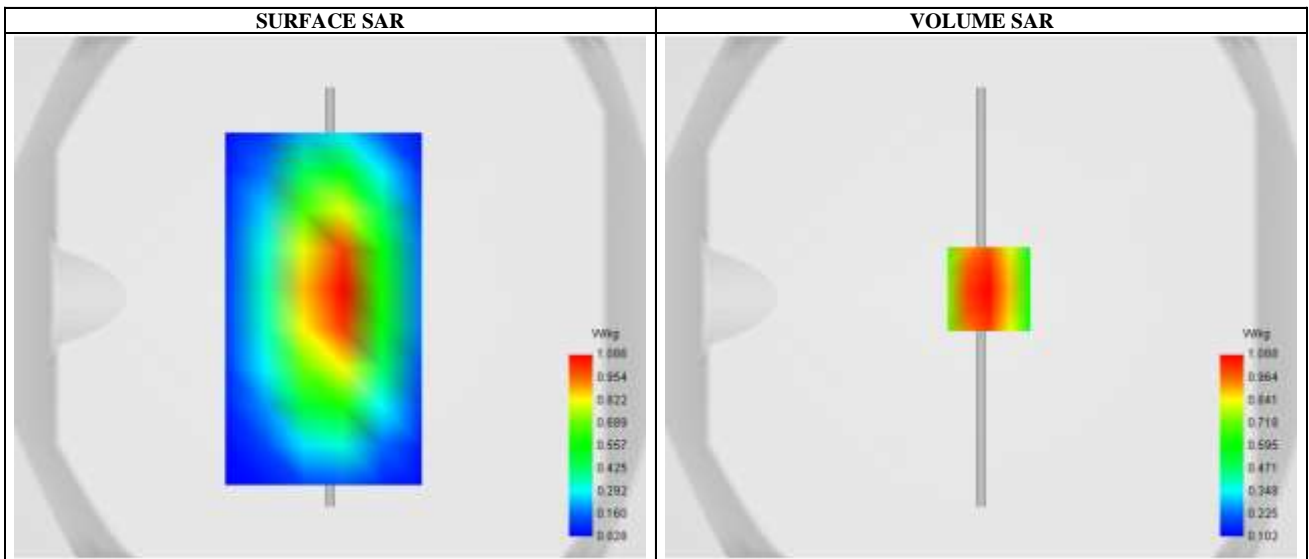


Maximum location: X=3.00, Y=3.00 ; SAR Peak: 1.50 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.588136
SAR 1g (W/Kg)	0.937213
Variation (%)	1.360000

E. Z Axis Scan

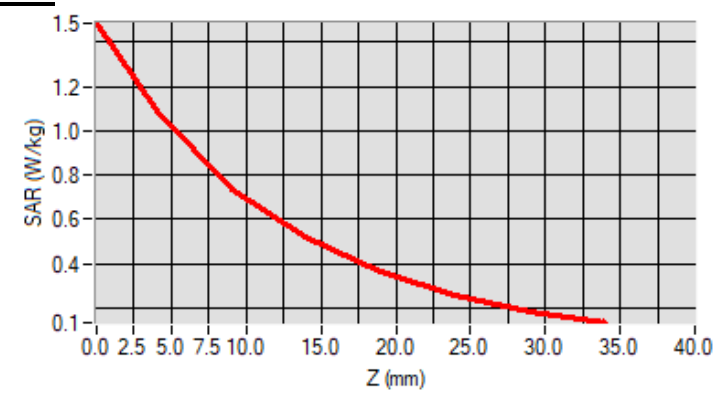

System check at 1750 MHz

Date of measurement: 2/11/2022


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	2.05
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW1750
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1750.000000
Relative permittivity (real part)	41.203316
Conductivity (S/m)	1.381452

C. SAR Surface and Volume

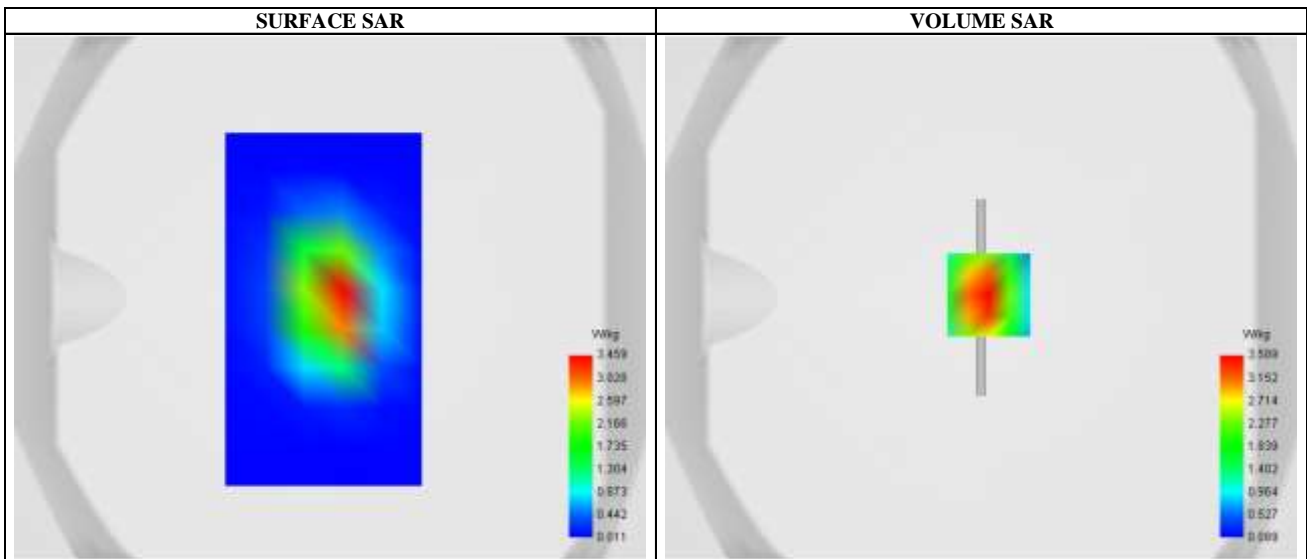


Maximum location: X=3.00, Y=1.00 ; SAR Peak: 5.69 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	1.926000
SAR 1g (W/Kg)	3.711241
Variation (%)	0.110000

E. Z Axis Scan

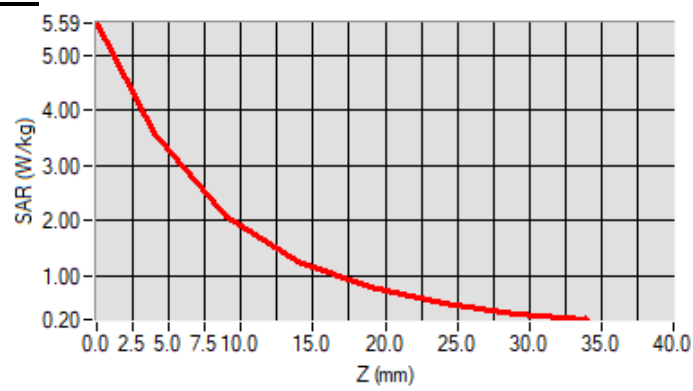

System check at 1900 MHz

Date of measurement: 2/11/2022


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	2.00
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW1900
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1900.000000
Relative permittivity (real part)	40.780000
Conductivity (S/m)	1.433267

C. SAR Surface and Volume

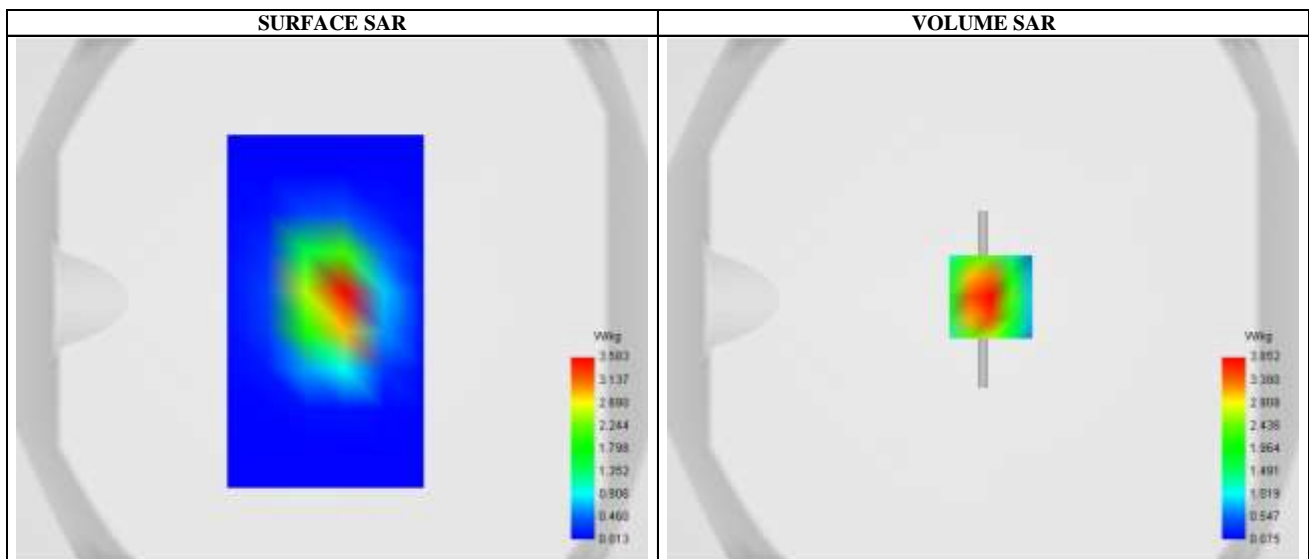


Maximum location: X=3.00, Y=1.00 ; SAR Peak: 6.27 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	2.100431
SAR 1g (W/Kg)	3.980364
Variation (%)	-0.030000

E. Z Axis Scan

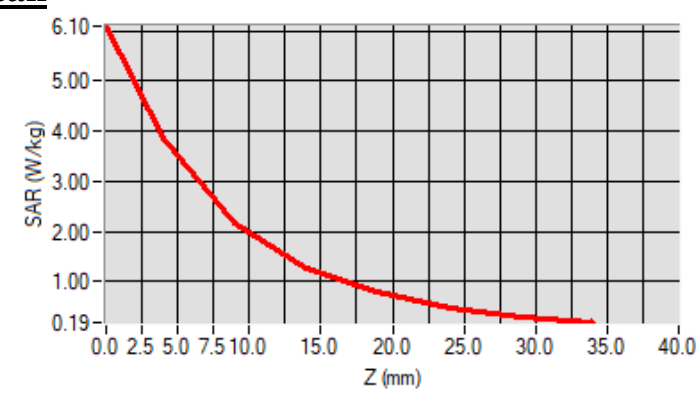

System check at 2450 MHz

Date of measurement: 5/11/2022


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	2.46
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW2450
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	2450.000000
Relative permittivity (real part)	38.890000
Conductivity (S/m)	1.772051

C. SAR Surface and Volume

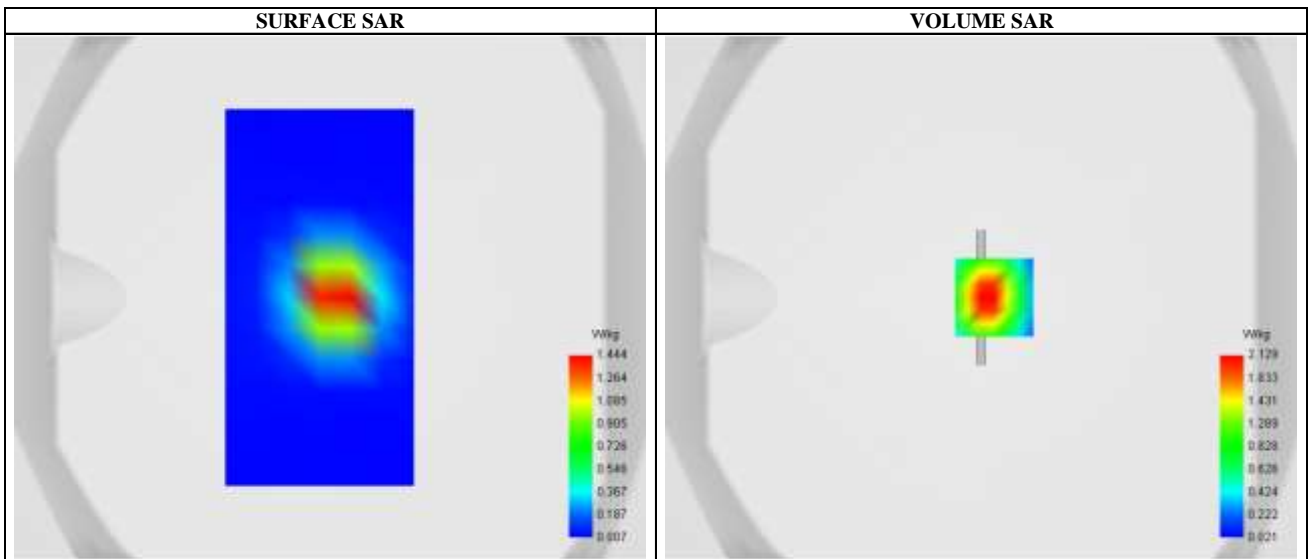


Maximum location: X=5.00, Y=0.00 ; SAR Peak: 2.67 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.932247
SAR 1g (W/Kg)	2.026002
Variation (%)	0.160000

E. Z Axis Scan

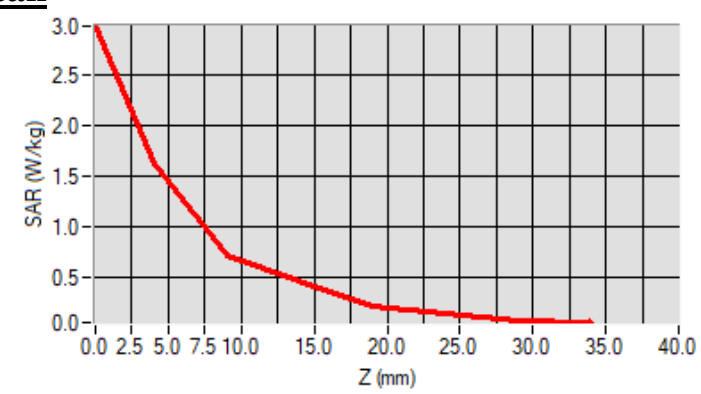

System check at 2600 MHz

Date of measurement: 5/11/2022


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	2.27
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW2600
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	2600.000000
Relative permittivity (real part)	38.780000
Conductivity (S/m)	1.950247

C. SAR Surface and Volume

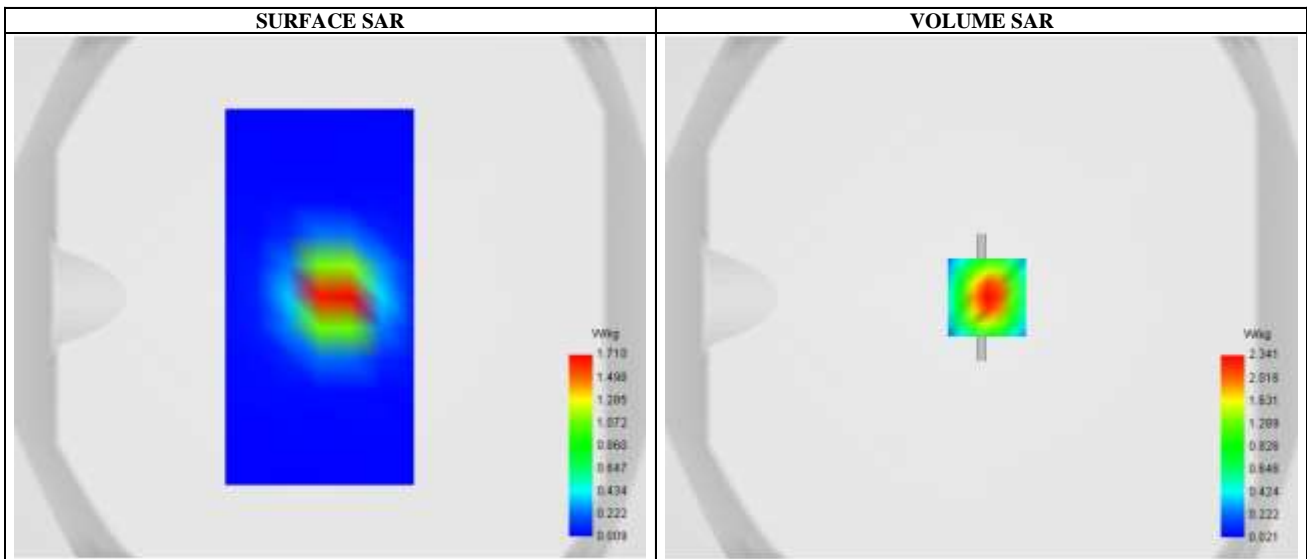


Maximum location: X=3.00, Y=0.00 ; SAR Peak: 3.24 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.945113
SAR 1g (W/Kg)	2.112121
Variation (%)	0.140000

E. Z Axis Scan

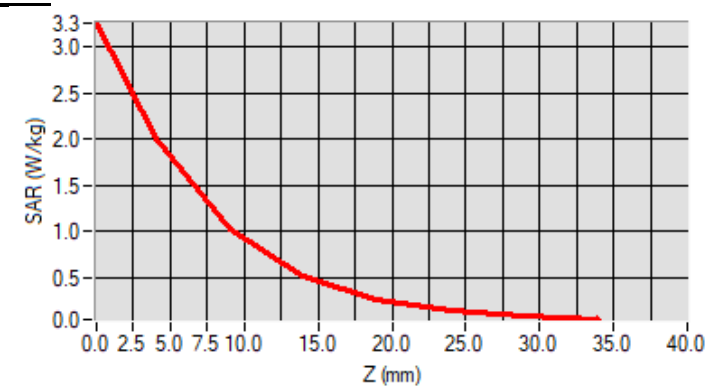

System check at 5200 MHz

Date of measurement: 8/11/2022


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	1.71
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW5200
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	5200.000000
Relative permittivity (real part)	35.250000
Conductivity (S/m)	4.570488

C. SAR Surface and Volume

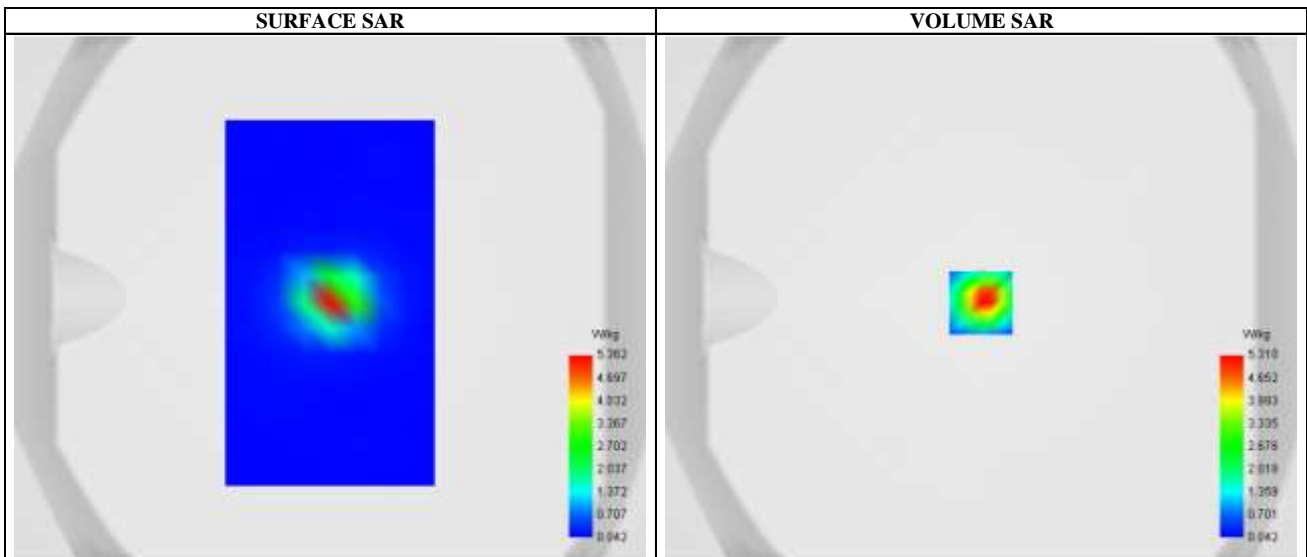


Maximum location: X=0.00, Y=-2.00 ; SAR Peak: 9.16 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.899123
SAR 1g (W/Kg)	2.987124
Variation (%)	0.340000

E. Z Axis Scan

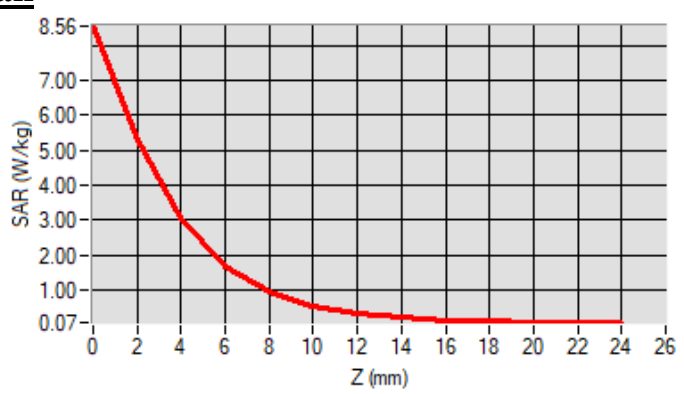

System check at 5800 MHz

Date of measurement: 8/11/2022


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	1.94
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW5800
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	5800.000000
Relative permittivity (real part)	34.663894
Conductivity (S/m)	5.161424

C. SAR Surface and Volume

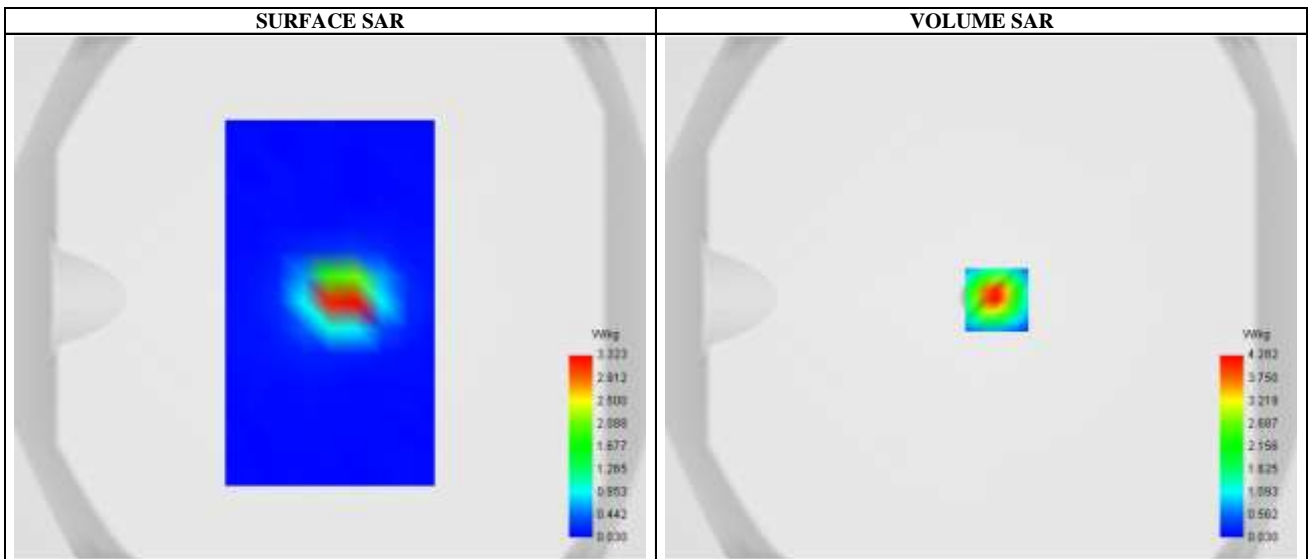


Maximum location: X=6.00, Y=-1.00 ; SAR Peak: 7.66 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.912041
SAR 1g (W/Kg)	3.012395
Variation (%)	2.770000

E. Z Axis Scan

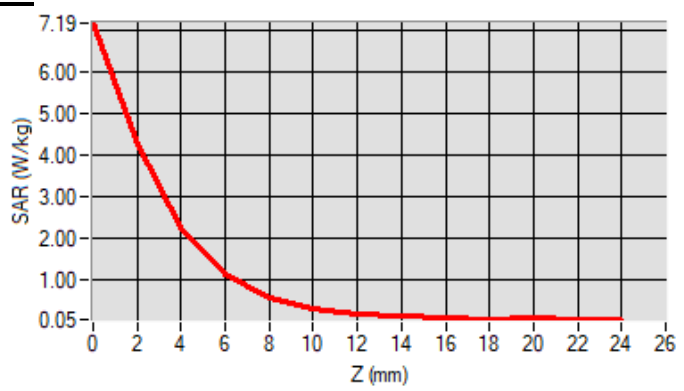

Appendix B: Plots of SAR Test Data

SAR Measurement at GSM850 (Cheek, Right)

Date of measurement: 28/10/2022


A. Experimental conditions.

Probe	SN 18/21 EPG0354
ConvF	1.73
Area Scan	dx=15mm dy=15mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	GSM850
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

B. Permittivity

Frequency (MHz)	836.599976
Relative permittivity (real part)	41.550000
Conductivity (S/m)	0.900283

C. SAR Surface and Volume

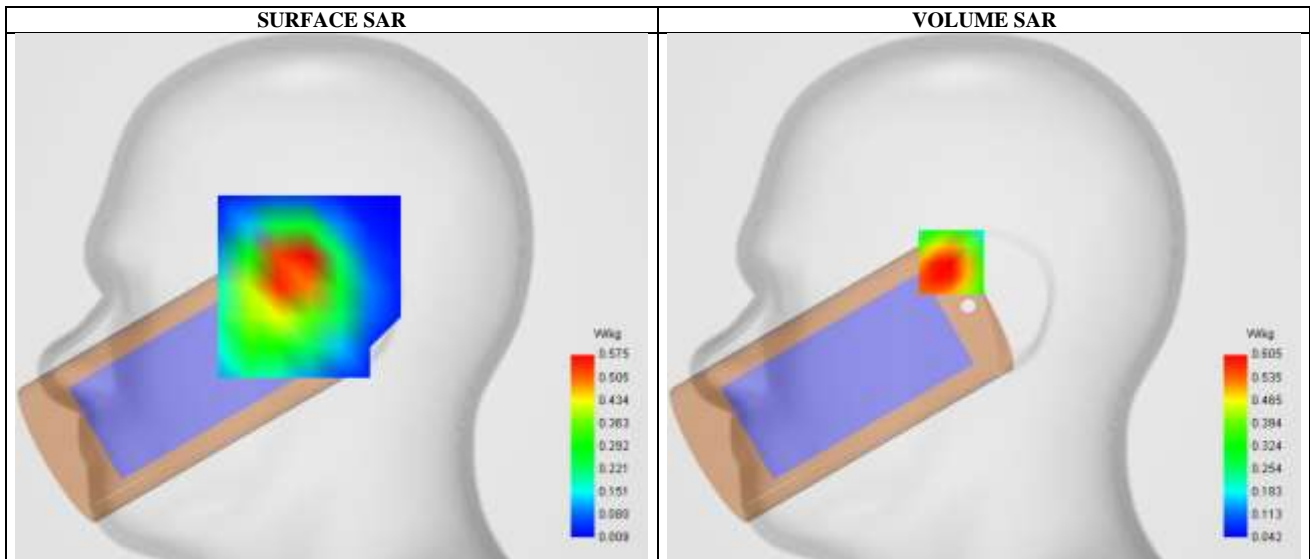


Maximum location: X=-16.00, Y=17.00 ; SAR Peak: 0.87 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.382388
SAR 1g (W/Kg)	0.589061
Variation (%)	-1.020000

E. Z Axis Scan

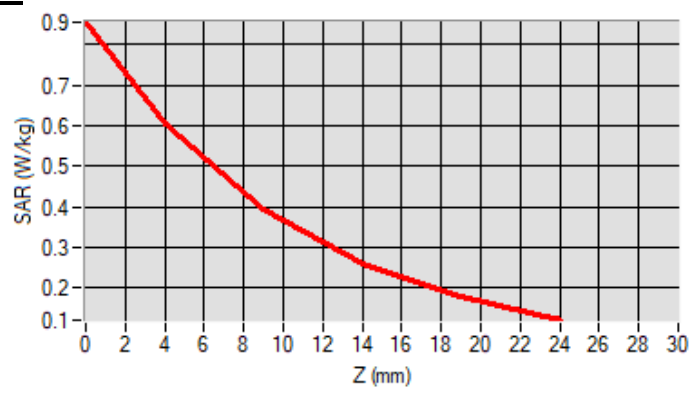

SAR Measurement at GSM1900 (Tilt, Right)

Date of measurement: 2/11/2022


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	2.00
Area Scan	dx=15mm dy=15mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Tilt
Band	GSM1900
Channels	Low
Signal	TDMA (Crest factor: 8.0)

B. Permittivity

Frequency (MHz)	1850.200000
Relative permittivity (real part)	40.460000
Conductivity (S/m)	1.422331

C. SAR Surface and Volume

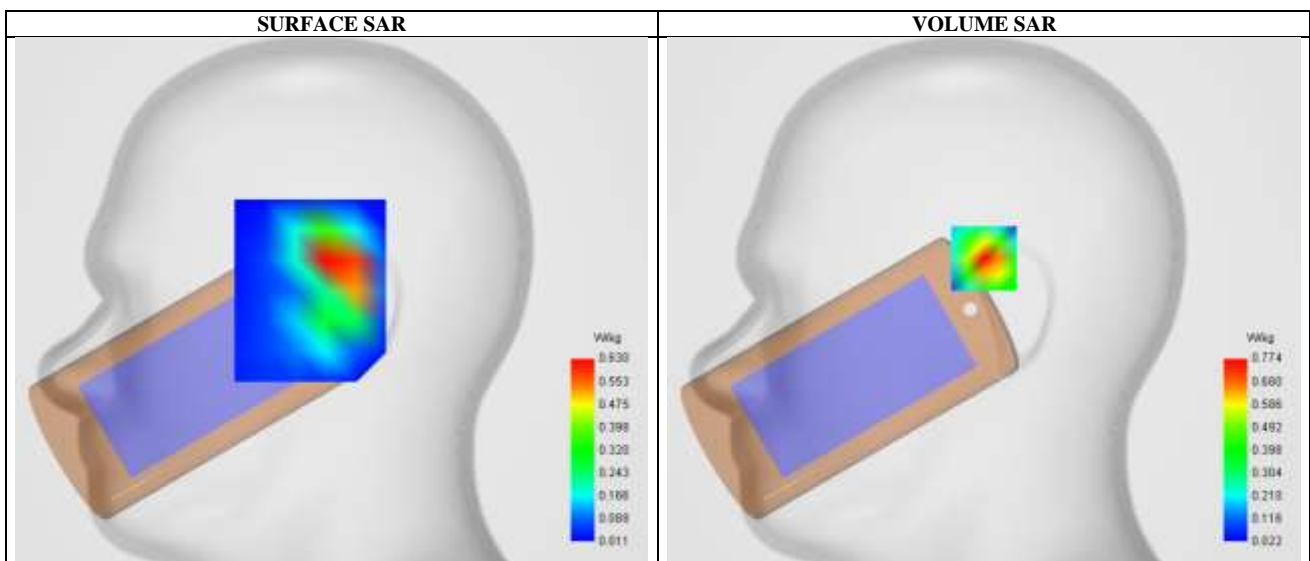


Maximum location: X=0.00, Y=21.00 ; SAR Peak: 1.22 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.375489
SAR 1g (W/Kg)	0.713229
Variation (%)	-0.990000

E. Z Axis Scan

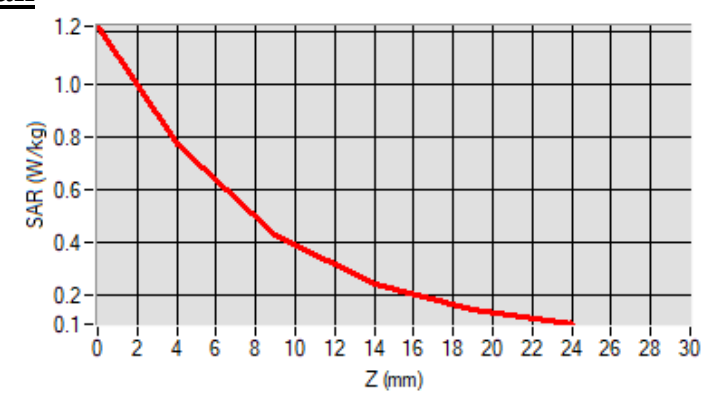

SAR Measurement at Band2 WCDMA1900 (Tilt, Right)

Date of measurement: 2/11/2022


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	2.00
Area Scan	dx=15mm dy=15mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Tilt
Band	Band2_WCDMA1900
Channels	Low
Signal	WCDMA (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1852.400024
Relative permittivity (real part)	40.680000
Conductivity (S/m)	1.422039

C. SAR Surface and Volume

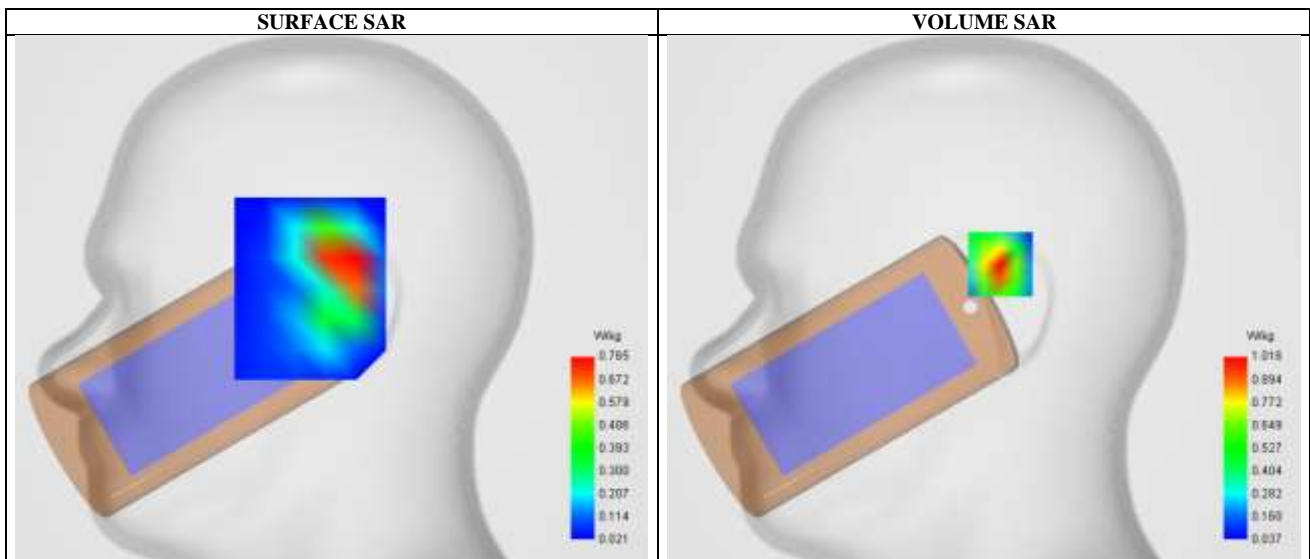


Maximum location: X=8.00, Y=17.00 ; SAR Peak: 1.62 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.477000
SAR 1g (W/Kg)	0.934174
Variation (%)	-0.560000

E. Z Axis Scan

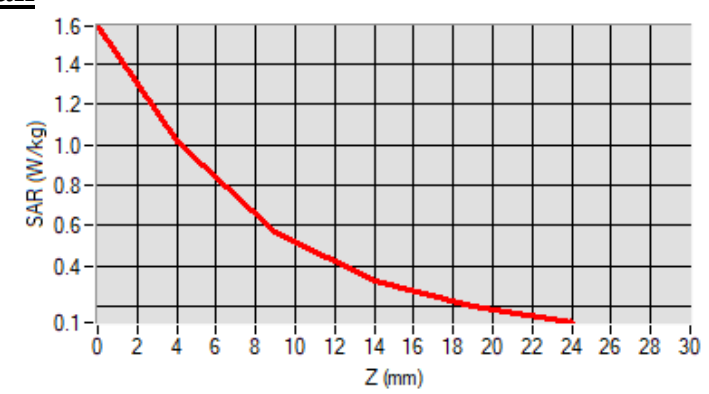

SAR Measurement at CUSTOM (WCDMA 1700) (Tilt, Right)

Date of measurement: 2/11/2022


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	2.05
Area Scan	dx=15mm dy=15mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Tilt
Band	Band4_WCDMA1700
Channels	Middle
Signal	WCDMA (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1732.599976
Relative permittivity (real part)	40.115818
Conductivity (S/m)	1.360656

C. SAR Surface and Volume

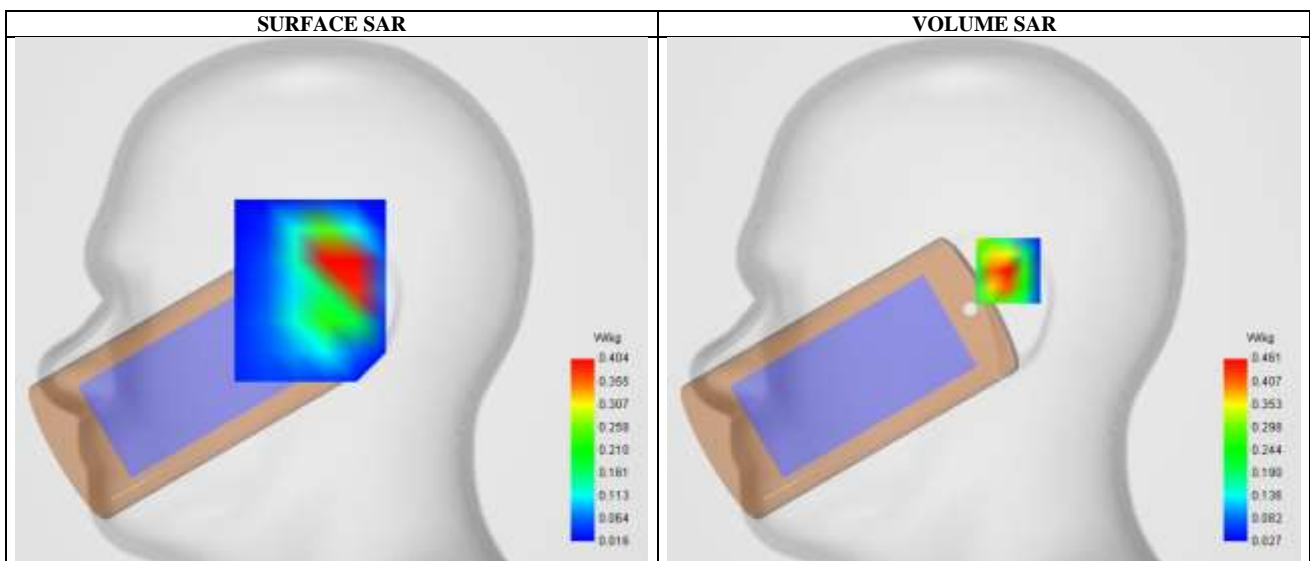


Maximum location: X=12.00, Y=15.00 ; SAR Peak: 0.65 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.247386
SAR 1g (W/Kg)	0.434775
Variation (%)	-3.410000

E. Z Axis Scan

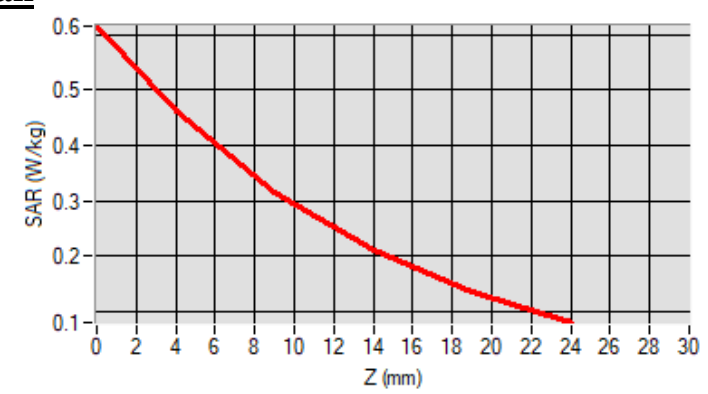

SAR Measurement at Band5 WCDMA850 (Tilt, Right)

Date of measurement: 28/10/2022


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	1.73
Area Scan	dx=15mm dy=15mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Tilt
Band	Band5_WCDMA850
Channels	Middle
Signal	WCDMA (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	836.599976
Relative permittivity (real part)	41.550000
Conductivity (S/m)	0.900283

C. SAR Surface and Volume

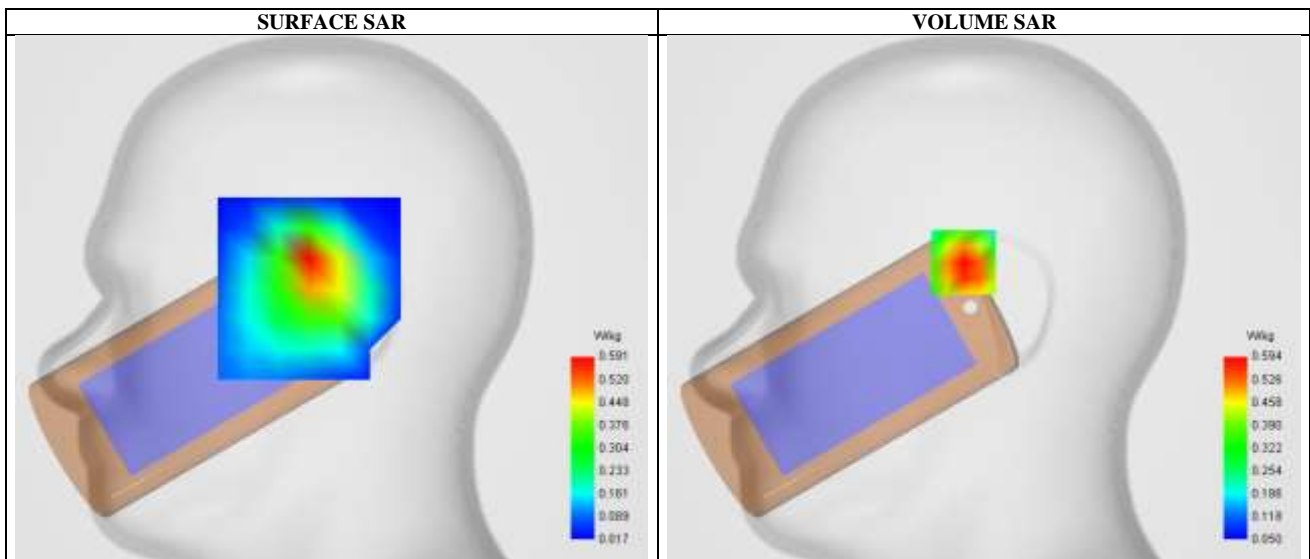


Maximum location: X=-10.00, Y=18.00 ; SAR Peak: 0.83 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.357351
SAR 1g (W/Kg)	0.563974
Variation (%)	-1.310000

E. Z Axis Scan

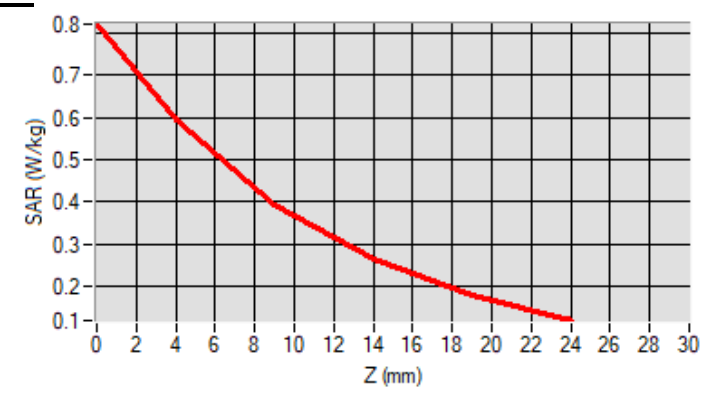

SAR Measurement at LTE band 2 (Tilt, Right)

Date of measurement: 2/11/2022


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	2.00
Area Scan	dx=15mm dy=15mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Tilt
Band	LTE band 2
Channels	High
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1900.000000
Relative permittivity (real part)	40.792800
Conductivity (S/m)	1.415404

C. SAR Surface and Volume

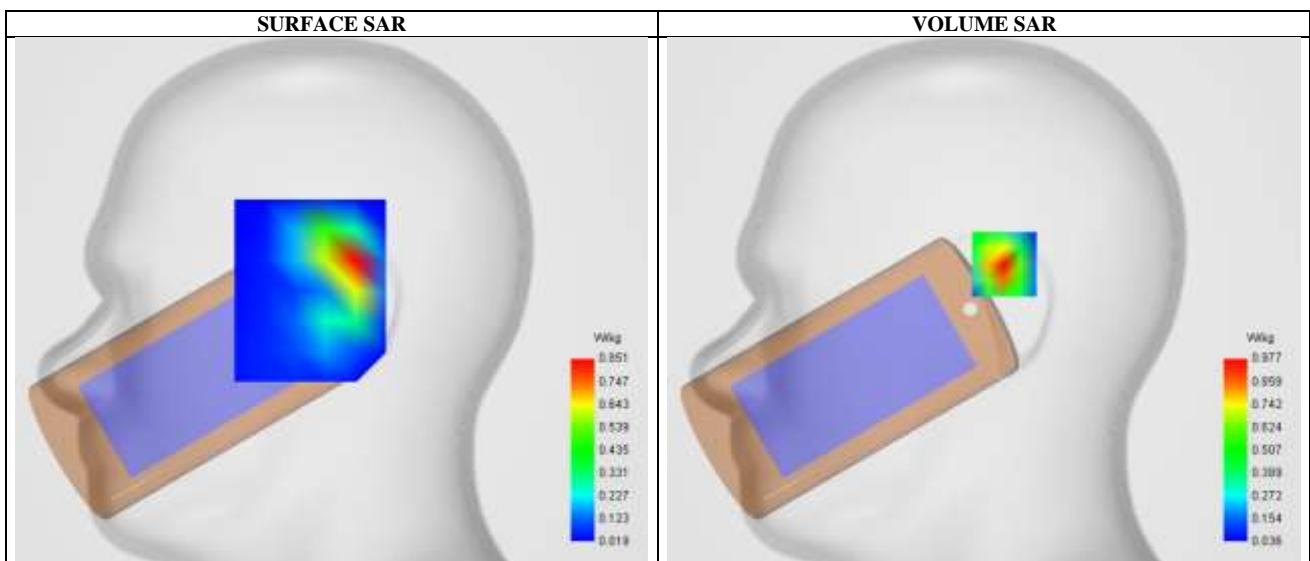


Maximum location: X=10.00, Y=18.00 ; SAR Peak: 1.55 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.459602
SAR 1g (W/Kg)	0.898347
Variation (%)	-1.540000

E. Z Axis Scan

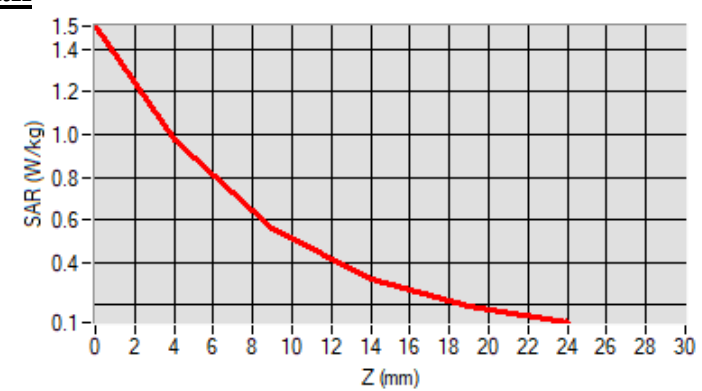

SAR Measurement at LTE band 5 (Tilt, Right)

Date of measurement: 28/10/2022


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	1.73
Area Scan	dx=15mm dy=15mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Tilt
Band	LTE band 5
Channels	Middle
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	836.500000
Relative permittivity (real part)	41.450000
Conductivity (S/m)	0.900021

C. SAR Surface and Volume

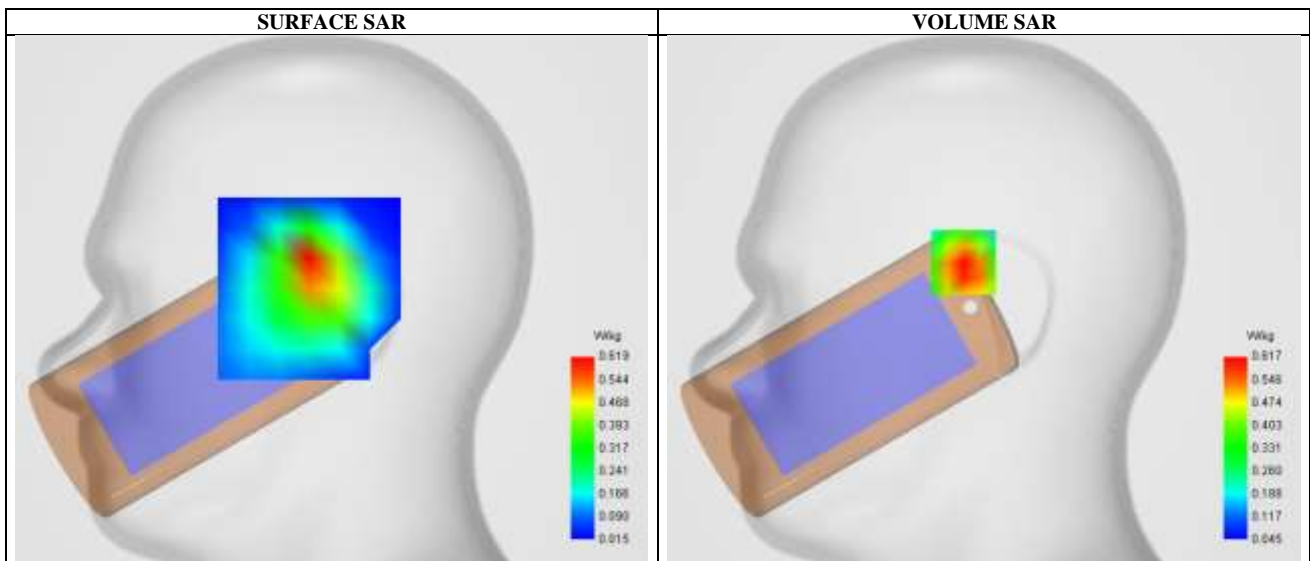


Maximum location: X=-10.00, Y=18.00 ; SAR Peak: 0.88 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.363887
SAR 1g (W/Kg)	0.586040
Variation (%)	-3.150000

E. Z Axis Scan

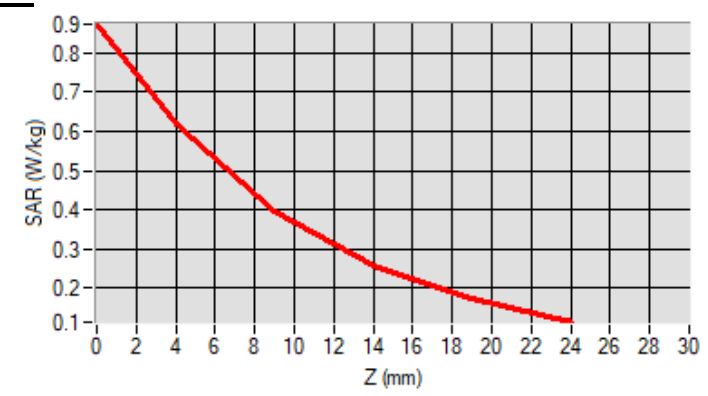

SAR Measurement at LTE band 7 (Tilt, Right)

Date of measurement: 5/11/2022


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	2.27
Area Scan	dx=12mm dy=12mm
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm,Complete
Phantom	Right head
Device Position	Tilt
Band	LTE band 7
Channels	Middle
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	2535.000000
Relative permittivity (real part)	39.086666
Conductivity (S/m)	1.939749

C. SAR Surface and Volume

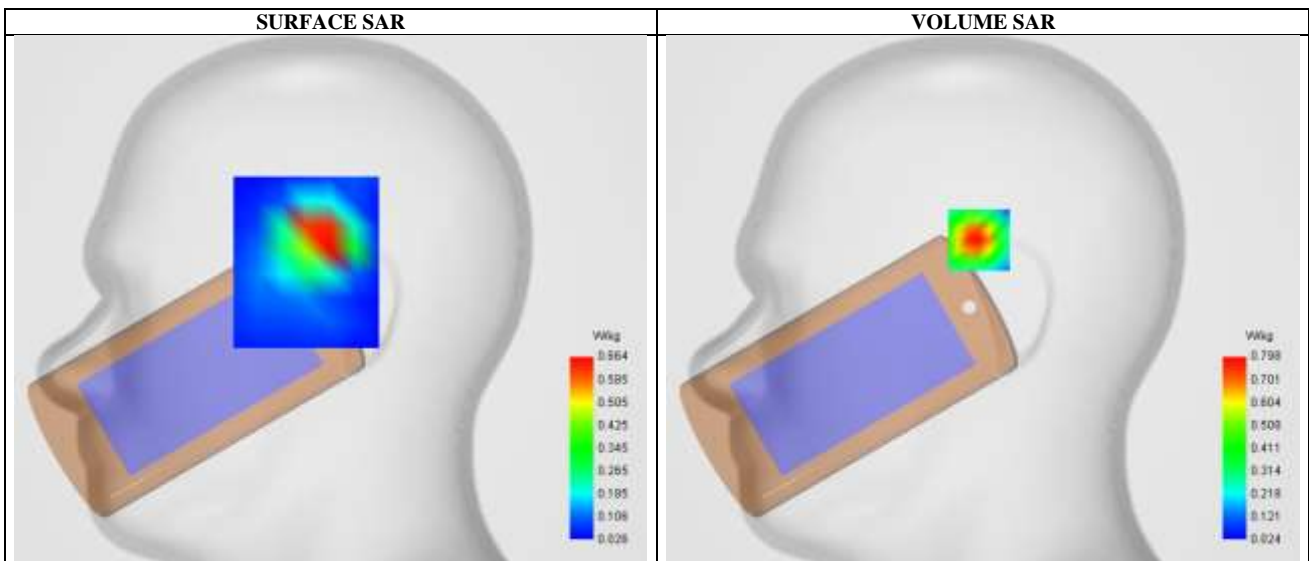


Maximum location: X=-2.00, Y=29.00 ; SAR Peak: 1.41 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.349971
SAR 1g (W/Kg)	0.723304
Variation (%)	-1.360000

E. Z Axis Scan

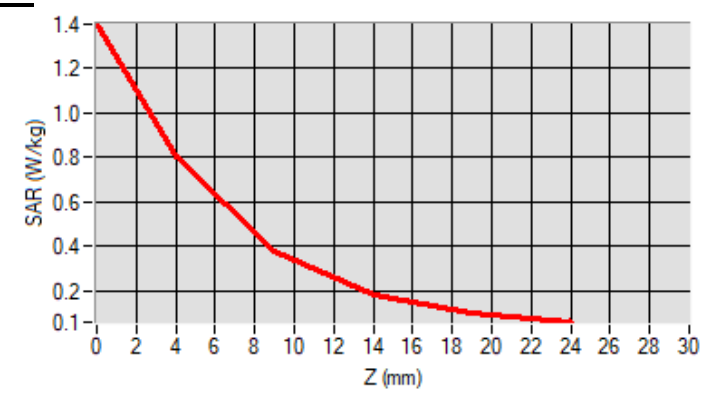

SAR Measurement at LTE band 12 (Cheek, Right)

Date of measurement: 28/10/2022


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	1.70
Area Scan	dx=15mm dy=15mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	LTE band 12
Channels	Low
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	704.000000
Relative permittivity (real part)	41.726614
Conductivity (S/m)	0.863404

C. SAR Surface and Volume

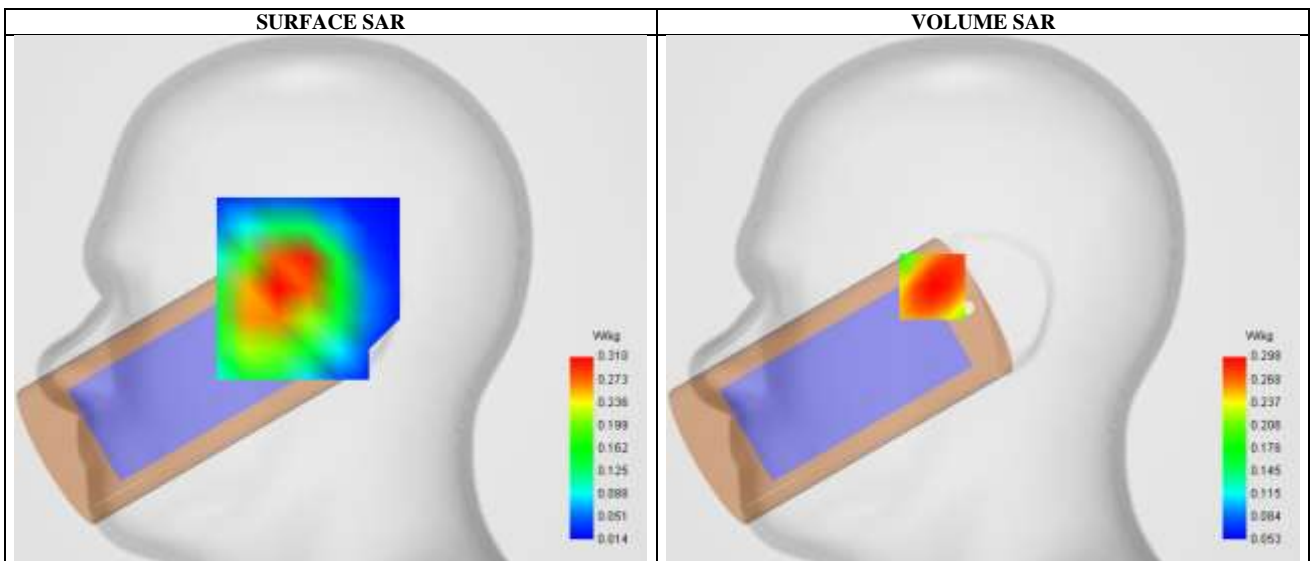


Maximum location: X=-25.00, Y=6.00 ; SAR Peak: 0.41 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.212192
SAR 1g (W/Kg)	0.296273
Variation (%)	-0.210000

E. Z Axis Scan

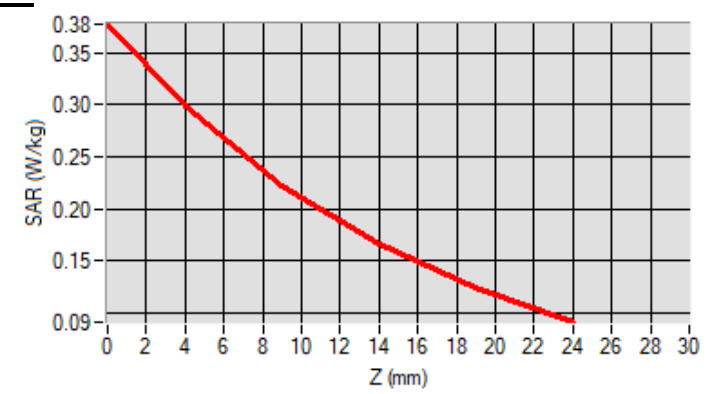

SAR Measurement at LTE band 41 (Tilt, Right)

Date of measurement:5/11/2022


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	2.27
Area Scan	dx=12mm dy=12mm
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm,Complete
Phantom	Right head
Device Position	Tilt
Band	LTE band 41
Channels	Middle
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	2595.000000
Relative permittivity (real part)	38.766681
Conductivity (S/m)	1.950010

C. SAR Surface and Volume

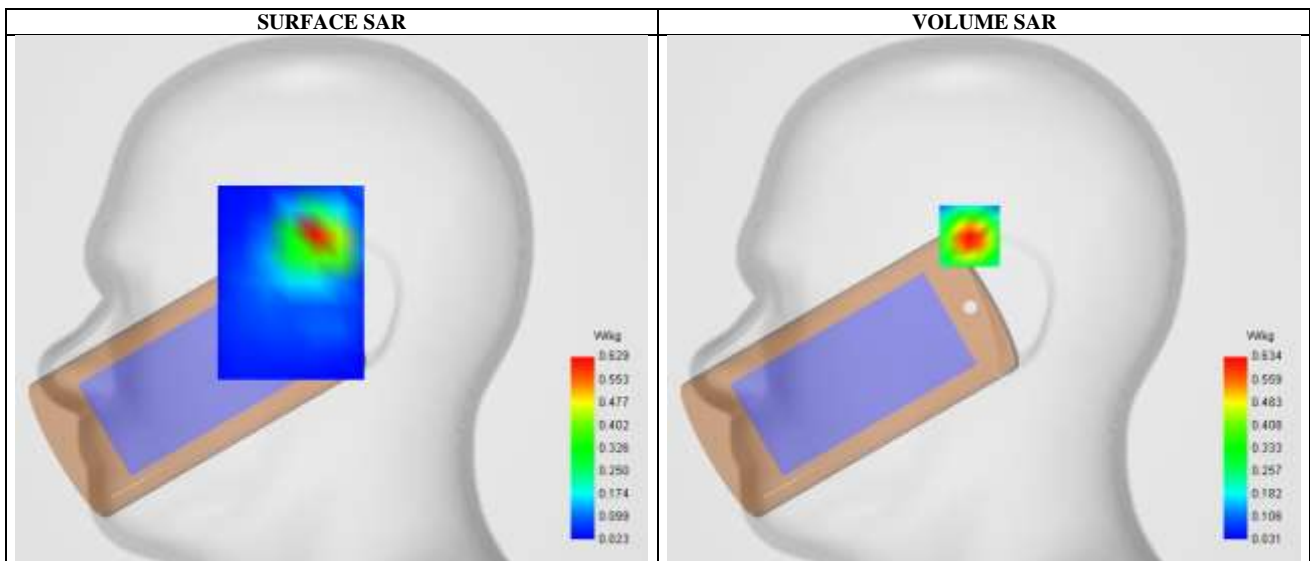


Maximum location: X=-7.00, Y=31.00 ; SAR Peak: 1.09 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.282291
SAR 1g (W/Kg)	0.575048
Variation (%)	-1.150000

E. Z Axis Scan

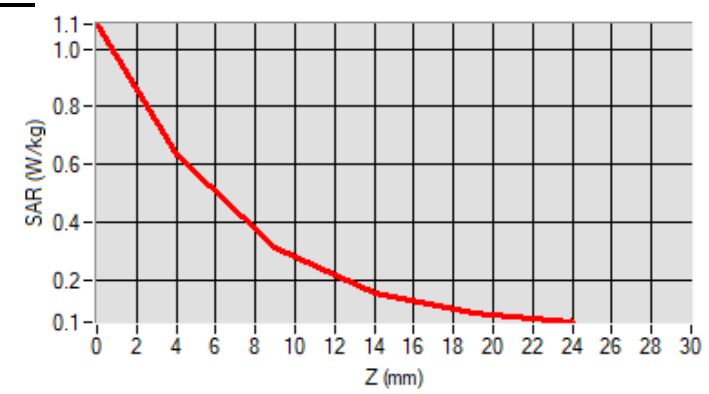

SAR Measurement at CUSTOM (LTE Band66) (Tilt, Right)

Date of measurement: 2/11/2022


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	2.05
Area Scan	dx=15mm dy=15mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Tilt
Band	LTE band 66
Channels	Low
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1720.000000
Relative permittivity (real part)	41.104411
Conductivity (S/m)	1.371227

C. SAR Surface and Volume

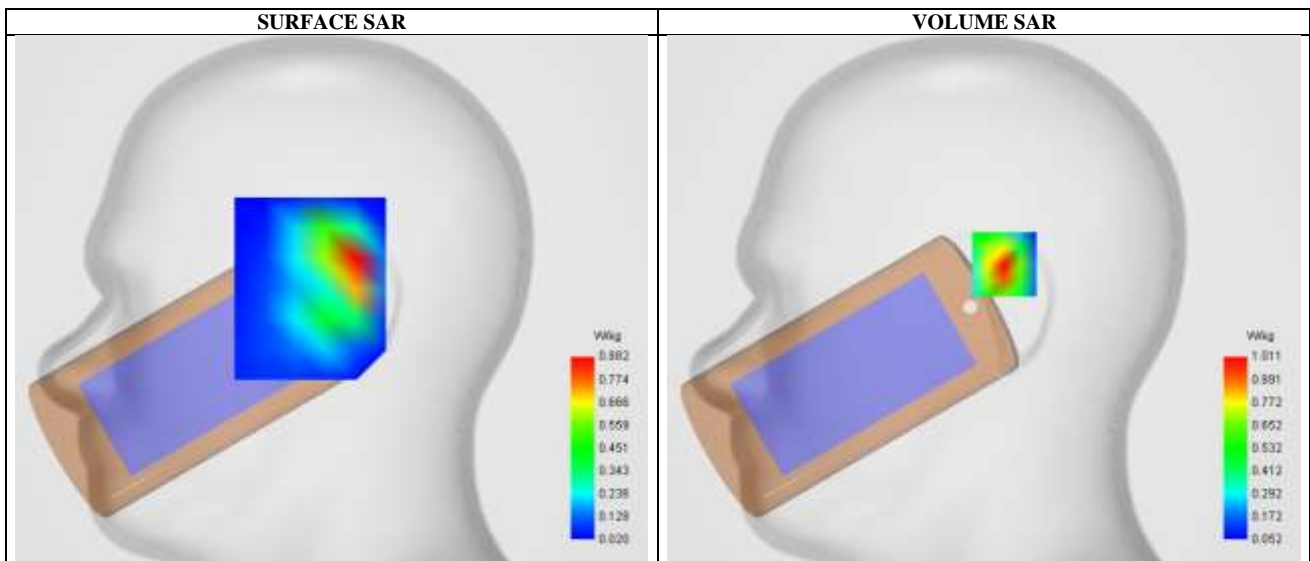


Maximum location: X=10.00, Y=17.00 ; SAR Peak: 1.56 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.488012
SAR 1g (W/Kg)	0.929436
Variation (%)	-0.690000

E. Z Axis Scan

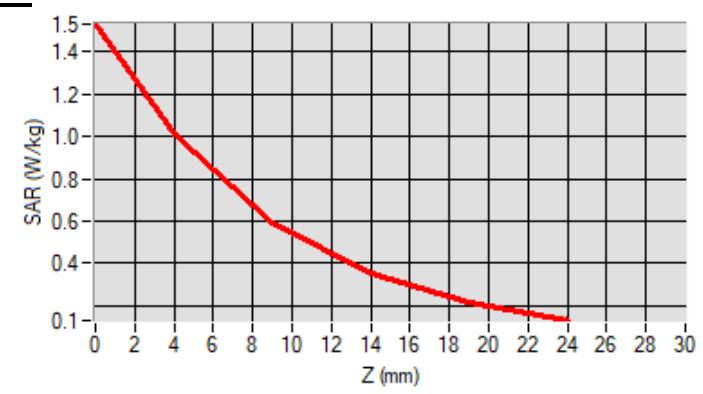

SAR Measurement at IEEE 802.11b ISM (Tilt, Right)

Date of measurement: 5/11/2022


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	2.46
Area Scan	dx=12mm dy=12mm
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm,Complete
Phantom	Right head
Device Position	Tilt
Band	IEEE 802.11b ISM
Channels	Middle
Signal	IEEE802.b (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	2437.000000
Relative permittivity (real part)	38.860024
Conductivity (S/m)	1.768041

C. SAR Surface and Volume

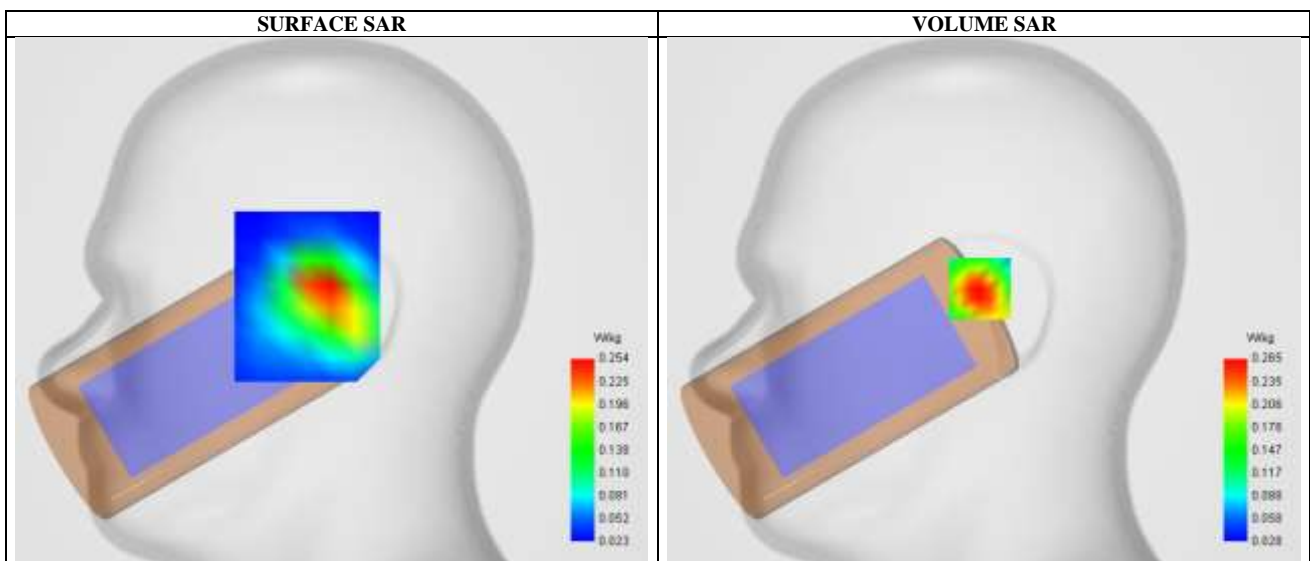


Maximum location: X=-2.00, Y=6.00 ; SAR Peak: 0.39 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.146215
SAR 1g (W/Kg)	0.246490
Variation (%)	-2.930000

E. Z Axis Scan

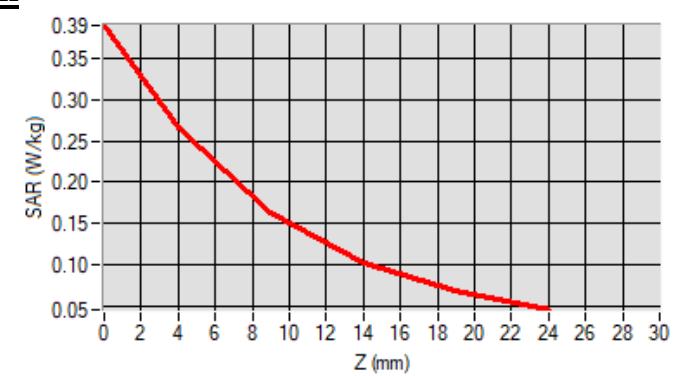

SAR Measurement at CUSTOM (5.2GHz 802.11a) (Tilt, Left)

Date of measurement: 8/11/2022


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	1.71
Area Scan	dx=10mm dy=10mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm,Complete
Phantom	Left head
Device Position	Tilt
Band	IEEE 802.11a
Channels	Low
Signal	IEEE802.11a (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	5180.000000
Relative permittivity (real part)	35.220000
Conductivity (S/m)	4.563860

C. SAR Surface and Volume

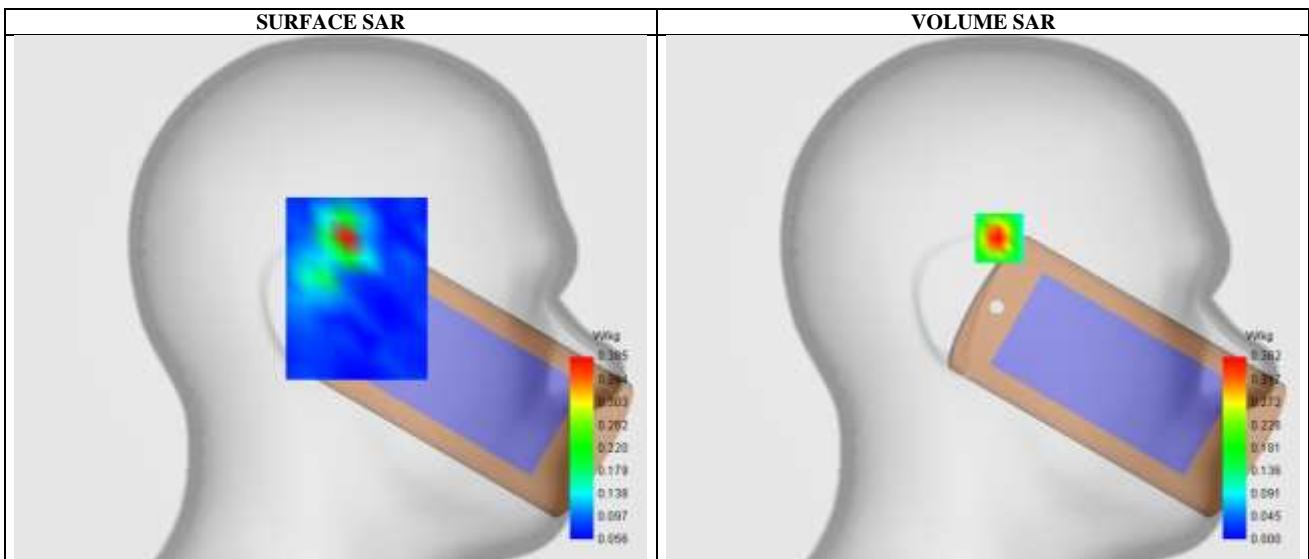


Maximum location: X=-8.00, Y=30.00 ; SAR Peak: 0.87 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.146279
SAR 1g (W/Kg)	0.335593
Variation (%)	-2.230000

E. Z Axis Scan

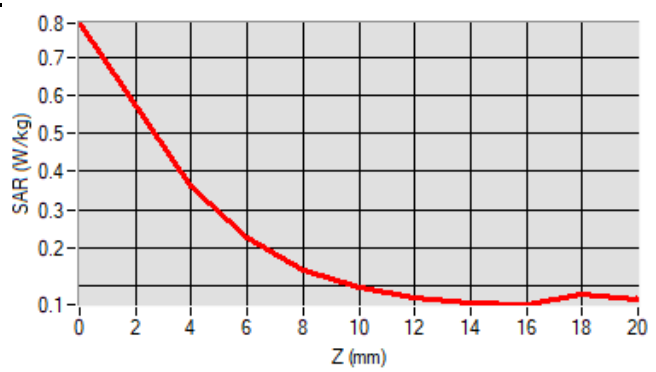

SAR Measurement at CUSTOM (5.8GHz 802.11a) (Tilt, Left)

Date of measurement: 8/11/2022


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	1.94
Area Scan	dx=10mm dy=10mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm,Complete
Phantom	Left head
Device Position	Tilt
Band	IEEE 802.11a
Channels	High
Signal	IEEE802.11a (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	5825.000000
Relative permittivity (real part)	34.724965
Conductivity (S/m)	5.176477

C. SAR Surface and Volume

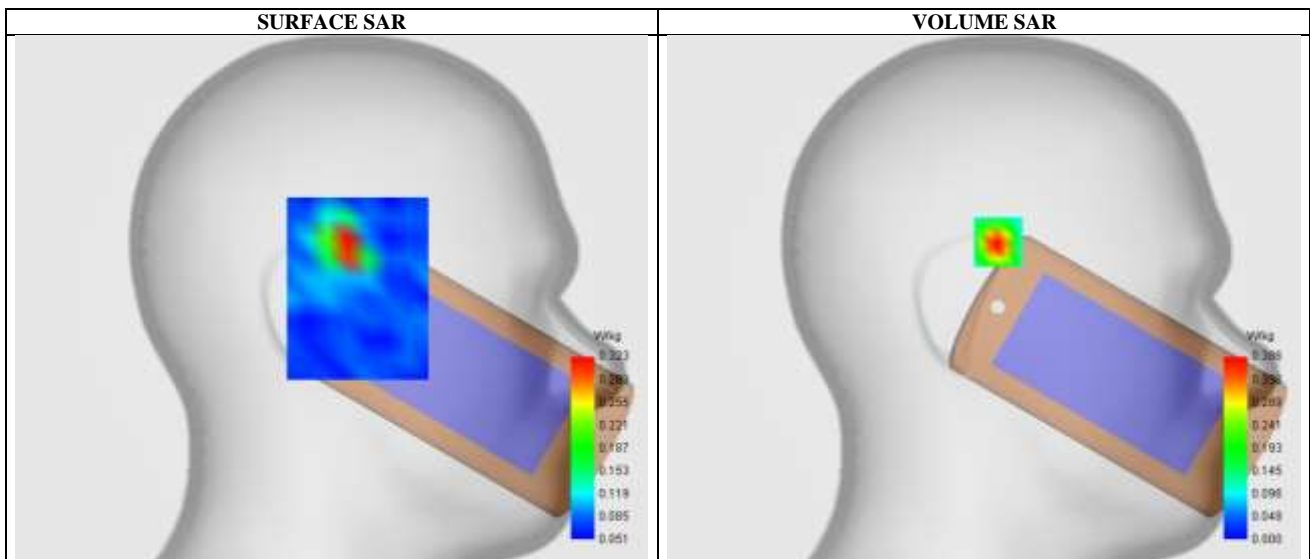


Maximum location: X=-7.00, Y=28.00 ; SAR Peak: 0.88 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.155474
SAR 1g (W/Kg)	0.352538
Variation (%)	-0.670000

E. Z Axis Scan

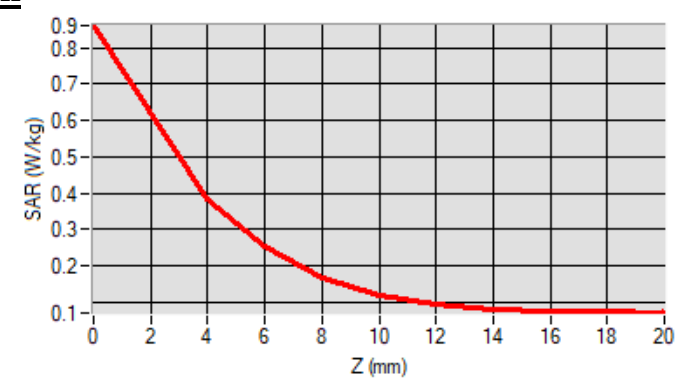

SAR Measurement at Bluetooth (Cheek, Left)

Date of measurement: 5/11/2022


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	2.46
Area Scan	dx=12mm dy=12mm
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm,Complete
Phantom	Left head
Device Position	Cheek
Band	Bluetooth
Channels	Middle
Signal	Bluetooth (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	2441.000000
Relative permittivity (real part)	38.873994
Conductivity (S/m)	1.761554

C. SAR Surface and Volume

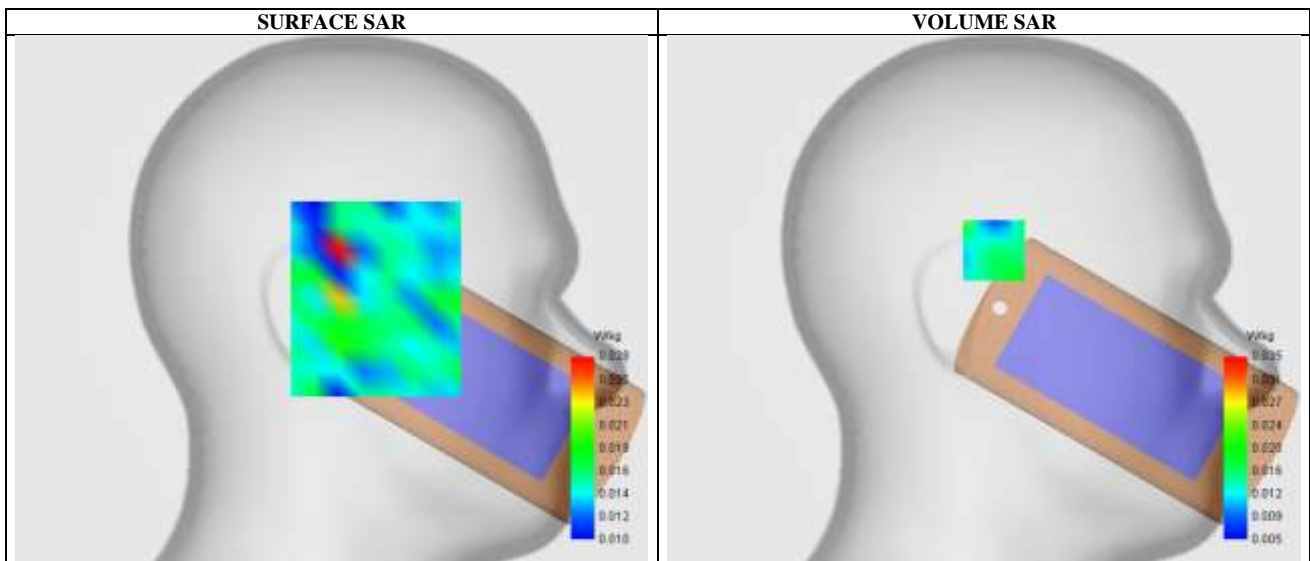


Maximum location: X=-5.00, Y=24.00 ; SAR Peak: 0.05 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.016228
SAR 1g (W/Kg)	0.018269
Variation (%)	0.270000

E. Z Axis Scan

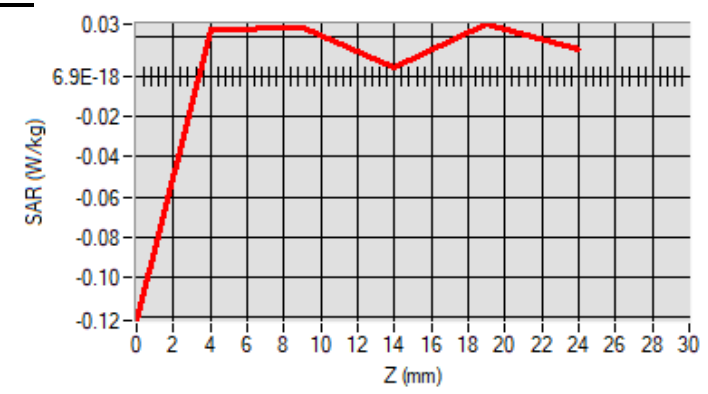

SAR Measurement at CUSTOM (GPRS850Txslot) (Body, Validation Plane)

Date of measurement: 28/10/2022


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	1.70
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	Middle
Signal	TDMA (Crest factor: 4.0)

B. Permittivity

Frequency (MHz)	836.599976
Relative permittivity (real part)	41.550000
Conductivity (S/m)	0.900283

C. SAR Surface and Volume

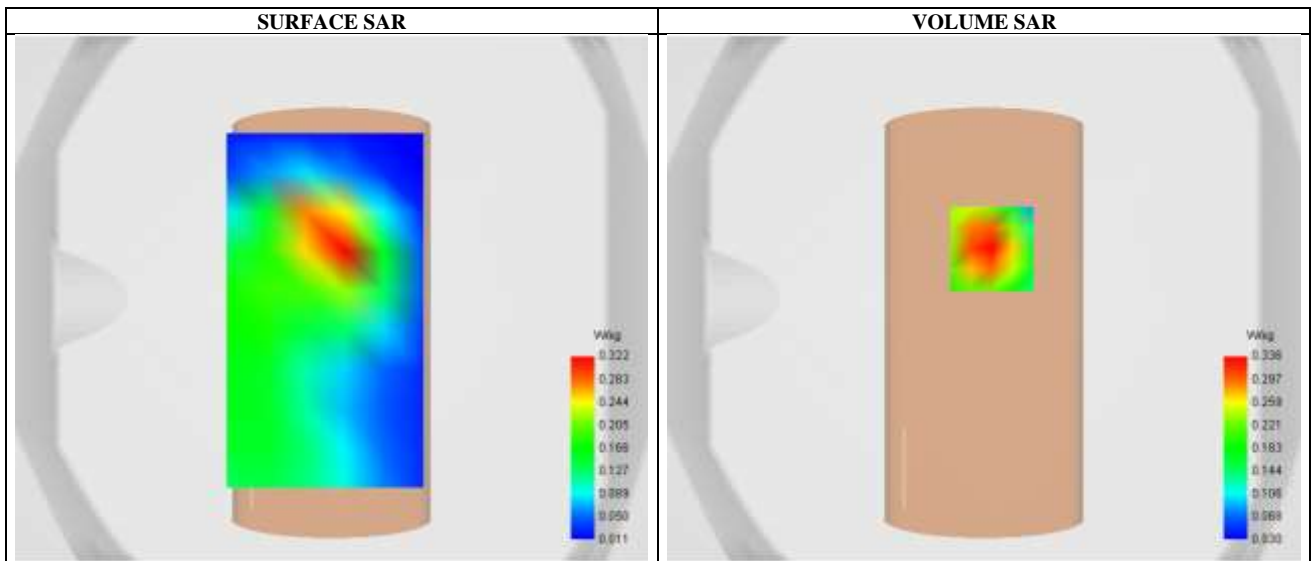


Maximum location: X=3.00, Y=19.00 ; SAR Peak: 0.47 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.197716
SAR 1g (W/Kg)	0.316995
Variation (%)	-1.520000

E. Z Axis Scan

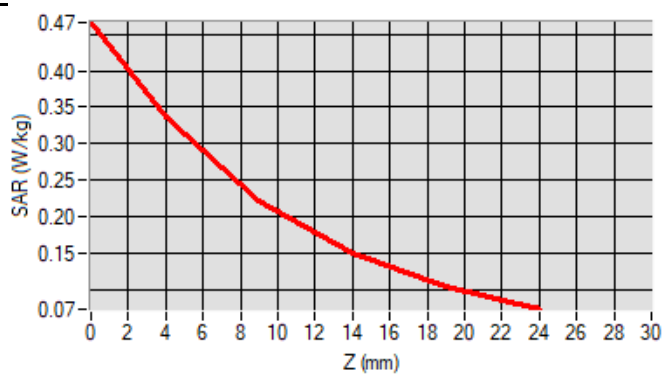

SAR Measurement at CUSTOM (GPRS19004Txslot) (Body, Validation Plane)

Date of measurement: 2/11/2022


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	2.00
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	Middle
Signal	TDMA (Crest factor: 2.0)

B. Permittivity

Frequency (MHz)	1880.000000
Relative permittivity (real part)	40.680000
Conductivity (S/m)	1.423341

C. SAR Surface and Volume

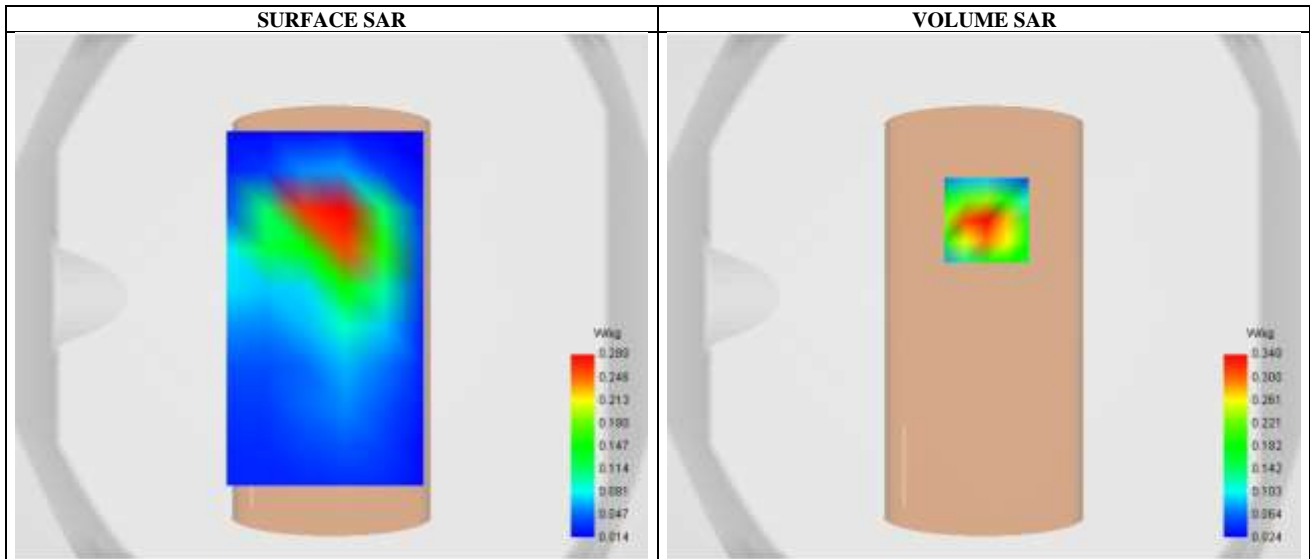


Maximum location: X=1.00, Y=29.00 ; SAR Peak: 0.51 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.177115
SAR 1g (W/Kg)	0.318525
Variation (%)	-2.610000

E. Z Axis Scan

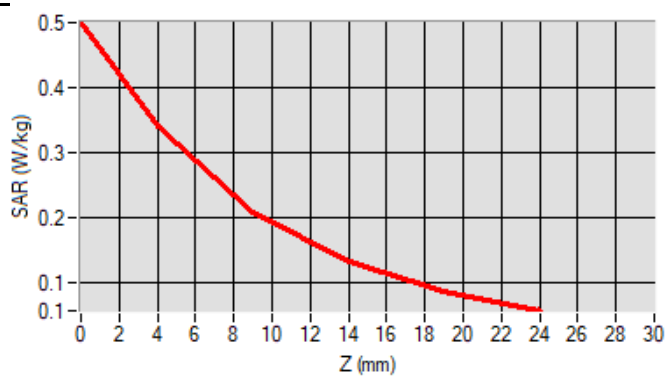

SAR Measurement at Band2 WCDMA1900 (Body, Validation Plane)

Date of measurement: 2/11/2022


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	2.00
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	Band2_WCDMA1900
Channels	Middle
Signal	WCDMA (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1880.000000
Relative permittivity (real part)	40.680000
Conductivity (S/m)	1.422039

C. SAR Surface and Volume

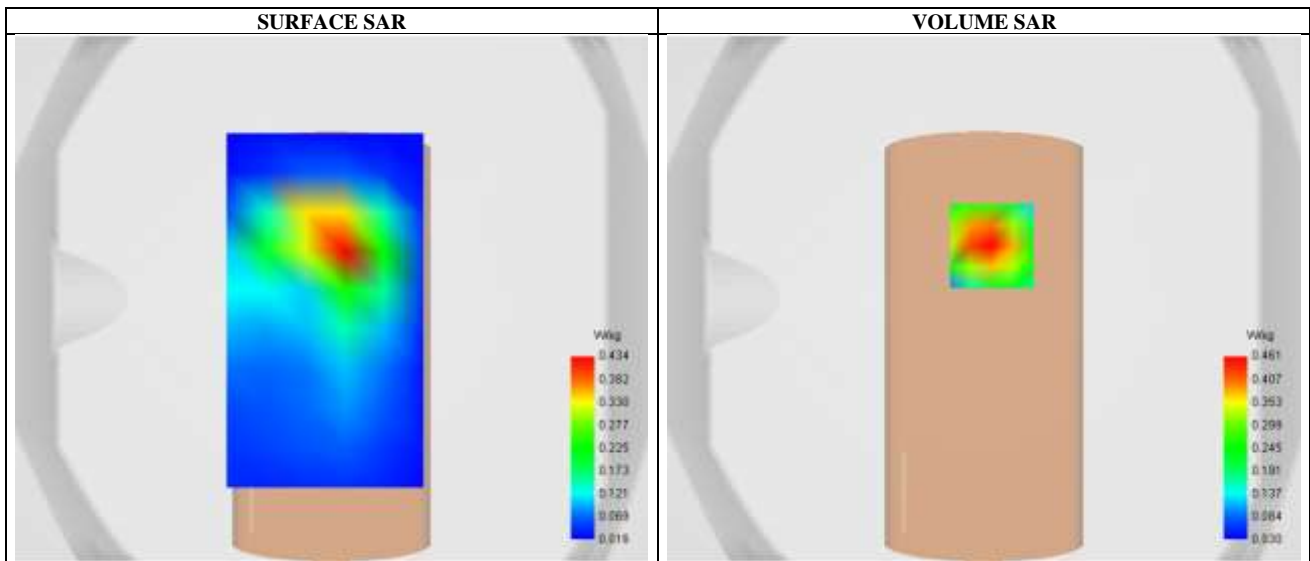


Maximum location: X=3.00, Y=20.00 ; SAR Peak: 0.67 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.252356
SAR 1g (W/Kg)	0.432559
Variation (%)	-0.720000

E. Z Axis Scan

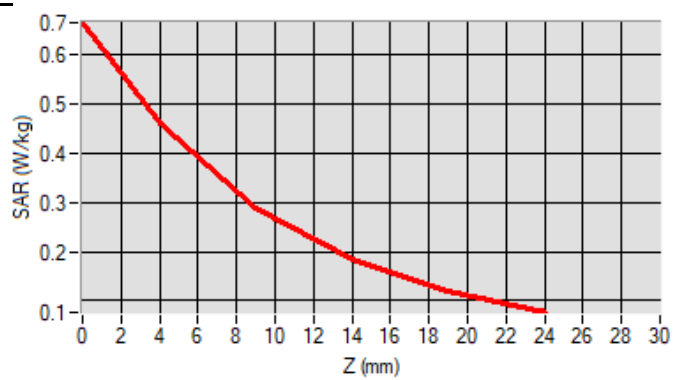

SAR Measurement at CUSTOM (WCDMA 1700) (Body, Validation Plane)

Date of measurement: 2/11/2022


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	2.05
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	Band4_WCDMA1700
Channels	Middle
Signal	WCDMA (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1732.599976
Relative permittivity (real part)	41.224034
Conductivity (S/m)	1.384441

C. SAR Surface and Volume

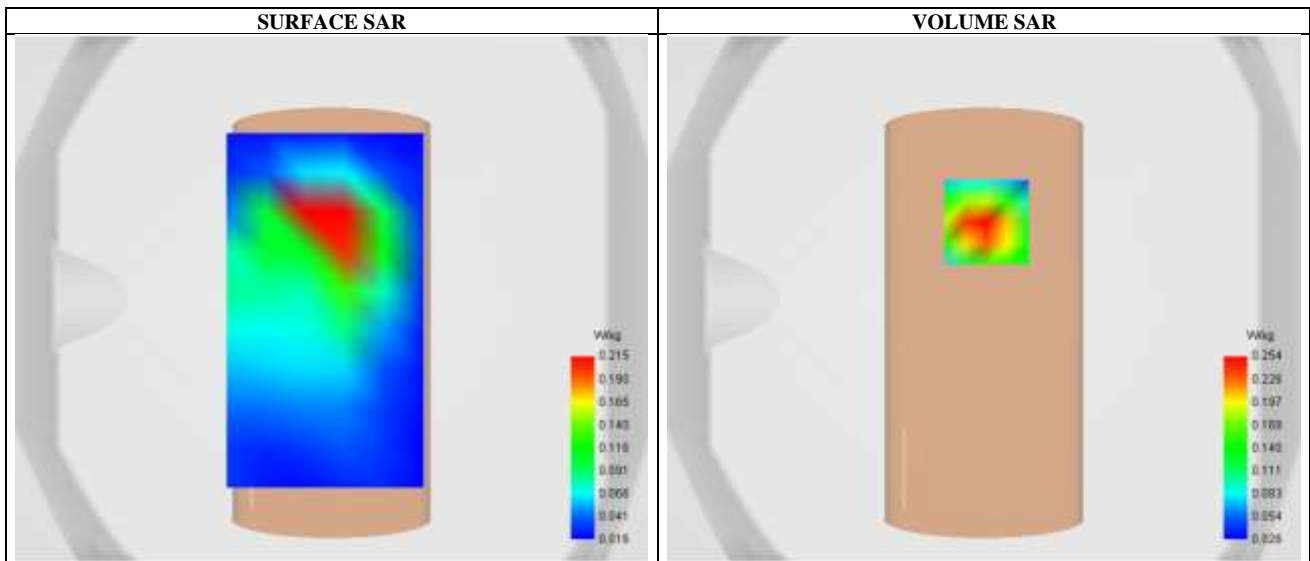


Maximum location: X=1.00, Y=29.00 ; SAR Peak: 0.32 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.115816
SAR 1g (W/Kg)	0.197321
Variation (%)	0.030000

E. Z Axis Scan

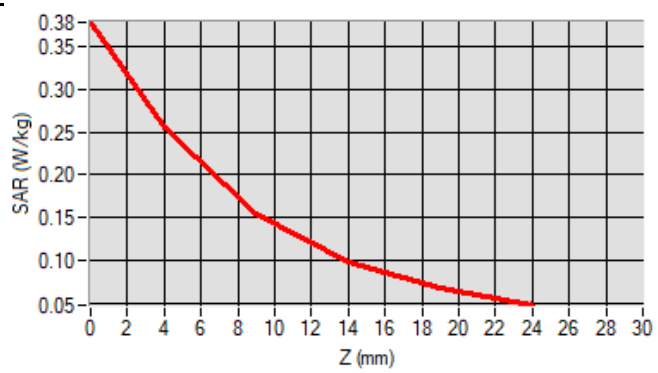

SAR Measurement at Band5 WCDMA850 (Body, Validation Plane)

Date of measurement: 28/10/2022


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	1.73
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	Band5_WCDMA850
Channels	Middle
Signal	WCDMA (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	836.599976
Relative permittivity (real part)	41.550000
Conductivity (S/m)	0.900283

C. SAR Surface and Volume

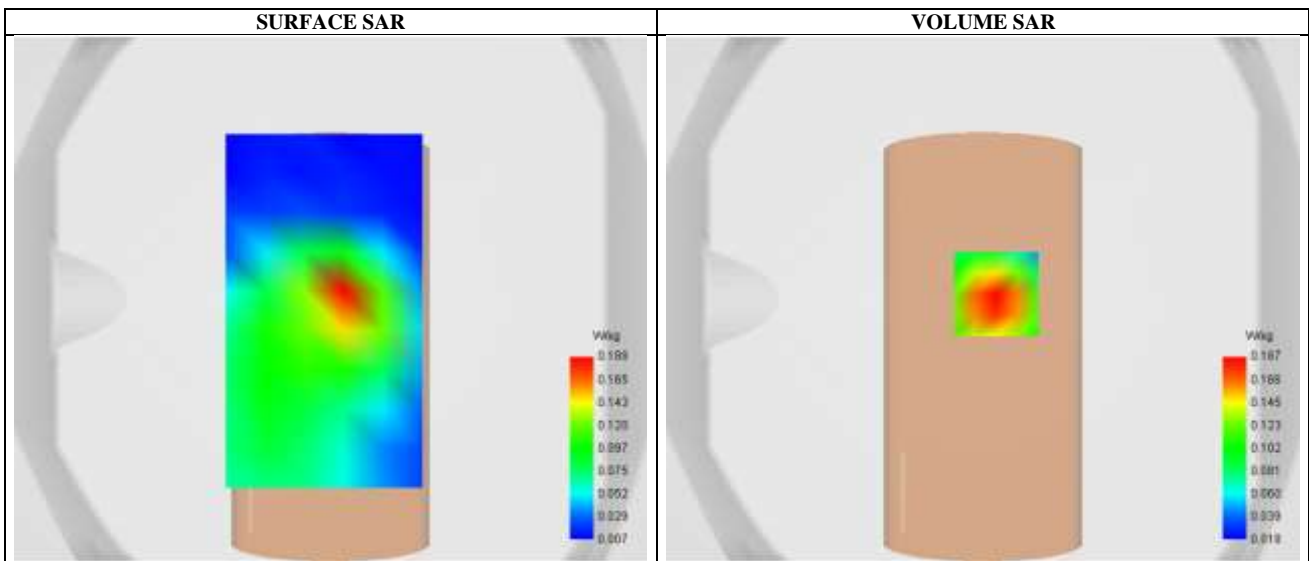


Maximum location: X=5.00, Y=2.00 ; SAR Peak: 0.27 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.109544
SAR 1g (W/Kg)	0.178048
Variation (%)	2.40000

E. Z Axis Scan

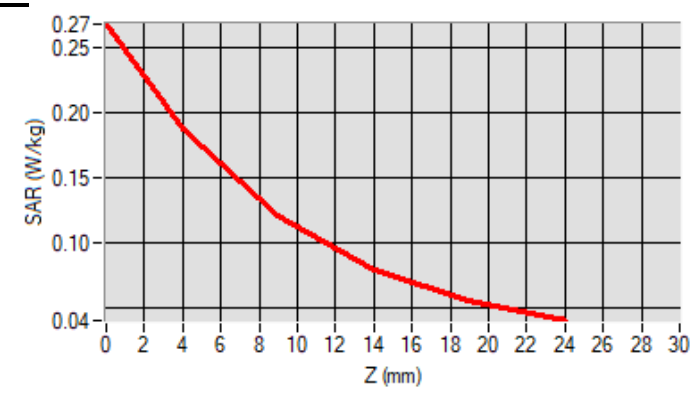

SAR Measurement at LTE band 2 (Body, Validation Plane)

Date of measurement: 2/11/2022


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	2.00
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 2
Channels	Middle
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1880.000000
Relative permittivity (real part)	40.680000
Conductivity (S/m)	1.422039

C. SAR Surface and Volume

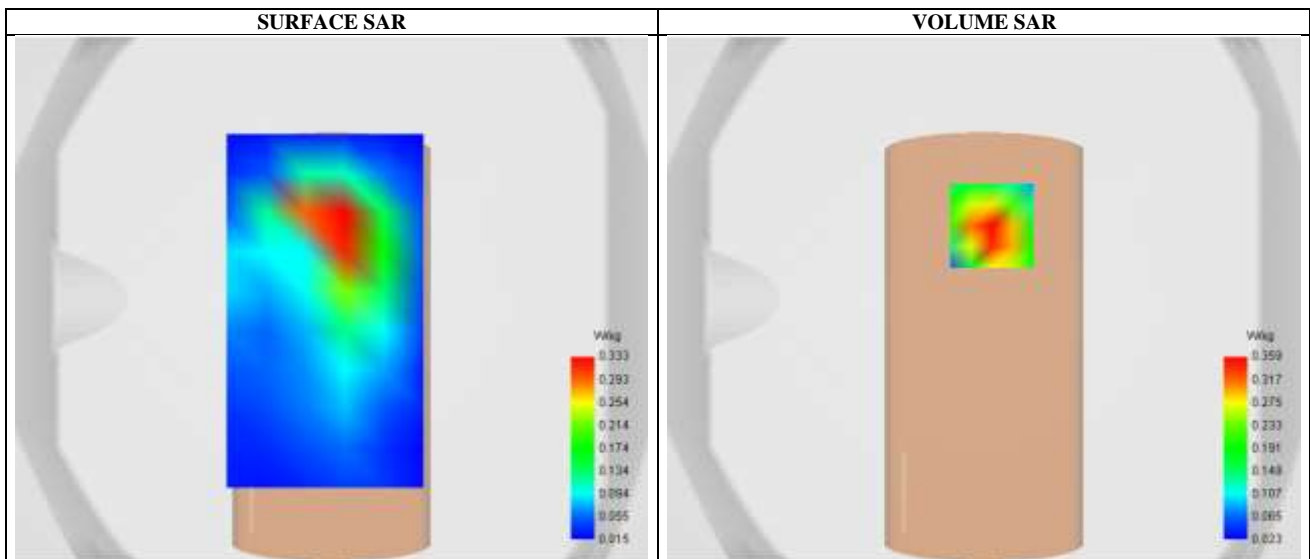


Maximum location: X=3.00, Y=28.00 ; SAR Peak: 0.55 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.192291
SAR 1g (W/Kg)	0.339605
Variation (%)	-4.090000

E. Z Axis Scan

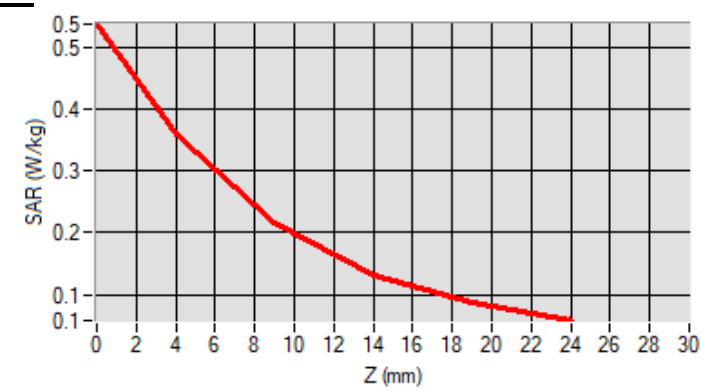

SAR Measurement at LTE band 5 (Body, Validation Plane)

Date of measurement: 28/10/2022


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	1.73
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 5
Channels	Middle
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	836.500000
Relative permittivity (real part)	41.450000
Conductivity (S/m)	0.900021

C. SAR Surface and Volume

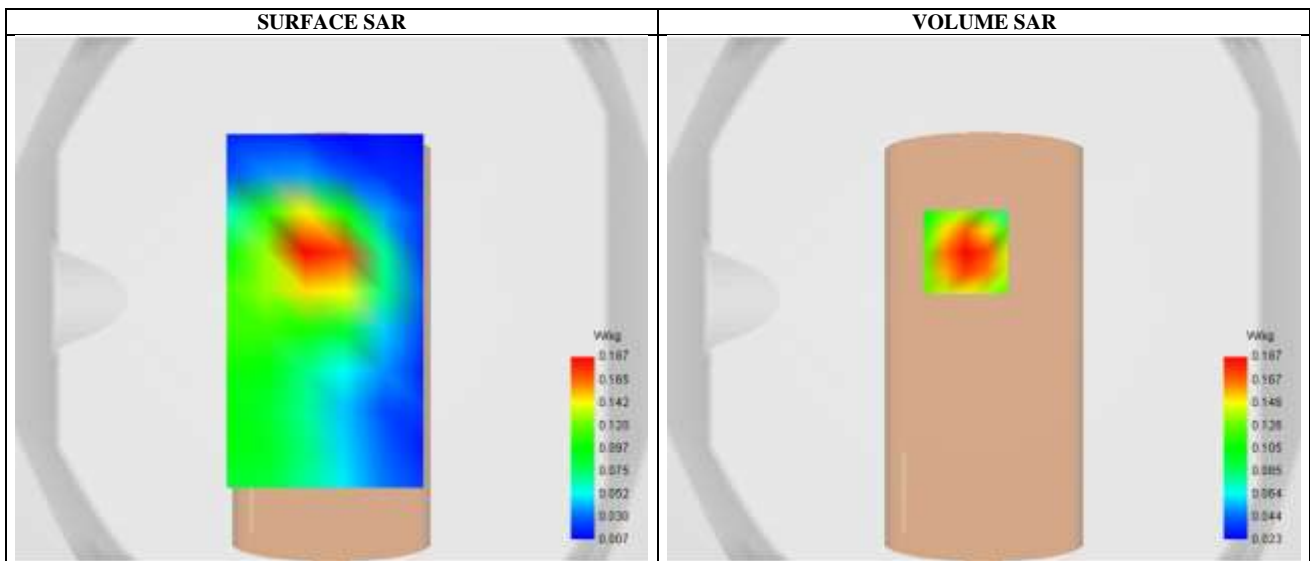


Maximum location: X=-7.00, Y=18.00 ; SAR Peak: 0.26 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.114071
SAR 1g (W/Kg)	0.177681
Variation (%)	1.820000

E. Z Axis Scan

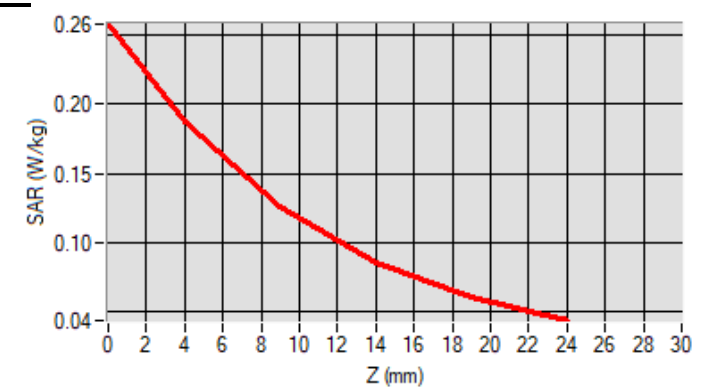

SAR Measurement at LTE band 7 (Body, Validation Plane)

Date of measurement: 5/11/2022


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	2.27
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 7
Channels	Middle
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	2535.000000
Relative permittivity (real part)	38.675124
Conductivity (S/m)	1.929743

C. SAR Surface and Volume

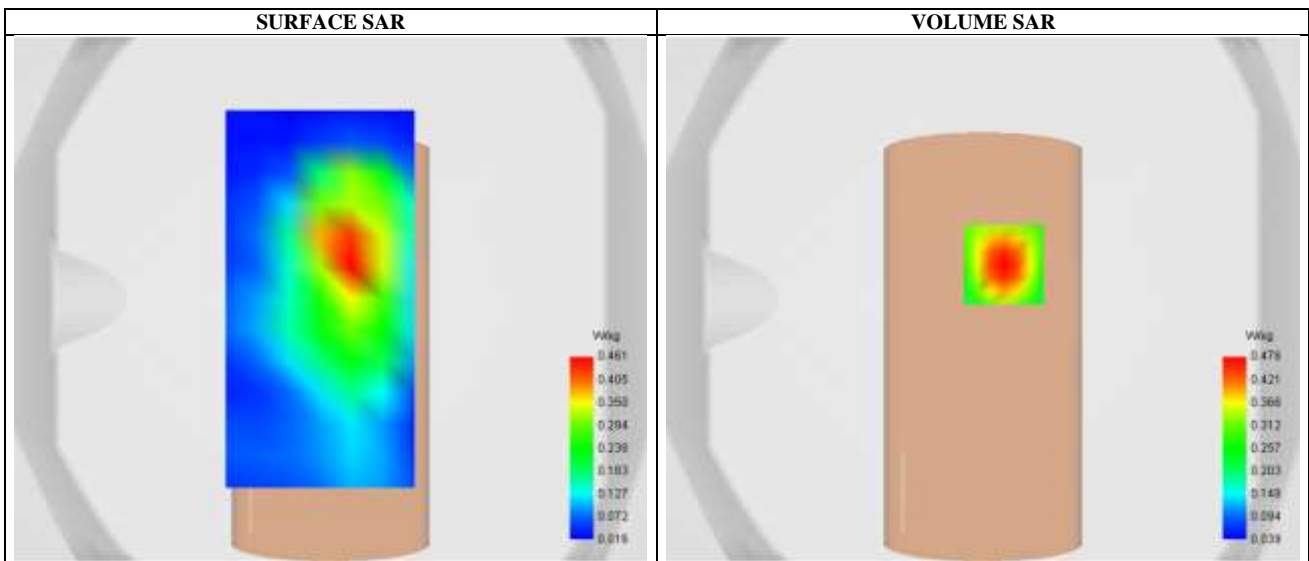


Maximum location: X=8.00, Y=13.00 ; SAR Peak: 0.70 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.254683
SAR 1g (W/Kg)	0.439804
Variation (%)	-2.670000

E. Z Axis Scan

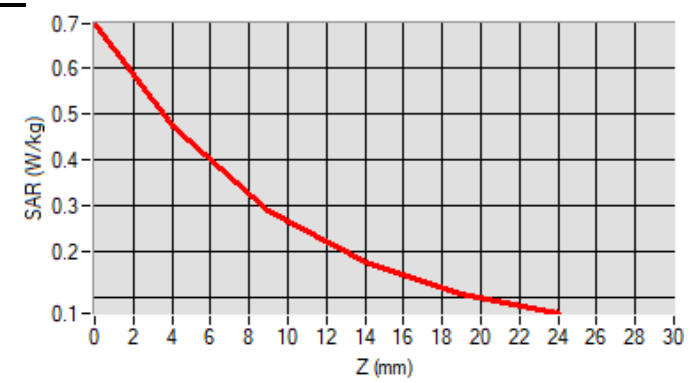

SAR Measurement at LTE band 12 (Body, Validation Plane)

Date of measurement: 28/10/2022


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	1.70
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 12
Channels	Low
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	704.000000
Relative permittivity (real part)	41.726614
Conductivity (S/m)	0.863404

C. SAR Surface and Volume

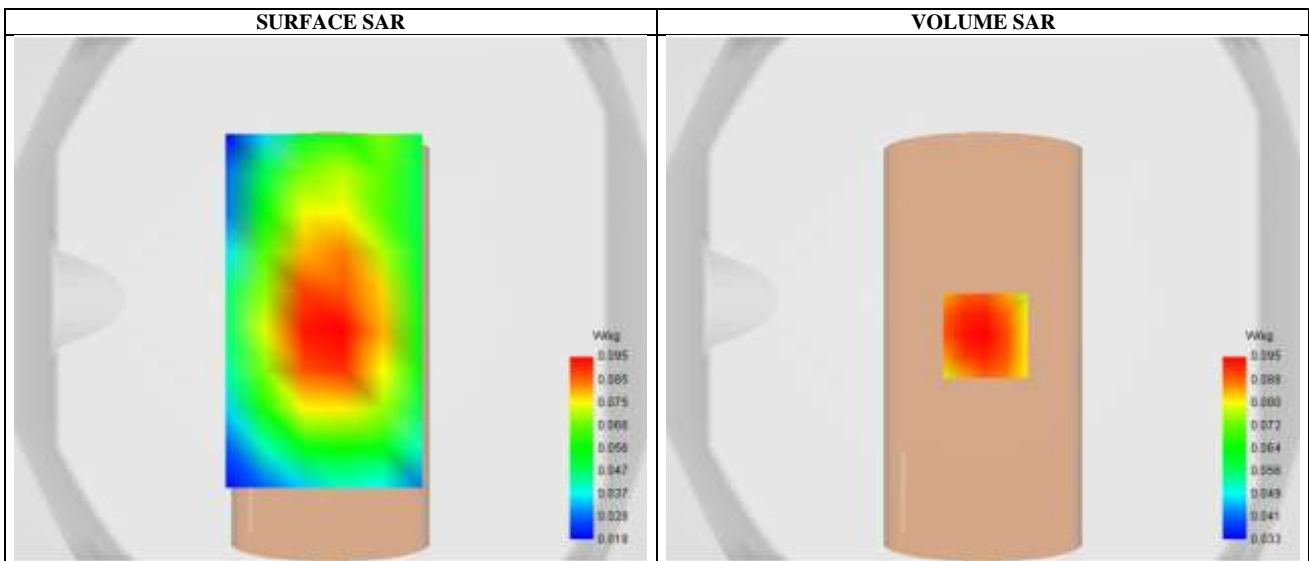


Maximum location: X=1.00, Y=-14.00 ; SAR Peak: 0.11 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.073415
SAR 1g (W/Kg)	0.094796
Variation (%)	-0.090000

E. Z Axis Scan

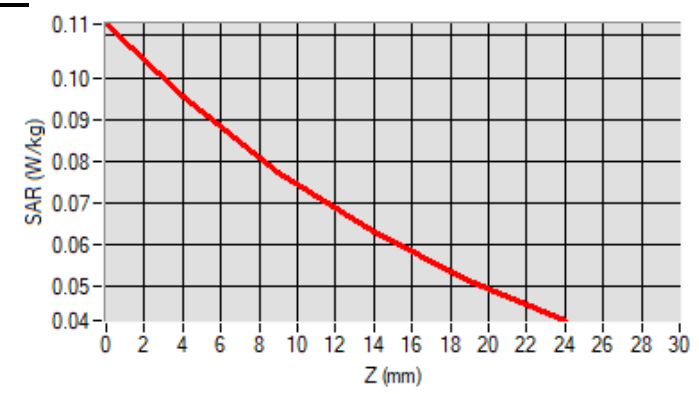

SAR Measurement at LTE band 41 (Body, Validation Plane)

Date of measurement: 5/11/2022


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	2.27
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 41
Channels	Middle
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	2595.000000
Relative permittivity (real part)	39.006668
Conductivity (S/m)	1.954660

C. SAR Surface and Volume

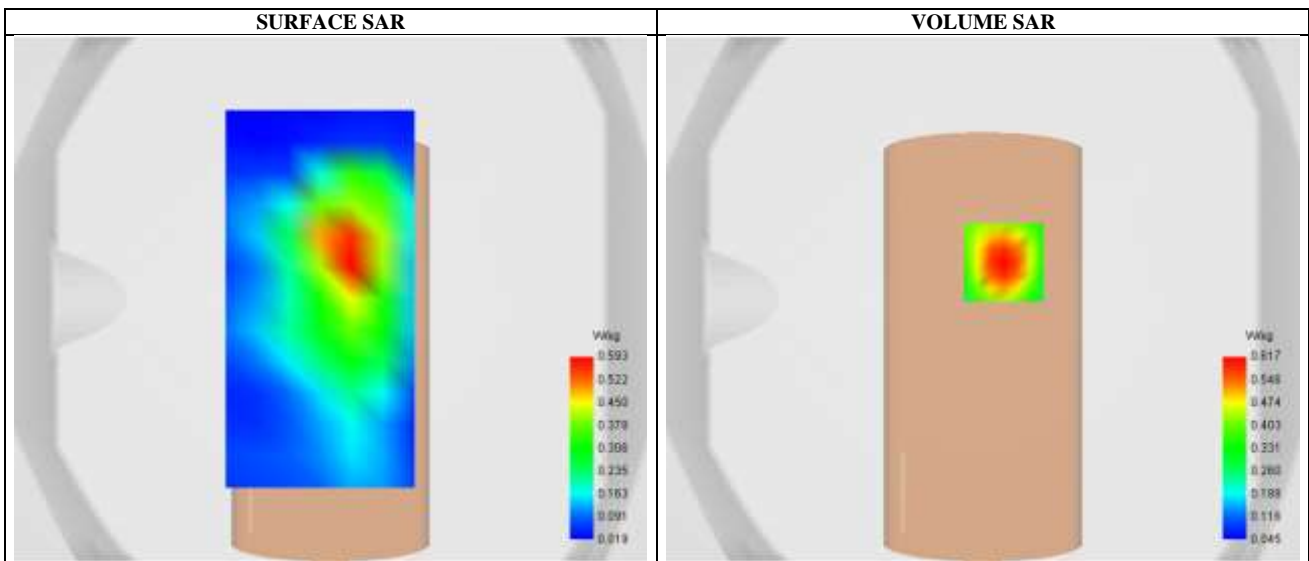


Maximum location: X=8.00, Y=14.00 ; SAR Peak: 0.93 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.322909
SAR 1g (W/Kg)	0.569802
Variation (%)	1.930000

E. Z Axis Scan

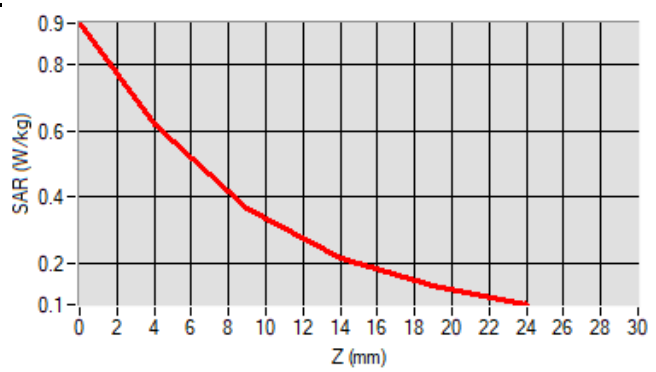

SAR Measurement at CUSTOM (LTE Band 66) (Body, Validation Plane)

Date of measurement: 2/11/2022


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	2.05
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 66
Channels	Low
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1720.000000
Relative permittivity (real part)	41.104411
Conductivity (S/m)	1.371227

C. SAR Surface and Volume

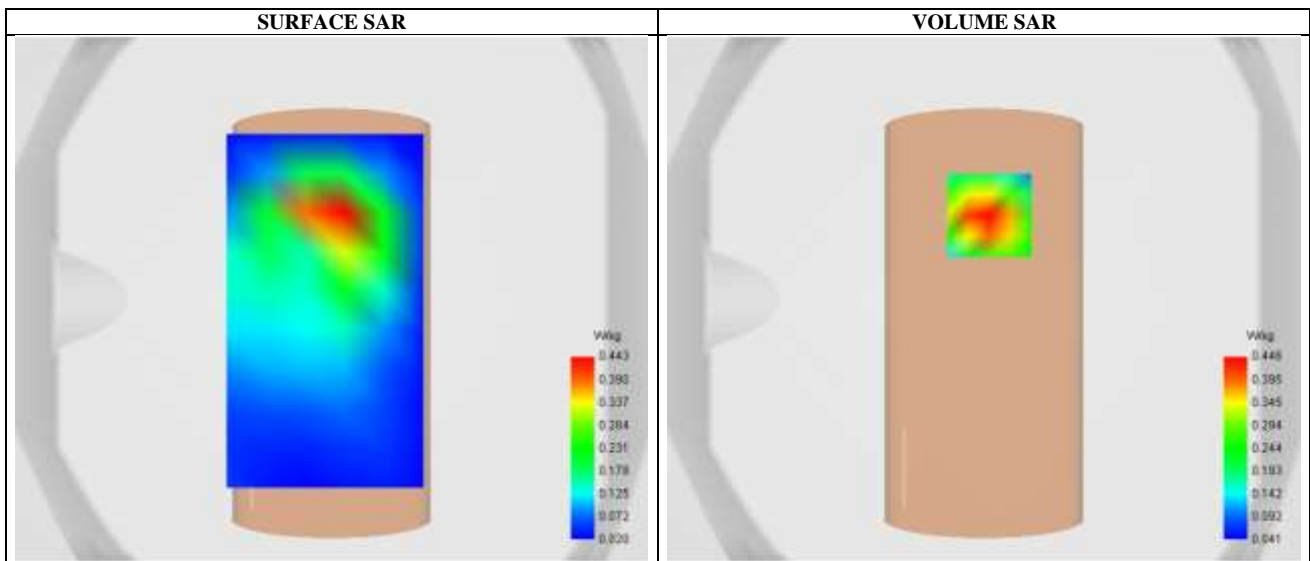


Maximum location: X=2.00, Y=32.00 ; SAR Peak: 0.67 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.241615
SAR 1g (W/Kg)	0.419877
Variation (%)	-0.730000

E. Z Axis Scan

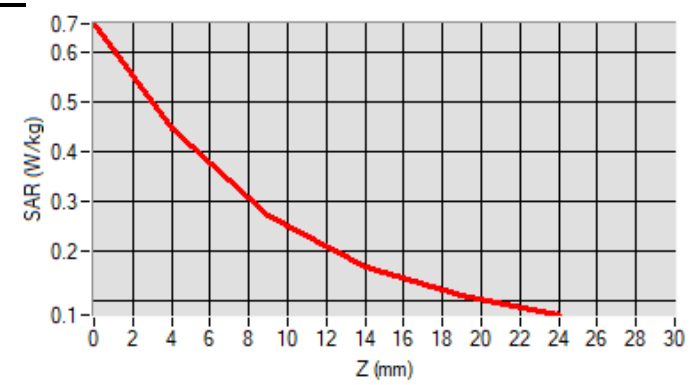

SAR Measurement at IEEE 802.11b ISM (Body, Validation Plane)

Date of measurement: 5/10/2022


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	2.46
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	IEEE 802.11b ISM
Channels	Middle
Signal	IEEE802.b (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	2437.000000
Relative permittivity (real part)	38.860024
Conductivity (S/m)	1.768041

C. SAR Surface and Volume

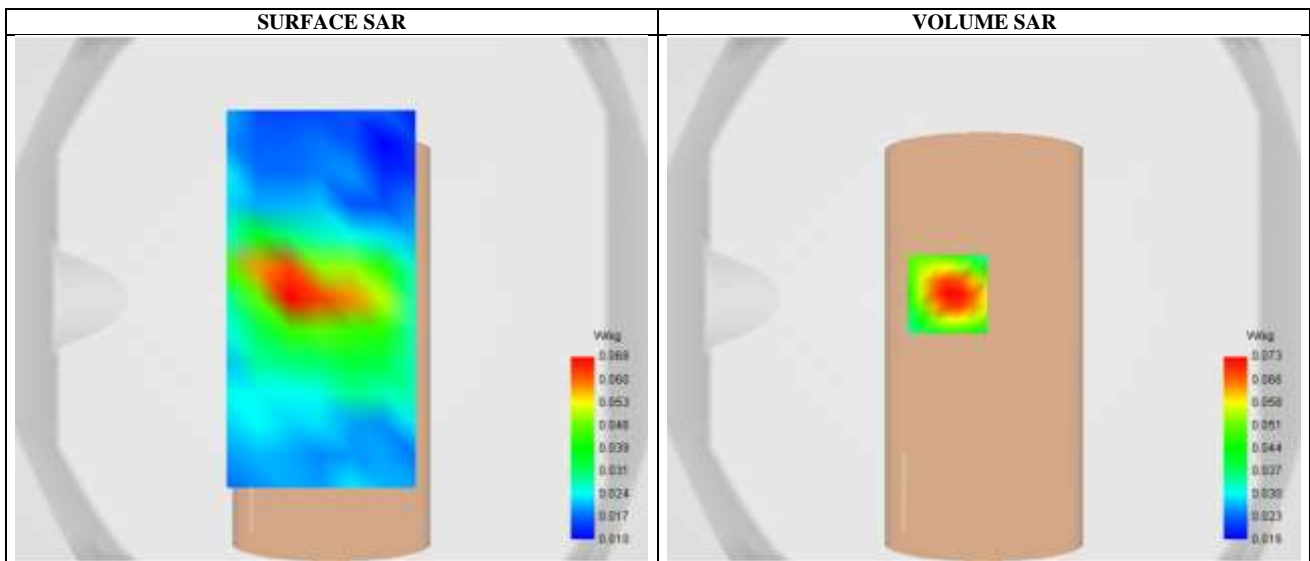


Maximum location: X=-14.00, Y=2.00 ; SAR Peak: 0.11 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.043939
SAR 1g (W/Kg)	0.068408
Variation (%)	-4.890000

E. Z Axis Scan

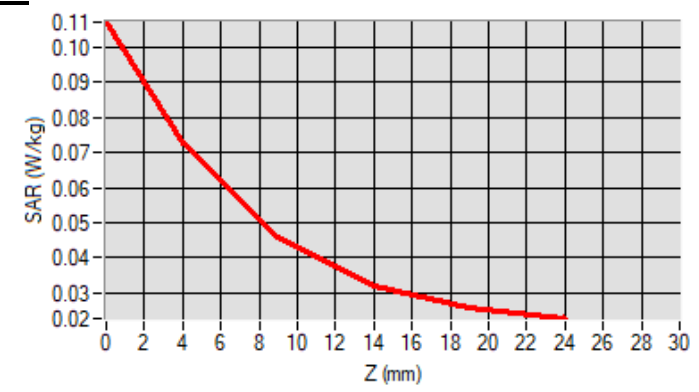

SAR Measurement at CUSTOM (5.2GHz 802.11a) (Body, Validation Plane)

Date of measurement: 8/11/2022


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	1.71
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm,Complete
Phantom	Validation plane
Device Position	Body
Band	IEEE 802.11a
Channels	Low
Signal	IEEE802.11a (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	5180.000000
Relative permittivity (real part)	35.220000
Conductivity (S/m)	4.563860

C. SAR Surface and Volume

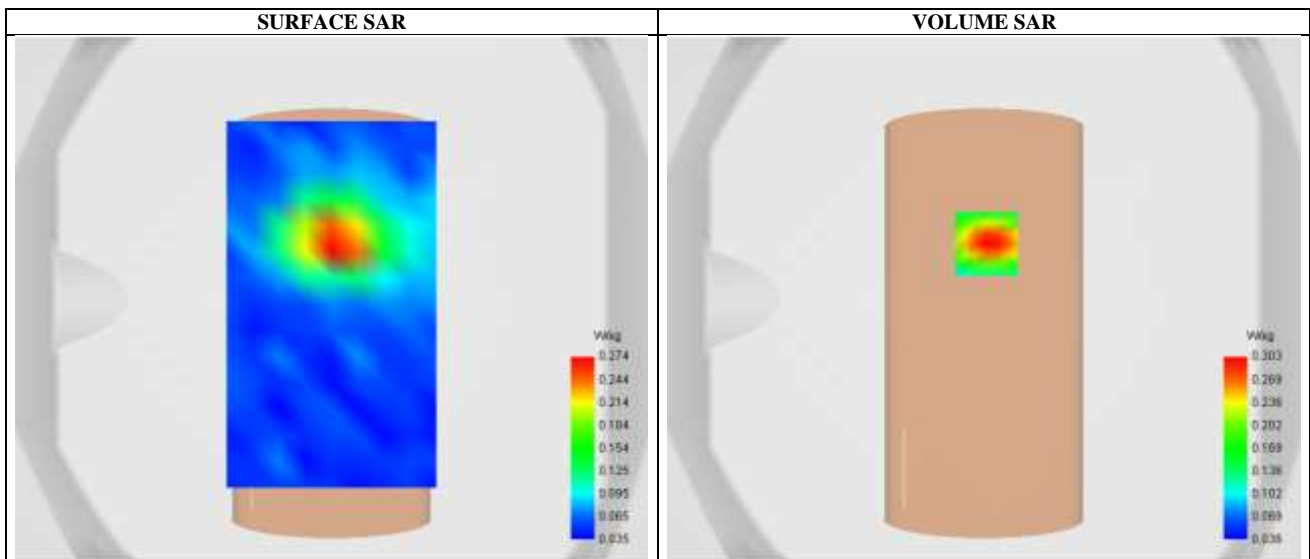


Maximum location: X=1.00, Y=21.00 ; SAR Peak: 0.48 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.103654
SAR 1g (W/Kg)	0.196783
Variation (%)	0.180000

E. Z Axis Scan

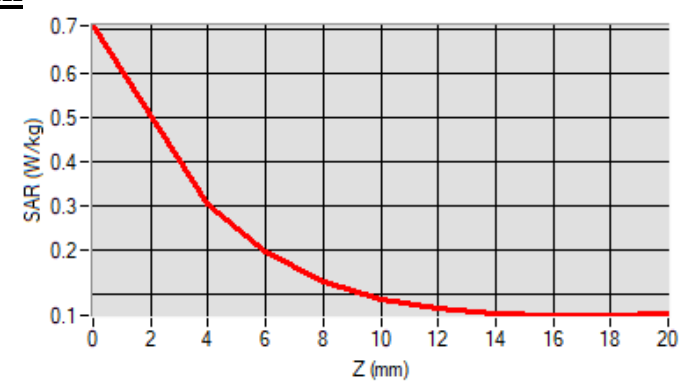

SAR Measurement at CUSTOM (5.8GHz 802.11a) (Body, Validation Plane)

Date of measurement: 8/11/2022


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	1.94
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm,Complete
Phantom	Validation plane
Device Position	Body
Band	IEEE 802.11a
Channels	High
Signal	IEEE802.11a (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	5825.000000
Relative permittivity (real part)	34.724965
Conductivity (S/m)	5.176477

C. SAR Surface and Volume

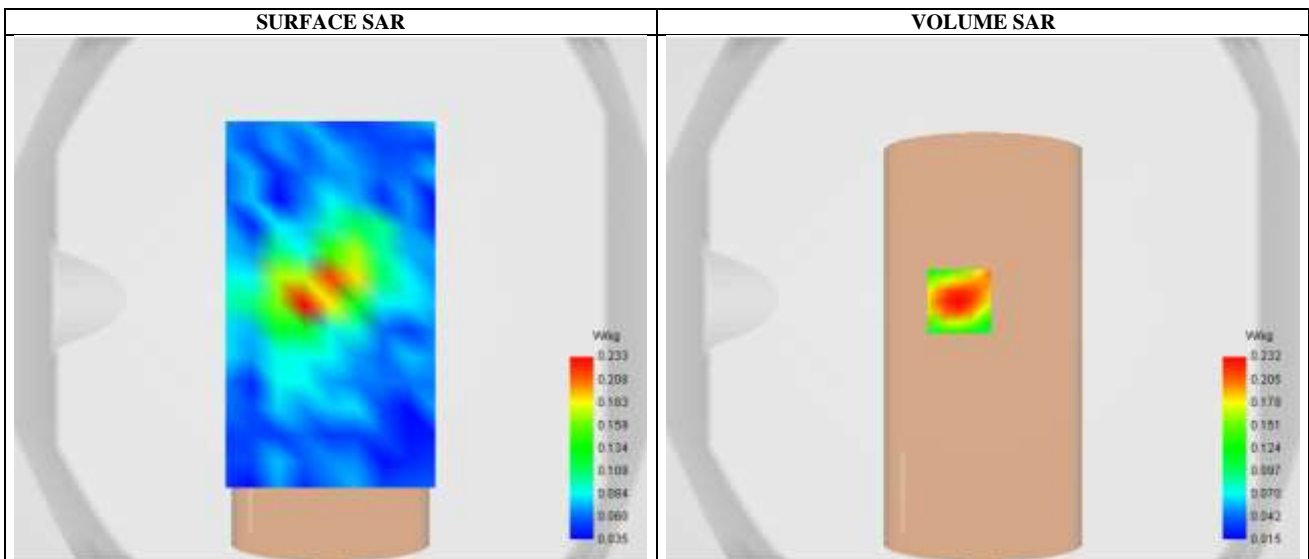


Maximum location: X=-9.00, Y=-1.00 ; SAR Peak: 0.35 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.097571
SAR 1g (W/Kg)	0.161604
Variation (%)	-0.510000

E. Z Axis Scan

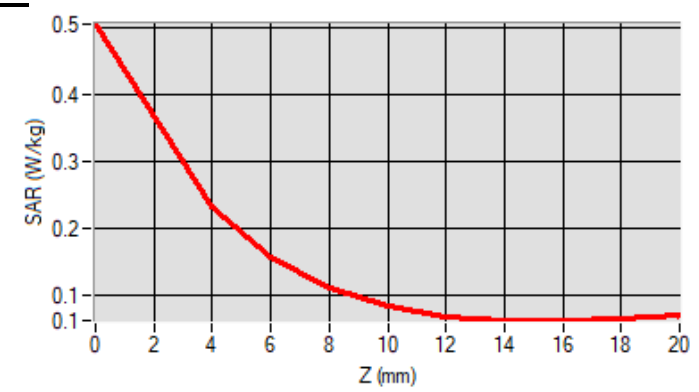

SAR Measurement at Bluetooth (Body, Validation Plane)

Date of measurement: 5/10/2022


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	2.46
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	Bluetooth
Channels	Middle
Signal	Bluetooth (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	2441.000000
Relative permittivity (real part)	38.873994
Conductivity (S/m)	1.761554

C. SAR Surface and Volume

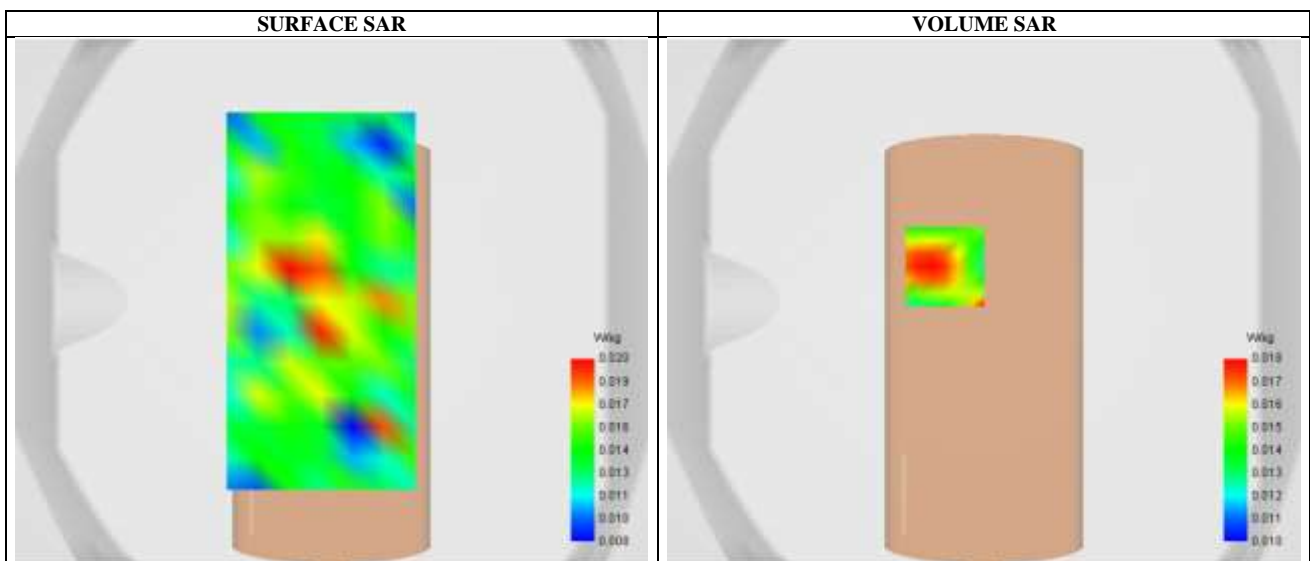


Maximum location: X=-15.00, Y=13.00 ; SAR Peak: 0.03 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.015511
SAR 1g (W/Kg)	0.016600
Variation (%)	-3.640000

E. Z Axis Scan

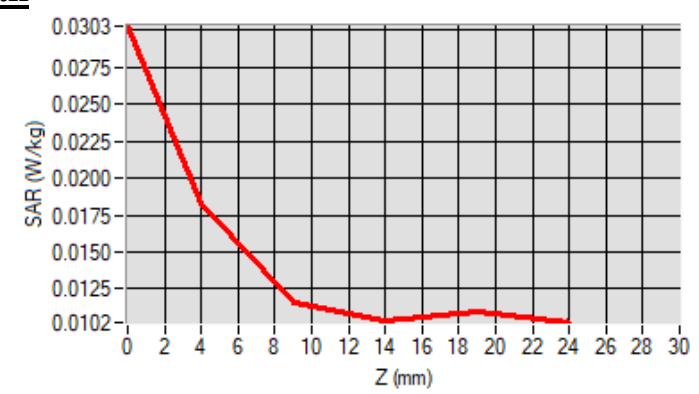

SAR Measurement at CUSTOM (GPRS19004Txslot) (Body, Validation Plane)

Date of measurement: 2/11/2022


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	2.00
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	Middle
Signal	TDMA (Crest factor: 2.0)

B. Permittivity

Frequency (MHz)	1880.000000
Relative permittivity (real part)	40.680000
Conductivity (S/m)	1.423341

C. SAR Surface and Volume

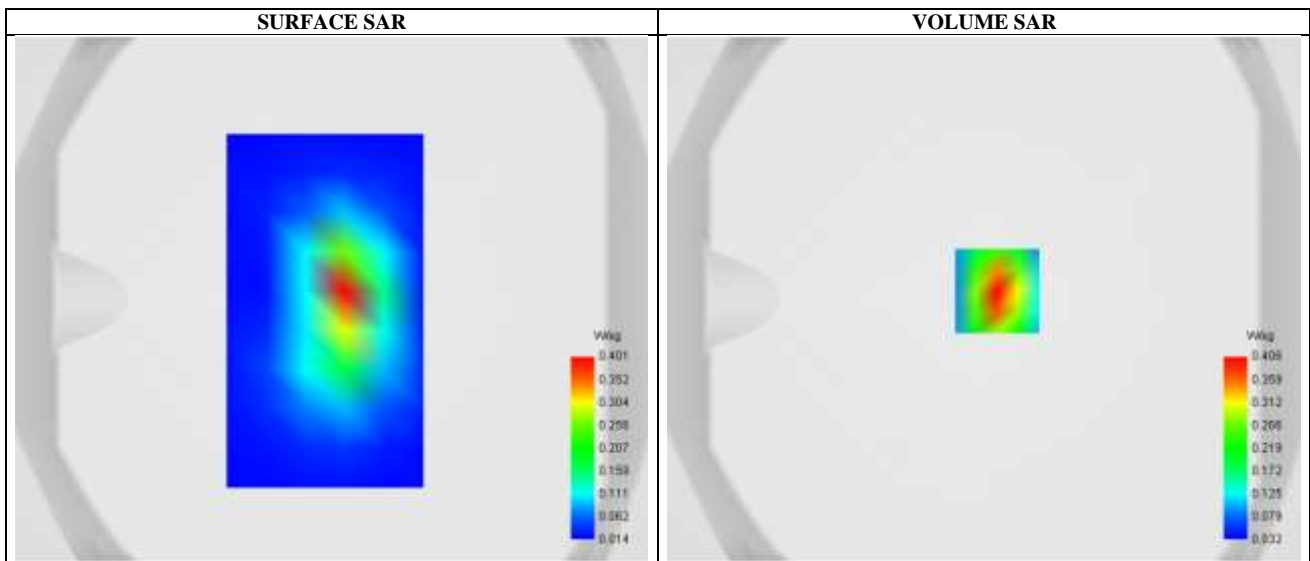


Maximum location: X=5.00, Y=3.00 ; SAR Peak: 0.60 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.204087
SAR 1g (W/Kg)	0.372335
Variation (%)	-2.260000

E. Z Axis Scan

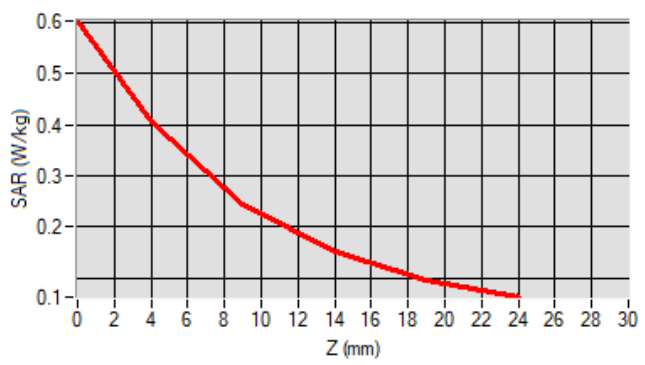

SAR Measurement at Band2 WCDMA1900 (Body, Validation Plane)

Date of measurement: 2/11/2022


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	2.00
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	Band2_WCDMA1900
Channels	Middle
Signal	WCDMA (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1880.000000
Relative permittivity (real part)	40.680000
Conductivity (S/m)	1.422039

C. SAR Surface and Volume

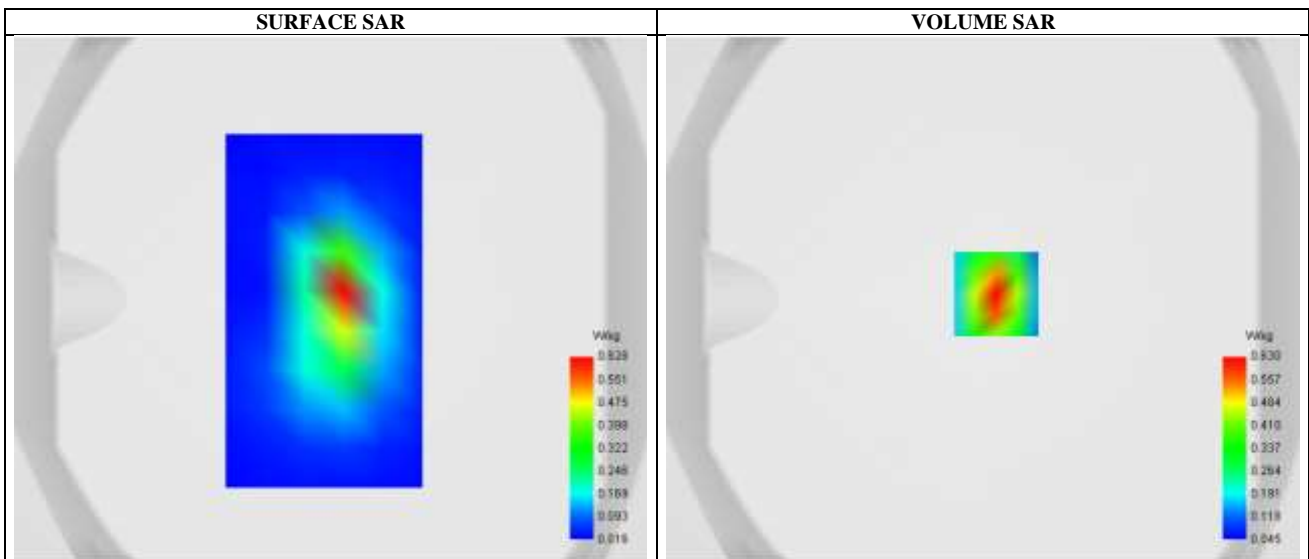


Maximum location: X=5.00, Y=2.00 ; SAR Peak: 0.95 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.312329
SAR 1g (W/Kg)	0.577263
Variation (%)	0.500000

E. Z Axis Scan

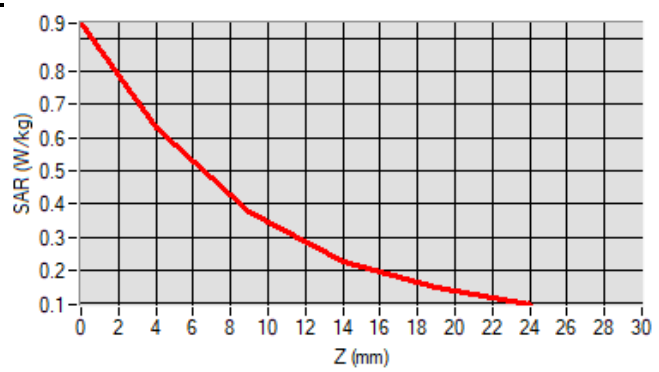

SAR Measurement at CUSTOM (WCDMA 1700) (Body, Validation Plane)

Date of measurement: 2/11/2022


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	2.05
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	Band4_WCDMA1700
Channels	Middle
Signal	WCDMA (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1732.599976
Relative permittivity (real part)	41.224034
Conductivity (S/m)	1.384441

C. SAR Surface and Volume

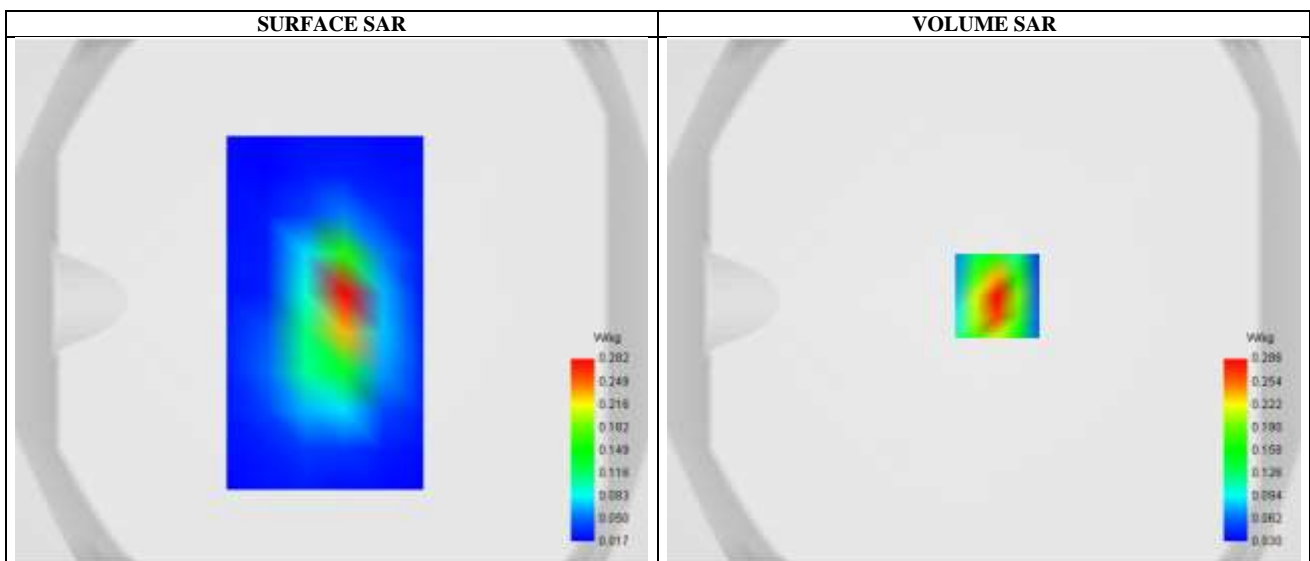


Maximum location: X=5.00, Y=2.00 ; SAR Peak: 0.35 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.124465
SAR 1g (W/Kg)	0.218924
Variation (%)	-0.640000

E. Z Axis Scan

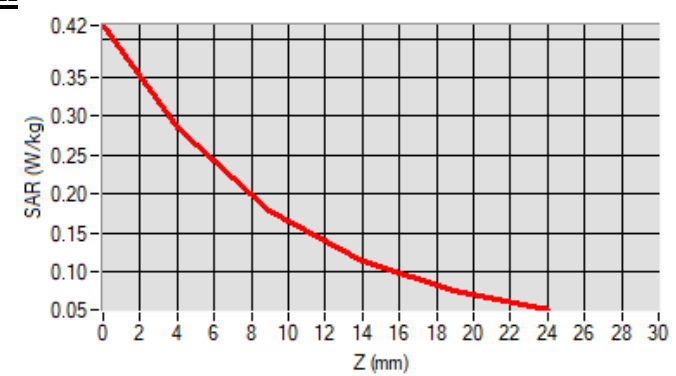

SAR Measurement at LTE band 2 (Body, Validation Plane)

Date of measurement: 2/11/2022


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	2.00
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 2
Channels	Middle
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1880.000000
Relative permittivity (real part)	40.680000
Conductivity (S/m)	1.422039

C. SAR Surface and Volume

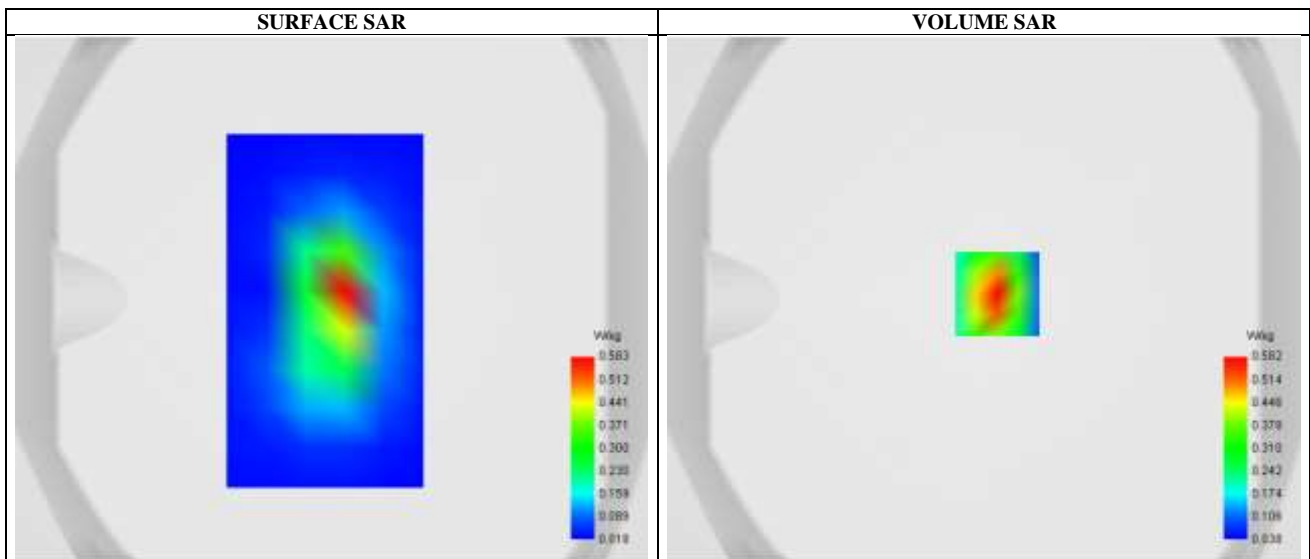


Maximum location: X=5.00, Y=2.00 ; SAR Peak: 0.88 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.291862
SAR 1g (W/Kg)	0.537623
Variation (%)	-0.790000

E. Z Axis Scan

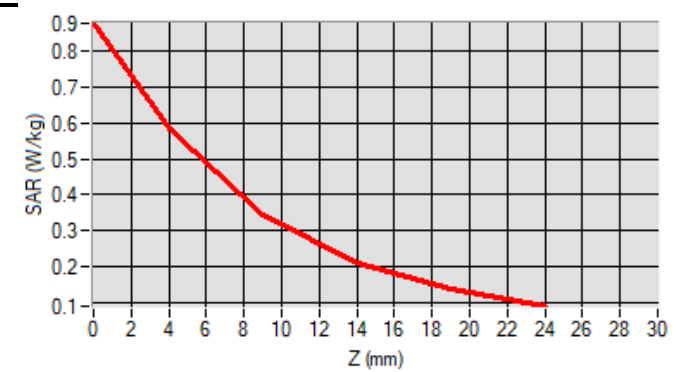

SAR Measurement at CUSTOM (LTE Band 66) (Body, Validation Plane)

Date of measurement: 2/11/2022


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	2.05
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 66
Channels	Low
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1720.000000
Relative permittivity (real part)	41.104411
Conductivity (S/m)	1.371227

C. SAR Surface and Volume

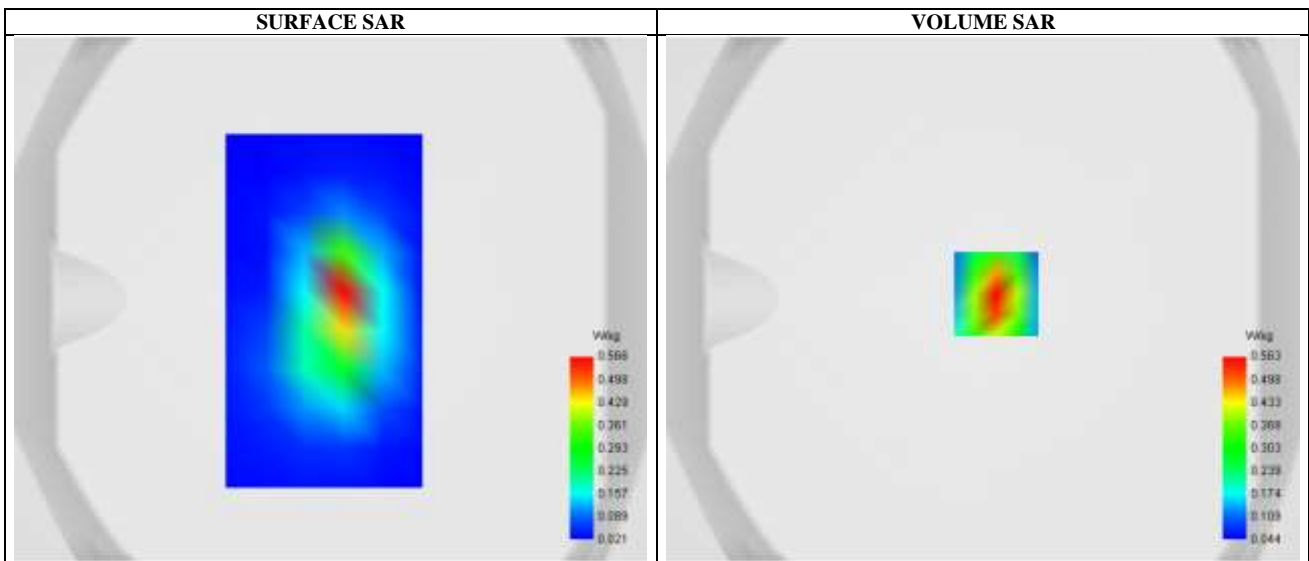

Maximum location: X=5.00, Y=2.00 ; SAR Peak: 0.83 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.285712
SAR 1g (W/Kg)	0.517756
Variation (%)	0.780000

E. Z Axis Scan

