

# TEST REPORT

Reference No..... : WTS20S03007917W003  
FCC ID ..... : 2ADYY-CD7  
Applicant..... : TECNO MOBILE LIMITED  
Address..... : ROOM 604 6/F SOUTH TOWER WORLD, FINANCE CTR  
HARBOUR CITY 17 CANTON ROAD TST KL, Hong Kong  
Manufacturer ..... : SHENZHEN TECNO TECHNOLOGY CO.,LTD.  
Address..... : 101, Building 24, Waijing Industrial Park, Fumin Community,  
Fucheng Street, Longhua District, Shenzhen City, P.R. China  
Product..... : Mobile Phone  
Model(s) ..... : CD7  
Brand Name..... : TECNO  
Standards..... : FCC CFR47 Part 15.247:2018  
Date of Receipt sample .... : 2020-03-09  
Date of Test ..... : 2020-03-10 to 2020-03-19  
Date of Issue..... : 2020-03-20  
Test Result..... : Pass

## Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

## Prepared By:

**Waltek Services (Shenzhen) Co., Ltd.**

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen,  
Guangdong, China

Tel :+86-755-83551033

Fax:+86-755-83552400

Compiled by:

Approved by:

*Ford Wang*

Ford Wang / Project Engineer



*Philip Zhong*

Philip Zhong / Manager

## 2 Contents

|                                                              | <b>Page</b> |
|--------------------------------------------------------------|-------------|
| <b>1 COVER PAGE.....</b>                                     | <b>1</b>    |
| <b>2 CONTENTS .....</b>                                      | <b>2</b>    |
| <b>3 REVISION HISTORY .....</b>                              | <b>3</b>    |
| <b>4 GENERAL INFORMATION.....</b>                            | <b>4</b>    |
| 4.1 GENERAL DESCRIPTION OF E.U.T. ....                       | 4           |
| 4.2 DETAILS OF E.U.T. ....                                   | 4           |
| 4.3 CHANNEL LIST .....                                       | 5           |
| 4.4 TEST MODE .....                                          | 6           |
| 4.5 TEST FACILITY.....                                       | 7           |
| <b>5 TEST SUMMARY .....</b>                                  | <b>8</b>    |
| <b>6 EQUIPMENT USED DURING TEST .....</b>                    | <b>9</b>    |
| 6.1 EQUIPMENTS LIST .....                                    | 9           |
| 6.2 DESCRIPTION OF SUPPORT UNITS .....                       | 10          |
| 6.3 MEASUREMENT UNCERTAINTY .....                            | 10          |
| 6.4 TEST EQUIPMENT CALIBRATION .....                         | 10          |
| <b>7 CONDUCTED EMISSION .....</b>                            | <b>11</b>   |
| 7.1 E.U.T. OPERATION .....                                   | 11          |
| 7.2 EUT SETUP.....                                           | 11          |
| 7.3 MEASUREMENT DESCRIPTION .....                            | 11          |
| 7.4 CONDUCTED EMISSION TEST RESULT .....                     | 12          |
| <b>8 RADIATED EMISSIONS.....</b>                             | <b>16</b>   |
| 8.1 EUT OPERATION.....                                       | 16          |
| 8.2 TEST SETUP .....                                         | 17          |
| 8.3 SPECTRUM ANALYZER SETUP .....                            | 18          |
| 8.4 TEST PROCEDURE .....                                     | 19          |
| 8.5 CORRECTED AMPLITUDE & MARGIN CALCULATION .....           | 19          |
| 8.6 SUMMARY OF TEST RESULTS .....                            | 20          |
| <b>9 CONDUCTED SPURIOUS EMISSIONS.....</b>                   | <b>36</b>   |
| 9.1 TEST PROCEDURE .....                                     | 36          |
| 9.2 TEST RESULT .....                                        | 37          |
| <b>10 BAND EDGE MEASUREMENT .....</b>                        | <b>53</b>   |
| 10.1 TEST PROCEDURE.....                                     | 53          |
| 10.2 TEST RESULT .....                                       | 54          |
| <b>11 6 DB BANDWIDTH AND 99% BANDWIDTH MEASUREMENT .....</b> | <b>59</b>   |
| 11.1 TEST PROCEDURE:.....                                    | 59          |
| 11.2 TEST RESULT: .....                                      | 59          |
| <b>12 MAXIMUM PEAK CONDUCTED OUTPUT POWER.....</b>           | <b>68</b>   |
| 12.1 TEST PROCEDURE:.....                                    | 68          |
| 12.2 TEST RESULT: .....                                      | 69          |
| <b>13 DUTY CYCLE.....</b>                                    | <b>78</b>   |
| <b>14 POWER SPECTRAL DENSITY .....</b>                       | <b>79</b>   |
| 14.1 TEST PROCEDURE:.....                                    | 79          |
| 14.2 TEST RESULT: .....                                      | 79          |
| <b>15 ANTENNA REQUIREMENT .....</b>                          | <b>88</b>   |
| <b>16 RF EXPOSURE.....</b>                                   | <b>89</b>   |
| <b>17 PHOTOGRAPHS OF TEST SETUP AND EUT.....</b>             | <b>90</b>   |

### 3 Revision History

| Test report No.        | Date of Receipt sample | Date of Test                | Date of Issue | Purpose  | Comment | Approved |
|------------------------|------------------------|-----------------------------|---------------|----------|---------|----------|
| WTS20S03007<br>917W003 | 2020-03-09             | 2020-03-10<br>to 2020-03-19 | 2020-03-20    | original | -       | Valid    |

## 4 General Information

### 4.1 General Description of E.U.T.

|                                       |                                                                       |
|---------------------------------------|-----------------------------------------------------------------------|
| Product:                              | Mobile Phone                                                          |
| Model(s):                             | CD7                                                                   |
| Model Description:                    | N/A                                                                   |
| GSM Band(s):                          | GSM 850/900/1800/1900MHz                                              |
| GPRS/EGPRS Class:                     | 12                                                                    |
| WCDMA Band(s):                        | FDD Band II/IV/V                                                      |
| LTE Band(s):                          | FDD Band 2/4/5/7                                                      |
| Wi-Fi Specification:                  | 2.4G-802.11b/g/n HT20/n HT40<br>5G-802.11a/ n(HT20/40)/ac(HT20/40/80) |
| Bluetooth Version:                    | Bluetooth v4.0 with BLE                                               |
| GPS:                                  | Support                                                               |
| NFC:                                  | N/A                                                                   |
| Hardware Version:                     | V1.1                                                                  |
| Software Version:                     | CD7-H6214AB-Q-191219V317                                              |
| Highest frequency<br>(Exclude Radio): | 26MHz                                                                 |
| Storage Location:                     | Internal Storage                                                      |
| Note:                                 | N/A                                                                   |

### 4.2 Details of E.U.T.

|                       |                                                                                                            |
|-----------------------|------------------------------------------------------------------------------------------------------------|
| Operation Frequency:  | WiFi:<br>802.11b/g/n HT20: 2412~2462MHz<br>802.11n HT40: 2422~2452MHz<br>BLE:2402-2480MHz                  |
| Max. RF output power: | WiFi(2.4G): 13.72dBm<br>BLE: -4.48dBm                                                                      |
| Type of Modulation:   | WiFi: CCK, OFDM<br>BLE:GFSK                                                                                |
| Antenna installation: | WiFi: internal permanent antenna<br>BLE: internal permanent antenna                                        |
| Antenna Gain:         | WiFi(2.4G): 3.07dBi<br>BLE: 3.07dBi                                                                        |
| Ratings:              | Battery DC 3.85V, 4900mAh<br>DC 5V, 2.0A, charging from adapter<br>(Adapter Input: 100-240V~50/60Hz 0.35A) |
| Adapter:              | Manufacturer: Dongguan Aohai Power Technology CO.,LTD<br>Model No.: A8A-050200U-US1                        |

### 4.3 Channel List

#### WIFI

| Channel No. | Frequency (MHz) | Channel No. | Frequency (MHz) | Channel No. | Frequency (MHz) | Channel No. | Frequency (MHz) |
|-------------|-----------------|-------------|-----------------|-------------|-----------------|-------------|-----------------|
| 1           | 2412            | 2           | 2417            | 3           | 2422            | 4           | 2427            |
| 5           | 2432            | 6           | 2437            | 7           | 2442            | 8           | 2447            |
| 9           | 2452            | 10          | 2457            | 11          | 2462            | 12          | -               |

#### BT BLE

| Channel No. | Frequency (MHz) | Channel No. | Frequency (MHz) | Channel No. | Frequency (MHz) | Channel No. | Frequency (MHz) |
|-------------|-----------------|-------------|-----------------|-------------|-----------------|-------------|-----------------|
| 0           | 2402            | 1           | 2404            | 2           | 2406            | 3           | 2408            |
| 4           | 2410            | 5           | 2412            | 6           | 2414            | 7           | 2416            |
| 8           | 2418            | 9           | 2420            | 10          | 2422            | 11          | 2424            |
| 12          | 2426            | 13          | 2428            | 14          | 2430            | 15          | 2432            |
| 16          | 2434            | 17          | 2436            | 18          | 2438            | 19          | 2440            |
| 20          | 2442            | 21          | 2444            | 22          | 2446            | 23          | 2448            |
| 24          | 2450            | 25          | 2452            | 26          | 2454            | 27          | 2456            |
| 28          | 2458            | 29          | 2460            | 30          | 2462            | 31          | 2464            |
| 32          | 2466            | 33          | 2468            | 34          | 2470            | 35          | 2472            |
| 36          | 2474            | 37          | 2476            | 38          | 2478            | 39          | 2480            |

#### 4.4 Test Mode

Table 1 Tests Carried Out Under FCC part 15.247

| Test Items                     | Mode         | Data Rate | Channel | TX/RX |
|--------------------------------|--------------|-----------|---------|-------|
| Maximum Peak Output Power      | 802.11b      | 1 Mbps    | 1/6/11  | TX    |
|                                | 802.11g      | 6 Mbps    | 1/6/11  | TX    |
|                                | 802.11n HT20 | MCS0      | 1/6/11  | TX    |
|                                | 802.11n HT40 | MCS0      | 3/6/9   | TX    |
| Power Spectral Density         | 802.11b      | 1 Mbps    | 1/6/11  | TX    |
|                                | 802.11g      | 6 Mbps    | 1/6/11  | TX    |
|                                | 802.11n HT20 | MCS0      | 1/6/11  | TX    |
|                                | 802.11n HT40 | MCS0      | 3/6/9   | TX    |
| 6dB Bandwidth                  | 802.11b      | 1 Mbps    | 1/6/11  | TX    |
|                                | 802.11g      | 6 Mbps    | 1/6/11  | TX    |
|                                | 802.11n HT20 | MCS0      | 1/6/11  | TX    |
|                                | 802.11n HT40 | MCS0      | 3/6/9   | TX    |
| Band Edge                      | 802.11b      | 1 Mbps    | 1/6/11  | TX    |
|                                | 802.11g      | 6 Mbps    | 1/6/11  | TX    |
|                                | 802.11n HT20 | MCS0      | 1/6/11  | TX    |
|                                | 802.11n HT40 | MCS0      | 3/6/9   | TX    |
| Transmitter Spurious Emissions | 802.11b      | 1 Mbps    | 1/6/11  | TX    |
|                                | 802.11g      | 6 Mbps    | 1/6/11  | TX    |
|                                | 802.11n HT20 | MCS0      | 1/6/11  | TX    |
|                                | 802.11n HT40 | MCS0      | 3/6/9   | TX    |

Table 2 Tests Carried Out Under FCC part 15.247

| Test Items                     | Mode   | Data Rate | Channel | TX/RX |
|--------------------------------|--------|-----------|---------|-------|
| Maximum Peak Output Power      | BT BLE | 1 Mbps    | 0/19/39 | TX    |
| Power Spectral Density         | BT BLE | 1 Mbps    | 0/19/39 | TX    |
| 6dB Bandwidth                  | BT BLE | 1 Mbps    | 0/19/39 | TX    |
| Band Edge                      | BT BLE | 1 Mbps    | 0/19/39 | TX    |
| Transmitter Spurious Emissions | BT BLE | 1 Mbps    | 0/19/39 | TX    |

**Note** :Parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product .

#### 4.5 Test Facility

The test facility has a test site registered with the following organizations:

**ISED CAB identifier: CN0013. Test Firm Registration No.: 7760A.**

Waltek Services(Shenzhen) Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files.

Registration number 7760A, October 15, 2016.

**FCC Designation No.: CN1201. Test Firm Registration No.: 523476.**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration number 523476, September 10, 2019.

## 5 Test Summary

| Test Items                                                        | Test Requirement                    | Result |
|-------------------------------------------------------------------|-------------------------------------|--------|
| Radiated Spurious Emissions                                       | 15.247(d)<br>15.205(a)<br>15.209(a) | PASS   |
| Conducted Spurious Emissions                                      | 15.247(d)                           | PASS   |
| Conducted Emissions                                               | 15.207(a)                           | PASS   |
| 6dB Bandwidth                                                     | 15.247(a)(2)                        | PASS   |
| Maximum Peak Output Power                                         | 15.247(b)(3),(4)                    | PASS   |
| Power Spectral Density                                            | 15.247(e)                           | PASS   |
| Band Edge                                                         | 15.247(d)                           | PASS   |
| Antenna Requirement                                               | 15.203                              | PASS   |
| Maximum Permissible Exposure<br>(Exposure of Humans to RF Fields) | 1.1307(b)(1)                        | PASS   |

Note: All test were performed that the device transmit continue of the 100% duty cycle.

## 6 Equipment Used during Test

### 6.1 Equipments List

| Conducted Emissions Test Site 1#                              |                            |                                  |              |                 |                       |                      |
|---------------------------------------------------------------|----------------------------|----------------------------------|--------------|-----------------|-----------------------|----------------------|
| Item                                                          | Equipment                  | Manufacturer                     | Model No.    | Serial No.      | Last Calibration Date | Calibration Due Date |
| 1.                                                            | EMI Test Receiver          | R&S                              | ESCI         | 100947          | 2019-09-12            | 2020-09-11           |
| 2.                                                            | LISN                       | R&S                              | ENV216       | 101215          | 2019-09-12            | 2020-09-11           |
| 3.                                                            | Cable                      | Top                              | TYPE16(3.5M) | -               | 2019-09-12            | 2020-09-11           |
| Conducted Emissions Test Site 2#                              |                            |                                  |              |                 |                       |                      |
| Item                                                          | Equipment                  | Manufacturer                     | Model No.    | Serial No.      | Last Calibration Date | Calibration Due Date |
| 1.                                                            | EMI Test Receiver          | R&S                              | ESCI         | 101155          | 2019-09-12            | 2020-09-11           |
| 2.                                                            | LISN                       | SCHWARZBECK                      | NSLK 8128    | 8128-289        | 2019-09-12            | 2020-09-11           |
| 3.                                                            | Limiter                    | York                             | MTS-IMP-136  | 261115-001-0024 | 2019-09-12            | 2020-09-11           |
| 4.                                                            | Cable                      | LARGE                            | RF300        | -               | 2019-09-12            | 2020-09-11           |
| 3m Semi-anechoic Chamber for Radiation Emissions Test site 1# |                            |                                  |              |                 |                       |                      |
| Item                                                          | Equipment                  | Manufacturer                     | Model No.    | Serial No.      | Last Calibration Date | Calibration Due Date |
| 1                                                             | Spectrum Analyzer          | R&S                              | FSP          | 100091          | 2019-04-29            | 2020-04-28           |
| 2                                                             | Active Loop Antenna        | Beijing Dazhi                    | ZN30900A     | -               | 2019-04-09            | 2020-04-08           |
| 3                                                             | Trilog Broadband Antenna   | SCHWARZBECK                      | VULB9163     | 336             | 2019-04-09            | 2020-04-08           |
| 4                                                             | Coaxial Cable (below 1GHz) | Top                              | TYPE16(13M)  | -               | 2019-09-12            | 2020-09-11           |
| 5                                                             | Broad-band Horn Antenna    | SCHWARZBECK                      | BBHA 9120 D  | 667             | 2019-04-09            | 2020-04-08           |
| 6                                                             | Broad-band Horn Antenna    | SCHWARZBECK                      | BBHA 9170    | 335             | 2019-04-09            | 2020-04-08           |
| 7                                                             | Broadband Preamplifier     | COMPLIANCE DIRECTION             | PAP-1G18     | 2004            | 2019-04-13            | 2020-04-12           |
| 8                                                             | Coaxial Cable (above 1GHz) | Top                              | 1GHz-25GHz   | EW02014-7       | 2019-04-13            | 2020-04-12           |
| 3m Semi-anechoic Chamber for Radiation Emissions Test site 2# |                            |                                  |              |                 |                       |                      |
| Item                                                          | Equipment                  | Manufacturer                     | Model No.    | Serial No.      | Last Calibration Date | Calibration Due Date |
| 1                                                             | Test Receiver              | R&S                              | ESCI         | 101296          | 2019-04-13            | 2020-04-12           |
| 2                                                             | Trilog Broadband Antenna   | SCHWARZBECK                      | VULB9160     | 9160-3325       | 2019-04-09            | 2020-04-08           |
| 3                                                             | Amplifier                  | Compliance direction systems inc | PAP-0203     | 22024           | 2019-04-13            | 2020-04-12           |
| 4                                                             | Cable                      | HUBER+SUHNER                     | CBL2         | 525178          | 2019-04-13            | 2020-04-12           |

| RF Conducted Testing |                                 |              |           |            |                       |                      |
|----------------------|---------------------------------|--------------|-----------|------------|-----------------------|----------------------|
| Item                 | Equipment                       | Manufacturer | Model No. | Serial No. | Last Calibration Date | Calibration Due Date |
| 1.                   | EMC Analyzer<br>(9k~26.5GHz)    | Agilent      | E7405A    | MY45114943 | 2019-09-12            | 2020-09-11           |
| 2.                   | Spectrum Analyzer<br>(9k-6GHz)  | R&S          | FSL6      | 100959     | 2019-09-12            | 2020-09-11           |
| 3.                   | Signal Analyzer<br>(9k~26.5GHz) | Agilent      | N9010A    | MY50520207 | 2019-09-12            | 2020-09-11           |

## 6.2 Description of Support Units

| Equipment | Manufacturer | Model No. | Series No. |
|-----------|--------------|-----------|------------|
| /         | /            | /         | /          |

## 6.3 Measurement Uncertainty

| Parameter                                       | Uncertainty                             |
|-------------------------------------------------|-----------------------------------------|
| Conducted Emission                              | ± 3.64 dB(AC mains 150KHz~30MHz)        |
| Radiated Spurious Emissions                     | ± 5.08 dB (Bilog antenna 30M~1000MHz)   |
|                                                 | ± 5.47 dB (Horn antenna 1000M~25000MHz) |
| Radio Frequency                                 | ± 1 x 10 <sup>-7</sup> Hz               |
| RF Power                                        | ± 0.42 dB                               |
| RF Power Density                                | ± 0.7dB                                 |
| Conducted Spurious Emissions                    | ± 2.76 dB (9kHz~26500MHz)               |
| Confidence interval: 95%. Confidence factor:k=2 |                                         |

## 6.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

## 7 Conducted Emission

Test Requirement: FCC CFR 47 Part 15 Section 15.207

Test Method: ANSI C63.10:2013

Test Result: PASS

Frequency Range: 150kHz to 30MHz

Class/Severity: Class B

Limit:

| Frequency (MHz) | Limit (dBμV) |           |
|-----------------|--------------|-----------|
|                 | Quasi-peak   | Average   |
| 0.15 to 0.5     | 66 to 56*    | 56 to 46* |
| 0.5 to 5        | 56           | 46        |
| 5 to 30         | 60           | 50        |

### 7.1 E.U.T. Operation

Operating Environment :

Temperature: 21.5 °C

Humidity: 51.9 % RH


Atmospheric Pressure: 101.2kPa

EUT Operation :

The test was performed in TX transmitting mode, the worst data were shown in the report.

### 7.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10.

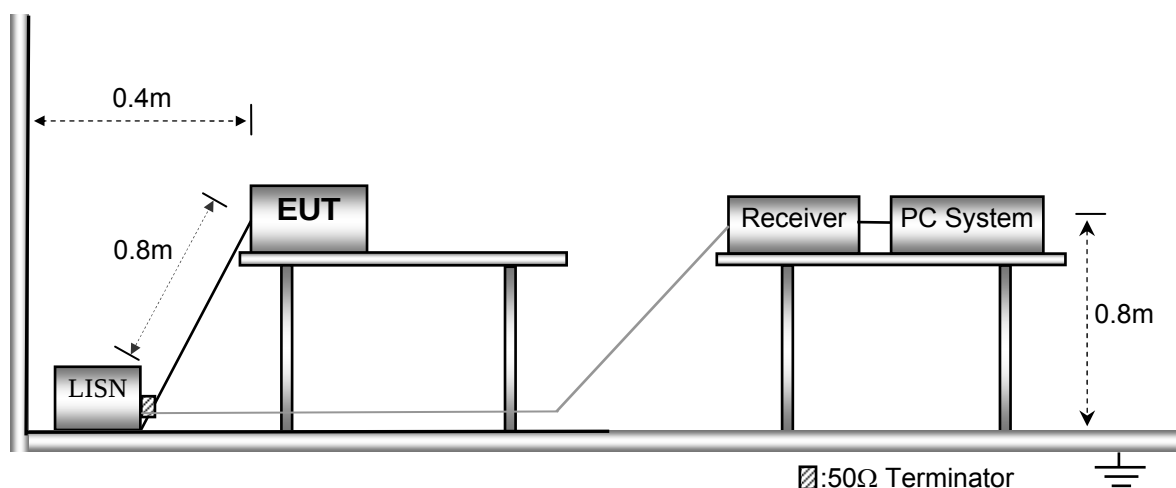

### 7.3 Measurement Description


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

## 7.4 Conducted Emission Test Result

An initial pre-scan was performed on the live and neutral lines.


Worst Mode: WIFI mode ( 802.11b mode low channel )

Live line:

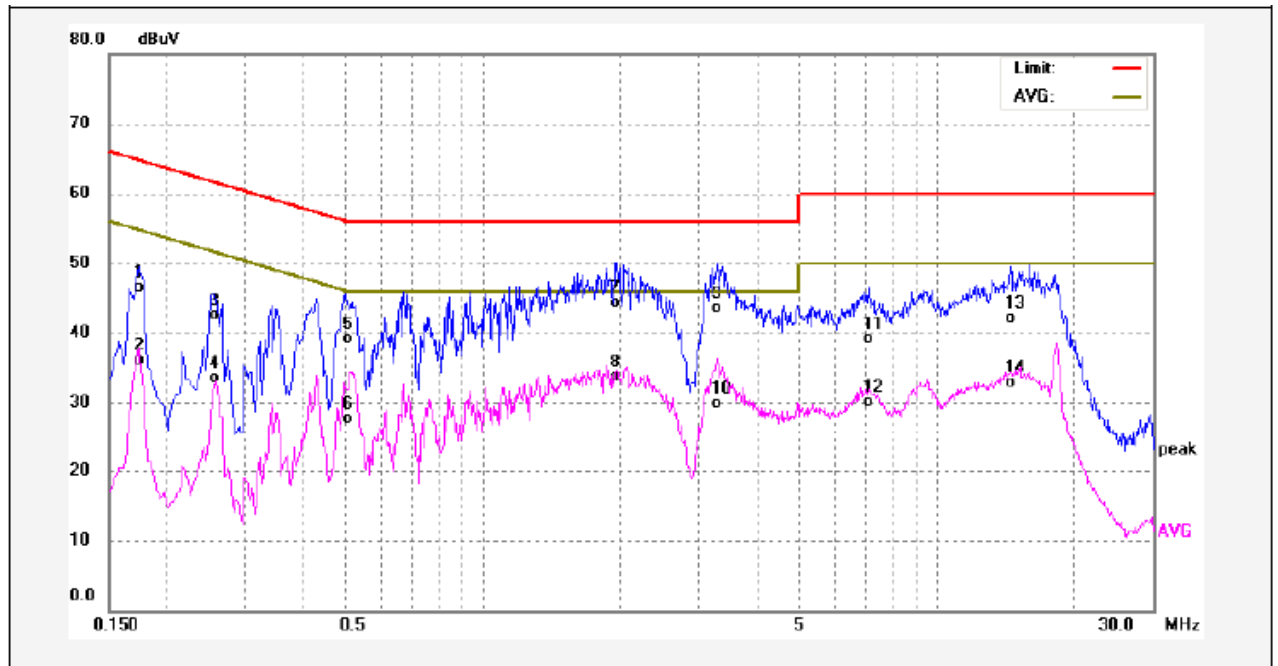

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB) | Result (dBuV) | Limit dBuV | Margin (dB) | Detector | Remark |
|-----|-------------|----------------|-------------|---------------|------------|-------------|----------|--------|
| 1   | 0.1740      | 36.82          | 9.78        | 46.60         | 64.76      | -18.16      | QP       |        |
| 2   | 0.1740      | 26.35          | 9.78        | 36.13         | 54.76      | -18.63      | AVG      |        |
| 3   | 0.2580      | 32.72          | 9.77        | 42.49         | 61.49      | -19.00      | QP       |        |
| 4   | 0.2580      | 23.67          | 9.77        | 33.44         | 51.49      | -18.05      | AVG      |        |
| 5   | 0.5100      | 29.31          | 9.81        | 39.12         | 56.00      | -16.88      | QP       |        |
| 6   | 0.5100      | 17.84          | 9.81        | 27.65         | 46.00      | -18.35      | AVG      |        |
| 7   | 1.9660      | 34.37          | 9.96        | 44.33         | 56.00      | -11.67      | QP       |        |
| 8   | 1.9660      | 23.82          | 9.96        | 33.78         | 46.00      | -12.22      | AVG      |        |
| 9   | 3.2820      | 33.52          | 9.93        | 43.45         | 56.00      | -12.55      | QP       |        |
| 10  | 3.2820      | 20.06          | 9.93        | 29.99         | 46.00      | -16.01      | AVG      |        |
| 11  | 7.0900      | 29.10          | 10.10       | 39.20         | 60.00      | -20.80      | QP       |        |
| 12  | 7.0900      | 20.04          | 10.10       | 30.14         | 50.00      | -19.86      | AVG      |        |
| 13  | 14.5460     | 32.03          | 10.13       | 42.16         | 60.00      | -17.84      | QP       |        |
| 14  | 14.5460     | 22.76          | 10.13       | 32.89         | 50.00      | -17.11      | AVG      |        |


Neutral line:

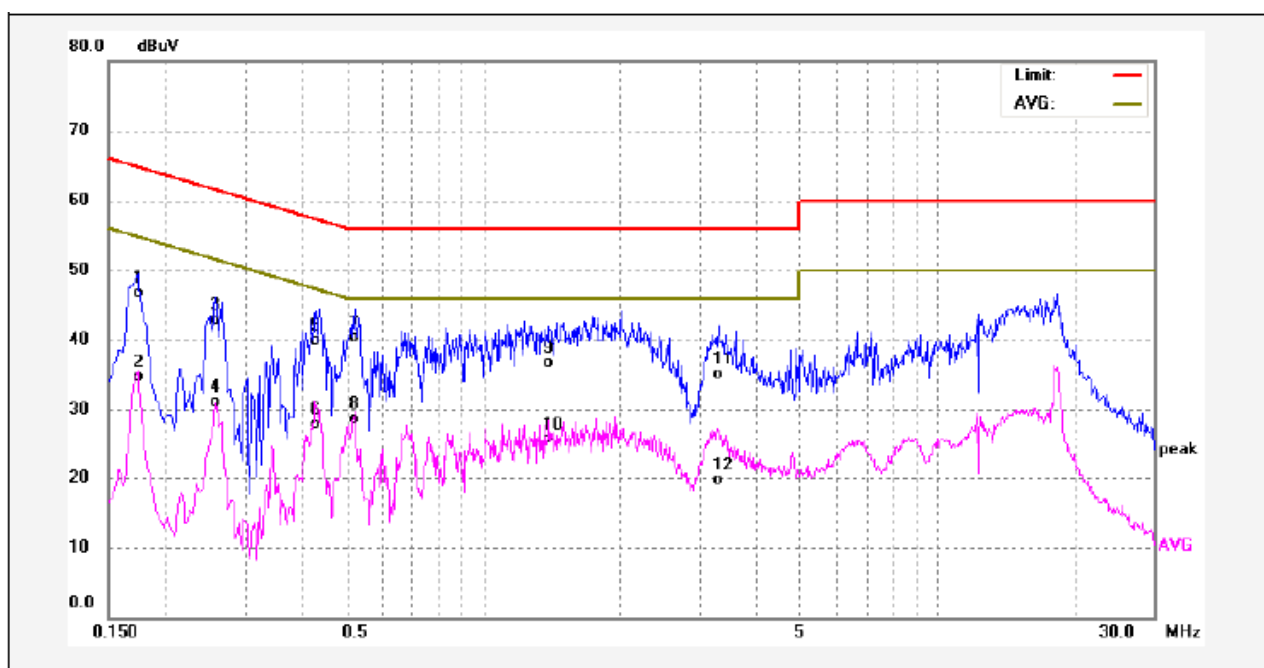

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB) | Result (dBuV) | Limit dBuV | Margin (dB) | Detector | Remark |
|-----|-------------|----------------|-------------|---------------|------------|-------------|----------|--------|
| 1   | 0.1740      | 36.85          | 9.78        | 46.63         | 64.76      | -18.13      | QP       |        |
| 2   | 0.1740      | 24.84          | 9.78        | 34.62         | 54.76      | -20.14      | AVG      |        |
| 3   | 0.2580      | 33.22          | 9.77        | 42.99         | 61.49      | -18.50      | QP       |        |
| 4   | 0.2580      | 21.25          | 9.77        | 31.02         | 51.49      | -20.47      | AVG      |        |
| 5   | 0.4260      | 30.17          | 9.82        | 39.99         | 57.33      | -17.34      | QP       |        |
| 6   | 0.4260      | 18.11          | 9.82        | 27.93         | 47.33      | -19.40      | AVG      |        |
| 7   | 0.5210      | 30.52          | 9.82        | 40.34         | 56.00      | -15.66      | QP       |        |
| 8   | 0.5210      | 18.81          | 9.82        | 28.63         | 46.00      | -17.37      | AVG      |        |
| 9   | 1.4020      | 26.81          | 9.90        | 36.71         | 56.00      | -19.29      | QP       |        |
| 10  | 1.4020      | 15.81          | 9.90        | 25.71         | 46.00      | -20.29      | AVG      |        |
| 11  | 3.2820      | 25.13          | 9.93        | 35.06         | 56.00      | -20.94      | QP       |        |
| 12  | 3.2820      | 9.82           | 9.93        | 19.75         | 46.00      | -26.25      | AVG      |        |


Worst Mode: BLE mode (low channel )

Live line:

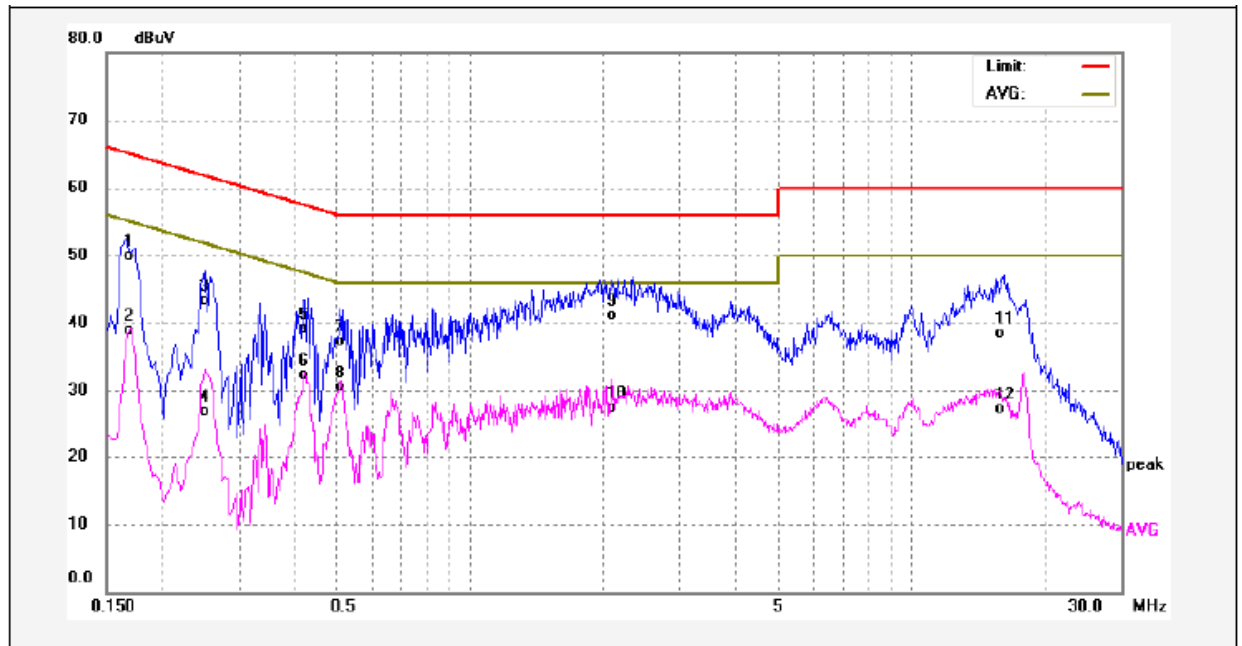

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB) | Result (dBuV) | Limit dBuV | Margin (dB) | Detector | Remark |
|-----|-------------|----------------|-------------|---------------|------------|-------------|----------|--------|
| 1   | 0.1700      | 40.17          | 9.78        | 49.95         | 64.96      | -15.01      | QP       |        |
| 2   | 0.1700      | 29.07          | 9.78        | 38.85         | 54.96      | -16.11      | AVG      |        |
| 3   | 0.2500      | 33.53          | 9.76        | 43.29         | 61.75      | -18.46      | QP       |        |
| 4   | 0.2500      | 17.12          | 9.76        | 26.88         | 51.75      | -24.87      | AVG      |        |
| 5   | 0.4220      | 29.37          | 9.83        | 39.20         | 57.41      | -18.21      | QP       |        |
| 6   | 0.4220      | 22.57          | 9.83        | 32.40         | 47.41      | -15.01      | AVG      |        |
| 7   | 0.5100      | 27.56          | 9.81        | 37.37         | 56.00      | -18.63      | QP       |        |
| 8   | 0.5100      | 20.72          | 9.81        | 30.53         | 46.00      | -15.47      | AVG      |        |
| 9   | 2.1060      | 31.11          | 9.96        | 41.07         | 56.00      | -14.93      | QP       |        |
| 10  | 2.1060      | 17.57          | 9.96        | 27.53         | 46.00      | -18.47      | AVG      |        |
| 11  | 16.2540     | 28.33          | 10.18       | 38.51         | 60.00      | -21.49      | QP       |        |
| 12  | 16.2540     | 17.08          | 10.18       | 27.26         | 50.00      | -22.74      | AVG      |        |

Neutral line:

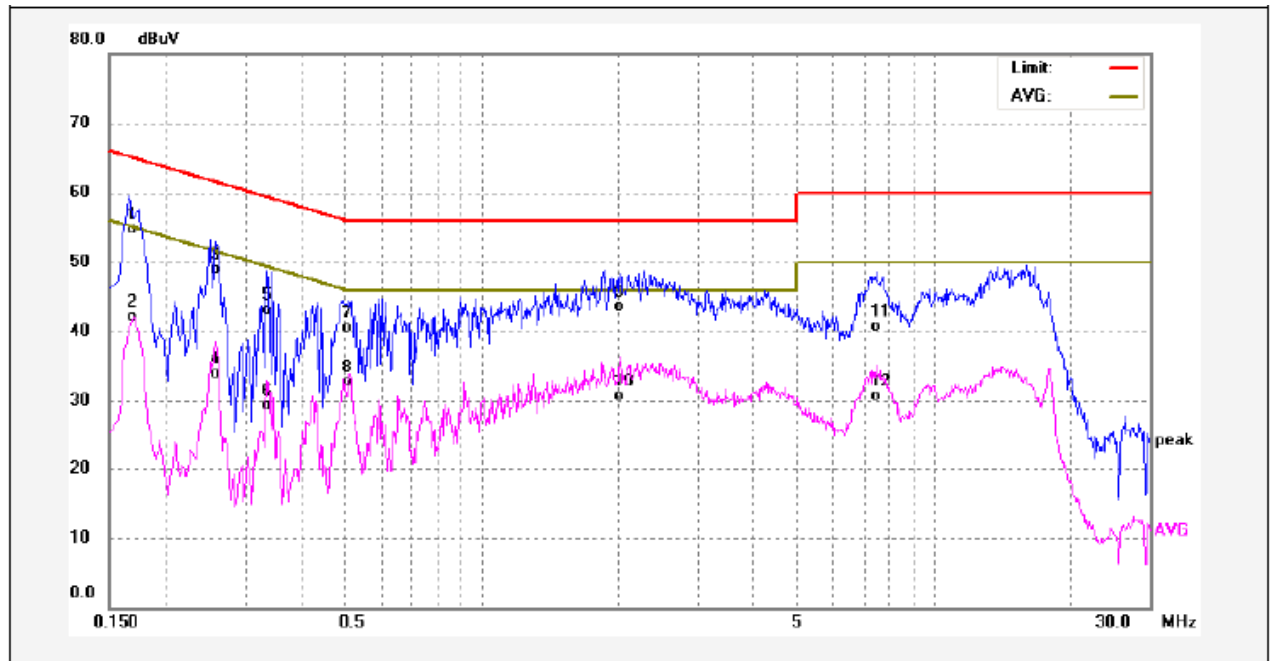

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB) | Result (dBuV) | Limit dBuV | Margin (dB) | Detector | Remark |
|-----|-------------|----------------|-------------|---------------|------------|-------------|----------|--------|
| 1   | 0.1700      | 44.97          | 9.78        | 54.75         | 64.96      | -10.21      | QP       |        |
| 2   | 0.1700      | 32.24          | 9.78        | 42.02         | 54.96      | -12.94      | AVG      |        |
| 3   | 0.2580      | 39.14          | 9.77        | 48.91         | 61.49      | -12.58      | QP       |        |
| 4   | 0.2580      | 24.06          | 9.77        | 33.83         | 51.49      | -17.66      | AVG      |        |
| 5   | 0.3339      | 33.25          | 9.81        | 43.06         | 59.35      | -16.29      | QP       |        |
| 6   | 0.3339      | 19.40          | 9.81        | 29.21         | 49.35      | -20.14      | AVG      |        |
| 7   | 0.5100      | 30.62          | 9.81        | 40.43         | 56.00      | -15.57      | QP       |        |
| 8   | 0.5100      | 22.88          | 9.81        | 32.69         | 46.00      | -13.31      | AVG      |        |
| 9   | 2.0140      | 33.63          | 9.96        | 43.59         | 56.00      | -12.41      | QP       |        |
| 10  | 2.0140      | 20.73          | 9.96        | 30.69         | 46.00      | -15.31      | AVG      |        |
| 11  | 7.4100      | 30.66          | 10.09       | 40.75         | 60.00      | -19.25      | QP       |        |
| 12  | 7.4100      | 20.63          | 10.09       | 30.72         | 50.00      | -19.28      | AVG      |        |

## 8 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;  
ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

| Frequency<br>(MHz) | Field Strength |                 | Field Strength Limit at 3m Measurement Dist |                                |
|--------------------|----------------|-----------------|---------------------------------------------|--------------------------------|
|                    | uV/m           | Distance<br>(m) | uV/m                                        | dBuV/m                         |
| 0.009 ~ 0.490      | 2400/F(kHz)    | 300             | 10000 * 2400/F(kHz)                         | $20\log^{(2400/F(kHz))} + 80$  |
| 0.490 ~ 1.705      | 24000/F(kHz)   | 30              | 100 * 24000/F(kHz)                          | $20\log^{(24000/F(kHz))} + 40$ |
| 1.705 ~ 30         | 30             | 30              | 100 * 30                                    | $20\log^{(30)} + 40$           |
| 30 ~ 88            | 100            | 3               | 100                                         | $20\log^{(100)}$               |
| 88 ~ 216           | 150            | 3               | 150                                         | $20\log^{(150)}$               |
| 216 ~ 960          | 200            | 3               | 200                                         | $20\log^{(200)}$               |
| Above 960          | 500            | 3               | 500                                         | $20\log^{(500)}$               |

### 8.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in TX transmitting mode, the test data were shown in the report.


## 8.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.


The test setup for emission measurement below 30MHz.

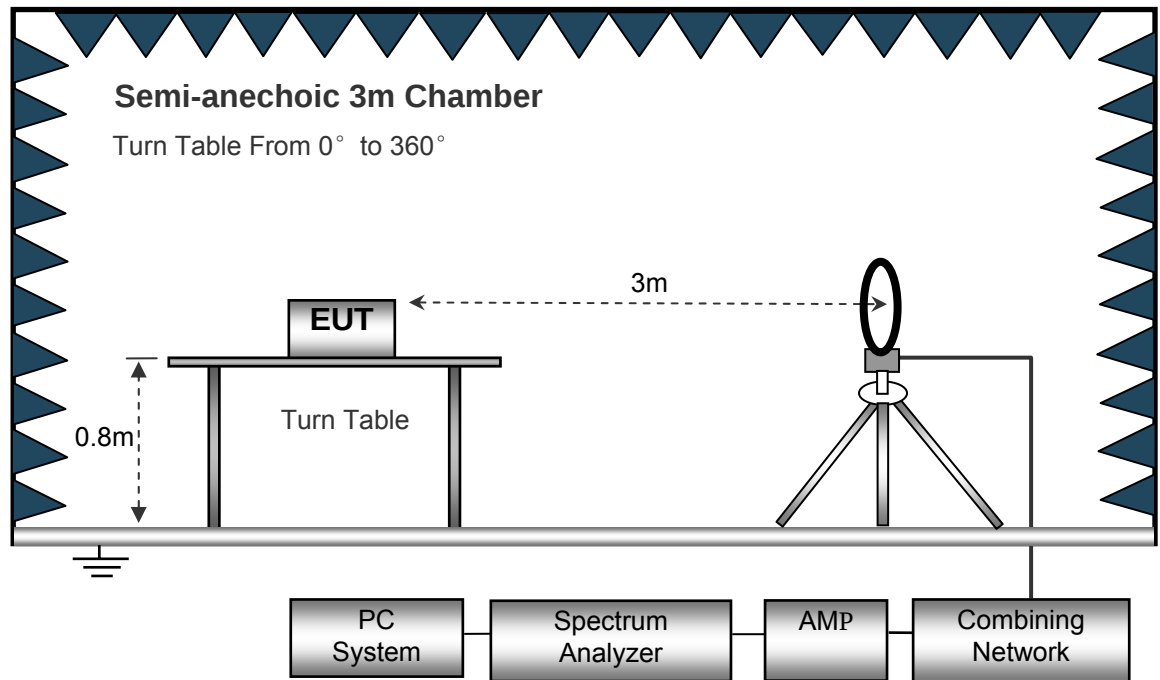

The test setup for emission measurement from 30 MHz to 1 GHz.

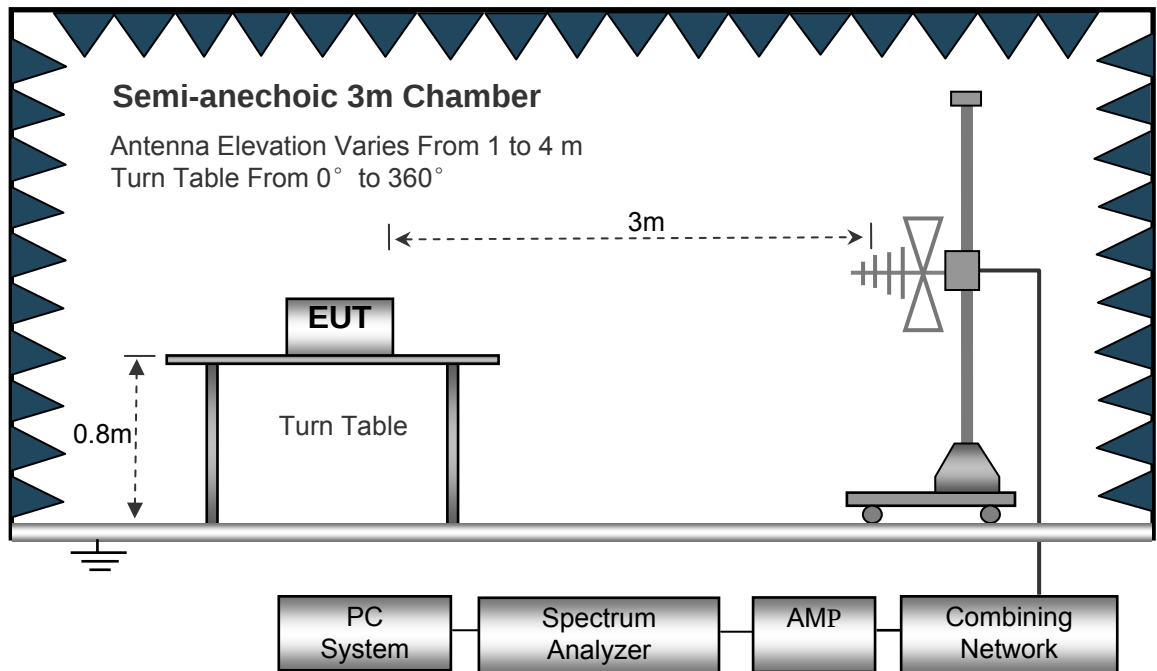

The test setup for emission measurement above 1 GHz.

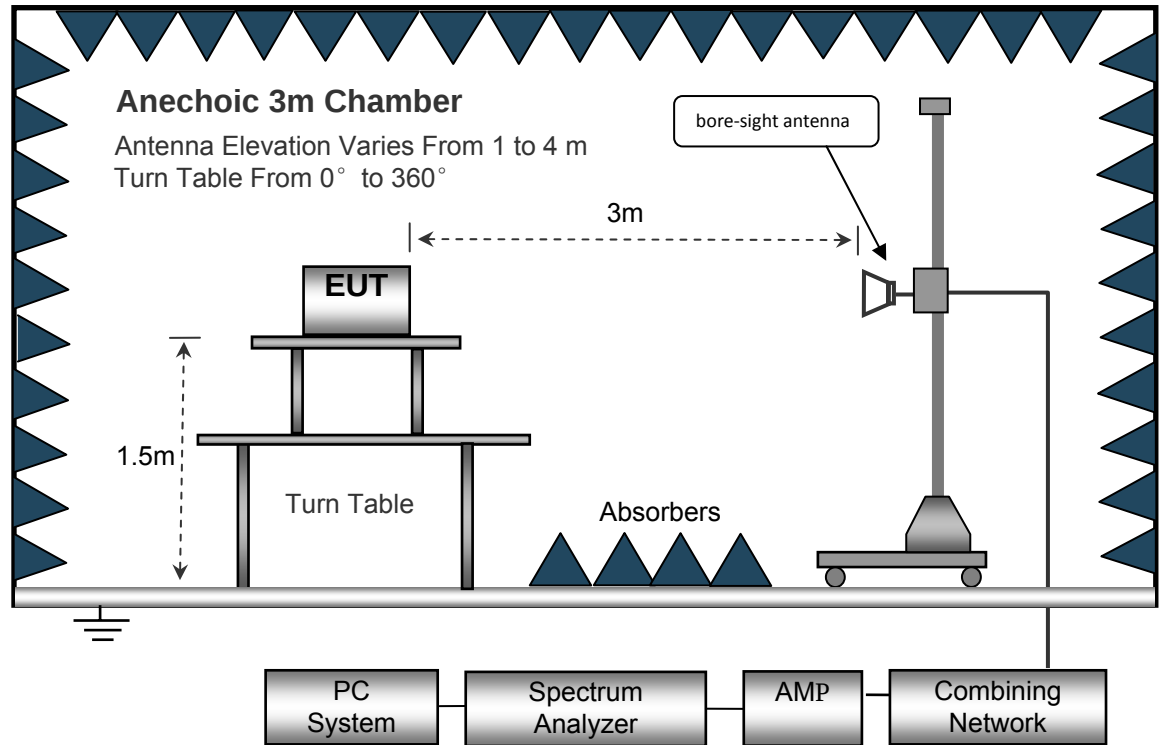

### 8.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed ..... Auto  
IF Bandwidth.....10kHz  
Video Bandwidth.....10kHz  
Resolution Bandwidth.....10kHz

30MHz ~ 1GHz

Sweep Speed ..... Auto  
Detector ..... PK  
Resolution Bandwidth.....100kHz  
Video Bandwidth.....300kHz

Above 1GHz

Sweep Speed ..... Auto  
Detector ..... PK  
Resolution Bandwidth.....1MHz  
Video Bandwidth.....3MHz  
Detector ..... Ave.  
Resolution Bandwidth.....1MHz  
Video Bandwidth.....10Hz

## 8.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in Z axis,so the worst data were shown as follow.
8. A 2.4GHz high –pass filter is used during radiated emissions above 1GHz measurement.

## 8.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

## 8.6 Summary of Test Results

**Wifi:**

**Test Frequency: 9KHz~30MHz**

Remark: only the worst data (802.11b/g/n Low channel mode) were recorded.

| Frequency     | Measurement results dBμV @3m | Detector PK/QP | Correct factor dB/m | Extrapolation factor dB | Measurement results (calculated) dBμV/m @30m | Limits dBμV/m @30m | Margin dB |
|---------------|------------------------------|----------------|---------------------|-------------------------|----------------------------------------------|--------------------|-----------|
| (MHz)         | Measurement results          | Detector       | Correct factor      | Extrapolation factor    | Measurement results (calculated)             | Limits             | Margin    |
| 802.11b       |                              |                |                     |                         |                                              |                    |           |
| 6.025         | 25.45                        | QP             | 21.84               | 40.00                   | 7.29                                         | 29.54              | -22.25    |
| 15.730        | 24.63                        | QP             | 21.35               | 40.00                   | 5.98                                         | 29.54              | -23.56    |
| 25.680        | 24.82                        | QP             | 20.67               | 40.00                   | 5.49                                         | 29.54              | -24.05    |
| 802.11g       |                              |                |                     |                         |                                              |                    |           |
| 6.025         | 25.10                        | QP             | 21.84               | 40.00                   | 6.94                                         | 29.54              | -22.60    |
| 15.730        | 24.76                        | QP             | 21.35               | 40.00                   | 6.11                                         | 29.54              | -23.43    |
| 25.680        | 25.83                        | QP             | 20.67               | 40.00                   | 6.50                                         | 29.54              | -23.04    |
| 802.11n(HT20) |                              |                |                     |                         |                                              |                    |           |
| 6.025         | 25.12                        | QP             | 21.84               | 40.00                   | 6.96                                         | 29.54              | -22.58    |
| 15.730        | 24.89                        | QP             | 21.35               | 40.00                   | 6.24                                         | 29.54              | -23.30    |
| 25.680        | 25.64                        | QP             | 20.67               | 40.00                   | 6.31                                         | 29.54              | -23.23    |
| 802.11n(HT40) |                              |                |                     |                         |                                              |                    |           |
| 6.025         | 25.56                        | QP             | 21.84               | 40.00                   | 7.40                                         | 29.54              | -22.14    |
| 15.730        | 24.93                        | QP             | 21.35               | 40.00                   | 6.28                                         | 29.54              | -23.26    |
| 25.680        | 25.06                        | QP             | 20.67               | 40.00                   | 5.73                                         | 29.54              | -23.81    |

**Test Frequency : 30MHz ~ 8GHz**

| Frequency                | Receiver Reading | Detector    | Turn table Angle | RX Antenna |       | Corrected Factor | Corrected Amplitude | FCC Part 15.247/209/205 |        |
|--------------------------|------------------|-------------|------------------|------------|-------|------------------|---------------------|-------------------------|--------|
|                          |                  |             |                  | Height     | Polar |                  |                     | Limit                   | Margin |
| (MHz)                    | (dBμV)           | (PK/QP/Ave) | Degree           | (m)        | (H/V) | (dB)             | (dBμV/m)            | (dBμV/m)                | (dB)   |
| 11b: Low Channel 2412MHz |                  |             |                  |            |       |                  |                     |                         |        |
| 223.45                   | 41.84            | QP          | 337              | 1.7        | H     | -11.62           | 30.22               | 46.00                   | -15.78 |
| 223.45                   | 37.44            | QP          | 223              | 1.6        | V     | -11.62           | 25.82               | 46.00                   | -20.18 |
| 4824.00                  | 50.40            | PK          | 234              | 1.4        | V     | -1.06            | 49.34               | 74.00                   | -24.66 |
| 4824.00                  | 46.99            | Ave         | 234              | 1.4        | V     | -1.06            | 45.93               | 54.00                   | -8.07  |
| 7236.00                  | 42.87            | PK          | 97               | 2.0        | H     | 1.33             | 44.20               | 74.00                   | -29.80 |
| 7236.00                  | 41.68            | Ave         | 97               | 2.0        | H     | 1.33             | 43.01               | 54.00                   | -10.99 |
| 2310.66                  | 46.90            | PK          | 218              | 1.8        | V     | -13.19           | 33.71               | 74.00                   | -40.29 |
| 2310.66                  | 38.15            | Ave         | 218              | 1.8        | V     | -13.19           | 24.96               | 54.00                   | -29.04 |
| 2362.74                  | 44.82            | PK          | 269              | 1.4        | H     | -13.14           | 31.68               | 74.00                   | -42.32 |
| 2362.74                  | 36.31            | Ave         | 269              | 1.4        | H     | -13.14           | 23.17               | 54.00                   | -30.83 |
| 2494.60                  | 42.56            | PK          | 306              | 1.6        | V     | -13.08           | 29.48               | 74.00                   | -44.52 |
| 2494.60                  | 38.25            | Ave         | 306              | 1.6        | V     | -13.08           | 25.17               | 54.00                   | -28.83 |

| Frequency                   | Receiver Reading | Detector    | Turn table Angle | RX Antenna |       | Corrected Factor | Corrected Amplitude | FCC Part 15.247/209/205 |        |
|-----------------------------|------------------|-------------|------------------|------------|-------|------------------|---------------------|-------------------------|--------|
|                             |                  |             |                  | Height     | Polar |                  |                     | Limit                   | Margin |
| (MHz)                       | (dBμV)           | (PK/QP/Ave) | Degree           | (m)        | (H/V) | (dB)             | (dBμV/m)            | (dBμV/m)                | (dB)   |
| 11b: Middle Channel 2437MHz |                  |             |                  |            |       |                  |                     |                         |        |
| 223.45                      | 41.96            | QP          | 262              | 1.6        | H     | -11.62           | 30.34               | 46.00                   | -15.66 |
| 223.45                      | 36.02            | QP          | 164              | 1.9        | V     | -11.62           | 24.40               | 46.00                   | -21.60 |
| 4874.00                     | 50.93            | PK          | 148              | 1.9        | V     | -0.62            | 50.31               | 74.00                   | -23.69 |
| 4874.00                     | 45.74            | Ave         | 148              | 1.9        | V     | -0.62            | 45.12               | 54.00                   | -8.88  |
| 7311.00                     | 43.95            | PK          | 342              | 1.6        | H     | 2.21             | 46.16               | 74.00                   | -27.84 |
| 7311.00                     | 42.89            | Ave         | 342              | 1.6        | H     | 2.21             | 45.10               | 54.00                   | -8.90  |
| 2346.77                     | 46.84            | PK          | 193              | 1.9        | V     | -13.19           | 33.65               | 74.00                   | -40.35 |
| 2346.77                     | 37.04            | Ave         | 193              | 1.9        | V     | -13.19           | 23.85               | 54.00                   | -30.15 |
| 2363.43                     | 44.87            | PK          | 24               | 1.9        | H     | -13.14           | 31.73               | 74.00                   | -42.27 |
| 2363.43                     | 36.14            | Ave         | 24               | 1.9        | H     | -13.14           | 23.00               | 54.00                   | -31.00 |
| 2496.00                     | 42.64            | PK          | 300              | 1.9        | V     | -13.08           | 29.56               | 74.00                   | -44.44 |
| 2496.00                     | 37.48            | Ave         | 300              | 1.9        | V     | -13.08           | 24.40               | 54.00                   | -29.60 |

| Frequency                 | Receiver Reading | Detector    | Turn table Angle | RX Antenna |       | Corrected Factor | Corrected Amplitude | FCC Part 15.247/209/205 |        |
|---------------------------|------------------|-------------|------------------|------------|-------|------------------|---------------------|-------------------------|--------|
|                           |                  |             |                  | Height     | Polar |                  |                     | Limit                   | Margin |
| (MHz)                     | (dBμV)           | (PK/QP/Ave) | Degree           | (m)        | (H/V) | (dB)             | (dBμV/m)            | (dBμV/m)                | (dB)   |
| 11b: High Channel 2462MHz |                  |             |                  |            |       |                  |                     |                         |        |
| 223.45                    | 43.41            | QP          | 6                | 1.8        | H     | -11.62           | 31.79               | 46.00                   | -14.21 |
| 223.45                    | 35.67            | QP          | 38               | 2.0        | V     | -11.62           | 24.05               | 46.00                   | -21.95 |
| 4924.00                   | 50.71            | PK          | 99               | 1.9        | V     | -0.24            | 50.47               | 74.00                   | -23.53 |
| 4924.00                   | 45.31            | Ave         | 99               | 1.9        | V     | -0.24            | 45.07               | 54.00                   | -8.93  |
| 7386.00                   | 43.33            | PK          | 337              | 1.6        | H     | 2.84             | 46.17               | 74.00                   | -27.83 |
| 7386.00                   | 43.39            | Ave         | 337              | 1.6        | H     | 2.84             | 46.23               | 54.00                   | -7.77  |
| 2342.22                   | 46.97            | PK          | 119              | 1.6        | V     | -13.19           | 33.78               | 74.00                   | -40.22 |
| 2342.22                   | 37.29            | Ave         | 119              | 1.6        | V     | -13.19           | 24.10               | 54.00                   | -29.90 |
| 2374.50                   | 43.26            | PK          | 258              | 1.9        | H     | -13.14           | 30.12               | 74.00                   | -43.88 |
| 2374.50                   | 38.37            | Ave         | 258              | 1.9        | H     | -13.14           | 25.23               | 54.00                   | -28.77 |
| 2487.86                   | 43.04            | PK          | 258              | 1.9        | V     | -13.08           | 29.96               | 74.00                   | -44.04 |
| 2487.86                   | 38.15            | Ave         | 258              | 1.9        | V     | -13.08           | 25.07               | 54.00                   | -28.93 |

| Frequency                | Receiver Reading | Detector    | Turn table Angle | RX Antenna |       | Corrected Factor | Corrected Amplitude | FCC Part 15.247/209/205 |        |
|--------------------------|------------------|-------------|------------------|------------|-------|------------------|---------------------|-------------------------|--------|
|                          |                  |             |                  | Height     | Polar |                  |                     | Limit                   | Margin |
| (MHz)                    | (dBμV)           | (PK/QP/Ave) | Degree           | (m)        | (H/V) | (dB)             | (dBμV/m)            | (dBμV/m)                | (dB)   |
| 11g: Low Channel 2412MHz |                  |             |                  |            |       |                  |                     |                         |        |
| 223.45                   | 44.26            | QP          | 189              | 1.7        | H     | -11.62           | 32.64               | 46.00                   | -13.36 |
| 223.45                   | 34.41            | QP          | 127              | 2.0        | V     | -11.62           | 22.79               | 46.00                   | -23.21 |
| 4824.00                  | 49.61            | PK          | 25               | 1.3        | V     | -1.06            | 48.55               | 74.00                   | -25.45 |
| 4824.00                  | 46.51            | Ave         | 25               | 1.3        | V     | -1.06            | 45.45               | 54.00                   | -8.55  |
| 7236.00                  | 42.31            | PK          | 12               | 1.0        | H     | 1.33             | 43.64               | 74.00                   | -30.36 |
| 7236.00                  | 43.29            | Ave         | 12               | 1.0        | H     | 1.33             | 44.62               | 54.00                   | -9.38  |
| 2340.85                  | 46.70            | PK          | 109              | 1.4        | V     | -13.19           | 33.51               | 74.00                   | -40.49 |
| 2340.85                  | 37.96            | Ave         | 109              | 1.4        | V     | -13.19           | 24.77               | 54.00                   | -29.23 |
| 2379.46                  | 43.25            | PK          | 359              | 1.7        | H     | -13.14           | 30.11               | 74.00                   | -43.89 |
| 2379.46                  | 36.28            | Ave         | 359              | 1.7        | H     | -13.14           | 23.14               | 54.00                   | -30.86 |
| 2492.99                  | 44.23            | PK          | 350              | 1.3        | V     | -13.08           | 31.15               | 74.00                   | -42.85 |
| 2492.99                  | 36.37            | Ave         | 350              | 1.3        | V     | -13.08           | 23.29               | 54.00                   | -30.71 |

| Frequency                   | Receiver Reading | Detector    | Turn table Angle | RX Antenna |       | Corrected Factor | Corrected Amplitude | FCC Part 15.247/209/205 |        |
|-----------------------------|------------------|-------------|------------------|------------|-------|------------------|---------------------|-------------------------|--------|
|                             |                  |             |                  | Height     | Polar |                  |                     | Limit                   | Margin |
| (MHz)                       | (dBμV)           | (PK/QP/Ave) | Degree           | (m)        | (H/V) | (dB)             | (dBμV/m)            | (dBμV/m)                | (dB)   |
| 11g: Middle Channel 2437MHz |                  |             |                  |            |       |                  |                     |                         |        |
| 223.45                      | 45.23            | QP          | 312              | 1.3        | H     | -11.62           | 33.61               | 46.00                   | -12.39 |
| 223.45                      | 34.76            | QP          | 34               | 1.0        | V     | -11.62           | 23.14               | 46.00                   | -22.86 |
| 4874.00                     | 48.67            | PK          | 174              | 1.2        | V     | -0.62            | 48.05               | 74.00                   | -25.95 |
| 4874.00                     | 47.94            | Ave         | 174              | 1.2        | V     | -0.62            | 47.32               | 54.00                   | -6.68  |
| 7311.00                     | 43.53            | PK          | 3                | 1.2        | H     | 2.21             | 45.74               | 74.00                   | -28.26 |
| 7311.00                     | 42.61            | Ave         | 3                | 1.2        | H     | 2.21             | 44.82               | 54.00                   | -9.18  |
| 2332.04                     | 46.12            | PK          | 344              | 1.5        | V     | -13.19           | 32.93               | 74.00                   | -41.07 |
| 2332.04                     | 38.52            | Ave         | 344              | 1.5        | V     | -13.19           | 25.33               | 54.00                   | -28.67 |
| 2386.97                     | 42.84            | PK          | 97               | 1.2        | H     | -13.14           | 29.70               | 74.00                   | -44.30 |
| 2386.97                     | 36.08            | Ave         | 97               | 1.2        | H     | -13.14           | 22.94               | 54.00                   | -31.06 |
| 2486.97                     | 44.62            | PK          | 243              | 1.5        | V     | -13.08           | 31.54               | 74.00                   | -42.46 |
| 2486.97                     | 37.94            | Ave         | 243              | 1.5        | V     | -13.08           | 24.86               | 54.00                   | -29.14 |

| Frequency                 | Receiver Reading | Detector    | Turn table Angle | RX Antenna |       | Corrected Factor | Corrected Amplitude | FCC Part 15.247/209/205 |        |
|---------------------------|------------------|-------------|------------------|------------|-------|------------------|---------------------|-------------------------|--------|
|                           |                  |             |                  | Height     | Polar |                  |                     | Limit                   | Margin |
| (MHz)                     | (dBμV)           | (PK/QP/Ave) | Degree           | (m)        | (H/V) | (dB)             | (dBμV/m)            | (dBμV/m)                | (dB)   |
| 11g: High Channel 2462MHz |                  |             |                  |            |       |                  |                     |                         |        |
| 223.45                    | 45.75            | QP          | 271              | 2.0        | H     | -11.62           | 34.13               | 46.00                   | -11.87 |
| 223.45                    | 33.90            | QP          | 295              | 1.6        | V     | -11.62           | 22.28               | 46.00                   | -23.72 |
| 4924.00                   | 48.32            | PK          | 131              | 1.6        | V     | -0.24            | 48.08               | 74.00                   | -25.92 |
| 4924.00                   | 48.52            | Ave         | 131              | 1.6        | V     | -0.24            | 48.28               | 54.00                   | -5.72  |
| 7386.00                   | 44.41            | PK          | 0                | 1.2        | H     | 2.84             | 47.25               | 74.00                   | -26.75 |
| 7386.00                   | 43.25            | Ave         | 0                | 1.2        | H     | 2.84             | 46.09               | 54.00                   | -7.91  |
| 2332.18                   | 45.78            | PK          | 146              | 1.5        | V     | -13.19           | 32.59               | 74.00                   | -41.41 |
| 2332.18                   | 37.13            | Ave         | 146              | 1.5        | V     | -13.19           | 23.94               | 54.00                   | -30.06 |
| 2378.86                   | 44.59            | PK          | 228              | 1.7        | H     | -13.14           | 31.45               | 74.00                   | -42.55 |
| 2378.86                   | 38.91            | Ave         | 228              | 1.7        | H     | -13.14           | 25.77               | 54.00                   | -28.23 |
| 2493.81                   | 43.26            | PK          | 163              | 1.4        | V     | -13.08           | 30.18               | 74.00                   | -43.82 |
| 2493.81                   | 36.75            | Ave         | 163              | 1.4        | V     | -13.08           | 23.67               | 54.00                   | -30.33 |

| Frequency                  | Receiver Reading | Detector    | Turn table Angle | RX Antenna |       | Corrected Factor | Corrected Amplitude | FCC Part 15.247/209/205 |        |
|----------------------------|------------------|-------------|------------------|------------|-------|------------------|---------------------|-------------------------|--------|
|                            |                  |             |                  | Height     | Polar |                  |                     | Limit                   | Margin |
| (MHz)                      | (dBμV)           | (PK/QP/Ave) | Degree           | (m)        | (H/V) | (dB)             | (dBμV/m)            | (dBμV/m)                | (dB)   |
| 11n20: Low Channel 2412MHz |                  |             |                  |            |       |                  |                     |                         |        |
| 223.45                     | 46.44            | QP          | 321              | 1.2        | H     | -11.62           | 34.82               | 46.00                   | -11.18 |
| 223.45                     | 34.93            | QP          | 230              | 1.3        | V     | -11.62           | 23.31               | 46.00                   | -22.69 |
| 4824.00                    | 48.56            | PK          | 145              | 1.8        | V     | -1.06            | 47.50               | 74.00                   | -26.50 |
| 4824.00                    | 49.13            | Ave         | 145              | 1.8        | V     | -1.06            | 48.07               | 54.00                   | -5.93  |
| 7236.00                    | 45.48            | PK          | 73               | 2.0        | H     | 1.33             | 46.81               | 74.00                   | -27.19 |
| 7236.00                    | 43.05            | Ave         | 73               | 2.0        | H     | 1.33             | 44.38               | 54.00                   | -9.62  |
| 2345.64                    | 45.14            | PK          | 357              | 1.7        | V     | -13.19           | 31.95               | 74.00                   | -42.05 |
| 2345.64                    | 38.23            | Ave         | 357              | 1.7        | V     | -13.19           | 25.04               | 54.00                   | -28.96 |
| 2386.86                    | 44.08            | PK          | 225              | 1.2        | H     | -13.14           | 30.94               | 74.00                   | -43.06 |
| 2386.86                    | 37.21            | Ave         | 225              | 1.2        | H     | -13.14           | 24.07               | 54.00                   | -29.93 |
| 2487.52                    | 42.23            | PK          | 111              | 1.6        | V     | -13.08           | 29.15               | 74.00                   | -44.85 |
| 2487.52                    | 38.90            | Ave         | 111              | 1.6        | V     | -13.08           | 25.82               | 54.00                   | -28.18 |

| Frequency                     | Receiver Reading | Detector    | Turn table Angle | RX Antenna |       | Corrected Factor | Corrected Amplitude | FCC Part 15.247/209/205 |        |
|-------------------------------|------------------|-------------|------------------|------------|-------|------------------|---------------------|-------------------------|--------|
|                               |                  |             |                  | Height     | Polar |                  |                     | Limit                   | Margin |
| (MHz)                         | (dBμV)           | (PK/QP/Ave) | Degree           | (m)        | (H/V) | (dB)             | (dBμV/m)            | (dBμV/m)                | (dB)   |
| 11n20: Middle Channel 2437MHz |                  |             |                  |            |       |                  |                     |                         |        |
| 223.45                        | 46.39            | QP          | 31               | 1.3        | H     | -11.62           | 34.77               | 46.00                   | -11.23 |
| 223.45                        | 36.39            | QP          | 197              | 1.2        | V     | -11.62           | 24.77               | 46.00                   | -21.23 |
| 4874.00                       | 48.72            | PK          | 116              | 1.5        | V     | -0.62            | 48.10               | 74.00                   | -25.90 |
| 4874.00                       | 48.77            | Ave         | 116              | 1.5        | V     | -0.62            | 48.15               | 54.00                   | -5.85  |
| 7311.00                       | 44.17            | PK          | 47               | 1.8        | H     | 2.21             | 46.38               | 74.00                   | -27.62 |
| 7311.00                       | 41.98            | Ave         | 47               | 1.8        | H     | 2.21             | 44.19               | 54.00                   | -9.81  |
| 2322.65                       | 45.77            | PK          | 333              | 1.2        | V     | -13.19           | 32.58               | 74.00                   | -41.42 |
| 2322.65                       | 39.23            | Ave         | 333              | 1.2        | V     | -13.19           | 26.04               | 54.00                   | -27.96 |
| 2365.92                       | 42.21            | PK          | 266              | 1.2        | H     | -13.14           | 29.07               | 74.00                   | -44.93 |
| 2365.92                       | 37.58            | Ave         | 266              | 1.2        | H     | -13.14           | 24.44               | 54.00                   | -29.56 |
| 2496.03                       | 42.35            | PK          | 289              | 1.3        | V     | -13.08           | 29.27               | 74.00                   | -44.73 |
| 2496.03                       | 36.79            | Ave         | 289              | 1.3        | V     | -13.08           | 23.71               | 54.00                   | -30.29 |

| Frequency                   | Receiver Reading | Detector    | Turn table Angle | RX Antenna |       | Corrected Factor | Corrected Amplitude | FCC Part 15.247/209/205 |        |
|-----------------------------|------------------|-------------|------------------|------------|-------|------------------|---------------------|-------------------------|--------|
|                             |                  |             |                  | Height     | Polar |                  |                     | Limit                   | Margin |
| (MHz)                       | (dBμV)           | (PK/QP/Ave) | Degree           | (m)        | (H/V) | (dB)             | (dBμV/m)            | (dBμV/m)                | (dB)   |
| 11n20: High Channel 2462MHz |                  |             |                  |            |       |                  |                     |                         |        |
| 223.45                      | 46.39            | QP          | 277              | 1.9        | H     | -11.62           | 34.77               | 46.00                   | -11.23 |
| 223.45                      | 35.61            | QP          | 252              | 1.2        | V     | -11.62           | 23.99               | 46.00                   | -22.01 |
| 4924.00                     | 48.48            | PK          | 0                | 1.0        | V     | -0.24            | 48.24               | 74.00                   | -25.76 |
| 4924.00                     | 48.98            | Ave         | 0                | 1.0        | V     | -0.24            | 48.74               | 54.00                   | -5.26  |
| 7386.00                     | 44.78            | PK          | 128              | 1.7        | H     | 2.84             | 47.62               | 74.00                   | -26.38 |
| 7386.00                     | 41.90            | Ave         | 128              | 1.7        | H     | 2.84             | 44.74               | 54.00                   | -9.26  |
| 2312.86                     | 45.81            | PK          | 10               | 1.5        | V     | -13.19           | 32.62               | 74.00                   | -41.38 |
| 2312.86                     | 38.08            | Ave         | 10               | 1.5        | V     | -13.19           | 24.89               | 54.00                   | -29.11 |
| 2378.51                     | 44.65            | PK          | 16               | 1.6        | H     | -13.14           | 31.51               | 74.00                   | -42.49 |
| 2378.51                     | 38.85            | Ave         | 16               | 1.6        | H     | -13.14           | 25.71               | 54.00                   | -28.29 |
| 2490.34                     | 44.94            | PK          | 60               | 1.7        | V     | -13.08           | 31.86               | 74.00                   | -42.14 |
| 2490.34                     | 36.78            | Ave         | 60               | 1.7        | V     | -13.08           | 23.70               | 54.00                   | -30.30 |

| Frequency                  | Receiver Reading | Detector    | Turn table Angle | RX Antenna |       | Corrected Factor | Corrected Amplitude | FCC Part 15.247/209/205 |        |
|----------------------------|------------------|-------------|------------------|------------|-------|------------------|---------------------|-------------------------|--------|
|                            |                  |             |                  | Height     | Polar |                  |                     | Limit                   | Margin |
| (MHz)                      | (dBμV)           | (PK/QP/Ave) | Degree           | (m)        | (H/V) | (dB)             | (dBμV/m)            | (dBμV/m)                | (dB)   |
| 11n40: Low Channel 2422MHz |                  |             |                  |            |       |                  |                     |                         |        |
| 223.45                     | 47.87            | QP          | 250              | 1.7        | H     | -11.62           | 36.25               | 46.00                   | -9.75  |
| 223.45                     | 36.17            | QP          | 115              | 1.5        | V     | -11.62           | 24.55               | 46.00                   | -21.45 |
| 4844.00                    | 46.25            | PK          | 225              | 1.9        | V     | -1.06            | 45.19               | 74.00                   | -28.81 |
| 4844.00                    | 47.51            | Ave         | 225              | 1.9        | V     | -1.06            | 46.45               | 54.00                   | -7.55  |
| 7266.00                    | 43.65            | PK          | 277              | 1.4        | H     | 1.33             | 44.98               | 74.00                   | -29.02 |
| 7266.00                    | 39.09            | Ave         | 277              | 1.4        | H     | 1.33             | 40.42               | 54.00                   | -13.58 |
| 2326.85                    | 45.89            | PK          | 77               | 1.3        | V     | -13.19           | 32.70               | 74.00                   | -41.30 |
| 2326.85                    | 37.54            | Ave         | 77               | 1.3        | V     | -13.19           | 24.35               | 54.00                   | -29.65 |
| 2375.89                    | 42.14            | PK          | 196              | 1.1        | H     | -13.14           | 29.00               | 74.00                   | -45.00 |
| 2375.89                    | 38.48            | Ave         | 196              | 1.1        | H     | -13.14           | 25.34               | 54.00                   | -28.66 |
| 2486.02                    | 45.00            | PK          | 3                | 1.4        | V     | -13.08           | 31.92               | 74.00                   | -42.08 |
| 2486.02                    | 38.87            | Ave         | 3                | 1.4        | V     | -13.08           | 25.79               | 54.00                   | -28.21 |

| Frequency                     | Receiver Reading | Detector    | Turn table Angle | RX Antenna |       | Corrected Factor | Corrected Amplitude | FCC Part 15.247/209/205 |        |
|-------------------------------|------------------|-------------|------------------|------------|-------|------------------|---------------------|-------------------------|--------|
|                               |                  |             |                  | Height     | Polar |                  |                     | Limit                   | Margin |
| (MHz)                         | (dBμV)           | (PK/QP/Ave) | Degree           | (m)        | (H/V) | (dB)             | (dBμV/m)            | (dBμV/m)                | (dB)   |
| 11n40: Middle Channel 2437MHz |                  |             |                  |            |       |                  |                     |                         |        |
| 223.45                        | 48.45            | QP          | 152              | 1.1        | H     | -11.62           | 36.83               | 46.00                   | -9.17  |
| 223.45                        | 36.45            | QP          | 347              | 1.9        | V     | -11.62           | 24.83               | 46.00                   | -21.17 |
| 4874.00                       | 46.37            | PK          | 6                | 1.9        | V     | -0.62            | 45.75               | 74.00                   | -28.25 |
| 4874.00                       | 48.13            | Ave         | 6                | 1.9        | V     | -0.62            | 47.51               | 54.00                   | -6.49  |
| 7311.00                       | 43.04            | PK          | 79               | 1.5        | H     | 2.21             | 45.25               | 74.00                   | -28.75 |
| 7311.00                       | 39.08            | Ave         | 79               | 1.5        | H     | 2.21             | 41.29               | 54.00                   | -12.71 |
| 2333.11                       | 46.45            | PK          | 139              | 1.5        | V     | -13.19           | 33.26               | 74.00                   | -40.74 |
| 2333.11                       | 37.40            | Ave         | 139              | 1.5        | V     | -13.19           | 24.21               | 54.00                   | -29.79 |
| 2385.79                       | 43.59            | PK          | 257              | 1.1        | H     | -13.14           | 30.45               | 74.00                   | -43.55 |
| 2385.79                       | 37.37            | Ave         | 257              | 1.1        | H     | -13.14           | 24.23               | 54.00                   | -29.77 |
| 2496.42                       | 42.49            | PK          | 83               | 1.2        | V     | -13.08           | 29.41               | 74.00                   | -44.59 |
| 2496.42                       | 37.86            | Ave         | 83               | 1.2        | V     | -13.08           | 24.78               | 54.00                   | -29.22 |

| Frequency                   | Receiver Reading | Detector    | Turn table Angle | RX Antenna |       | Corrected Factor | Corrected Amplitude | FCC Part 15.247/209/205 |        |
|-----------------------------|------------------|-------------|------------------|------------|-------|------------------|---------------------|-------------------------|--------|
|                             |                  |             |                  | Height     | Polar |                  |                     | Limit                   | Margin |
| (MHz)                       | (dBμV)           | (PK/QP/Ave) | Degree           | (m)        | (H/V) | (dB)             | (dBμV/m)            | (dBμV/m)                | (dB)   |
| 11n40: High Channel 2452MHz |                  |             |                  |            |       |                  |                     |                         |        |
| 223.45                      | 48.56            | QP          | 218              | 1.5        | H     | -11.62           | 36.94               | 46.00                   | -9.06  |
| 223.45                      | 35.92            | QP          | 63               | 1.5        | V     | -11.62           | 24.30               | 46.00                   | -21.70 |
| 4904.00                     | 47.29            | PK          | 258              | 1.3        | V     | -0.24            | 47.05               | 74.00                   | -26.95 |
| 4904.00                     | 47.13            | Ave         | 258              | 1.3        | V     | -0.24            | 46.89               | 54.00                   | -7.11  |
| 7356.00                     | 42.29            | PK          | 272              | 2.0        | H     | 2.84             | 45.13               | 74.00                   | -28.87 |
| 7356.00                     | 39.43            | Ave         | 272              | 2.0        | H     | 2.84             | 42.27               | 54.00                   | -11.73 |
| 2341.29                     | 46.03            | PK          | 90               | 1.1        | V     | -13.19           | 32.84               | 74.00                   | -41.16 |
| 2341.29                     | 37.57            | Ave         | 90               | 1.1        | V     | -13.19           | 24.38               | 54.00                   | -29.62 |
| 2371.91                     | 42.43            | PK          | 76               | 1.4        | H     | -13.14           | 29.29               | 74.00                   | -44.71 |
| 2371.91                     | 37.69            | Ave         | 76               | 1.4        | H     | -13.14           | 24.55               | 54.00                   | -29.45 |
| 2486.07                     | 43.92            | PK          | 212              | 1.2        | V     | -13.08           | 30.84               | 74.00                   | -43.16 |
| 2486.07                     | 38.39            | Ave         | 212              | 1.2        | V     | -13.08           | 25.31               | 54.00                   | -28.69 |

**Test Frequency: 8GHz~25GHz**

The measurements were more than 20 dB below the limit and not reported.

**BT BLE:****Test Frequency: 9KHz~26MHz**

Remark: only the worst data (GFSK modulation Low channel mode) were recorded.

| Frequency | Measurement results dBμV @3m | Detector PK/QP | Correct factor dB/m | Extrapolation factor dB | Measurement results (calculated) dBμV/m @30m | Limits dBμV/m @30m | Margin dB |
|-----------|------------------------------|----------------|---------------------|-------------------------|----------------------------------------------|--------------------|-----------|
| (MHz)     | Measurement results          | Detector       | Correct factor      | Extrapolation factor    | Measurement results (calculated)             | Limits             | Margin    |
| 6.025     | 25.40                        | QP             | 21.84               | 40.00                   | 7.24                                         | 29.54              | -22.30    |
| 15.730    | 25.62                        | QP             | 21.35               | 40.00                   | 6.97                                         | 29.54              | -22.57    |
| 25.680    | 24.87                        | QP             | 20.67               | 40.00                   | 5.54                                         | 29.54              | -24.00    |

**Test Frequency : 26MHz ~ 30MHz**

The measurements were more than 20 dB below the limit and not reported.

**Test Frequency : 30MHz ~ 8GHz**

| Frequency                | Receiver Reading | Detector    | Turn table Angle | RX Antenna |       | Corrected Factor | Corrected Amplitude | Limit    | Margin |
|--------------------------|------------------|-------------|------------------|------------|-------|------------------|---------------------|----------|--------|
|                          |                  |             |                  | Height     | Polar |                  |                     |          |        |
| (MHz)                    | (dBμV)           | (PK/QP/Ave) | Degree           | (m)        | (H/V) | (dB)             | (dBμV/m)            | (dBμV/m) | (dB)   |
| GFSK Low Channel 2402MHz |                  |             |                  |            |       |                  |                     |          |        |
| 223.45                   | 40.52            | QP          | 226              | 1.7        | H     | -11.62           | 28.90               | 46.00    | -17.10 |
| 223.45                   | 39.09            | QP          | 149              | 2.0        | V     | -11.62           | 27.47               | 46.00    | -18.53 |
| 4824.00                  | 50.59            | PK          | 298              | 1.4        | V     | -1.06            | 49.53               | 74.00    | -24.47 |
| 4824.00                  | 48.21            | Ave         | 298              | 1.4        | V     | -1.06            | 47.15               | 54.00    | -6.85  |
| 7236.00                  | 42.54            | PK          | 142              | 1.0        | H     | 1.33             | 43.87               | 74.00    | -30.13 |
| 7236.00                  | 42.93            | Ave         | 142              | 1.0        | H     | 1.33             | 44.26               | 54.00    | -9.74  |
| 2343.10                  | 46.36            | PK          | 9                | 1.9        | V     | -13.19           | 33.17               | 74.00    | -40.83 |
| 2343.10                  | 38.11            | Ave         | 9                | 1.9        | V     | -13.19           | 24.92               | 54.00    | -29.08 |
| 2370.33                  | 43.24            | PK          | 8                | 1.6        | H     | -13.14           | 30.10               | 74.00    | -43.90 |
| 2370.33                  | 37.61            | Ave         | 8                | 1.6        | H     | -13.14           | 24.47               | 54.00    | -29.53 |
| 2487.26                  | 44.63            | PK          | 313              | 1.2        | V     | -13.08           | 31.55               | 74.00    | -42.45 |
| 2487.26                  | 38.70            | Ave         | 313              | 1.2        | V     | -13.08           | 25.62               | 54.00    | -28.38 |

| Frequency                   | Receiver Reading | Detector    | Turn table Angle | RX Antenna |       | Corrected Factor | Corrected Amplitude | Limit          | Margin |
|-----------------------------|------------------|-------------|------------------|------------|-------|------------------|---------------------|----------------|--------|
|                             |                  |             |                  | Height     | Polar |                  |                     |                |        |
| (MHz)                       | (dB $\mu$ V)     | (PK/QP/Ave) | Degree           | (m)        | (H/V) | (dB)             | (dB $\mu$ V/m)      | (dB $\mu$ V/m) | (dB)   |
| GFSK Middle Channel 2440MHz |                  |             |                  |            |       |                  |                     |                |        |
| 223.45                      | 40.72            | QP          | 134              | 1.5        | H     | -11.62           | 29.10               | 46.00          | -16.90 |
| 223.45                      | 39.43            | QP          | 33               | 2.0        | V     | -11.62           | 27.81               | 46.00          | -18.19 |
| 4874.00                     | 50.94            | PK          | 318              | 1.9        | V     | -0.62            | 50.32               | 74.00          | -23.68 |
| 4874.00                     | 49.58            | Ave         | 318              | 1.9        | V     | -0.62            | 48.96               | 54.00          | -5.04  |
| 7311.00                     | 42.47            | PK          | 341              | 1.7        | H     | 2.21             | 44.68               | 74.00          | -29.32 |
| 7311.00                     | 43.55            | Ave         | 341              | 1.7        | H     | 2.21             | 45.76               | 54.00          | -8.24  |
| 2343.79                     | 45.34            | PK          | 296              | 1.5        | V     | -13.19           | 32.15               | 74.00          | -41.85 |
| 2343.79                     | 38.45            | Ave         | 296              | 1.5        | V     | -13.19           | 25.26               | 54.00          | -28.74 |
| 2389.59                     | 42.41            | PK          | 60               | 1.0        | H     | -13.14           | 29.27               | 74.00          | -44.73 |
| 2389.59                     | 36.73            | Ave         | 60               | 1.0        | H     | -13.14           | 23.59               | 54.00          | -30.41 |
| 2492.15                     | 44.10            | PK          | 309              | 1.5        | V     | -13.08           | 31.02               | 74.00          | -42.98 |
| 2492.15                     | 37.54            | Ave         | 309              | 1.5        | V     | -13.08           | 24.46               | 54.00          | -29.54 |

| Frequency                 | Receiver Reading | Detector    | Turn table Angle | RX Antenna |       | Corrected Factor | Corrected Amplitude | Limit    | Margin |
|---------------------------|------------------|-------------|------------------|------------|-------|------------------|---------------------|----------|--------|
|                           |                  |             |                  | Height     | Polar |                  |                     |          |        |
| (MHz)                     | (dBμV)           | (PK/QP/Ave) | Degree           | (m)        | (H/V) | (dB)             | (dBμV/m)            | (dBμV/m) | (dB)   |
| GFSK High Channel 2480MHz |                  |             |                  |            |       |                  |                     |          |        |
| 223.45                    | 41.14            | QP          | 129              | 1.0        | H     | -11.62           | 29.52               | 46.00    | -16.48 |
| 223.45                    | 40.50            | QP          | 357              | 1.7        | V     | -11.62           | 28.88               | 46.00    | -17.12 |
| 4924.00                   | 51.67            | PK          | 344              | 1.5        | V     | -0.24            | 51.43               | 74.00    | -22.57 |
| 4924.00                   | 48.37            | Ave         | 344              | 1.5        | V     | -0.24            | 48.13               | 54.00    | -5.87  |
| 7386.00                   | 42.50            | PK          | 26               | 1.7        | H     | 2.84             | 45.34               | 74.00    | -28.66 |
| 7386.00                   | 44.33            | Ave         | 26               | 1.7        | H     | 2.84             | 47.17               | 54.00    | -6.83  |
| 2323.90                   | 45.71            | PK          | 229              | 1.3        | V     | -13.19           | 32.52               | 74.00    | -41.48 |
| 2323.90                   | 37.75            | Ave         | 229              | 1.3        | V     | -13.19           | 24.56               | 54.00    | -29.44 |
| 2373.66                   | 42.15            | PK          | 222              | 1.7        | H     | -13.14           | 29.01               | 74.00    | -44.99 |
| 2373.66                   | 36.46            | Ave         | 222              | 1.7        | H     | -13.14           | 23.32               | 54.00    | -30.68 |
| 2498.35                   | 44.98            | PK          | 209              | 1.0        | V     | -13.08           | 31.90               | 74.00    | -42.10 |
| 2498.35                   | 38.65            | Ave         | 209              | 1.0        | V     | -13.08           | 25.57               | 54.00    | -28.43 |

**Test Frequency: 8GHz~25GHz**

The measurements were more than 20 dB below the limit and not reported.

## 9 Conducted Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;  
ANSI C63.10:2013

Test Result: PASS

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

### 9.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
  - a) Set instrument center frequency to DTS channel center frequency.
  - b) Set the span to \_ 1.5 times the DTS bandwidth.
  - c) Set the RBW = 100 kHz.
  - d) Set the VBW \_  $[3 \times \text{RBW}]$ .
  - e) Detector = peak.
  - f) Sweep time = auto couple.
  - g) Trace mode = max hold.
  - h) Allow trace to fully stabilize.
  - i) Use the peak marker function to determine the maximum PSD level.


Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

9.2 Test Result

9KHz – 30MHz


802.11b

Low Channel

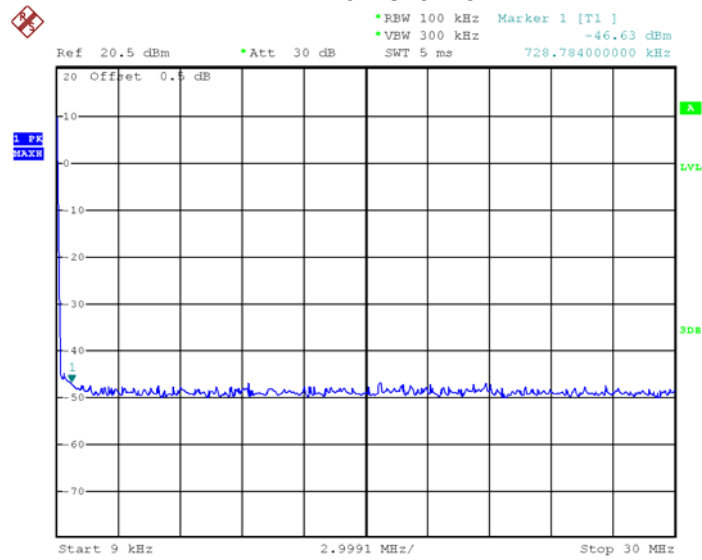


Date: 17.MAR.2020 01:44:19

Middle Channel

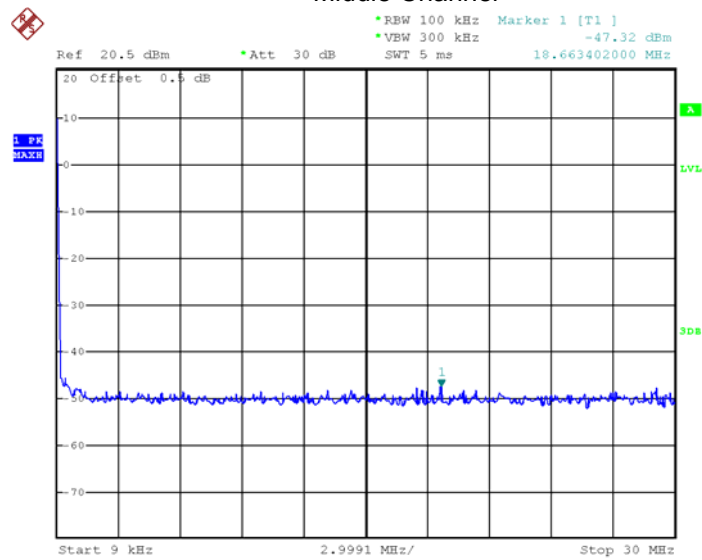


Date: 17.MAR.2020 01:44:31

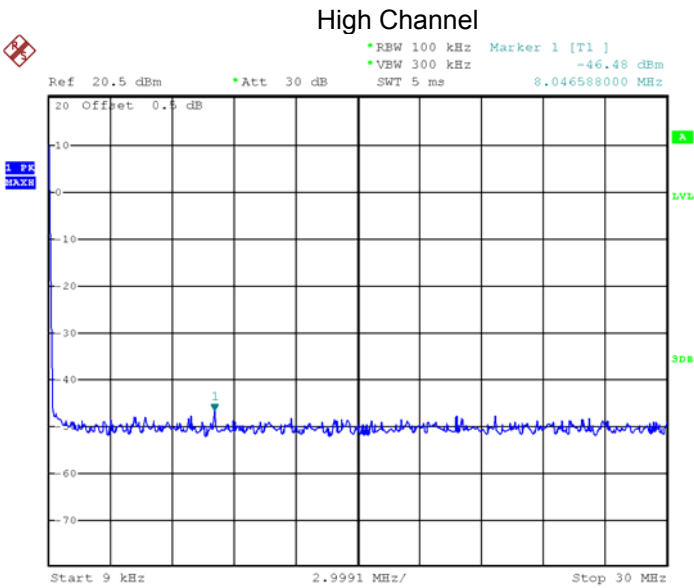


Date: 17.MAR.2020    01:44:41

802.11g

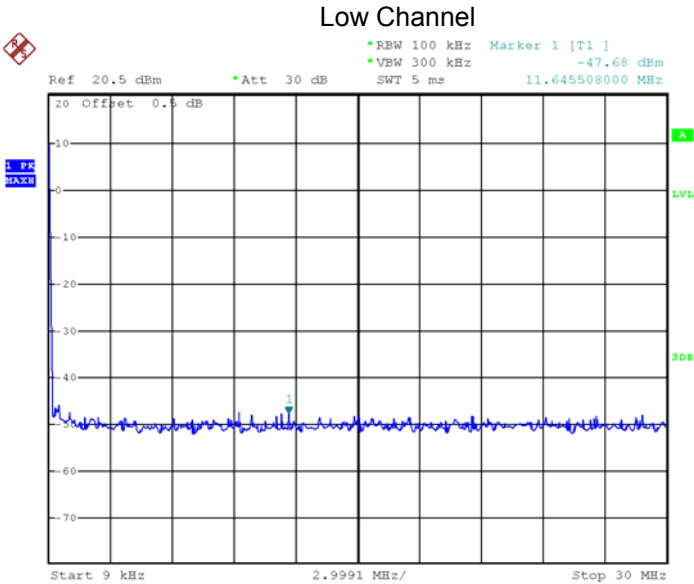


Date: 17.MAR.2020    01:44:52

### Middle Channel

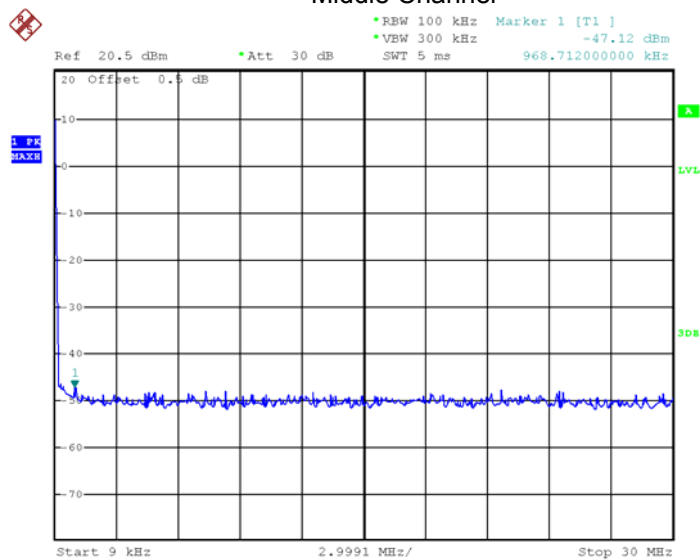


Date: 17.MAR.2020 01:45:03

## High Channel

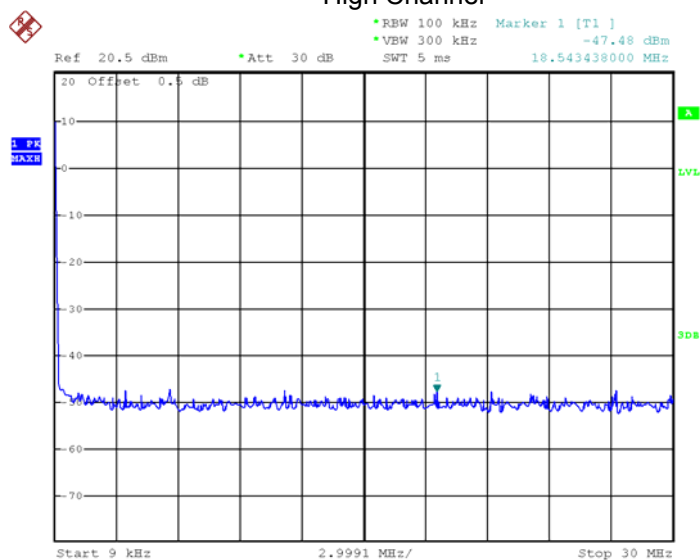


Date: 17.MAR.2020 01:45:14

802.11n HT20  
Low Channel

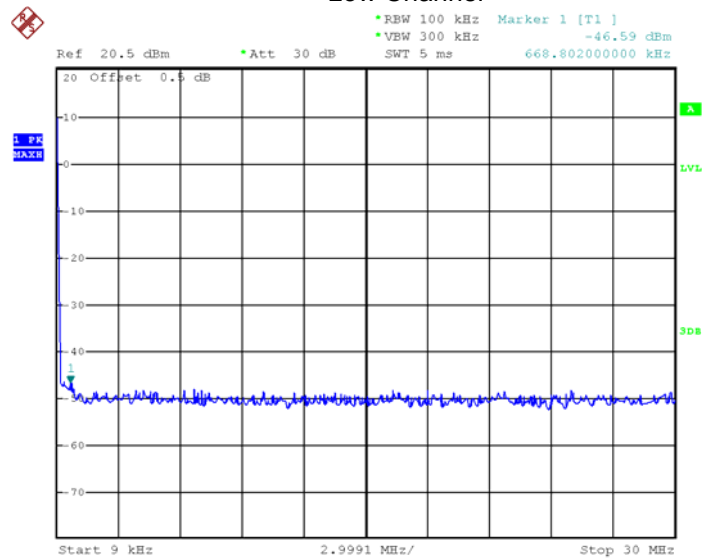


Date: 17.MAR.2020 01:45:23

Middle Channel

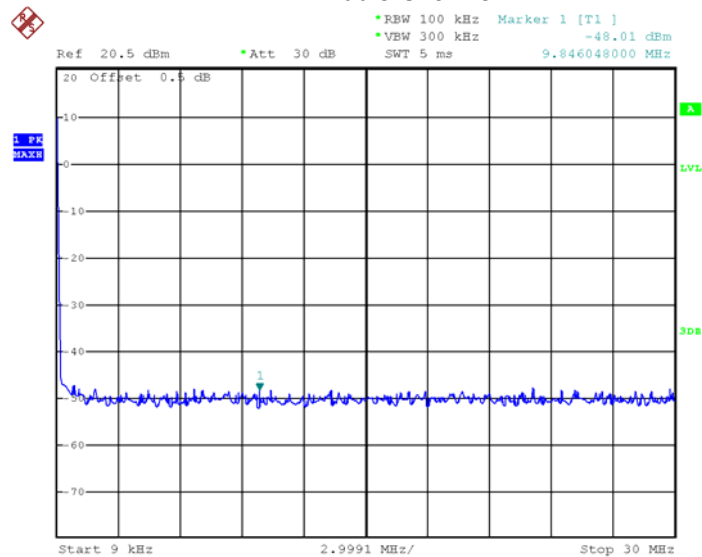


Date: 17.MAR.2020 01:45:33

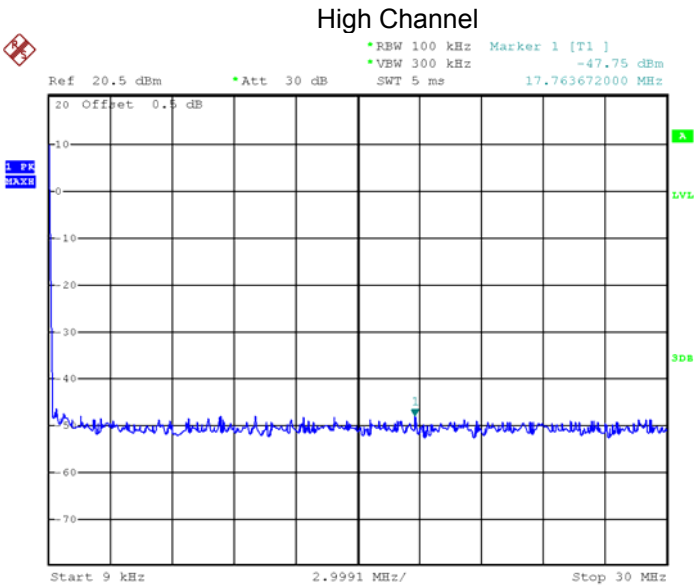


Date: 17.MAR.2020 01:45:41


**802.11n HT40**

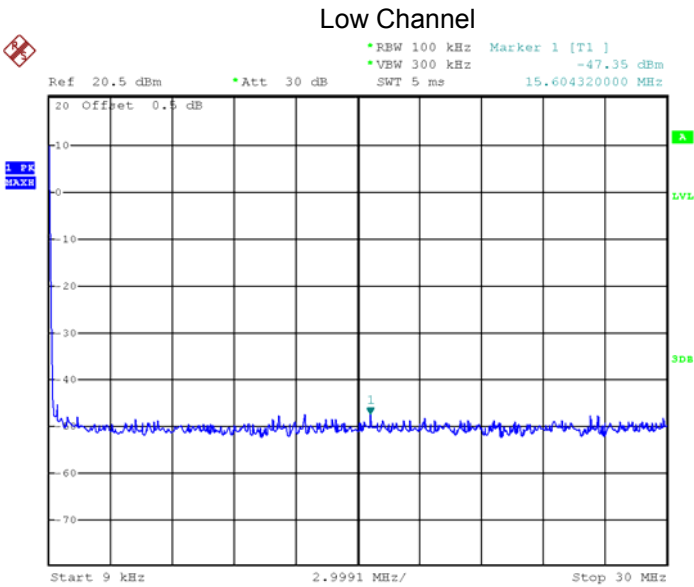

Date: 17.MAR.2020 01:45:51

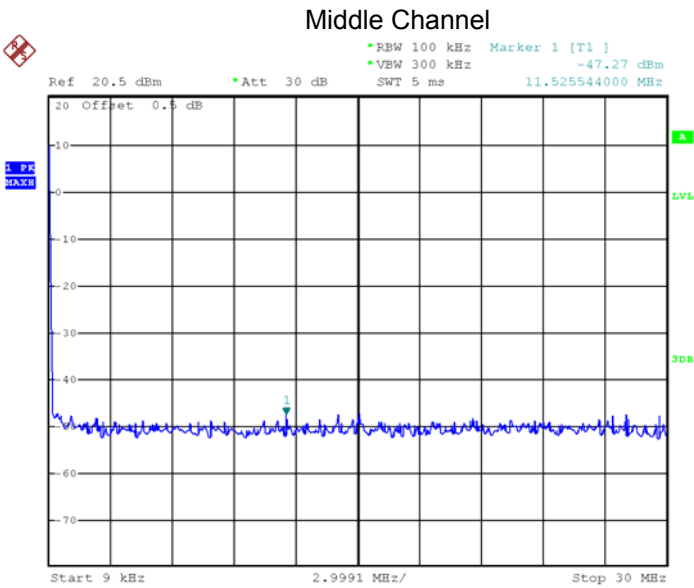


Date: 17.MAR.2020 01:45:58

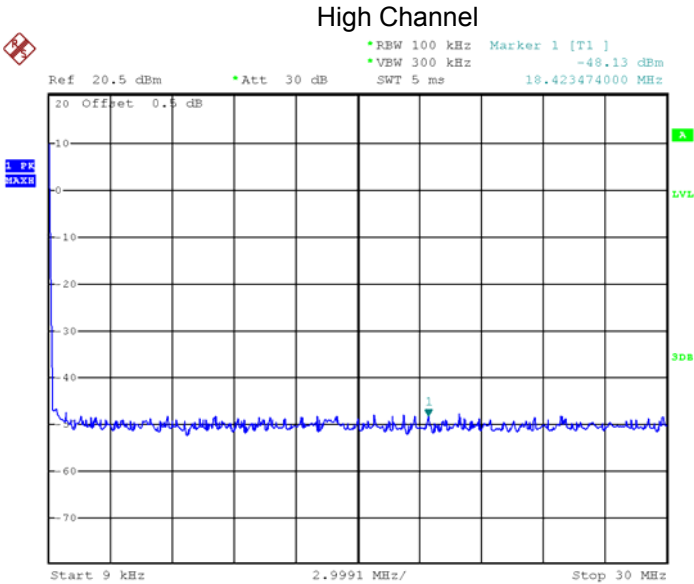

Date: 17.MAR.2020 01:46:08


BLE

Low Channel

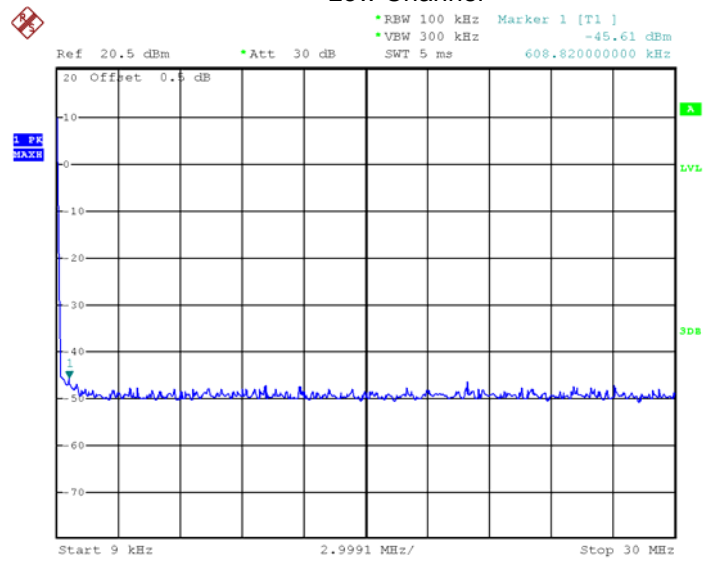


Date: 17.MAR.2020 01:11:59

Middle Channel

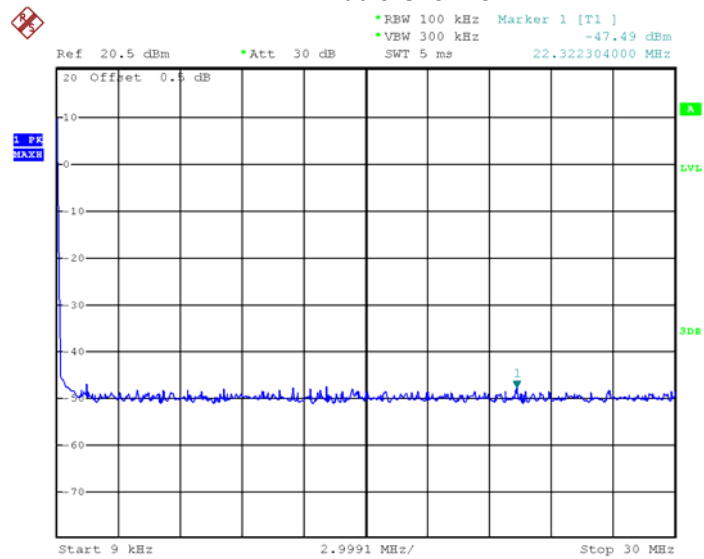

Date: 17.MAR.2020 01:05:46

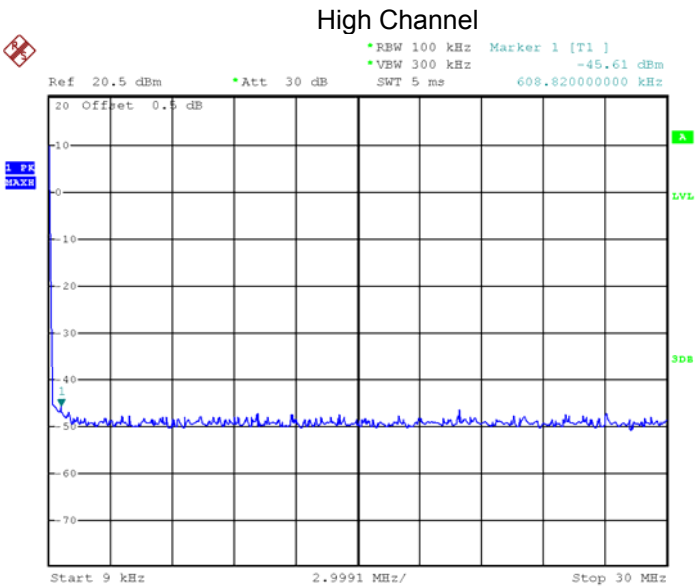


Date: 17.MAR.2020 01:12:06

Above 30MHz


802.11b

Low Channel


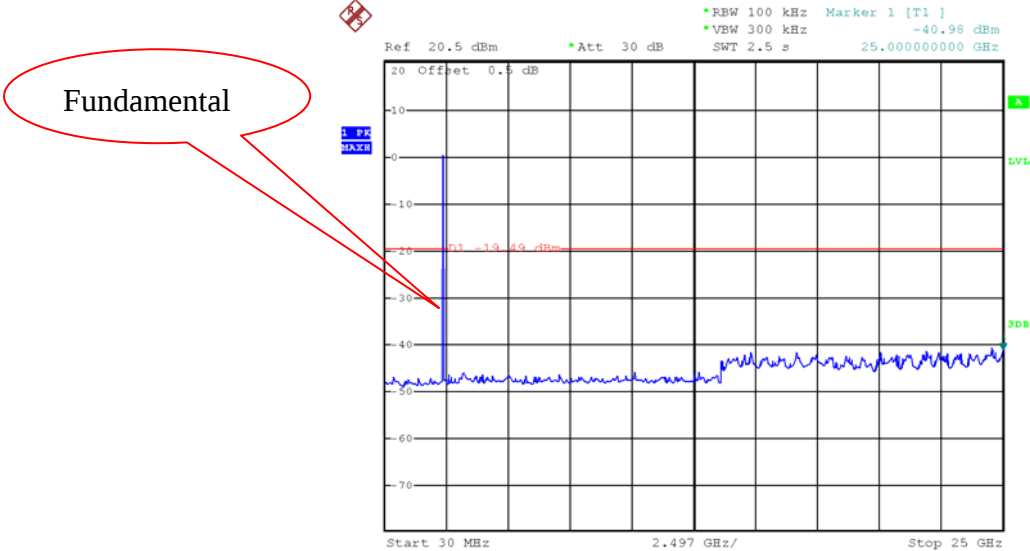




Date: 17.MAR.2020 01:31:36

Middle Channel

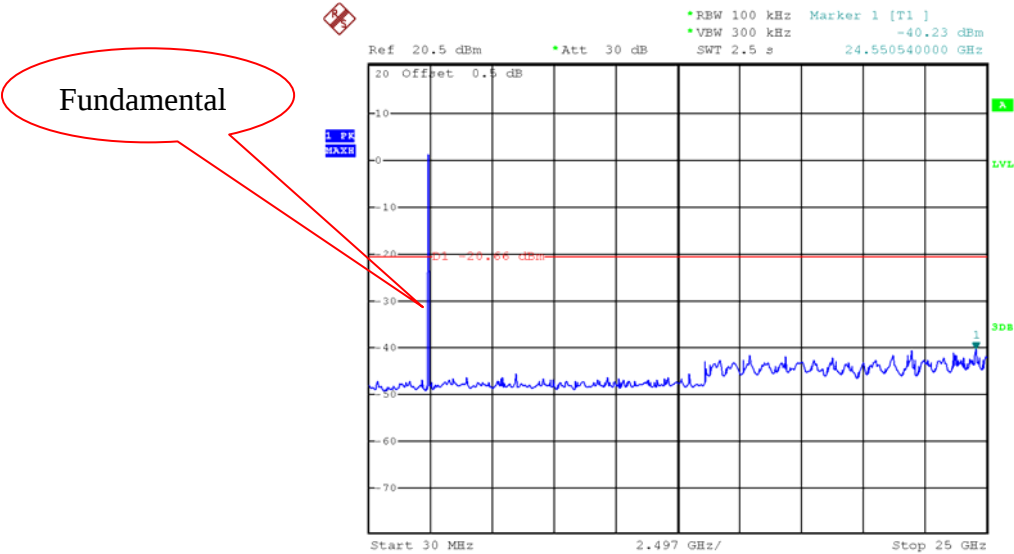


Date: 17.MAR.2020 01:32:34

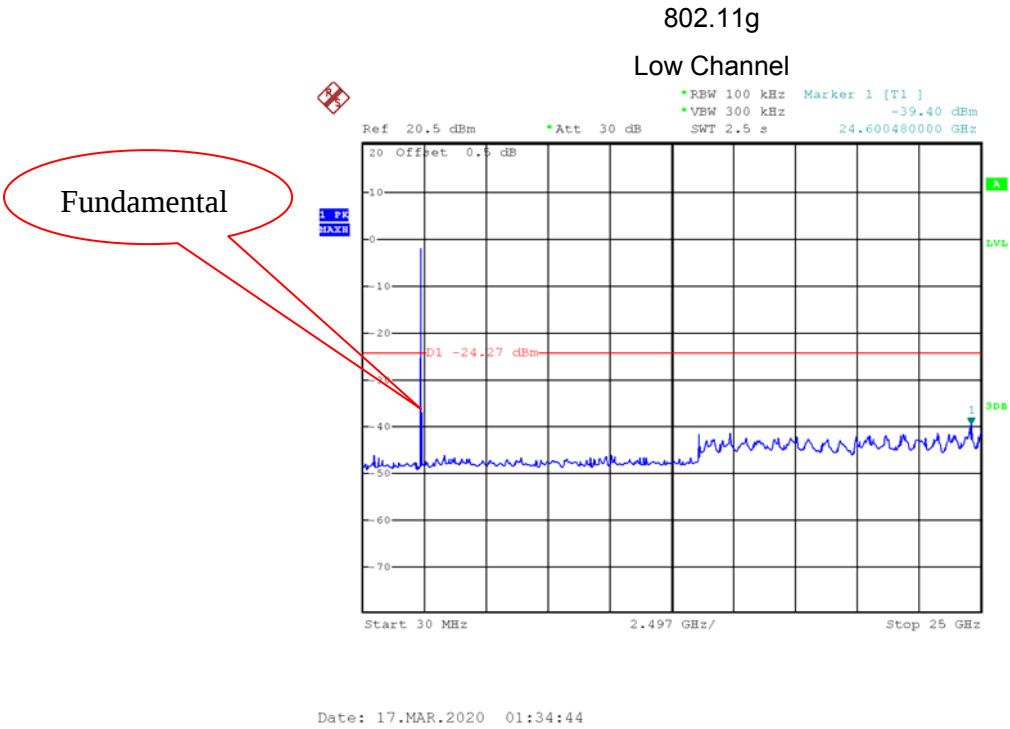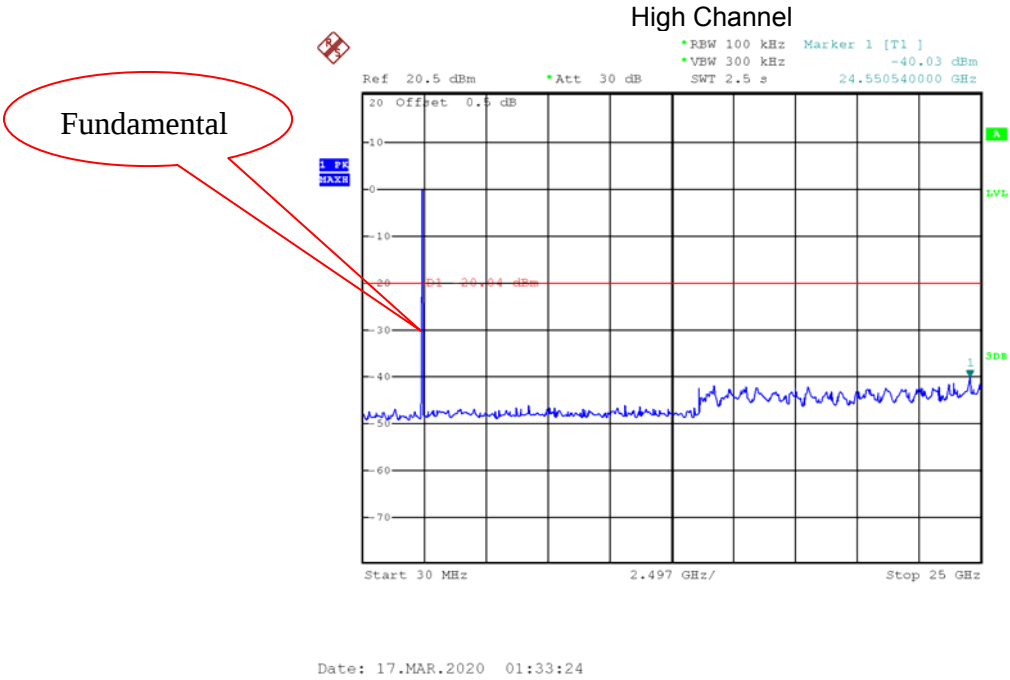

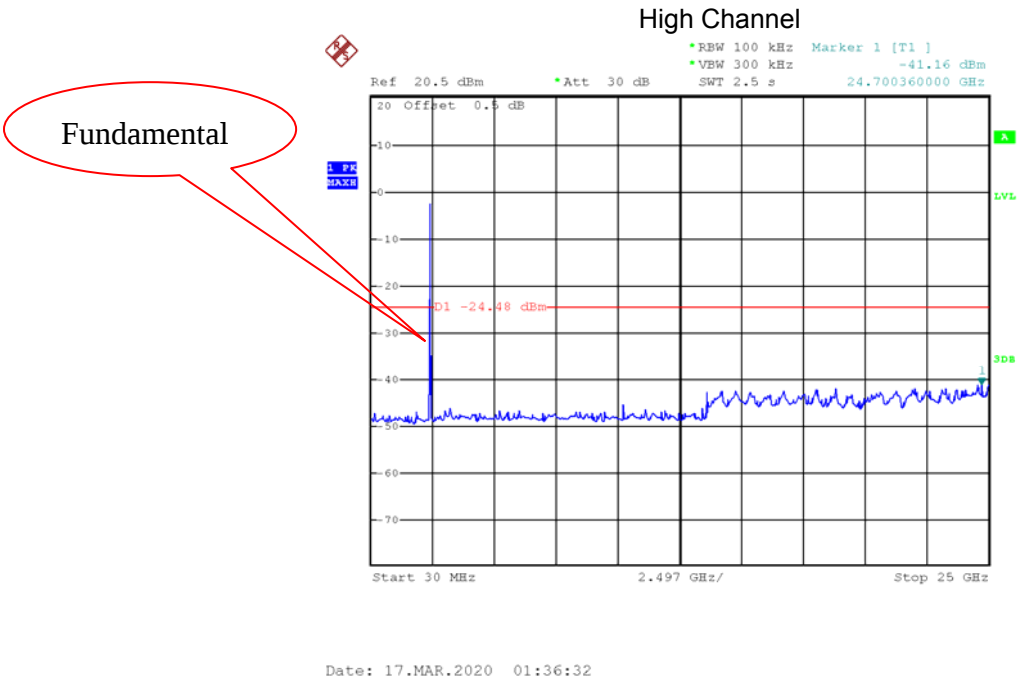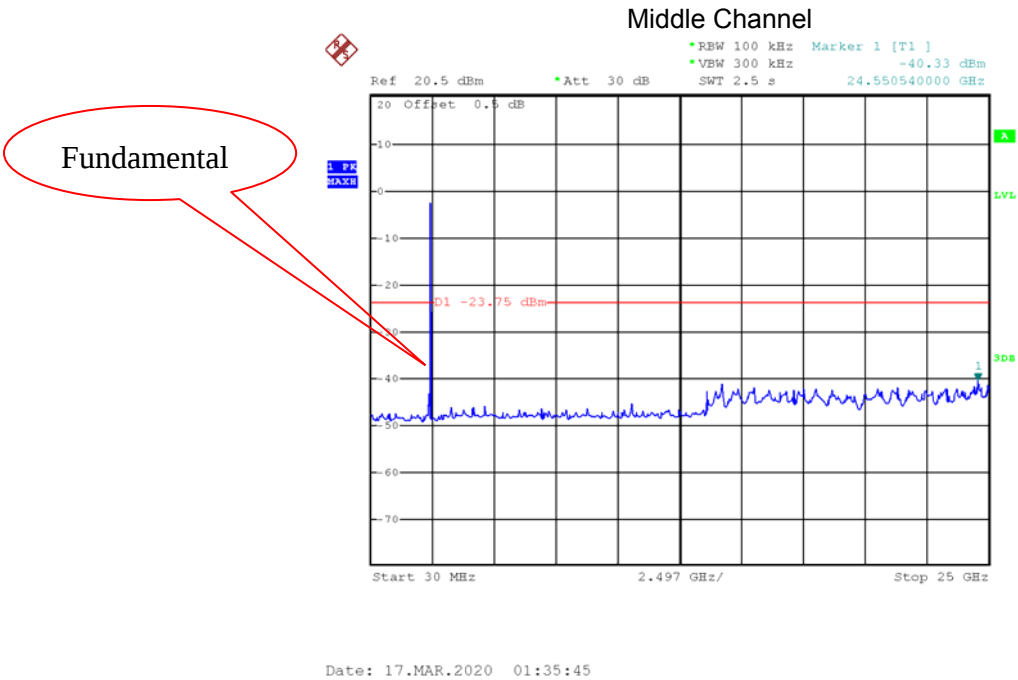


802.11n HT20

Low Channel

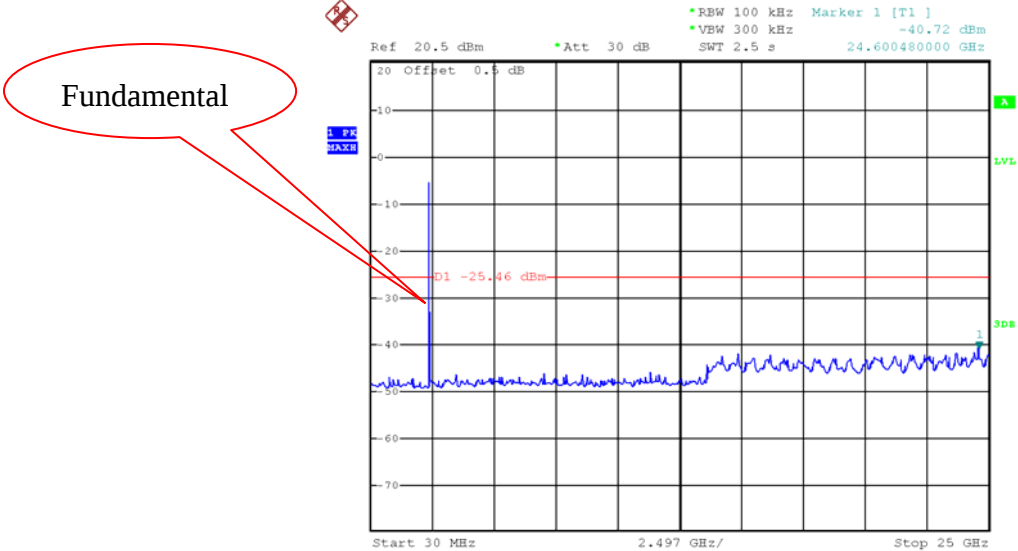


Date: 17.MAR.2020 01:39:13

Middle Channel

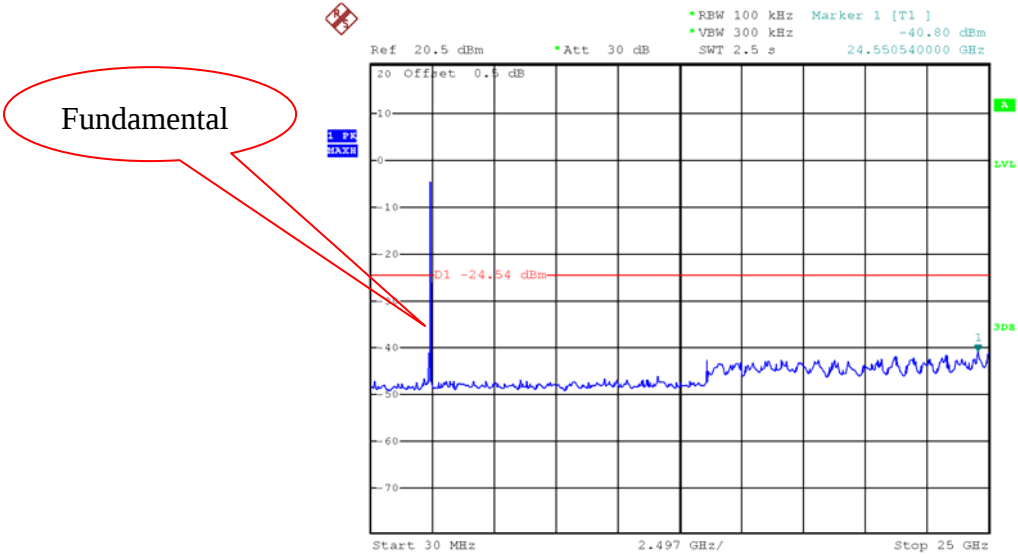

Date: 17.MAR.2020 01:38:28


High Channel

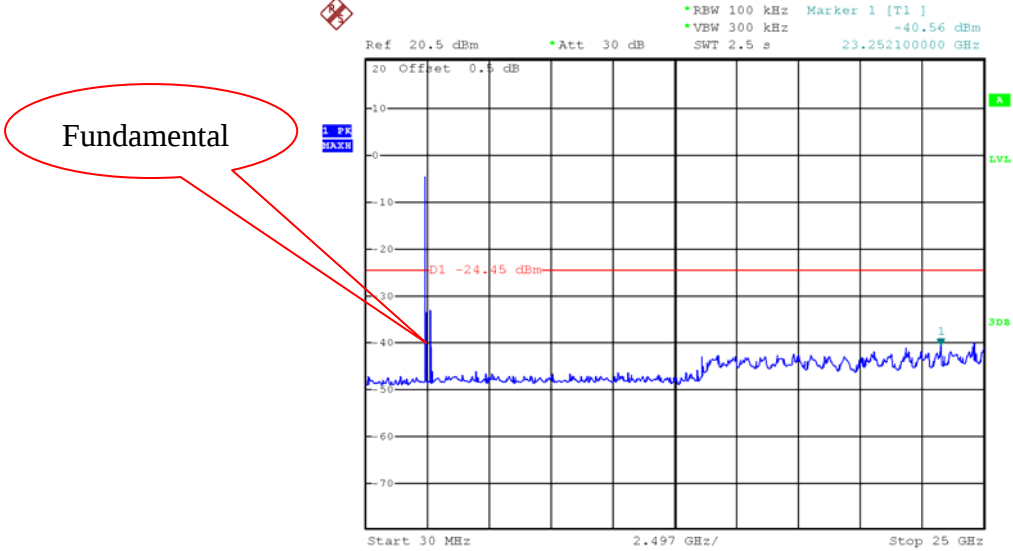



Date: 17.MAR.2020 01:37:42

802.11n HT40

Low Channel

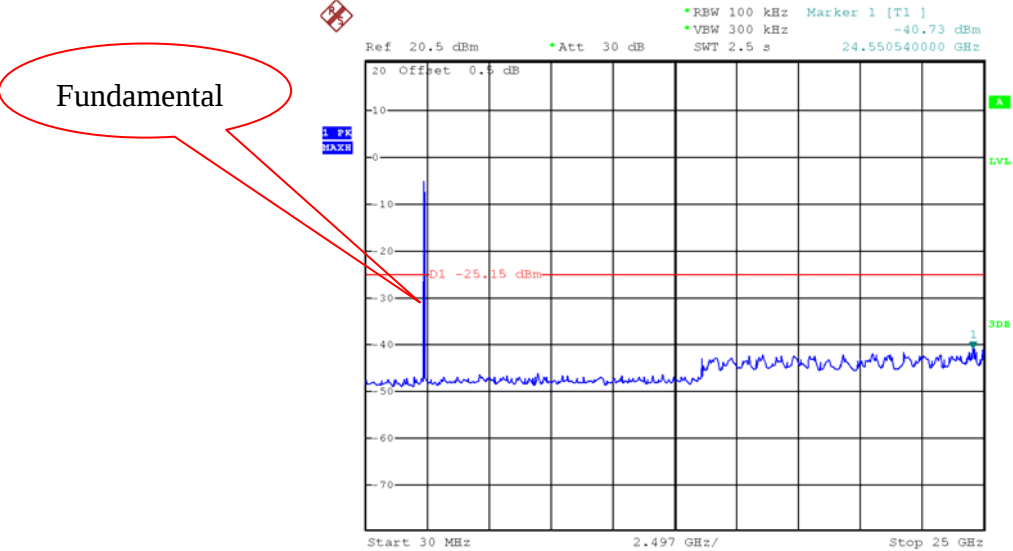


Date: 17.MAR.2020 01:40:44

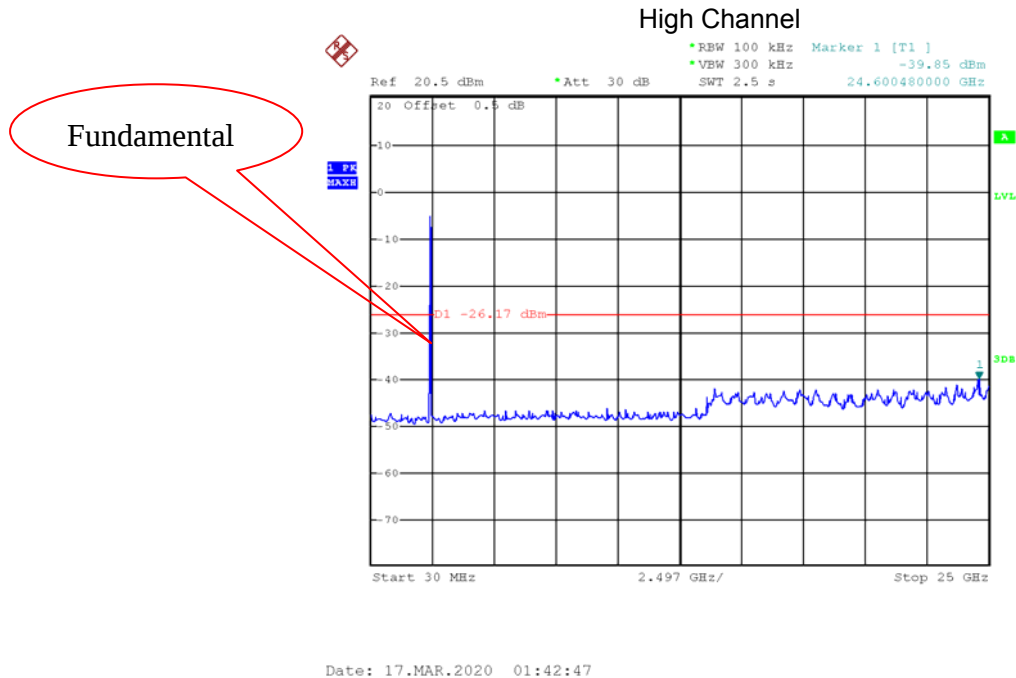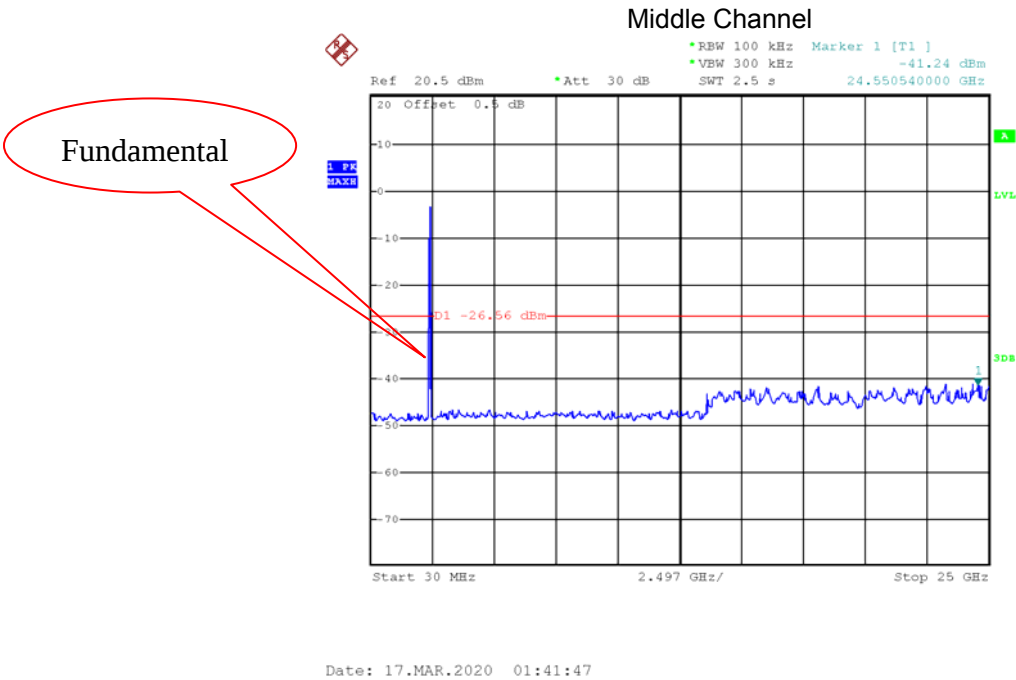


BLE

Low Channel

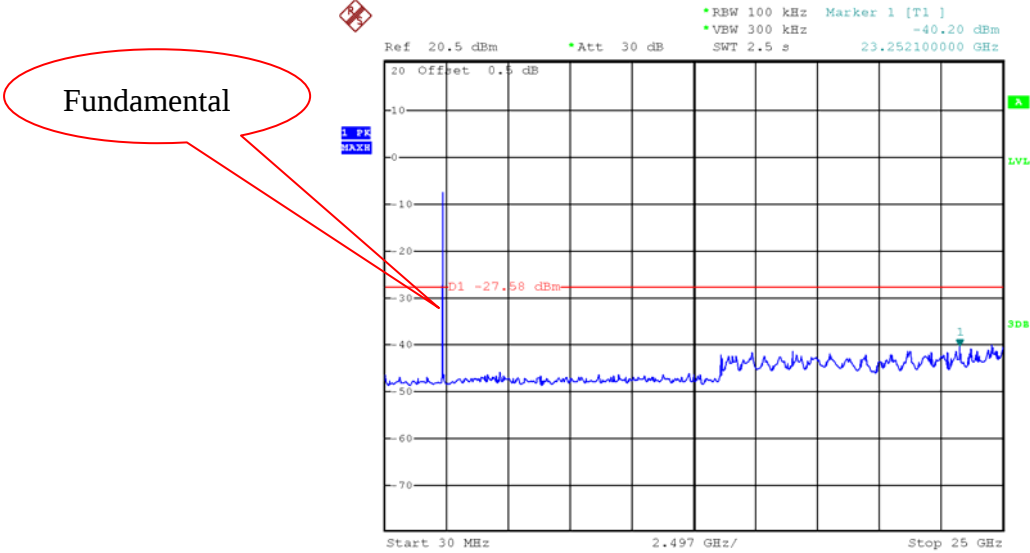


Date: 17.MAR.2020 01:08:21

Middle Channel

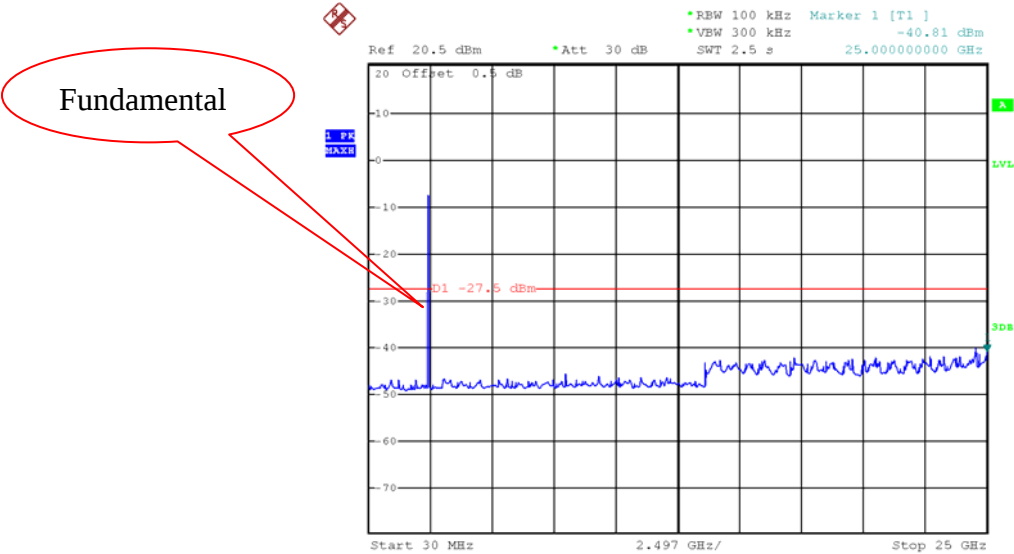

Date: 17.MAR.2020 01:09:33

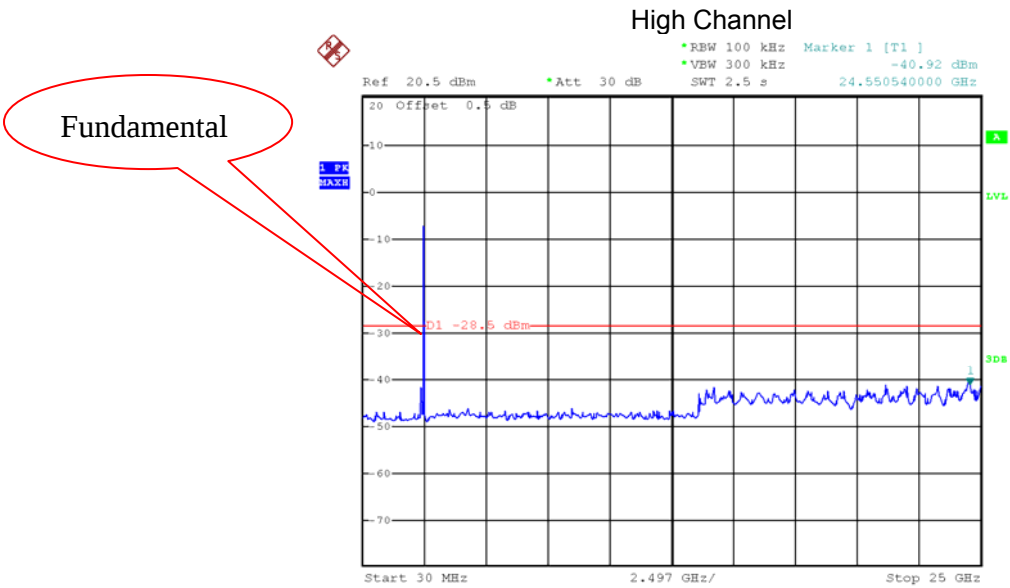

Date: 17.MAR.2020 01:11:11

## 10 Band Edge Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;  
ANSI C63.10:2013

Test Limit: Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).



Test Mode: Transmitting

### 10.1 Test Produce


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

10.2 Test Result

Test result plots shown as follows:

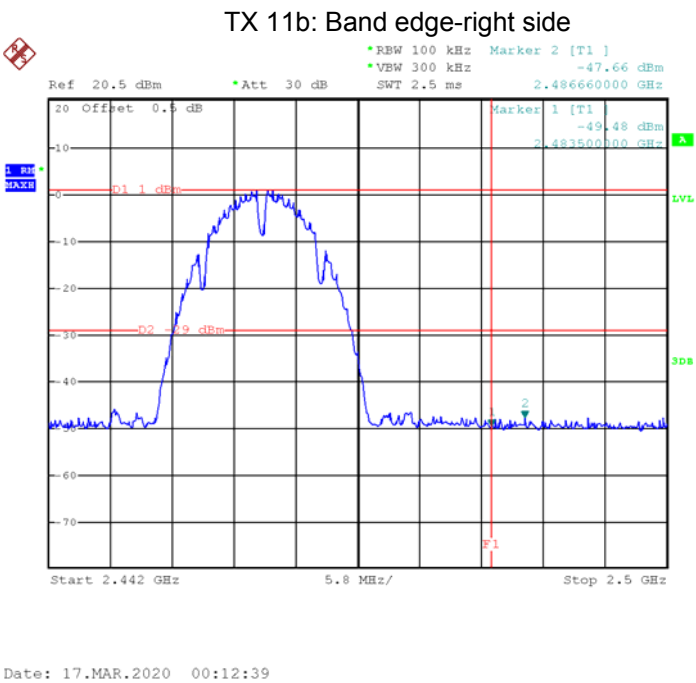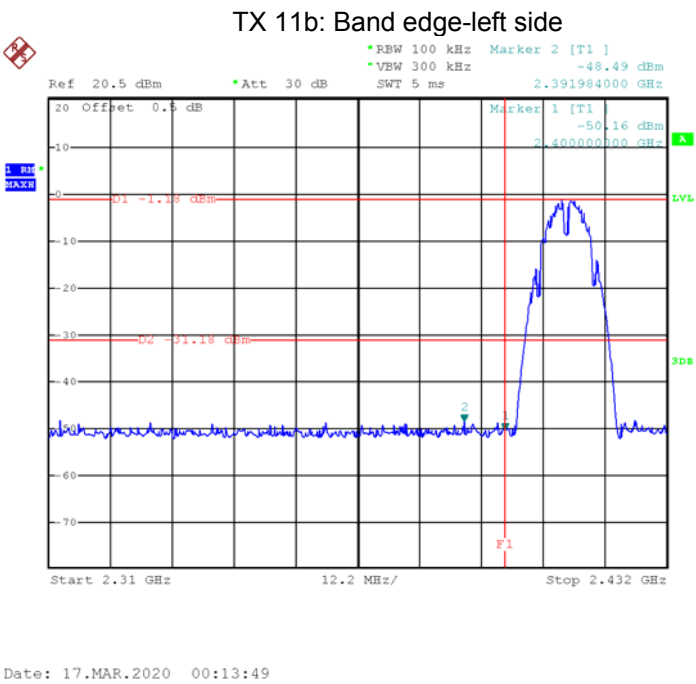


TX 11g: Band edge-left side

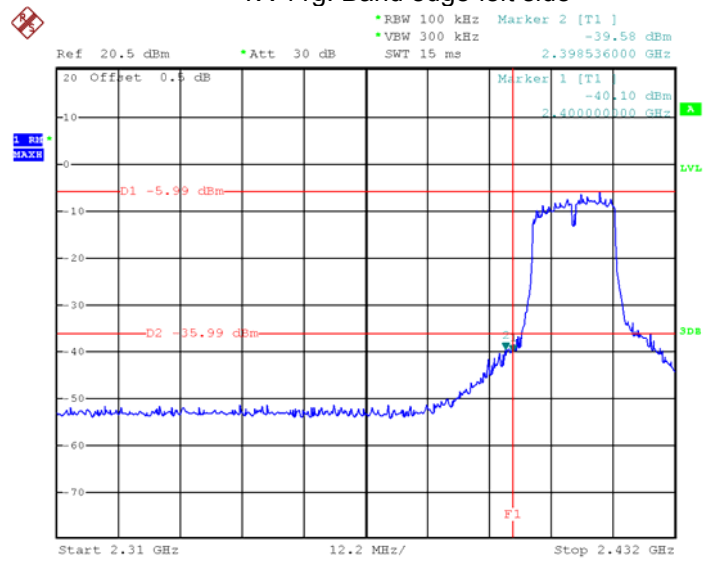


Date: 16.MAR.2020 03:22:56


TX 11g: Band edge-right side

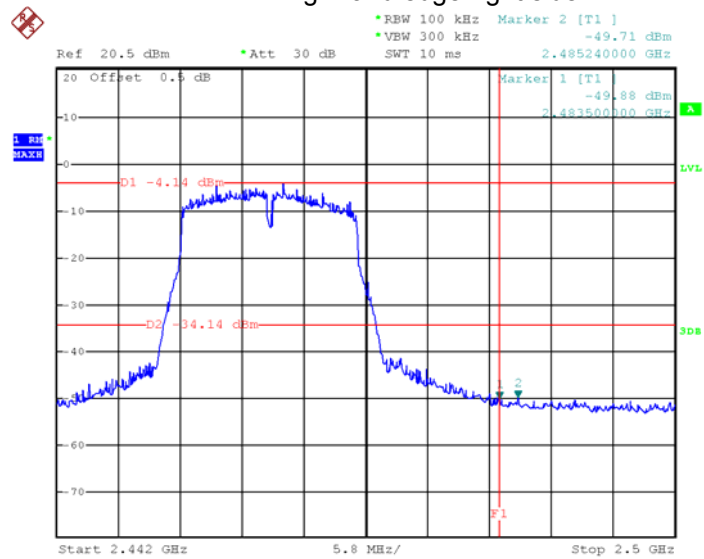


Date: 16.MAR.2020 03:24:57

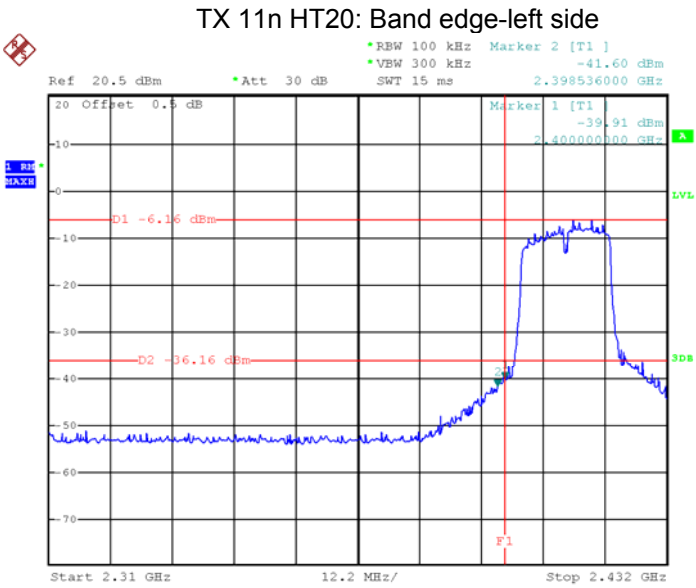


Date: 16.MAR.2020 03:50:02

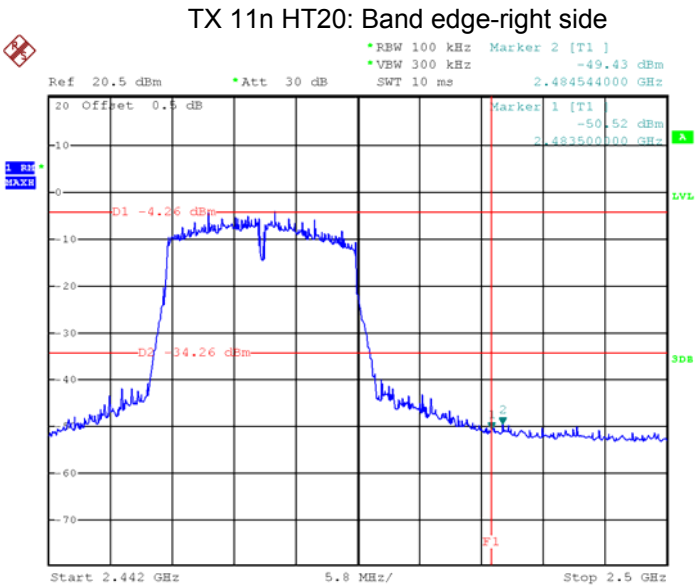

Date: 16.MAR.2020 03:52:05

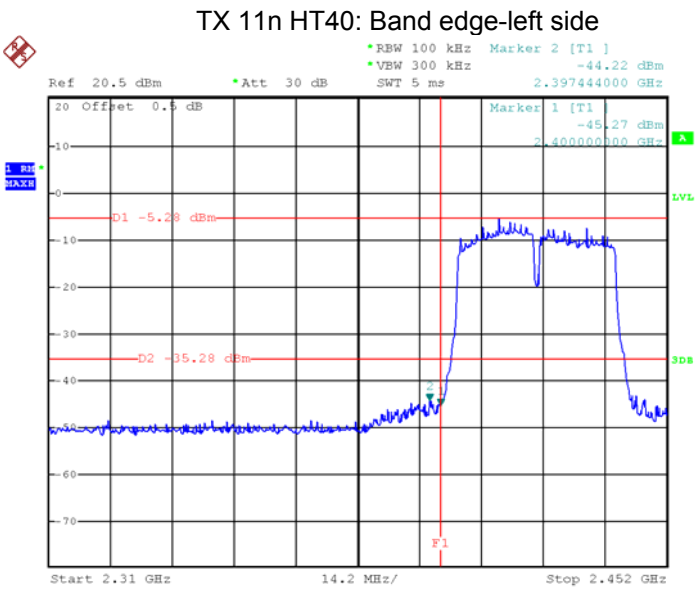


Date: 17.MAR.2020 00:17:23

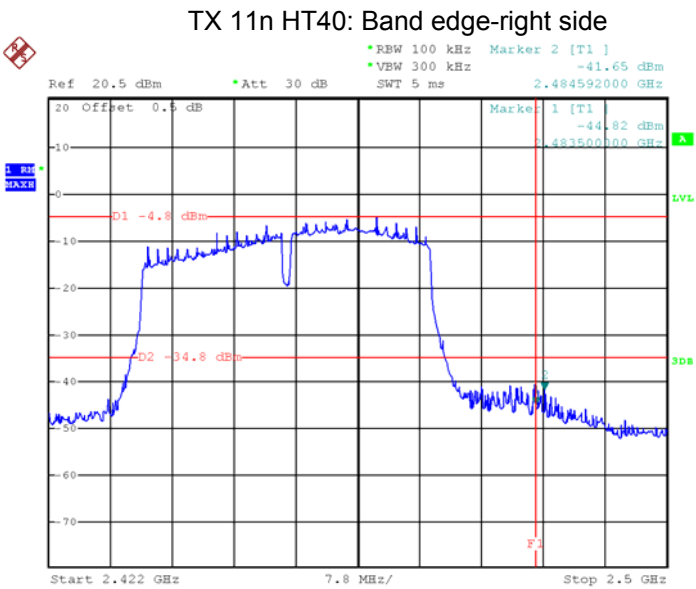


Date: 17.MAR.2020 00:18:39

BLE: Band edge-left side

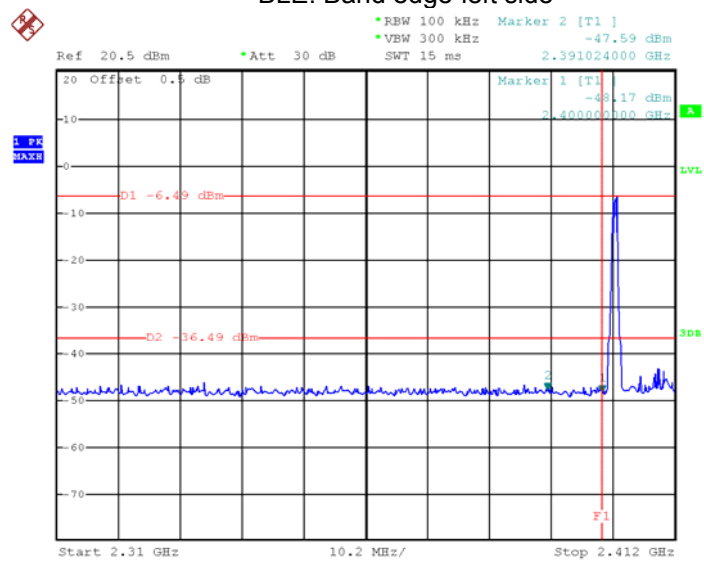

Date: 16.MAR.2020 23:53:08

BLE: Band edge-right side

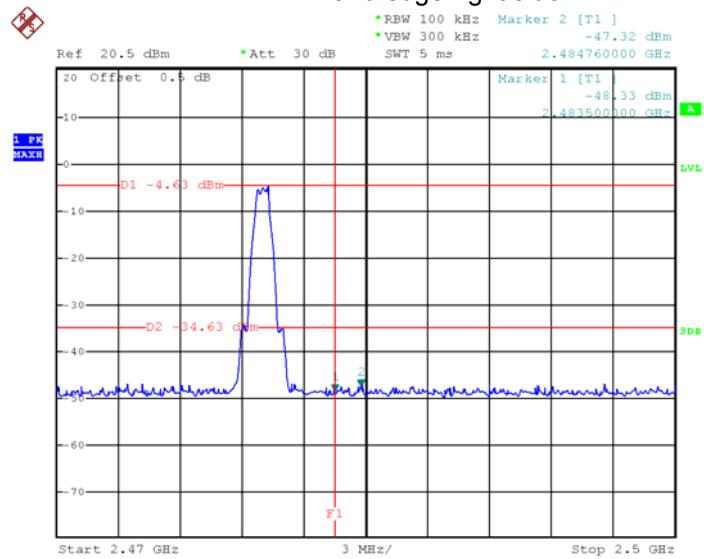

Date: 16.MAR.2020 23:54:20

## 11 6 dB Bandwidth and 99% Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;  
ANSI C63.10:2013


### 11.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz


### 11.2 Test Result:

| Operation mode | Test Channel | 6dB Bandwidth (MHz) | 99% Bandwidth (MHz) |
|----------------|--------------|---------------------|---------------------|
| TX 11b         | Channel 1    | 8.512               | 12.352              |
|                | Channel 6    | 8.576               | 12.768              |
|                | Channel 11   | 8.128               | 12.320              |
| TX 11g         | Channel 1    | 15.650              | 16.450              |
|                | Channel 6    | 15.850              | 16.500              |
|                | Channel 11   | 15.950              | 16.350              |
| TX 11n HT20    | Channel 1    | 15.714              | 17.658              |
|                | Channel 6    | 17.388              | 17.658              |
|                | Channel 11   | 15.390              | 17.550              |
| TX 11n HT40    | Channel 3    | 35.200              | 35.970              |
|                | Channel 6    | 35.600              | 36.300              |
|                | Channel 9    | 35.420              | 35.640              |
| BLE            | Channel 0    | 0.678               | 1.062               |
|                | Channel 19   | 0.678               | 1.062               |
|                | Channel 39   | 0.678               | 1.062               |


Test result plot:

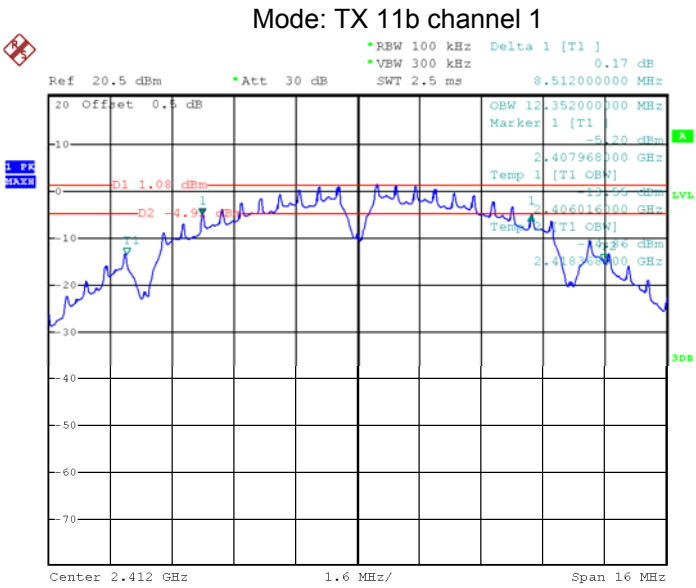


Date: 17.MAR.2020 00:00:17

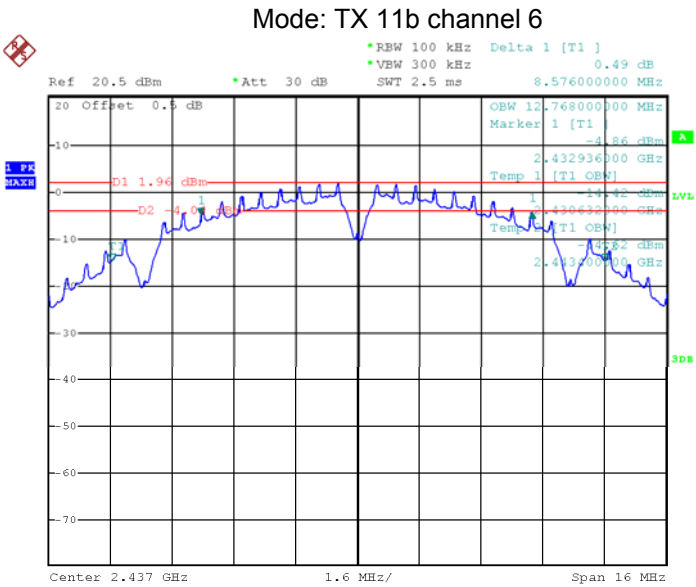


Date: 17.MAR.2020 00:02:02

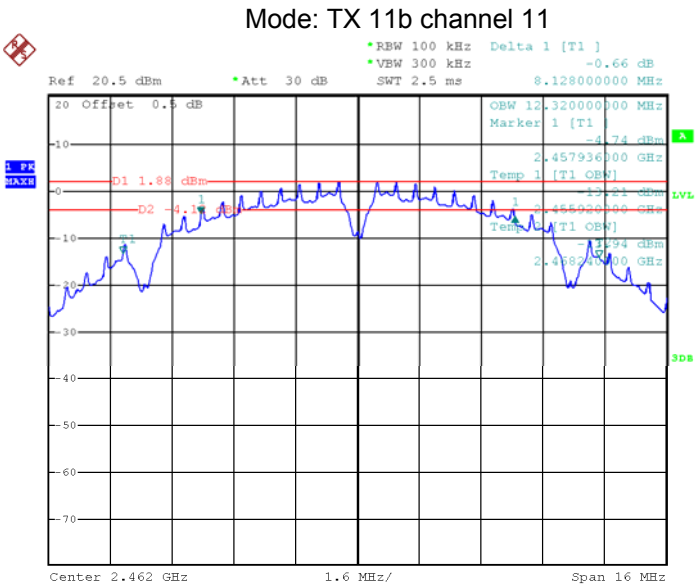


Date: 17.MAR.2020 00:03:23

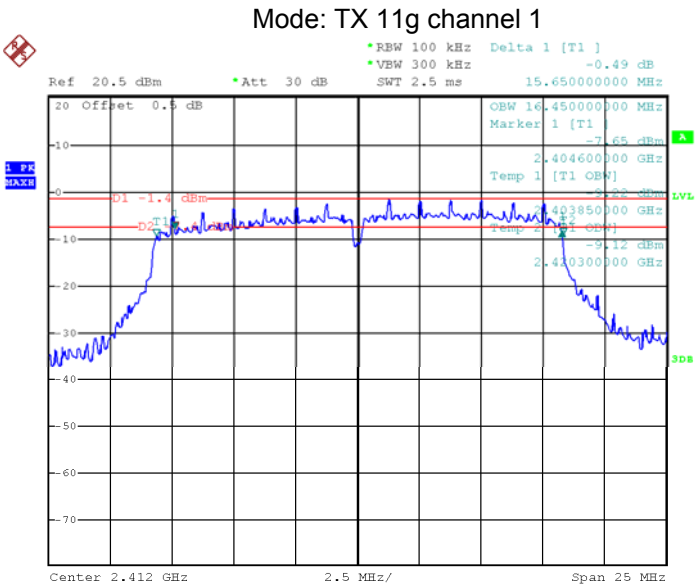


Date: 16.MAR.2020 03:33:28

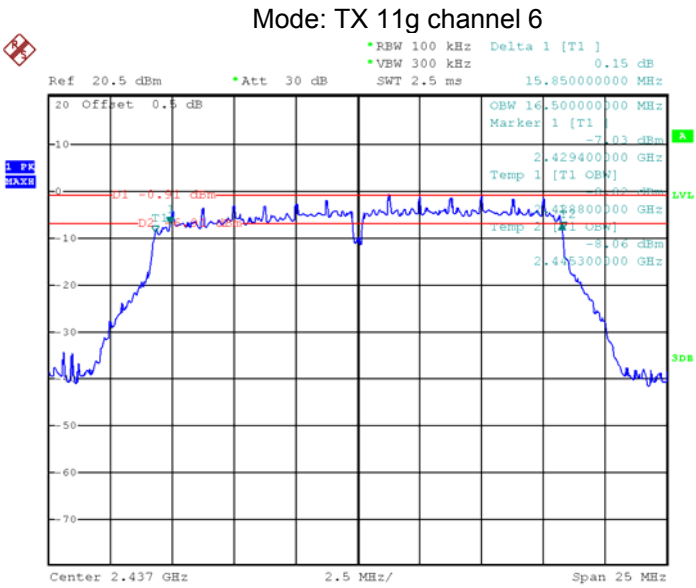


Date: 16.MAR.2020 03:31:30

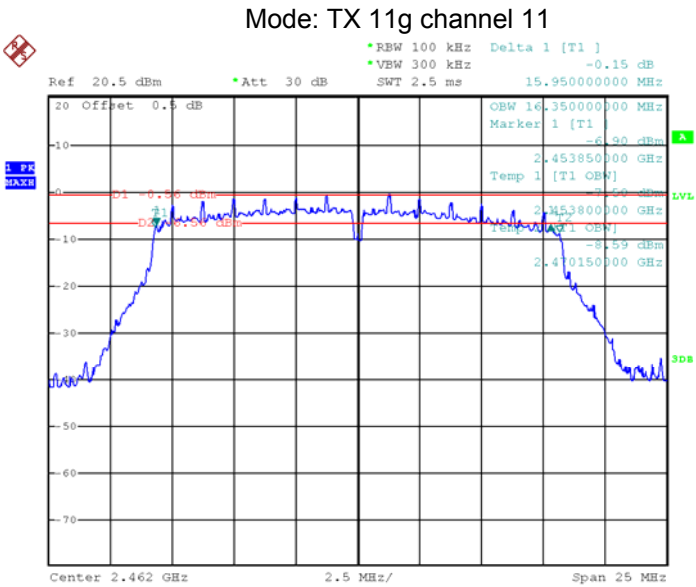


Date: 16.MAR.2020 03:29:43

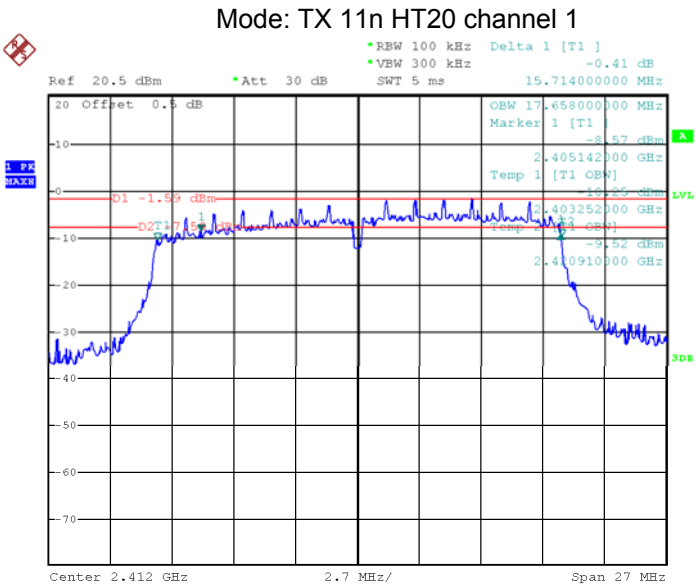


Date: 16.MAR.2020 04:46:21

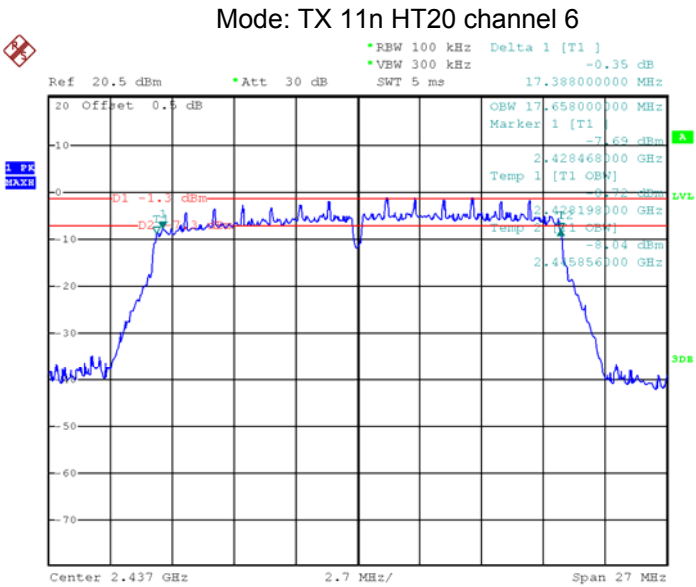

Date: 16.MAR.2020 04:44:46

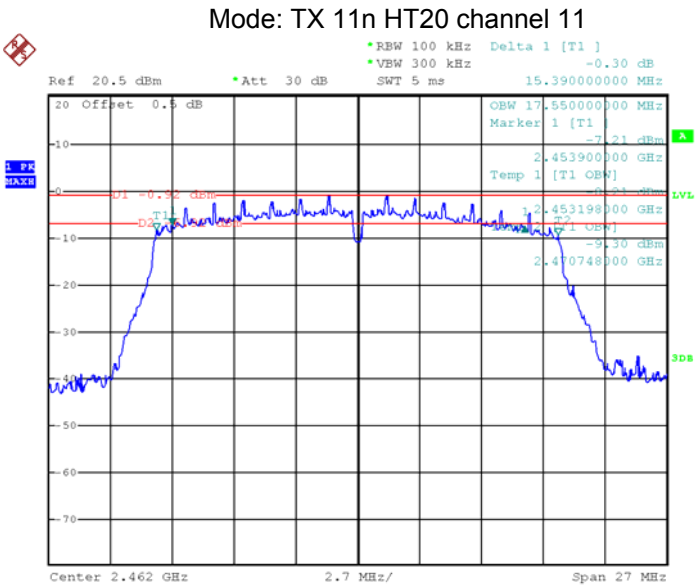


Date: 16.MAR.2020 04:43:18

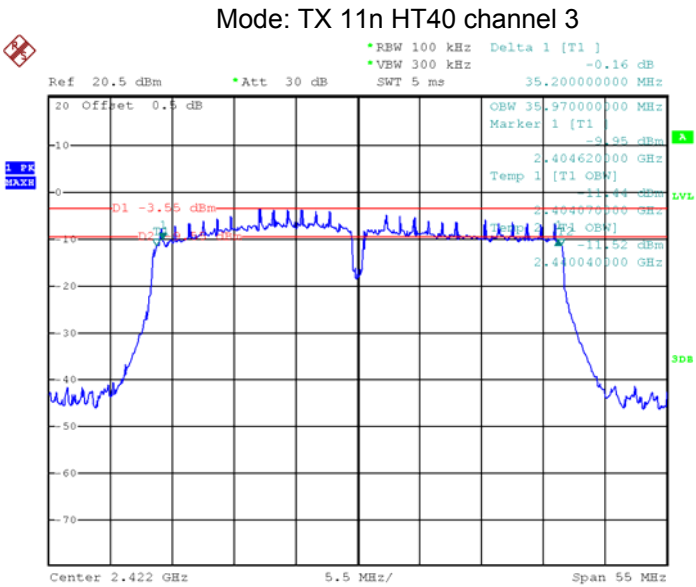


Date: 17.MAR.2020 00:22:44

## Mode: TX 11n HT40 channel 6

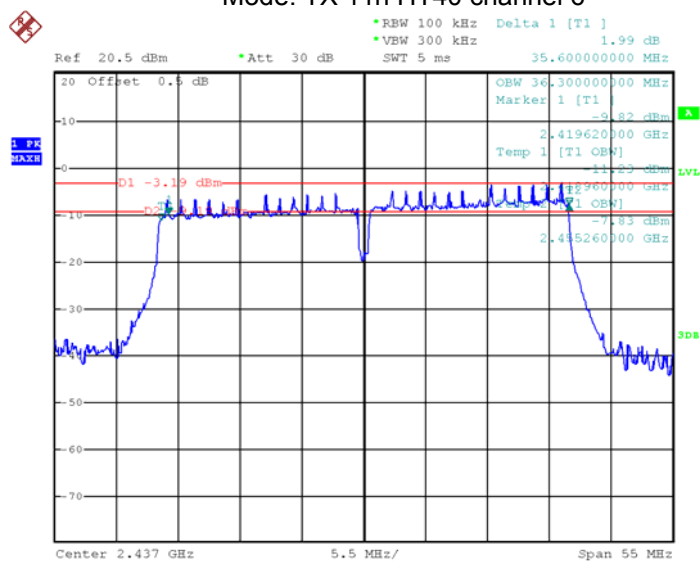


Date: 17.MAR.2020 00:24:16


## Mode: TX 11n HT40 channel 9

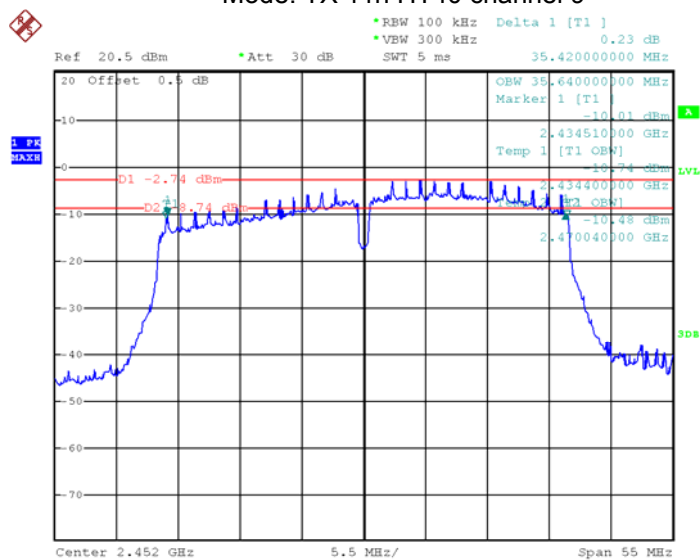


Date: 17.MAR.2020 00:26:07

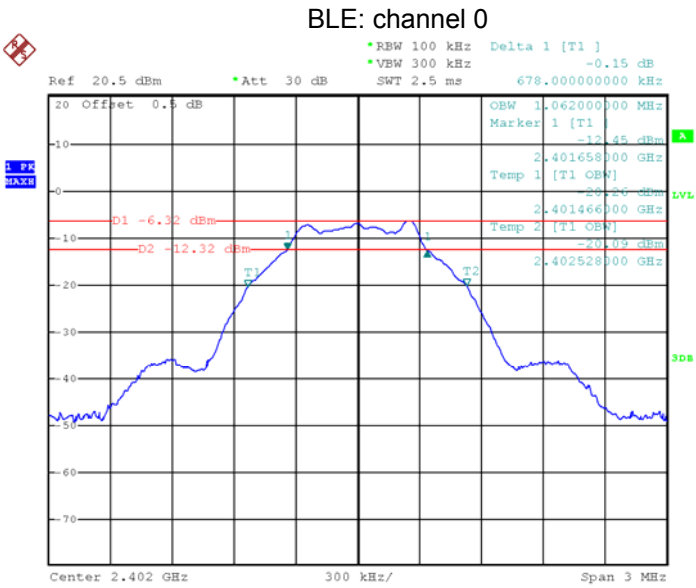

Date: 16.MAR.2020 23:46:28

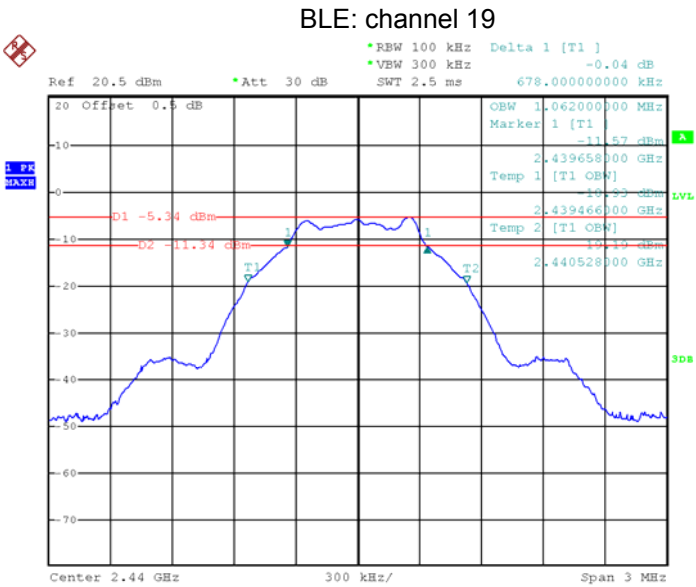

Date: 16.MAR.2020 23:47:32

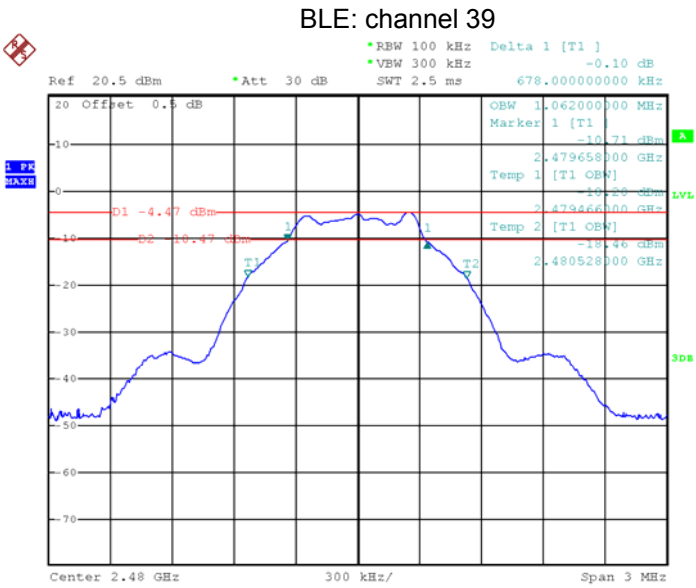

Date: 16.MAR.2020 23:48:43

## 12 Maximum Peak conducted Output Power

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;  
ANSI C63.10:2013

### 12.1 Test Procedure:

KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019

section 8.3.1.1 (For BLE)

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) Set the  $RBW \geq DTS$  bandwidth.
- b) Set  $VBW \geq 3 \times RBW$ .
- c) Set  $span \geq 3 \times RBW$
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

section 8.3.1.2 (For WIFI)

This procedure may be used when the maximum available RBW of the measurement instrument is less than the DTS bandwidth.


- a) Set the  $RBW = 1\%$  to  $5\%$  of the OBW, not to exceed 1 MHz..
- b) Set the  $VBW \geq 3 \times RBW$
- c) Set the  $span \geq 1.5 \times OBW$ .
- d) Detector = RMS.
- e) Sweep time = auto couple.
- f) trigger = free run..
- g) Number of points in sweep  $\geq [2 \times span / RBW]$ . (This gives bin-to-bin spacing  $\geq RBW / 2$ , so that narrowband signals are not lost between frequency bins.)
- h) Trace average at least 100 traces in power averaging (rms) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum..

**12.2 Test Result:**

| Operation mode | Channel Frequency<br>(MHz) | Maximum Peak Output<br>Power (dBm) | Limit    |
|----------------|----------------------------|------------------------------------|----------|
| TX 11b         | Low-2412                   | 11.80                              | 1W/30dBm |
|                | Middle-2437                | 12.50                              | 1W/30dBm |
|                | High-2462                  | 12.61                              | 1W/30dBm |
| TX 11g         | Low-2412                   | 13.08                              | 1W/30dBm |
|                | Middle-2437                | 13.70                              | 1W/30dBm |
|                | High-2462                  | 13.72                              | 1W/30dBm |
| TX 11n HT20    | Low-2412                   | 12.87                              | 1W/30dBm |
|                | Middle-2437                | 13.59                              | 1W/30dBm |
|                | High-2462                  | 13.63                              | 1W/30dBm |
| TX 11n HT40    | Low-2422                   | 10.56                              | 1W/30dBm |
|                | Middle-2437                | 10.56                              | 1W/30dBm |
|                | High-2452                  | 10.80                              | 1W/30dBm |
| BLE            | Low-2402                   | -5.52                              | 1W/30dBm |
|                | Middle-2440                | -5.28                              | 1W/30dBm |
|                | High-2480                  | -4.48                              | 1W/30dBm |


Test Plot

Mode: TX 11b channel 1

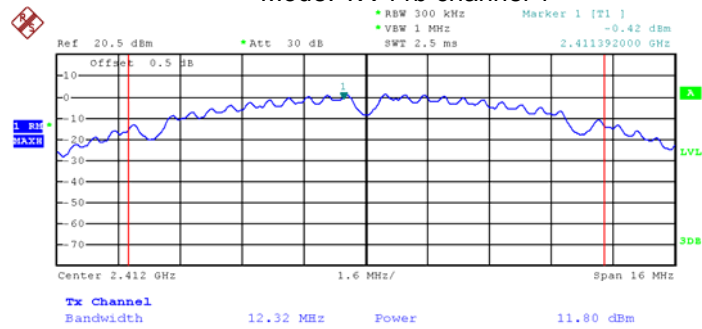


Date: 17.MAR.2020 00:08:32


Mode: TX 11b channel 6

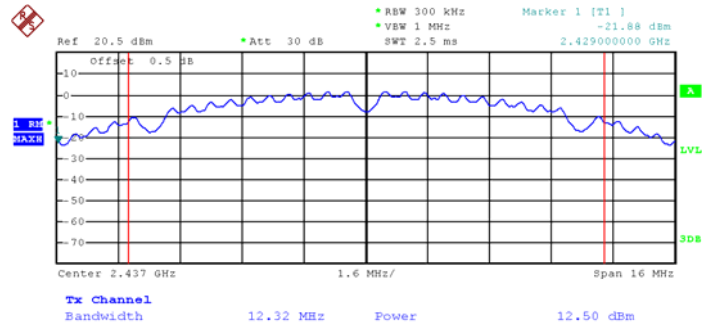


Date: 17.MAR.2020 00:09:14

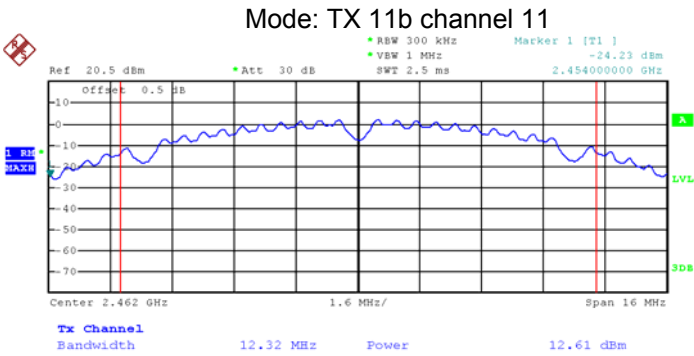


Date: 17.MAR.2020 00:09:51

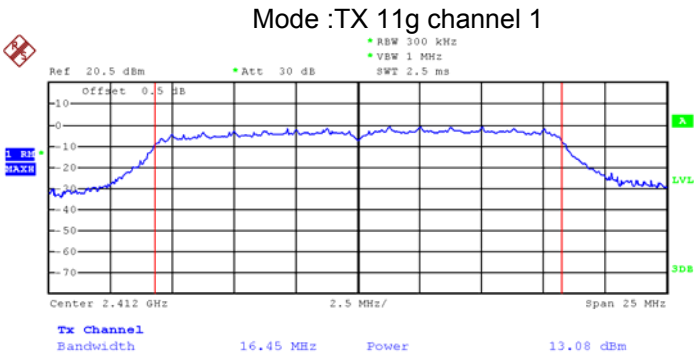


Date: 16.MAR.2020 03:35:53

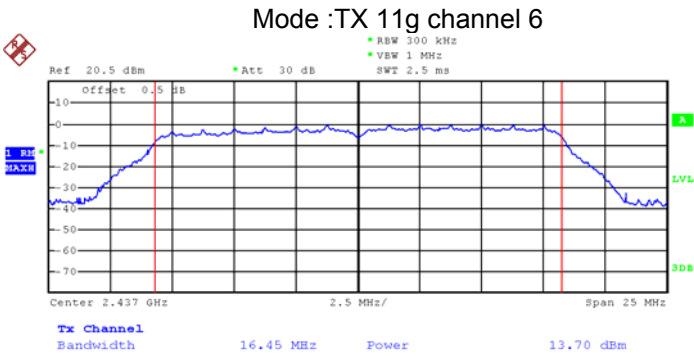


Date: 16.MAR.2020 03:36:40

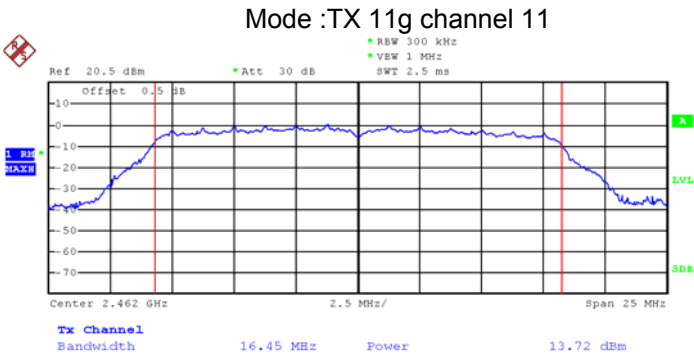


Date: 16.MAR.2020 03:37:31

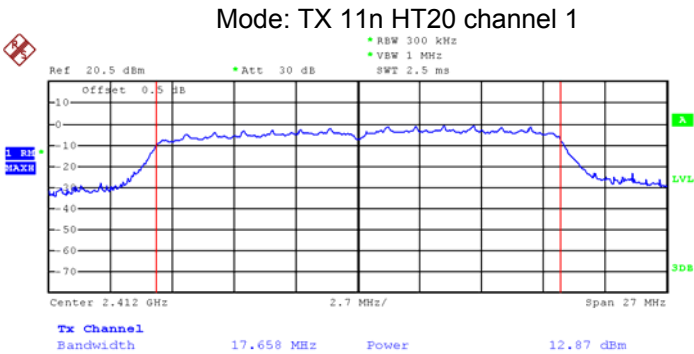


Date: 16.MAR.2020 04:48:49

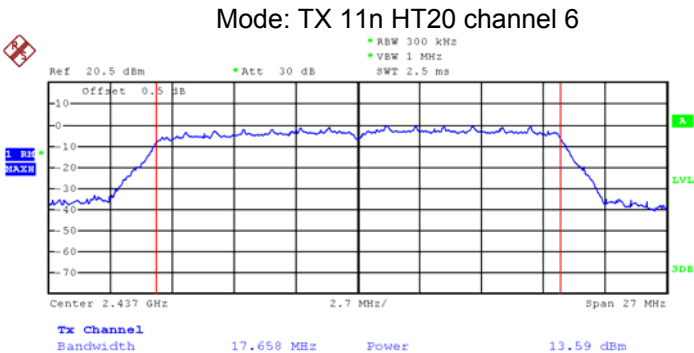


Date: 16.MAR.2020 04:49:31

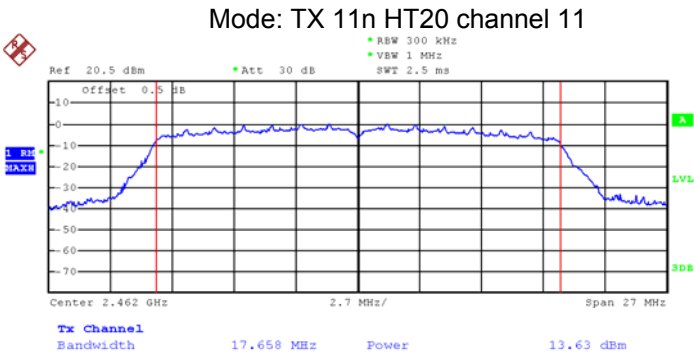


Date: 16.MAR.2020 04:50:13

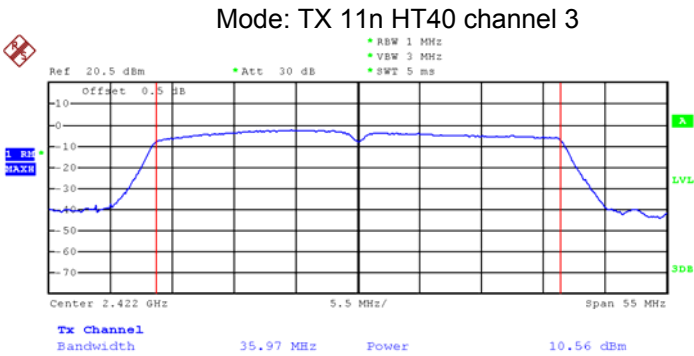


Date: 17.MAR.2020 00:31:02

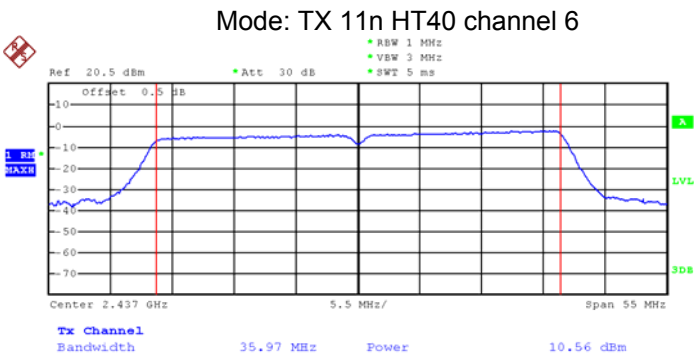


Date: 17.MAR.2020 00:31:44

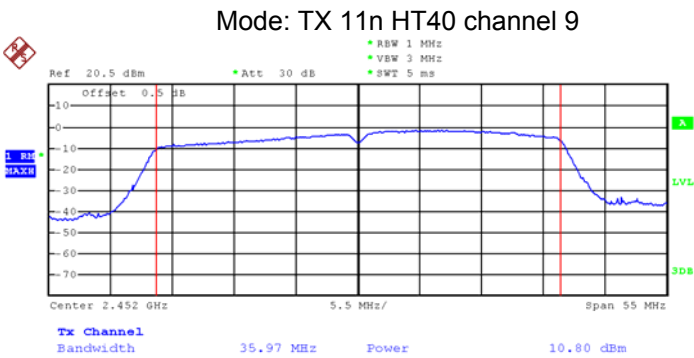


Date: 17.MAR.2020 00:32:22

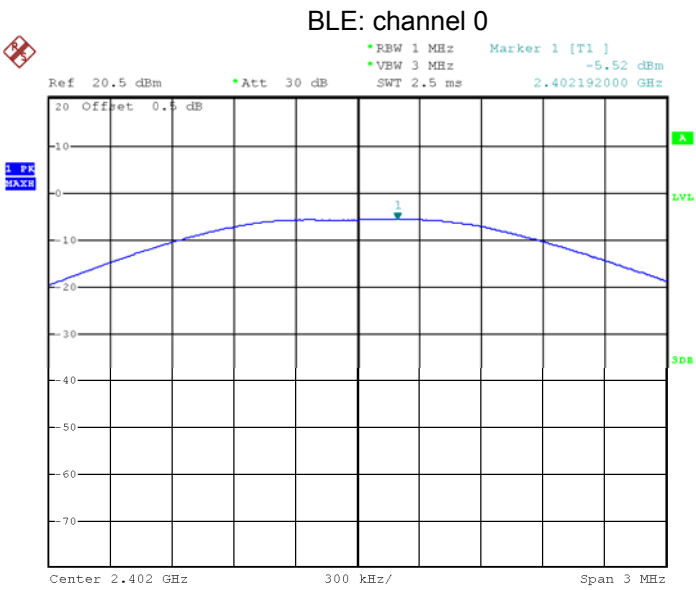

Date: 16.MAR.2020    23:39:03

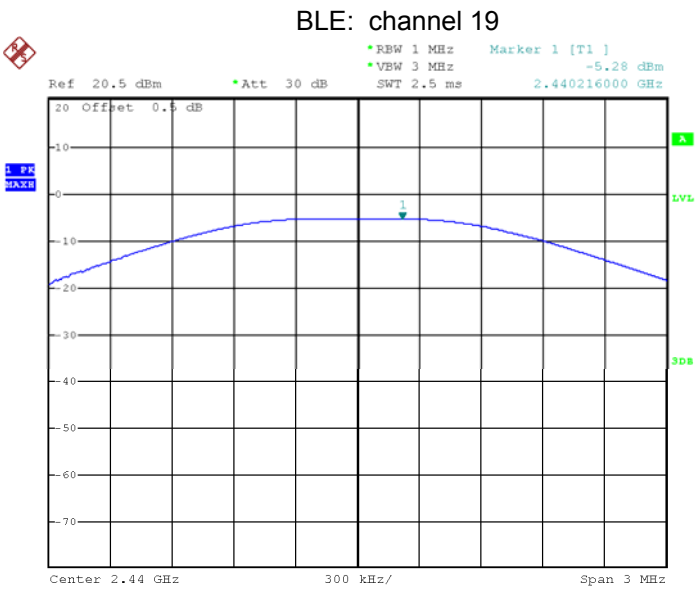

Date: 16.MAR.2020    23:39:48

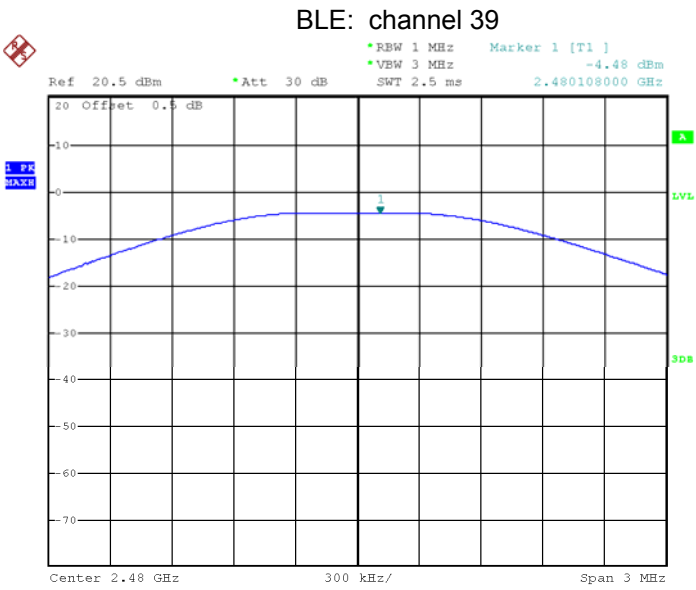

Date: 16.MAR.2020 23:40:57

### 13 Duty cycle

|                   |                                  |
|-------------------|----------------------------------|
| Test Requirement: | FCC CFR47 Part 15 Section 15.247 |
| Test Method:      | ANSI C63.10: 2013                |
| Test Limit:       | N/A                              |
| Test Result:      | PASS                             |
| Remark:           | EUT transmitting continuously    |

## 14 Power Spectral density

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;  
ANSI C63.10:2013


### 14.1 Test Procedure:

KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019 section 10.2


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

### 14.2 Test Result:


| Operation mode | Channel Frequency (MHz) | Power Spectral (dBm per 3kHz) | Limit         |
|----------------|-------------------------|-------------------------------|---------------|
| TX 11b         | Low-2412                | -12.89                        | 8dBm per 3kHz |
|                | Middle-2437             | -12.93                        | 8dBm per 3kHz |
|                | High-2462               | -11.48                        | 8dBm per 3kHz |
| TX 11g         | Low-2412                | -18.63                        | 8dBm per 3kHz |
|                | Middle-2437             | -18.41                        | 8dBm per 3kHz |
|                | High-2462               | -16.69                        | 8dBm per 3kHz |
| TX 11n HT20    | Low-2412                | -20.88                        | 8dBm per 3kHz |
|                | Middle-2437             | -15.49                        | 8dBm per 3kHz |
|                | High-2462               | -14.91                        | 8dBm per 3kHz |
| TX 11n HT40    | Low-2422                | -19.23                        | 8dBm per 3kHz |
|                | Middle-2437             | -17.80                        | 8dBm per 3kHz |
|                | High-2452               | -16.06                        | 8dBm per 3kHz |
| BLE            | Low-2402                | -22.79                        | 8dBm per 3kHz |
|                | Middle-2440             | -21.73                        | 8dBm per 3kHz |
|                | High-2480               | -20.84                        | 8dBm per 3kHz |

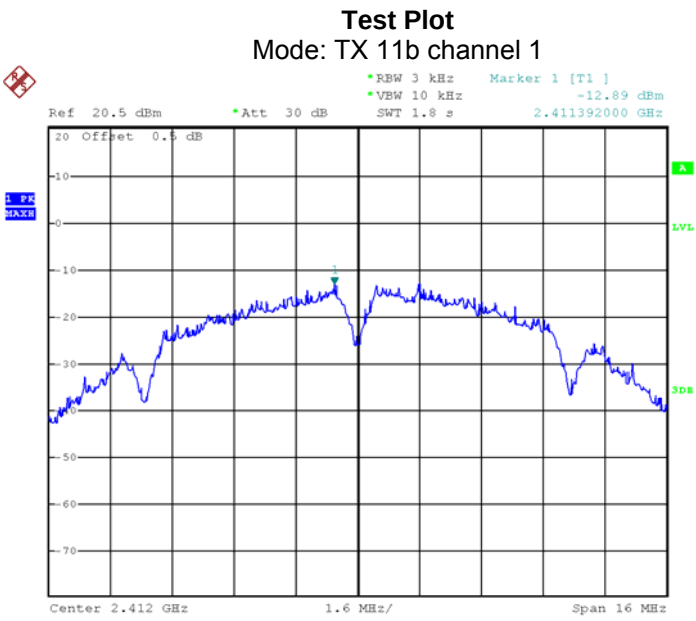


Date: 17.MAR.2020 00:06:08

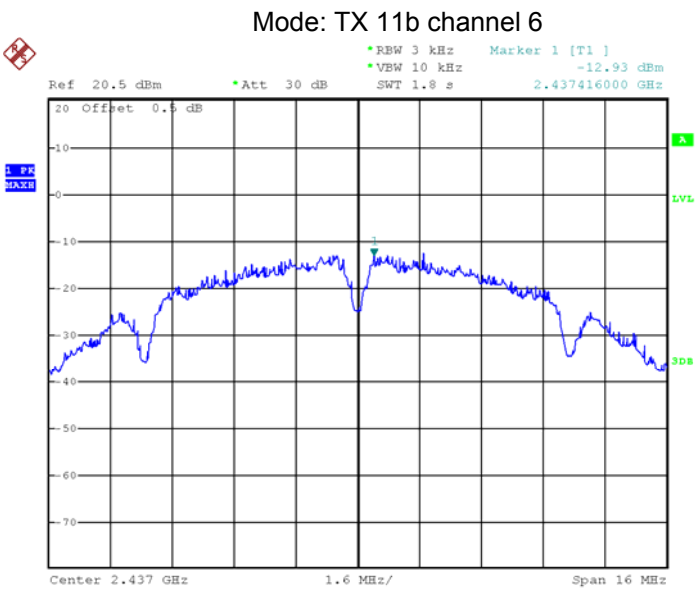


Date: 17.MAR.2020 00:05:29

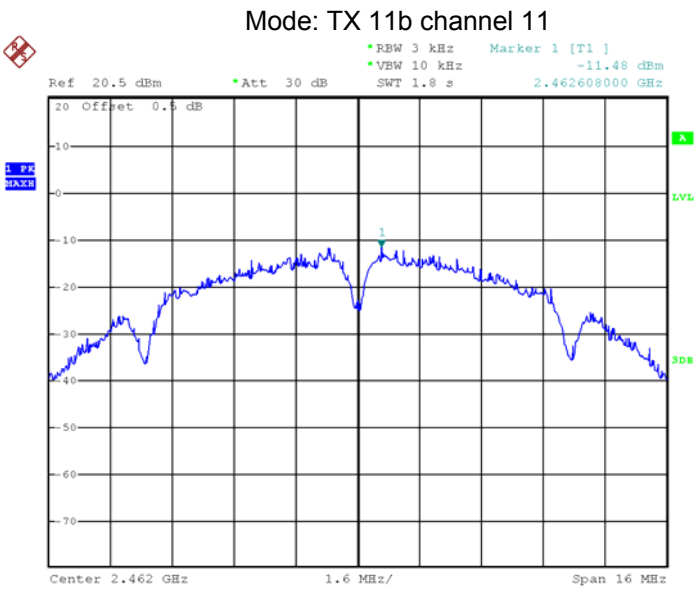


Date: 17.MAR.2020 00:04:43

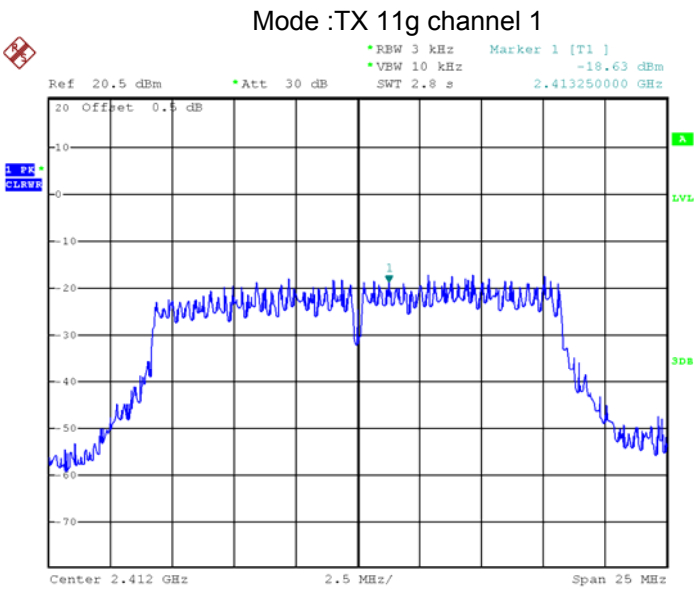


Date: 16.MAR.2020 03:40:11

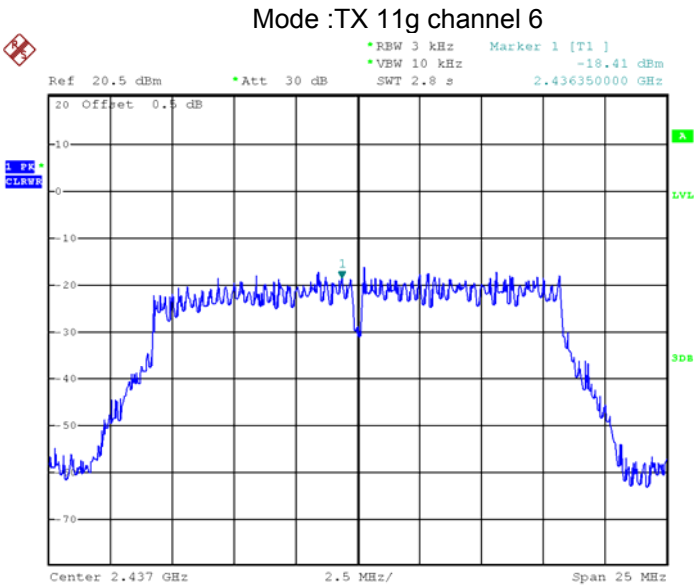


Date: 16.MAR.2020 03:41:05

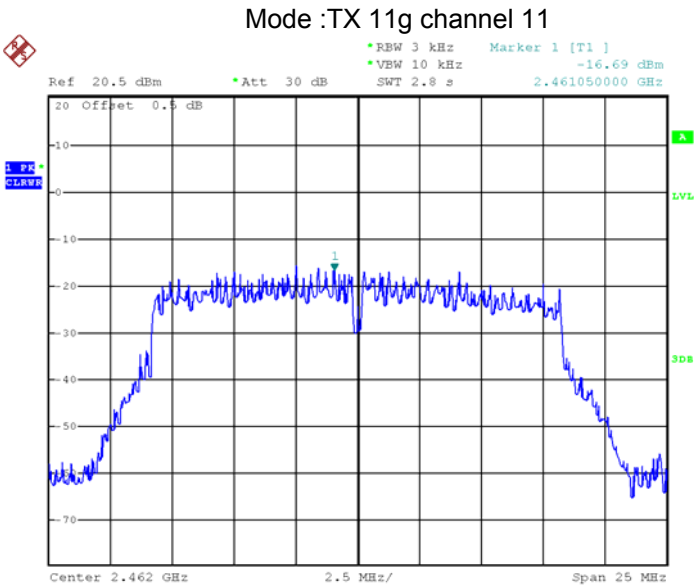


Date: 16.MAR.2020 03:41:52

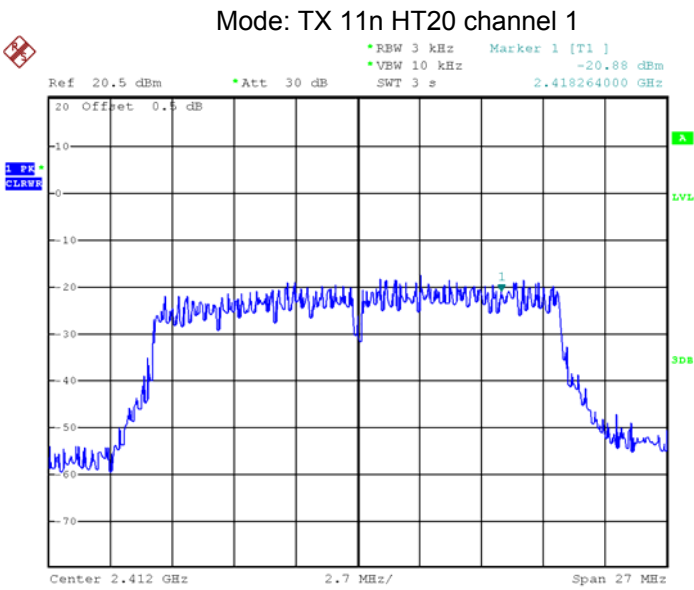


Date: 16.MAR.2020 04:52:51

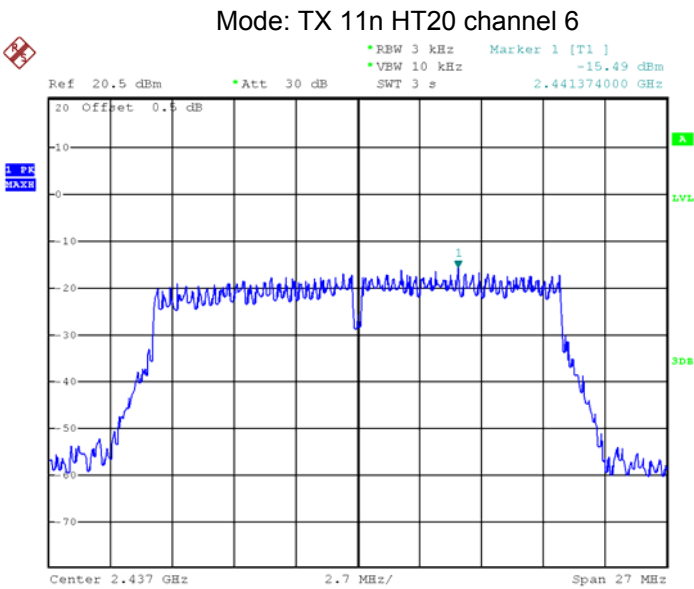


Date: 16.MAR.2020 04:51:57

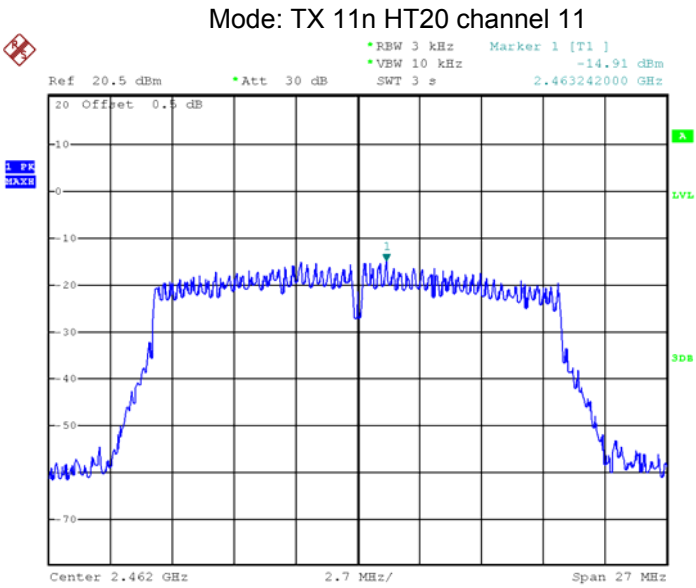


Date: 16.MAR.2020 04:51:17

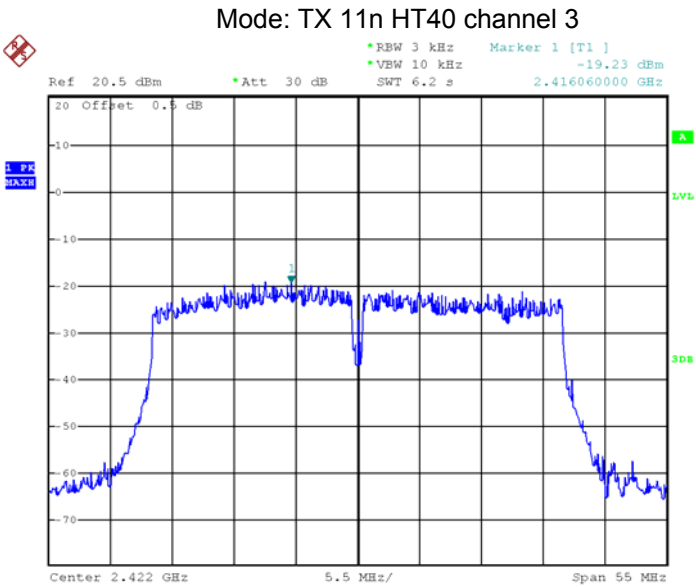


Date: 17.MAR.2020 02:19:40

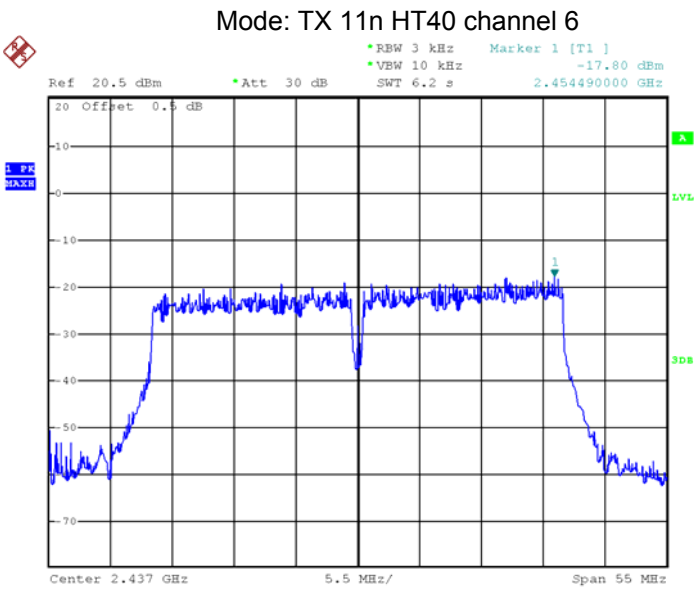


Date: 17.MAR.2020 02:18:56

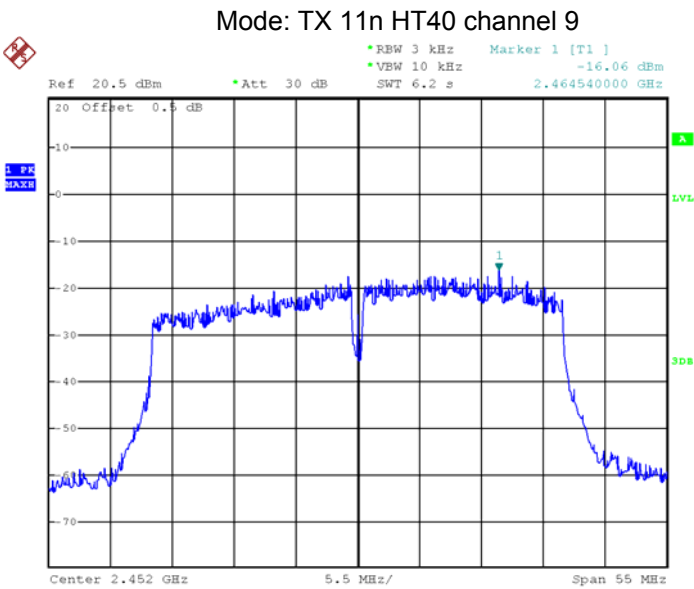


Date: 17.MAR.2020 02:18:05

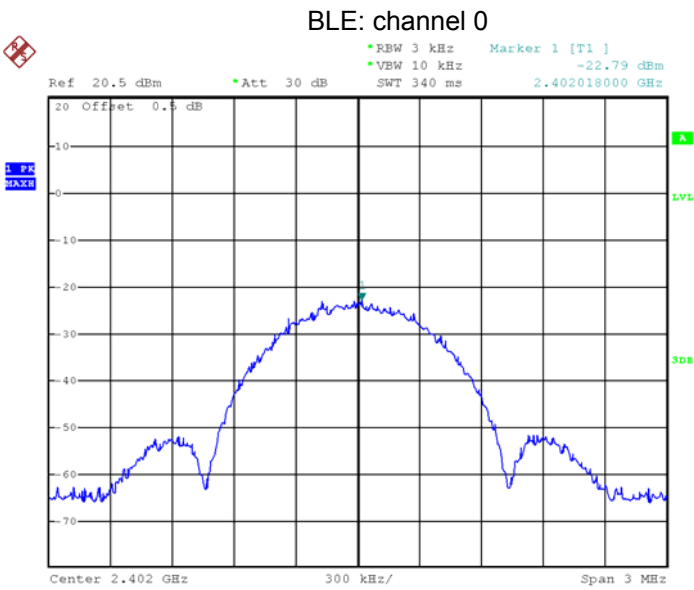

Date: 16.MAR.2020 23:43:37

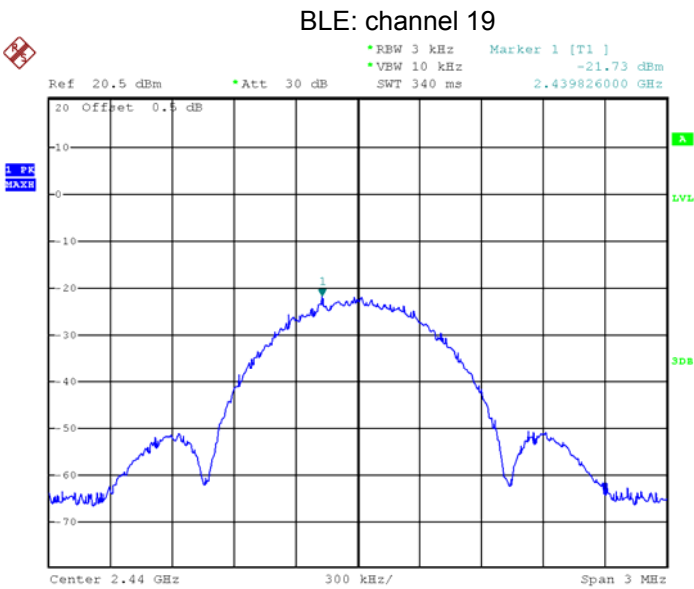

Date: 16.MAR.2020 23:42:55

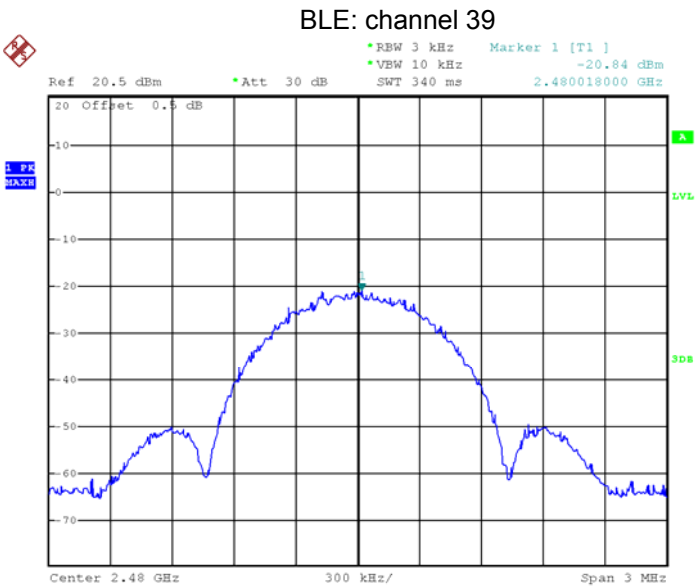

Date: 16.MAR.2020 23:42:15

## **15 Antenna Requirement**

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an integrated antenna fulfill the requirement of this section.

## **16 RF Exposure**

Remark: refer to SAR test report: WTS20S03007917W001.

## **17 Photographs of test setup and EUT.**

Note: Please refer to appendix: Appendix-CD7-Photos.

=====End of Report=====