



## FCC PART 15.225

### TEST REPORT

For

## TECNO MOBILE LIMITED

FLAT 39 8/F BLOCK D WAH LOK INDUSTRIAL CENTRE 31-35 SHAN MEI STREET  
FOTAN NT Hong Kong

**FCC ID: 2ADYY-CH7N**

<b>Report Type:</b> Original Report	<b>Product Type:</b> Mobile phone
<b>Report Number:</b>	<u>SZ1210720-30052E-RF-00E</u>
<b>Report Date:</b>	<u>2021-08-13</u>
<b>Reviewed By:</b>	Jacob Kong RF Engineer <i>Jacob Kong</i>
<b>Prepared By:</b>	Bay Area Compliance Laboratories Corp. (Shenzhen) 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China Tel: +86-755-33320018 Fax: +86-755-33320008 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>

**Note:** This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “★”.

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk “\*”. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

## TABLE OF CONTENTS

<b>GENERAL INFORMATION</b> .....	<b>3</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
OBJECTIVE .....	3
TEST METHODOLOGY .....	3
MEASUREMENT UNCERTAINTY.....	4
<b>SYSTEM TEST CONFIGURATION</b> .....	<b>5</b>
JUSTIFICATION .....	5
EUT EXERCISE SOFTWARE .....	5
EQUIPMENT MODIFICATIONS .....	5
SUPPORT EQUIPMENT LIST AND DETAILS .....	5
EXTERNAL I/O CABLE.....	5
BLOCK DIAGRAM OF TEST SETUP .....	5
<b>SUMMARY OF TEST RESULTS</b> .....	<b>6</b>
<b>TEST EQUIPMENT LIST</b> .....	<b>7</b>
<b>FCC§15.203 - ANTENNA REQUIREMENT</b> .....	<b>8</b>
APPLICABLE STANDARD .....	8
ANTENNA CONNECTED CONSTRUCTION .....	8
<b>FCC §15.207 – AC LINE CONDUCTED EMISSION</b> .....	<b>9</b>
APPLICABLE STANDARD .....	9
EUT SETUP .....	9
EMI TEST RECEIVER SETUP.....	9
TEST PROCEDURE .....	10
CORRECTED FACTOR & MARGIN CALCULATION .....	10
TEST DATA .....	10
<b>FCC§15.225, §15.205 &amp; §15.209 - RADIATED EMISSIONS TEST</b> .....	<b>13</b>
APPLICABLE STANDARD .....	13
EUT SETUP .....	13
EMI TEST RECEIVER SETUP.....	14
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	14
TEST DATA .....	14
<b>FCC§15.225(E) - FREQUENCY STABILITY</b> .....	<b>18</b>
APPLICABLE STANDARD .....	18
TEST PROCEDURE .....	18
TEST DATA .....	18
<b>FCC§15.215(C) - 20DB EMISSION BANDWIDTH</b> .....	<b>19</b>
REQUIREMENT .....	19
TEST PROCEDURE .....	19
TEST DATA .....	19

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

Product	Mobile Phone
Tested Model	CH7n
Frequency Range	13.56 MHz
Modulation Technique	ASK
Voltage Range	DC 3.87V from battery or DC 5V/10V from adapter
Date of Test	2021-07-24 to 2021-08-13
Sample serial number	SZ1210720-30052E-RF-RF-S1(Assigned by BACL, Shenzhen)
Received date	2021-07-20
Sample/EUT Status	Good condition
Normal/Extreme Condition	L.V.: Low Voltage 3.45V <sub>DC</sub> N.V.: Normal Voltage 3.87V <sub>DC</sub> H.V.: High Voltage 4.45V <sub>DC</sub> Note: The extreme condition was declared by the applicant
Adapter information	Model: U330TSA Input: AC 100-240V ~ 50/60Hz, 1.5A Output: DC 5.0V, 3.0A 15.0W or 10.0V, 3.3A 33.0W MAX

### Objective

This Type approval report is in accordance with Part 2- Subpart J, and Part 15-Subparts A and C of the Federal Communication Commissions rules.

The objective is to determine the compliance of the EUT with FCC rules, section 15.203, 15.205, 15.207, 15.209 and 15.225.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters. Each test item follows test standards and with no deviation.

## Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
AC Power Lines Conducted Emissions		±1.95dB
Radiated Emissions	Below 1GHz	±4.75dB
	Above 1GHz	±4.88dB
Temperature		±1°C
Humidity		±6%
Supply voltages		±0.4%

*Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.*

## Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

## SYSTEM TEST CONFIGURATION

### Justification

The system was configured for testing in a typical fashion (as normally used by a typical user).

### EUT Exercise Software

No Exercise Software was used.

### Equipment Modifications

No modification on the EUT.


### Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
/	/	/	/

### External I/O Cable

Cable Description	Length (m)	From Port	To
Un-Shielding Detachable USB Cable	1.0	EUT	Adapter

### Block Diagram of Test Setup

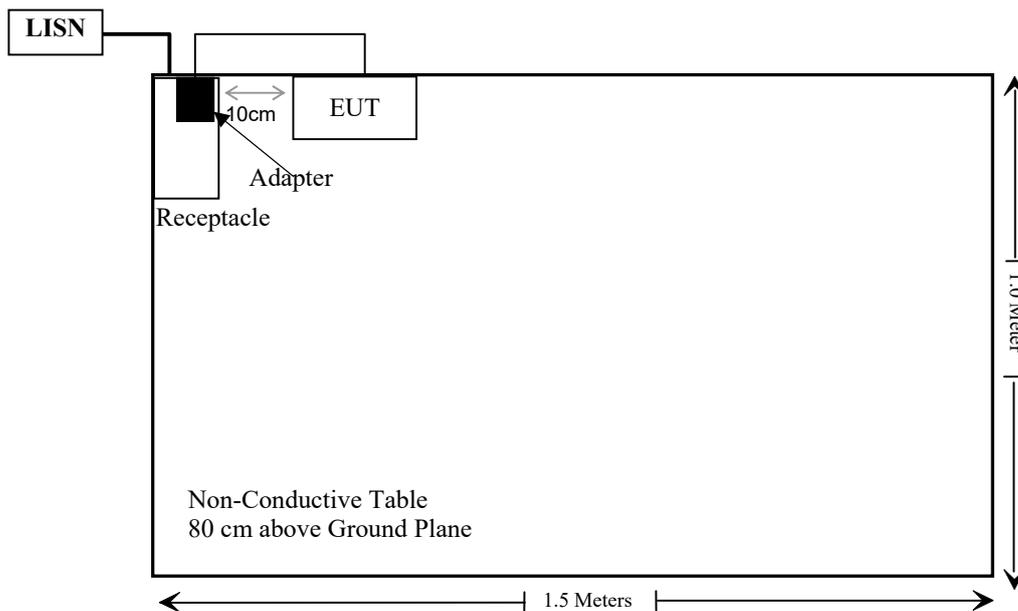

**SUMMARY OF TEST RESULTS**

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Result</b>
§15.203	Antenna Requirement	Compliance
§15.207	AC Line Conducted Emission	Compliance
§15.225 §15.209 §15.205	Radiated Emission Test	Compliance
§15.225(e)	Frequency Stability	Compliance
§15.215(c)	20dB Emission Bandwidth	Compliance

**TEST EQUIPMENT LIST**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>Conducted Emissions Test</b>					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2020/08/04	2021/08/03
Rohde & Schwarz	LISN	ENV216	101613	2020/08/04	2021/08/03
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2020/11/29	2021/11/28
Unknown	CE Cable	CE Cable	UF A210B-1-0720-504504	2020/11/29	2021/11/28
Rohde & Schwarz	CE Test software	EMC 32	V8.53.0	NCR	NCR
<b>Radiated Emission Test</b>					
R&S	EMI Test Receiver	ESR3	102455	2021/07/06	2022/07/05
Sonoma instrument	Pre-amplifier	310 N	186238	2021/08/03	2022/08/02
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2020/12/22	2023/12/21
ETS	Passive Loop Antenna	6512	29604	2021/07/16	2024/07/15
Unknown	Cable 2	RF Cable 2	F-03-EM197	2020/11/29	2021/11/28
Unknown	Cable	Chamber Cable 4	EC-007	2021/08/03	2022/08/02
Rohde & Schwarz	Auto test software	EMC 32	V9.10	NCR	NCR
CHIGO	Temperature & Humidity Meter	HTC-1S	T-03-EM451	2021/04/07	2022/04/06
Rohde & Schwarz	Signal and Spectrum Analyzer	FSV40	101473	2021/08/04	2022/08/03
<b>RF Conducted Test</b>					
Rohde & Schwarz	Signal and Spectrum Analyzer	FSV40	101473	2021/08/04	2022/08/03
ESPEC	Temperature & Humidity Chamber	EL-10KA	9107726	2021/02/23	2022/02/22
instek	DC Power Supply	GPS-3030DD	EM832096	NCR	NCR
Fluke	Digital Multimeter	287	19000011	2021/07/23	2022/07/22

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

---

## **FCC§15.203 - ANTENNA REQUIREMENT**

---

### **Applicable Standard**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

### **Antenna Connected Construction**

The EUT has one internal antenna arrangement for NFC which was permanently attached, fulfill the requirement of this section. Please refer to the EUT photos.


**Result:** Compliance.

## FCC §15.207 – AC LINE CONDUCTED EMISSION

### Applicable Standard

FCC§15.207

### EUT Setup

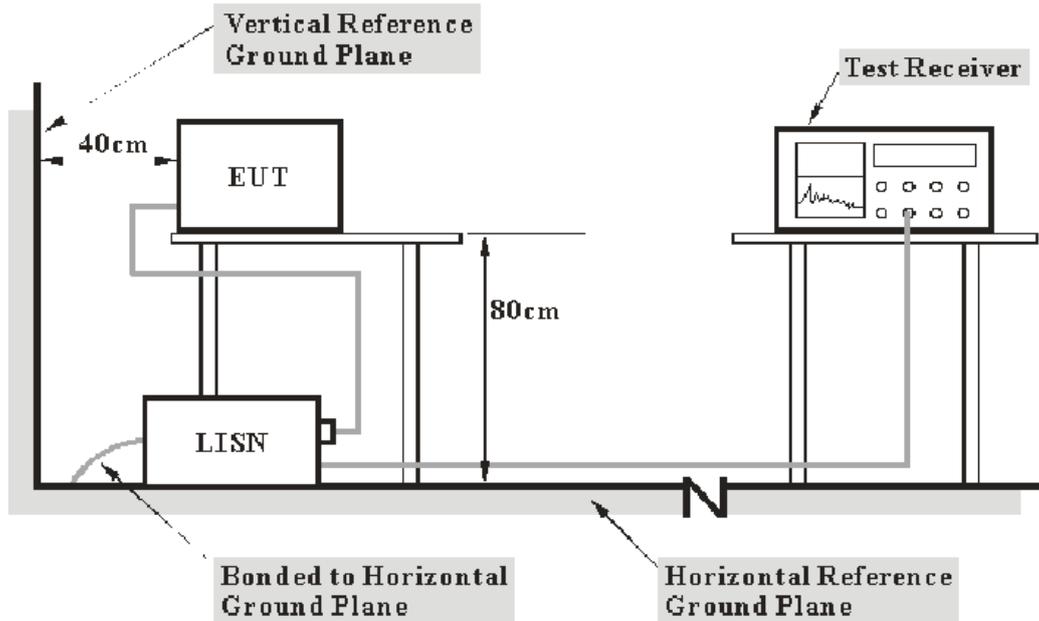

- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

## Test Procedure

During the conducted emission test, the adapter of Host was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

## Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Data


### Environmental Conditions

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	65 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Haiguo Li on 2021-07-24.*

*Test mode: Transmitting*

**AC 120 V/60 Hz, Line:**

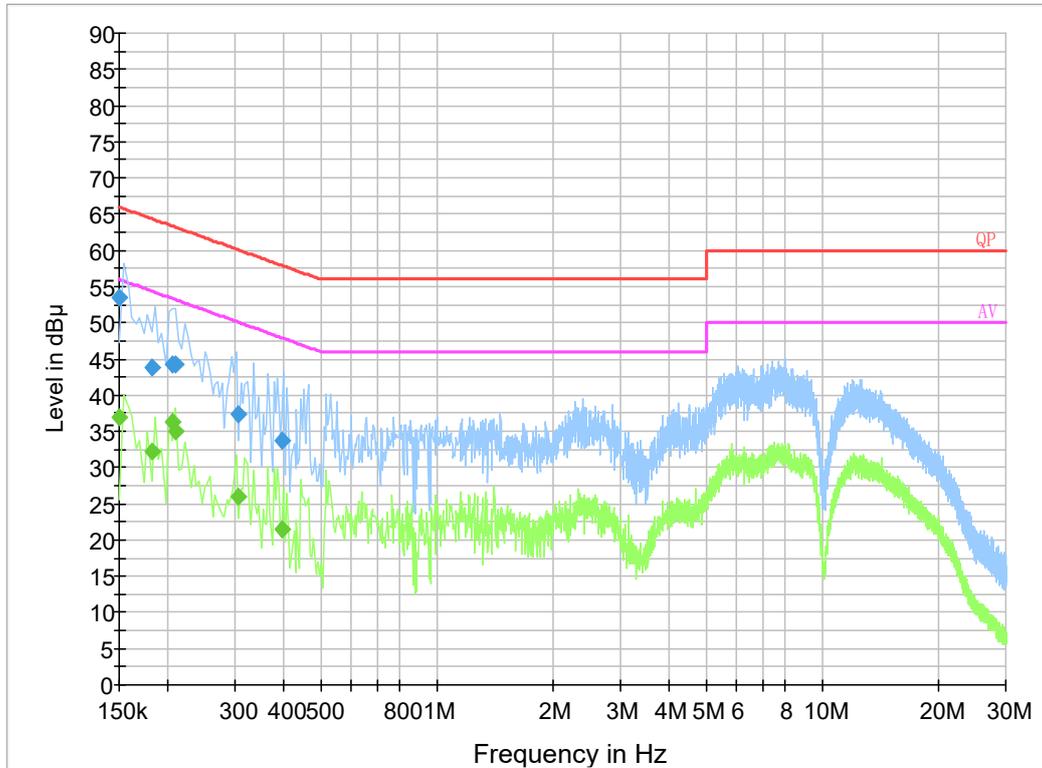


**Final Result 1**

Frequency (MHz)	QuasiPeak (dB µ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB µ V)
0.150000	53.5	9.000	L1	19.8	12.5	66.0
0.182500	43.7	9.000	L1	19.8	20.7	64.4
0.205500	44.3	9.000	L1	19.8	19.1	63.4
0.210500	44.2	9.000	L1	19.8	19.0	63.2
0.305470	37.3	9.000	L1	19.7	22.8	60.1
0.395970	33.7	9.000	L1	19.9	24.2	57.9

**Final Result 2**

Frequency (MHz)	Average (dB µ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB µ V)
0.150000	37.0	9.000	L1	19.8	19.0	56.0
0.182500	32.2	9.000	L1	19.8	22.2	54.4
0.205500	36.2	9.000	L1	19.8	18.2	53.4
0.210500	35.1	9.000	L1	19.8	18.1	53.2
0.305470	26.1	9.000	L1	19.7	24.0	50.1
0.395970	21.5	9.000	L1	19.9	26.4	47.9

**AC 120V/ 60 Hz, Neutral:**

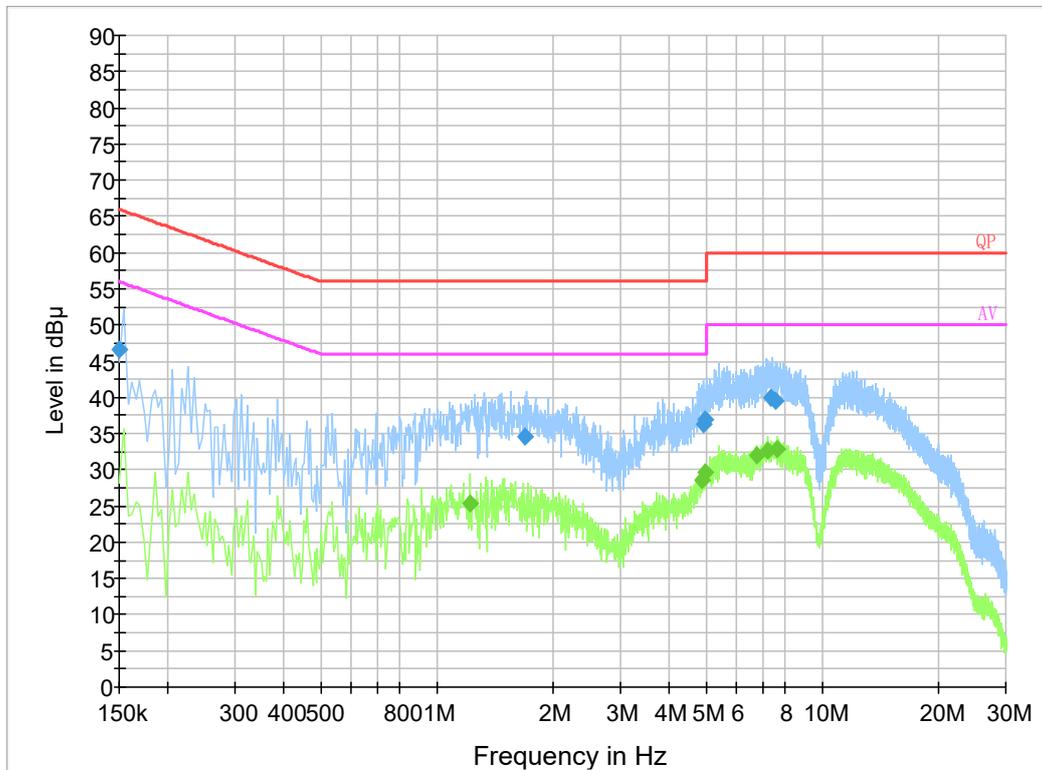

**Final Result 1**

Frequency (MHz)	QuasiPeak (dB µ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB µ V)
0.150000	46.7	9.000	N	19.8	19.3	66.0
1.700350	34.6	9.000	N	19.8	21.4	56.0
4.911870	36.4	9.000	N	19.9	19.6	56.0
4.987270	36.9	9.000	N	19.9	19.1	56.0
7.385950	40.0	9.000	N	19.9	20.0	60.0
7.599850	39.6	9.000	N	19.9	20.4	60.0

**Final Result 2**

Frequency (MHz)	Average (dB µ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB µ V)
1.222000	25.3	9.000	N	19.8	20.7	46.0
4.862000	28.6	9.000	N	19.9	17.4	46.0
4.982000	29.7	9.000	N	19.9	16.3	46.0
6.798000	31.9	9.000	N	19.9	18.1	50.0
7.230000	32.6	9.000	N	19.9	17.4	50.0
7.642000	32.8	9.000	N	19.9	17.2	50.0


## FCC§15.225, §15.205 & §15.209 - RADIATED EMISSIONS TEST

### Applicable Standard

As per FCC Part 15.225

- (a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.
- (b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- (c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- (d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

### EUT Setup

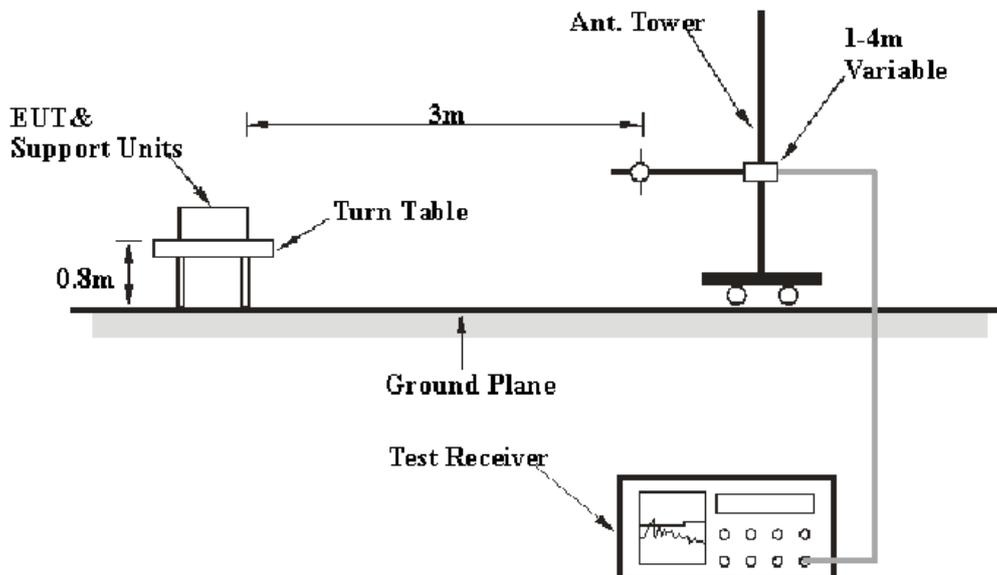

Note: Antenna is set up at 1m during test for below 30MHz.

The radiated emission tests were performed in the 3-meter chamber a test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC Part Subpart C limits.

## EMI Test Receiver Setup

According to FCC Rules, 47 CFR 15.33, the EUT emissions were investigated up to 1000 MHz.

During the radiated emission test, the EMI test Receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
9 kHz – 150 kHz	300 Hz	1 kHz	/	QP
150 kHz – 30 MHz	10 kHz	30 kHz	/	QP
30 MHz – 1000 MHz	100 kHz	300 kHz	/	QP

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Corrected Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Data

### Environmental Conditions

<b>Temperature:</b>	26~30 °C
<b>Relative Humidity:</b>	54~55 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by William Wang and Hanic Pan on 2021-08-13.*


*Test mode: Transmitting*

### 1) Spurious Emissions (9 kHz~30 MHz):

Freq. (MHz)	Corrected Amplitude (dBμV/m) @3m	Table Angle Degree	Antenna Height (m)	Detector	Correction Factor			FCC part 15.225	
					Ant. Factor (dB)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Limit (dBμV/m) @3m	Result
0.0093	67.3	0	1	PK	88.6	0.2	30.2	128.23	Pass
0.344	68.86	0	1	PK	65.3	0.3	30.2	97.13	Pass


Note: PK detector data Compliant with QP detector limit.

9 kHz~150 kHz

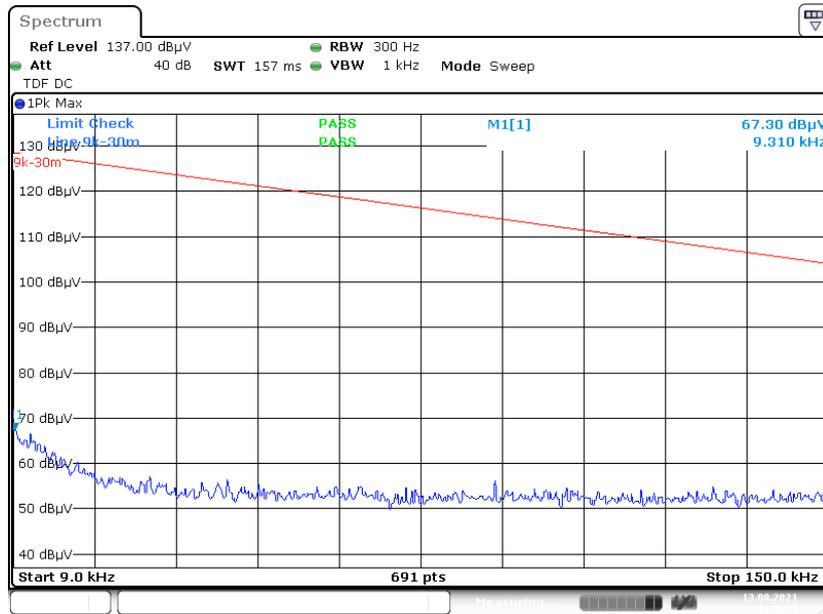


Date: 13.AUG.2021 10:48:21

150 kHz~30 MHz

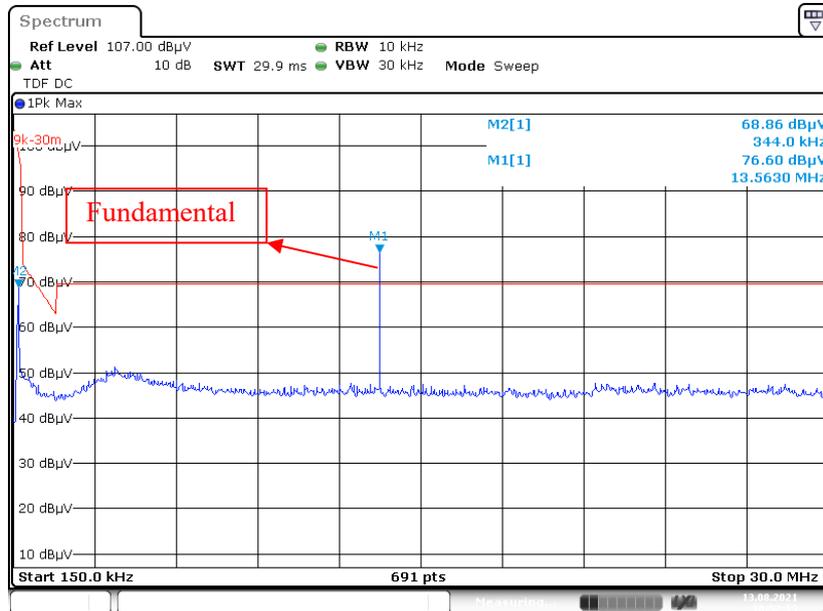

Date: 13.AUG.2021 10:52:13

2) Spurious Emissions (30 MHz~1GHz):

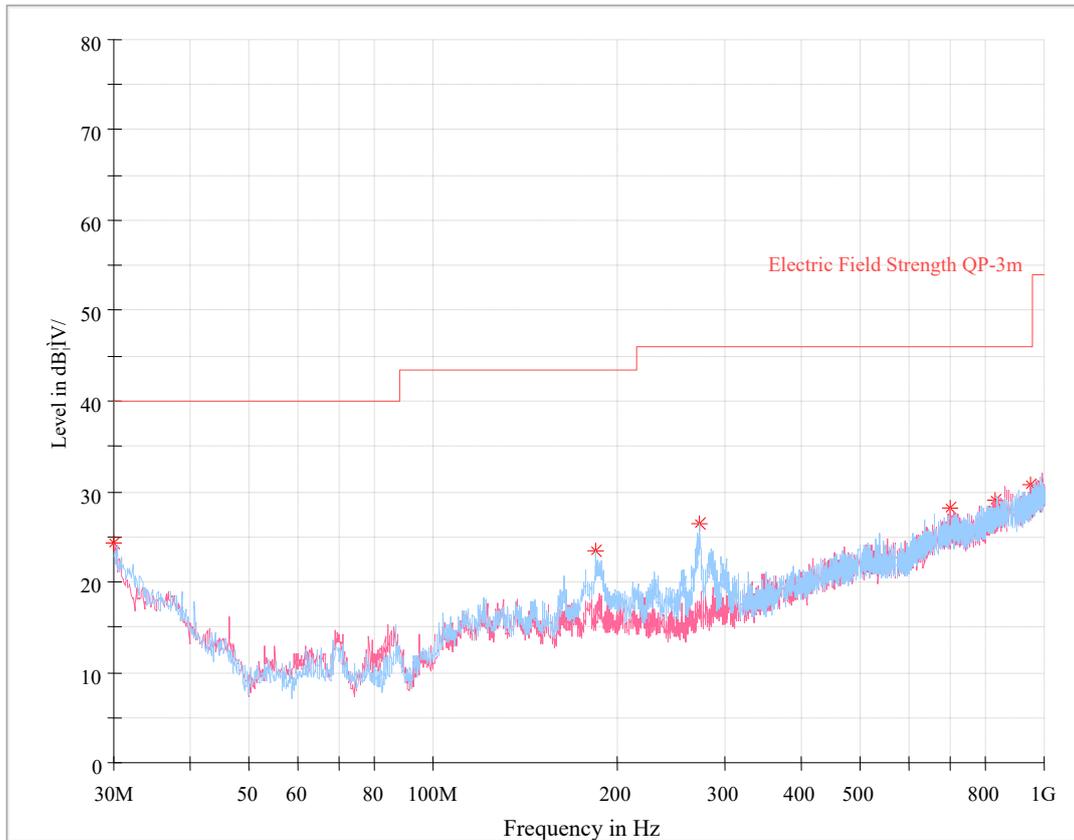

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
30.000000	24.38	40.00	15.62	100.0	V	0.0	-3.5
184.351250	23.37	43.50	20.13	100.0	H	118.0	-12.2
272.621250	26.47	46.00	19.53	100.0	H	86.0	-11.0
703.058750	28.08	46.00	17.92	300.0	V	217.0	-1.5
830.492500	29.00	46.00	17.00	200.0	V	336.0	-0.1
950.893750	30.84	46.00	15.16	100.0	V	65.0	1.7

**Note:**


- 1) Correction Factor = Antenna factor (Rx) + Cable Loss – Amplifier factor
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit – Corrected Amplitude

3) Emission Mask & Fundamental:

Frequency (MHz)	Corrected Amplitude (dBµV/m) @3m	Table Angle Degree	Antenna Height (m)	Detector	Correction Factor			FCC Part 15.225	
					Ant. Factor (dB)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Limit (dBµV/m) @3m	Result
13.56	76.12	0	1	PK	32.3	0.2	30.2	124	Pass

Note: PK detector data Compliant with QP detector limit.

Emission Mask

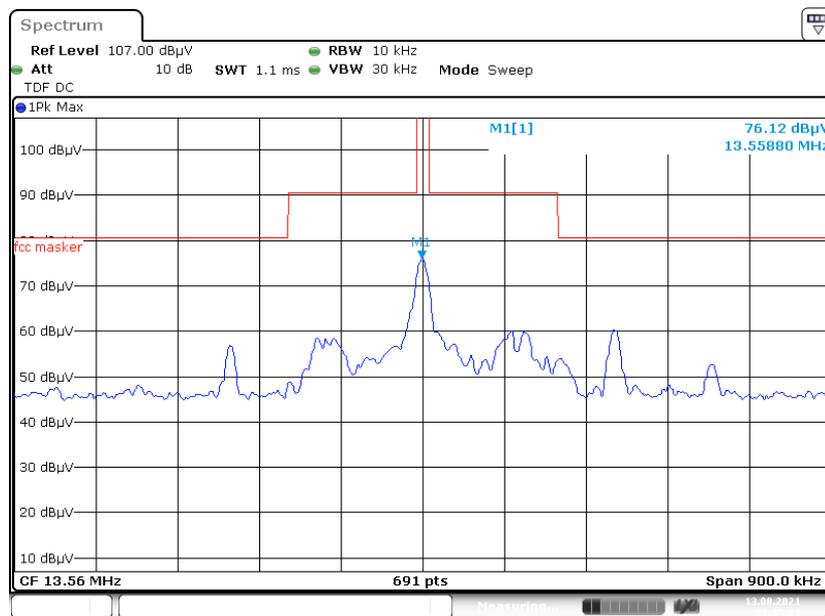

Date: 13.AUG.2021 09:35:21

## FCC§15.225(e) - FREQUENCY STABILITY

### Applicable Standard

The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  of the operating frequency over a temperature variation of  $-20$  degrees to  $+50$  degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

### Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and inductive antenna was connected to a Spectrum Analyzer. The EUT was placed inside the temperature chamber.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the Spectrum Analyzer.

Frequency Stability vs. Voltage: An external DC power supply Source. The voltage was set to 115% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the end point. The output frequency was recorded for each voltage.

### Test Data

#### Environmental Conditions

Temperature:	26 °C
Relative Humidity:	54 %
ATM Pressure:	101.0 kPa

The testing was performed by Hanic Pan on 2021-08-13.

Test Mode: Transmitting

Test Result: Pass

Voltage Supply (V <sub>AC</sub> )	Temperature (°C)	Measured Frequency (MHz)	Frequency Error (%)	Limit (%)
N.V.	-20	13.55882	-0.0087	$\pm 0.01$
	-10	13.55884	-0.0086	$\pm 0.01$
	0	13.55879	-0.0089	$\pm 0.01$
	10	13.55883	-0.0086	$\pm 0.01$
	20	13.55879	-0.0089	$\pm 0.01$
	30	13.55880	-0.0088	$\pm 0.01$
	40	13.55885	-0.0085	$\pm 0.01$
	50	13.55875	-0.0092	$\pm 0.01$
L.V.	20	13.55877	-0.0091	$\pm 0.01$
H.V.	20	13.55879	-0.0089	$\pm 0.01$

## **FCC§15.215(c) - 20dB EMISSION BANDWIDTH**

### **Requirement**

Per 15.215 (c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

### **Test Procedure**

Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.

### **Test Data**

#### **Environmental Conditions**

<b>Temperature:</b>	26 °C
<b>Relative Humidity:</b>	54 %
<b>ATM Pressure:</b>	101.0 kPa


*The testing was performed by Hanic Pan on 2021-08-13.*

*Test Mode: Transmitting*

*Test Result: Pass*

<b>Test Frequency (MHz)</b>	<b>20dB Bandwidth (kHz)</b>
13.56	1.476

### 20 dB Emission Bandwidth

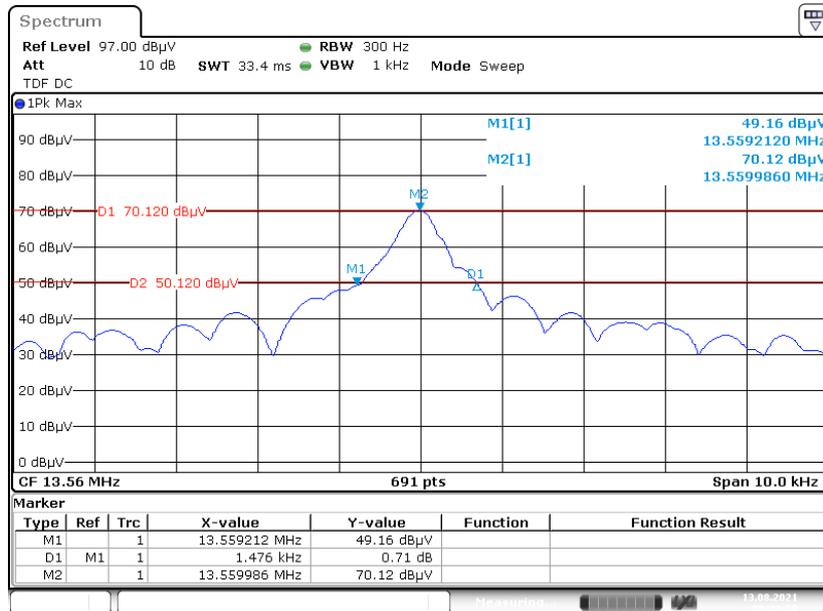

Date: 13.AUG.2021 09:23:30

\*\*\*\*\* END OF REPORT \*\*\*\*\*