

Test Plot 1#: GSM 850_Head Left Cheek_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.936$ S/m; $\epsilon_r = 41.551$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.6 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.410 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.61 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.544 W/kg

SAR(1 g) = 0.396 W/kg; SAR(10 g) = 0.279 W/kg

Maximum value of SAR (measured) = 0.416 W/kg

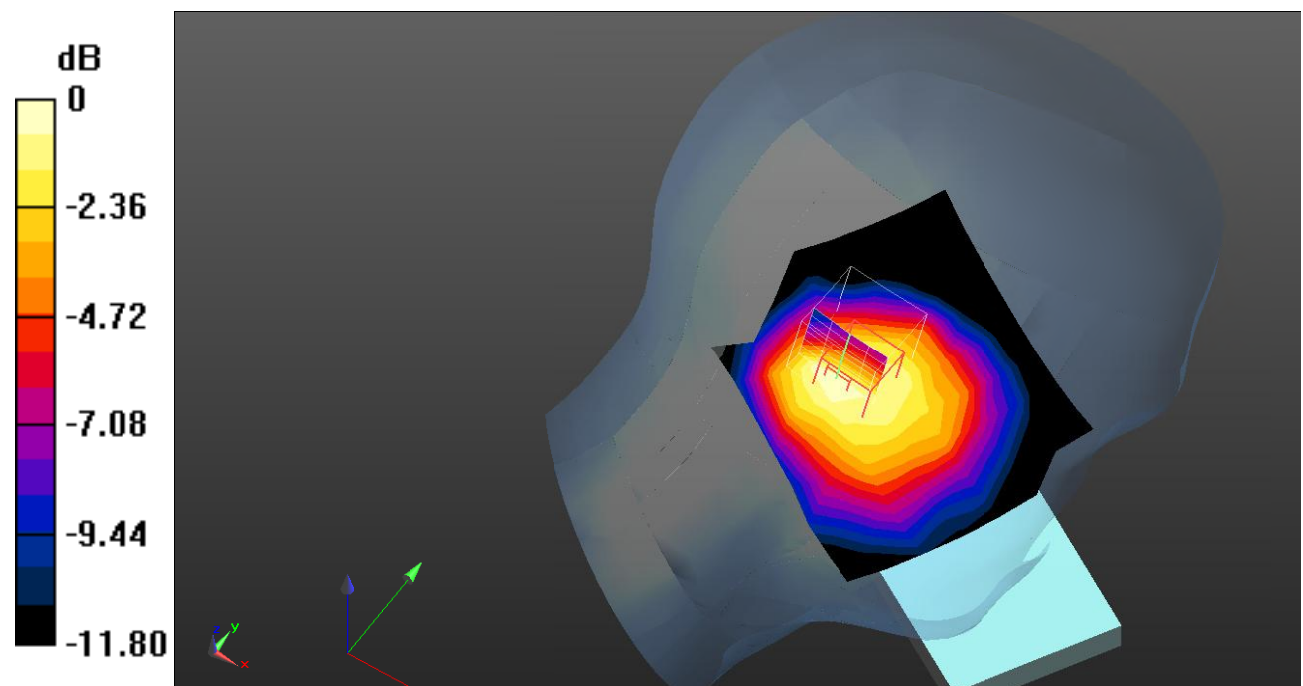

0 dB = 0.416 W/kg = -3.81 dB dBW/kg

Test Plot 2#: GSM 850_Head Left Tilt_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.936$ S/m; $\epsilon_r = 41.551$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.6 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.276 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.49 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.349 W/kg

SAR(1 g) = 0.246 W/kg; SAR(10 g) = 0.158 W/kg

Maximum value of SAR (measured) = 0.269 W/kg

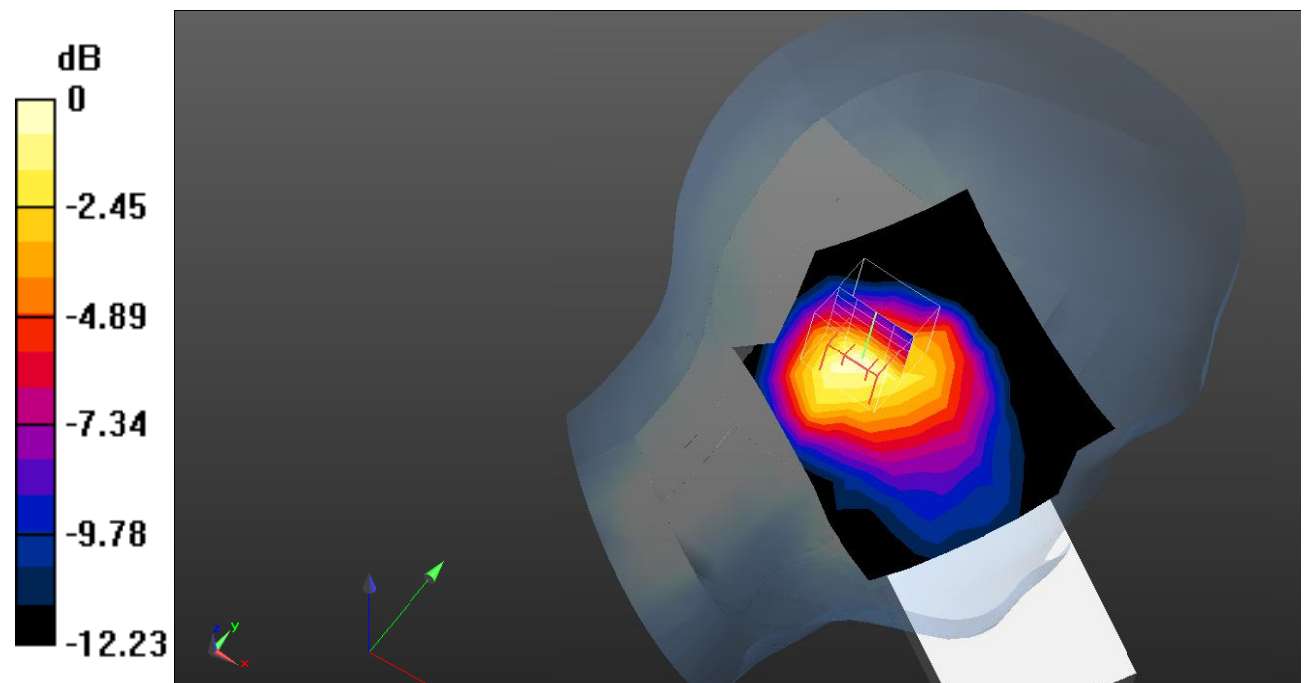

0 dB = 0.269 W/kg = -5.70 dB dBW/kg

Test Plot 3#: GSM 850_Head Right Cheek_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.936$ S/m; $\epsilon_r = 41.551$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.6 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.443 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.68 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.817 W/kg

SAR(1 g) = 0.461 W/kg; SAR(10 g) = 0.266 W/kg

Maximum value of SAR (measured) = 0.504 W/kg

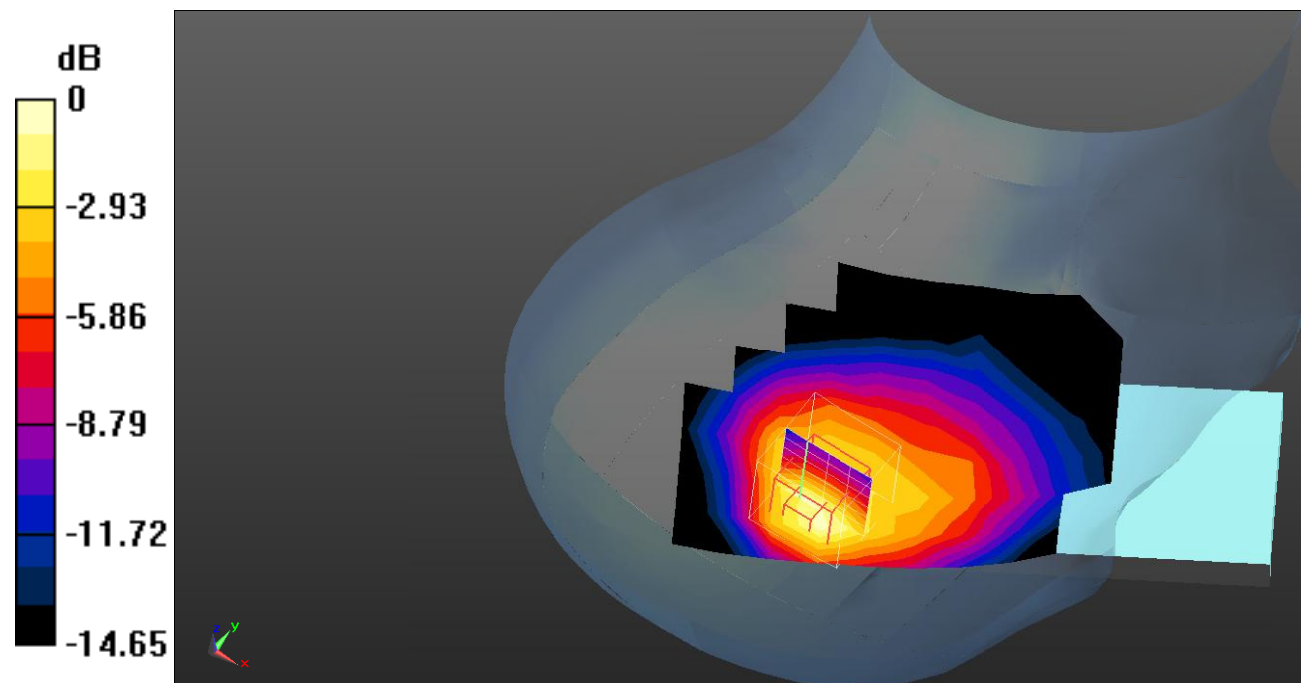

0 dB = 0.504 W/kg = -2.98 dB dBW/kg

Test Plot 4#: GSM 850_Head Right Tilt_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.936$ S/m; $\epsilon_r = 41.551$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.6 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.393 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.51 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.905 W/kg

SAR(1 g) = 0.475 W/kg; SAR(10 g) = 0.268 W/kg

Maximum value of SAR (measured) = 0.502 W/kg

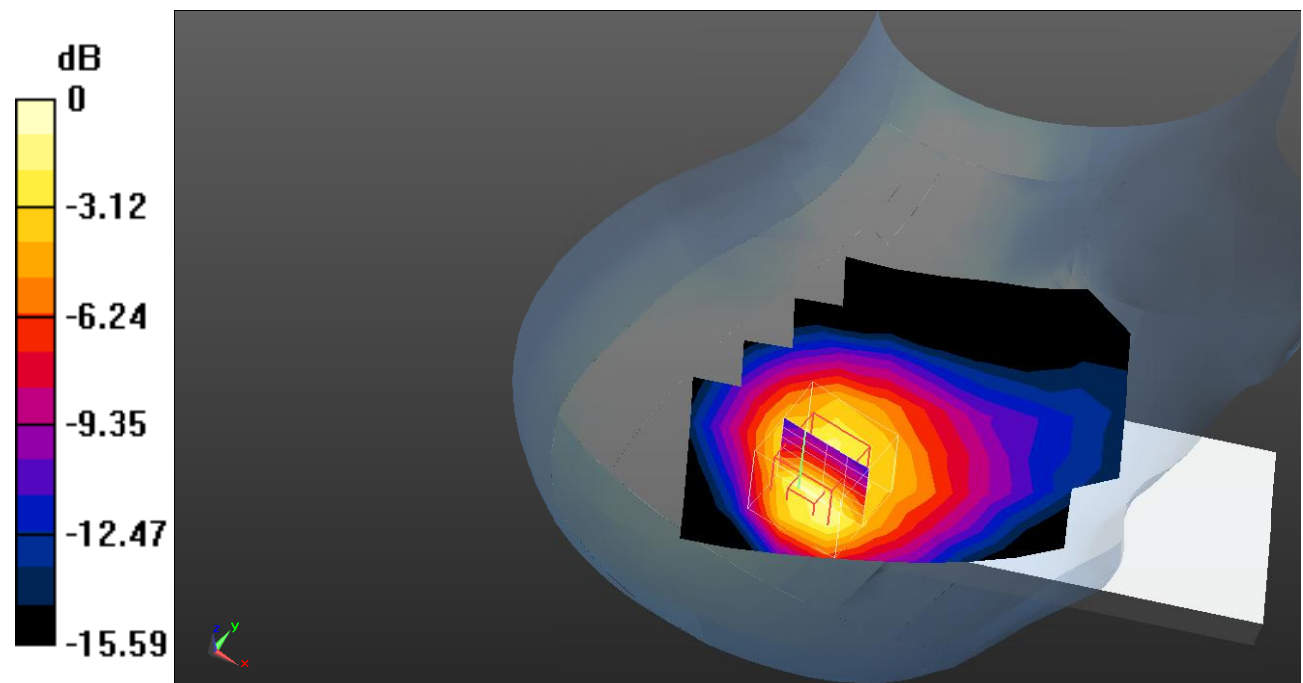

0 dB = 0.502 W/kg = -2.99 dB dBW/kg

Test Plot 5#: GSM 850_Body Worn Back_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.936$ S/m; $\epsilon_r = 41.551$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.6 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.191 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.81 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.250 W/kg

SAR(1 g) = 0.168 W/kg; SAR(10 g) = 0.108 W/kg

Maximum value of SAR (measured) = 0.181 W/kg

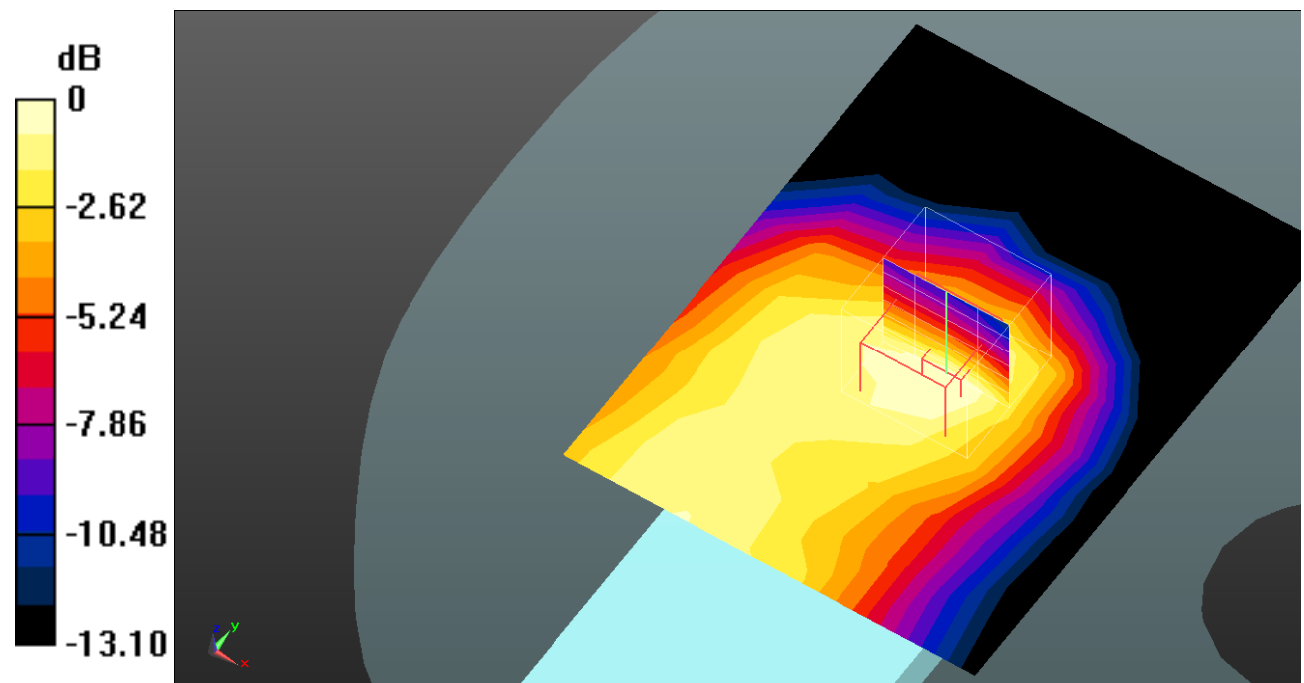

0 dB = 0.181 W/kg = -7.42 dB dBW/kg

Test Plot 6#: GSM 850_Body Front_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic GPRS-2 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.936$ S/m; $\epsilon_r = 41.551$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.6 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.271 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.94 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.381 W/kg

SAR(1 g) = 0.258 W/kg; SAR(10 g) = 0.166 W/kg

Maximum value of SAR (measured) = 0.275 W/kg

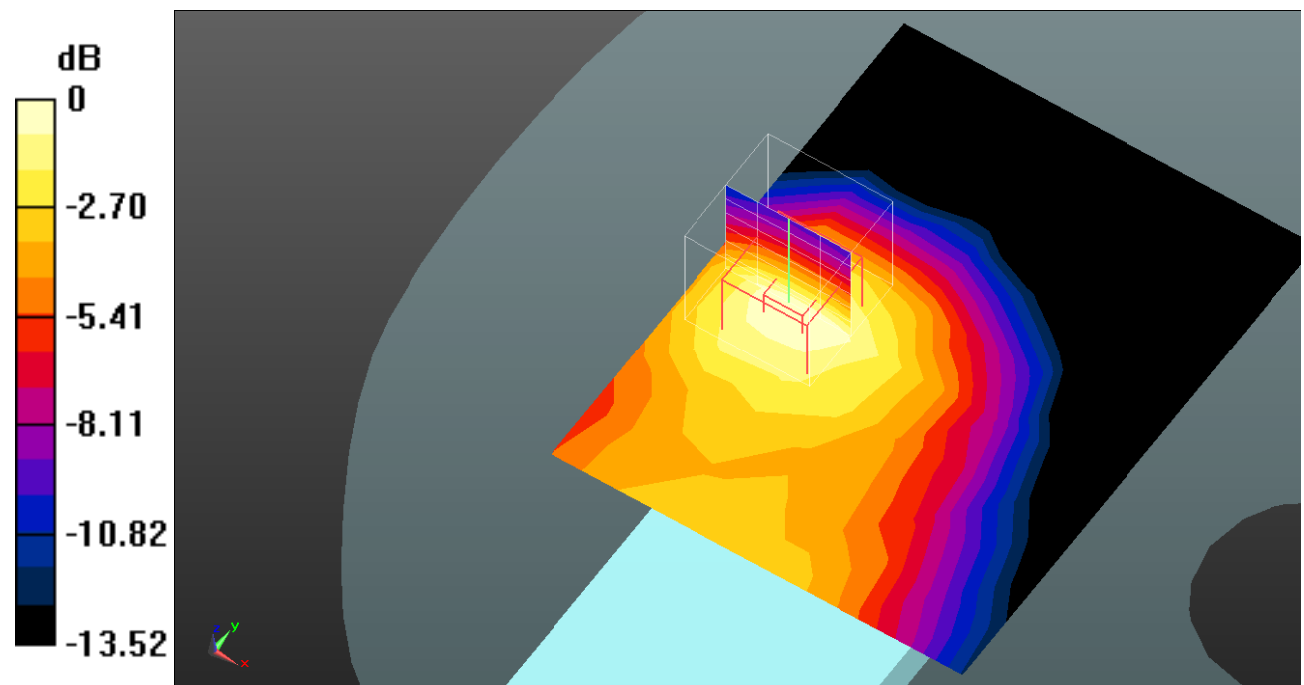

0 dB = 0.275 W/kg = -5.61 dB dBW/kg

Test Plot 7#: GSM 850_Body Back_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic GPRS-2 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.936$ S/m; $\epsilon_r = 41.551$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.6 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.267 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.63 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.347 W/kg

SAR(1 g) = 0.232 W/kg; SAR(10 g) = 0.149 W/kg

Maximum value of SAR (measured) = 0.247 W/kg

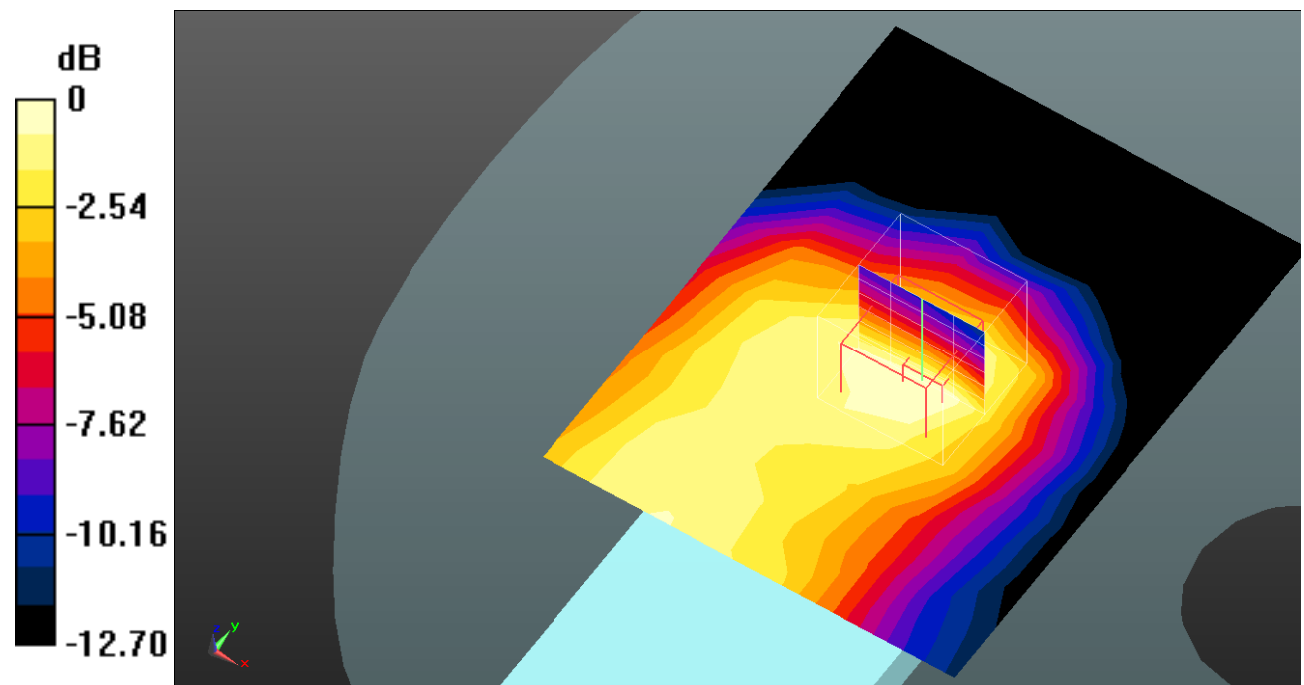

0 dB = 0.247 W/kg = -6.07 dB dBW/kg

Test Plot 8#: GSM 850_Body Left_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic GPRS-2 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.936$ S/m; $\epsilon_r = 41.551$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.6 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.194 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.982 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.217 W/kg

SAR(1 g) = 0.174 W/kg; SAR(10 g) = 0.125 W/kg

Maximum value of SAR (measured) = 0.184 W/kg

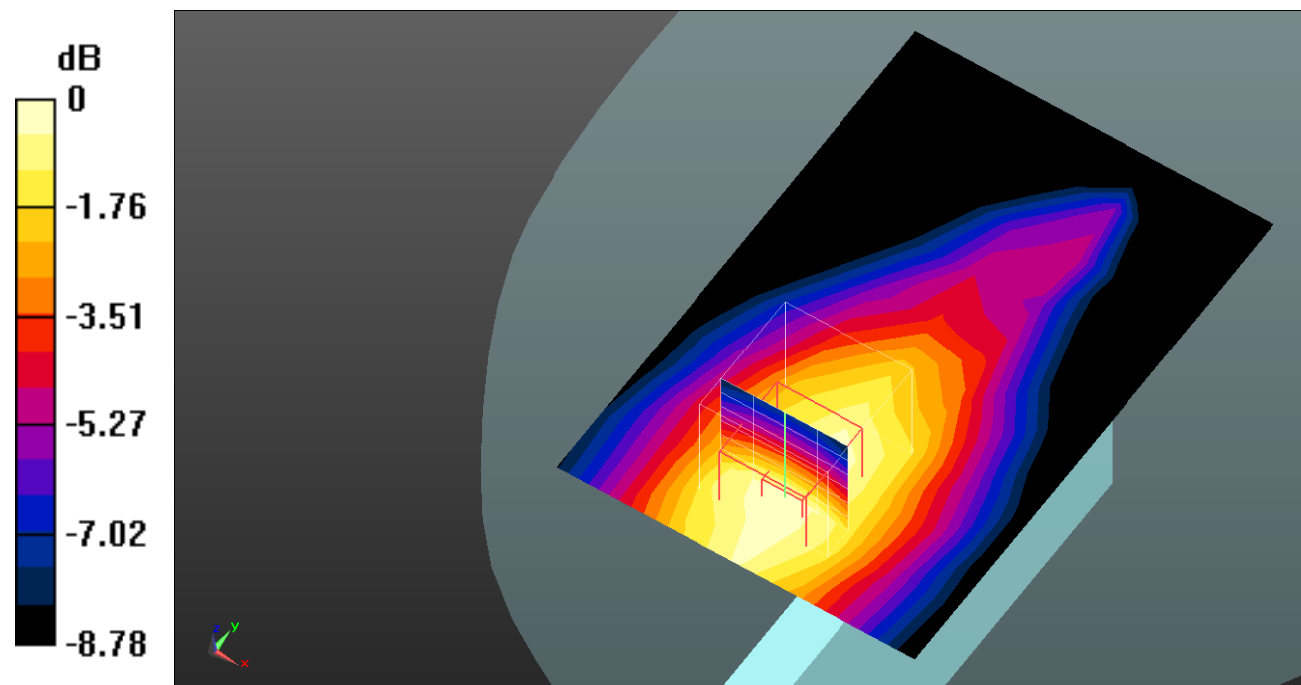

0 dB = 0.184 W/kg = -7.35 dB dBW/kg

Test Plot 9#: GSM 850_Body Top_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic GPRS-2 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.936$ S/m; $\epsilon_r = 41.551$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.6 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.250 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.14 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.341 W/kg

SAR(1 g) = 0.248 W/kg; SAR(10 g) = 0.162 W/kg

Maximum value of SAR (measured) = 0.270 W/kg

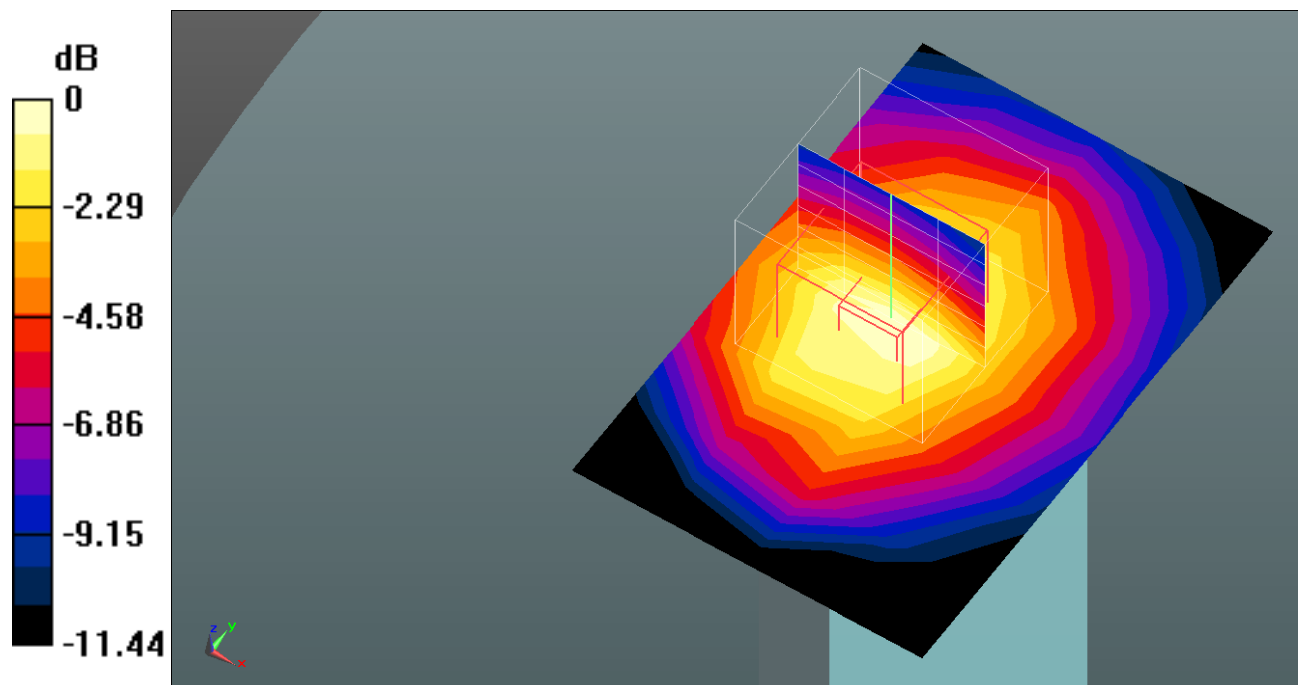

0 dB = 0.270 W/kg = -5.69 dB dBW/kg

Test Plot 10#: PCS 1900_Head Left Cheek_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.405$ S/m; $\epsilon_r = 40.345$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.334 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.41 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.533 W/kg

SAR(1 g) = 0.319 W/kg; SAR(10 g) = 0.168 W/kg

Maximum value of SAR (measured) = 0.349 W/kg

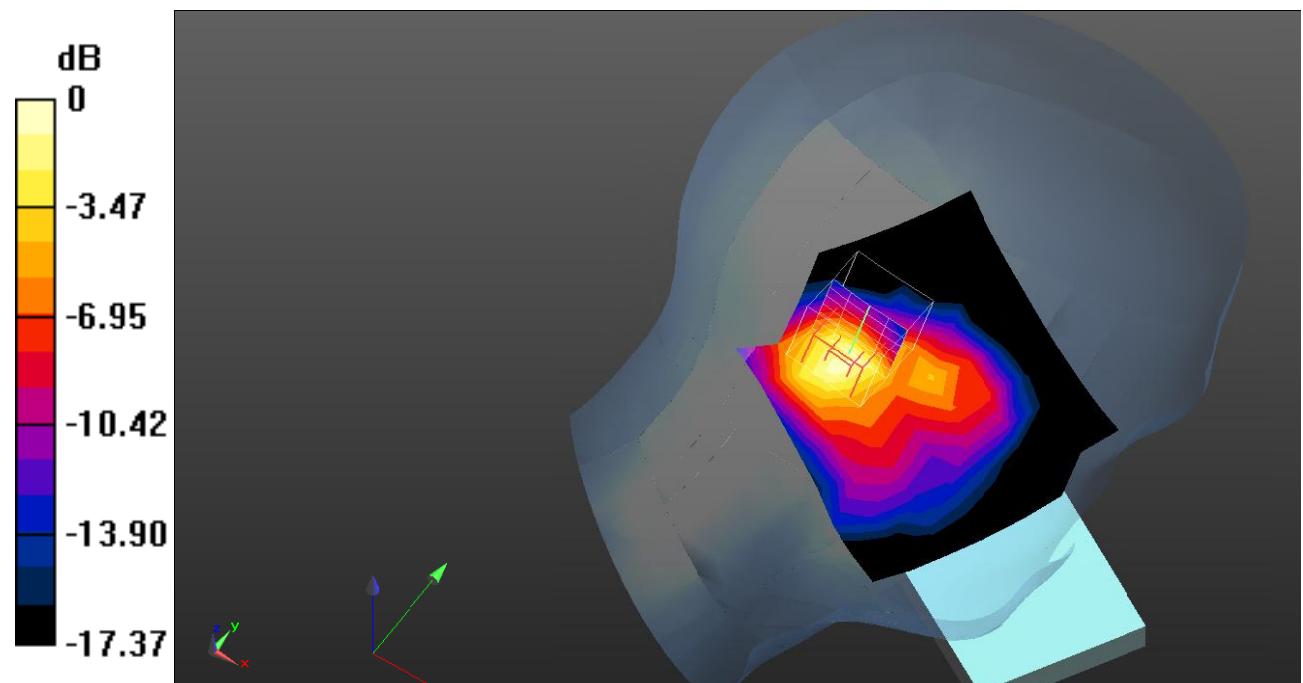

0 dB = 0.349 W/kg = -4.57 dB dBW/kg

Test Plot 11#: PCS 1900_Head Left Tilt_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.405$ S/m; $\epsilon_r = 40.345$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.453 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.75 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.700 W/kg

SAR(1 g) = 0.424 W/kg; SAR(10 g) = 0.223 W/kg

Maximum value of SAR (measured) = 0.484 W/kg

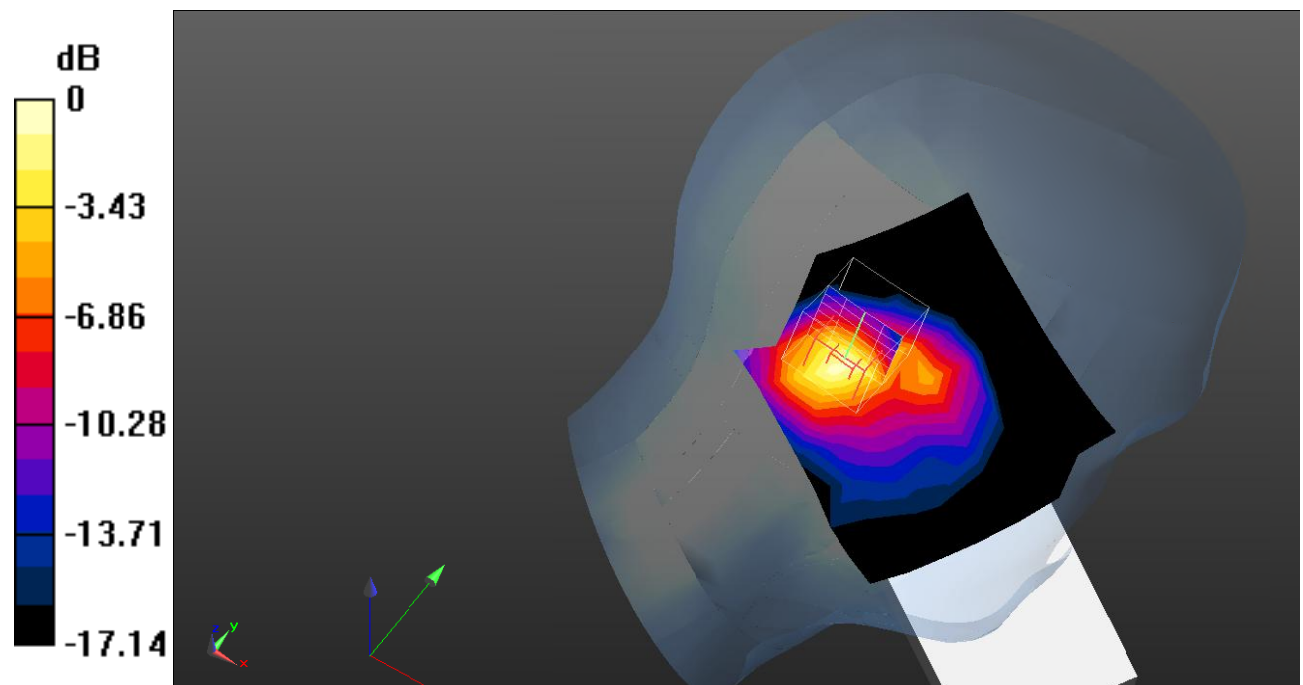

0 dB = 0.484 W/kg = -3.15 dB dBW/kg

Test Plot 12#: PCS 1900_Head Right Cheek_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.405$ S/m; $\epsilon_r = 40.345$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.497 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.169 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.924 W/kg

SAR(1 g) = 0.519 W/kg; SAR(10 g) = 0.253 W/kg

Maximum value of SAR (measured) = 0.610 W/kg

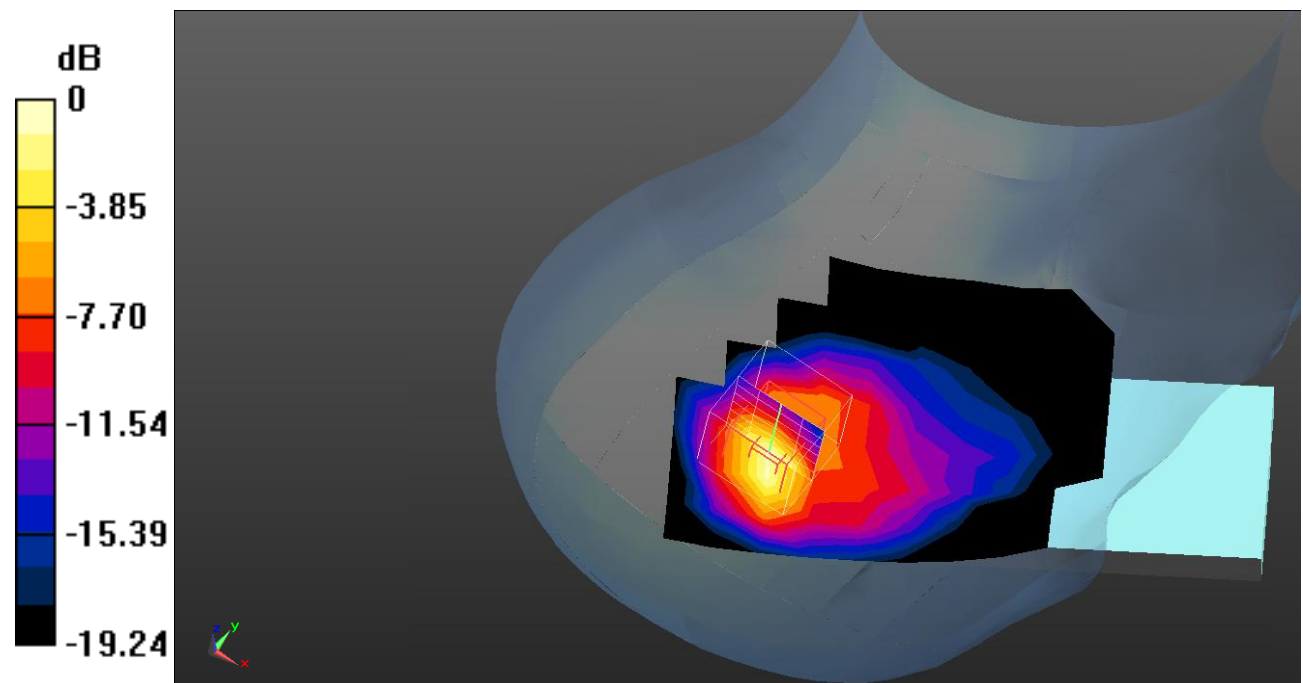

0 dB = 0.610 W/kg = -2.15 dB dBW/kg

Test Plot 13#: PCS 1900_Head Right Tilt_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.405$ S/m; $\epsilon_r = 40.345$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.765 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.90 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.42 W/kg

SAR(1 g) = 0.713 W/kg; SAR(10 g) = 0.383 W/kg

Maximum value of SAR (measured) = 0.943 W/kg

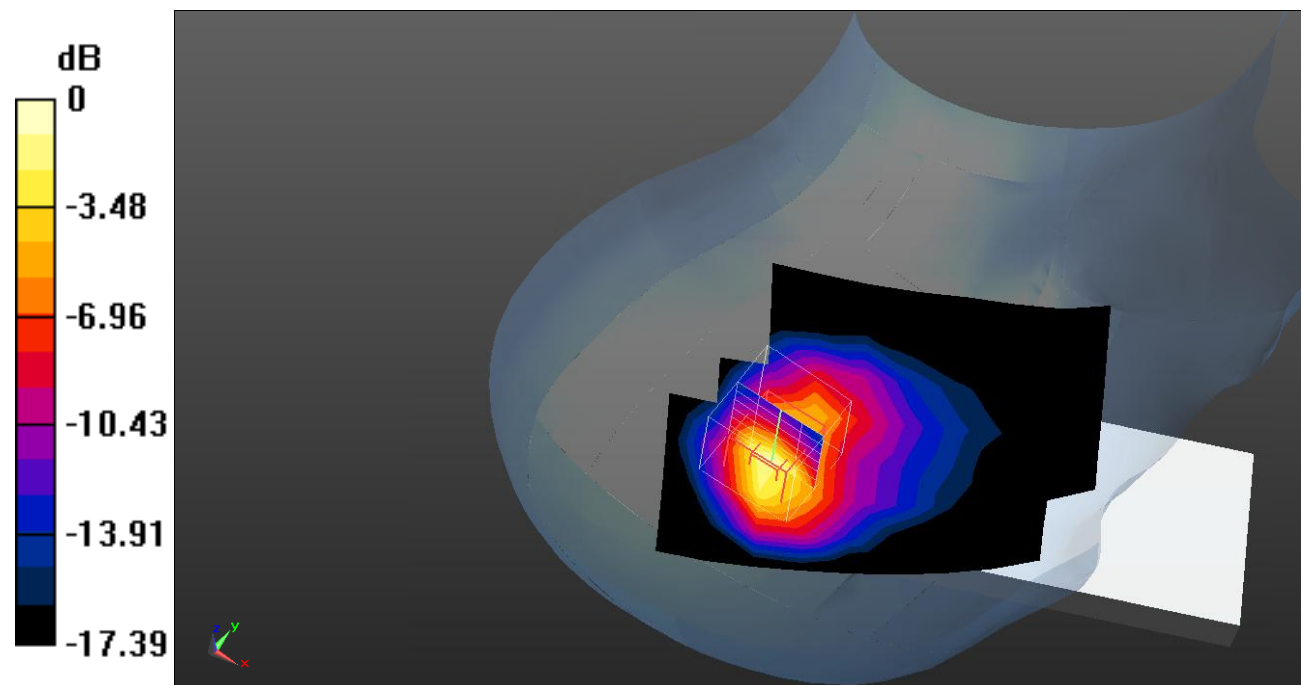

0 dB = 0.943 W/kg = -0.25 dB dBW/kg

Test Plot 14#: PCS 1900_Body Worn Back_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.405$ S/m; $\epsilon_r = 40.345$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.164 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.566 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.281 W/kg

SAR(1 g) = 0.169 W/kg; SAR(10 g) = 0.093 W/kg

Maximum value of SAR (measured) = 0.186 W/kg

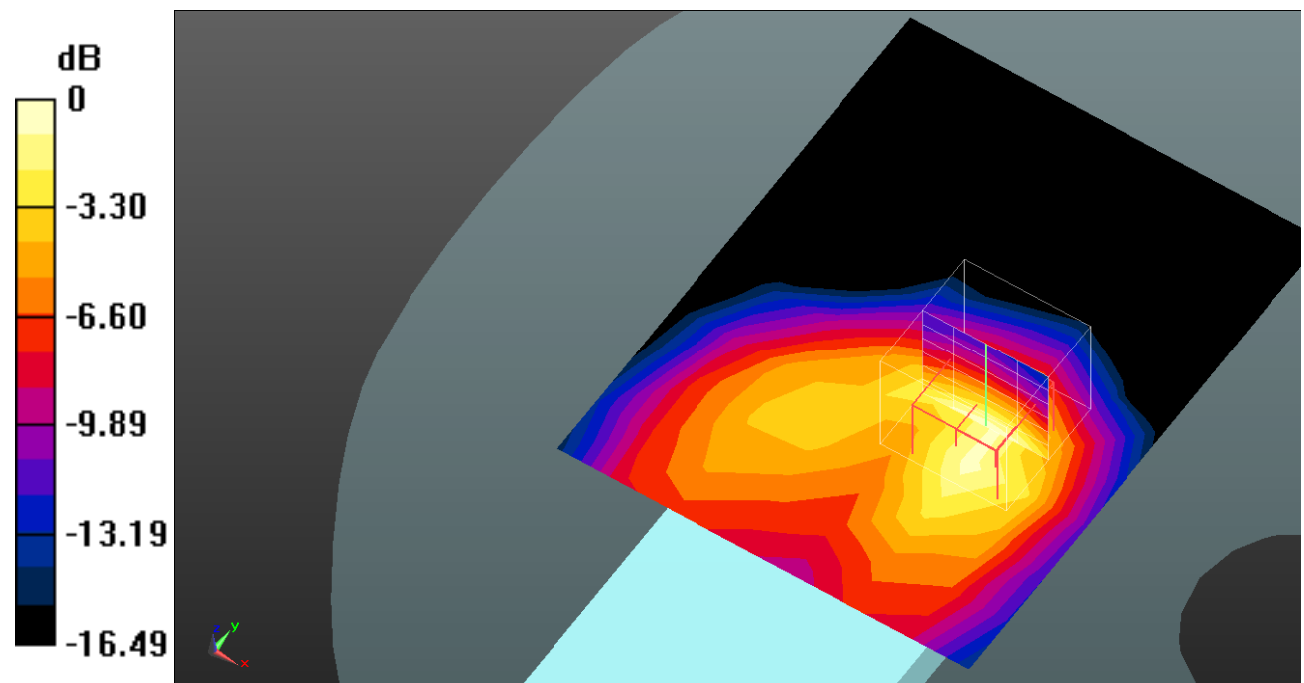

0 dB = 0.186 W/kg = -7.30 dB dBW/kg

Test Plot 15#: PCS 1900_Body Front_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.405$ S/m; $\epsilon_r = 40.345$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.375 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.584 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.502 W/kg

SAR(1 g) = 0.317 W/kg; SAR(10 g) = 0.186 W/kg

Maximum value of SAR (measured) = 0.355 W/kg

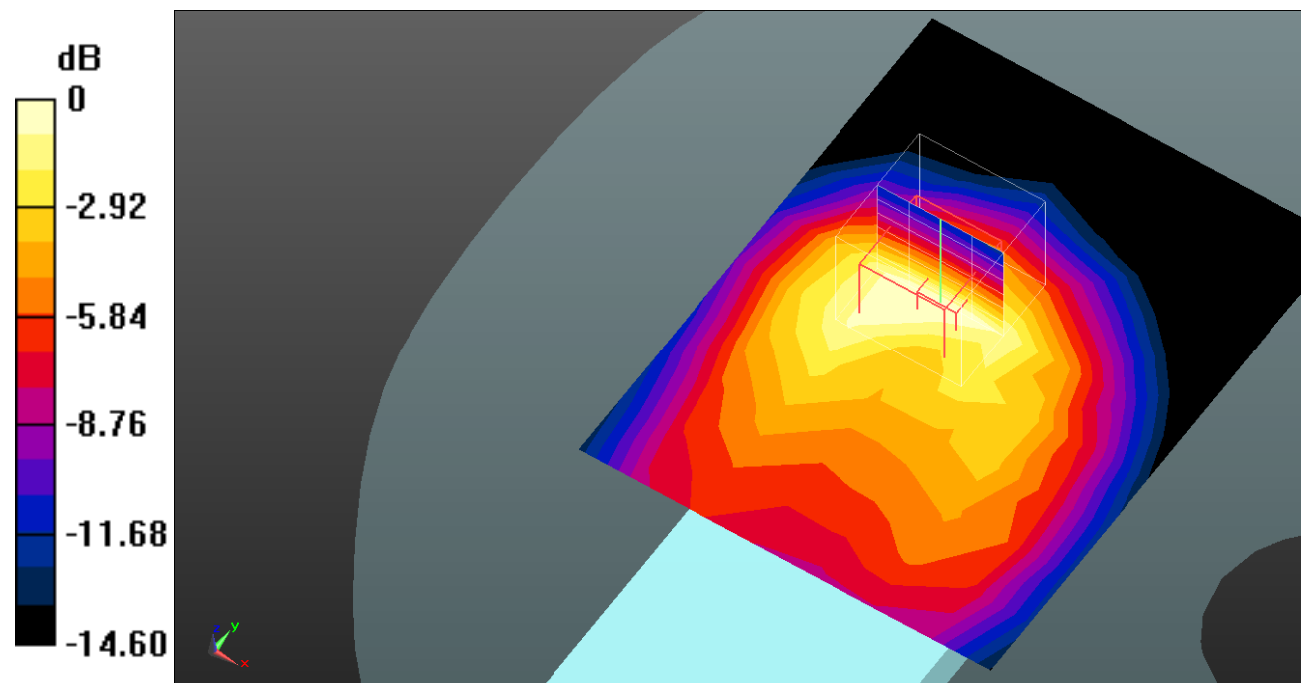

0 dB = 0.355 W/kg = -4.50 dB dBW/kg

Test Plot 16#: PCS 1900_Body Back_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic GPRS-2 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.405$ S/m; $\epsilon_r = 40.345$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.659 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.593 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.960 W/kg

SAR(1 g) = 0.566 W/kg; SAR(10 g) = 0.303 W/kg

Maximum value of SAR (measured) = 0.644 W/kg

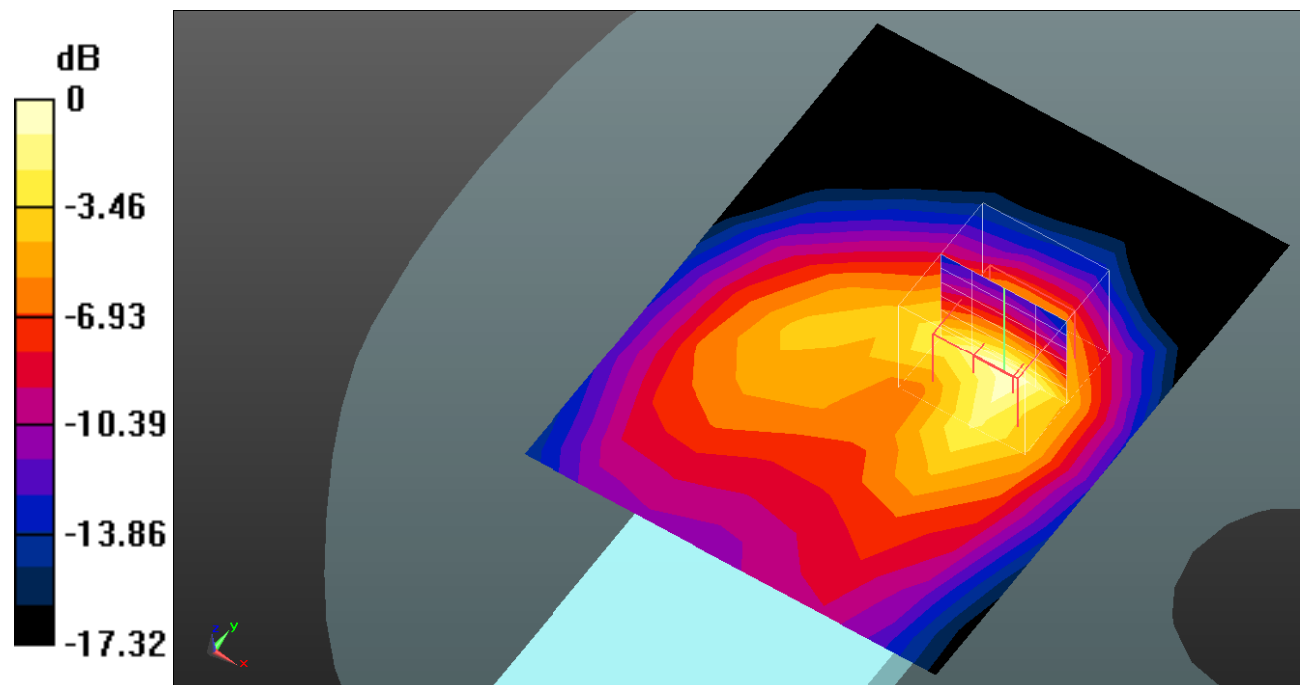

0 dB = 0.644 W/kg = -1.91 dB dBW/kg

Test Plot 17#: PCS 1900_Body Left_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic GPRS-2 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.405$ S/m; $\epsilon_r = 40.345$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.141 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.520 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.226 W/kg

SAR(1 g) = 0.144 W/kg; SAR(10 g) = 0.085 W/kg

Maximum value of SAR (measured) = 0.160 W/kg

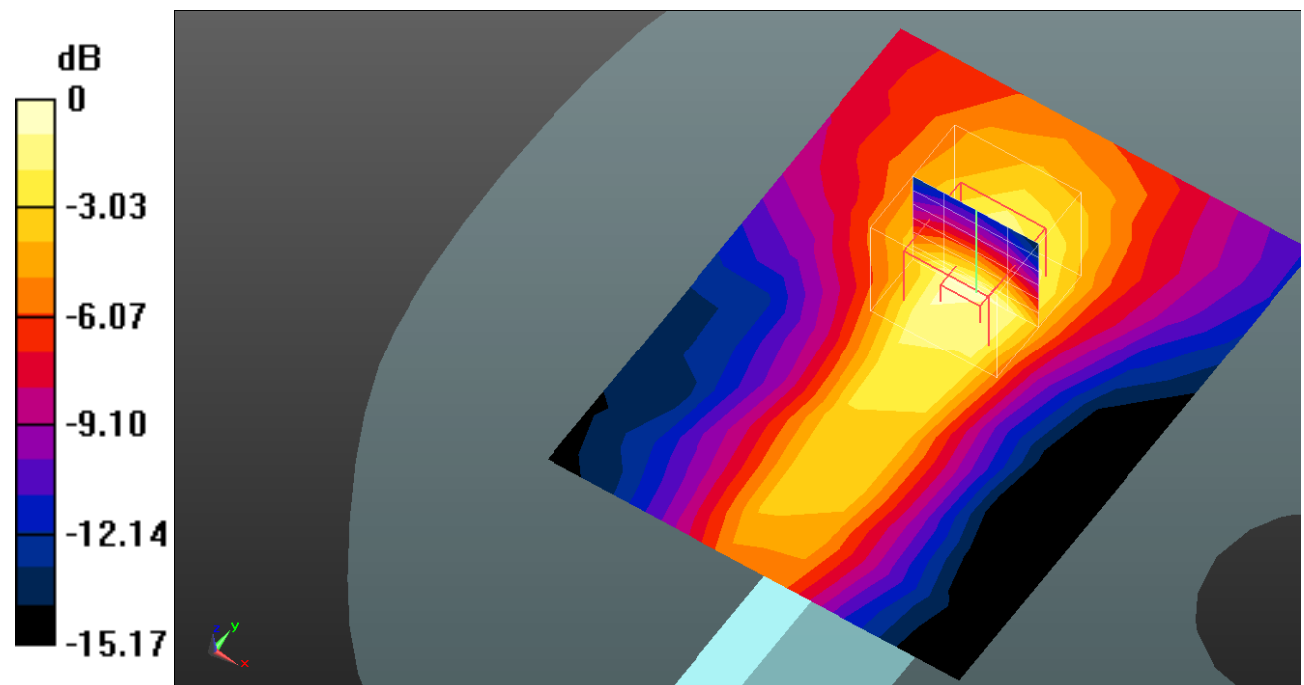

0 dB = 0.160 W/kg = -7.96 dB dBW/kg

Test Plot 18#: PCS 1900_Body Top_Low**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic GPRS-2 slots (0); Frequency: 1850.2 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 39.711$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1850.2 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.01 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.71 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.68 W/kg

SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.529 W/kg

Maximum value of SAR (measured) = 1.15 W/kg

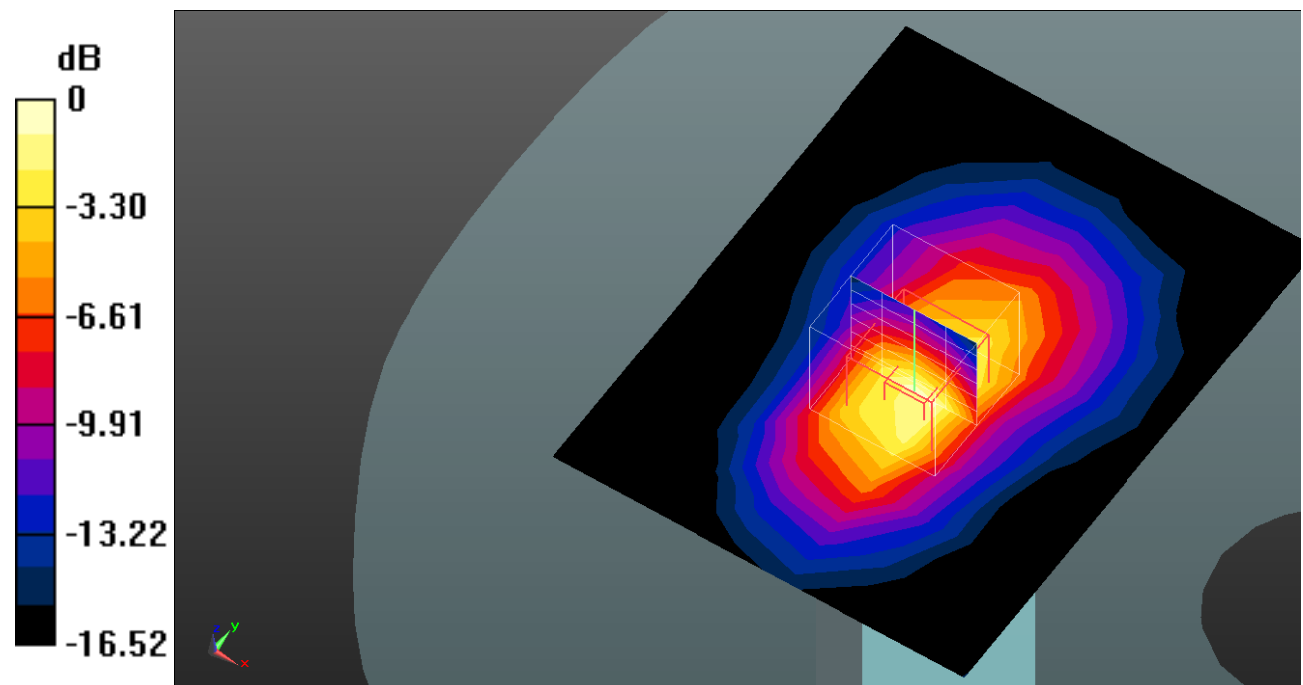

0 dB = 1.15 W/kg = 0.61 dB dBW/kg

Test Plot 19#: PCS 1900_Body Top_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic GPRS-2 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.405$ S/m; $\epsilon_r = 40.345$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.04 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.27 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.75 W/kg

SAR(1 g) = 0.981 W/kg; SAR(10 g) = 0.536 W/kg

Maximum value of SAR (measured) = 1.21 W/kg

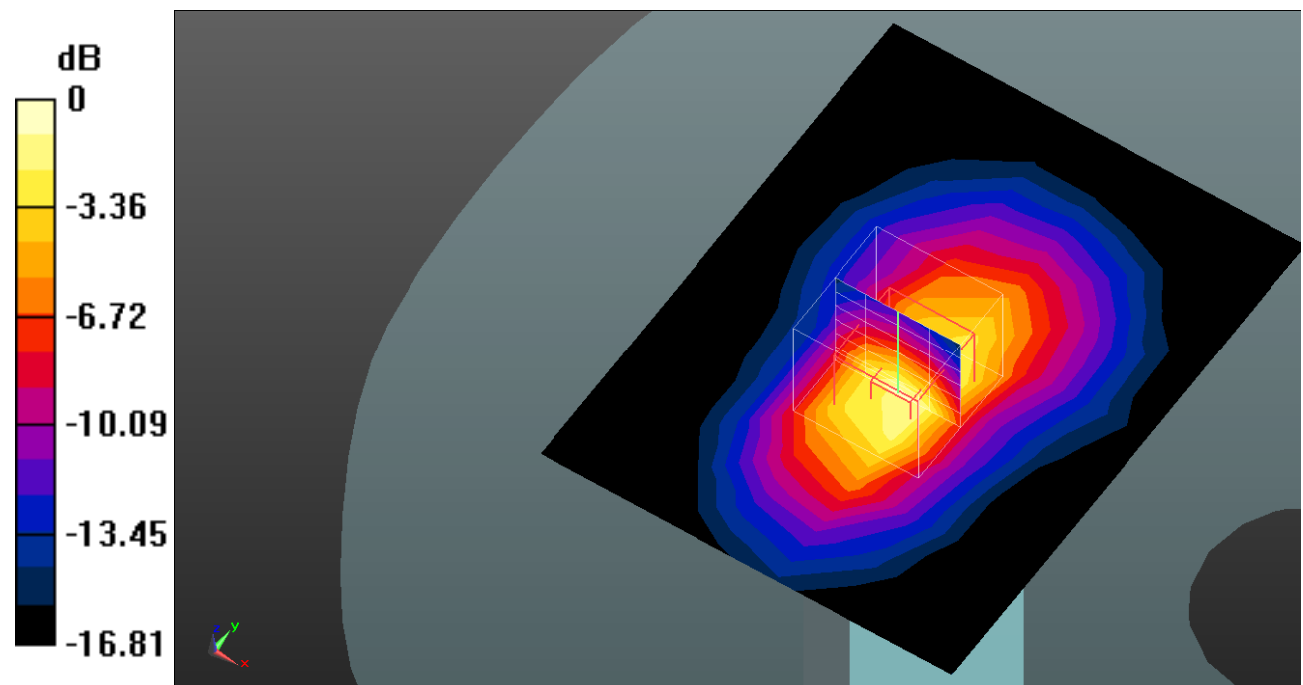

0 dB = 1.21 W/kg = 0.83 dB dBW/kg

Test Plot 20#: PCS 1900_Body Top_High**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic GPRS-2 slots (0); Frequency: 1909.8 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.447$ S/m; $\epsilon_r = 39.672$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1909.8 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.09 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.69 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.84 W/kg

SAR(1 g) = 0.984 W/kg; SAR(10 g) = 0.552 W/kg

Maximum value of SAR (measured) = 1.27 W/kg

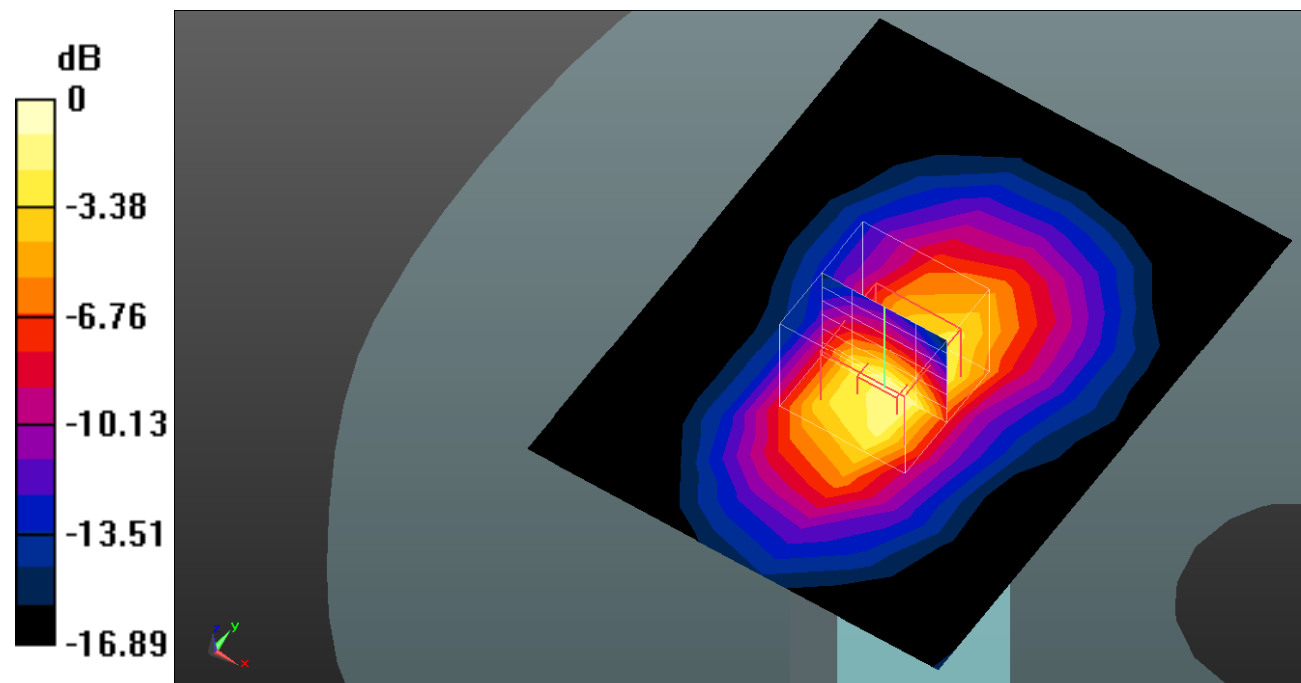

0 dB = 1.27 W/kg = 1.04 dB dBW/kg

Test Plot 21#: WCDMA Band 2_Head Left Cheek_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.405$ S/m; $\epsilon_r = 40.345$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.427 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.08 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.718 W/kg

SAR(1 g) = 0.450 W/kg; SAR(10 g) = 0.252 W/kg

Maximum value of SAR (measured) = 0.512 W/kg

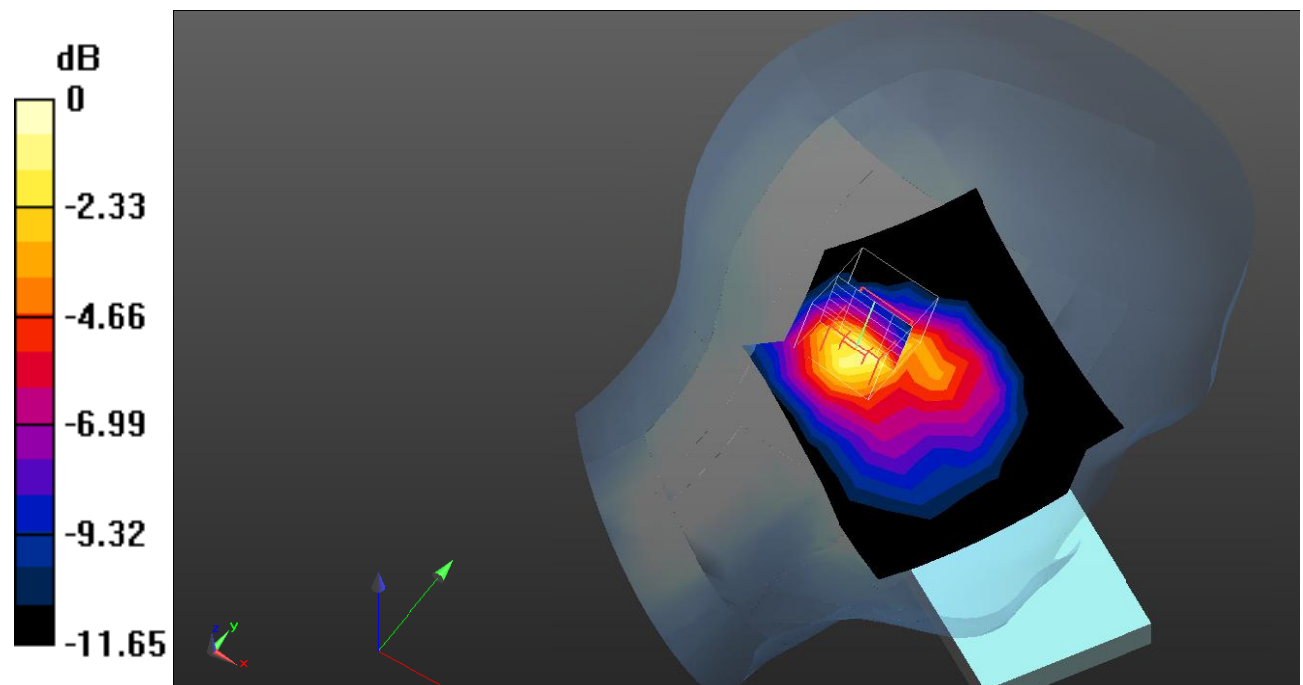

0 dB = 0.512 W/kg = -2.91 dB dBW/kg

Test Plot 22#: WCDMA Band 2_Head Left Tilt_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.405$ S/m; $\epsilon_r = 40.345$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.591 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.56 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.930 W/kg

SAR(1 g) = 0.571 W/kg; SAR(10 g) = 0.309 W/kg

Maximum value of SAR (measured) = 0.650 W/kg

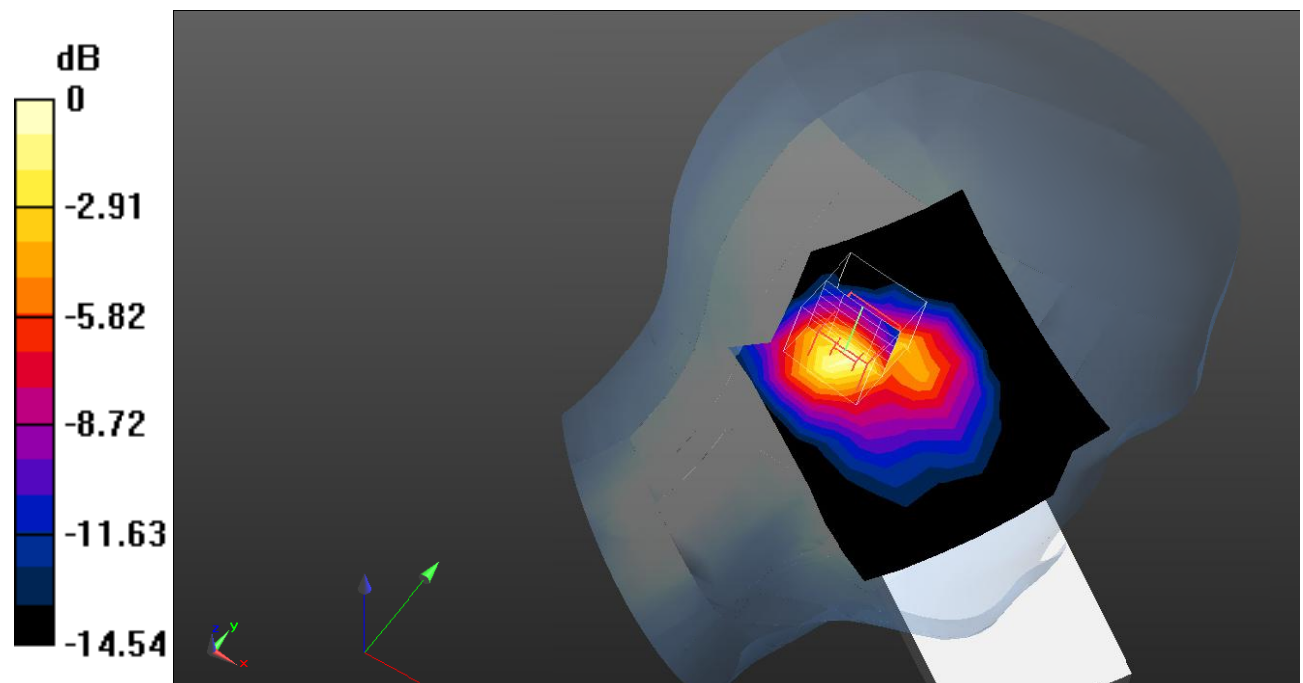

0 dB = 0.650 W/kg = -1.87 dB dBW/kg

Test Plot 23#: WCDMA Band 2_Head Right Cheek_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.405$ S/m; $\epsilon_r = 40.345$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.593 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.06 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.995 W/kg

SAR(1 g) = 0.585 W/kg; SAR(10 g) = 0.309 W/kg

Maximum value of SAR (measured) = 0.689 W/kg

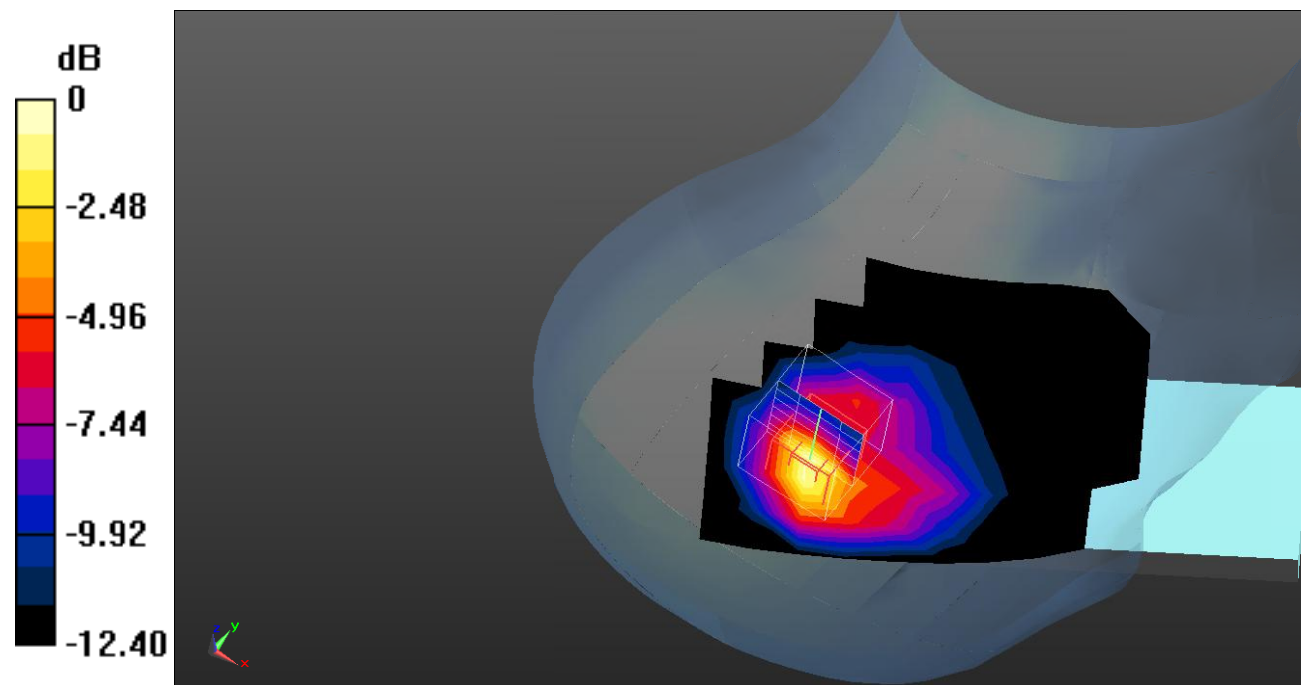

0 dB = 0.689 W/kg = -1.62 dB dBW/kg

Test Plot 24: WCDMA Band 2_Head Right Tilt_Low**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: WCDMA (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.402$ S/m; $\epsilon_r = 40.188$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1852.4 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.708 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.87 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.57 W/kg

SAR(1 g) = 0.880 W/kg; SAR(10 g) = 0.429 W/kg

Maximum value of SAR (measured) = 1.02 W/kg

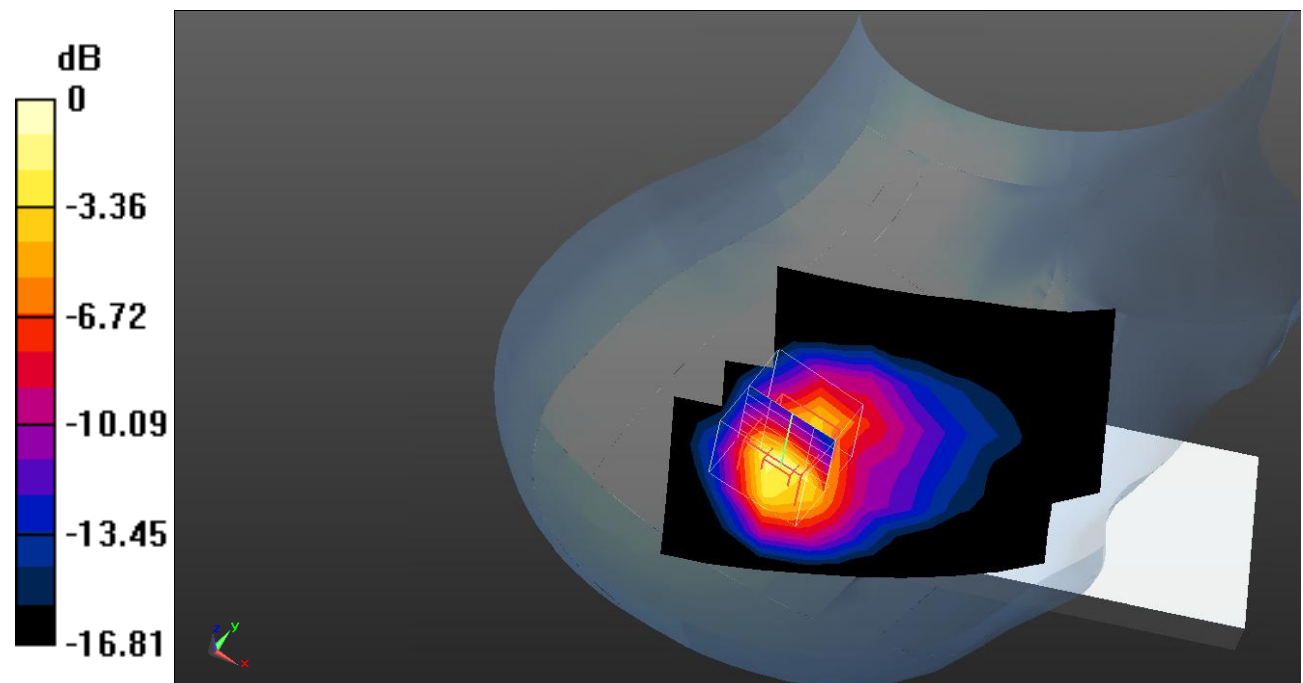

0 dB = 1.02 W/kg = 0.09 dB dBW/kg

Test Plot 25#: WCDMA Band 2_Head Right Tilt_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**


Communication System: WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.405 \text{ S/m}$; $\epsilon_r = 40.345$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

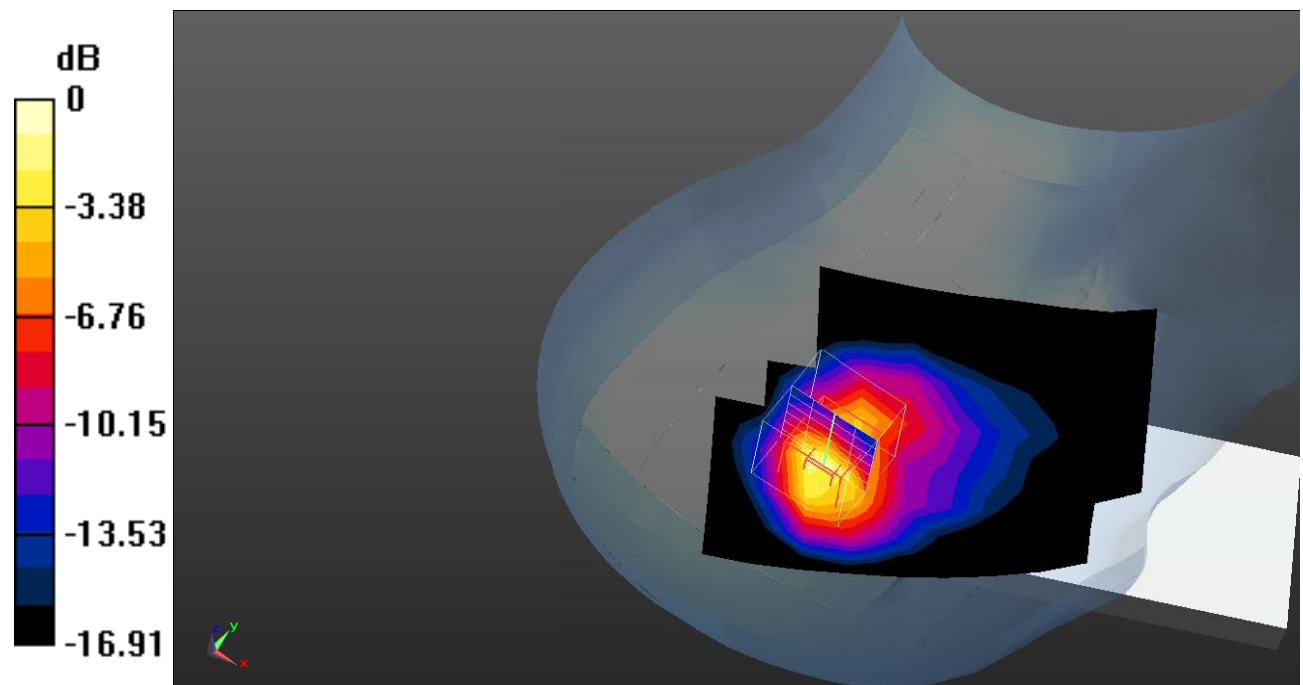Area Scan (8x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (interpolated) = 0.711 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 13.49 V/m ; Power Drift = -0.02 dB Peak SAR (extrapolated) = 1.57 W/kg **SAR(1 g) = 0.869 W/kg ; SAR(10 g) = 0.423 W/kg** Maximum value of SAR (measured) = 1.02 W/kg  $0 \text{ dB} = 1.02 \text{ W/kg} = 0.09 \text{ dB dBW/kg}$

Test Plot 26: WCDMA Band 2_Head Right Tilt_High**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: WCDMA (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1907.6 \text{ MHz}$; $\sigma = 1.447 \text{ S/m}$; $\epsilon_r = 39.102$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1907.6 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.712 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.61 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.850 W/kg; SAR(10 g) = 0.416 W/kg

Maximum value of SAR (measured) = 1.02 W/kg

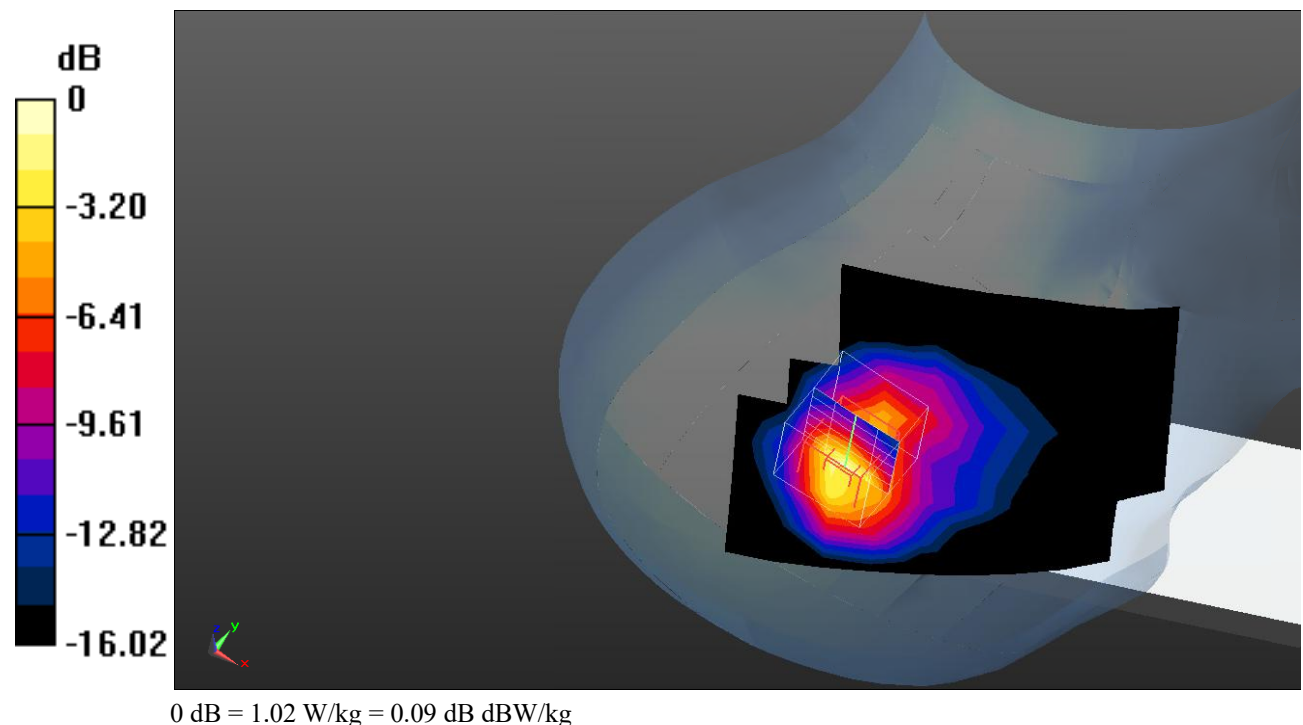

Test Plot 27#: WCDMA Band 2_Body Front_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.405$ S/m; $\epsilon_r = 40.345$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.193 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.295 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.239 W/kg

SAR(1 g) = 0.161 W/kg; SAR(10 g) = 0.099 W/kg

Maximum value of SAR (measured) = 0.178 W/kg

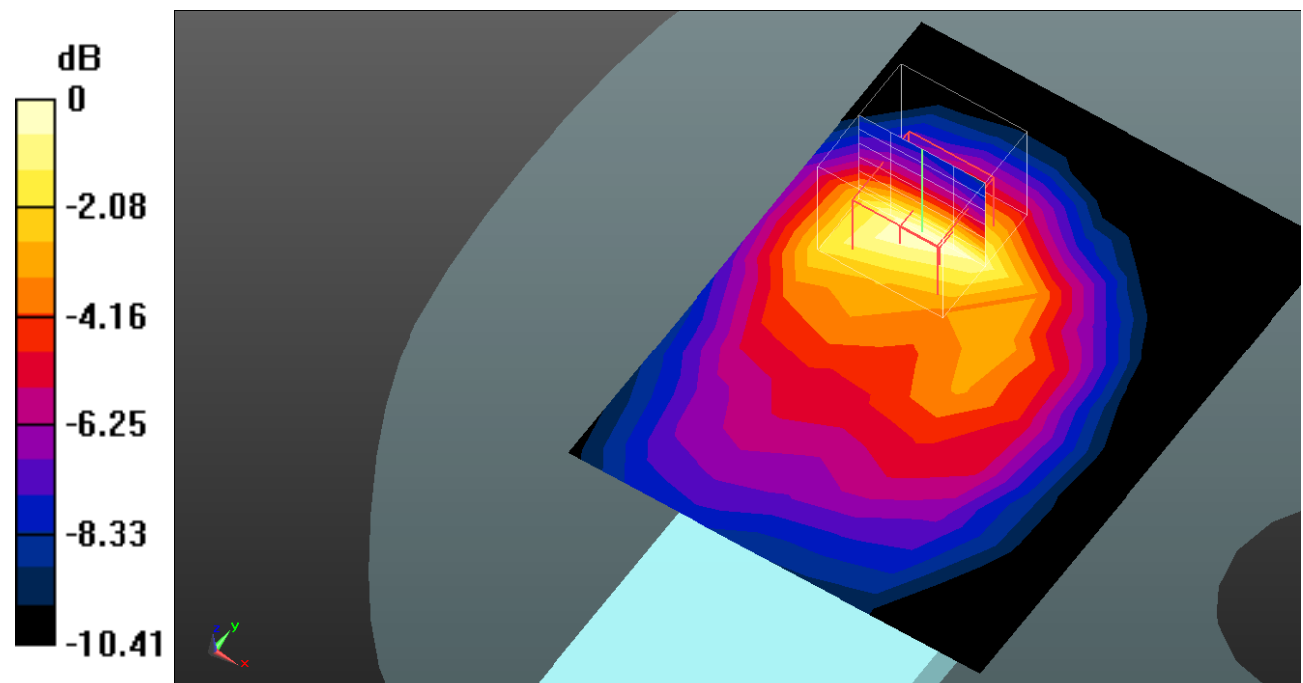

0 dB = 0.178 W/kg = -7.50 dB dBW/kg

Test Plot 28#: WCDMA Band 2_Body Back_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.405$ S/m; $\epsilon_r = 40.345$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.276 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.57 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.387 W/kg

SAR(1 g) = 0.242 W/kg; SAR(10 g) = 0.137 W/kg

Maximum value of SAR (measured) = 0.267 W/kg

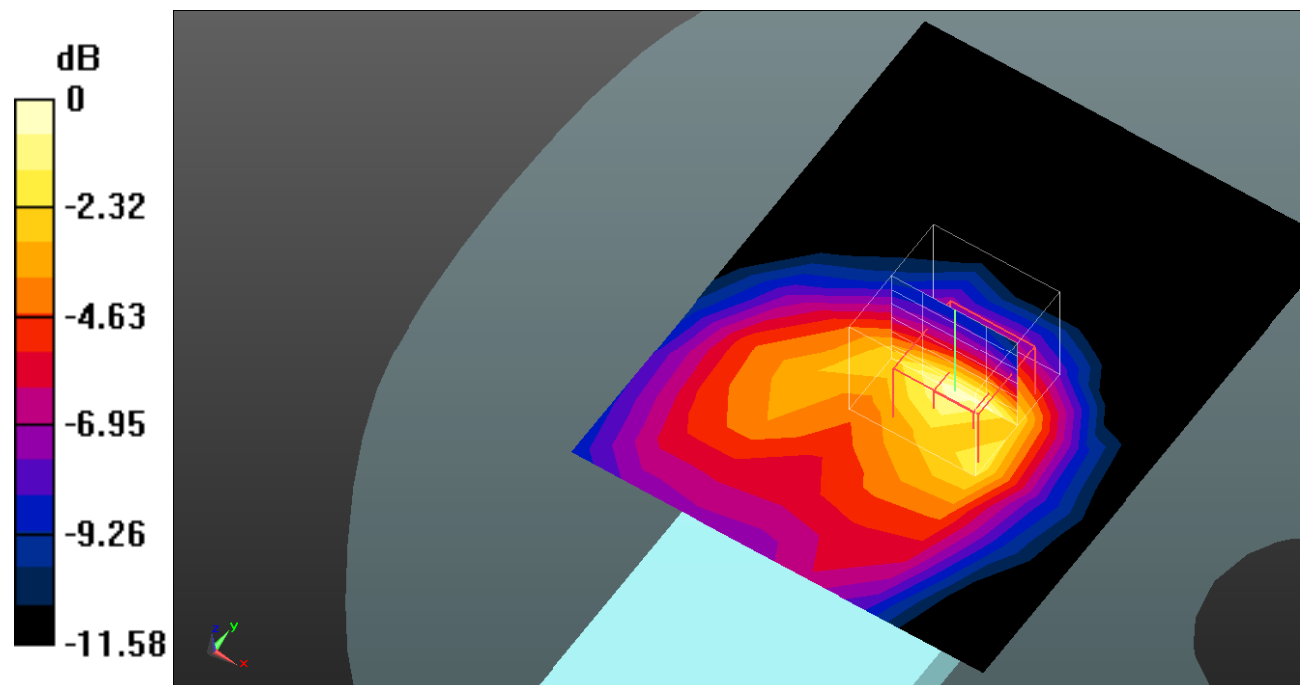

0 dB = 0.267 W/kg = -5.73 dB dBW/kg

Test Plot 29#: WCDMA Band 2_Body Left_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.405 \text{ S/m}$; $\epsilon_r = 40.345$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.0466 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.195 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.0690 W/kg

SAR(1 g) = 0.044 W/kg; SAR(10 g) = 0.027 W/kg

Maximum value of SAR (measured) = 0.0479 W/kg

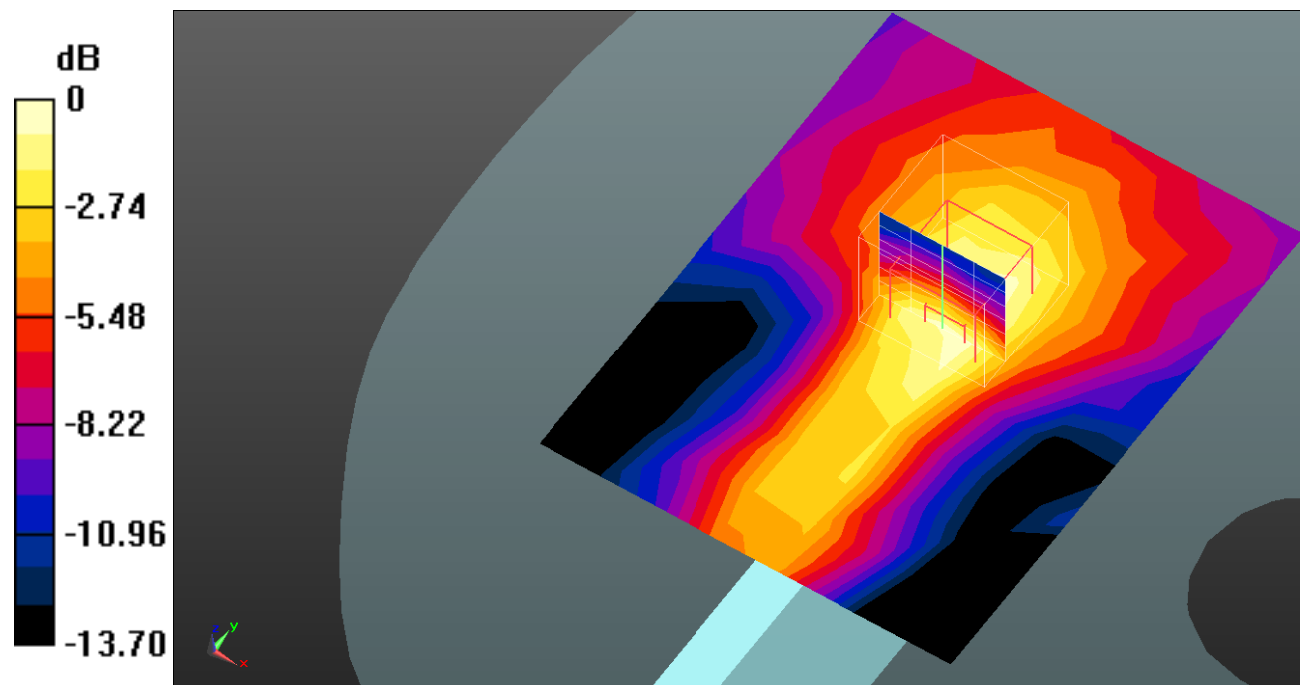

0 dB = 0.0479 W/kg = -13.20 dB dBW/kg

Test Plot 30#: WCDMA Band 2_Body Top_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.405$ S/m; $\epsilon_r = 40.345$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.348 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.34 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.526 W/kg

SAR(1 g) = 0.333 W/kg; SAR(10 g) = 0.179 W/kg

Maximum value of SAR (measured) = 0.382 W/kg

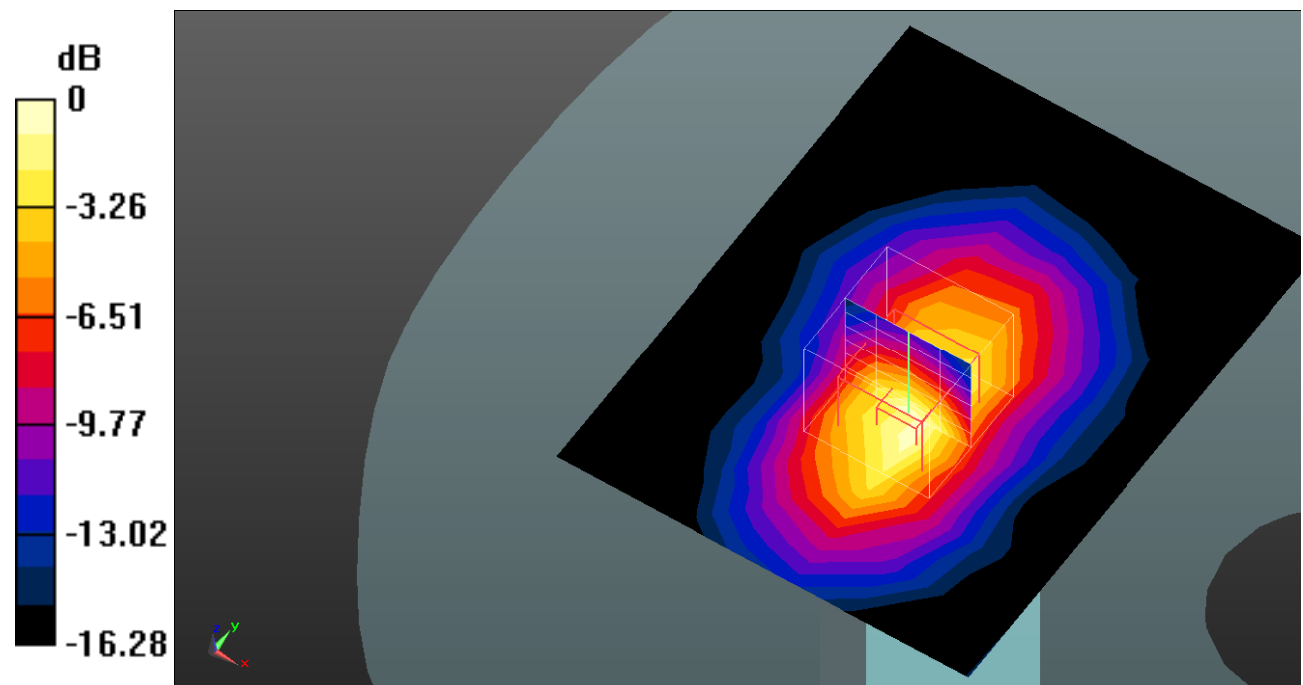

0 dB = 0.382 W/kg = -4.18 dB dBW/kg

Test Plot 31#: WCDMA Band 4_Head Left Cheek_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 39.112$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1732.6 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.290 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.86 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.410 W/kg

SAR(1 g) = 0.265 W/kg; SAR(10 g) = 0.145 W/kg

Maximum value of SAR (measured) = 0.300 W/kg

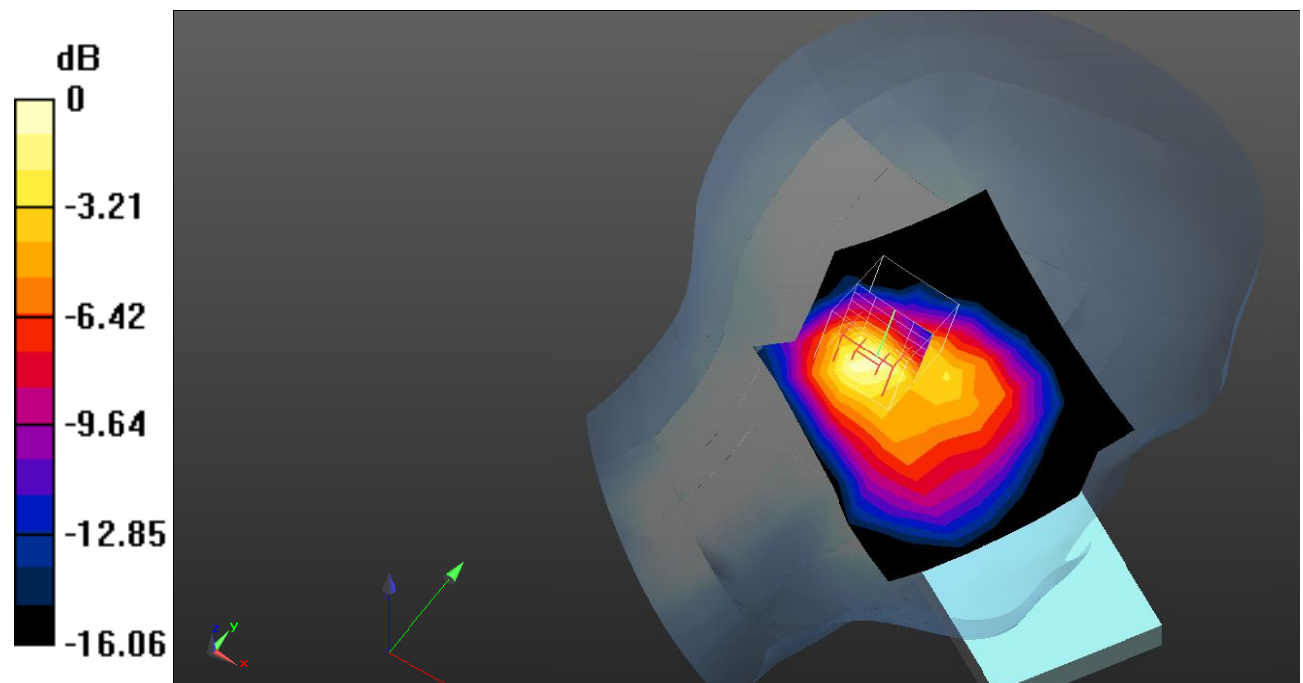

0 dB = 0.300 W/kg = -5.23 dB dBW/kg

Test Plot 32#: WCDMA Band 4_Head Left Tilt_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 39.112$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1732.6 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.384 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.90 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.494 W/kg

SAR(1 g) = 0.327 W/kg; SAR(10 g) = 0.179 W/kg

Maximum value of SAR (measured) = 0.372 W/kg

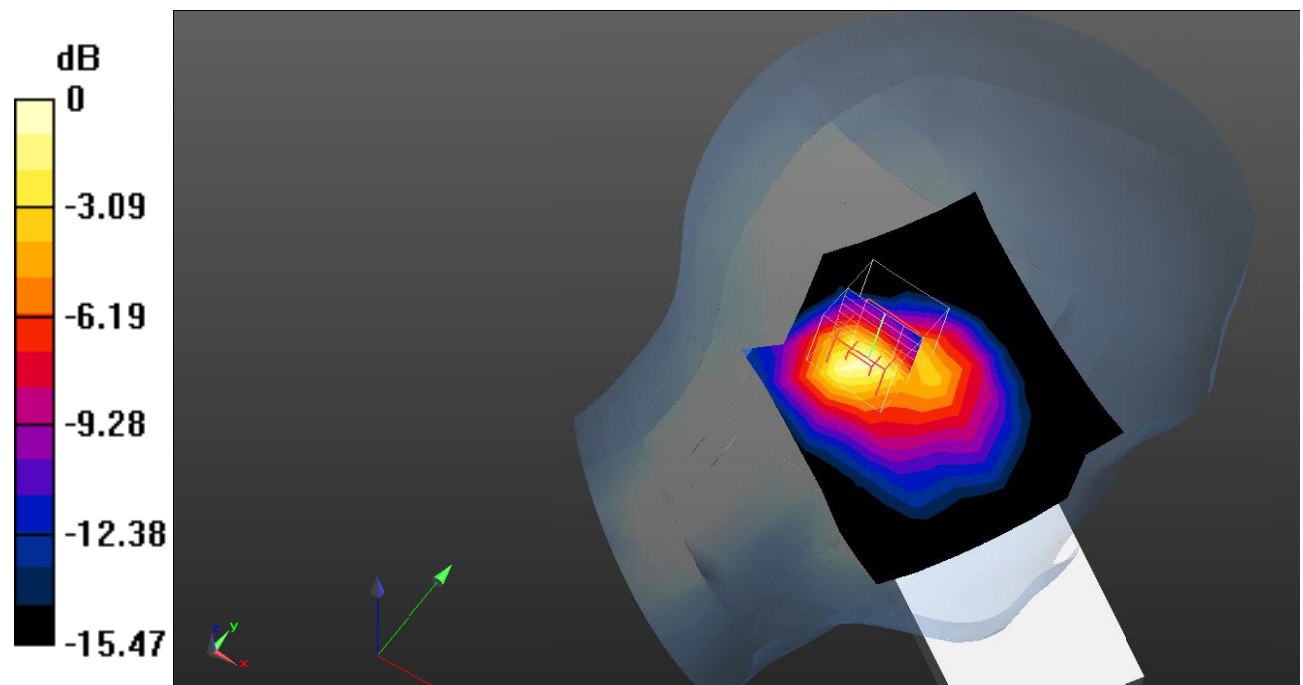

0 dB = 0.372 W/kg = -4.29 dB dBW/kg

Test Plot 33#: WCDMA Band 4_Head Right Cheek_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 39.112$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1732.6 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.340 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.826 V/m; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 0.589 W/kg

SAR(1 g) = 0.359 W/kg; SAR(10 g) = 0.185 W/kg

Maximum value of SAR (measured) = 0.418 W/kg

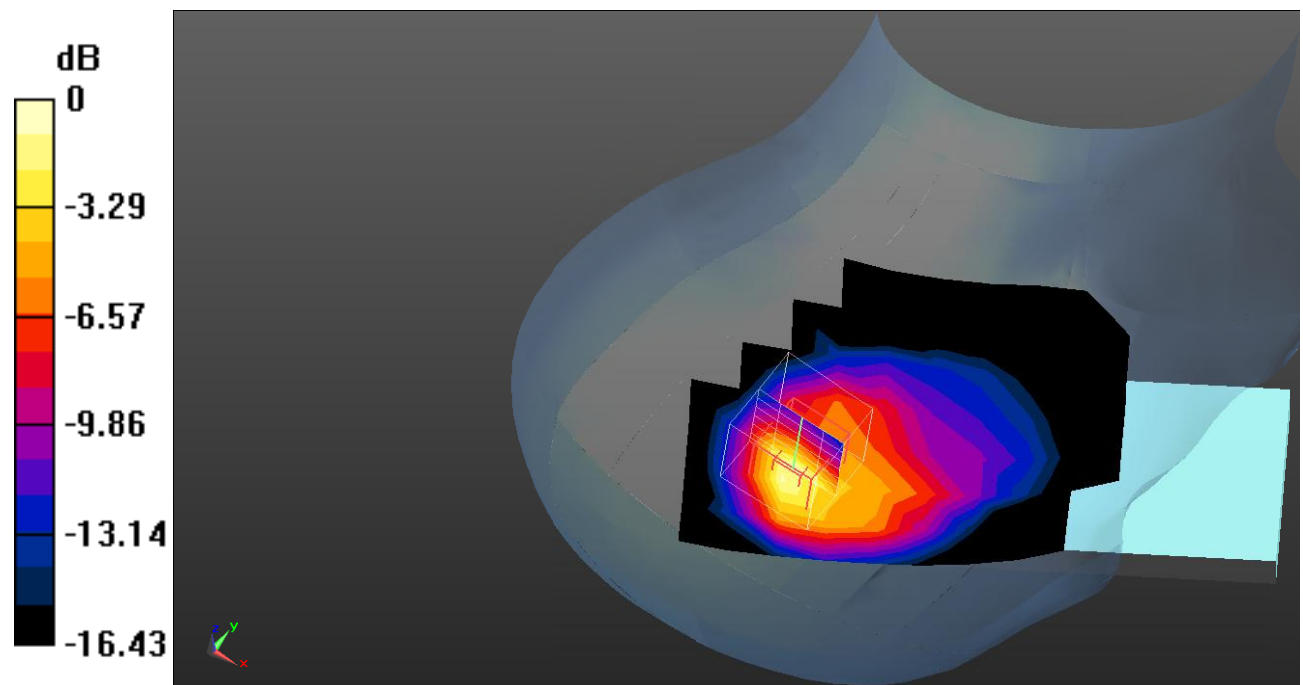

0 dB = 0.418 W/kg = -3.79 dB dBW/kg

Test Plot 34#: WCDMA Band 4_Head Right Tilt_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 39.112$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1732.6 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.454 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.26 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.867 W/kg

SAR(1 g) = 0.515 W/kg; SAR(10 g) = 0.248 W/kg

Maximum value of SAR (measured) = 0.602 W/kg

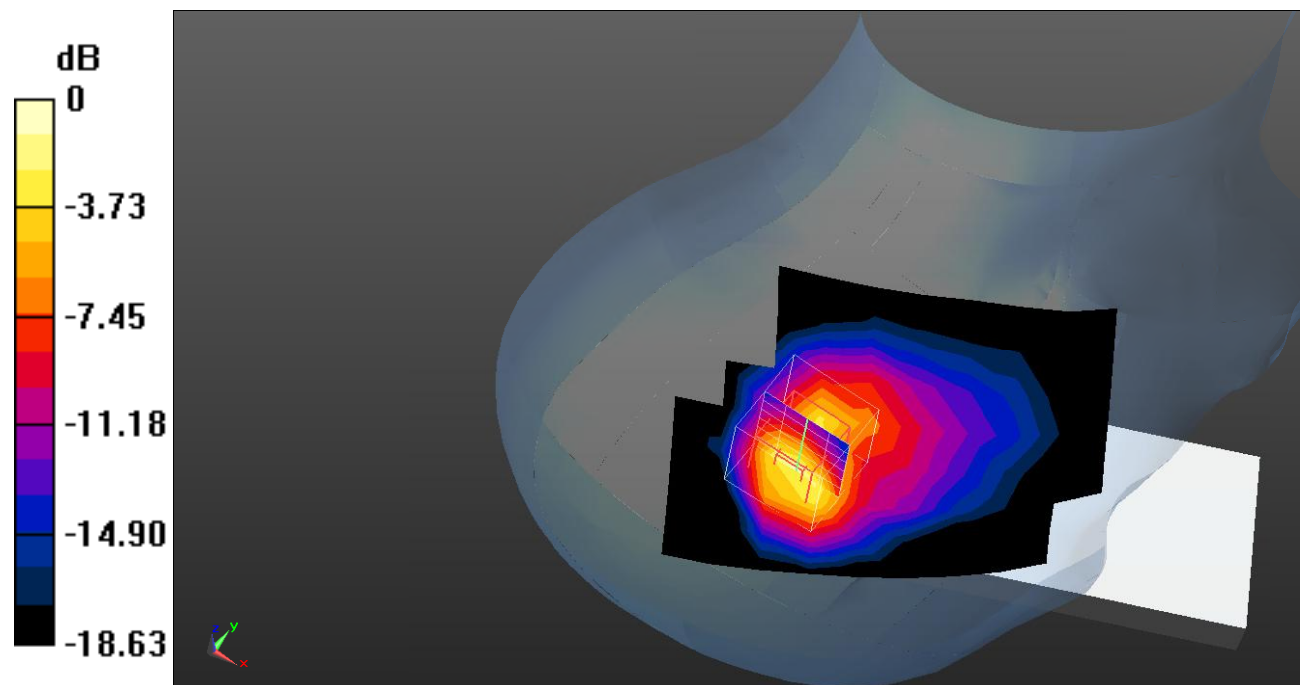

0 dB = 0.602 W/kg = -2.20 dB dBW/kg

Test Plot 35#: WCDMA Band 4_Body Front_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 39.112$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1732.6 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0900 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.645 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.122 W/kg

SAR(1 g) = 0.083 W/kg; SAR(10 g) = 0.049 W/kg

Maximum value of SAR (measured) = 0.0897 W/kg

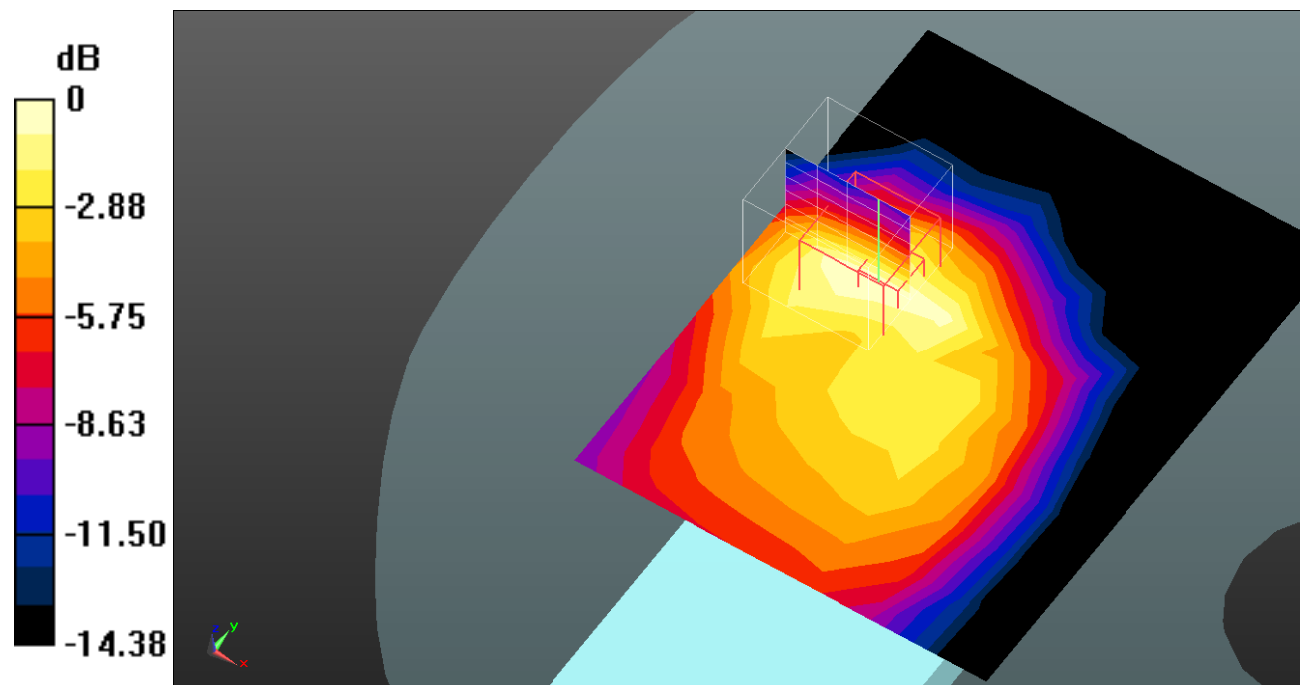

0 dB = 0.0897 W/kg = -10.47 dB dBW/kg

Test Plot 36#: WCDMA Band 4_Body Back_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 39.112$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1732.6 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.134 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.081 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.211 W/kg

SAR(1 g) = 0.134 W/kg; SAR(10 g) = 0.074 W/kg

Maximum value of SAR (measured) = 0.147 W/kg

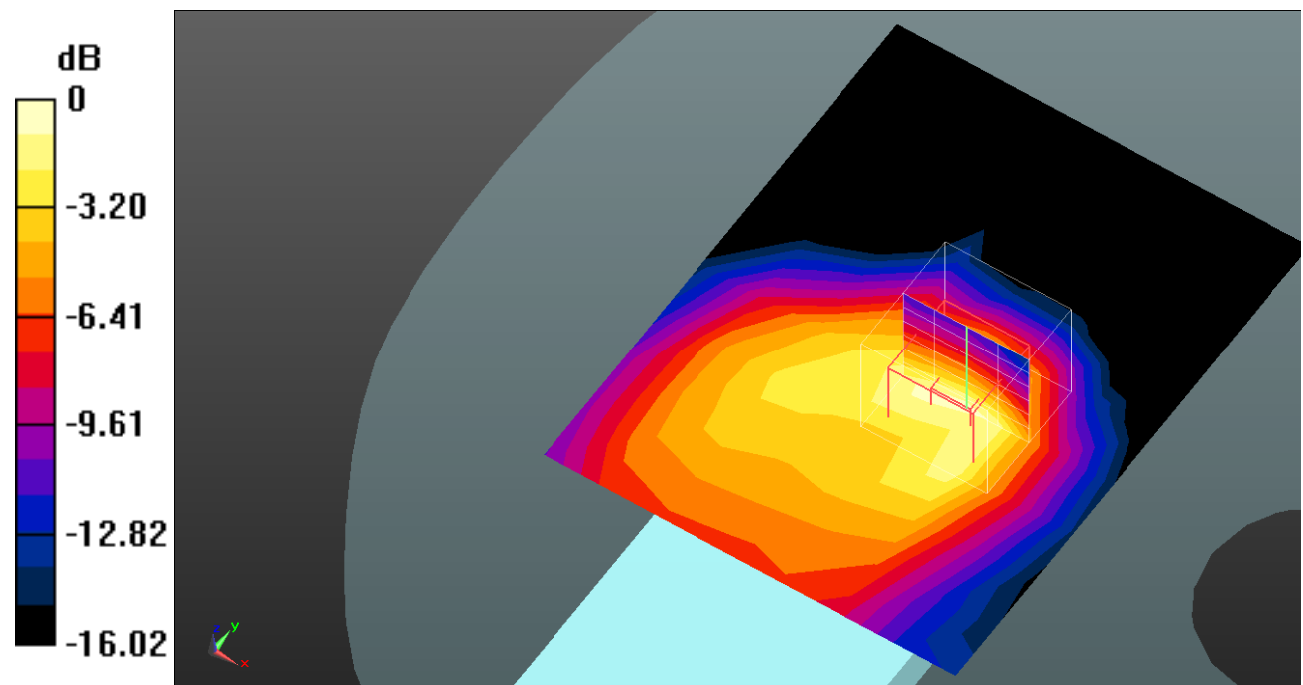

0 dB = 0.147 W/kg = -8.33 dB dBW/kg

Test Plot 37#: WCDMA Band 4_Body Left_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 39.112$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1732.6 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0218 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.729 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.0350 W/kg

SAR(1 g) = 0.023 W/kg; SAR(10 g) = 0.013 W/kg

Maximum value of SAR (measured) = 0.0249 W/kg

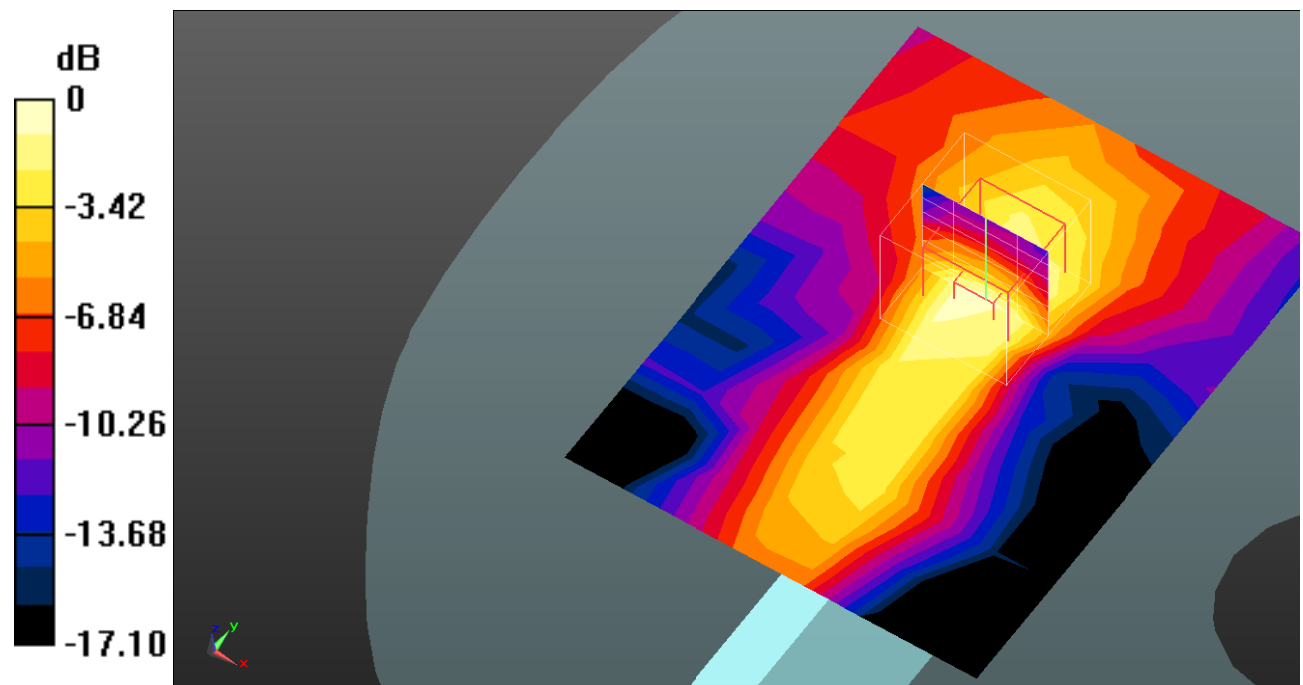

0 dB = 0.0249 W/kg = -16.04 dB dBW/kg

Test Plot 38#: WCDMA Band 4_Body Top_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 39.112$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1732.6 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.204 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.30 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.280 W/kg

SAR(1 g) = 0.184 W/kg; SAR(10 g) = 0.098 W/kg

Maximum value of SAR (measured) = 0.206 W/kg

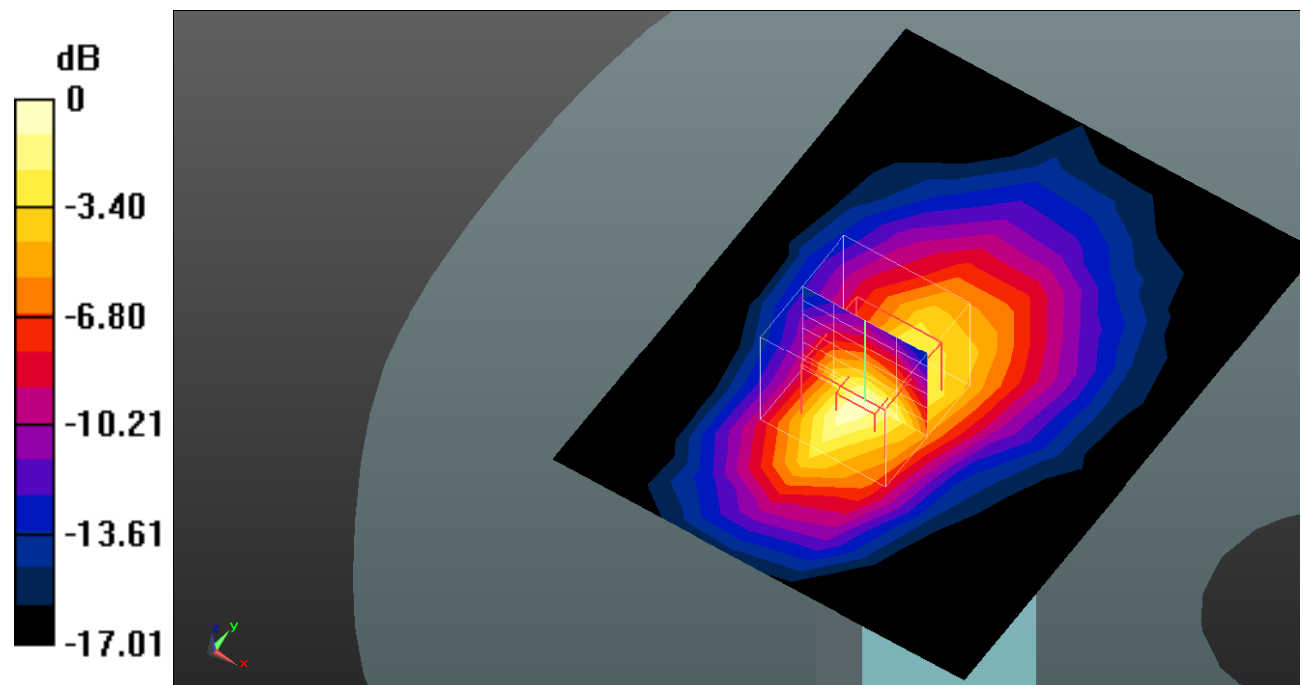

0 dB = 0.206 W/kg = -6.86 dB dBW/kg

Test Plot 39#: WCDMA Band 5_Head Left Cheek_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.936$ S/m; $\epsilon_r = 41.551$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.6 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.371 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.87 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.496 W/kg

SAR(1 g) = 0.360 W/kg; SAR(10 g) = 0.252 W/kg

Maximum value of SAR (measured) = 0.373 W/kg

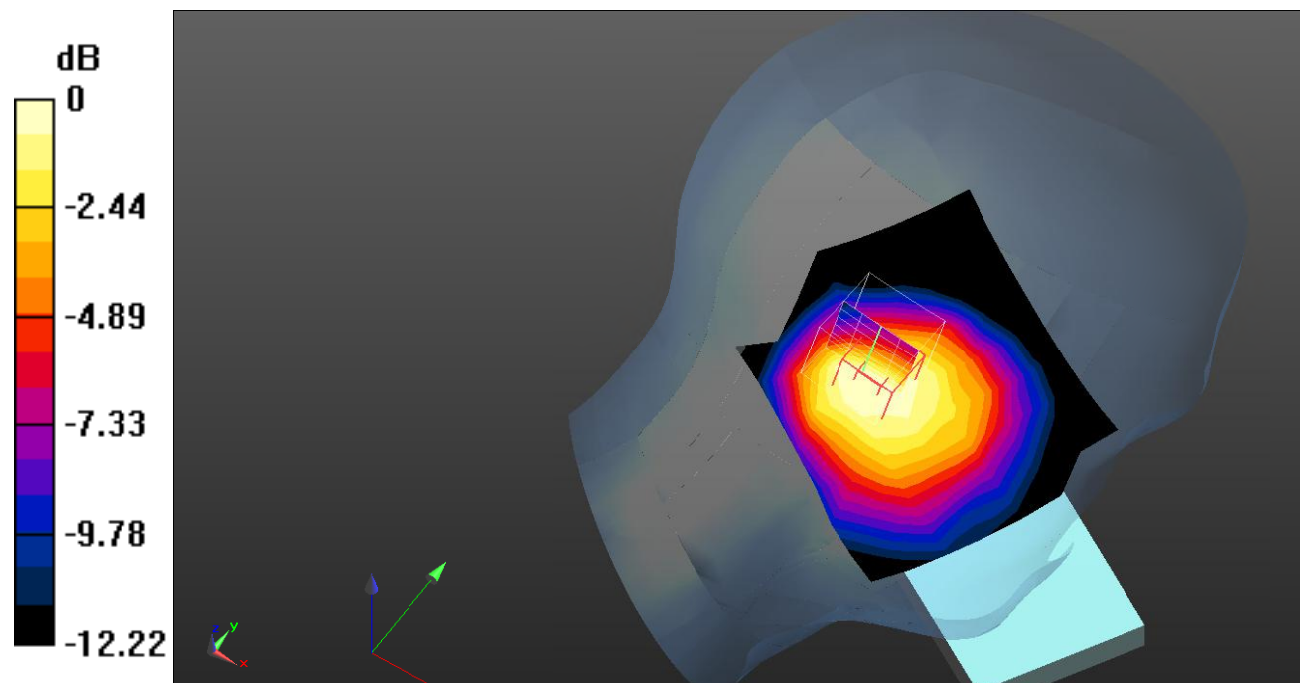

0 dB = 0.373 W/kg = -4.28 dB dBW/kg

Test Plot 40#: WCDMA Band 5_Head Left Tilt_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.936$ S/m; $\epsilon_r = 41.551$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.6 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.329 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.41 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.409 W/kg

SAR(1 g) = 0.295 W/kg; SAR(10 g) = 0.199 W/kg

Maximum value of SAR (measured) = 0.317 W/kg

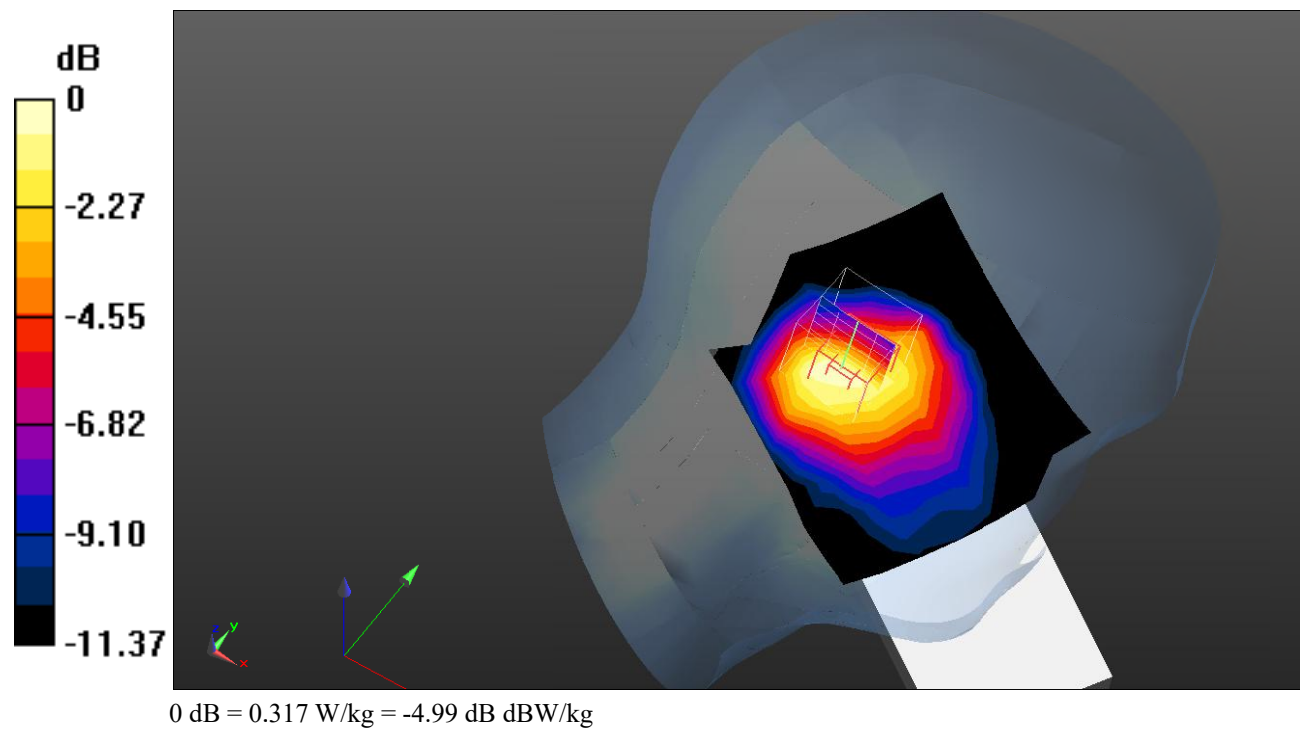

Test Plot 41#: WCDMA Band 5_Head Right Cheek_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.936$ S/m; $\epsilon_r = 41.551$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.6 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.546 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.14 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.841 W/kg

SAR(1 g) = 0.498 W/kg; SAR(10 g) = 0.312 W/kg

Maximum value of SAR (measured) = 0.543 W/kg

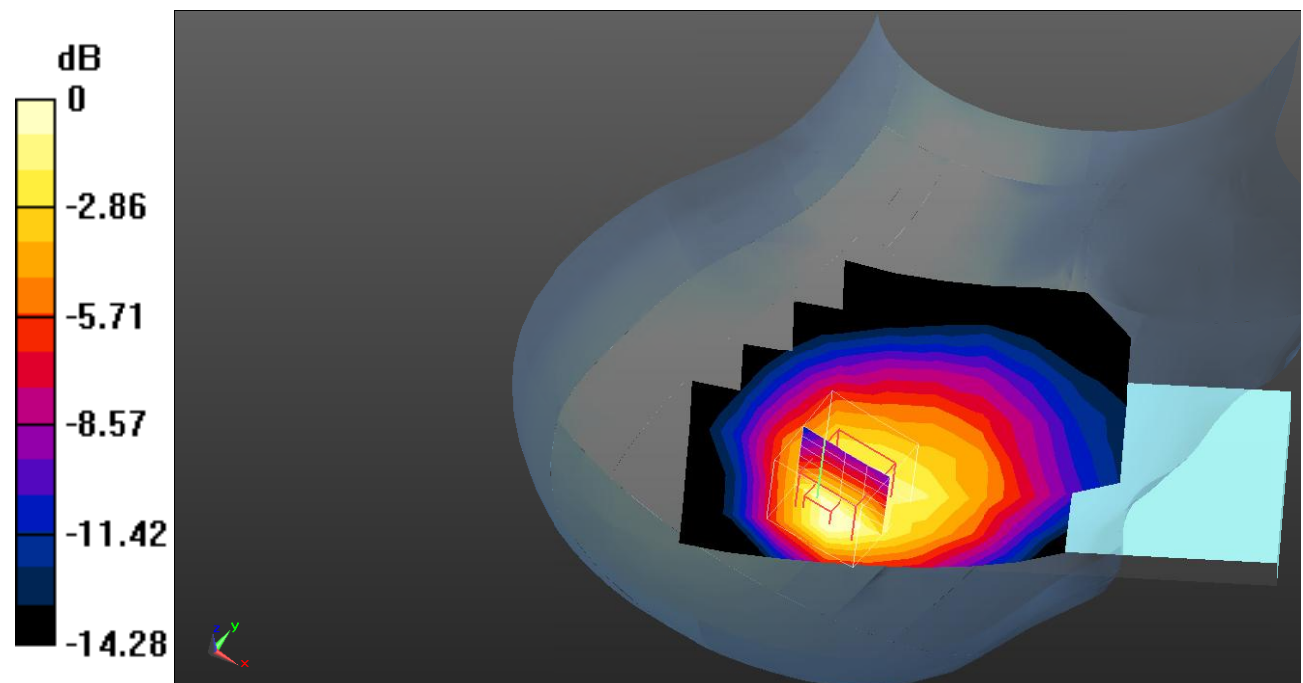

0 dB = 0.543 W/kg = -2.65 dB dBW/kg

Test Plot 42#: WCDMA Band 5_Head Right Tilt_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.936$ S/m; $\epsilon_r = 41.551$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.6 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.502 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.14 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.878 W/kg

SAR(1 g) = 0.462 W/kg; SAR(10 g) = 0.262 W/kg

Maximum value of SAR (measured) = 0.523 W/kg

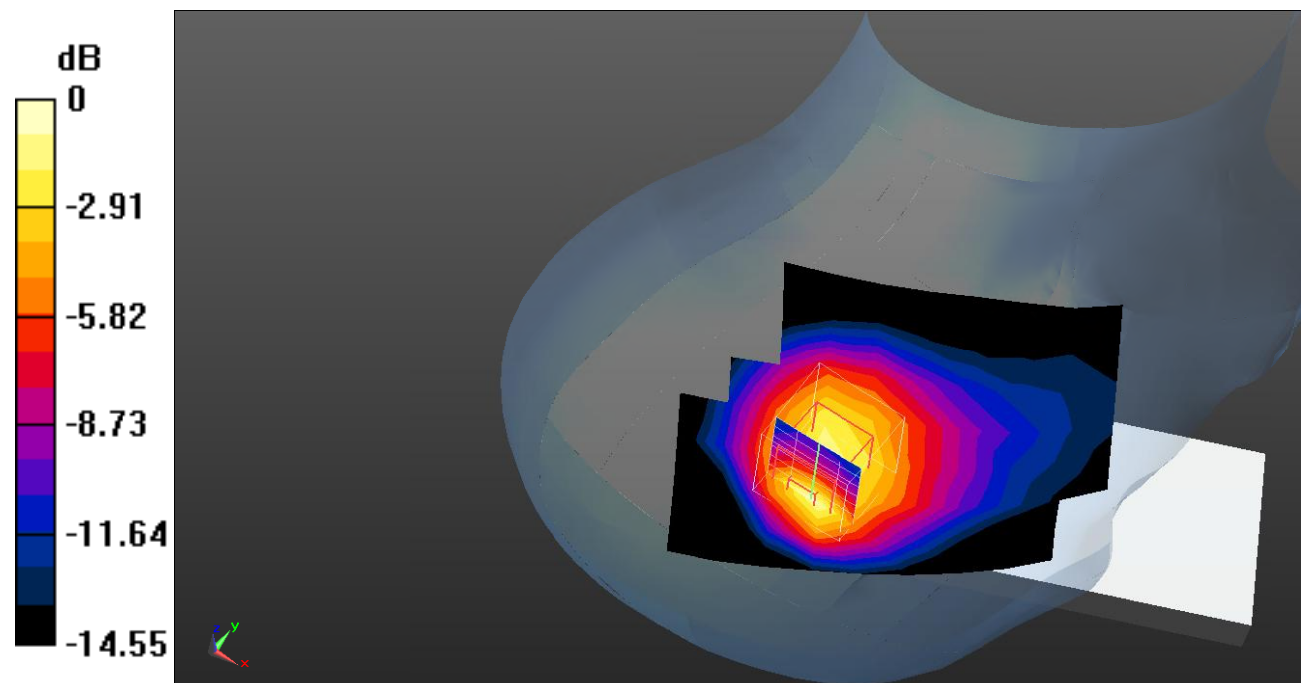

0 dB = 0.523 W/kg = -2.81 dB dBW/kg

Test Plot 43#: WCDMA Band 5_Body Front_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.936$ S/m; $\epsilon_r = 41.551$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.6 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.146 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.520 V/m; Power Drift = 0 dB

Peak SAR (extrapolated) = 0.215 W/kg

SAR(1 g) = 0.150 W/kg; SAR(10 g) = 0.099 W/kg

Maximum value of SAR (measured) = 0.160 W/kg

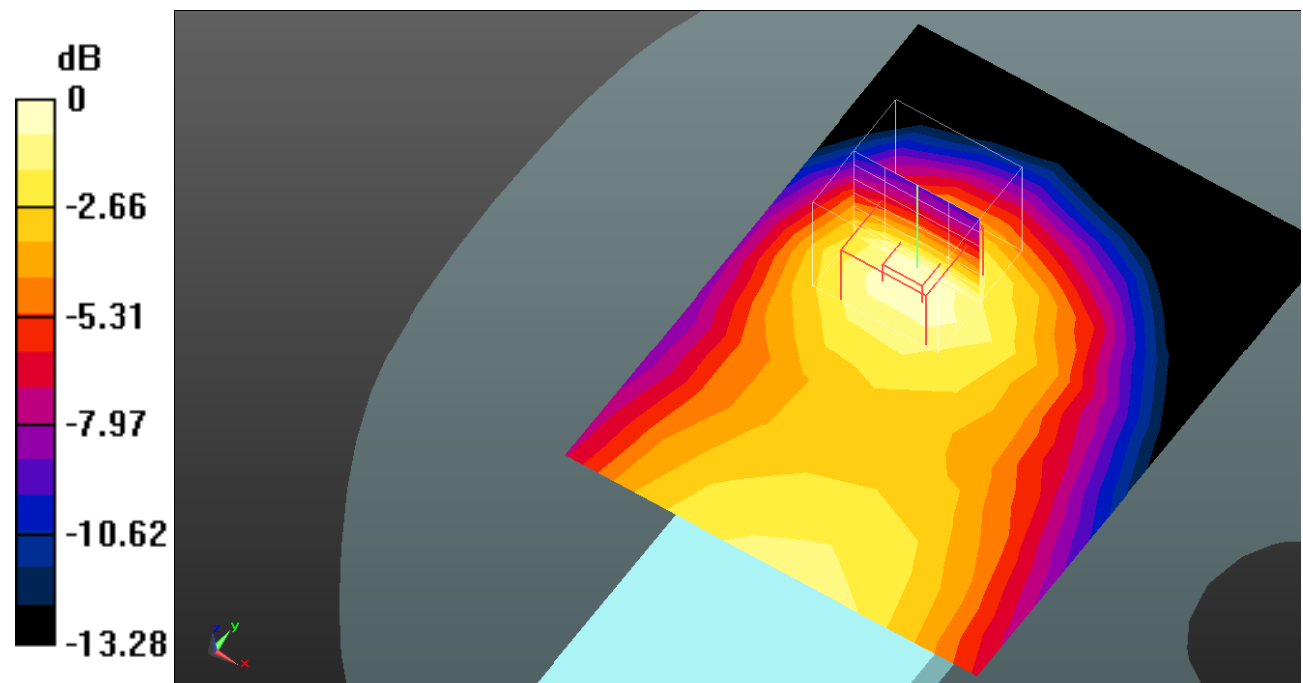

0 dB = 0.160 W/kg = -7.96 dB dBW/kg

Test Plot 44#: WCDMA Band 5_Body Back_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.936$ S/m; $\epsilon_r = 41.551$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.6 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.221 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.54 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.283 W/kg

SAR(1 g) = 0.190 W/kg; SAR(10 g) = 0.123 W/kg

Maximum value of SAR (measured) = 0.197 W/kg

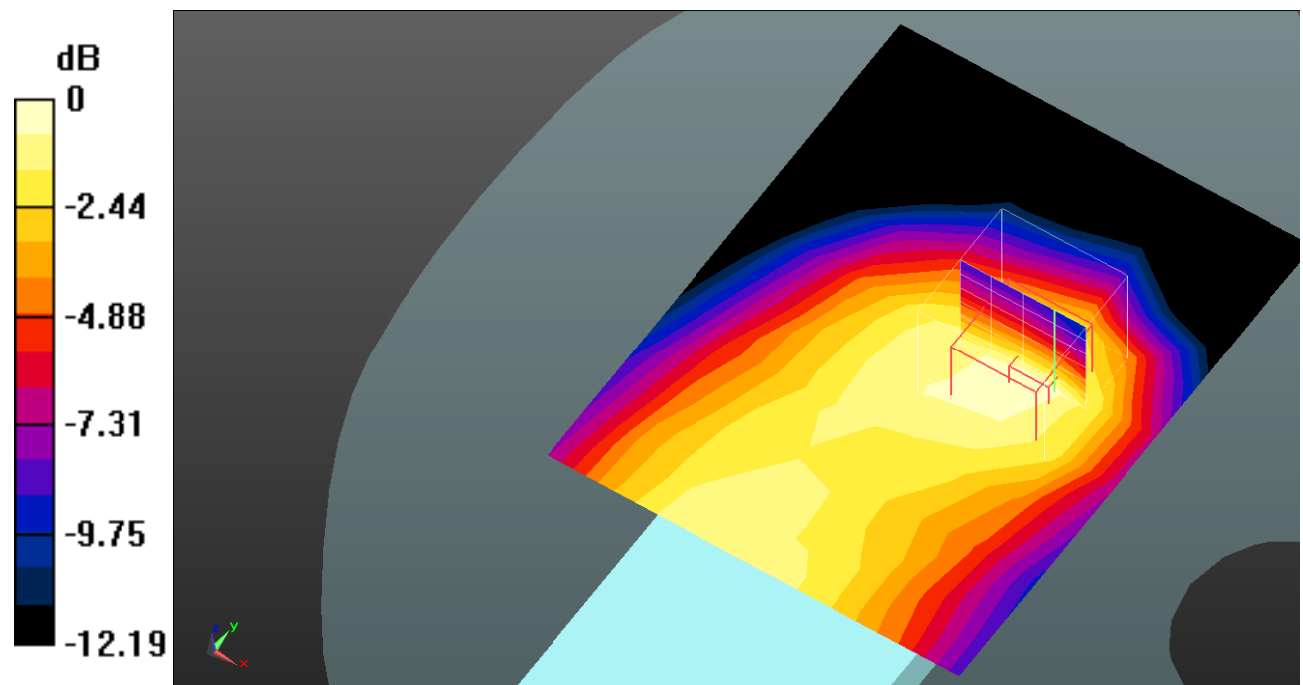

0 dB = 0.197 W/kg = -7.06 dB dBW/kg

Test Plot 45#: WCDMA Band 5_Body Left_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.936$ S/m; $\epsilon_r = 41.551$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.6 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.121 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.910 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.142 W/kg

SAR(1 g) = 0.114 W/kg; SAR(10 g) = 0.082 W/kg

Maximum value of SAR (measured) = 0.120 W/kg

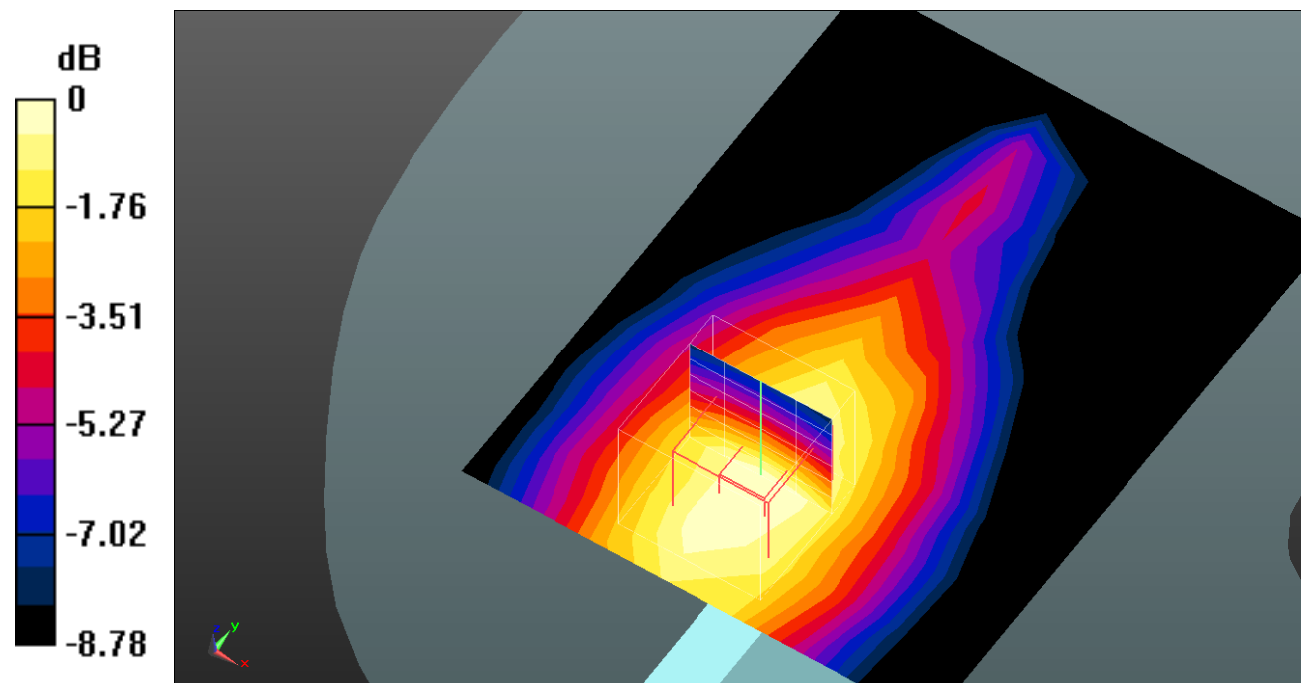

0 dB = 0.120 W/kg = -9.21 dB dBW/kg

Test Plot 46#: WCDMA Band 5_Body Top_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.936$ S/m; $\epsilon_r = 41.551$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.6 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.132 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.200 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.155 W/kg

SAR(1 g) = 0.118 W/kg; SAR(10 g) = 0.080 W/kg

Maximum value of SAR (measured) = 0.125 W/kg

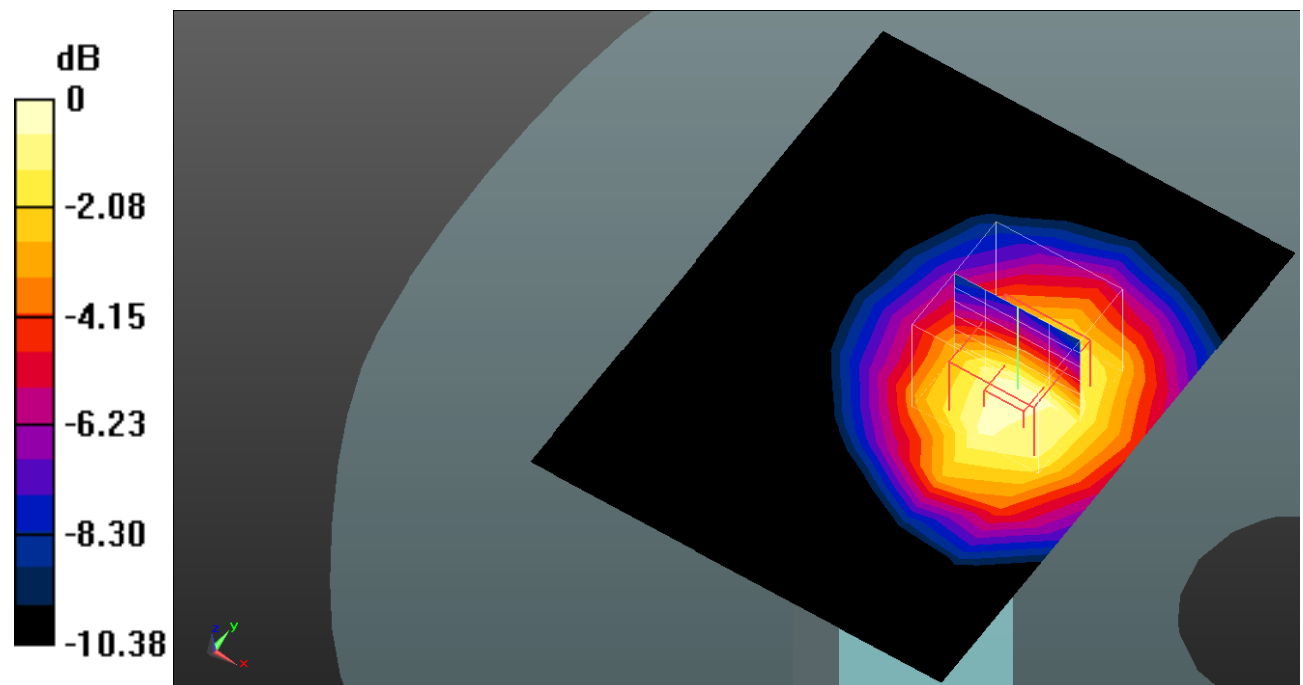

0 dB = 0.125 W/kg = -9.03 dB dBW/kg

Test Plot 47#: LTE Band 2_Head Left Cheek_1RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.405$ S/m; $\epsilon_r = 40.345$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.427 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.93 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.683 W/kg

SAR(1 g) = 0.424 W/kg; SAR(10 g) = 0.229 W/kg

Maximum value of SAR (measured) = 0.491 W/kg

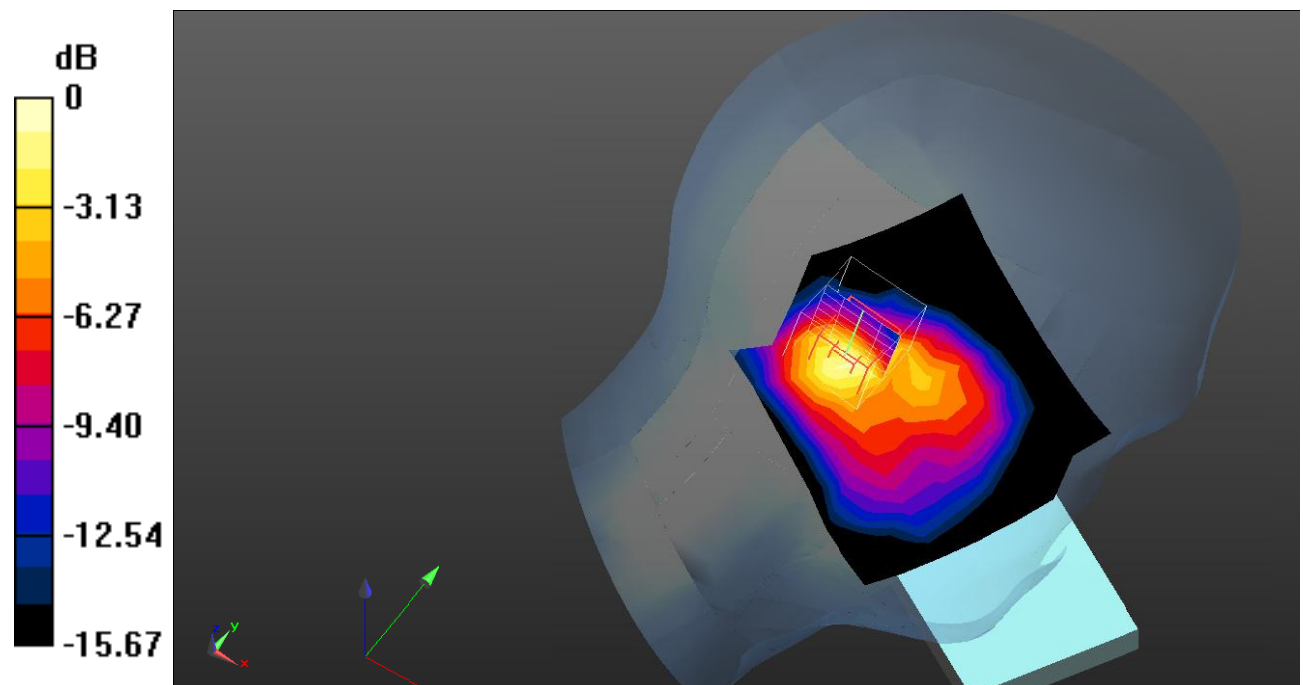

Test Plot 48#: LTE Band 2_Head Left Cheek_50%RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.405$ S/m; $\epsilon_r = 40.345$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.345 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.58 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.546 W/kg

SAR(1 g) = 0.339 W/kg; SAR(10 g) = 0.183 W/kg

Maximum value of SAR (measured) = 0.393 W/kg

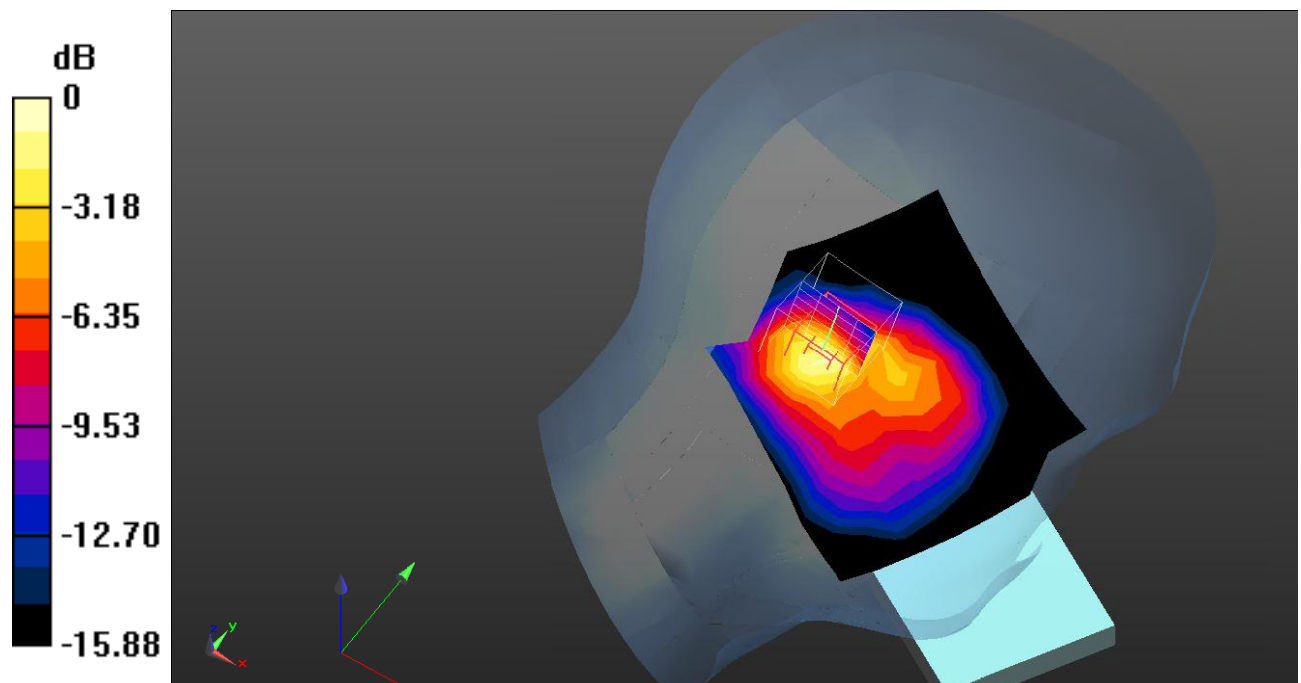

0 dB = 0.393 W/kg = -4.06 dB dBW/kg

Test Plot 49#: LTE Band 2_Head Left Tilt_1RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.405$ S/m; $\epsilon_r = 40.345$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.608 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.66 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.903 W/kg

SAR(1 g) = 0.560 W/kg; SAR(10 g) = 0.299 W/kg

Maximum value of SAR (measured) = 0.656 W/kg

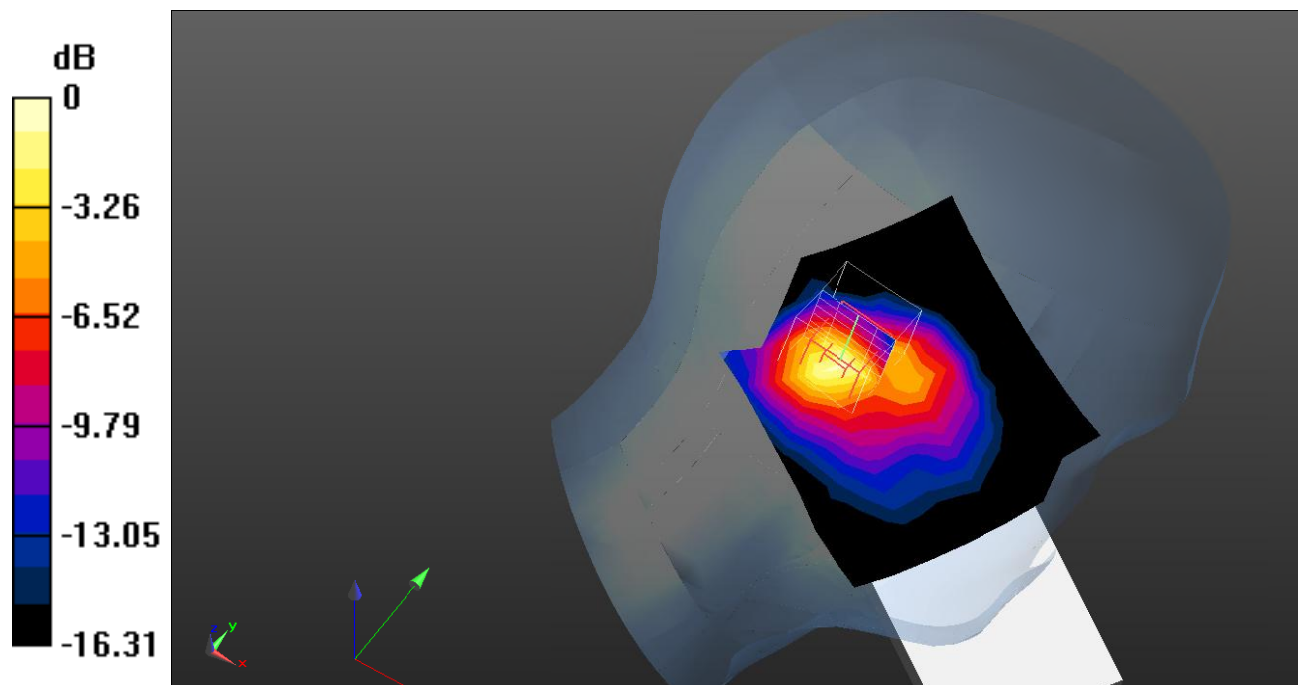

0 dB = 0.656 W/kg = -1.83 dB dBW/kg

Test Plot 50#: LTE Band 2_Head Left Tilt_50%RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.405$ S/m; $\epsilon_r = 40.345$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.489 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.02 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 0.726 W/kg

SAR(1 g) = 0.451 W/kg; SAR(10 g) = 0.240 W/kg

Maximum value of SAR (measured) = 0.527 W/kg

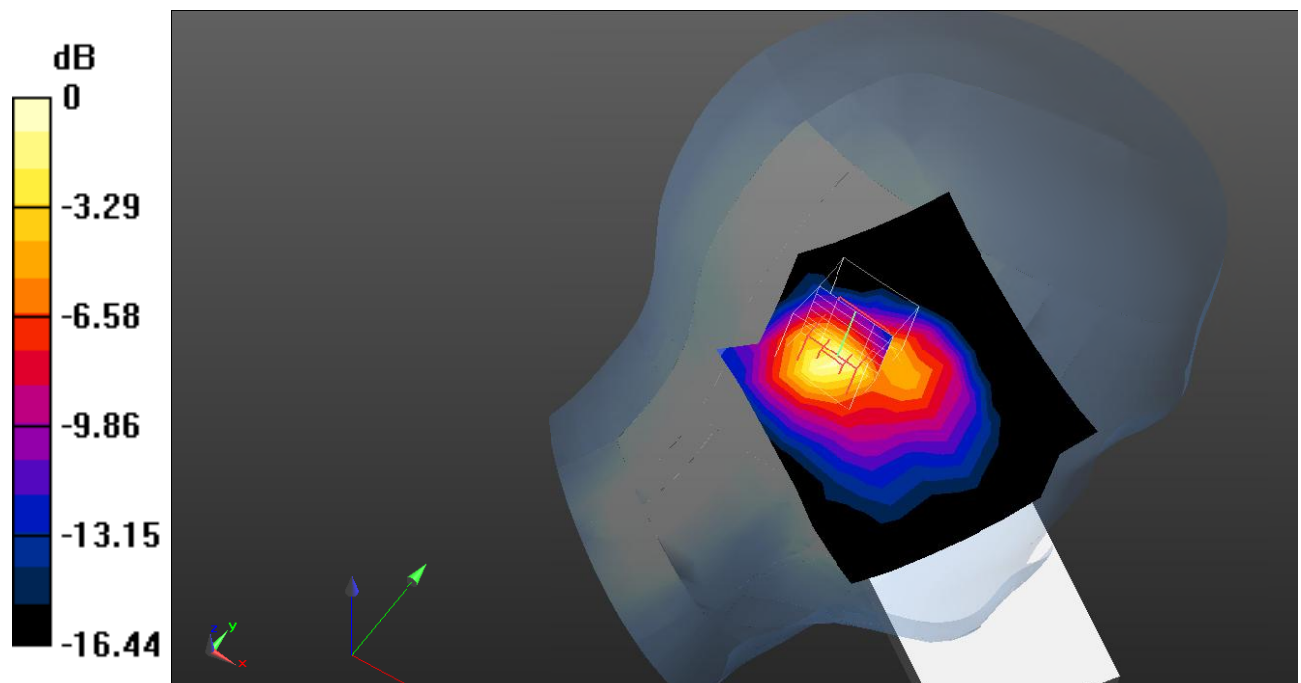

0 dB = 0.527 W/kg = -2.78 dB dBW/kg

Test Plot 51#: LTE Band 2_Head Right Cheek_1RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.405$ S/m; $\epsilon_r = 40.345$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.480 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.82 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.647 W/kg; SAR(10 g) = 0.321 W/kg

Maximum value of SAR (measured) = 0.779 W/kg

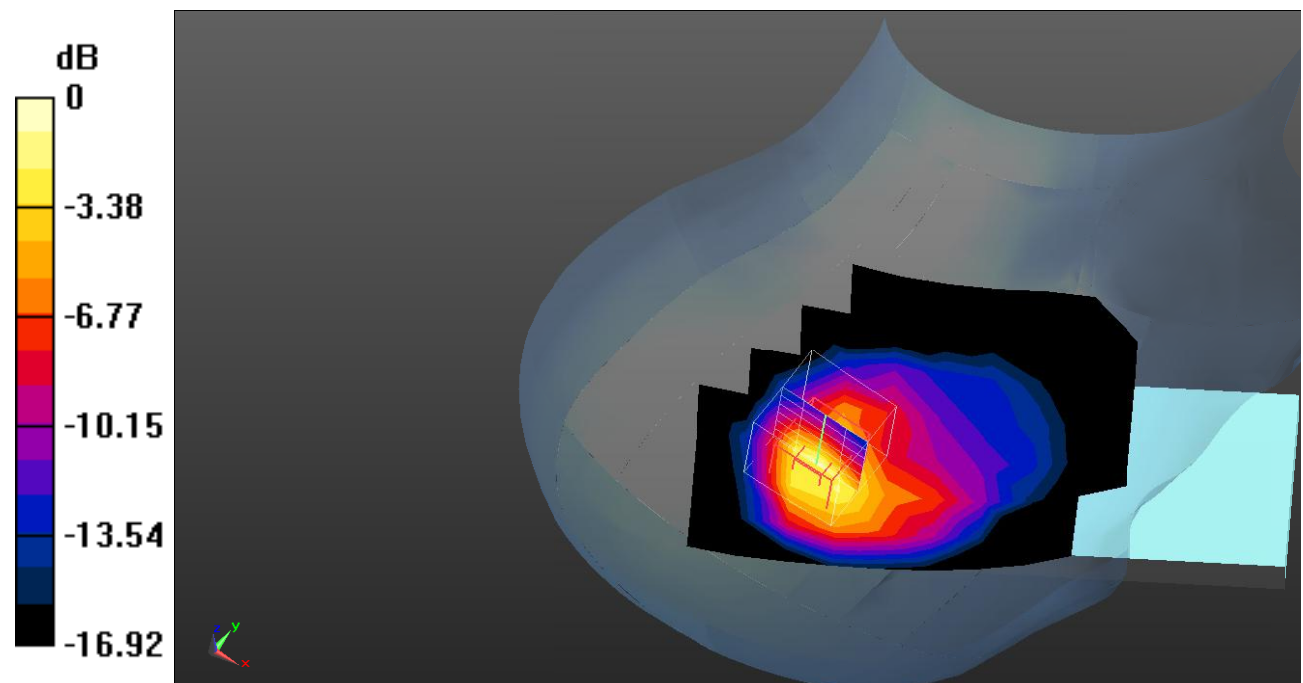

0 dB = 0.779 W/kg = -1.08 dB dBW/kg

Test Plot 52#: LTE Band 2_Head Right Cheek_50%RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.405$ S/m; $\epsilon_r = 40.345$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.349 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.34 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.912 W/kg

SAR(1 g) = 0.525 W/kg; SAR(10 g) = 0.260 W/kg

Maximum value of SAR (measured) = 0.634 W/kg

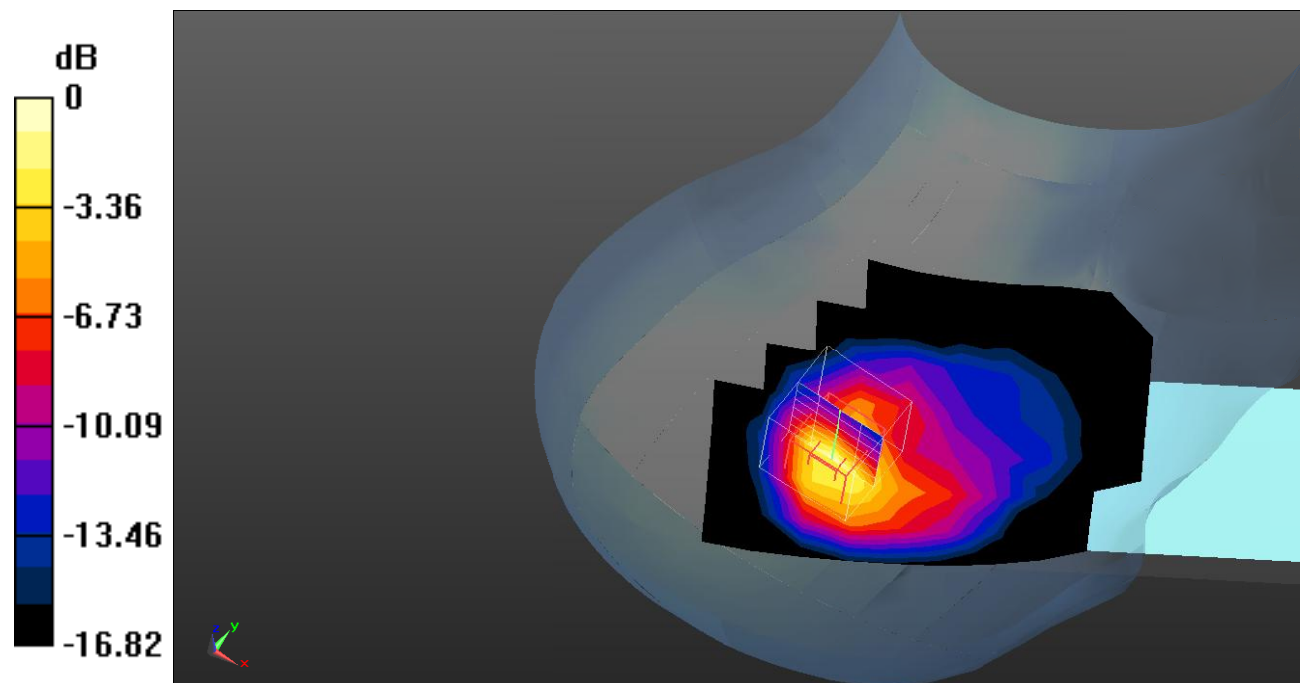

0 dB = 0.634 W/kg = -1.98 dB dBW/kg

Test Plot 53#: LTE Band 2_Head Right Tilt_1RB_Low**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1860 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1860$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 39.599$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1860 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.720 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.90 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.875 W/kg; SAR(10 g) = 0.423 W/kg

Maximum value of SAR (measured) = 1.02 W/kg

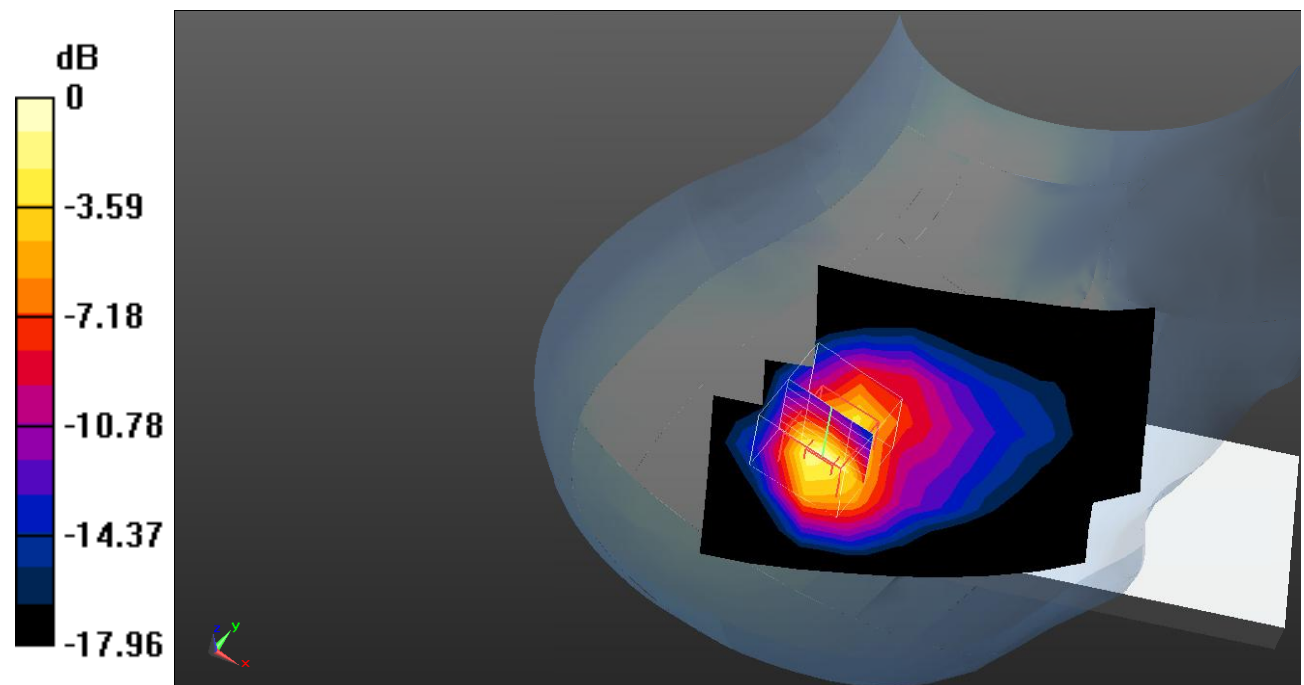

0 dB = 1.02 W/kg = 0.09 dB dBW/kg

Test Plot 54#: LTE Band 2_Head Right Tilt_1RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.405$ S/m; $\epsilon_r = 40.345$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.734 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.39 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.55 W/kg

SAR(1 g) = 0.875 W/kg; SAR(10 g) = 0.422 W/kg

Maximum value of SAR (measured) = 1.03 W/kg

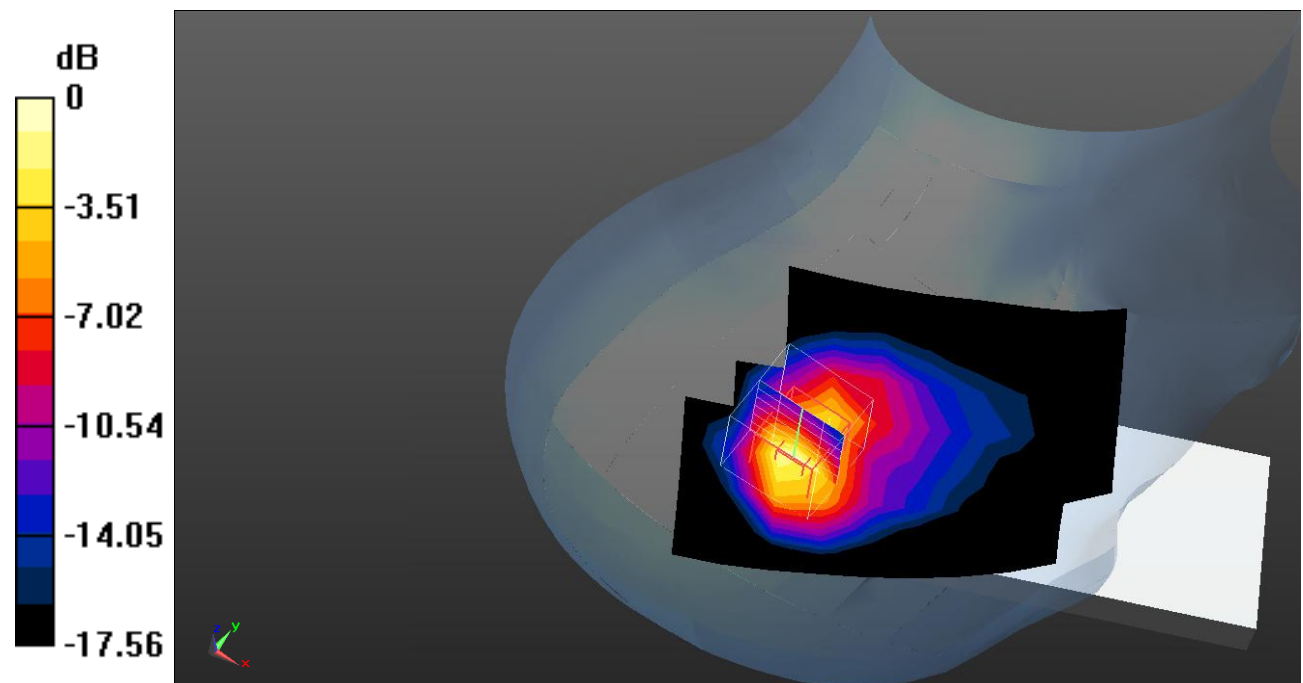

0 dB = 1.03 W/kg = 0.13 dB dBW/kg

Test Plot 55#: LTE Band 2_Head Right Tilt_1RB_High**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1900 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1900$ MHz; $\sigma = 1.424$ S/m; $\epsilon_r = 39.327$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1900 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.727 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.10 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 0.865 W/kg; SAR(10 g) = 0.416 W/kg

Maximum value of SAR (measured) = 1.02 W/kg

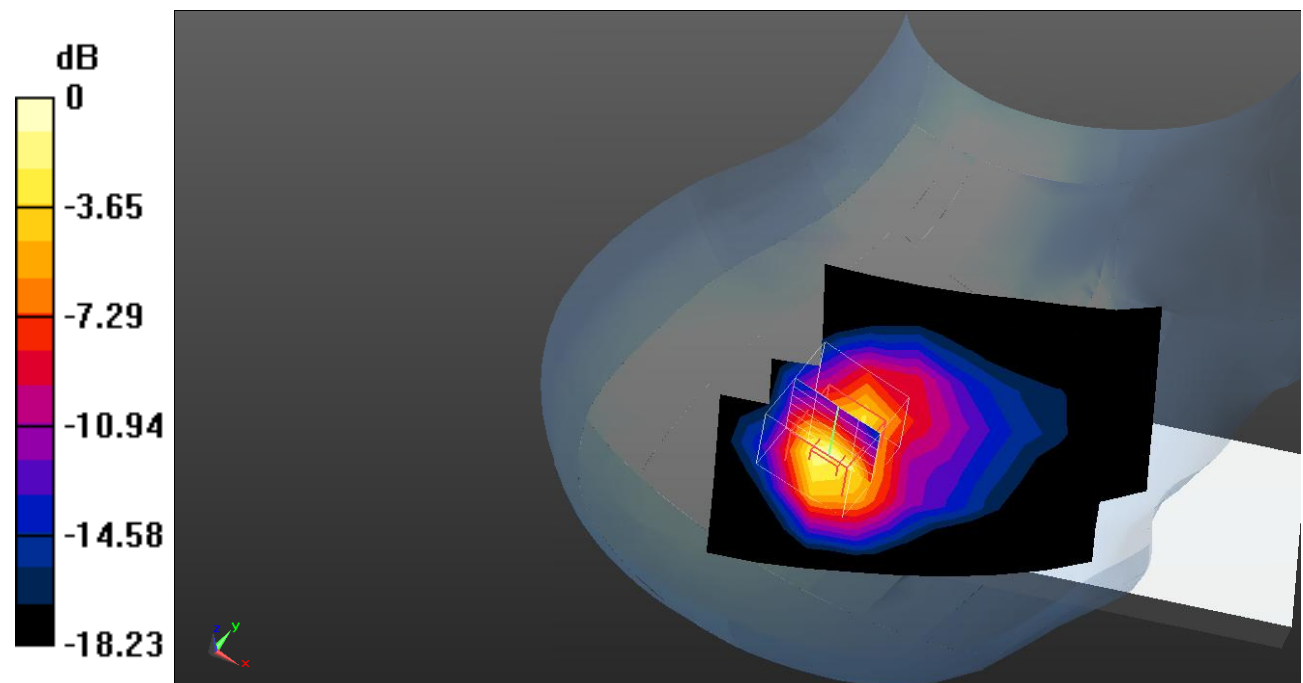

0 dB = 1.02 W/kg = 0.09 dB dBW/kg

Test Plot 56#: LTE Band 2_Head Right Tilt_50%RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.405$ S/m; $\epsilon_r = 40.345$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.619 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.99 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.786 W/kg; SAR(10 g) = 0.380 W/kg

Maximum value of SAR (measured) = 0.947 W/kg

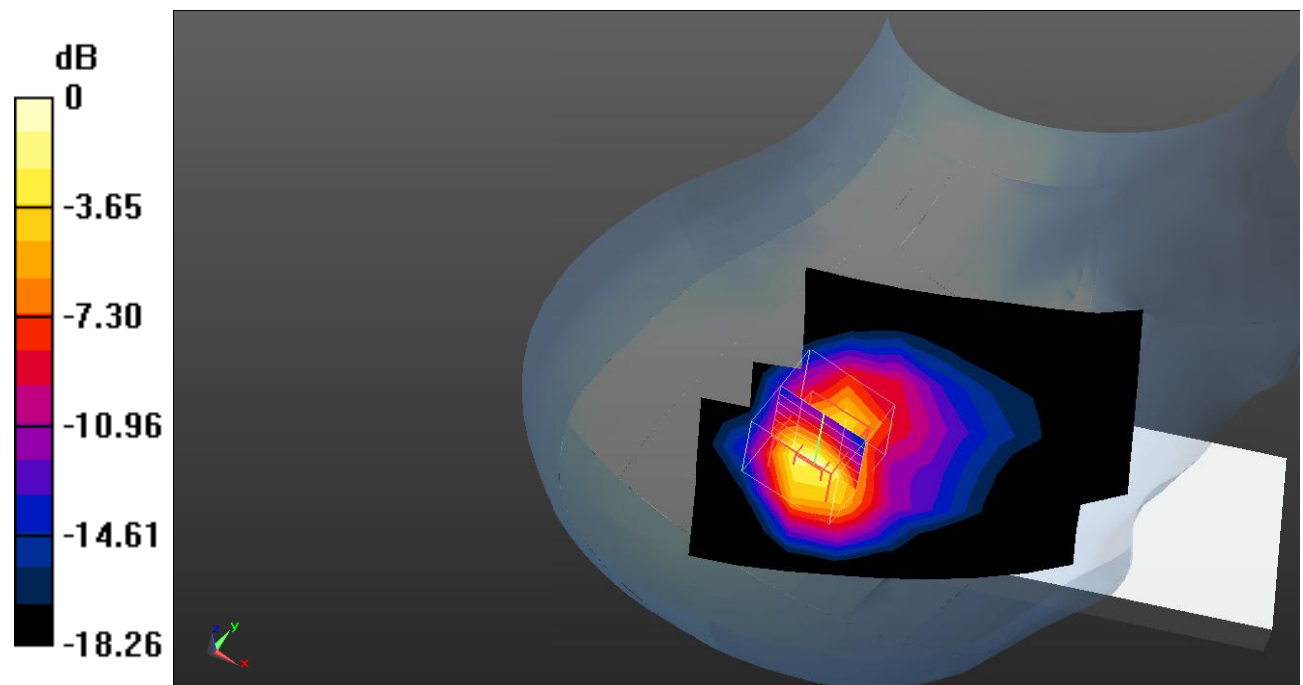

0 dB = 0.947 W/kg = -0.24 dB dBW/kg

Test Plot 57#: LTE Band 2_Head Right Tilt_100%RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.405$ S/m; $\epsilon_r = 40.345$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.643 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.92 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.798 W/kg; SAR(10 g) = 0.387 W/kg

Maximum value of SAR (measured) = 0.963 W/kg

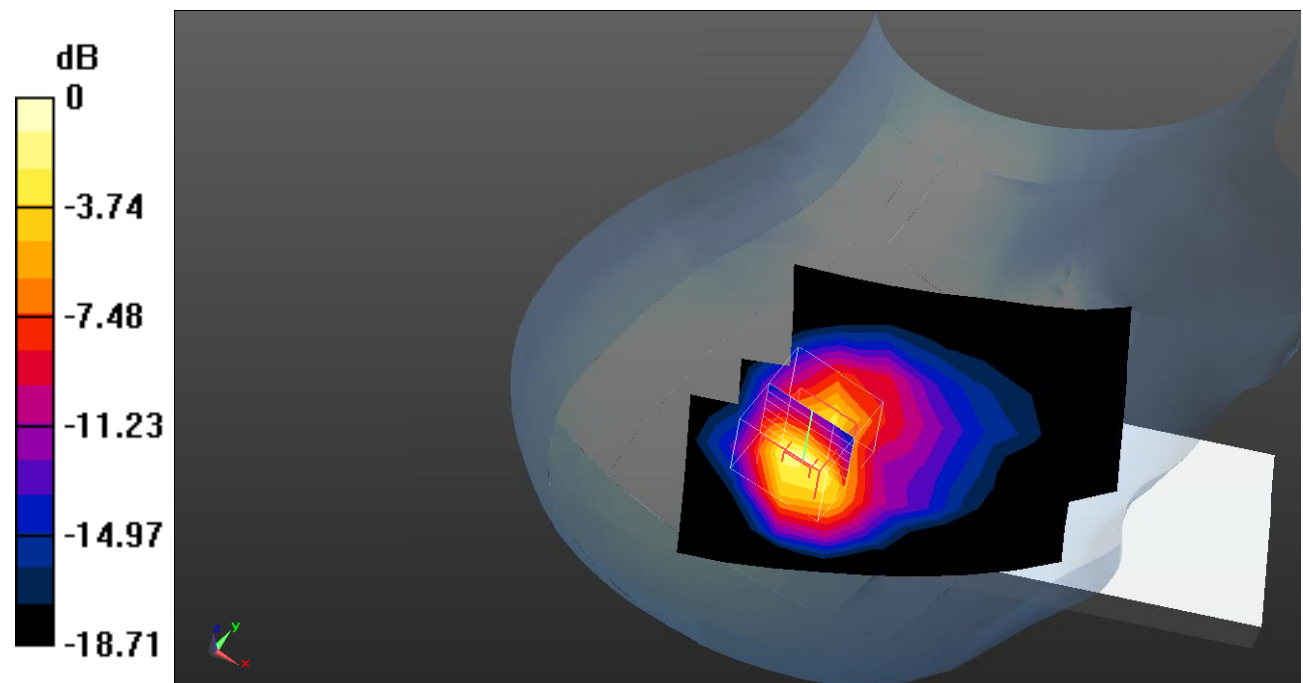

0 dB = 0.963 W/kg = -0.16 dB dBW/kg

Test Plot 58#: LTE Band 2_Body Front_1RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.405$ S/m; $\epsilon_r = 40.345$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.150 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.519 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.211 W/kg

SAR(1 g) = 0.139 W/kg; SAR(10 g) = 0.082 W/kg

Maximum value of SAR (measured) = 0.155 W/kg

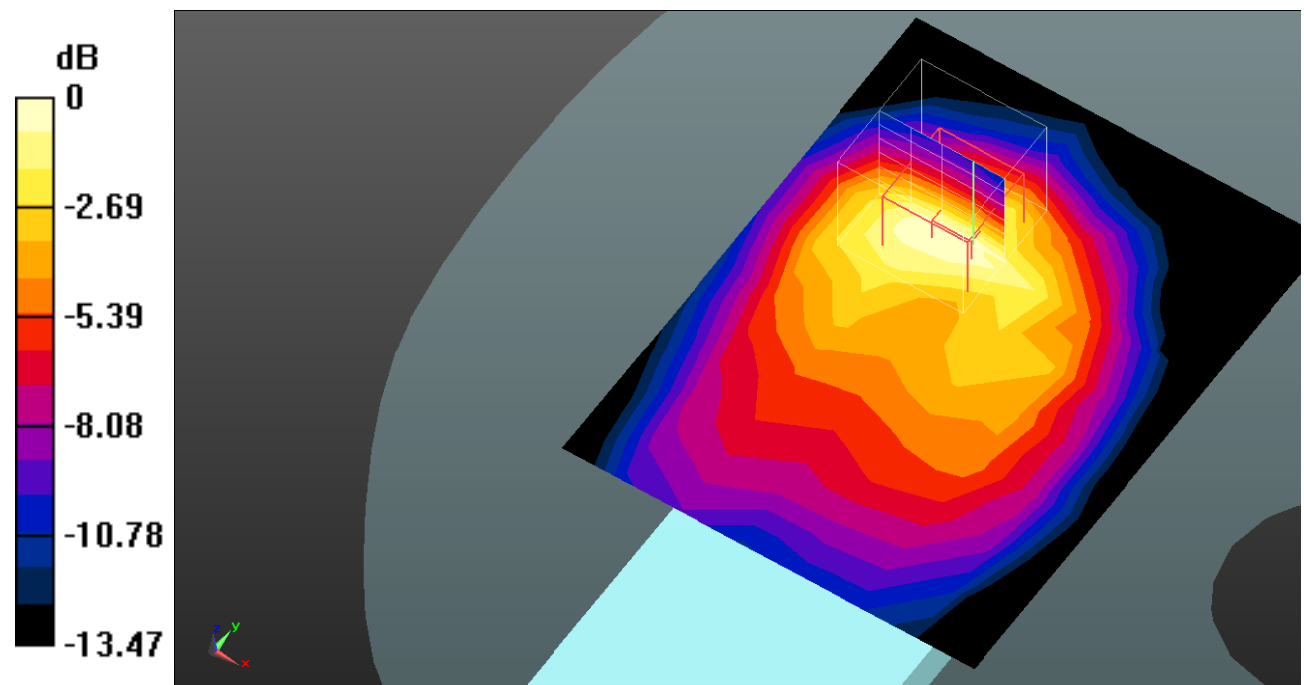

0 dB = 0.155 W/kg = -8.10 dB dBW/kg

Test Plot 59#: LTE Band 2_Body Front_50%RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.405$ S/m; $\epsilon_r = 40.345$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.118 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.964 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.168 W/kg

SAR(1 g) = 0.111 W/kg; SAR(10 g) = 0.066 W/kg

Maximum value of SAR (measured) = 0.123 W/kg

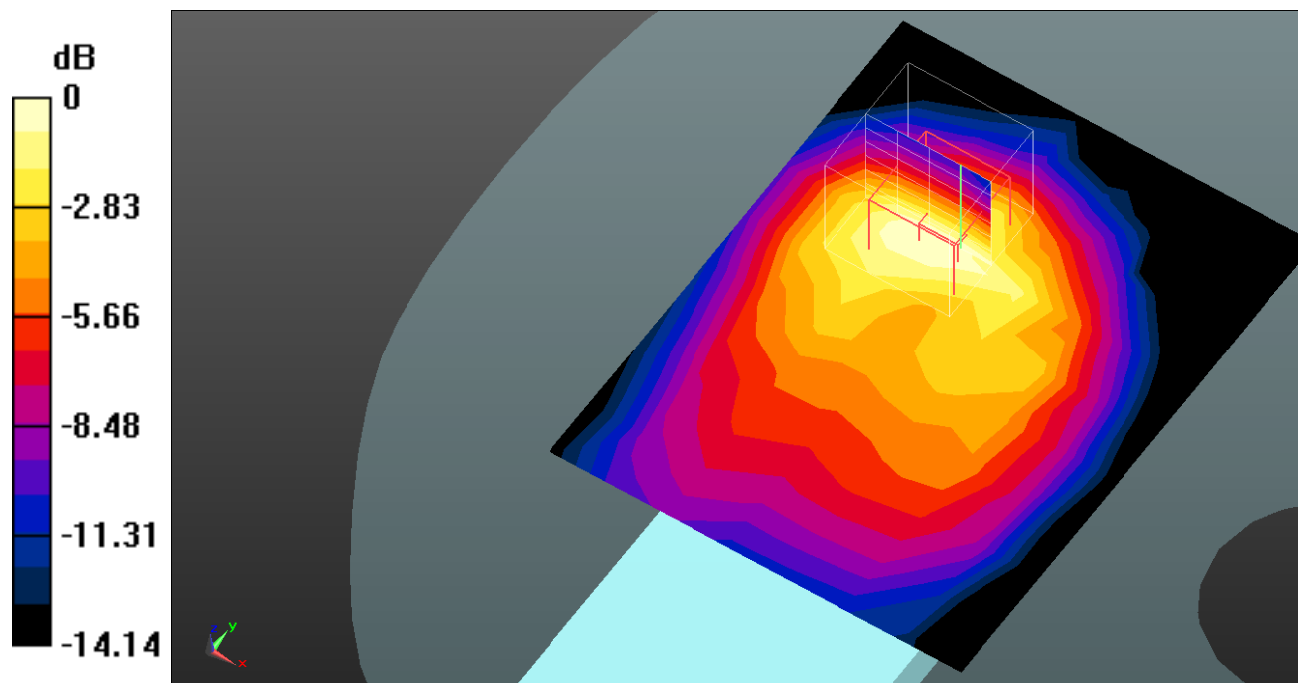

0 dB = 0.123 W/kg = -9.10 dB dBW/kg

Test Plot 60#: LTE Band 2_Body Back_1RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.405$ S/m; $\epsilon_r = 40.345$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.236 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.592 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.355 W/kg

SAR(1 g) = 0.215 W/kg; SAR(10 g) = 0.118 W/kg

Maximum value of SAR (measured) = 0.235 W/kg

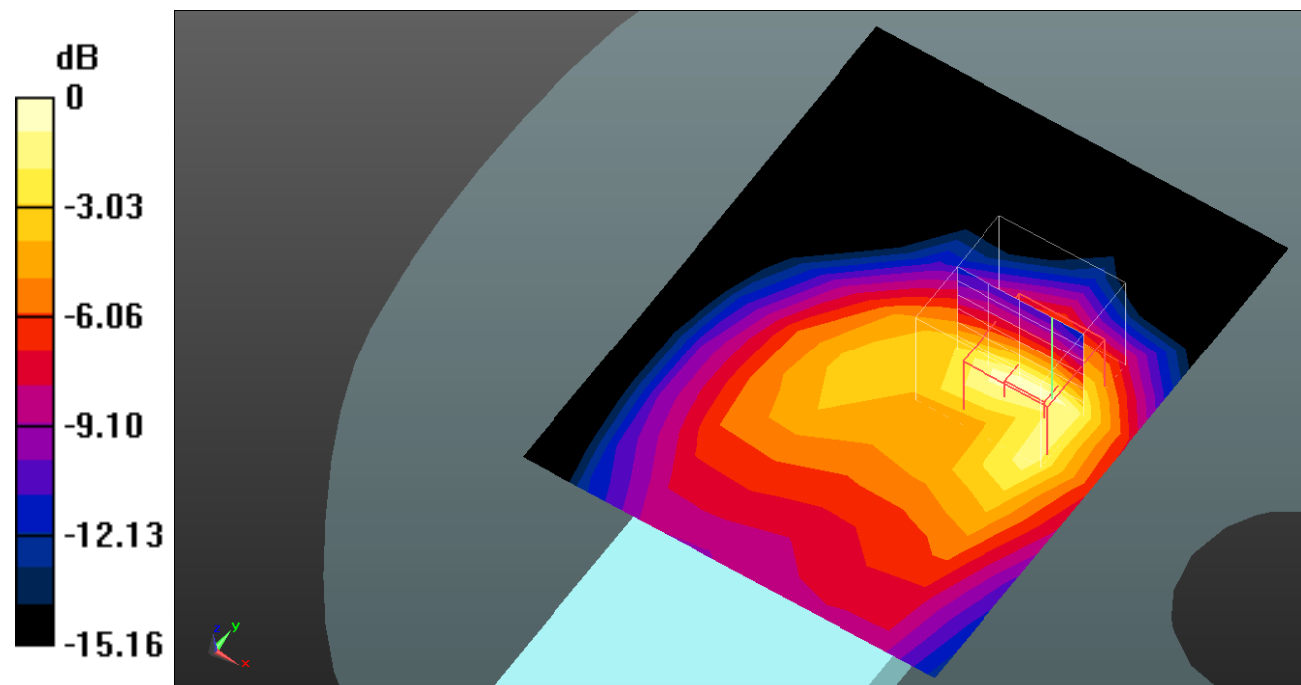

0 dB = 0.235 W/kg = -6.29 dB dBW/kg

Test Plot 61#: LTE Band 2_Body Back_50%RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.405$ S/m; $\epsilon_r = 40.345$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.191 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.672 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.286 W/kg

SAR(1 g) = 0.174 W/kg; SAR(10 g) = 0.095 W/kg

Maximum value of SAR (measured) = 0.200 W/kg

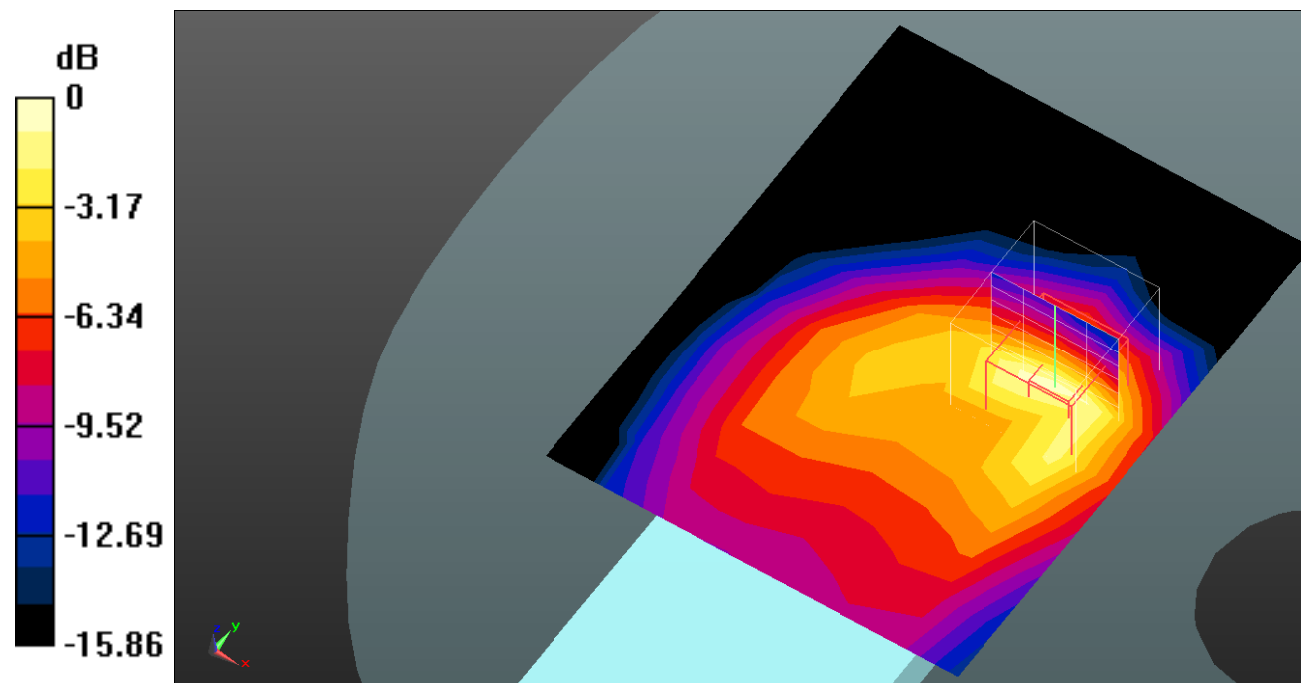

0 dB = 0.200 W/kg = -6.99 dB dBW/kg

Test Plot 62#: LTE Band 2_Body Left_1RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.405$ S/m; $\epsilon_r = 40.345$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0544 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.912 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.0720 W/kg

SAR(1 g) = 0.048 W/kg; SAR(10 g) = 0.029 W/kg

Maximum value of SAR (measured) = 0.0522 W/kg

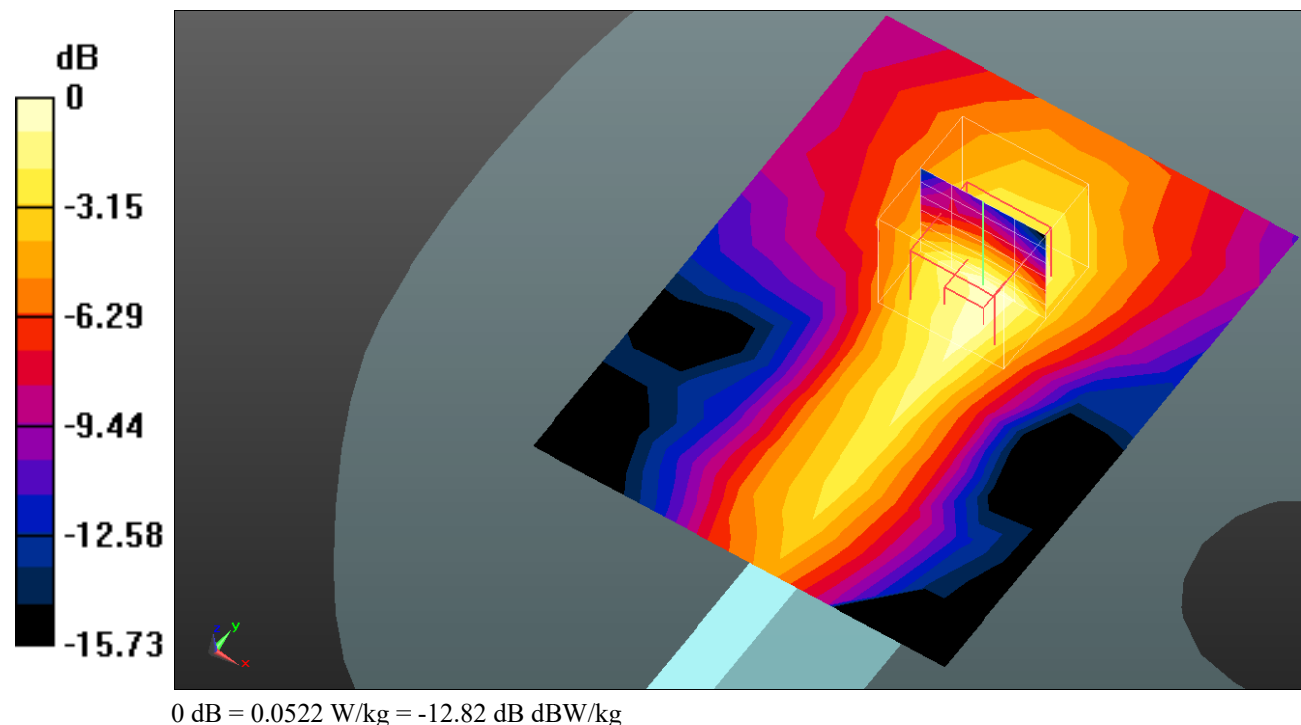

Test Plot 63#: LTE Band 2_Body Left_50%RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.405$ S/m; $\epsilon_r = 40.345$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0424 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.296 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0600 W/kg

SAR(1 g) = 0.039 W/kg; SAR(10 g) = 0.023 W/kg

Maximum value of SAR (measured) = 0.0421 W/kg

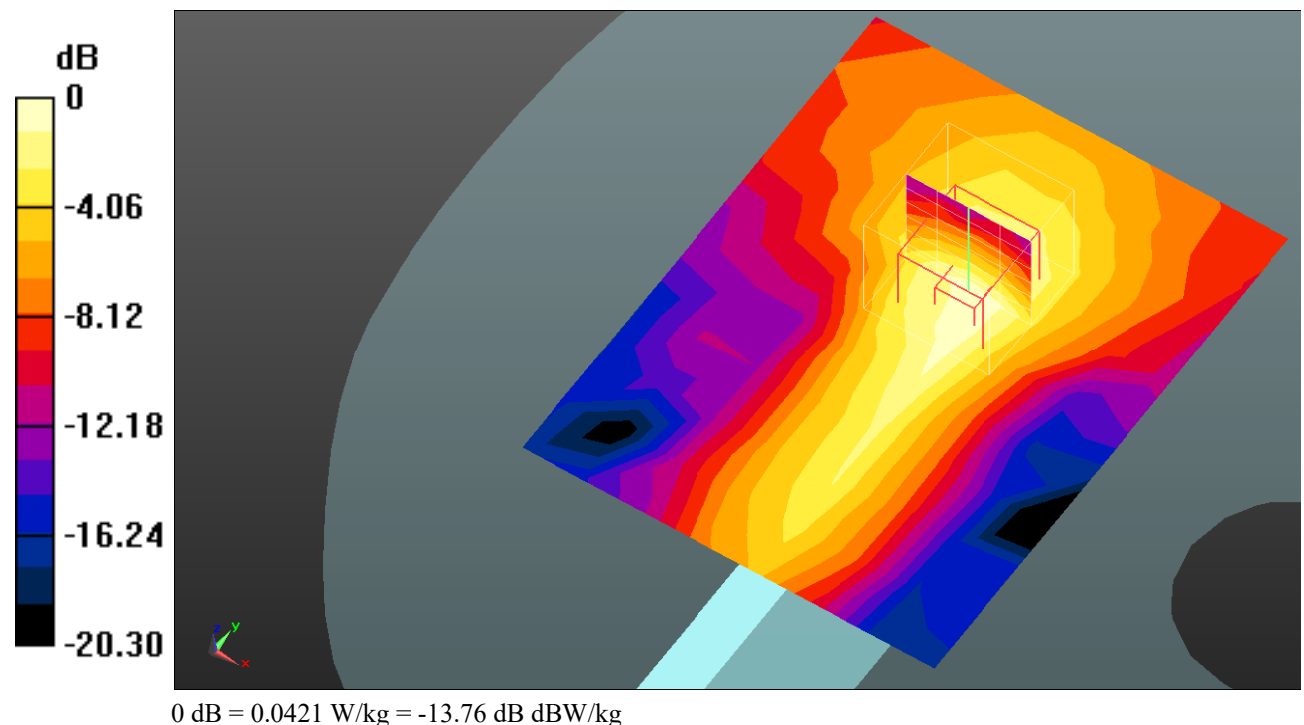

Test Plot 64#: LTE Band 2_Body Top_1RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.405$ S/m; $\epsilon_r = 40.345$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.363 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.89 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.574 W/kg

SAR(1 g) = 0.351 W/kg; SAR(10 g) = 0.186 W/kg

Maximum value of SAR (measured) = 0.390 W/kg

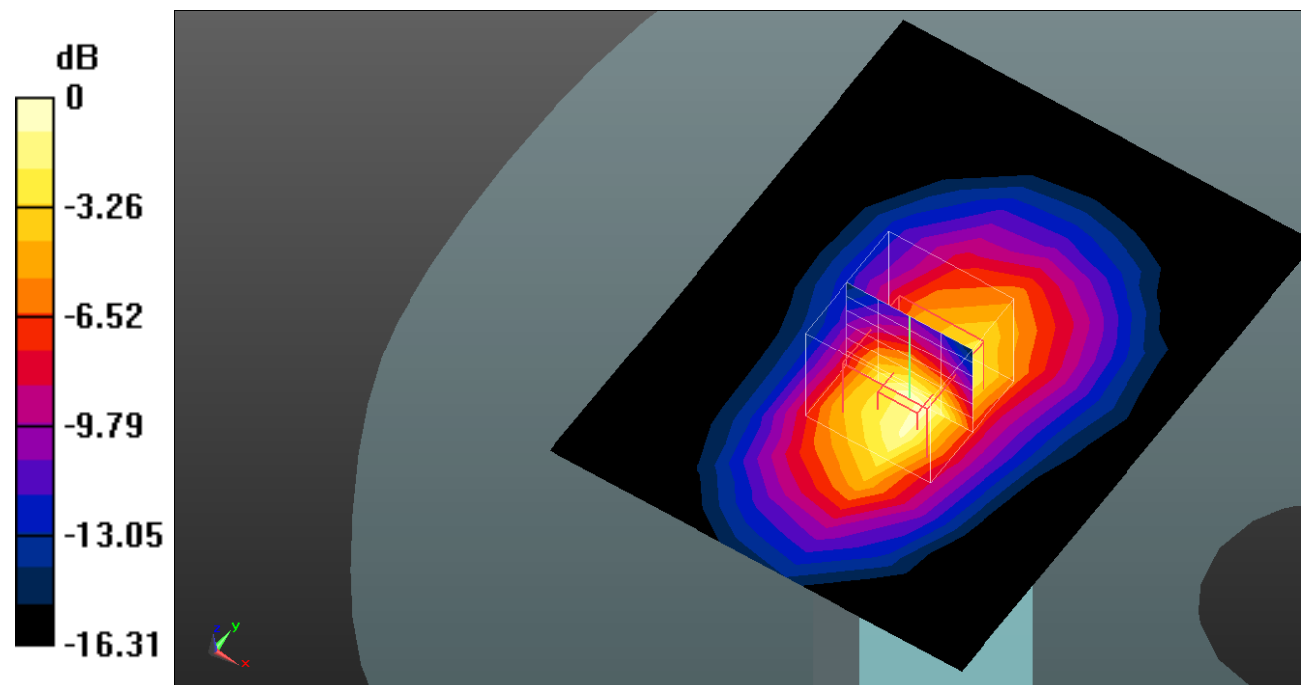

0 dB = 0.390 W/kg = -4.09 dB dBW/kg

Test Plot 65#: LTE Band 2_Body Top_50%RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.405$ S/m; $\epsilon_r = 40.345$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.288 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.91 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.428 W/kg

SAR(1 g) = 0.272 W/kg; SAR(10 g) = 0.145 W/kg

Maximum value of SAR (measured) = 0.313 W/kg

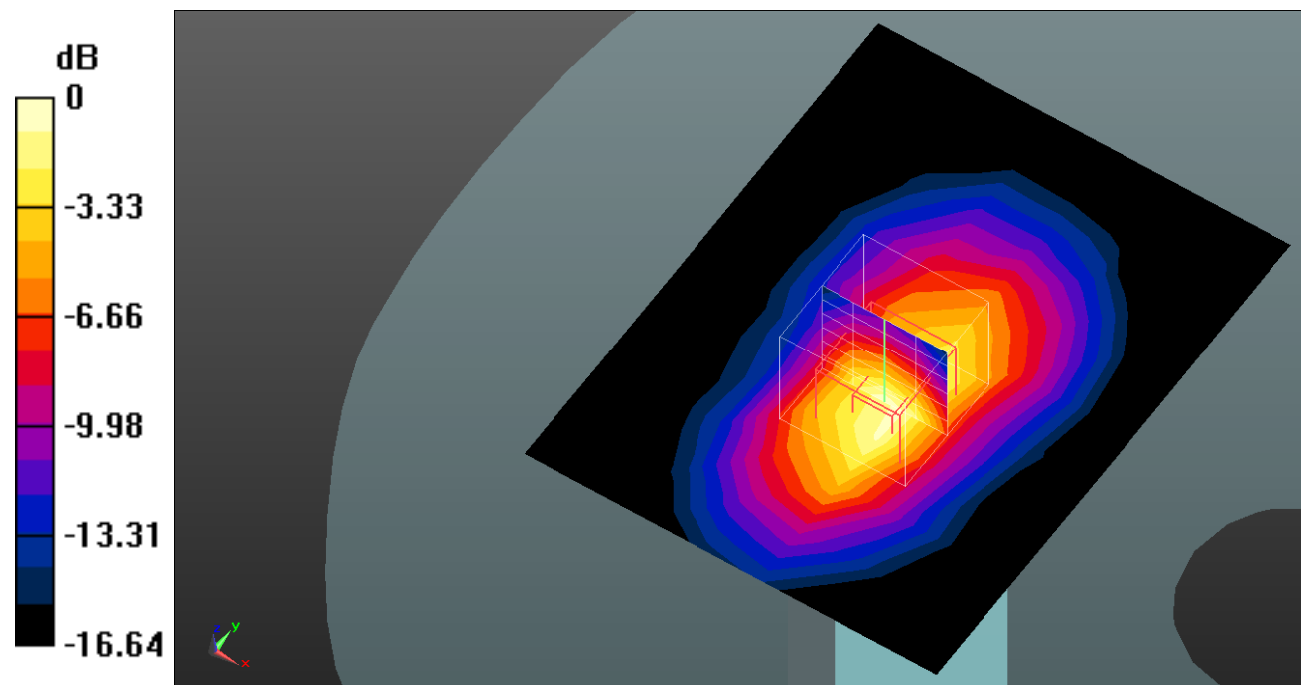

0 dB = 0.313 W/kg = -5.04 dB dBW/kg

Test Plot 66#: LTE Band 5_Head Left Cheek_1RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.938$ S/m; $\epsilon_r = 41.383$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.436 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.39 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.531 W/kg

SAR(1 g) = 0.389 W/kg; SAR(10 g) = 0.285 W/kg

Maximum value of SAR (measured) = 0.399 W/kg

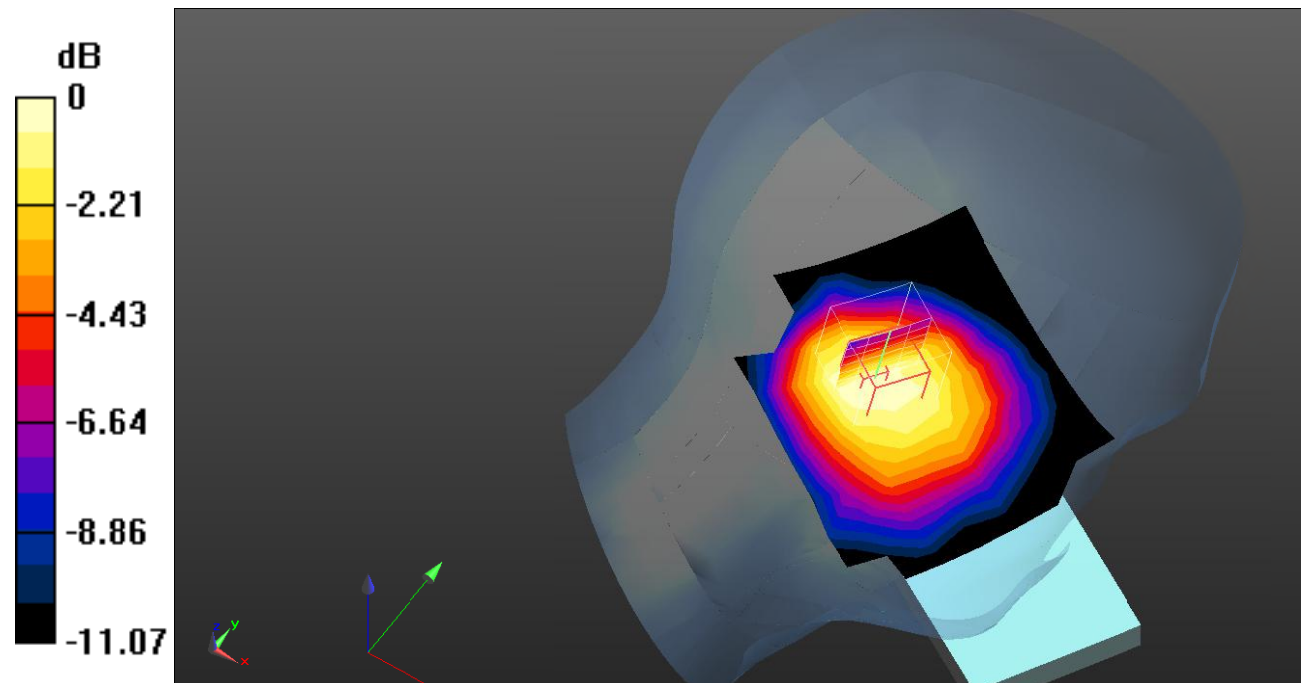

0 dB = 0.399 W/kg = -3.99 dB dBW/kg

Test Plot 67#: LTE Band 5_Head Left Cheek_50%RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.938$ S/m; $\epsilon_r = 41.383$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.325 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.23 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.408 W/kg

SAR(1 g) = 0.307 W/kg; SAR(10 g) = 0.225 W/kg

Maximum value of SAR (measured) = 0.321 W/kg

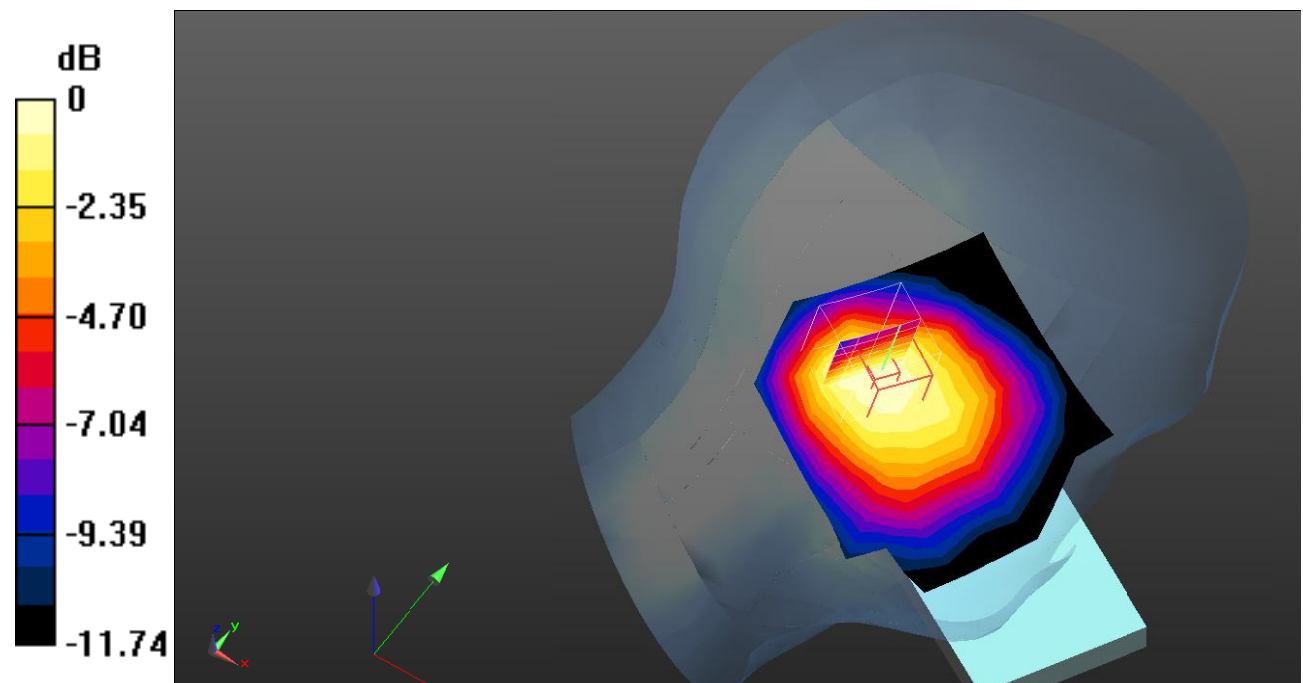

0 dB = 0.321 W/kg = -4.93 dB dBW/kg

Test Plot 68#: LTE Band 5_Head Left Tilt_1RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.938$ S/m; $\epsilon_r = 41.383$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.567 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.56 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.772 W/kg

SAR(1 g) = 0.537 W/kg; SAR(10 g) = 0.356 W/kg

Maximum value of SAR (measured) = 0.558 W/kg

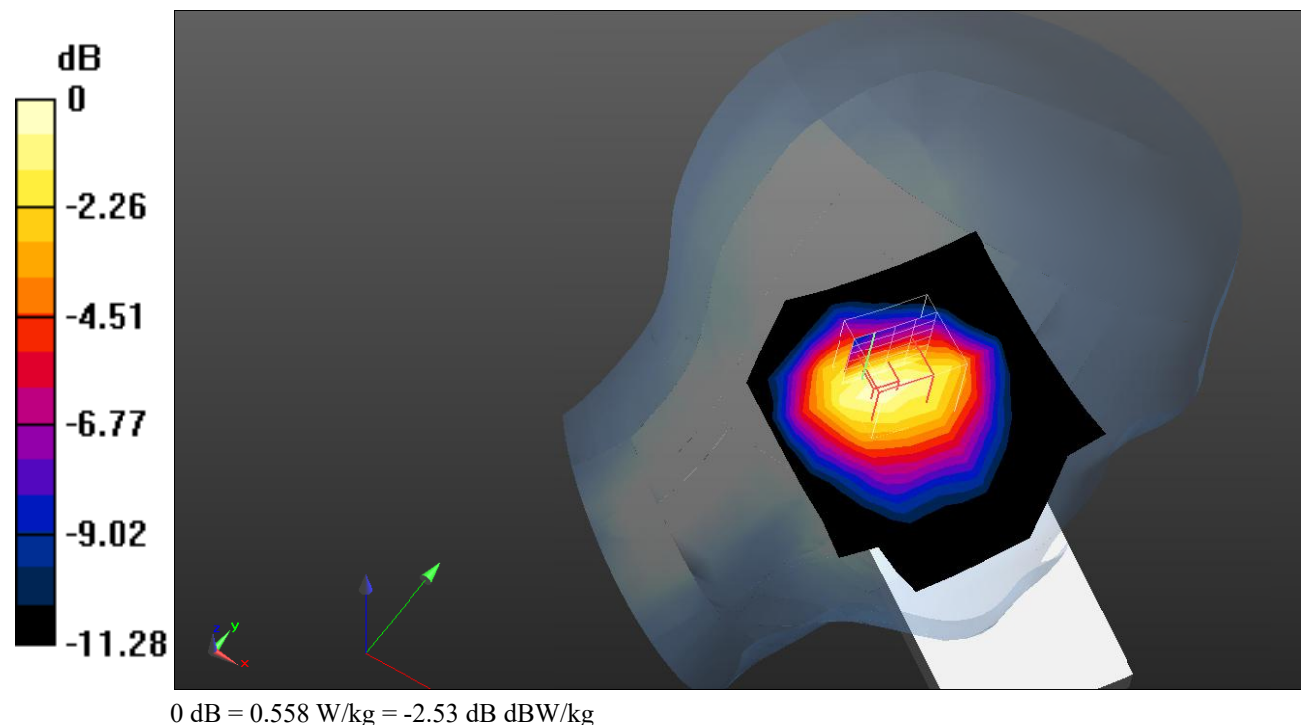

Test Plot 69#: LTE Band 5_Head Left Tilt_50%RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.938$ S/m; $\epsilon_r = 41.383$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.455 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.45 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 0.610 W/kg

SAR(1 g) = 0.424 W/kg; SAR(10 g) = 0.284 W/kg

Maximum value of SAR (measured) = 0.438 W/kg

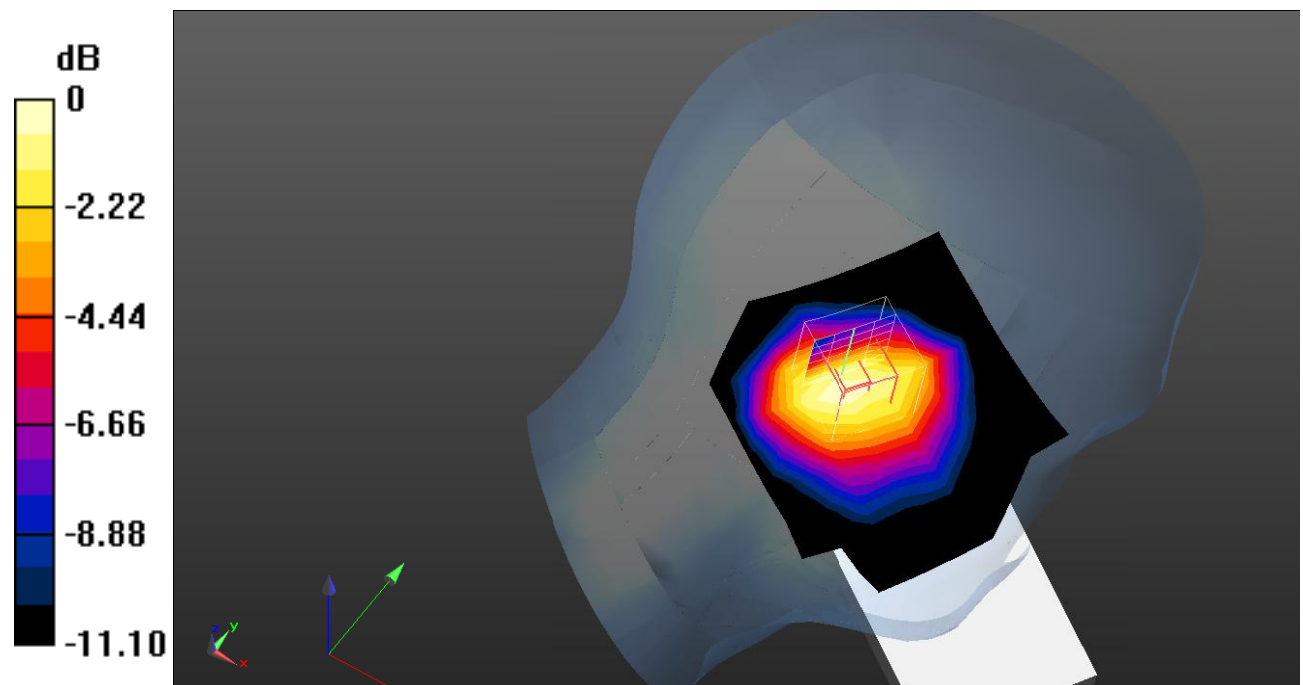

0 dB = 0.438 W/kg = -3.59 dB dBW/kg

Test Plot 70#: LTE Band 5_Head Right Cheek_1RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.938$ S/m; $\epsilon_r = 41.383$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.473 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.71 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.840 W/kg

SAR(1 g) = 0.506 W/kg; SAR(10 g) = 0.319 W/kg

Maximum value of SAR (measured) = 0.522 W/kg

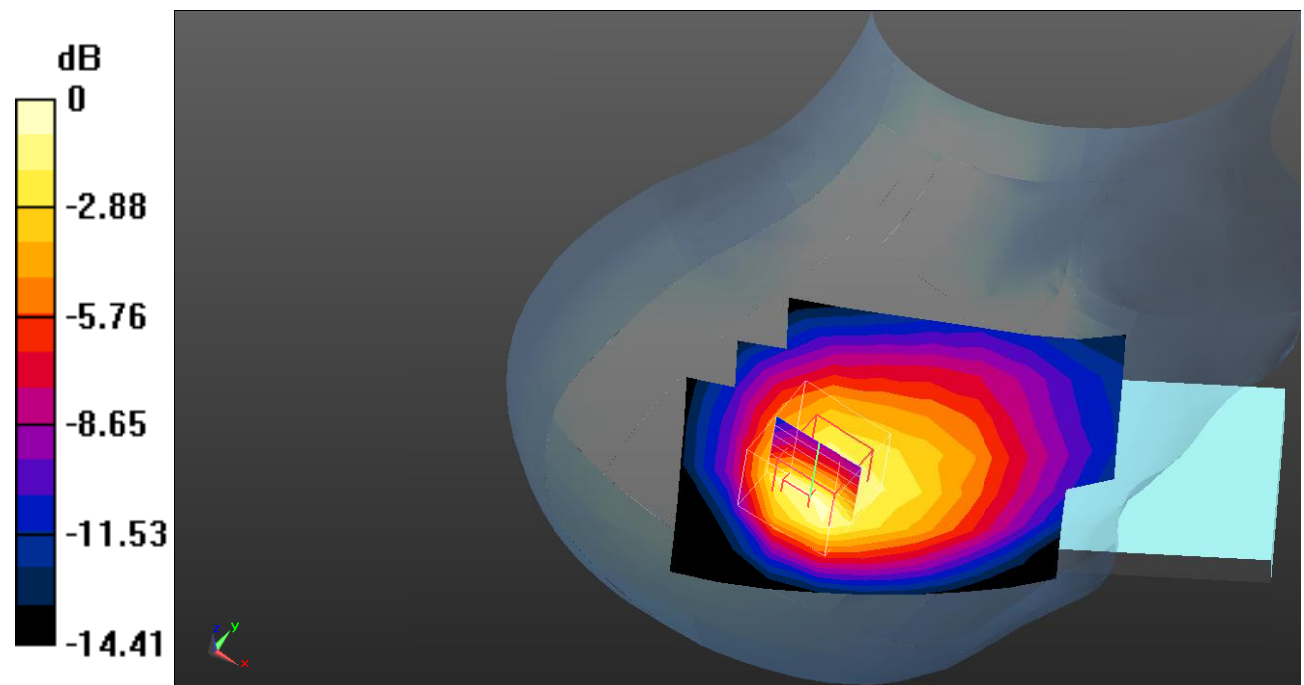

0 dB = 0.522 W/kg = -2.82 dB dBW/kg

Test Plot 71#: LTE Band 5_Head Right Cheek_50%RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.938$ S/m; $\epsilon_r = 41.383$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.400 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.62 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.661 W/kg

SAR(1 g) = 0.403 W/kg; SAR(10 g) = 0.253 W/kg

Maximum value of SAR (measured) = 0.440 W/kg

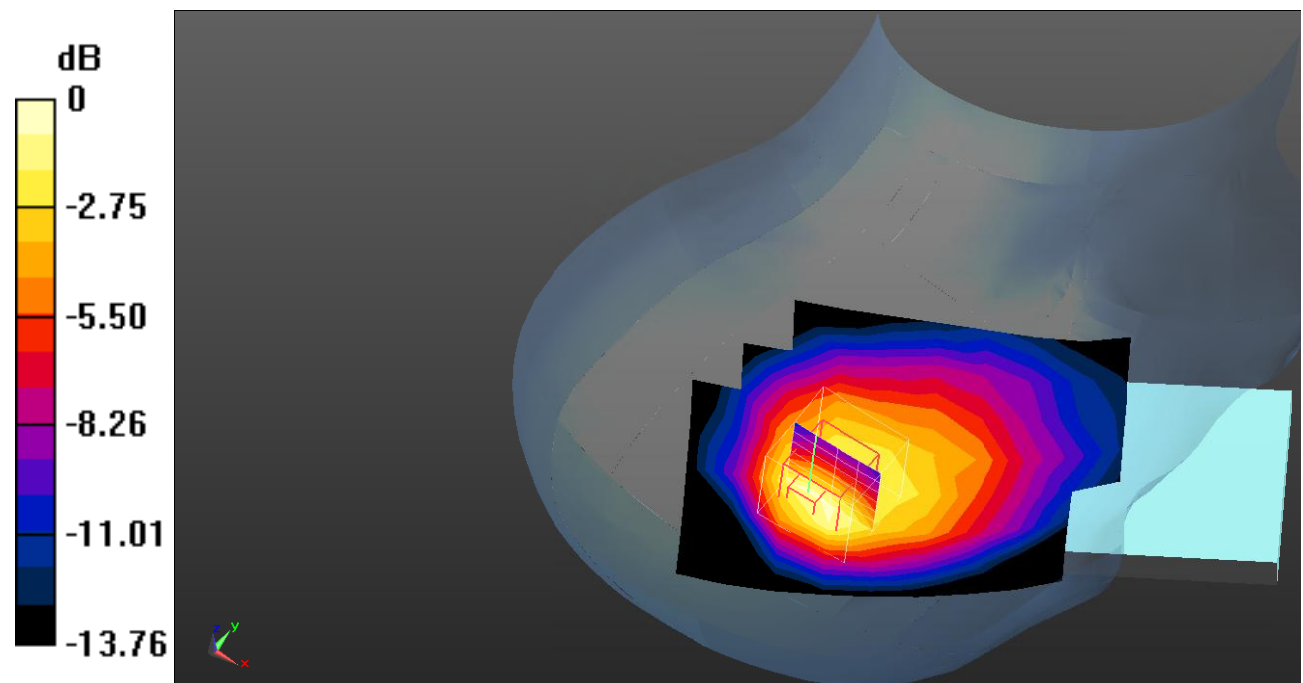

0 dB = 0.440 W/kg = -3.57 dB dBW/kg

Test Plot 72#: LTE Band 5_Head Right Tilt_1RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.938$ S/m; $\epsilon_r = 41.383$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.683 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.38 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.555 W/kg; SAR(10 g) = 0.313 W/kg

Maximum value of SAR (measured) = 0.564 W/kg

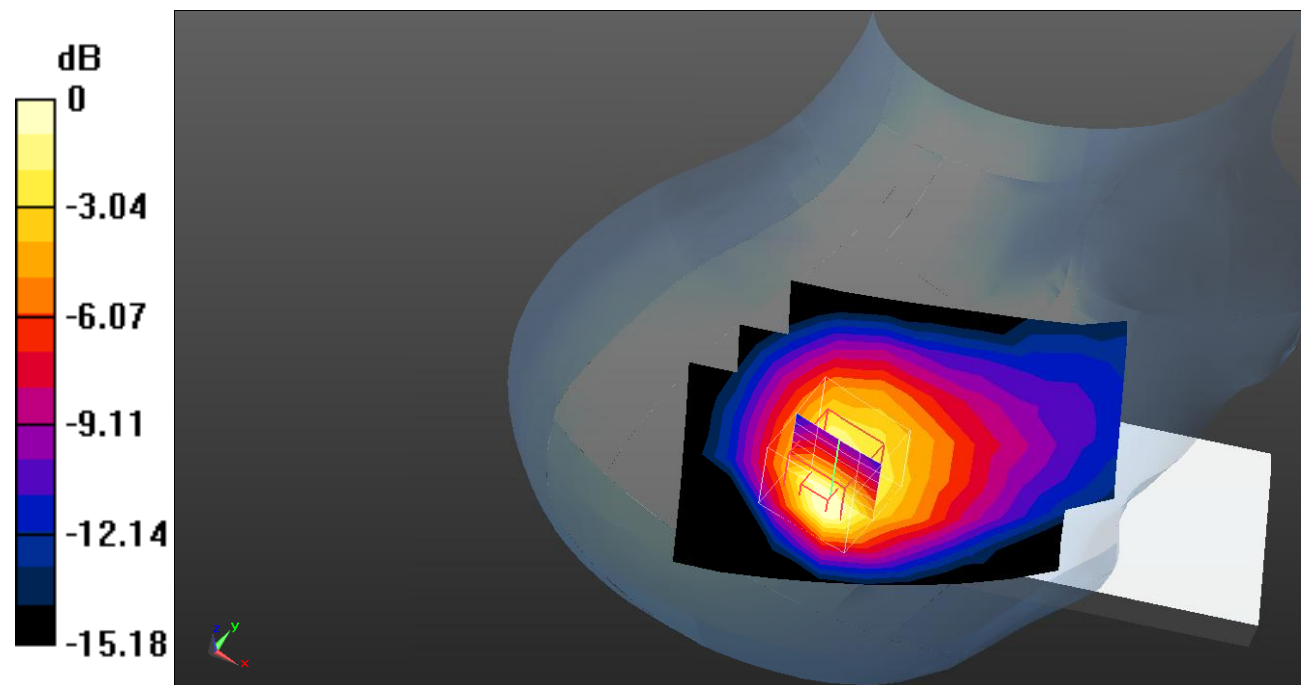

0 dB = 0.564 W/kg = -2.49 dB dBW/kg

Test Plot 73#: LTE Band 5_Head Right Tilt_50%RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.938$ S/m; $\epsilon_r = 41.383$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.436 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.23 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.870 W/kg

SAR(1 g) = 0.446 W/kg; SAR(10 g) = 0.252 W/kg

Maximum value of SAR (measured) = 0.455 W/kg

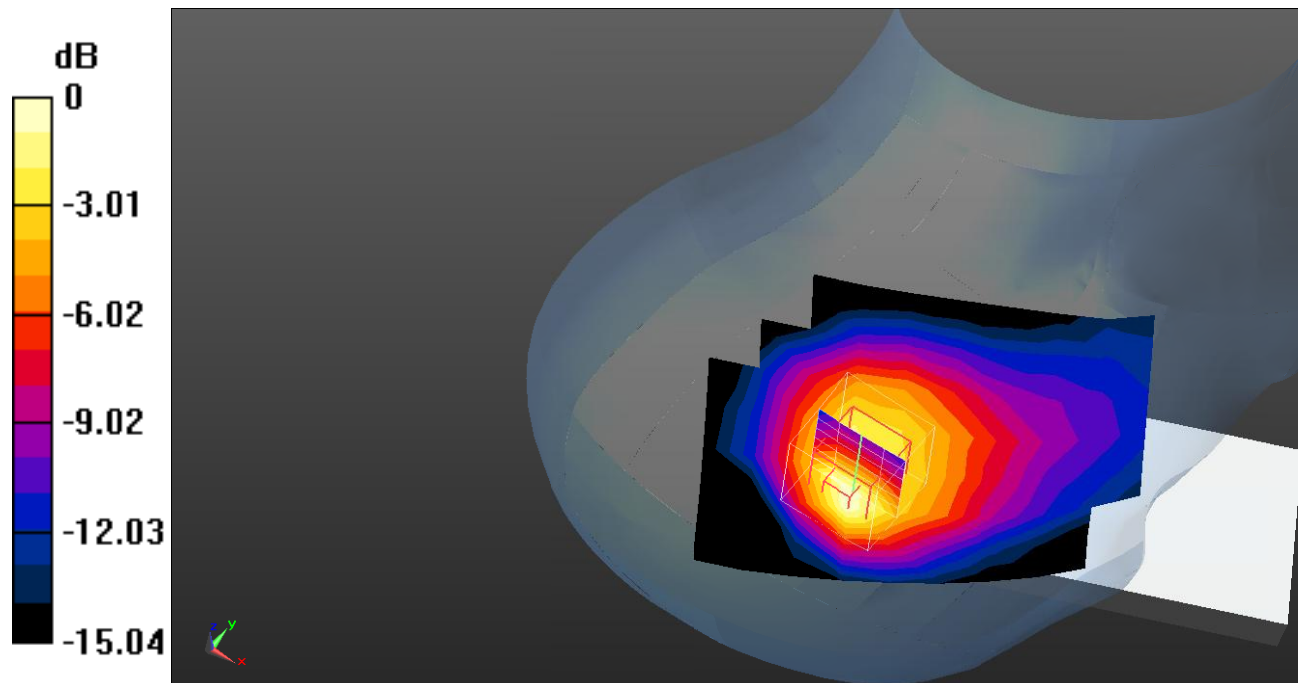

0 dB = 0.455 W/kg = -3.42 dB dBW/kg

Test Plot 74#: LTE Band 5_Body Front_1RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.938$ S/m; $\epsilon_r = 41.383$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.174 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.84 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.235 W/kg

SAR(1 g) = 0.164 W/kg; SAR(10 g) = 0.108 W/kg

Maximum value of SAR (measured) = 0.175 W/kg

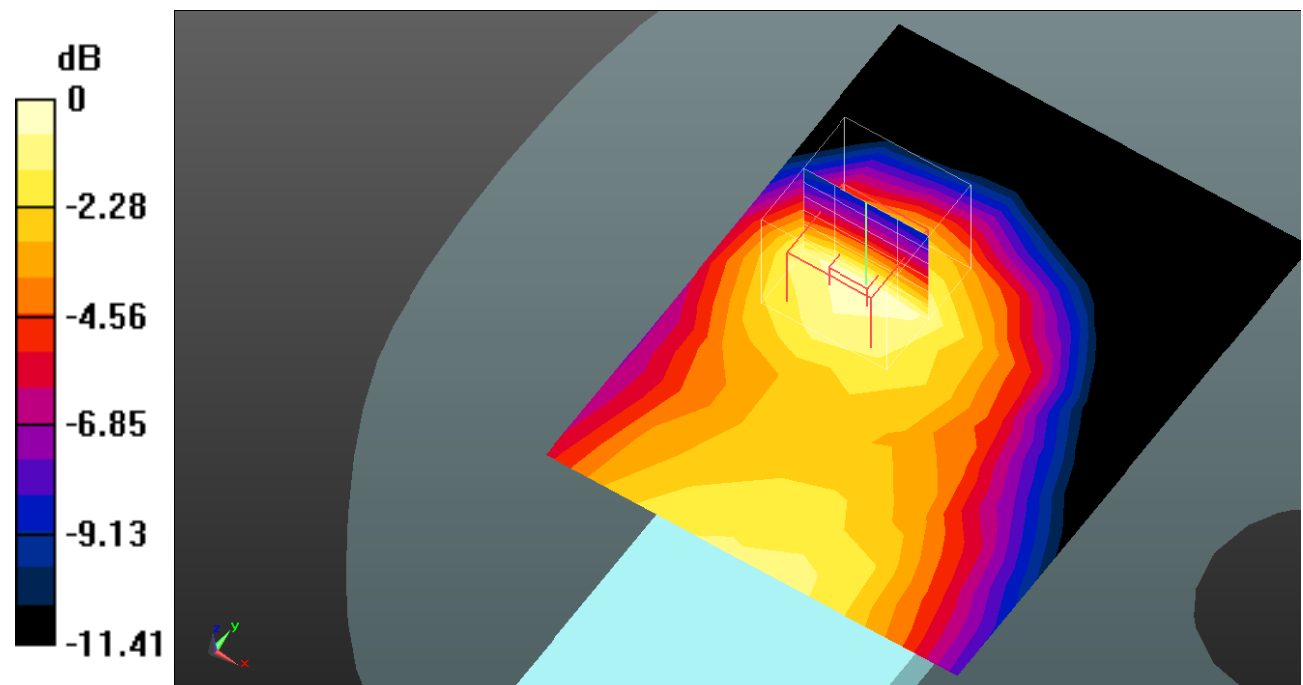

0 dB = 0.175 W/kg = -7.57 dB dBW/kg

Test Plot 75#: LTE Band 5_Body Front_50%RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.938$ S/m; $\epsilon_r = 41.383$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.136 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.306 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.186 W/kg

SAR(1 g) = 0.129 W/kg; SAR(10 g) = 0.085 W/kg

Maximum value of SAR (measured) = 0.138 W/kg

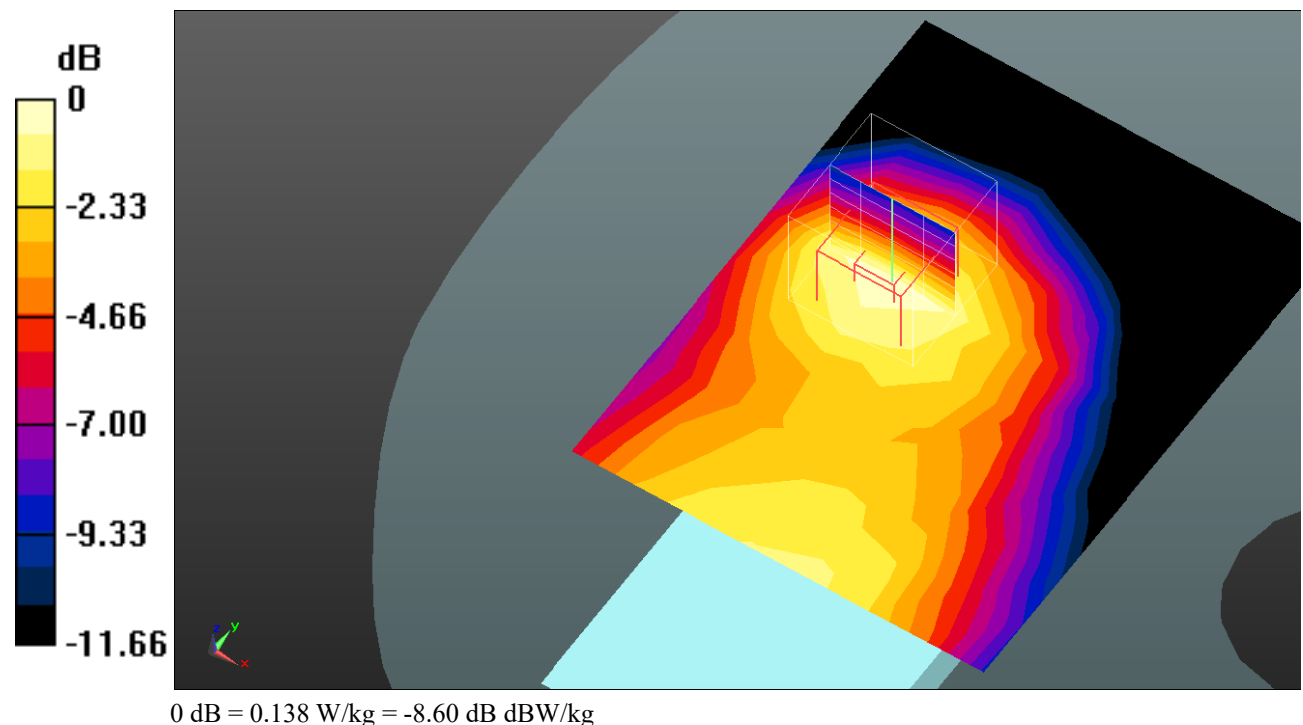

Test Plot 76#: LTE Band 5_Body Back_1RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.938$ S/m; $\epsilon_r = 41.383$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.227 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.50 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.319 W/kg

SAR(1 g) = 0.219 W/kg; SAR(10 g) = 0.142 W/kg

Maximum value of SAR (measured) = 0.234 W/kg

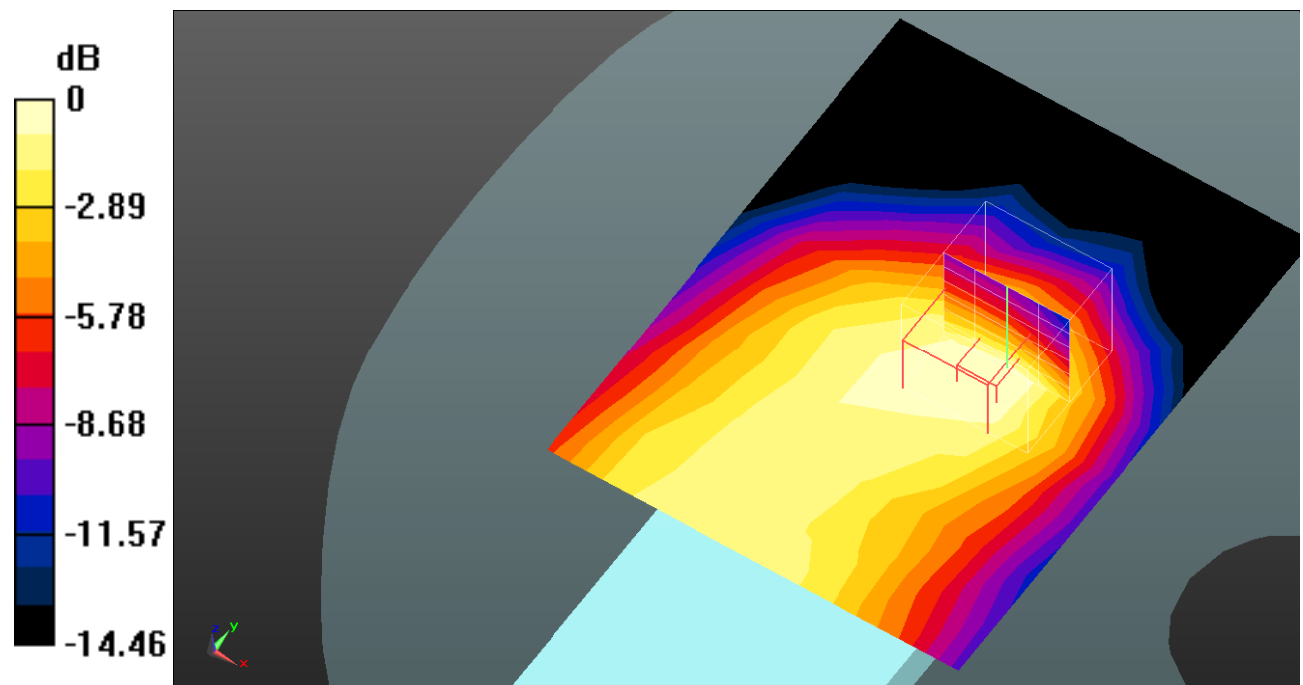

0 dB = 0.234 W/kg = -6.31 dB dBW/kg

Test Plot 77#: LTE Band 5_Body Back_50%RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.938$ S/m; $\epsilon_r = 41.383$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.175 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.53 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.249 W/kg

SAR(1 g) = 0.171 W/kg; SAR(10 g) = 0.111 W/kg

Maximum value of SAR (measured) = 0.182 W/kg

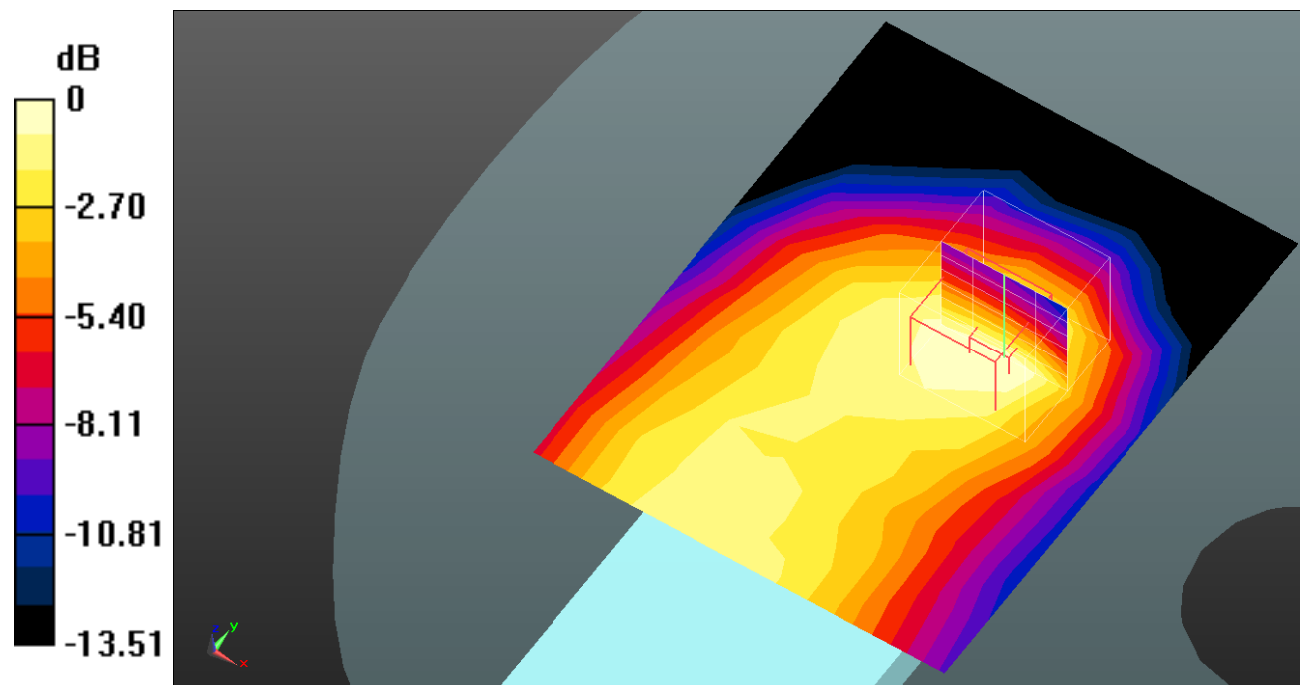

0 dB = 0.182 W/kg = -7.40 dB dBW/kg

Test Plot 78#: LTE Band 5_Body Left_1RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.938$ S/m; $\epsilon_r = 41.383$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.120 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.277 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.142 W/kg

SAR(1 g) = 0.114 W/kg; SAR(10 g) = 0.083 W/kg

Maximum value of SAR (measured) = 0.121 W/kg

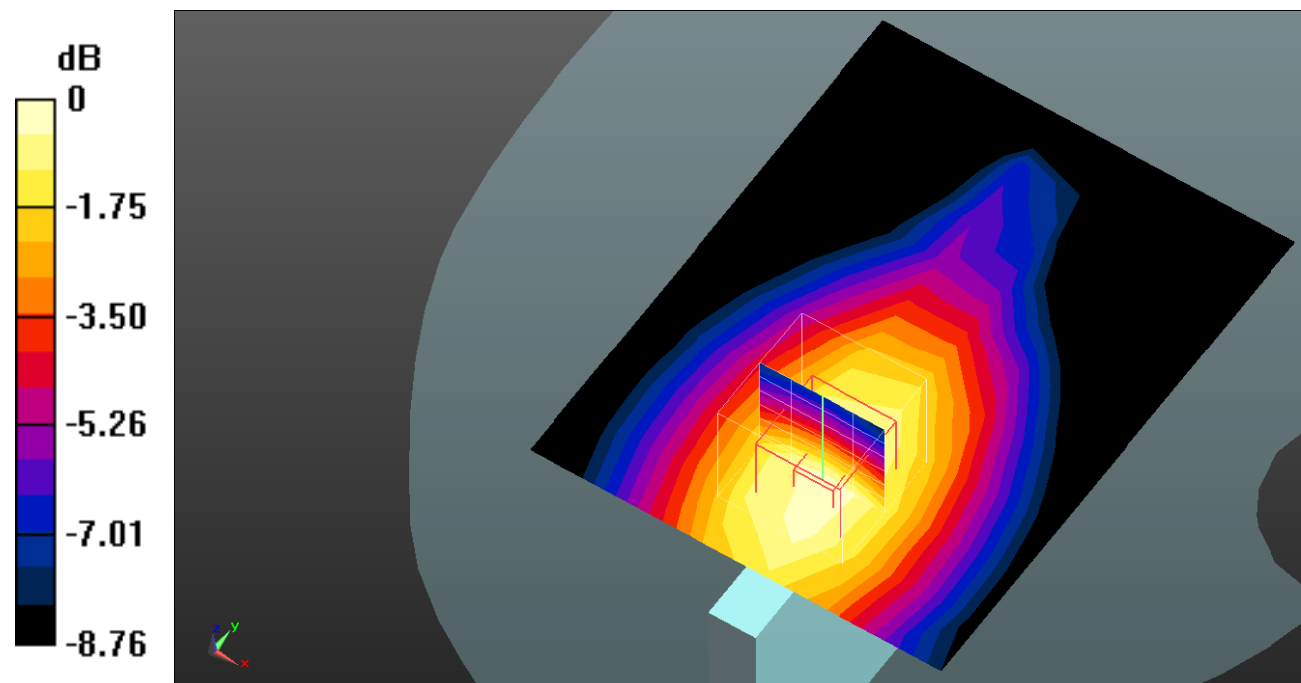

0 dB = 0.121 W/kg = -9.17 dB dBW/kg

Test Plot 79#: LTE Band 5_Body Left_50%RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.938$ S/m; $\epsilon_r = 41.383$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.100 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.656 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.112 W/kg

SAR(1 g) = 0.090 W/kg; SAR(10 g) = 0.066 W/kg

Maximum value of SAR (measured) = 0.0956 W/kg

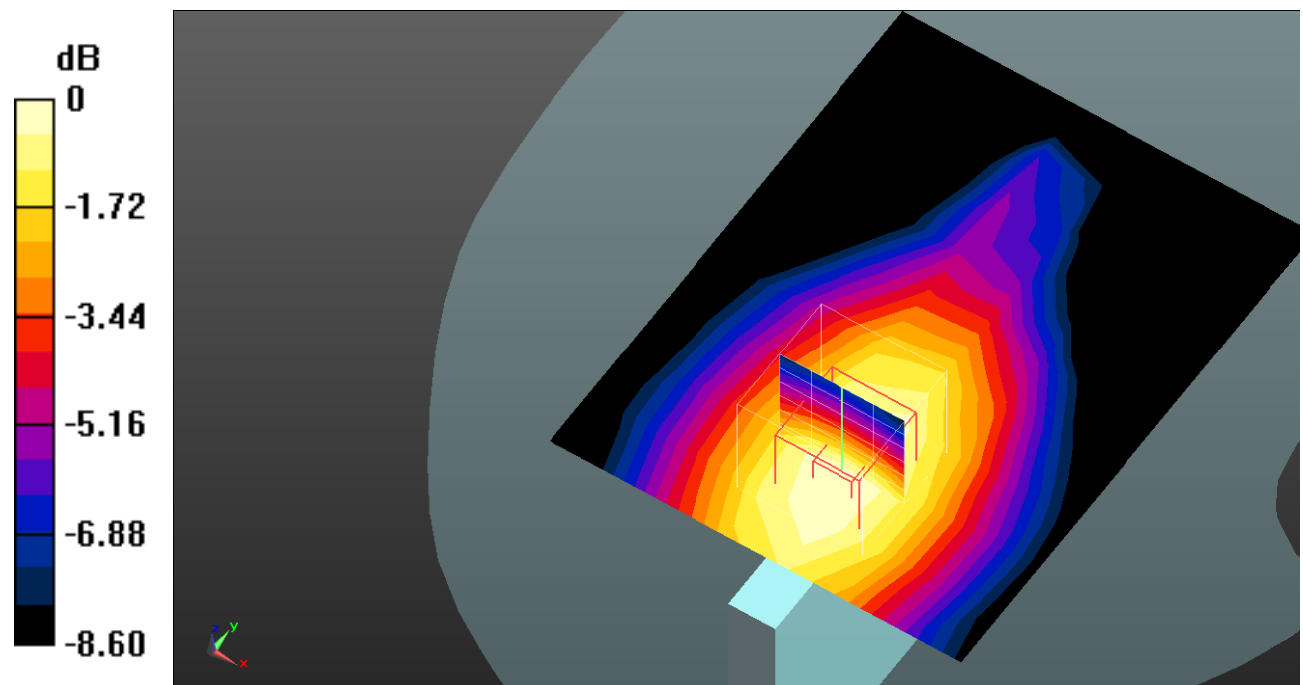

0 dB = 0.0956 W/kg = -10.20 dB dBW/kg

Test Plot 80#: LTE Band 5_Body Top_1RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.938$ S/m; $\epsilon_r = 41.383$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.185 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.89 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.228 W/kg

SAR(1 g) = 0.168 W/kg; SAR(10 g) = 0.112 W/kg

Maximum value of SAR (measured) = 0.179 W/kg

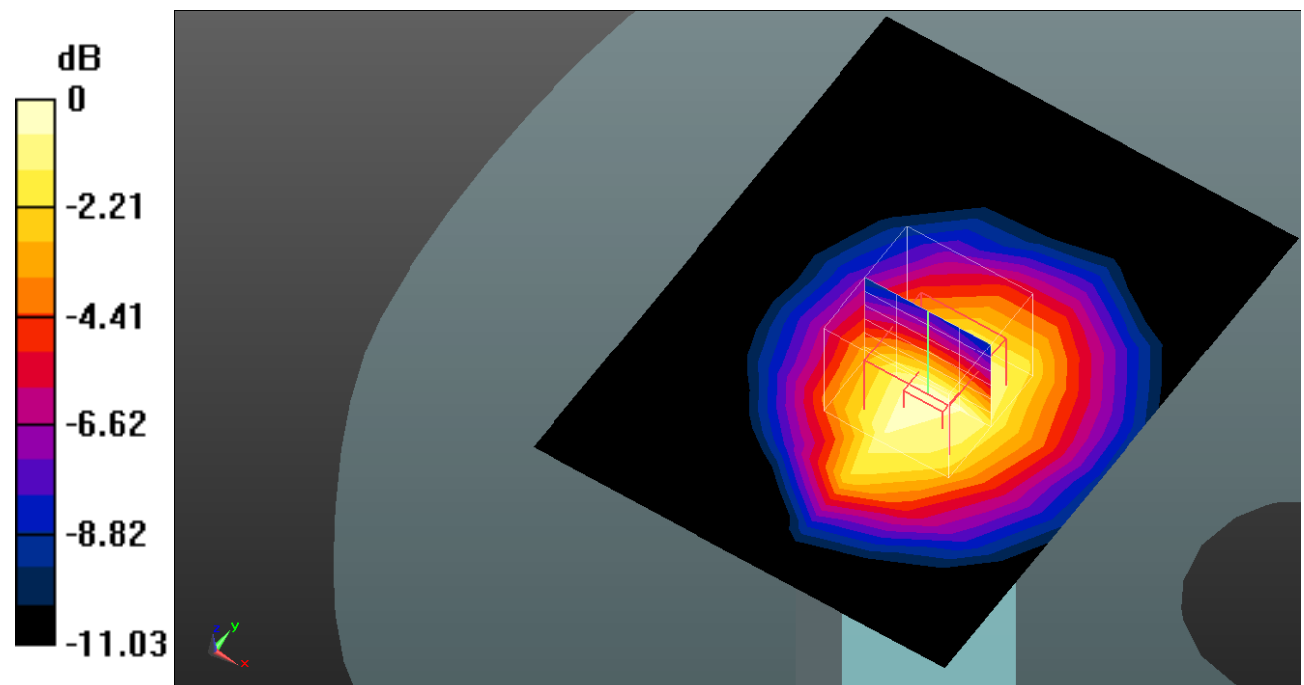

0 dB = 0.179 W/kg = -7.47 dB dBW/kg

Test Plot 81#: LTE Band 5_Body Top_50%RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.938$ S/m; $\epsilon_r = 41.383$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.142 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.28 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.177 W/kg

SAR(1 g) = 0.131 W/kg; SAR(10 g) = 0.087 W/kg

Maximum value of SAR (measured) = 0.140 W/kg

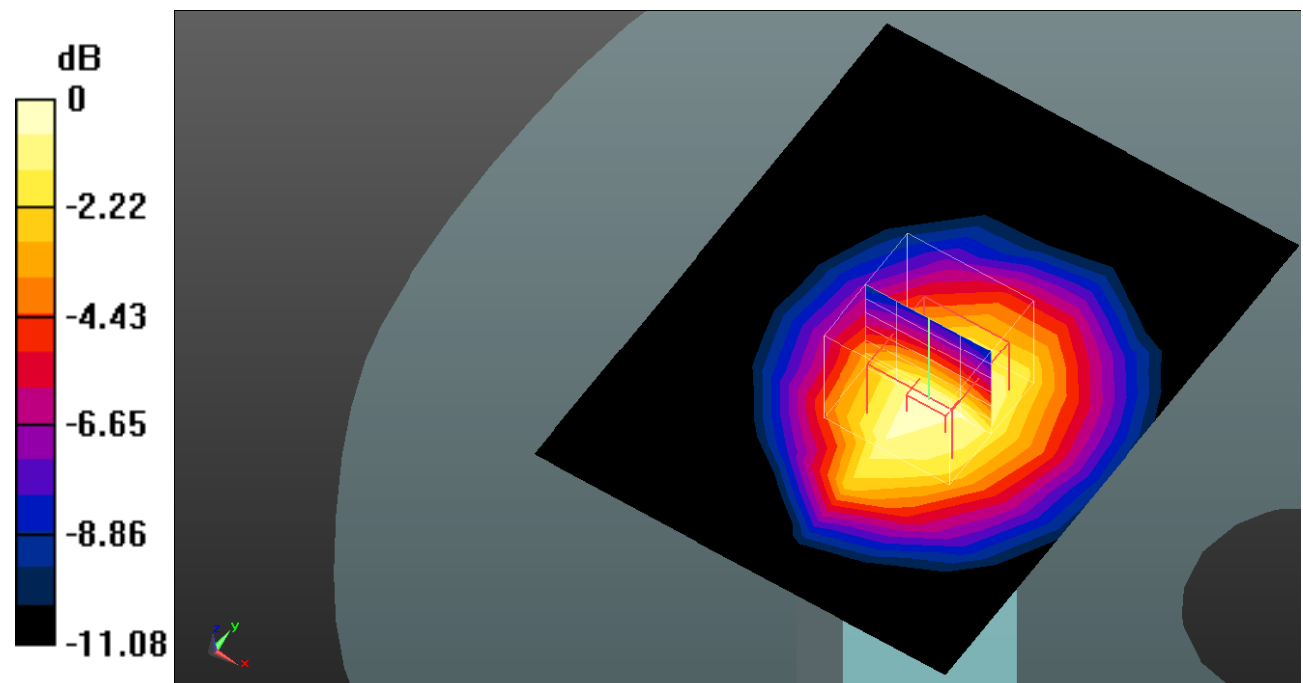

0 dB = 0.140 W/kg = -8.54 dB dBW/kg

Test Plot 82#: LTE Band 7_Head Left Cheek_1RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.921$ S/m; $\epsilon_r = 39.601$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @2535 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.221 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.404 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.389 W/kg

SAR(1 g) = 0.227 W/kg; SAR(10 g) = 0.117 W/kg

Maximum value of SAR (measured) = 0.260 W/kg

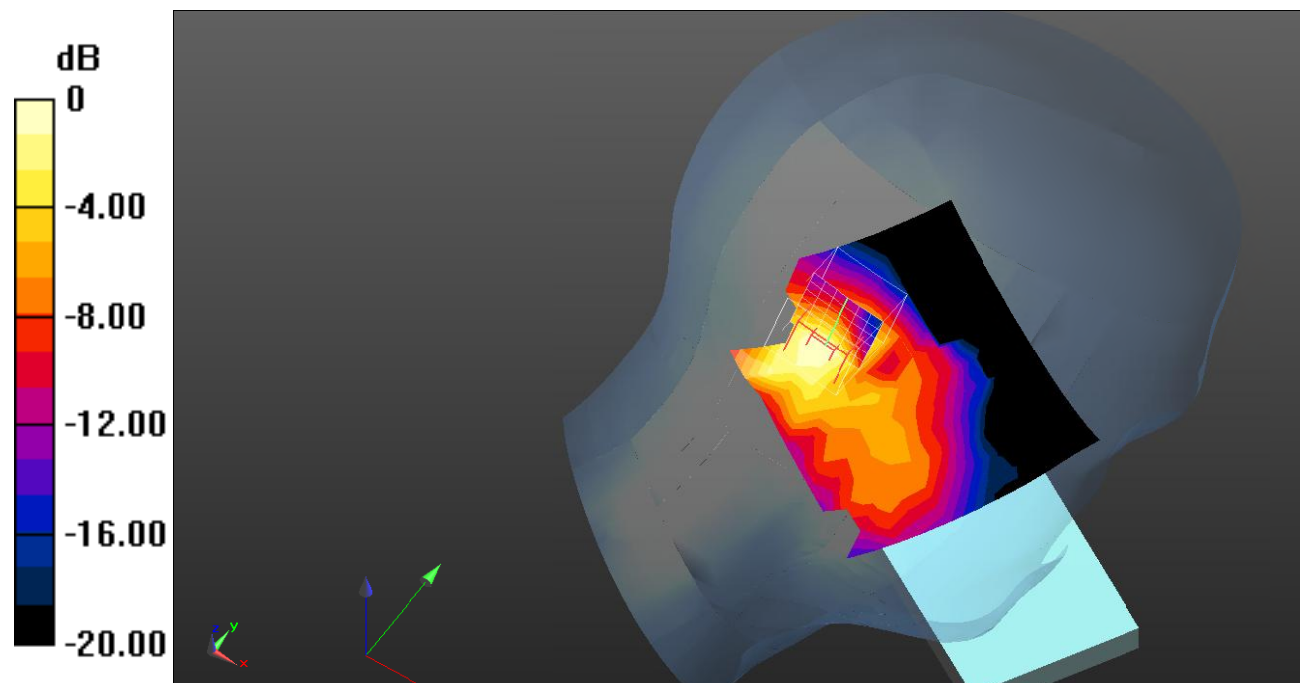

0 dB = 0.260 W/kg = -5.85 dB dBW/kg

Test Plot 83#: LTE Band 7_Head Left Cheek_50%RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.921$ S/m; $\epsilon_r = 39.601$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @2535 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.227 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.847 V/m; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 0.343 W/kg

SAR(1 g) = 0.199 W/kg; SAR(10 g) = 0.103 W/kg

Maximum value of SAR (measured) = 0.224 W/kg

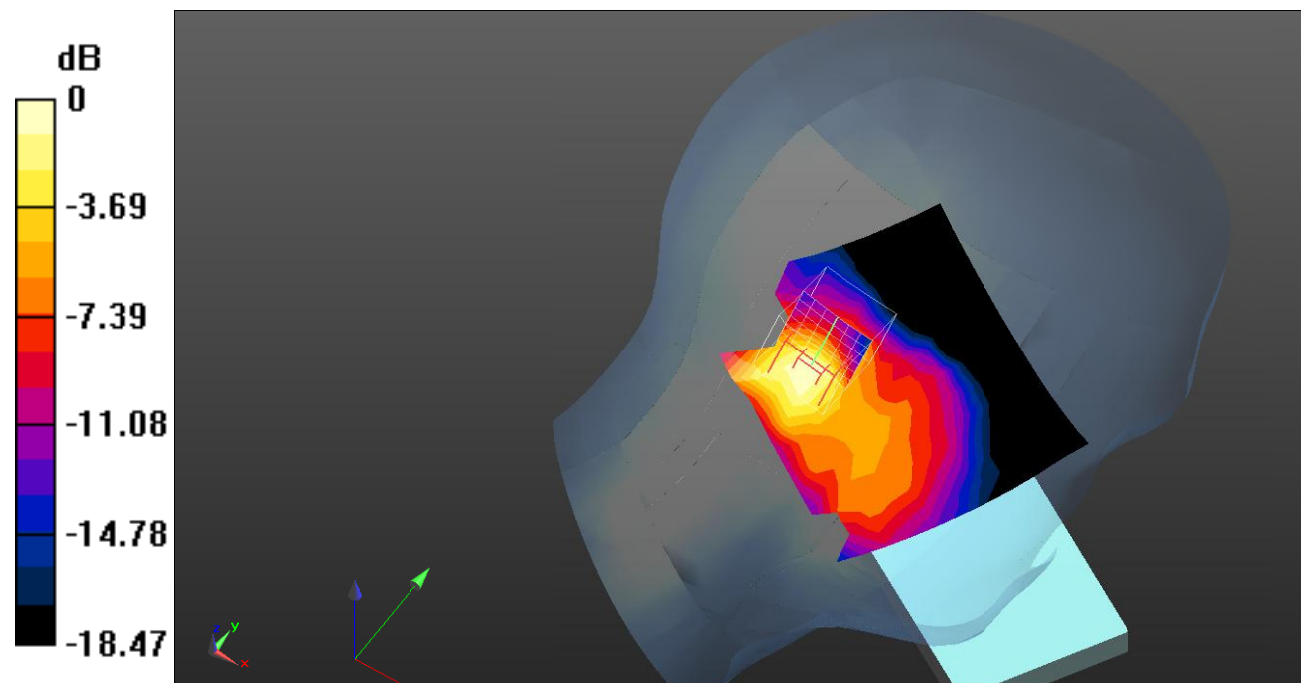

0 dB = 0.224 W/kg = -6.50 dB dBW/kg

Test Plot 84#: LTE Band 7_Head Left Tilt_1RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.921$ S/m; $\epsilon_r = 39.601$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @2535 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.429 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.635 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.696 W/kg

SAR(1 g) = 0.399 W/kg; SAR(10 g) = 0.202 W/kg

Maximum value of SAR (measured) = 0.449 W/kg

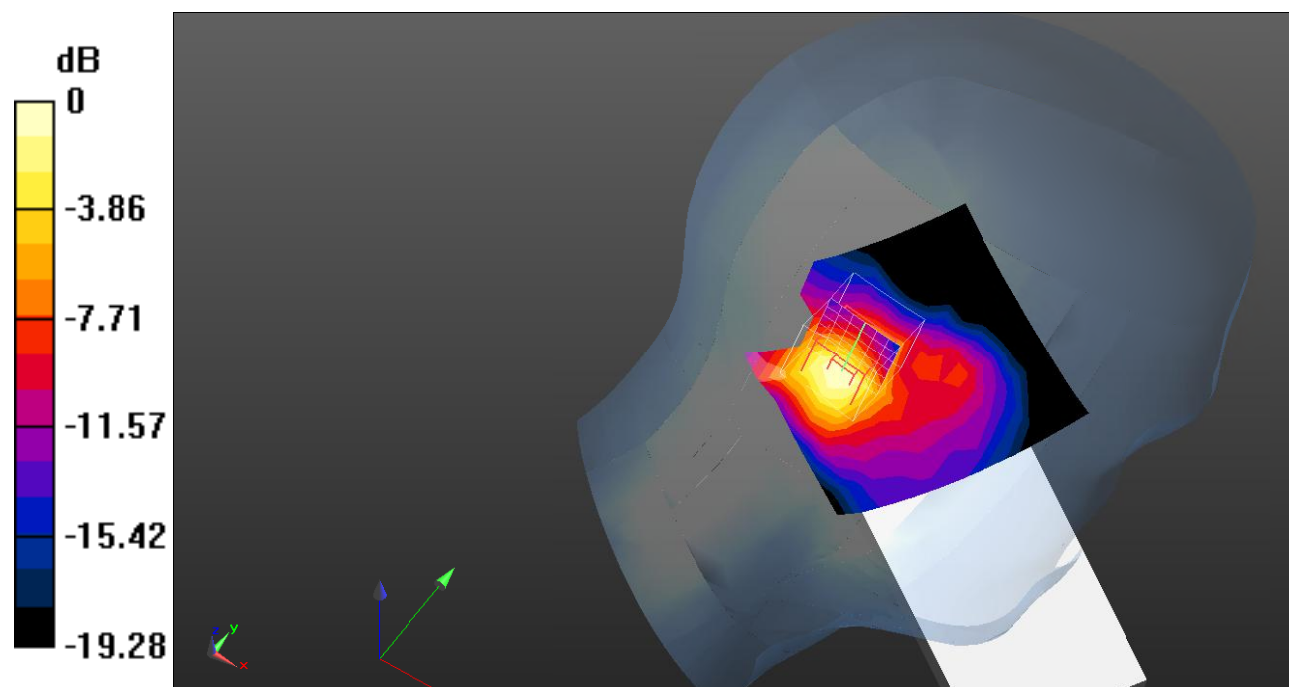

0 dB = 0.449 W/kg = -3.48 dB dBW/kg

Test Plot 85#: LTE Band 7_Head Left Tilt_50%RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.921$ S/m; $\epsilon_r = 39.601$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @2535 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.346 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.132 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.573 W/kg

SAR(1 g) = 0.329 W/kg; SAR(10 g) = 0.166 W/kg

Maximum value of SAR (measured) = 0.372 W/kg

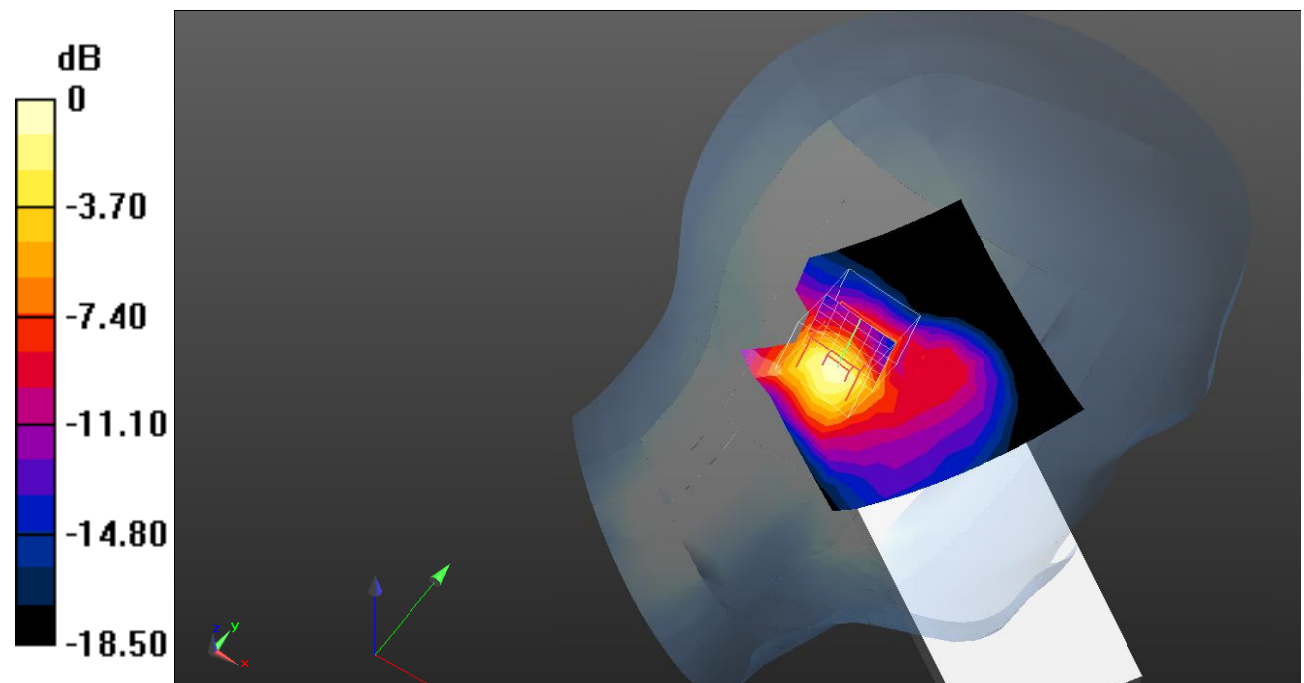

0 dB = 0.372 W/kg = -4.29 dB dBW/kg

Test Plot 86#: LTE Band 7_Head Right Cheek_1RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.921$ S/m; $\epsilon_r = 39.601$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @2535 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.755 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.791 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.692 W/kg; SAR(10 g) = 0.336 W/kg

Maximum value of SAR (measured) = 0.800 W/kg

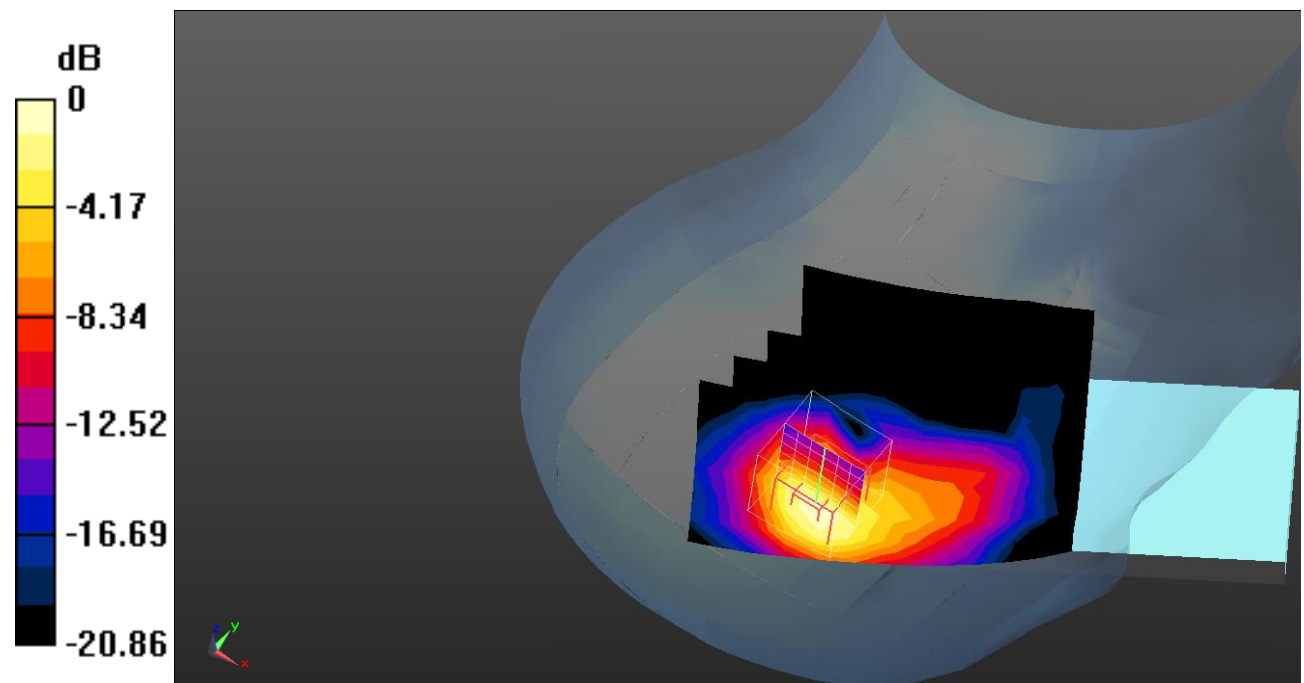

0 dB = 0.800 W/kg = -0.97 dB dBW/kg

Test Plot 87#: LTE Band 7_Head Right Cheek_50%RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.921$ S/m; $\epsilon_r = 39.601$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @2535 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.634 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.684 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.574 W/kg; SAR(10 g) = 0.280 W/kg

Maximum value of SAR (measured) = 0.656 W/kg

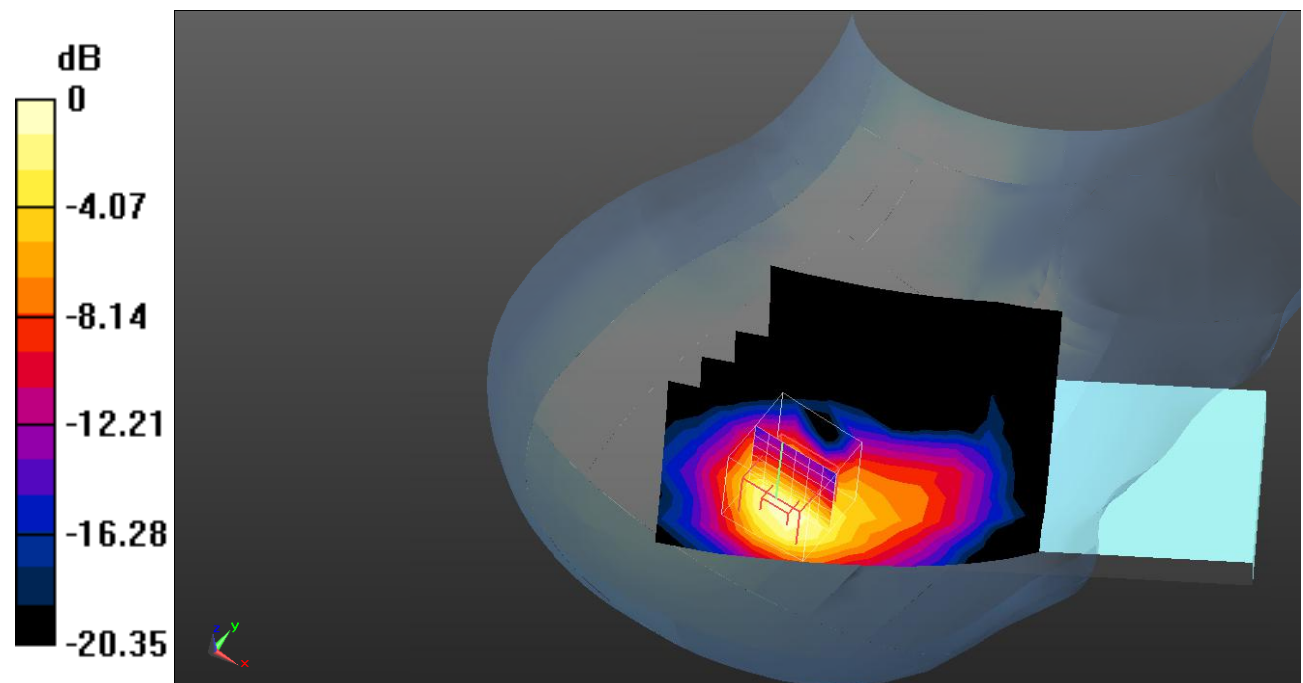

0 dB = 0.656 W/kg = -1.83 dB dBW/kg

Test Plot 88#: LTE Band 7_Head Right Tilt_1RB_Low**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 2510 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2510$ MHz; $\sigma = 1.882$ S/m; $\epsilon_r = 39.686$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @2510 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.12 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.365 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.92 W/kg

SAR(1 g) = 0.921 W/kg; SAR(10 g) = 0.412 W/kg

Maximum value of SAR (measured) = 1.07 W/kg

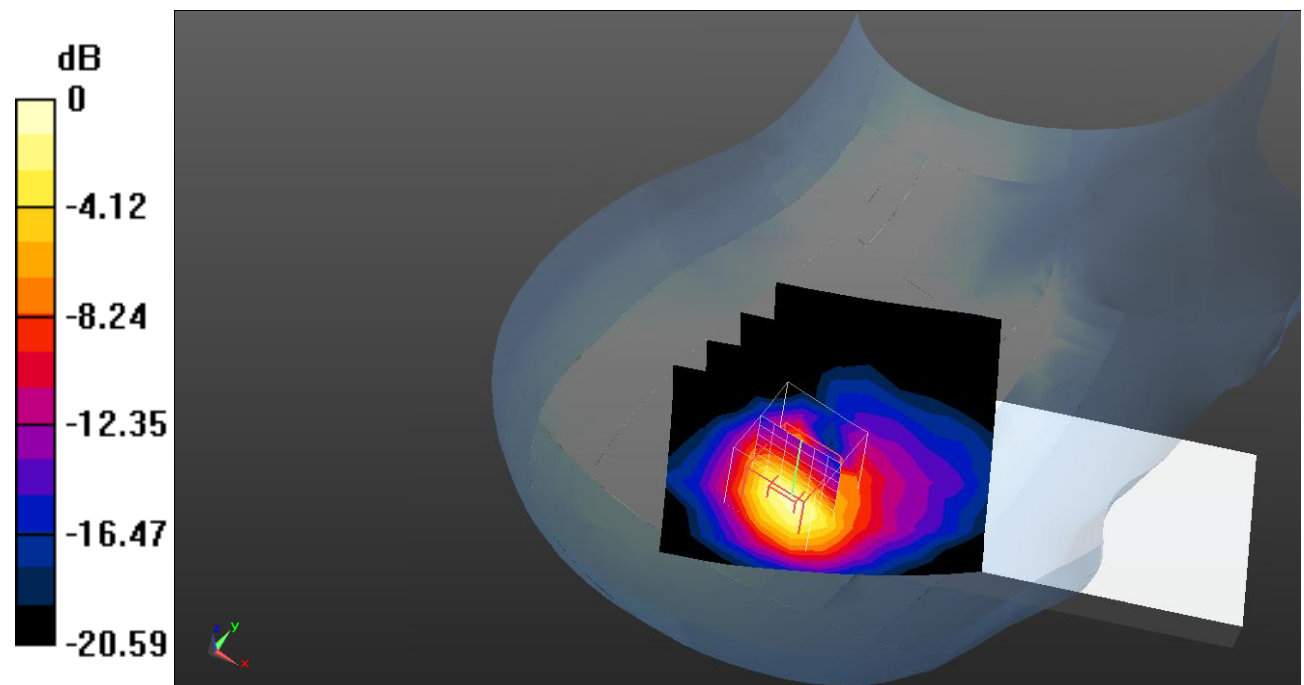

0 dB = 1.07 W/kg = 0.29 dB dBW/kg

Test Plot 89#: LTE Band 7_Head Right Tilt_1RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.921$ S/m; $\epsilon_r = 39.601$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @2535 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.03 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.806 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.76 W/kg

SAR(1 g) = 0.861 W/kg; SAR(10 g) = 0.390 W/kg

Maximum value of SAR (measured) = 1.01 W/kg

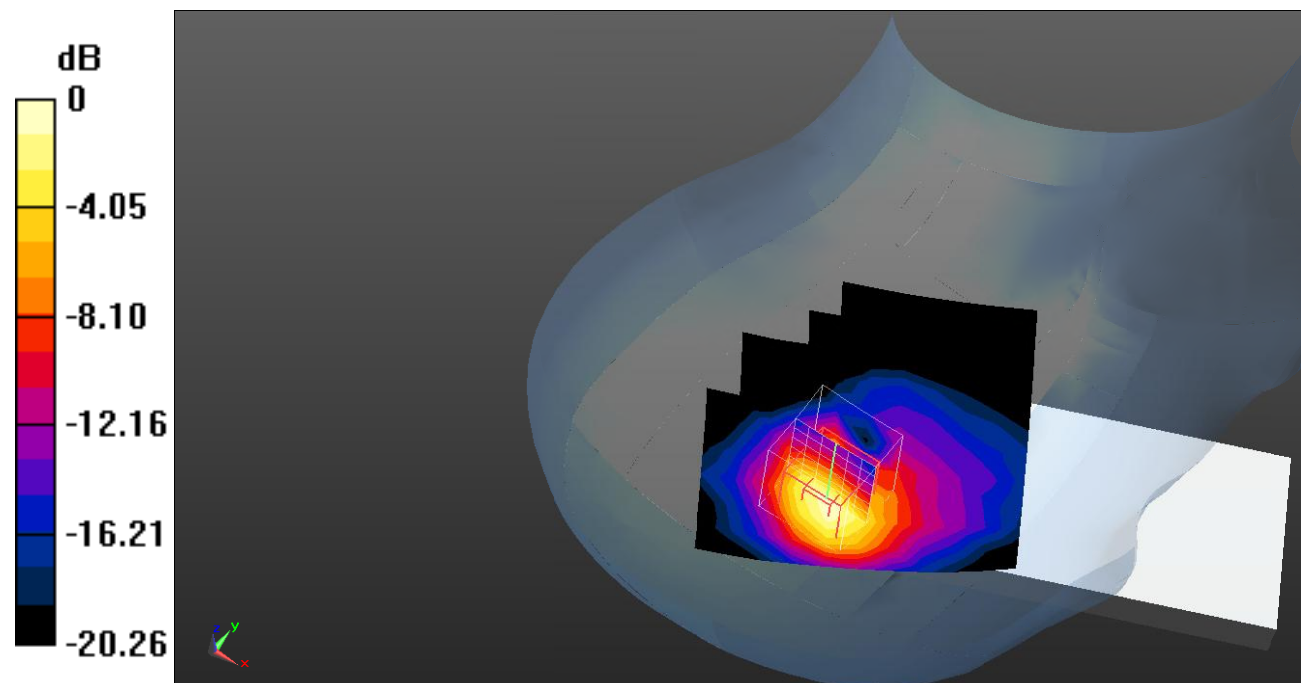

0 dB = 1.01 W/kg = 0.04 dB dBW/kg

Test Plot 90#: LTE Band 7_Head Right Tilt_1RB_High**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 2560 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2560$ MHz; $\sigma = 1.933$ S/m; $\epsilon_r = 39.526$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.3, 7.3, 7.3) @2560 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.979 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.3070 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.66 W/kg

SAR(1 g) = 0.795 W/kg; SAR(10 g) = 0.360 W/kg

Maximum value of SAR (measured) = 0.934 W/kg

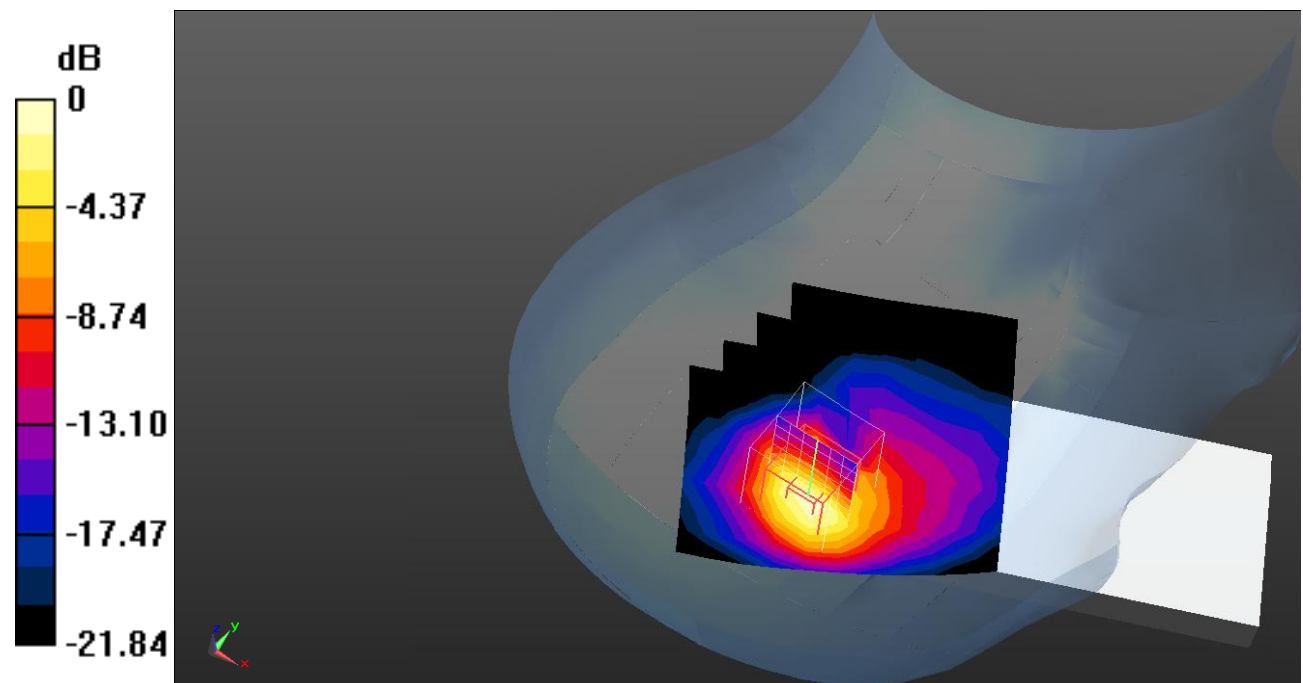

0 dB = 0.934 W/kg = -0.30 dB dBW/kg

Test Plot 91#: LTE Band 7_Head Right Tilt_50%RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.921$ S/m; $\epsilon_r = 39.601$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @2535 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.836 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.699 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.706 W/kg; SAR(10 g) = 0.320 W/kg

Maximum value of SAR (measured) = 0.833 W/kg

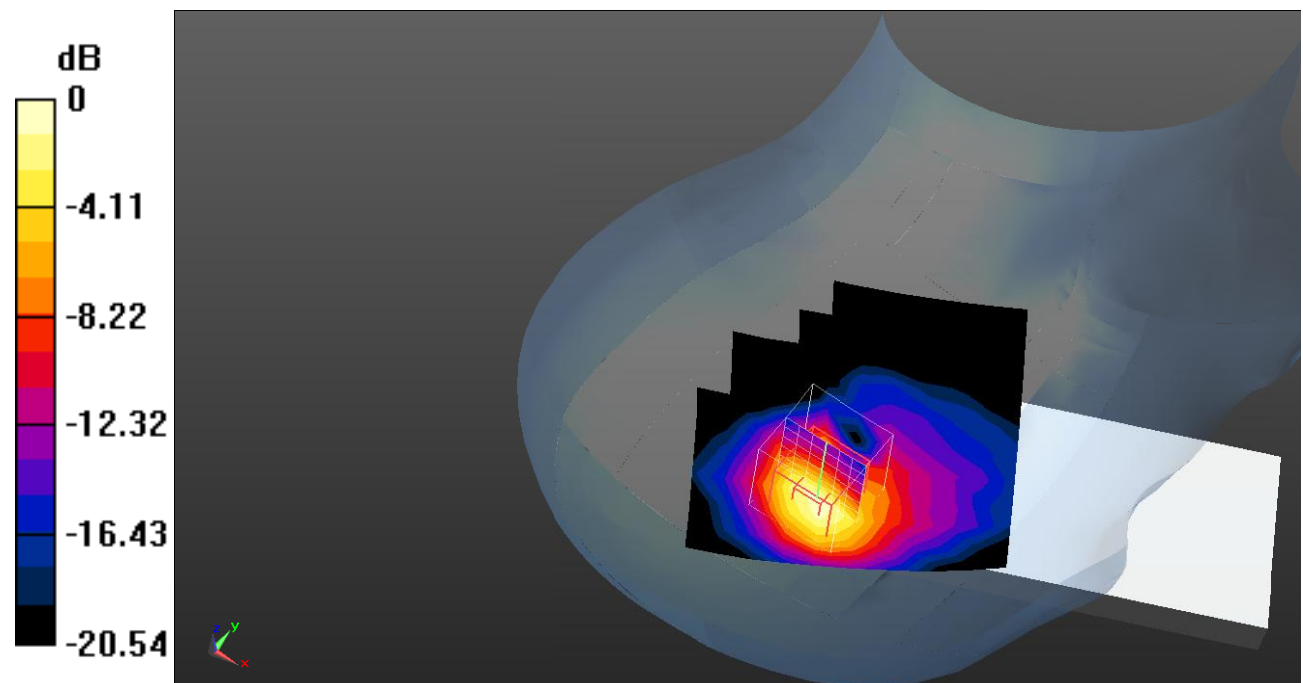

0 dB = 0.833 W/kg = -0.79 dB dBW/kg

Test Plot 92#: LTE Band 7_Head Right Tilt_100%RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.921$ S/m; $\epsilon_r = 39.601$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @2535 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.902 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.640 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 0.741 W/kg; SAR(10 g) = 0.325 W/kg

Maximum value of SAR (measured) = 0.845 W/kg

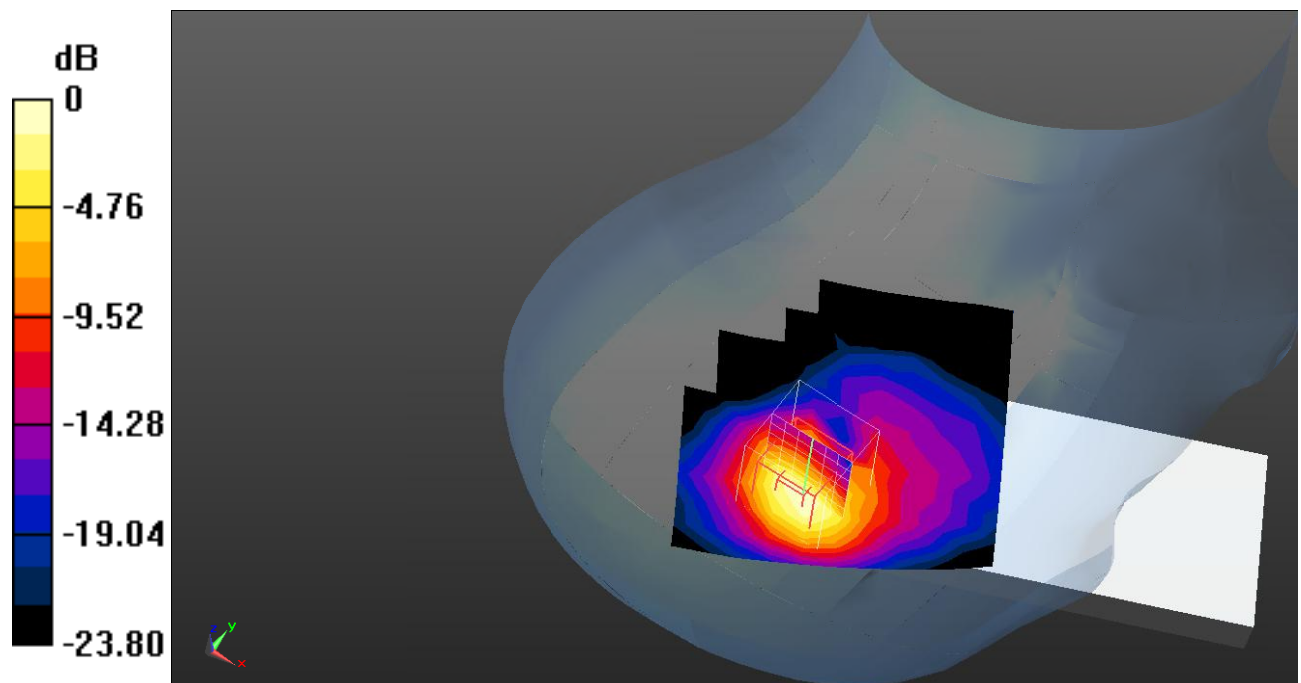

0 dB = 0.845 W/kg = -0.73 dB dBW/kg

Test Plot 93#: LTE Band 7_Body Front_1RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.921$ S/m; $\epsilon_r = 39.601$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @2535 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.232 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.508 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.385 W/kg

SAR(1 g) = 0.207 W/kg; SAR(10 g) = 0.105 W/kg

Maximum value of SAR (measured) = 0.235 W/kg

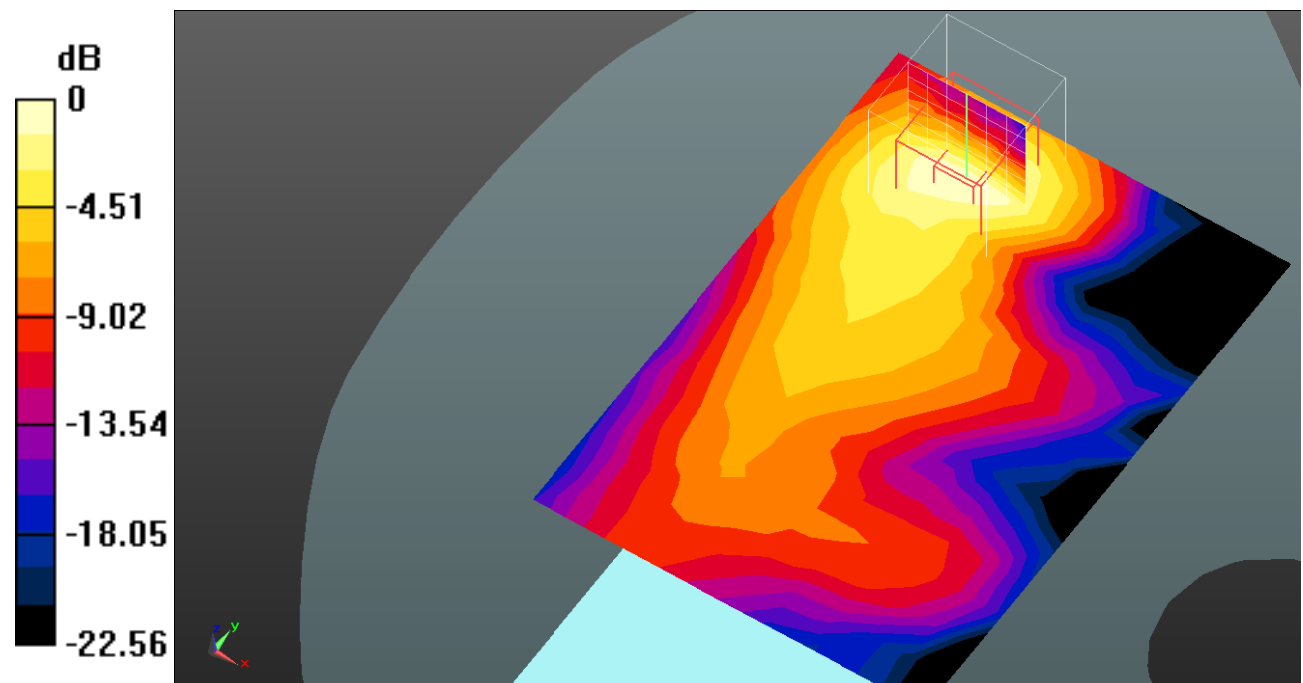

0 dB = 0.235 W/kg = -6.29 dB dBW/kg

Test Plot 94#: LTE Band 7_Body Front_50%RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.921$ S/m; $\epsilon_r = 39.601$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @2535 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.190 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.117 V/m; Power Drift = 0 dB

Peak SAR (extrapolated) = 0.282 W/kg

SAR(1 g) = 0.158 W/kg; SAR(10 g) = 0.083 W/kg

Maximum value of SAR (measured) = 0.175 W/kg

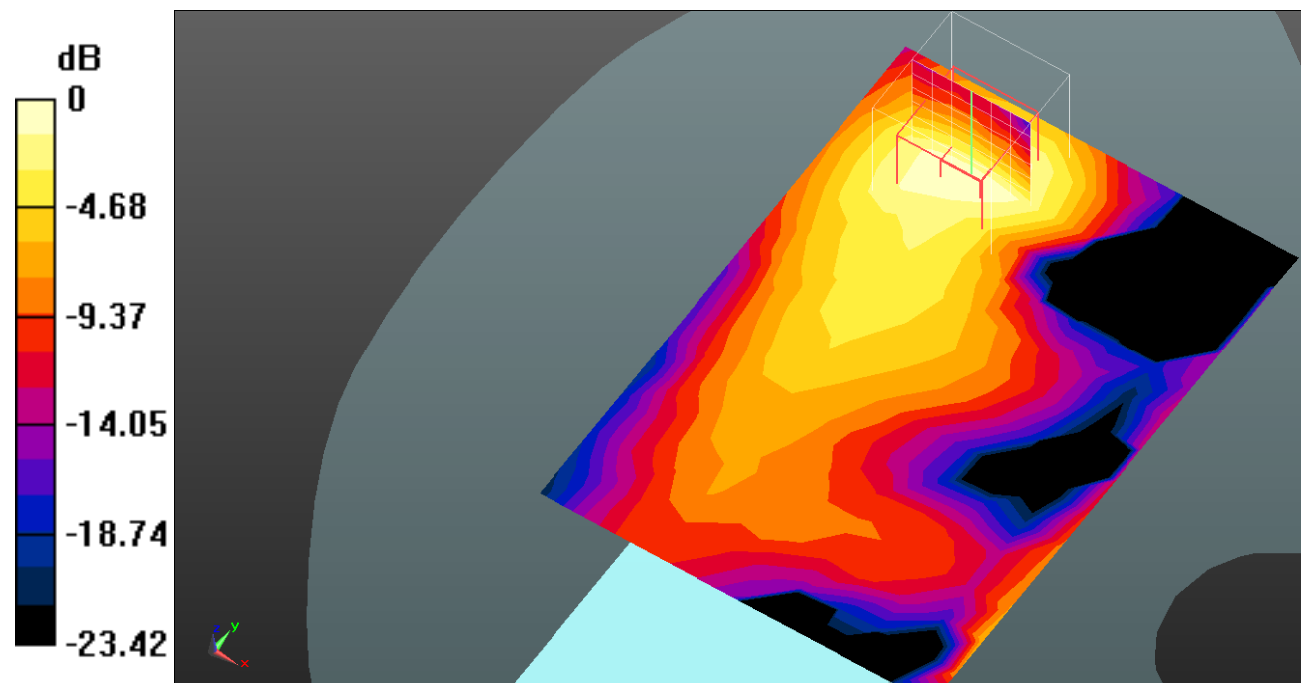

0 dB = 0.175 W/kg = -7.57 dB dBW/kg

Test Plot 95#: LTE Band 7_Body Back_1RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.921$ S/m; $\epsilon_r = 39.601$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @2535 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.729 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.448 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.619 W/kg; SAR(10 g) = 0.291 W/kg

Maximum value of SAR (measured) = 0.716 W/kg

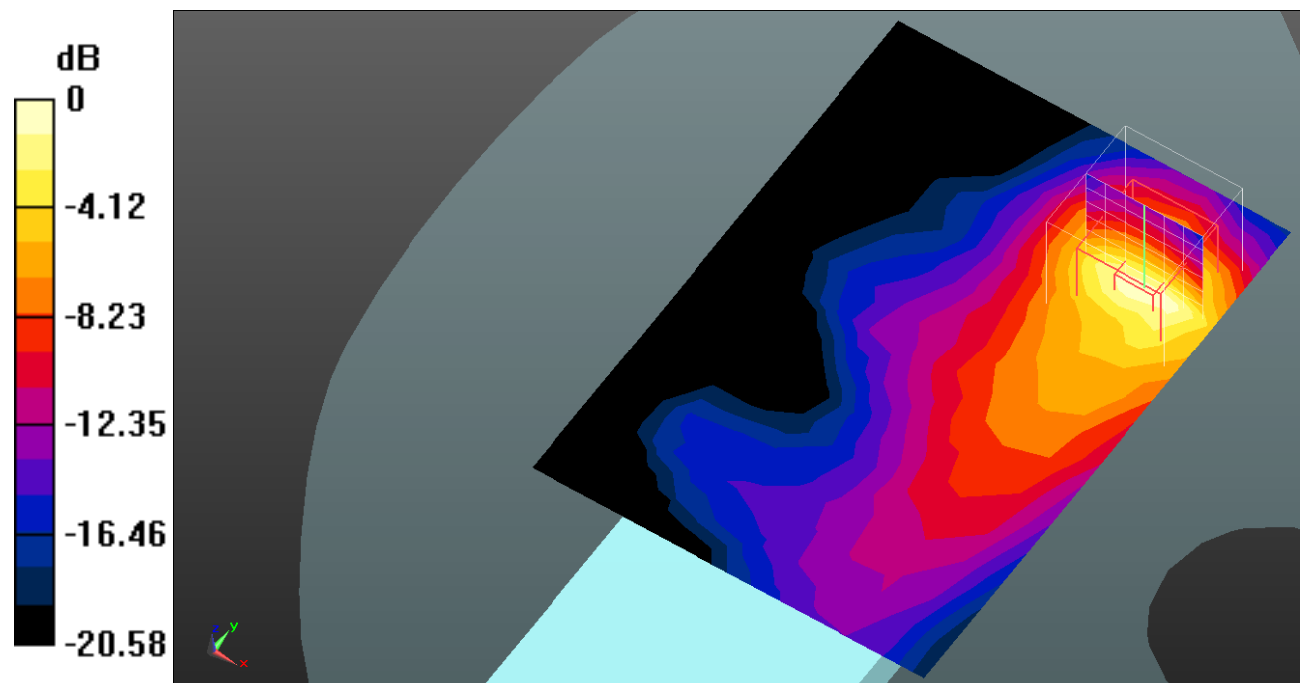

0 dB = 0.716 W/kg = -1.45 dB dBW/kg

Test Plot 96#: LTE Band 7_Body Back_50%RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.921$ S/m; $\epsilon_r = 39.601$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @2535 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.616 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.089 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.527 W/kg; SAR(10 g) = 0.246 W/kg

Maximum value of SAR (measured) = 0.600 W/kg

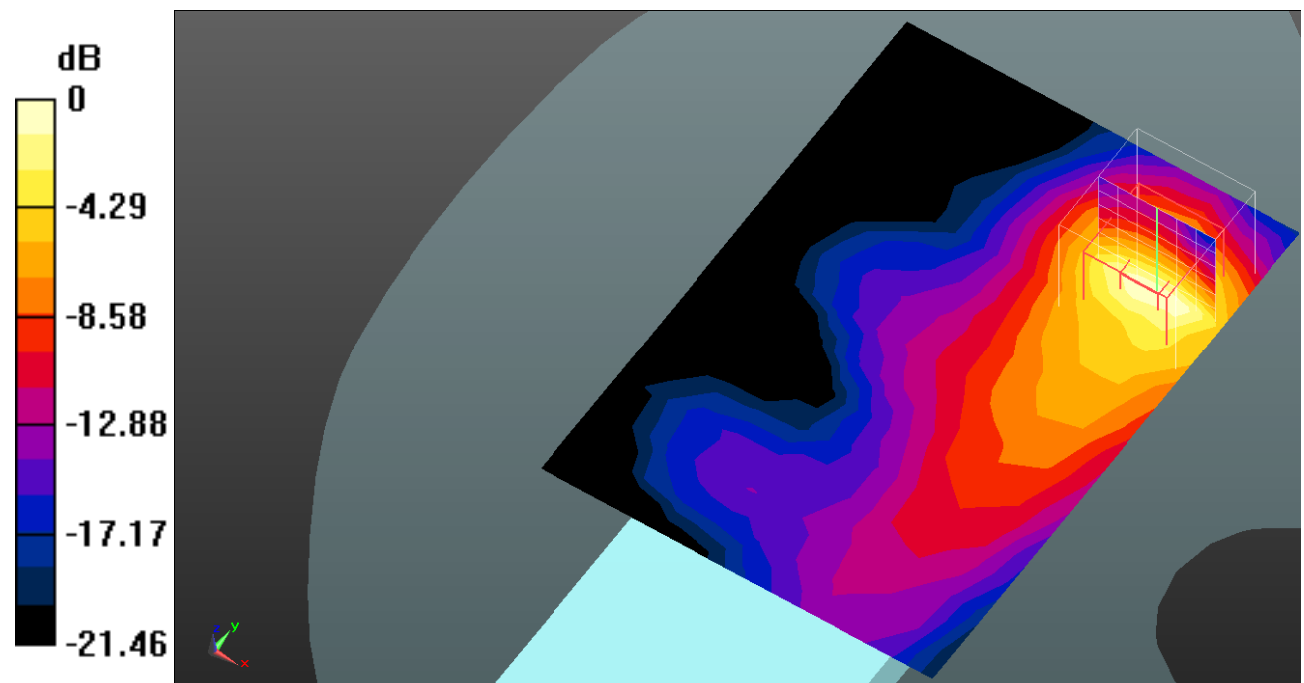

0 dB = 0.600 W/kg = -2.22 dB dBW/kg

Test Plot 97#: LTE Band 7_Body Left_1RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.921$ S/m; $\epsilon_r = 39.601$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @2535 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.241 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.149 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.361 W/kg

SAR(1 g) = 0.207 W/kg; SAR(10 g) = 0.111 W/kg

Maximum value of SAR (measured) = 0.228 W/kg

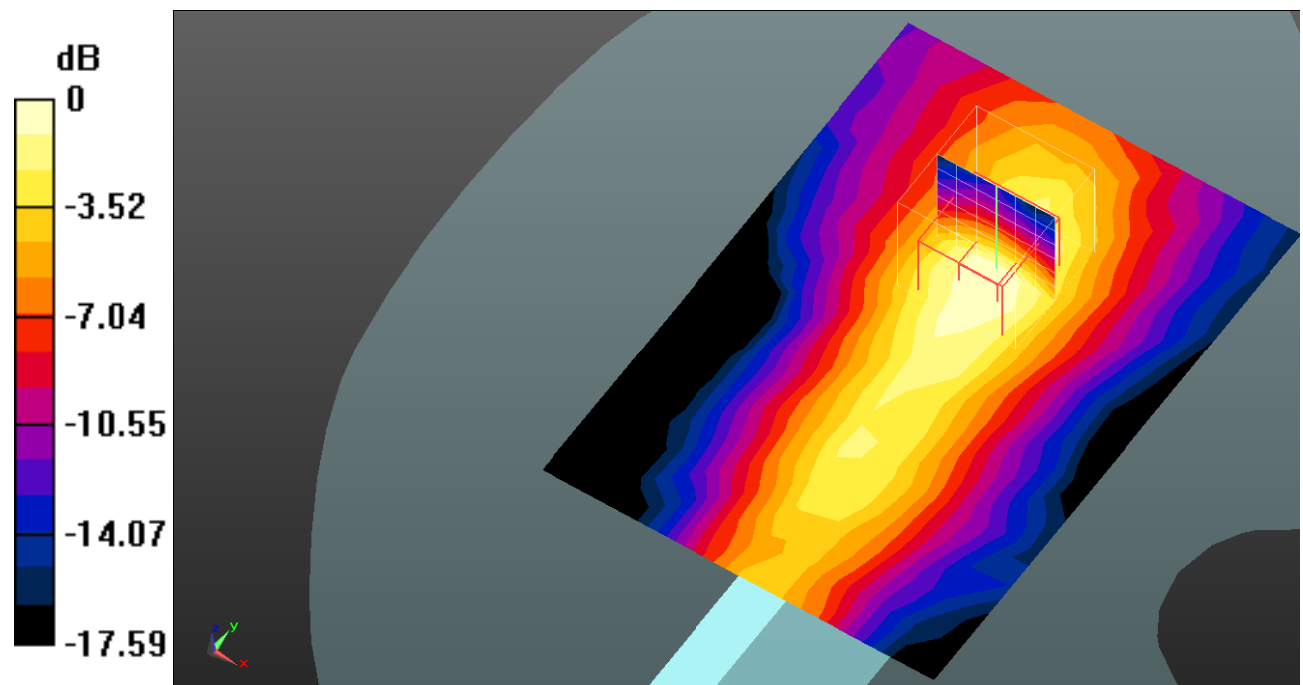

0 dB = 0.228 W/kg = -6.42 dB dBW/kg

Test Plot 98#: LTE Band 7_Body Left_50%RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.921$ S/m; $\epsilon_r = 39.601$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @2535 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.210 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.476 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.305 W/kg

SAR(1 g) = 0.175 W/kg; SAR(10 g) = 0.094 W/kg

Maximum value of SAR (measured) = 0.194 W/kg

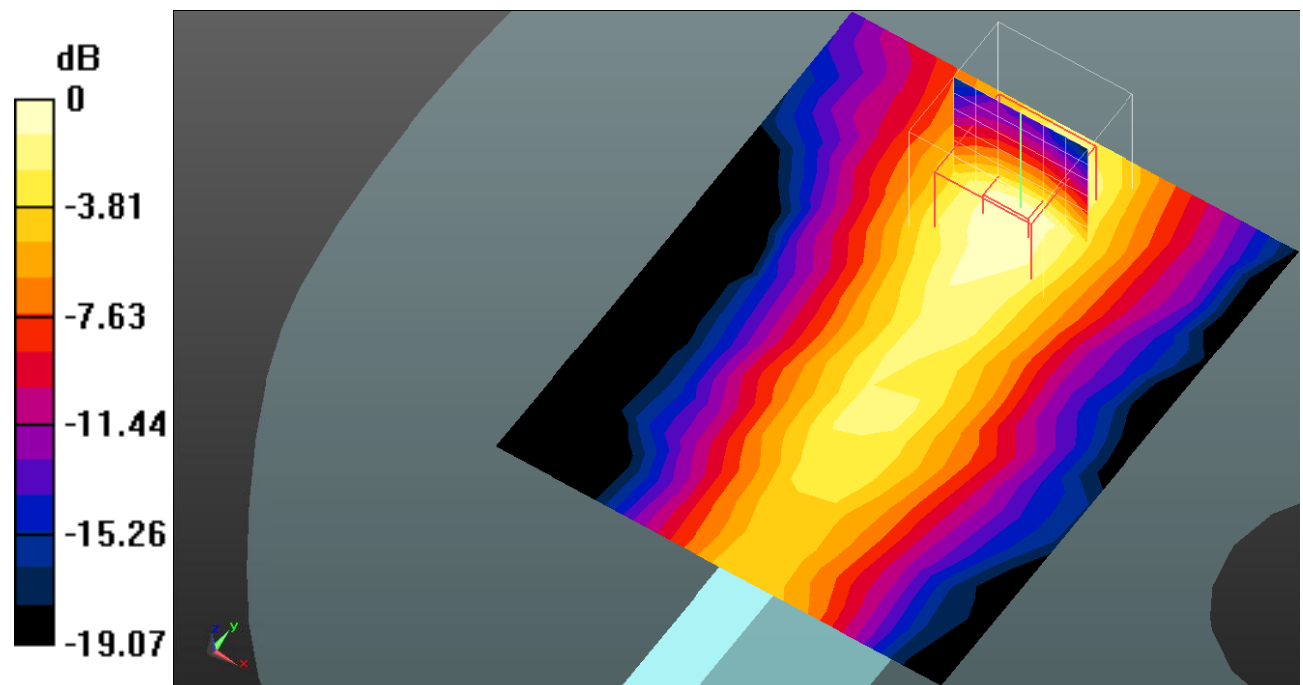

0 dB = 0.194 W/kg = -7.12 dB dBW/kg

Test Plot 99#: LTE Band 7_Body Top_1RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.921$ S/m; $\epsilon_r = 39.601$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @2535 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.534 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.090 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.908 W/kg

SAR(1 g) = 0.496 W/kg; SAR(10 g) = 0.230 W/kg

Maximum value of SAR (measured) = 0.575 W/kg

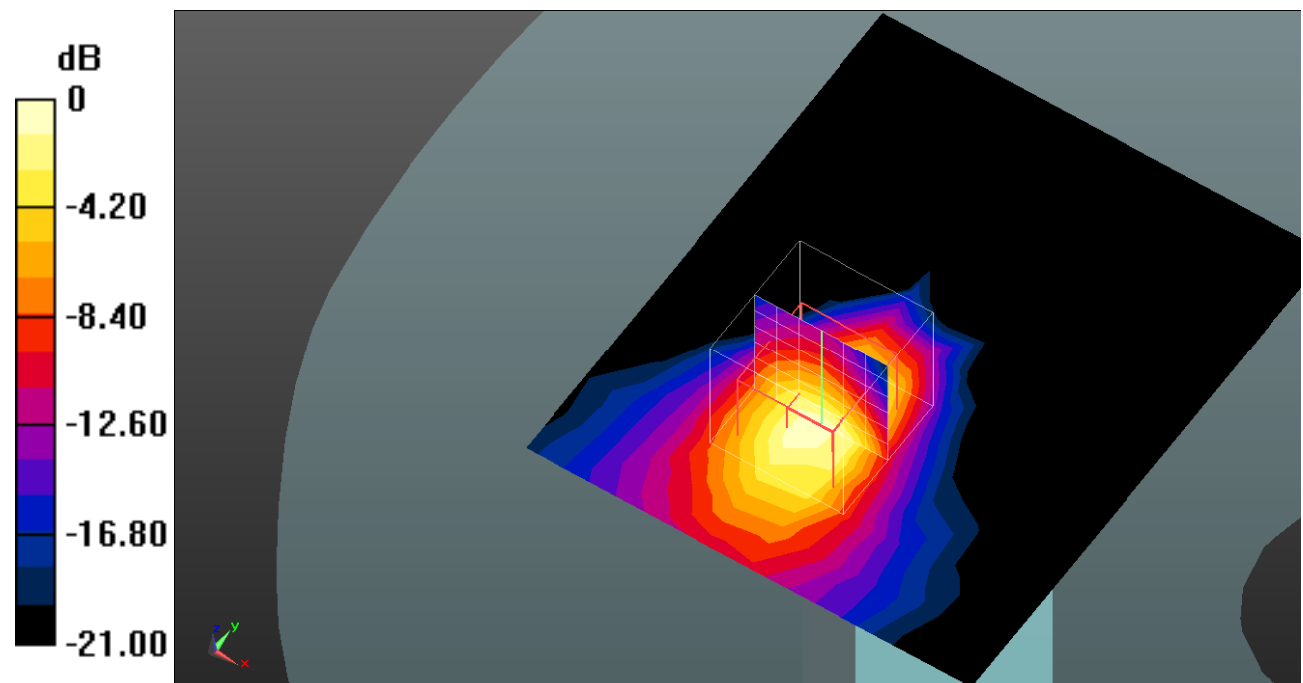

0 dB = 0.575 W/kg = -2.40 dB dBW/kg

Test Plot 100#: LTE Band 7_Body Top_50%RB_Middle**DUT: Mobile Phone; Type: K15q; Serial: RA221206-59345E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.921$ S/m; $\epsilon_r = 39.601$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @2535 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.425 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.937 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.731 W/kg

SAR(1 g) = 0.404 W/kg; SAR(10 g) = 0.187 W/kg

Maximum value of SAR (measured) = 0.472 W/kg

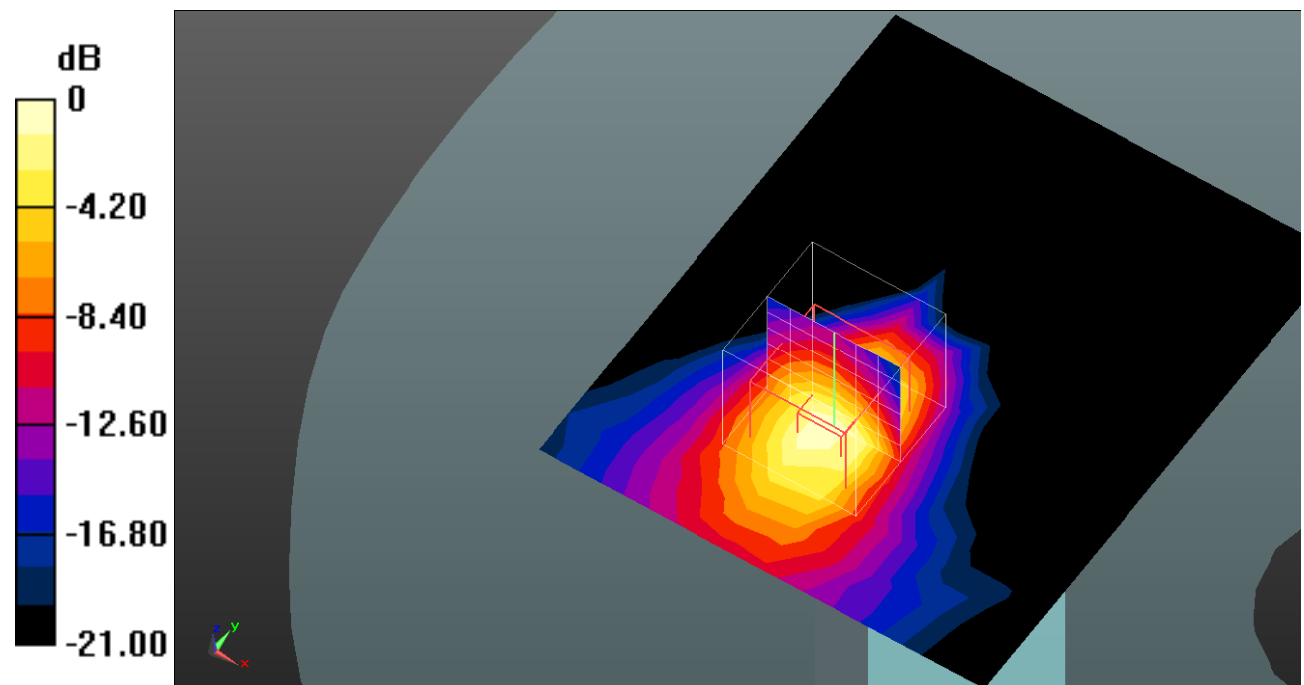

0 dB = 0.472 W/kg = -3.26 dB dBW/kg