

Report No.: WSCT-ANAB-R&E241100057A-SAR SAR Evaluation Report

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 7 (BW: 20MHz)	1RB	Left Cheek	21100	2535	-1.250	0.125	100	1.00	21.83	22.00	1.040	0.130
		Left Tilt	21100	2535	-1.500	0.173	100	1.00	21.83	22.00	1.040	0.180
		Right Cheek	21100	2535	2.000	0.236	100	1.00	21.83	22.00	1.040	0.245
		Right Tilt	21100	2535	-1.000	0.337	100	1.00	21.83	22.00	1.040	0.350
	50%RB	Left Cheek	21100	2535	-2.750	0.090	100	1.00	21.83	22.00	1.040	0.094
		Left Tilt	21100	2535	-3.000	0.148	100	1.00	21.83	22.00	1.040	0.154
		Right Cheek	21100	2535	0.500	0.211	100	1.00	21.83	22.00	1.040	0.219
		Right Tilt	21100	2535	-1.070	0.296	100	1.00	21.83	22.00	1.040	0.308
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 7 (BW: 20MHz)	1RB	Front	21100	2535	0.250	0.079	100	1.00	21.83	22.00	1.040	0.082
		Back	21100	2535	-3.250	0.093	100	1.00	21.83	22.00	1.040	0.097
		Left	21100	2535	-1.000	0.064	100	1.00	21.83	22.00	1.040	0.067
		Right	21100	2535	-4.250	0.025	100	1.00	21.83	22.00	1.040	0.026
		Top	21100	2535	-1.750	0.072	100	1.00	21.83	22.00	1.040	0.075
		Bottom	21100	2535	0.500	0.014	100	1.00	21.83	22.00	1.040	0.015
	50%RB	Front	21100	2535	-0.500	0.063	100	1.00	21.83	22.00	1.040	0.066
		Back	21100	2535	1.500	0.082	100	1.00	21.83	22.00	1.040	0.085
		Left	21100	2535	-1.500	0.055	100	1.00	21.83	22.00	1.040	0.057
		Right	21100	2535	-3.250	0.018	100	1.00	21.83	22.00	1.040	0.019
		Top	21100	2535	-3.500	0.061	100	1.00	21.83	22.00	1.040	0.063
		Bottom	21100	2535	0.750	0.007	100	1.00	21.83	22.00	1.040	0.007

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 12 (BW: 10MHz)	1RB	Left Cheek	23155	713.5	1.750	0.109	100	1.00	22.95	23.00	1.012	0.110
		Left Tilt	23155	713.5	-2.250	0.150	100	1.00	22.95	23.00	1.012	0.152
		Right Cheek	23155	713.5	-1.000	0.169	100	1.00	22.95	23.00	1.012	0.171
		Right Tilt	23155	713.5	-1.000	0.373	100	1.00	22.95	23.00	1.012	0.377
	50%RB	Left Cheek	23155	713.5	-1.750	0.086	100	1.00	22.95	23.00	1.012	0.087
		Left Tilt	23155	713.5	0.500	0.119	100	1.00	22.95	23.00	1.012	0.120
		Right Cheek	23155	713.5	4.000	0.143	100	1.00	22.95	23.00	1.012	0.145
		Right Tilt	23155	713.5	-0.250	0.348	100	1.00	22.95	23.00	1.012	0.352
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 12 (BW: 10MHz)	1RB	Front	23155	713.5	1.250	0.028	100	1.00	22.95	23.00	1.012	0.028
		Back	23155	713.5	-2.750	0.035	100	1.00	22.95	23.00	1.012	0.035
		Left	23155	713.5	-2.250	0.020	100	1.00	22.95	23.00	1.012	0.020
		Right	23155	713.5	-1.250	0.002	100	1.00	22.95	23.00	1.012	0.002
		Top	23155	713.5	-4.500	0.022	100	1.00	22.95	23.00	1.012	0.022
		Bottom	23155	713.5	3.500	0.002	100	1.00	22.95	23.00	1.012	0.002
	50%RB	Front	23155	713.5	0.750	0.023	100	1.00	22.95	23.00	1.012	0.023
		Back	23155	713.5	-0.250	0.033	100	1.00	22.95	23.00	1.012	0.033
		Left	23155	713.5	-3.250	0.017	100	1.00	22.95	23.00	1.012	0.017
		Right	23155	713.5	-1.000	0.002	100	1.00	22.95	23.00	1.012	0.002
		Top	23155	713.5	2.250	0.018	100	1.00	22.95	23.00	1.012	0.018
		Bottom	23155	713.5	-3.500	0.002	100	1.00	22.95	23.00	1.012	0.002

Report No.: WSCT-ANAB-R&E241100057A-SAR SAR Evaluation Report

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 13 (BW: 10MHz)	1RB	Left Cheek	23230	782	-4.750	0.162	100	1.00	23.08	23.50	1.102	0.178
		Left Tilt	23230	782	-3.500	0.213	100	1.00	23.08	23.50	1.102	0.235
		Right Cheek	23230	782	-4.250	0.577	100	1.00	23.08	23.50	1.102	0.636
		Right Tilt	23230	782	0.000	0.705	100	1.00	23.08	23.50	1.102	0.777
	50%RB	Left Cheek	23230	782	2.500	0.133	100	1.00	23.08	23.50	1.102	0.147
		Left Tilt	23230	782	-1.500	0.197	100	1.00	23.08	23.50	1.102	0.217
		Right Cheek	23230	782	-3.500	0.525	100	1.00	23.08	23.50	1.102	0.578
		Right Tilt	23230	782	-1.000	0.635	100	1.00	23.08	23.50	1.102	0.699
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 13 (BW: 10MHz)	1RB	Front	23230	782	-3.750	0.052	100	1.00	23.08	23.50	1.102	0.057
		Back	23230	782	-3.750	0.065	100	1.00	23.08	23.50	1.102	0.072
		Left	23230	782	-4.000	0.045	100	1.00	23.08	23.50	1.102	0.050
		Right	23230	782	-1.500	0.006	100	1.00	23.08	23.50	1.102	0.007
		Top	23230	782	3.250	0.048	100	1.00	23.08	23.50	1.102	0.053
		Bottom	23230	782	2.500	0.002	100	1.00	23.08	23.50	1.102	0.002
	50%RB	Front	23230	782	-3.250	0.047	100	1.00	23.08	23.50	1.102	0.052
		Back	23230	782	0.250	0.063	100	1.00	23.08	23.50	1.102	0.069
		Left	23230	782	-1.500	0.042	100	1.00	23.08	23.50	1.102	0.046
		Right	23230	782	-3.750	0.006	100	1.00	23.08	23.50	1.102	0.007
		Top	23230	782	-2.500	0.044	100	1.00	23.08	23.50	1.102	0.048
		Bottom	23230	782	0.500	0.002	100	1.00	23.08	23.50	1.102	0.002

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 17 (BW: 10MHz)	1RB	Left Cheek	23825	713.5	-2.500	0.059	100	1.00	23.24	23.50	1.062	0.063
		Left Tilt	23825	713.5	-4.500	0.086	100	1.00	23.24	23.50	1.062	0.091
		Right Cheek	23825	713.5	-3.250	0.140	100	1.00	23.24	23.50	1.062	0.149
		Right Tilt	23825	713.5	-2.000	0.383	100	1.00	23.24	23.50	1.062	0.407
	50%RB	Left Cheek	23825	713.5	0.750	0.048	100	1.00	23.24	23.50	1.062	0.051
		Left Tilt	23825	713.5	-4.000	0.075	100	1.00	23.24	23.50	1.062	0.080
		Right Cheek	23825	713.5	-0.500	0.173	100	1.00	23.24	23.50	1.062	0.184
		Right Tilt	23825	713.5	-3.500	0.347	100	1.00	23.24	23.50	1.062	0.368
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 17 (BW: 10MHz)	1RB	Front	23825	713.5	-2.500	0.035	100	1.00	23.24	23.50	1.062	0.037
		Back	23825	713.5	-4.000	0.042	100	1.00	23.24	23.50	1.062	0.045
		Left	23825	713.5	-1.750	0.026	100	1.00	23.24	23.50	1.062	0.028
		Right	23825	713.5	3.750	0.002	100	1.00	23.24	23.50	1.062	0.002
		Top	23825	713.5	-1.250	0.033	100	1.00	23.24	23.50	1.062	0.035
		Bottom	23825	713.5	1.750	0.002	100	1.00	23.24	23.50	1.062	0.002
	50%RB	Front	23825	713.5	-1.500	0.030	100	1.00	23.24	23.50	1.062	0.032
		Back	23825	713.5	2.750	0.037	100	1.00	23.24	23.50	1.062	0.039
		Left	23825	713.5	-1.250	0.022	100	1.00	23.24	23.50	1.062	0.023
		Right	23825	713.5	-4.750	0.002	100	1.00	23.24	23.50	1.062	0.002
		Top	23825	713.5	1.000	0.029	100	1.00	23.24	23.50	1.062	0.031
		Bottom	23825	713.5	1.500	0.002	100	1.00	23.24	23.50	1.062	0.002

Report No.: WSCT-ANAB-R&E241100057A-SAR SAR Evaluation Report

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 38 (BW: 20MHz)	1RB	Left Cheek	38225	2617.5	-3.250	0.052	100	1.00	22.73	23.00	1.064	0.055
		Left Tilt	38225	2617.5	2.000	0.083	100	1.00	22.73	23.00	1.064	0.088
		Right Cheek	38225	2617.5	1.500	0.166	100	1.00	22.73	23.00	1.064	0.177
		Right Tilt	38225	2617.5	-2.500	0.260	100	1.00	22.73	23.00	1.064	0.277
	50%RB	Left Cheek	38225	2617.5	-0.500	0.043	100	1.00	22.73	23.00	1.064	0.046
		Left Tilt	38225	2617.5	-1.500	0.062	100	1.00	22.73	23.00	1.064	0.066
		Right Cheek	38225	2617.5	-3.500	0.144	100	1.00	22.73	23.00	1.064	0.153
		Right Tilt	38225	2617.5	-4.250	0.215	100	1.00	22.73	23.00	1.064	0.229
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 38 (BW: 20MHz)	1RB	Front	38225	2617.5	0.047	-4.500	100	1.00	22.73	23.00	1.064	-4.789
		Back	38225	2617.5	0.068	-1.250	100	1.00	22.73	23.00	1.064	-1.330
		Left	38225	2617.5	0.041	-3.250	100	1.00	22.73	23.00	1.064	-3.458
		Right	38225	2617.5	0.017	1.250	100	1.00	22.73	23.00	1.064	1.330
		Top	38225	2617.5	0.045	-1.500	100	1.00	22.73	23.00	1.064	-1.596
		Bottom	38225	2617.5	0.005	2.750	100	1.00	22.73	23.00	1.064	2.926
	50%RB	Front	38225	2617.5	0.038	-3.500	100	1.00	22.73	23.00	1.064	-3.725
		Back	38225	2617.5	0.061	3.000	100	1.00	22.73	23.00	1.064	3.192
		Left	38225	2617.5	0.030	-0.250	100	1.00	22.73	23.00	1.064	-0.266
		Right	38225	2617.5	0.010	-1.500	100	1.00	22.73	23.00	1.064	-1.596
		Top	38225	2617.5	0.033	-3.250	100	1.00	22.73	23.00	1.064	-3.458
		Bottom	38225	2617.5	0.003	0.500	100	1.00	22.73	23.00	1.064	0.532

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 41 (BW: 20MHz)	1RB	Left Cheek	40620	2593	0.500	0.045	100	1.00	23.15	23.50	1.084	0.049
		Left Tilt	40620	2593	-2.250	0.080	100	1.00	23.15	23.50	1.084	0.087
		Right Cheek	40620	2593	-1.250	0.146	100	1.00	23.15	23.50	1.084	0.158
		Right Tilt	40620	2593	-4.250	0.200	100	1.00	23.15	23.50	1.084	0.217
		Right Tilt	41565	2687.5	-3.000	0.301	100	1.00	23.15	23.50	1.084	0.326
		Right Tilt	41540	2685	-1.500	0.210	100	1.00	23.15	23.50	1.084	0.228
		Right Tilt	41515	2682.5	-2.000	0.160	100	1.00	23.15	23.50	1.084	0.173
		Right Tilt	41490	2680	-4.250	0.085	100	1.00	23.15	23.50	1.084	0.092
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 41 (BW: 20MHz)	1RB	Front	40620	2593	1.500	0.042	100	1.00	23.15	23.50	1.084	0.046
		Back	40620	2593	-2.500	0.058	100	1.00	23.15	23.50	1.084	0.063
		Left	40620	2593	0.250	0.036	100	1.00	23.15	23.50	1.084	0.039
		Right	40620	2593	-1.750	0.006	100	1.00	23.15	23.50	1.084	0.007
		Top	40620	2593	-3.500	0.044	100	1.00	23.15	23.50	1.084	0.048
		Bottom	40620	2593	-2.250	0.003	100	1.00	23.15	23.50	1.084	0.003
		Back	41565	2687.5	-4.000	0.087	100	1.00	23.15	23.50	1.084	0.094
		Back	41540	2685	-1.500	0.062	100	1.00	23.15	23.50	1.084	0.067
		Back	41515	2682.5	-2.000	0.054	100	1.00	23.15	23.50	1.084	0.059
		Back	41490	2680	-4.750	0.027	100	1.00	23.15	23.50	1.084	0.029

Report No.: WSCT-ANAB-R&E241100057A-SAR SAR Evaluation Report

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 41 (BW: 20MHz)	50%RB	Left Cheek	40620	2593	-1.500	0.042	100	1.00	23.15	23.50	1.084	0.046
		Left Tilt	40620	2593	-2.000	0.074	100	1.00	23.15	23.50	1.084	0.080
		Right Cheek	40620	2593	-2.500	0.128	100	1.00	23.15	23.50	1.084	0.139
		Right Tilt	40620	2593	-1.750	0.193	100	1.00	23.15	23.50	1.084	0.209
		Right Tilt	41565	2687.5	0.250	0.277	100	1.00	23.15	23.50	1.084	0.300
		Right Tilt	41540	2685	-1.000	0.198	100	1.00	23.15	23.50	1.084	0.215
		Right Tilt	41515	2682.5	-2.500	0.142	100	1.00	23.15	23.50	1.084	0.154
Band 41 (BW: 20MHz)	50%RB	Right Tilt	41490	2680	-3.250	0.072	100	1.00	23.15	23.50	1.084	0.078
		Front	40620	2593	3.500	0.037	100	1.00	23.15	23.50	1.084	0.040
		Back	40620	2593	-1.500	0.055	100	1.00	23.15	23.50	1.084	0.060
		Left	40620	2593	1.250	0.031	100	1.00	23.15	23.50	1.084	0.034
		Right	40620	2593	3.250	0.005	100	1.00	23.15	23.50	1.084	0.005
		Top	40620	2593	-2.250	0.037	100	1.00	23.15	23.50	1.084	0.040
		Bottom	40620	2593	-1.750	0.002	100	1.00	23.15	23.50	1.084	0.002
Band 41 (BW: 20MHz)	50%RB	Back	41565	2687.5	0.250	0.077	100	1.00	23.15	23.50	1.084	0.083
		Back	41540	2685	-1.500	0.055	100	1.00	23.15	23.50	1.084	0.060
		Back	41515	2682.5	-3.750	0.049	100	1.00	23.15	23.50	1.084	0.053
		Back	41490	2680	2.500	0.024	100	1.00	23.15	23.50	1.084	0.026

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 42 (BW: 20MHz)	1RB	Left Cheek	42115	3452.5	-0.250	0.229	100	1.00	21.22	21.50	1.067	0.244
		Left Tilt	42115	3452.5	-2.750	0.413	100	1.00	21.22	21.50	1.067	0.441
		Right Cheek	42115	3452.5	-0.500	0.103	100	1.00	21.22	21.50	1.067	0.110
		Right Tilt	42115	3452.5	-3.250	0.127	100	1.00	21.22	21.50	1.067	0.135
	50%RB	Left Cheek	42115	3452.5	-3.750	0.205	100	1.00	21.22	21.50	1.067	0.219
		Left Tilt	42115	3452.5	2.000	0.276	100	1.00	21.22	21.50	1.067	0.294
		Right Cheek	42115	3452.5	-4.250	0.090	100	1.00	21.22	21.50	1.067	0.096
		Right Tilt	42115	3452.5	-1.500	0.108	100	1.00	21.22	21.50	1.067	0.115
Band 42 (BW: 20MHz)	1RB	Front	42115	3452.5	0.250	0.025	100	1.00	21.22	21.50	1.067	0.027
		Back	42115	3452.5	-4.750	0.036	100	1.00	21.22	21.50	1.067	0.038
		Left	42115	3452.5	0.250	0.008	100	1.00	21.22	21.50	1.067	0.009
		Right	42115	3452.5	-1.500	0.013	100	1.00	21.22	21.50	1.067	0.014
		Top	42115	3452.5	-3.750	0.022	100	1.00	21.22	21.50	1.067	0.023
		Bottom	42115	3452.5	1.250	0.003	100	1.00	21.22	21.50	1.067	0.003
	50%RB	Front	42115	3452.5	3.250	0.026	100	1.00	21.22	21.50	1.067	0.028
		Back	42115	3452.5	-4.250	0.033	100	1.00	21.22	21.50	1.067	0.035
		Left	42115	3452.5	-2.000	0.007	100	1.00	21.22	21.50	1.067	0.007
		Right	42115	3452.5	-1.750	0.011	100	1.00	21.22	21.50	1.067	0.012
		Top	42115	3452.5	-1.250	0.019	100	1.00	21.22	21.50	1.067	0.020
		Bottom	42115	3452.5	-3.000	0.002	100	1.00	21.22	21.50	1.067	0.002

Report No.: WSCT-ANAB-R&E241100057A-SAR SAR Evaluation Report

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 66 (BW: 20MHz)	1RB	Left Cheek	132072	1717.5	-1.500	0.070	100	1.00	23.36	23.50	1.033	0.072
		Left Tilt	132072	1717.5	-0.500	0.128	100	1.00	23.36	23.50	1.033	0.132
		Right Cheek	132072	1717.5	-2.000	0.173	100	1.00	23.36	23.50	1.033	0.179
		Right Tilt	132072	1717.5	-3.500	0.325	100	1.00	23.36	23.50	1.033	0.336
	50%RB	Left Cheek	132072	1717.5	1.250	0.058	100	1.00	23.36	23.50	1.033	0.060
		Left Tilt	132072	1717.5	-3.500	0.104	100	1.00	23.36	23.50	1.033	0.107
		Right Cheek	132072	1717.5	-4.000	0.153	100	1.00	23.36	23.50	1.033	0.158
		Right Tilt	132072	1717.5	-2.500	0.271	100	1.00	23.36	23.50	1.033	0.280
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 66 (BW: 20MHz)	1RB	Front	132072	1717.5	-0.250	0.030	100	1.00	23.36	23.50	1.033	0.031
		Back	132072	1717.5	-4.750	0.041	100	1.00	23.36	23.50	1.033	0.042
		Left	132072	1717.5	3.250	0.023	100	1.00	23.36	23.50	1.033	0.024
		Right	132072	1717.5	-1.500	0.005	100	1.00	23.36	23.50	1.033	0.005
		Top	132072	1717.5	-1.750	0.034	100	1.00	23.36	23.50	1.033	0.035
		Bottom	132072	1717.5	-2.250	0.002	100	1.00	23.36	23.50	1.033	0.002
	50%RB	Front	132072	1717.5	-3.500	0.029	100	1.00	23.36	23.50	1.033	0.030
		Back	132072	1717.5	0.500	0.038	100	1.00	23.36	23.50	1.033	0.039
		Left	132072	1717.5	2.250	0.026	100	1.00	23.36	23.50	1.033	0.027
		Right	132072	1717.5	-3.750	0.004	100	1.00	23.36	23.50	1.033	0.004
		Top	132072	1717.5	-4.000	0.030	100	1.00	23.36	23.50	1.033	0.031
		Bottom	132072	1717.5	-1.500	0.002	100	1.00	23.36	23.50	1.033	0.002

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
NR n5 (BW: 20MHz)	1RB	Left Cheek	166300	831.5	-0.750	0.051	100	1.00	22.19	22.50	1.074	0.055
		Left Tilt	166300	831.5	-3.500	0.083	100	1.00	22.19	22.50	1.074	0.089
		Right Cheek	166300	831.5	-2.250	0.118	100	1.00	22.19	22.50	1.074	0.127
		Right Tilt	166300	831.5	-1.000	0.242	100	1.00	22.19	22.50	1.074	0.260
	50%RB	Left Cheek	166300	831.5	-1.750	0.041	100	1.00	22.19	22.50	1.074	0.044
		Left Tilt	166300	831.5	-0.500	0.078	100	1.00	22.19	22.50	1.074	0.084
		Right Cheek	166300	831.5	-1.500	0.096	100	1.00	22.19	22.50	1.074	0.103
		Right Tilt	166300	831.5	0.250	0.216	100	1.00	22.19	22.50	1.074	0.232
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
NR n5 (BW: 20MHz)	1RB	Front	166300	831.5	-3.000	0.018	100	1.00	22.19	22.50	1.074	0.019
		Back	166300	831.5	-3.250	0.040	100	1.00	22.19	22.50	1.074	0.043
		Left	166300	831.5	2.500	0.011	100	1.00	22.19	22.50	1.074	0.012
		Right	166300	831.5	-2.000	0.033	100	1.00	22.19	22.50	1.074	0.035
		Top	166300	831.5	-2.750	0.035	100	1.00	22.19	22.50	1.074	0.038
		Bottom	166300	831.5	1.250	0.002	100	1.00	22.19	22.50	1.074	0.002
	50%RB	Front	166300	831.5	-1.750	0.016	100	1.00	22.19	22.50	1.074	0.017
		Back	166300	831.5	-3.750	0.037	100	1.00	22.19	22.50	1.074	0.040
		Left	166300	831.5	-2.000	0.009	100	1.00	22.19	22.50	1.074	0.010
		Right	166300	831.5	-0.750	0.029	100	1.00	22.19	22.50	1.074	0.031
		Top	166300	831.5	2.500	0.031	100	1.00	22.19	22.50	1.074	0.033
		Bottom	166300	831.5	1.000	0.002	100	1.00	22.19	22.50	1.074	0.002

Report No.: WSCT-ANAB-R&E241100057A-SAR SAR Evaluation Report

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
NR n7 (BW: 20MHz)	1RB	Left Cheek	513500	2565	-4.500	0.169	100	1.00	21.34	21.50	1.038	0.175
		Left Tilt	513500	2565	-3.500	0.224	100	1.00	21.34	21.50	1.038	0.232
		Right Cheek	513500	2565	-0.250	0.318	100	1.00	21.34	21.50	1.038	0.330
		Right Tilt	513500	2565	0.000	0.449	100	1.00	21.34	21.50	1.038	0.466
	50%RB	Left Cheek	513500	2565	0.750	0.127	100	1.00	21.34	21.50	1.038	0.132
		Left Tilt	513500	2565	-1.500	0.188	100	1.00	21.34	21.50	1.038	0.195
		Right Cheek	513500	2565	-0.500	0.259	100	1.00	21.34	21.50	1.038	0.269
		Right Tilt	513500	2565	-2.000	0.378	100	1.00	21.34	21.50	1.038	0.392
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
NR n7 (BW: 20MHz)	1RB	Front	513500	2565	-1.250	0.054	100	1.00	21.34	21.50	1.038	0.056
		Back	513500	2565	-2.250	0.127	100	1.00	21.34	21.50	1.038	0.132
		Left	513500	2565	-1.250	0.037	100	1.00	21.34	21.50	1.038	0.038
		Right	513500	2565	-2.750	0.081	100	1.00	21.34	21.50	1.038	0.084
		Top	513500	2565	1.750	0.090	100	1.00	21.34	21.50	1.038	0.093
		Bottom	513500	2565	-0.750	0.008	100	1.00	21.34	21.50	1.038	0.008
	50%RB	Front	513500	2565	2.000	0.049	100	1.00	21.34	21.50	1.038	0.051
		Back	513500	2565	-4.500	0.115	100	1.00	21.34	21.50	1.038	0.119
		Left	513500	2565	0.750	0.035	100	1.00	21.34	21.50	1.038	0.036
		Right	513500	2565	-4.500	0.069	100	1.00	21.34	21.50	1.038	0.072
		Top	513500	2565	-2.500	0.081	100	1.00	21.34	21.50	1.038	0.084
		Bottom	513500	2565	-0.250	0.005	100	1.00	21.34	21.50	1.038	0.005

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
NR n12 (BW: 15MHz)	1RB	Left Cheek	141300	706.5	-3.750	0.116	100	1.00	21.85	22.00	1.035	0.120
		Left Tilt	141300	706.5	-3.000	0.156	100	1.00	21.85	22.00	1.035	0.161
		Right Cheek	141300	706.5	-0.500	0.513	100	1.00	21.85	22.00	1.035	0.531
		Right Tilt	141300	706.5	-2.500	0.676	100	1.00	21.85	22.00	1.035	0.700
	50%RB	Left Cheek	141300	706.5	-3.000	0.109	100	1.00	21.85	22.00	1.035	0.113
		Left Tilt	141300	706.5	0.250	0.141	100	1.00	21.85	22.00	1.035	0.146
		Right Cheek	141300	706.5	-2.500	0.429	100	1.00	21.85	22.00	1.035	0.444
		Right Tilt	141300	706.5	-2.500	0.618	100	1.00	21.85	22.00	1.035	0.640
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
NR n12 (BW: 15MHz)	1RB	Front	141300	706.5	-4.750	0.042	100	1.00	21.85	22.00	1.035	0.043
		Back	141300	706.5	-4.750	0.054	100	1.00	21.85	22.00	1.035	0.056
		Left	141300	706.5	0.500	0.012	100	1.00	21.85	22.00	1.035	0.012
		Right	141300	706.5	-3.000	0.016	100	1.00	21.85	22.00	1.035	0.017
		Top	141300	706.5	-1.500	0.037	100	1.00	21.85	22.00	1.035	0.038
		Bottom	141300	706.5	-4.500	0.002	100	1.00	21.85	22.00	1.035	0.002
	50%RB	Front	141300	706.5	-3.500	0.037	100	1.00	21.85	22.00	1.035	0.038
		Back	141300	706.5	-3.250	0.044	100	1.00	21.85	22.00	1.035	0.046
		Left	141300	706.5	-4.500	0.010	100	1.00	21.85	22.00	1.035	0.010
		Right	141300	706.5	3.000	0.011	100	1.00	21.85	22.00	1.035	0.011
		Top	141300	706.5	-1.250	0.033	100	1.00	21.85	22.00	1.035	0.034
		Bottom	141300	706.5	-4.000	0.002	100	1.00	21.85	22.00	1.035	0.002

Report No.: WSCT-ANAB-R&E241100057A-SAR SAR Evaluation Report

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
NR n38 (BW: 20MHz)	1RB	Left Cheek	523000	2615	-2.250	0.103	100	1.00	22.25	22.50	1.059	0.109
		Left Tilt	528000	2640	-3.000	0.148	100	1.00	22.25	22.50	1.059	0.157
		Right Cheek	528000	2640	-1.250	0.203	100	1.00	22.25	22.50	1.059	0.215
		Right Tilt	528000	2640	-1.500	0.279	100	1.00	22.25	22.50	1.059	0.296
	50%RB	Left Cheek	528000	2640	-3.000	0.080	100	1.00	22.25	22.50	1.059	0.085
		Left Tilt	528000	2640	-4.750	0.126	100	1.00	22.25	22.50	1.059	0.133
		Right Cheek	528000	2640	-2.750	0.176	100	1.00	22.25	22.50	1.059	0.186
		Right Tilt	528000	2640	-3.750	0.265	100	1.00	22.25	22.50	1.059	0.281
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
NR n38 (BW: 20MHz)	1RB	Front	528000	2640	-2.750	0.028	100	1.00	22.25	22.50	1.059	0.030
		Back	528000	2640	1.750	0.087	100	1.00	22.25	22.50	1.059	0.092
		Left	528000	2640	-3.500	0.054	100	1.00	22.25	22.50	1.059	0.057
		Right	528000	2640	1.500	0.008	100	1.00	22.25	22.50	1.059	0.008
		Top	528000	2640	-0.250	0.063	100	1.00	22.25	22.50	1.059	0.067
		Bottom	528000	2640	2.500	0.003	100	1.00	22.25	22.50	1.059	0.003
	50%RB	Front	528000	2640	-1.500	0.025	100	1.00	22.25	22.50	1.059	0.026
		Back	528000	2640	-4.500	0.084	100	1.00	22.25	22.50	1.059	0.089
		Left	528000	2640	1.000	0.048	100	1.00	22.25	22.50	1.059	0.051
		Right	528000	2640	-1.500	0.006	100	1.00	22.25	22.50	1.059	0.006
		Top	528000	2640	1.500	0.052	100	1.00	22.25	22.50	1.059	0.055
		Bottom	528000	2640	-0.250	0.002	100	1.00	22.25	22.50	1.059	0.002

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
NR n41 (BW:100MHz)	1RB	Left Cheek	528000	2640	-3.500	0.147	100	1.00	24.19	24.50	1.074	0.158
		Left Tilt	528000	2640	-2.000	0.196	100	1.00	24.19	24.50	1.074	0.211
		Right Cheek	528000	2640	-2.750	0.452	100	1.00	24.19	24.50	1.074	0.485
		Right Tilt	528000	2640	-1.500	0.734	100	1.00	24.19	24.50	1.074	0.788
	50%RB	Left Cheek	528000	2640	-1.000	0.129	100	1.00	24.19	24.50	1.074	0.139
		Left Tilt	528000	2640	-0.250	0.168	100	1.00	24.19	24.50	1.074	0.180
		Right Cheek	528000	2640	-2.500	0.294	100	1.00	24.19	24.50	1.074	0.316
		Right Tilt	528000	2640	-1.250	0.653	100	1.00	24.19	24.50	1.074	0.701
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
NR n41 (BW:100MHz)	1RB	Front	528000	2640	-2.500	0.083	100	1.00	24.19	24.50	1.074	0.089
		Back	528000	2640	-1.250	0.219	100	1.00	24.19	24.50	1.074	0.235
		Left	528000	2640	-1.500	0.157	100	1.00	24.19	24.50	1.074	0.169
		Right	528000	2640	-0.500	0.029	100	1.00	24.19	24.50	1.074	0.031
		Top	528000	2640	-0.750	0.136	100	1.00	24.19	24.50	1.074	0.146
		Bottom	528000	2640	-3.000	0.007	100	1.00	24.19	24.50	1.074	0.008
	50%RB	Front	528000	2640	1.750	0.075	100	1.00	24.19	24.50	1.074	0.081
		Back	528000	2640	-2.500	0.208	100	1.00	24.19	24.50	1.074	0.223
		Left	528000	2640	-2.750	0.148	100	1.00	24.19	24.50	1.074	0.159
		Right	528000	2640	-1.500	0.026	100	1.00	24.19	24.50	1.074	0.028
		Top	528000	2640	0.500	0.142	100	1.00	24.19	24.50	1.074	0.153
		Bottom	528000	2640	-2.000	0.008	100	1.00	24.19	24.50	1.074	0.009

Report No.: WSCT-ANAB-R&E241100057A-SAR SAR Evaluation Report

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
NR n66 (BW:40MHz)	1RB	Left Cheek	343000	1715	0.500	0.128	100	1.00	22.34	22.50	1.038	0.133
		Left Tilt	343000	1715	-4.250	0.196	100	1.00	22.34	22.50	1.038	0.203
		Right Cheek	343000	1715	-3.000	0.306	100	1.00	22.34	22.50	1.038	0.317
		Right Tilt	343000	1715	-2.250	0.427	100	1.00	22.34	22.50	1.038	0.443
	50%RB	Left Cheek	343000	1715	-3.250	0.103	100	1.00	22.34	22.50	1.038	0.107
		Left Tilt	343000	1715	-2.250	0.170	100	1.00	22.34	22.50	1.038	0.176
		Right Cheek	343000	1715	-1.500	0.275	100	1.00	22.34	22.50	1.038	0.285
		Right Tilt	343000	1715	-3.000	0.395	100	1.00	22.34	22.50	1.038	0.410
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
NR n66 (BW:40MHz)	1RB	Front	343000	1715	-0.750	0.043	100	1.00	22.34	22.50	1.038	0.045
		Back	343000	1715	-0.060	0.060	100	1.00	22.34	22.50	1.038	0.062
		Left	343000	1715	1.750	0.029	100	1.00	22.34	22.50	1.038	0.030
		Right	343000	1715	-2.500	0.006	100	1.00	22.34	22.50	1.038	0.006
		Top	343000	1715	-3.750	0.035	100	1.00	22.34	22.50	1.038	0.036
		Bottom	343000	1715	-3.250	0.003	100	1.00	22.34	22.50	1.038	0.003
	50%RB	Front	343000	1715	3.500	0.036	100	1.00	22.34	22.50	1.038	0.037
		Back	343000	1715	-2.000	0.057	100	1.00	22.34	22.50	1.038	0.059
		Left	343000	1715	-0.500	0.022	100	1.00	22.34	22.50	1.038	0.023
		Right	343000	1715	-3.250	0.003	100	1.00	22.34	22.50	1.038	0.003
		Top	343000	1715	-2.750	0.029	100	1.00	22.34	22.50	1.038	0.030
		Bottom	343000	1715	-4.750	0.002	100	1.00	22.34	22.50	1.038	0.002

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
NR n77 (BW:50MHz)	1RB	Left Cheek	631668	3475	-3.250	0.677	100	1.00	25.04	25.50	1.112	0.753
		Left Tilt	631668	3475	-0.750	0.854	100	1.00	25.04	25.50	1.112	0.949
		Right Cheek	631668	3475	-1.250	0.168	100	1.00	25.04	25.50	1.112	0.187
		Right Tilt	631668	3475	-2.500	0.214	100	1.00	25.04	25.50	1.112	0.238
	50%RB	Left Cheek	631668	3475	-1.000	0.616	100	1.00	25.04	25.50	1.112	0.685
		Left Tilt	631668	3475	-1.500	0.783	100	1.00	25.04	25.50	1.112	0.870
		Right Cheek	631668	3475	-0.250	0.149	100	1.00	25.04	25.50	1.112	0.166
		Right Tilt	631668	3475	0.750	0.186	100	1.00	25.04	25.50	1.112	0.207
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
NR n77 (BW:50MHz)	1RB	Front	631668	3475	-4.750	0.088	100	1.00	25.04	25.50	1.112	0.098
		Back	631668	3475	-3.500	0.115	100	1.00	25.04	25.50	1.112	0.128
		Left	631668	3475	0.500	0.025	100	1.00	25.04	25.50	1.112	0.028
		Right	631668	3475	-3.750	0.084	100	1.00	25.04	25.50	1.112	0.093
		Top	631668	3475	-4.500	0.096	100	1.00	25.04	25.50	1.112	0.107
		Bottom	631668	3475	-2.500	0.005	100	1.00	25.04	25.50	1.112	0.006
	50%RB	Front	631668	3475	0.250	0.081	100	1.00	25.04	25.50	1.112	0.090
		Back	631668	3475	-3.000	0.103	100	1.00	25.04	25.50	1.112	0.115
		Left	631668	3475	-4.250	0.020	100	1.00	25.04	25.50	1.112	0.022
		Right	631668	3475	-0.250	0.077	100	1.00	25.04	25.50	1.112	0.086
		Top	631668	3475	-1.500	0.081	100	1.00	25.04	25.50	1.112	0.090
		Bottom	631668	3475	-3.500	0.002	100	1.00	25.04	25.50	1.112	0.002

Report No.: WSCT-ANAB-R&E241100057A-SAR SAR Evaluation Report

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
NR n77 (BW:100MHz)	1RB	Left Cheek	656000	3890	-3.750	0.194	100	1.00	24.69	25.00	1.074	0.208
		Left Tilt	656000	3890	0.500	0.264	100	1.00	24.69	25.00	1.074	0.284
		Right Cheek	656000	3890	-4.000	0.082	100	1.00	24.69	25.00	1.074	0.088
		Right Tilt	656000	3890	0.250	0.128	100	1.00	24.69	25.00	1.074	0.137
	50%RB	Left Cheek	656000	3890	-1.500	0.138	100	1.00	24.69	25.00	1.074	0.148
		Left Tilt	656000	3890	-2.250	0.216	100	1.00	24.69	25.00	1.074	0.232
		Right Cheek	656000	3890	-2.500	0.074	100	1.00	24.69	25.00	1.074	0.079
		Right Tilt	656000	3890	-1.500	0.116	100	1.00	24.69	25.00	1.074	0.125
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
NR n77 (BW:100MHz)	1RB	Front	656000	3890	0.750	0.086	100	1.00	24.69	25.00	1.074	0.092
		Back	656000	3890	-3.500	0.117	100	1.00	24.69	25.00	1.074	0.126
		Left	656000	3890	1.500	0.021	100	1.00	24.69	25.00	1.074	0.023
		Right	656000	3890	-3.750	0.098	100	1.00	24.69	25.00	1.074	0.105
		Top	656000	3890	-3.500	0.106	100	1.00	24.69	25.00	1.074	0.114
		Bottom	656000	3890	-1.500	0.006	100	1.00	24.69	25.00	1.074	0.006
	50%RB	Front	656000	3890	-2.000	0.070	100	1.00	24.69	25.00	1.074	0.075
		Back	656000	3890	-4.500	0.092	100	1.00	24.69	25.00	1.074	0.099
		Left	656000	3890	-2.250	0.019	100	1.00	24.69	25.00	1.074	0.020
		Right	656000	3890	0.250	0.082	100	1.00	24.69	25.00	1.074	0.088
		Top	656000	3890	-2.000	0.087	100	1.00	24.69	25.00	1.074	0.093
		Bottom	656000	3890	-1.750	0.005	100	1.00	24.69	25.00	1.074	0.005

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
NR n78 (BW:50MHz)	1RB	Left Cheek	633334	3500	-1.250	0.635	100	1.00	25.14	25.50	1.086	0.690
		Left Tilt	633334	3500	-0.750	0.781	100	1.00	25.14	25.50	1.086	0.848
		Right Cheek	633334	3500	-3.250	0.158	100	1.00	25.14	25.50	1.086	0.172
		Right Tilt	633334	3500	-1.500	0.203	100	1.00	25.14	25.50	1.086	0.221
	50%RB	Left Cheek	633334	3500	-3.500	0.526	100	1.00	25.14	25.50	1.086	0.571
		Left Tilt	633334	3500	-2.250	0.712	100	1.00	25.14	25.50	1.086	0.774
		Right Cheek	633334	3500	-1.500	0.124	100	1.00	25.14	25.50	1.086	0.135
		Right Tilt	633334	3500	-3.500	0.183	100	1.00	25.14	25.50	1.086	0.199
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
NR n78 (BW:50MHz)	1RB	Front	633334	3500	-1.750	0.101	100	1.00	25.14	25.50	1.086	0.110
		Back	633334	3500	-2.750	0.134	100	1.00	25.14	25.50	1.086	0.146
		Left	633334	3500	-1.500	0.039	100	1.00	25.14	25.50	1.086	0.042
		Right	633334	3500	-0.250	0.075	100	1.00	25.14	25.50	1.086	0.081
		Top	633334	3500	-4.750	0.044	100	1.00	25.14	25.50	1.086	0.048
		Bottom	633334	3500	-4.750	0.010	100	1.00	25.14	25.50	1.086	0.011
	50%RB	Front	633334	3500	0.500	0.090	100	1.00	25.14	25.50	1.086	0.098
		Back	633334	3500	-1.500	0.121	100	1.00	25.14	25.50	1.086	0.131
		Left	633334	3500	-2.750	0.033	100	1.00	25.14	25.50	1.086	0.036
		Right	633334	3500	-1.500	0.067	100	1.00	25.14	25.50	1.086	0.073
		Top	633334	3500	0.750	0.078	100	1.00	25.14	25.50	1.086	0.085
		Bottom	633334	3500	-2.750	0.009	100	1.00	25.14	25.50	1.086	0.010

Report No.: WSCT-ANAB-R&E241100057A-SAR SAR Evaluation Report

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
NR n78 (BW:50MHz)	1RB	Left Cheek	647000	3705	-1.750	0.451	100	1.00	24.64	25.00	1.086	0.490
		Left Tilt	647000	3705	-0.750	0.430	100	1.00	24.64	25.00	1.086	0.467
		Right Cheek	647000	3705	-2.500	0.136	100	1.00	24.64	25.00	1.086	0.148
		Right Tilt	647000	3705	-1.250	0.088	100	1.00	24.64	25.00	1.086	0.096
	50%RB	Left Cheek	647000	3705	-0.250	0.382	100	1.00	24.64	25.00	1.086	0.415
		Left Tilt	647000	3705	-3.500	0.335	100	1.00	24.64	25.00	1.086	0.364
		Right Cheek	647000	3705	-1.250	0.106	100	1.00	24.64	25.00	1.086	0.115
		Right Tilt	647000	3705	-1.500	0.068	100	1.00	24.64	25.00	1.086	0.074
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
NR n78 (BW:50MHz)	1RB	Front	647000	3705	-2.250	0.103	100	1.00	24.64	25.00	1.086	0.112
		Back	647000	3705	1.500	0.147	100	1.00	24.64	25.00	1.086	0.160
		Left	647000	3705	-4.750	0.042	100	1.00	24.64	25.00	1.086	0.046
		Right	647000	3705	-1.750	0.083	100	1.00	24.64	25.00	1.086	0.090
		Top	647000	3705	0.500	0.094	100	1.00	24.64	25.00	1.086	0.102
		Bottom	647000	3705	-1.500	0.009	100	1.00	24.64	25.00	1.086	0.010
	50%RB	Front	647000	3705	-4.750	0.091	100	1.00	24.64	25.00	1.086	0.099
		Back	647000	3705	0.250	0.135	100	1.00	24.64	25.00	1.086	0.147
		Left	647000	3705	-1.500	0.037	100	1.00	24.64	25.00	1.086	0.040
		Right	647000	3705	-0.750	0.073	100	1.00	24.64	25.00	1.086	0.079
		Top	647000	3705	-4.000	0.079	100	1.00	24.64	25.00	1.086	0.086
		Bottom	647000	3705	-2.500	0.006	100	1.00	24.64	25.00	1.086	0.007

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
2-n7 (BW: 20MHz)	1RB	Left Cheek	18625	1852.5	-0.520	0.071	100	1.00	22.02	22.50	1.117	0.079
		Left Tilt	18625	1852.5	4.340	0.103	100	1.00	22.02	22.50	1.117	0.115
		Right Cheek	18625	1852.5	-0.040	0.125	100	1.00	22.02	22.50	1.117	0.140
		Right Tilt	18625	1852.5	4.240	0.170	100	1.00	22.02	22.50	1.117	0.190
	50%RB	Left Cheek	18625	1852.5	1.490	0.056	100	1.00	22.02	22.50	1.117	0.063
		Left Tilt	18625	1852.5	1.530	0.085	100	1.00	22.02	22.50	1.117	0.095
		Right Cheek	18625	1852.5	-4.450	0.106	100	1.00	22.02	22.50	1.117	0.118
		Right Tilt	18625	1852.5	3.070	0.157	100	1.00	22.02	22.50	1.117	0.175
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
2-n7 (BW: 20MHz)	1RB	Front	18625	1852.5	-0.940	0.048	100	1.00	22.02	22.50	1.117	0.054
		Back	18625	1852.5	-4.540	0.058	100	1.00	22.02	22.50	1.117	0.065
		Left	18625	1852.5	-2.820	0.035	100	1.00	22.02	22.50	1.117	0.039
		Right	18625	1852.5	3.110	0.009	100	1.00	22.02	22.50	1.117	0.010
		Top	18625	1852.5	-4.760	0.051	100	1.00	22.02	22.50	1.117	0.057
		Bottom	18625	1852.5	1.450	0.002	100	1.00	22.02	22.50	1.117	0.002
	50%RB	Front	18625	1852.5	-4.940	0.043	100	1.00	22.02	22.50	1.117	0.048
		Back	18625	1852.5	-0.690	0.055	100	1.00	22.02	22.50	1.117	0.061
		Left	18625	1852.5	-3.570	0.032	100	1.00	22.02	22.50	1.117	0.036
		Right	18625	1852.5	-2.550	0.008	100	1.00	22.02	22.50	1.117	0.009
		Top	18625	1852.5	-2.690	0.046	100	1.00	22.02	22.50	1.117	0.051
		Bottom	18625	1852.5	1.520	0.002	100	1.00	22.02	22.50	1.117	0.002

Report No.: WSCT-ANAB-R&E241100057A-SAR SAR Evaluation Report

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
2-n66 (BW: 20MHz)	1RB	Left Cheek	18625	1852.5	-3.680	0.057	100	1.00	23.36	24.00	1.159	0.066
		Left Tilt	18625	1852.5	-4.630	0.139	100	1.00	23.36	24.00	1.159	0.161
		Right Cheek	18625	1852.5	2.860	0.098	100	1.00	23.36	24.00	1.159	0.114
		Right Tilt	18625	1852.5	-2.770	0.172	100	1.00	23.36	24.00	1.159	0.199
	50%RB	Left Cheek	18625	1852.5	1.470	0.045	100	1.00	23.36	24.00	1.159	0.052
		Left Tilt	18625	1852.5	-1.280	0.118	100	1.00	23.36	24.00	1.159	0.137
		Right Cheek	18625	1852.5	-4.000	0.089	100	1.00	23.36	24.00	1.159	0.103
		Right Tilt	18625	1852.5	4.830	0.156	100	1.00	23.36	24.00	1.159	0.181
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
2-n66 (BW: 20MHz)	1RB	Front	18625	1852.5	-4.170	0.060	100	1.00	23.36	24.00	1.159	0.070
		Back	18625	1852.5	-2.870	0.111	100	1.00	23.36	24.00	1.159	0.129
		Left	18625	1852.5	-3.190	0.045	100	1.00	23.36	24.00	1.159	0.052
		Right	18625	1852.5	-1.270	0.011	100	1.00	23.36	24.00	1.159	0.013
		Top	18625	1852.5	-4.860	0.075	100	1.00	23.36	24.00	1.159	0.087
		Bottom	18625	1852.5	-3.510	0.005	100	1.00	23.36	24.00	1.159	0.006
	50%RB	Front	18625	1852.5	-4.750	0.054	100	1.00	23.36	24.00	1.159	0.063
		Back	18625	1852.5	4.030	0.108	100	1.00	23.36	24.00	1.159	0.125
		Left	18625	1852.5	2.470	0.042	100	1.00	23.36	24.00	1.159	0.049
		Right	18625	1852.5	-3.520	0.011	100	1.00	23.36	24.00	1.159	0.013
		Top	18625	1852.5	0.300	0.073	100	1.00	23.36	24.00	1.159	0.085
		Bottom	18625	1852.5	2.960	0.004	100	1.00	23.36	24.00	1.159	0.005

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
2-n78 (BW: 20MHz)	1RB	Left Cheek	18625	1852.5	4.650	0.158	100	1.00	22.26	22.50	1.057	0.167
		Left Tilt	18625	1852.5	-0.060	0.128	100	1.00	22.26	22.50	1.057	0.135
		Right Cheek	18625	1852.5	2.580	0.114	100	1.00	22.26	22.50	1.057	0.120
		Right Tilt	18625	1852.5	3.990	0.089	100	1.00	22.26	22.50	1.057	0.094
	50%RB	Left Cheek	18625	1852.5	-3.290	0.148	100	1.00	22.26	22.50	1.057	0.156
		Left Tilt	18625	1852.5	0.500	0.112	100	1.00	22.26	22.50	1.057	0.118
		Right Cheek	18625	1852.5	2.850	0.108	100	1.00	22.26	22.50	1.057	0.114
		Right Tilt	18625	1852.5	1.750	0.080	100	1.00	22.26	22.50	1.057	0.085
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
2-n78 (BW: 20MHz)	1RB	Front	18625	1852.5	-4.240	0.090	100	1.00	22.26	22.50	1.057	0.095
		Back	18625	1852.5	0.590	0.116	100	1.00	22.26	22.50	1.057	0.123
		Left	18625	1852.5	-1.300	0.067	100	1.00	22.26	22.50	1.057	0.071
		Right	18625	1852.5	3.390	0.011	100	1.00	22.26	22.50	1.057	0.012
		Top	18625	1852.5	-2.810	0.092	100	1.00	22.26	22.50	1.057	0.097
		Bottom	18625	1852.5	0.280	0.003	100	1.00	22.26	22.50	1.057	0.003
	50%RB	Front	18625	1852.5	-4.180	0.082	100	1.00	22.26	22.50	1.057	0.087
		Back	18625	1852.5	-4.780	0.110	100	1.00	22.26	22.50	1.057	0.116
		Left	18625	1852.5	-1.860	0.063	100	1.00	22.26	22.50	1.057	0.067
		Right	18625	1852.5	-2.070	0.010	100	1.00	22.26	22.50	1.057	0.011
		Top	18625	1852.5	1.190	0.091	100	1.00	22.26	22.50	1.057	0.096
		Bottom	18625	1852.5	3.140	0.002	100	1.00	22.26	22.50	1.057	0.002

Report No.: WSCT-ANAB-R&E241100057A-SAR SAR Evaluation Report

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
4-n41 (BW: 20MHz)	1RB	Left Cheek	20325	1747.5	-4.950	0.114	100	1.00	22.74	23.00	1.062	0.121
		Left Tilt	20325	1747.5	-0.280	0.112	100	1.00	22.74	23.00	1.062	0.119
		Right Cheek	20325	1747.5	2.430	0.152	100	1.00	22.74	23.00	1.062	0.161
		Right Tilt	20325	1747.5	-2.470	0.140	100	1.00	22.74	23.00	1.062	0.149
	50%RB	Left Cheek	20325	1747.5	-0.370	0.101	100	1.00	22.74	23.00	1.062	0.107
		Left Tilt	20325	1747.5	2.770	0.097	100	1.00	22.74	23.00	1.062	0.103
		Right Cheek	20325	1747.5	0.030	0.146	100	1.00	22.74	23.00	1.062	0.155
		Right Tilt	20325	1747.5	-3.310	0.121	100	1.00	22.74	23.00	1.062	0.128
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
4-n41 (BW: 20MHz)	1RB	Front	20325	1747.5	0.710	0.043	100	1.00	22.74	23.00	1.062	0.046
		Back	20325	1747.5	-4.730	0.061	100	1.00	22.74	23.00	1.062	0.065
		Left	20325	1747.5	-4.420	0.034	100	1.00	22.74	23.00	1.062	0.036
		Right	20325	1747.5	3.980	0.005	100	1.00	22.74	23.00	1.062	0.005
		Top	20325	1747.5	1.250	0.041	100	1.00	22.74	23.00	1.062	0.044
		Bottom	20325	1747.5	1.710	0.002	100	1.00	22.74	23.00	1.062	0.002
	50%RB	Front	20325	1747.5	-3.300	0.042	100	1.00	22.74	23.00	1.062	0.045
		Back	20325	1747.5	-0.500	0.056	100	1.00	22.74	23.00	1.062	0.059
		Left	20325	1747.5	3.870	0.028	100	1.00	22.74	23.00	1.062	0.030
		Right	20325	1747.5	-3.420	0.003	100	1.00	22.74	23.00	1.062	0.003
		Top	20325	1747.5	-0.450	0.038	100	1.00	22.74	23.00	1.062	0.040
		Bottom	20325	1747.5	-3.490	0.002	100	1.00	22.74	23.00	1.062	0.002

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
4-n78 (BW: 20MHz)	1RB	Left Cheek	20325	1747.5	-2.570	0.068	100	1.00	22.22	22.50	1.067	0.073
		Left Tilt	20325	1747.5	2.790	0.097	100	1.00	22.22	22.50	1.067	0.103
		Right Cheek	20325	1747.5	-2.720	0.034	100	1.00	22.22	22.50	1.067	0.036
		Right Tilt	20325	1747.5	3.600	0.054	100	1.00	22.22	22.50	1.067	0.058
	50%RB	Left Cheek	20325	1747.5	-3.880	0.055	100	1.00	22.22	22.50	1.067	0.059
		Left Tilt	20325	1747.5	-0.420	0.083	100	1.00	22.22	22.50	1.067	0.089
		Right Cheek	20325	1747.5	3.840	0.029	100	1.00	22.22	22.50	1.067	0.031
		Right Tilt	20325	1747.5	4.790	0.042	100	1.00	22.22	22.50	1.067	0.045
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
4-n78 (BW: 20MHz)	1RB	Front	20325	1747.5	-0.330	0.030	100	1.00	22.22	22.50	1.067	0.032
		Back	20325	1747.5	-2.810	0.047	100	1.00	22.22	22.50	1.067	0.050
		Left	20325	1747.5	2.950	0.004	100	1.00	22.22	22.50	1.067	0.004
		Right	20325	1747.5	-0.260	0.028	100	1.00	22.22	22.50	1.067	0.030
		Top	20325	1747.5	0.880	0.025	100	1.00	22.22	22.50	1.067	0.027
		Bottom	20325	1747.5	1.070	0.002	100	1.00	22.22	22.50	1.067	0.002
	50%RB	Front	20325	1747.5	-2.570	0.029	100	1.00	22.22	22.50	1.067	0.031
		Back	20325	1747.5	-0.480	0.043	100	1.00	22.22	22.50	1.067	0.046
		Left	20325	1747.5	-3.830	0.003	100	1.00	22.22	22.50	1.067	0.003
		Right	20325	1747.5	0.850	0.023	100	1.00	22.22	22.50	1.067	0.025
		Top	20325	1747.5	3.170	0.018	100	1.00	22.22	22.50	1.067	0.019
		Bottom	20325	1747.5	0.830	0.002	100	1.00	22.22	22.50	1.067	0.002

Report No.: WSCT-ANAB-R&E241100057A-SAR SAR Evaluation Report

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
5-n7 (BW: 10MHz)	1RB	Left Cheek	20525	836.5	-2.050	0.048	100	1.00	20.96	21.00	1.009	0.048
		Left Tilt	20525	836.5	-1.360	0.067	100	1.00	20.96	21.00	1.009	0.068
		Right Cheek	20525	836.5	-0.740	0.090	100	1.00	20.96	21.00	1.009	0.091
		Right Tilt	20525	836.5	-1.930	0.121	100	1.00	20.96	21.00	1.009	0.122
	50%RB	Left Cheek	20525	836.5	-0.940	0.038	100	1.00	20.96	21.00	1.009	0.038
		Left Tilt	20525	836.5	3.390	0.060	100	1.00	20.96	21.00	1.009	0.061
		Right Cheek	20525	836.5	2.450	0.084	100	1.00	20.96	21.00	1.009	0.085
		Right Tilt	20525	836.5	-0.790	0.113	100	1.00	20.96	21.00	1.009	0.114
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
5-n7 (BW: 10MHz)	1RB	Front	20525	836.5	-0.850	0.022	100	1.00	20.96	21.00	1.009	0.022
		Back	20525	836.5	-4.300	0.032	100	1.00	20.96	21.00	1.009	0.032
		Left	20525	836.5	-2.810	0.017	100	1.00	20.96	21.00	1.009	0.017
		Right	20525	836.5	-3.680	0.005	100	1.00	20.96	21.00	1.009	0.005
		Top	20525	836.5	4.810	0.021	100	1.00	20.96	21.00	1.009	0.021
		Bottom	20525	836.5	-2.600	0.003	100	1.00	20.96	21.00	1.009	0.003
	50%RB	Front	20525	836.5	-3.070	0.019	100	1.00	20.96	21.00	1.009	0.019
		Back	20525	836.5	2.500	0.029	100	1.00	20.96	21.00	1.009	0.029
		Left	20525	836.5	3.120	0.016	100	1.00	20.96	21.00	1.009	0.016
		Right	20525	836.5	1.590	0.005	100	1.00	20.96	21.00	1.009	0.005
		Top	20525	836.5	-0.990	0.018	100	1.00	20.96	21.00	1.009	0.018
		Bottom	20525	836.5	-0.410	0.002	100	1.00	20.96	21.00	1.009	0.002

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
5-n38 (BW: 10MHz)	1RB	Left Cheek	20525	836.5	3.070	0.024	100	1.00	22.76	23.00	1.057	0.025
		Left Tilt	20525	836.5	1.580	0.039	100	1.00	22.76	23.00	1.057	0.041
		Right Cheek	20525	836.5	-0.710	0.059	100	1.00	22.76	23.00	1.057	0.062
		Right Tilt	20525	836.5	1.710	0.093	100	1.00	22.76	23.00	1.057	0.098
	50%RB	Left Cheek	20525	836.5	-3.610	0.019	100	1.00	22.76	23.00	1.057	0.020
		Left Tilt	20525	836.5	-2.190	0.034	100	1.00	22.76	23.00	1.057	0.036
		Right Cheek	20525	836.5	-3.210	0.054	100	1.00	22.76	23.00	1.057	0.057
		Right Tilt	20525	836.5	-2.940	0.085	100	1.00	22.76	23.00	1.057	0.090
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
5-n38 (BW: 10MHz)	1RB	Front	20525	836.5	-0.780	0.012	100	1.00	22.76	23.00	1.057	0.013
		Back	20525	836.5	-4.230	0.021	100	1.00	22.76	23.00	1.057	0.022
		Left	20525	836.5	1.960	0.011	100	1.00	22.76	23.00	1.057	0.012
		Right	20525	836.5	-1.610	0.002	100	1.00	22.76	23.00	1.057	0.002
		Top	20525	836.5	-0.560	0.012	100	1.00	22.76	23.00	1.057	0.013
		Bottom	20525	836.5	-1.330	0.002	100	1.00	22.76	23.00	1.057	0.002
	50%RB	Front	20525	836.5	-3.420	0.011	100	1.00	22.76	23.00	1.057	0.012
		Back	20525	836.5	-4.380	0.018	100	1.00	22.76	23.00	1.057	0.019
		Left	20525	836.5	-0.350	0.009	100	1.00	22.76	23.00	1.057	0.010
		Right	20525	836.5	4.400	0.002	100	1.00	22.76	23.00	1.057	0.002
		Top	20525	836.5	2.660	0.011	100	1.00	22.76	23.00	1.057	0.012
		Bottom	20525	836.5	-0.300	0.002	100	1.00	22.76	23.00	1.057	0.002

Report No.: WSCT-ANAB-R&E241100057A-SAR SAR Evaluation Report

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
5-n41 (BW: 10MHz)	1RB	Left Cheek	20525	836.5	-2.560	0.053	100	1.00	22.05	22.50	1.109	0.059
		Left Tilt	20525	836.5	-1.770	0.070	100	1.00	22.05	22.50	1.109	0.078
		Right Cheek	20525	836.5	0.380	0.149	100	1.00	22.05	22.50	1.109	0.165
		Right Tilt	20525	836.5	4.280	0.164	100	1.00	22.05	22.50	1.109	0.182
	50%RB	Left Cheek	20525	836.5	3.930	0.038	100	1.00	22.05	22.50	1.109	0.042
		Left Tilt	20525	836.5	3.310	0.061	100	1.00	22.05	22.50	1.109	0.068
		Right Cheek	20525	836.5	-1.860	0.133	100	1.00	22.05	22.50	1.109	0.148
		Right Tilt	20525	836.5	0.250	0.151	100	1.00	22.05	22.50	1.109	0.167
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
5-n41 (BW: 10MHz)	1RB	Front	20525	836.5	4.140	0.033	100	1.00	22.05	22.50	1.109	0.037
		Back	20525	836.5	2.010	0.043	100	1.00	22.05	22.50	1.109	0.048
		Left	20525	836.5	-1.050	0.028	100	1.00	22.05	22.50	1.109	0.031
		Right	20525	836.5	-1.720	0.002	100	1.00	22.05	22.50	1.109	0.002
		Top	20525	836.5	-1.140	0.025	100	1.00	22.05	22.50	1.109	0.028
		Bottom	20525	836.5	-1.460	0.002	100	1.00	22.05	22.50	1.109	0.002
	50%RB	Front	20525	836.5	-0.550	0.029	100	1.00	22.05	22.50	1.109	0.032
		Back	20525	836.5	4.180	0.040	100	1.00	22.05	22.50	1.109	0.044
		Left	20525	836.5	2.790	0.027	100	1.00	22.05	22.50	1.109	0.030
		Right	20525	836.5	1.670	0.002	100	1.00	22.05	22.50	1.109	0.002
		Top	20525	836.5	1.560	0.022	100	1.00	22.05	22.50	1.109	0.024
		Bottom	20525	836.5	-0.240	0.002	100	1.00	22.05	22.50	1.109	0.002

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
5-n66 (BW: 10MHz)	1RB	Left Cheek	20525	836.5	-0.540	0.048	100	1.00	23.60	24.00	1.096	0.053
		Left Tilt	20525	836.5	-0.510	0.067	100	1.00	23.60	24.00	1.096	0.073
		Right Cheek	20525	836.5	-0.310	0.089	100	1.00	23.60	24.00	1.096	0.098
		Right Tilt	20525	836.5	-4.360	0.114	100	1.00	23.60	24.00	1.096	0.125
	50%RB	Left Cheek	20525	836.5	-3.110	0.032	100	1.00	23.60	24.00	1.096	0.035
		Left Tilt	20525	836.5	1.310	0.055	100	1.00	23.60	24.00	1.096	0.060
		Right Cheek	20525	836.5	4.010	0.080	100	1.00	23.60	24.00	1.096	0.088
		Right Tilt	20525	836.5	2.510	0.106	100	1.00	23.60	24.00	1.096	0.116
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
5-n66 (BW: 10MHz)	1RB	Front	20525	836.5	2.300	0.017	100	1.00	23.60	24.00	1.096	0.019
		Back	20525	836.5	-0.270	0.029	100	1.00	23.60	24.00	1.096	0.032
		Left	20525	836.5	1.200	0.014	100	1.00	23.60	24.00	1.096	0.015
		Right	20525	836.5	4.900	0.003	100	1.00	23.60	24.00	1.096	0.003
		Top	20525	836.5	-0.870	0.022	100	1.00	23.60	24.00	1.096	0.024
		Bottom	20525	836.5	0.930	0.002	100	1.00	23.60	24.00	1.096	0.002
	50%RB	Front	20525	836.5	-1.730	0.011	100	1.00	23.60	24.00	1.096	0.012
		Back	20525	836.5	-1.020	0.026	100	1.00	23.60	24.00	1.096	0.029
		Left	20525	836.5	3.200	0.015	100	1.00	23.60	24.00	1.096	0.016
		Right	20525	836.5	-2.400	0.002	100	1.00	23.60	24.00	1.096	0.002
		Top	20525	836.5	-1.740	0.019	100	1.00	23.60	24.00	1.096	0.021
		Bottom	20525	836.5	-1.700	0.002	100	1.00	23.60	24.00	1.096	0.002

Report No.: WSCT-ANAB-R&E241100057A-SAR SAR Evaluation Report

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
5-n77 (BW: 10MHz)	1RB	Left Cheek	20525	836.5	2.970	0.015	100	1.00	21.98	22.00	1.005	0.015
		Left Tilt	20525	836.5	-0.650	0.024	100	1.00	21.98	22.00	1.005	0.024
		Right Cheek	20525	836.5	3.500	0.033	100	1.00	21.98	22.00	1.005	0.033
		Right Tilt	20525	836.5	4.760	0.041	100	1.00	21.98	22.00	1.005	0.041
	50%RB	Left Cheek	20525	836.5	3.430	0.014	100	1.00	21.98	22.00	1.005	0.014
		Left Tilt	20525	836.5	-2.330	0.022	100	1.00	21.98	22.00	1.005	0.022
		Right Cheek	20525	836.5	-3.260	0.028	100	1.00	21.98	22.00	1.005	0.028
		Right Tilt	20525	836.5	-0.360	0.039	100	1.00	21.98	22.00	1.005	0.039
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
5-n77 (BW: 10MHz)	1RB	Front	20525	836.5	-1.540	0.010	100	1.00	21.98	22.00	1.005	0.010
		Back	20525	836.5	4.120	0.014	100	1.00	21.98	22.00	1.005	0.014
		Left	20525	836.5	-2.420	0.008	100	1.00	21.98	22.00	1.005	0.008
		Right	20525	836.5	0.380	0.002	100	1.00	21.98	22.00	1.005	0.002
		Top	20525	836.5	-3.240	0.009	100	1.00	21.98	22.00	1.005	0.009
		Bottom	20525	836.5	-3.900	0.002	100	1.00	21.98	22.00	1.005	0.002
	50%RB	Front	20525	836.5	-0.240	0.008	100	1.00	21.98	22.00	1.005	0.008
		Back	20525	836.5	-3.530	0.015	100	1.00	21.98	22.00	1.005	0.015
		Left	20525	836.5	4.090	0.007	100	1.00	21.98	22.00	1.005	0.007
		Right	20525	836.5	-0.320	0.002	100	1.00	21.98	22.00	1.005	0.002
		Top	20525	836.5	2.010	0.009	100	1.00	21.98	22.00	1.005	0.009
		Bottom	20525	836.5	1.910	0.002	100	1.00	21.98	22.00	1.005	0.002

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
5-n78 (BW: 10MHz)	1RB	Left Cheek	20525	836.5	-1.050	0.032	100	1.00	21.87	22.00	1.030	0.033
		Left Tilt	20525	836.5	-0.510	0.037	100	1.00	21.87	22.00	1.030	0.038
		Right Cheek	20525	836.5	2.150	0.038	100	1.00	21.87	22.00	1.030	0.039
		Right Tilt	20525	836.5	1.500	0.056	100	1.00	21.87	22.00	1.030	0.058
	50%RB	Left Cheek	20525	836.5	-3.420	0.028	100	1.00	21.87	22.00	1.030	0.029
		Left Tilt	20525	836.5	4.090	0.037	100	1.00	21.87	22.00	1.030	0.038
		Right Cheek	20525	836.5	-0.800	0.035	100	1.00	21.87	22.00	1.030	0.036
		Right Tilt	20525	836.5	1.710	0.052	100	1.00	21.87	22.00	1.030	0.054
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
5-n78 (BW: 10MHz)	1RB	Front	20525	836.5	3.650	0.020	100	1.00	21.87	22.00	1.030	0.021
		Back	20525	836.5	-4.320	0.037	100	1.00	21.87	22.00	1.030	0.038
		Left	20525	836.5	-4.220	0.019	100	1.00	21.87	22.00	1.030	0.020
		Right	20525	836.5	1.350	0.003	100	1.00	21.87	22.00	1.030	0.003
		Top	20525	836.5	2.870	0.022	100	1.00	21.87	22.00	1.030	0.023
		Bottom	20525	836.5	0.890	0.002	100	1.00	21.87	22.00	1.030	0.002
	50%RB	Front	20525	836.5	3.650	0.019	100	1.00	21.87	22.00	1.030	0.020
		Back	20525	836.5	-4.320	0.030	100	1.00	21.87	22.00	1.030	0.031
		Left	20525	836.5	-4.220	0.017	100	1.00	21.87	22.00	1.030	0.018
		Right	20525	836.5	1.350	0.003	100	1.00	21.87	22.00	1.030	0.003
		Top	20525	836.5	2.870	0.022	100	1.00	21.87	22.00	1.030	0.023
		Bottom	20525	836.5	0.890	0.002	100	1.00	21.87	22.00	1.030	0.002

Report No.: WSCT-ANAB-R&E241100057A-SAR SAR Evaluation Report

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
7-n7 (BW: 20MHz)	1RB	Left Cheek	21100	2535	-1.620	0.059	100	1.00	23.53	24.00	1.114	0.066
		Left Tilt	21100	2535	-0.110	0.086	100	1.00	23.53	24.00	1.114	0.096
		Right Cheek	21100	2535	-0.970	0.158	100	1.00	23.53	24.00	1.114	0.176
		Right Tilt	21100	2535	-1.870	0.237	100	1.00	23.53	24.00	1.114	0.264
	50%RB	Left Cheek	21100	2535	-3.720	0.048	100	1.00	23.53	24.00	1.114	0.053
		Left Tilt	21100	2535	0.210	0.073	100	1.00	23.53	24.00	1.114	0.081
		Right Cheek	21100	2535	-1.420	0.127	100	1.00	23.53	24.00	1.114	0.142
		Right Tilt	21100	2535	0.030	0.196	100	1.00	23.53	24.00	1.114	0.218
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
7-n7 (BW: 20MHz)	1RB	Front	21100	2535	0.750	0.036	100	1.00	23.53	24.00	1.114	0.040
		Back	21100	2535	-3.500	0.060	100	1.00	23.53	24.00	1.114	0.067
		Left	21100	2535	0.970	0.033	100	1.00	23.53	24.00	1.114	0.037
		Right	21100	2535	1.020	0.011	100	1.00	23.53	24.00	1.114	0.012
		Top	21100	2535	-2.260	0.043	100	1.00	23.53	24.00	1.114	0.048
		Bottom	21100	2535	0.070	0.004	100	1.00	23.53	24.00	1.114	0.004
	50%RB	Front	21100	2535	2.330	0.028	100	1.00	23.53	24.00	1.114	0.031
		Back	21100	2535	0.670	0.048	100	1.00	23.53	24.00	1.114	0.053
		Left	21100	2535	-1.380	0.027	100	1.00	23.53	24.00	1.114	0.030
		Right	21100	2535	-4.200	0.008	100	1.00	23.53	24.00	1.114	0.009
		Top	21100	2535	-4.760	0.037	100	1.00	23.53	24.00	1.114	0.041
		Bottom	21100	2535	-0.250	0.003	100	1.00	23.53	24.00	1.114	0.003

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
7-n66 (BW: 20MHz)	1RB	Left Cheek	21100	2535	3.710	0.051	100	1.00	22.79	23.00	1.050	0.054
		Left Tilt	21100	2535	-0.260	0.083	100	1.00	22.79	23.00	1.050	0.087
		Right Cheek	21100	2535	1.370	0.127	100	1.00	22.79	23.00	1.050	0.133
		Right Tilt	21100	2535	3.210	0.197	100	1.00	22.79	23.00	1.050	0.207
	50%RB	Left Cheek	21100	2535	-2.870	0.034	100	1.00	22.79	23.00	1.050	0.036
		Left Tilt	21100	2535	-2.850	0.068	100	1.00	22.79	23.00	1.050	0.071
		Right Cheek	21100	2535	1.430	0.119	100	1.00	22.79	23.00	1.050	0.125
		Right Tilt	21100	2535	-4.050	0.182	100	1.00	22.79	23.00	1.050	0.191
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
7-n66 (BW: 20MHz)	1RB	Front	21100	2535	-4.050	0.053	100	1.00	22.79	23.00	1.050	0.056
		Back	21100	2535	-2.390	0.065	100	1.00	22.79	23.00	1.050	0.068
		Left	21100	2535	-1.670	0.042	100	1.00	22.79	23.00	1.050	0.044
		Right	21100	2535	-2.490	0.016	100	1.00	22.79	23.00	1.050	0.017
		Top	21100	2535	-0.580	0.051	100	1.00	22.79	23.00	1.050	0.054
		Bottom	21100	2535	-1.380	0.006	100	1.00	22.79	23.00	1.050	0.006
	50%RB	Front	21100	2535	3.530	0.047	100	1.00	22.79	23.00	1.050	0.049
		Back	21100	2535	-4.400	0.062	100	1.00	22.79	23.00	1.050	0.065
		Left	21100	2535	-1.490	0.041	100	1.00	22.79	23.00	1.050	0.043
		Right	21100	2535	-0.610	0.013	100	1.00	22.79	23.00	1.050	0.014
		Top	21100	2535	0.330	0.048	100	1.00	22.79	23.00	1.050	0.050
		Bottom	21100	2535	-3.070	0.005	100	1.00	22.79	23.00	1.050	0.005

Report No.: WSCT-ANAB-R&E241100057A-SAR SAR Evaluation Report

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
7-n77 (BW: 20MHz)	1RB	Left Cheek	21100	2535	-2.080	0.369	100	1.00	24.31	24.50	1.045	0.386
		Left Tilt	21100	2535	4.310	0.124	100	1.00	24.31	24.50	1.045	0.130
		Right Cheek	21100	2535	-2.040	0.383	100	1.00	24.31	24.50	1.045	0.400
		Right Tilt	21100	2535	-0.870	0.136	100	1.00	24.31	24.50	1.045	0.142
	50%RB	Left Cheek	21100	2535	-0.570	0.306	100	1.00	24.31	24.50	1.045	0.320
		Left Tilt	21100	2535	4.320	0.096	100	1.00	24.31	24.50	1.045	0.100
		Right Cheek	21100	2535	-2.570	0.341	100	1.00	24.31	24.50	1.045	0.356
		Right Tilt	21100	2535	1.740	0.124	100	1.00	24.31	24.50	1.045	0.130
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
7-n77 (BW: 20MHz)	1RB	Front	21100	2535	-3.300	0.133	100	1.00	24.31	24.50	1.045	0.139
		Back	21100	2535	4.270	0.211	100	1.00	24.31	24.50	1.045	0.220
		Left	21100	2535	-4.690	0.099	100	1.00	24.31	24.50	1.045	0.103
		Right	21100	2535	-2.680	0.032	100	1.00	24.31	24.50	1.045	0.033
		Top	21100	2535	1.350	0.095	100	1.00	24.31	24.50	1.045	0.099
		Bottom	21100	2535	0.500	0.007	100	1.00	24.31	24.50	1.045	0.007
	50%RB	Front	21100	2535	0.220	0.125	100	1.00	24.31	24.50	1.045	0.131
		Back	21100	2535	1.110	0.202	100	1.00	24.31	24.50	1.045	0.211
		Left	21100	2535	-3.450	0.087	100	1.00	24.31	24.50	1.045	0.091
		Right	21100	2535	-4.280	0.023	100	1.00	24.31	24.50	1.045	0.024
		Top	21100	2535	-3.890	0.083	100	1.00	24.31	24.50	1.045	0.087
		Bottom	21100	2535	4.110	0.006	100	1.00	24.31	24.50	1.045	0.006

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
7-n78 (BW: 20MHz)	1RB	Left Cheek	21100	2535	-0.360	0.094	100	1.00	22.27	22.50	1.054	0.099
		Left Tilt	21100	2535	-0.750	0.148	100	1.00	22.27	22.50	1.054	0.156
		Right Cheek	21100	2535	3.480	0.066	100	1.00	22.27	22.50	1.054	0.070
		Right Tilt	21100	2535	0.070	0.097	100	1.00	22.27	22.50	1.054	0.102
	50%RB	Left Cheek	21100	2535	-2.690	0.081	100	1.00	22.27	22.50	1.054	0.085
		Left Tilt	21100	2535	-1.620	0.125	100	1.00	22.27	22.50	1.054	0.132
		Right Cheek	21100	2535	1.050	0.060	100	1.00	22.27	22.50	1.054	0.063
		Right Tilt	21100	2535	-1.490	0.089	100	1.00	22.27	22.50	1.054	0.094
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
7-n78 (BW: 20MHz)	1RB	Front	21100	2535	-0.060	0.054	100	1.00	22.27	22.50	1.054	0.057
		Back	21100	2535	4.510	0.067	100	1.00	22.27	22.50	1.054	0.071
		Left	21100	2535	3.920	0.002	100	1.00	22.27	22.50	1.054	0.002
		Right	21100	2535	0.750	0.036	100	1.00	22.27	22.50	1.054	0.038
		Top	21100	2535	-3.190	0.041	100	1.00	22.27	22.50	1.054	0.043
		Bottom	21100	2535	4.220	0.002	100	1.00	22.27	22.50	1.054	0.002
	50%RB	Front	21100	2535	0.460	0.042	100	1.00	22.27	22.50	1.054	0.044
		Back	21100	2535	-4.060	0.053	100	1.00	22.27	22.50	1.054	0.056
		Left	21100	2535	3.750	0.002	100	1.00	22.27	22.50	1.054	0.002
		Right	21100	2535	3.440	0.034	100	1.00	22.27	22.50	1.054	0.036
		Top	21100	2535	-4.610	0.040	100	1.00	22.27	22.50	1.054	0.042
		Bottom	21100	2535	-4.050	0.002	100	1.00	22.27	22.50	1.054	0.002

Report No.: WSCT-ANAB-R&E241100057A-SAR SAR Evaluation Report

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
38-n78 (BW: 20MHz)	1RB	Left Cheek	38225	2617.5	3.950	0.209	100	1.00	22.41	22.50	1.021	0.213
		Left Tilt	38225	2617.5	-4.100	0.176	100	1.00	22.41	22.50	1.021	0.180
		Right Cheek	38225	2617.5	-2.320	0.081	100	1.00	22.41	22.50	1.021	0.083
		Right Tilt	38225	2617.5	0.790	0.051	100	1.00	22.41	22.50	1.021	0.052
	50%RB	Left Cheek	38225	2617.5	-2.870	0.174	100	1.00	22.41	22.50	1.021	0.178
		Left Tilt	38225	2617.5	0.720	0.154	100	1.00	22.41	22.50	1.021	0.157
		Right Cheek	38225	2617.5	4.870	0.071	100	1.00	22.41	22.50	1.021	0.072
		Right Tilt	38225	2617.5	-4.040	0.039	100	1.00	22.41	22.50	1.021	0.040
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
38-n78 (BW: 20MHz)	1RB	Front	38225	2617.5	3.380	0.056	100	1.00	22.41	22.50	1.021	0.057
		Back	38225	2617.5	-4.950	0.076	100	1.00	22.41	22.50	1.021	0.078
		Left	38225	2617.5	0.190	0.035	100	1.00	22.41	22.50	1.021	0.036
		Right	38225	2617.5	-2.170	0.032	100	1.00	22.41	22.50	1.021	0.033
		Top	38225	2617.5	2.740	0.052	100	1.00	22.41	22.50	1.021	0.053
		Bottom	38225	2617.5	0.130	0.002	100	1.00	22.41	22.50	1.021	0.002
	50%RB	Front	38225	2617.5	-4.020	0.045	100	1.00	22.41	22.50	1.021	0.046
		Back	38225	2617.5	-2.140	0.063	100	1.00	22.41	22.50	1.021	0.064
		Left	38225	2617.5	-1.150	0.025	100	1.00	22.41	22.50	1.021	0.026
		Right	38225	2617.5	-2.730	0.020	100	1.00	22.41	22.50	1.021	0.020
		Top	38225	2617.5	-1.570	0.041	100	1.00	22.41	22.50	1.021	0.042
		Bottom	38225	2617.5	2.860	0.002	100	1.00	22.41	22.50	1.021	0.002

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
41-n41 (BW: 20MHz)	1RB	Left Cheek	41565	2687.5	3.540	0.065	100	1.00	23.60	24.00	1.096	0.071
		Left Tilt	41565	2687.5	0.550	0.079	100	1.00	23.60	24.00	1.096	0.087
		Right Cheek	41565	2687.5	3.930	0.038	100	1.00	23.60	24.00	1.096	0.042
		Right Tilt	41565	2687.5	3.950	0.049	100	1.00	23.60	24.00	1.096	0.054
	50%RB	Left Cheek	41565	2687.5	1.190	0.059	100	1.00	23.60	24.00	1.096	0.065
		Left Tilt	41565	2687.5	1.030	0.065	100	1.00	23.60	24.00	1.096	0.071
		Right Cheek	41565	2687.5	0.840	0.031	100	1.00	23.60	24.00	1.096	0.034
		Right Tilt	41565	2687.5	3.380	0.038	100	1.00	23.60	24.00	1.096	0.042
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
41-n41 (BW: 20MHz)	1RB	Front	41565	2687.5	3.150	0.035	100	1.00	23.60	24.00	1.096	0.038
		Back	41565	2687.5	0.410	0.048	100	1.00	23.60	24.00	1.096	0.053
		Left	41565	2687.5	2.850	0.010	100	1.00	23.60	24.00	1.096	0.011
		Right	41565	2687.5	2.780	0.031	100	1.00	23.60	24.00	1.096	0.034
		Top	41565	2687.5	-2.390	0.027	100	1.00	23.60	24.00	1.096	0.030
		Bottom	41565	2687.5	3.050	0.002	100	1.00	23.60	24.00	1.096	0.002
	50%RB	Front	41565	2687.5	-0.160	0.031	100	1.00	23.60	24.00	1.096	0.034
		Back	41565	2687.5	-0.720	0.039	100	1.00	23.60	24.00	1.096	0.043
		Left	41565	2687.5	-2.870	0.007	100	1.00	23.60	24.00	1.096	0.008
		Right	41565	2687.5	0.050	0.023	100	1.00	23.60	24.00	1.096	0.025
		Top	41565	2687.5	0.690	0.020	100	1.00	23.60	24.00	1.096	0.022
		Bottom	41565	2687.5	-2.270	0.002	100	1.00	23.60	24.00	1.096	0.002

Report No.: WSCT-ANAB-R&E241100057A-SAR SAR Evaluation Report

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
41-n77 (BW: 20MHz)	1RB	Left Cheek	41565	2687.5	-4.520	0.058	100	1.00	24.49	24.50	1.002	0.058
		Left Tilt	41565	2687.5	-4.460	0.072	100	1.00	24.49	24.50	1.002	0.072
		Right Cheek	41565	2687.5	3.160	0.038	100	1.00	24.49	24.50	1.002	0.038
		Right Tilt	41565	2687.5	4.460	0.047	100	1.00	24.49	24.50	1.002	0.047
	50%RB	Left Cheek	41565	2687.5	-3.440	0.049	100	1.00	24.49	24.50	1.002	0.049
		Left Tilt	41565	2687.5	-2.650	0.066	100	1.00	24.49	24.50	1.002	0.066
		Right Cheek	41565	2687.5	-1.250	0.031	100	1.00	24.49	24.50	1.002	0.031
		Right Tilt	41565	2687.5	-4.240	0.040	100	1.00	24.49	24.50	1.002	0.040
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
41-n77 (BW: 20MHz)	1RB	Front	41565	2687.5	-2.690	0.037	100	1.00	24.49	24.50	1.002	0.037
		Back	41565	2687.5	-4.810	0.050	100	1.00	24.49	24.50	1.002	0.050
		Left	41565	2687.5	-1.250	0.008	100	1.00	24.49	24.50	1.002	0.008
		Right	41565	2687.5	-4.070	0.027	100	1.00	24.49	24.50	1.002	0.027
		Top	41565	2687.5	1.450	0.024	100	1.00	24.49	24.50	1.002	0.024
		Bottom	41565	2687.5	-3.140	0.002	100	1.00	24.49	24.50	1.002	0.002
	50%RB	Front	41565	2687.5	1.650	0.031	100	1.00	24.49	24.50	1.002	0.031
		Back	41565	2687.5	0.870	0.042	100	1.00	24.49	24.50	1.002	0.042
		Left	41565	2687.5	0.570	0.009	100	1.00	24.49	24.50	1.002	0.009
		Right	41565	2687.5	-1.230	0.025	100	1.00	24.49	24.50	1.002	0.025
		Top	41565	2687.5	1.310	0.024	100	1.00	24.49	24.50	1.002	0.024
		Bottom	41565	2687.5	-1.250	0.002	100	1.00	24.49	24.50	1.002	0.002

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
41-n78 (BW: 20MHz)	1RB	Left Cheek	41565	2687.5	-2.540	0.205	100	1.00	22.18	22.50	1.076	0.221
		Left Tilt	41565	2687.5	-0.320	0.151	100	1.00	22.18	22.50	1.076	0.163
		Right Cheek	41565	2687.5	-0.630	0.109	100	1.00	22.18	22.50	1.076	0.117
		Right Tilt	41565	2687.5	0.880	0.067	100	1.00	22.18	22.50	1.076	0.072
	50%RB	Left Cheek	41565	2687.5	4.080	0.179	100	1.00	22.18	22.50	1.076	0.193
		Left Tilt	41565	2687.5	-1.500	0.134	100	1.00	22.18	22.50	1.076	0.144
		Right Cheek	41565	2687.5	4.130	0.073	100	1.00	22.18	22.50	1.076	0.079
		Right Tilt	41565	2687.5	4.450	0.054	100	1.00	22.18	22.50	1.076	0.058
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
41-n78 (BW: 20MHz)	1RB	Front	41565	2687.5	-3.070	0.063	100	1.00	22.18	22.50	1.076	0.068
		Back	41565	2687.5	-0.720	0.078	100	1.00	22.18	22.50	1.076	0.084
		Left	41565	2687.5	-2.870	0.022	100	1.00	22.18	22.50	1.076	0.024
		Right	41565	2687.5	-4.240	0.058	100	1.00	22.18	22.50	1.076	0.062
		Top	41565	2687.5	0.690	0.063	100	1.00	22.18	22.50	1.076	0.068
		Bottom	41565	2687.5	3.750	0.005	100	1.00	22.18	22.50	1.076	0.005
	50%RB	Front	41565	2687.5	4.550	0.050	100	1.00	22.18	22.50	1.076	0.054
		Back	41565	2687.5	-4.000	0.063	100	1.00	22.18	22.50	1.076	0.068
		Left	41565	2687.5	-3.360	0.011	100	1.00	22.18	22.50	1.076	0.012
		Right	41565	2687.5	3.390	0.044	100	1.00	22.18	22.50	1.076	0.047
		Top	41565	2687.5	4.740	0.049	100	1.00	22.18	22.50	1.076	0.053
		Bottom	41565	2687.5	1.390	0.002	100	1.00	22.18	22.50	1.076	0.002

Report No.: WSCT-ANAB-R&E241100057A-SAR SAR Evaluation Report

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
66-n7 (BW: 20MHz)	1RB	Left Cheek	132072	1717.5	-1.440	0.074	100	1.00	22.22	22.50	1.067	0.079
		Left Tilt	132072	1717.5	1.890	0.144	100	1.00	22.22	22.50	1.067	0.154
		Right Cheek	132072	1717.5	-1.580	0.211	100	1.00	22.22	22.50	1.067	0.225
		Right Tilt	132072	1717.5	-2.750	0.264	100	1.00	22.22	22.50	1.067	0.282
	50%RB	Left Cheek	132072	1717.5	4.940	0.071	100	1.00	22.22	22.50	1.067	0.076
		Left Tilt	132072	1717.5	4.160	0.126	100	1.00	22.22	22.50	1.067	0.134
		Right Cheek	132072	1717.5	1.540	0.203	100	1.00	22.22	22.50	1.067	0.217
		Right Tilt	132072	1717.5	-2.730	0.239	100	1.00	22.22	22.50	1.067	0.255
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
66-n7 (BW: 20MHz)	1RB	Front	132072	1717.5	4.000	0.097	100	1.00	22.22	22.50	1.067	0.103
		Back	132072	1717.5	-4.220	0.153	100	1.00	22.22	22.50	1.067	0.163
		Left	132072	1717.5	1.720	0.106	100	1.00	22.22	22.50	1.067	0.113
		Right	132072	1717.5	-3.220	0.024	100	1.00	22.22	22.50	1.067	0.026
		Top	132072	1717.5	4.240	0.091	100	1.00	22.22	22.50	1.067	0.097
		Bottom	132072	1717.5	-0.020	0.002	100	1.00	22.22	22.50	1.067	0.002
	50%RB	Front	132072	1717.5	2.540	0.094	100	1.00	22.22	22.50	1.067	0.100
		Back	132072	1717.5	1.650	0.136	100	1.00	22.22	22.50	1.067	0.145
		Left	132072	1717.5	-0.050	0.096	100	1.00	22.22	22.50	1.067	0.102
		Right	132072	1717.5	-4.970	0.021	100	1.00	22.22	22.50	1.067	0.022
		Top	132072	1717.5	-1.670	0.045	100	1.00	22.22	22.50	1.067	0.048
		Bottom	132072	1717.5	0.840	0.002	100	1.00	22.22	22.50	1.067	0.002

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
66-n38 (BW: 20MHz)	1RB	Left Cheek	132072	1717.5	2.020	0.130	100	1.00	23.01	23.50	1.119	0.146
		Left Tilt	132072	1717.5	0.840	0.153	100	1.00	23.01	23.50	1.119	0.171
		Right Cheek	132072	1717.5	-0.770	0.226	100	1.00	23.01	23.50	1.119	0.253
		Right Tilt	132072	1717.5	4.060	0.275	100	1.00	23.01	23.50	1.119	0.308
	50%RB	Left Cheek	132072	1717.5	2.760	0.120	100	1.00	23.01	23.50	1.119	0.134
		Left Tilt	132072	1717.5	1.140	0.141	100	1.00	23.01	23.50	1.119	0.158
		Right Cheek	132072	1717.5	-4.900	0.209	100	1.00	23.01	23.50	1.119	0.234
		Right Tilt	132072	1717.5	0.850	0.263	100	1.00	23.01	23.50	1.119	0.294
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
66-n38 (BW: 20MHz)	1RB	Front	132072	1717.5	0.390	0.053	100	1.00	23.01	23.50	1.119	0.059
		Back	132072	1717.5	-4.410	0.069	100	1.00	23.01	23.50	1.119	0.077
		Left	132072	1717.5	3.660	0.041	100	1.00	23.01	23.50	1.119	0.046
		Right	132072	1717.5	0.080	0.017	100	1.00	23.01	23.50	1.119	0.019
		Top	132072	1717.5	4.700	0.056	100	1.00	23.01	23.50	1.119	0.063
		Bottom	132072	1717.5	4.160	0.002	100	1.00	23.01	23.50	1.119	0.002
	50%RB	Front	132072	1717.5	-4.240	0.049	100	1.00	23.01	23.50	1.119	0.055
		Back	132072	1717.5	-2.780	0.062	100	1.00	23.01	23.50	1.119	0.069
		Left	132072	1717.5	1.010	0.039	100	1.00	23.01	23.50	1.119	0.044
		Right	132072	1717.5	-4.640	0.015	100	1.00	23.01	23.50	1.119	0.017
		Top	132072	1717.5	3.450	0.053	100	1.00	23.01	23.50	1.119	0.059
		Bottom	132072	1717.5	-1.790	0.002	100	1.00	23.01	23.50	1.119	0.002

Report No.: WSCT-ANAB-R&E241100057A-SAR SAR Evaluation Report

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
66-n41 (BW: 20MHz)	1RB	Left Cheek	132072	1717.5	2.960	0.043	100	1.00	22.66	23.00	1.081	0.047
		Left Tilt	132072	1717.5	-1.780	0.068	100	1.00	22.66	23.00	1.081	0.074
		Right Cheek	132072	1717.5	4.260	0.060	100	1.00	22.66	23.00	1.081	0.065
		Right Tilt	132072	1717.5	4.220	0.106	100	1.00	22.66	23.00	1.081	0.115
	50%RB	Left Cheek	132072	1717.5	-0.440	0.038	100	1.00	22.66	23.00	1.081	0.041
		Left Tilt	132072	1717.5	-1.760	0.061	100	1.00	22.66	23.00	1.081	0.066
		Right Cheek	132072	1717.5	-2.850	0.056	100	1.00	22.66	23.00	1.081	0.061
		Right Tilt	132072	1717.5	4.120	0.094	100	1.00	22.66	23.00	1.081	0.102
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
66-n41 (BW: 20MHz)	1RB	Front	132072	1717.5	-2.730	0.025	100	1.00	22.66	23.00	1.081	0.027
		Back	132072	1717.5	-4.550	0.034	100	1.00	22.66	23.00	1.081	0.037
		Left	132072	1717.5	-0.460	0.015	100	1.00	22.66	23.00	1.081	0.016
		Right	132072	1717.5	3.910	0.002	100	1.00	22.66	23.00	1.081	0.002
		Top	132072	1717.5	2.470	0.018	100	1.00	22.66	23.00	1.081	0.019
		Bottom	132072	1717.5	0.680	0.002	100	1.00	22.66	23.00	1.081	0.002
	50%RB	Front	132072	1717.5	1.160	0.019	100	1.00	22.66	23.00	1.081	0.021
		Back	132072	1717.5	-2.060	0.028	100	1.00	22.66	23.00	1.081	0.030
		Left	132072	1717.5	-3.190	0.013	100	1.00	22.66	23.00	1.081	0.014
		Right	132072	1717.5	-0.820	0.002	100	1.00	22.66	23.00	1.081	0.002
		Top	132072	1717.5	-0.260	0.015	100	1.00	22.66	23.00	1.081	0.016
		Bottom	132072	1717.5	2.810	0.002	100	1.00	22.66	23.00	1.081	0.002

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
66-n66 (BW: 20MHz)	1RB	Left Cheek	132072	1717.5	0.420	0.054	100	1.00	23.80	24.00	1.047	0.057
		Left Tilt	132072	1717.5	1.040	0.076	100	1.00	23.80	24.00	1.047	0.080
		Right Cheek	132072	1717.5	2.760	0.122	100	1.00	23.80	24.00	1.047	0.128
		Right Tilt	132072	1717.5	1.380	0.186	100	1.00	23.80	24.00	1.047	0.195
	50%RB	Left Cheek	132072	1717.5	-1.250	0.045	100	1.00	23.80	24.00	1.047	0.047
		Left Tilt	132072	1717.5	-2.490	0.068	100	1.00	23.80	24.00	1.047	0.071
		Right Cheek	132072	1717.5	-3.990	0.115	100	1.00	23.80	24.00	1.047	0.120
		Right Tilt	132072	1717.5	-4.270	0.172	100	1.00	23.80	24.00	1.047	0.180
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
66-n66 (BW: 20MHz)	1RB	Front	132072	1717.5	4.060	0.064	100	1.00	23.80	24.00	1.047	0.067
		Back	132072	1717.5	-3.580	0.075	100	1.00	23.80	24.00	1.047	0.079
		Left	132072	1717.5	2.740	0.056	100	1.00	23.80	24.00	1.047	0.059
		Right	132072	1717.5	4.420	0.014	100	1.00	23.80	24.00	1.047	0.015
		Top	132072	1717.5	1.620	0.063	100	1.00	23.80	24.00	1.047	0.066
		Bottom	132072	1717.5	-3.400	0.004	100	1.00	23.80	24.00	1.047	0.004
	50%RB	Front	132072	1717.5	4.550	0.055	100	1.00	23.80	24.00	1.047	0.058
		Back	132072	1717.5	1.690	0.065	100	1.00	23.80	24.00	1.047	0.068
		Left	132072	1717.5	-0.500	0.046	100	1.00	23.80	24.00	1.047	0.048
		Right	132072	1717.5	1.930	0.010	100	1.00	23.80	24.00	1.047	0.010
		Top	132072	1717.5	-4.640	0.060	100	1.00	23.80	24.00	1.047	0.063
		Bottom	132072	1717.5	4.190	0.003	100	1.00	23.80	24.00	1.047	0.003

Report No.: WSCT-ANAB-R&E241100057A-SAR SAR Evaluation Report

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
66-n77 (BW: 20MHz)	1RB	Left Cheek	132072	1717.5	4.190	0.064	100	1.00	24.30	24.50	1.047	0.067
		Left Tilt	132072	1717.5	4.700	0.048	100	1.00	24.30	24.50	1.047	0.050
		Right Cheek	132072	1717.5	1.530	0.045	100	1.00	24.30	24.50	1.047	0.047
		Right Tilt	132072	1717.5	4.760	0.031	100	1.00	24.30	24.50	1.047	0.032
	50%RB	Left Cheek	132072	1717.5	-0.100	0.058	100	1.00	24.30	24.50	1.047	0.061
		Left Tilt	132072	1717.5	-2.370	0.037	100	1.00	24.30	24.50	1.047	0.039
		Right Cheek	132072	1717.5	-3.230	0.032	100	1.00	24.30	24.50	1.047	0.034
		Right Tilt	132072	1717.5	0.110	0.022	100	1.00	24.30	24.50	1.047	0.023
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
66-n77 (BW: 20MHz)	1RB	Front	132072	1717.5	-0.440	0.023	100	1.00	24.30	24.50	1.047	0.024
		Back	132072	1717.5	-4.630	0.034	100	1.00	24.30	24.50	1.047	0.036
		Left	132072	1717.5	-0.340	0.003	100	1.00	24.30	24.50	1.047	0.003
		Right	132072	1717.5	2.130	0.017	100	1.00	24.30	24.50	1.047	0.018
		Top	132072	1717.5	-3.560	0.024	100	1.00	24.30	24.50	1.047	0.025
		Bottom	132072	1717.5	0.260	0.002	100	1.00	24.30	24.50	1.047	0.002
	50%RB	Front	132072	1717.5	2.750	0.020	100	1.00	24.30	24.50	1.047	0.021
		Back	132072	1717.5	-1.000	0.029	100	1.00	24.30	24.50	1.047	0.030
		Left	132072	1717.5	-2.290	0.002	100	1.00	24.30	24.50	1.047	0.002
		Right	132072	1717.5	-3.680	0.012	100	1.00	24.30	24.50	1.047	0.013
		Top	132072	1717.5	-0.840	0.019	100	1.00	24.30	24.50	1.047	0.020
		Bottom	132072	1717.5	4.810	0.002	100	1.00	24.30	24.50	1.047	0.002

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
66-n78 (BW: 20MHz)	1RB	Left Cheek	132072	1717.5	-2.720	0.129	100	1.00	22.19	22.50	1.074	0.139
		Left Tilt	132072	1717.5	4.170	0.178	100	1.00	22.19	22.50	1.074	0.191
		Right Cheek	132072	1717.5	-4.480	0.116	100	1.00	22.19	22.50	1.074	0.125
		Right Tilt	132072	1717.5	1.500	0.152	100	1.00	22.19	22.50	1.074	0.163
	50%RB	Left Cheek	132072	1717.5	4.150	0.098	100	1.00	22.19	22.50	1.074	0.105
		Left Tilt	132072	1717.5	-2.240	0.137	100	1.00	22.19	22.50	1.074	0.147
		Right Cheek	132072	1717.5	3.450	0.082	100	1.00	22.19	22.50	1.074	0.088
		Right Tilt	132072	1717.5	4.350	0.116	100	1.00	22.19	22.50	1.074	0.125
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
66-n78 (BW: 20MHz)	1RB	Front	132072	1717.5	3.700	0.045	100	1.00	22.19	22.50	1.074	0.048
		Back	132072	1717.5	-2.080	0.055	100	1.00	22.19	22.50	1.074	0.059
		Left	132072	1717.5	-4.860	0.009	100	1.00	22.19	22.50	1.074	0.010
		Right	132072	1717.5	-4.180	0.038	100	1.00	22.19	22.50	1.074	0.041
		Top	132072	1717.5	2.280	0.049	100	1.00	22.19	22.50	1.074	0.053
		Bottom	132072	1717.5	1.410	0.003	100	1.00	22.19	22.50	1.074	0.003
	50%RB	Front	132072	1717.5	2.440	0.039	100	1.00	22.19	22.50	1.074	0.042
		Back	132072	1717.5	2.750	0.050	100	1.00	22.19	22.50	1.074	0.054
		Left	132072	1717.5	-0.690	0.009	100	1.00	22.19	22.50	1.074	0.010
		Right	132072	1717.5	-0.500	0.032	100	1.00	22.19	22.50	1.074	0.034
		Top	132072	1717.5	-0.090	0.040	100	1.00	22.19	22.50	1.074	0.043
		Bottom	132072	1717.5	-2.310	0.002	100	1.00	22.19	22.50	1.074	0.002

Results overview of Wifi

Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
2.4g (2.4~2.4835) 802.11b	Left Cheek	6	2437	-3.750	0.062	100	1.00	19.61	20.00	1.094	0.068
	Left Tilt	6	2437	-2.500	0.075	100	1.00	19.61	20.00	1.094	0.082
	Right Cheek	6	2437	-1.750	0.099	100	1.00	19.61	20.00	1.094	0.108
	Right Tilt	6	2437	-4.500	0.129	100	1.00	19.61	20.00	1.094	0.141
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
2.4g (2.4~2.4835) 802.11b	Front	6	2437	-0.025	0.019	100	1.00	19.61	20.00	1.094	0.021
	Back	6	2437	-4.750	0.038	100	1.00	19.61	20.00	1.094	0.042
	Left	6	2437	0.750	0.021	100	1.00	19.61	20.00	1.094	0.023
	Right	6	2437	-1.750	0.022	100	1.00	19.61	20.00	1.094	0.024
	Top	6	2437	-2.000	0.027	100	1.00	19.61	20.00	1.094	0.030
	Bottom	6	2437	-1.500	0.002	100	1.00	19.61	20.00	1.094	0.002

Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
5g Band1 5180-5240	Left Cheek	48	5240	-2.000	0.091	100	1.00	11.71	12.00	1.069	0.097
	Left Tilt	48	5240	-3.750	0.156	100	1.00	11.71	12.00	1.069	0.167
	Right Cheek	48	5240	-4.250	0.052	100	1.00	11.71	12.00	1.069	0.056
	Right Tilt	48	5240	-2.500	0.073	100	1.00	11.71	12.00	1.069	0.078
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
5g Band1 5180-5240	Front	48	5240	-4.750	0.032	100	1.00	11.71	12.00	1.069	0.034
	Back	48	5240	-4.500	0.056	100	1.00	11.71	12.00	1.069	0.060
	Left	48	5240	3.250	0.009	100	1.00	11.71	12.00	1.069	0.010
	Right	48	5240	-1.750	0.030	100	1.00	11.71	12.00	1.069	0.032
	Top	48	5240	-3.000	0.036	100	1.00	11.71	12.00	1.069	0.038
	Bottom	48	5240	-4.250	0.004	100	1.00	11.71	12.00	1.069	0.004

Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
5g Band2 5260-5320	Left Cheek	54	5270	-4.000	0.102	100	1.00	11.94	12.00	1.014	0.103
	Left Tilt	54	5270	-4.750	0.166	100	1.00	11.94	12.00	1.014	0.168
	Right Cheek	54	5270	-3.250	0.058	100	1.00	11.94	12.00	1.014	0.059
	Right Tilt	54	5270	-1.500	0.079	100	1.00	11.94	12.00	1.014	0.080
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
5g Band2 5260-5320	Front	54	5270	0.500	0.063	100	1.00	11.94	12.00	1.014	0.064
	Back	54	5270	-2.000	0.091	100	1.00	11.94	12.00	1.014	0.092
	Left	54	5270	0.500	0.048	100	1.00	11.94	12.00	1.014	0.049
	Right	54	5270	-1.750	0.056	100	1.00	11.94	12.00	1.014	0.057
	Top	54	5270	-3.250	0.070	100	1.00	11.94	12.00	1.014	0.071
	Bottom	54	5270	3.750	0.010	100	1.00	11.94	12.00	1.014	0.010

Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
5g Band3 5500-5700	Left Cheek	168	5700	-1.750	0.109	100	1.00	11.67	12.00	1.079	0.118
	Left Tilt	168	5700	-0.250	0.162	100	1.00	11.67	12.00	1.079	0.175
	Right Cheek	168	5700	-0.500	0.061	100	1.00	11.67	12.00	1.079	0.066
	Right Tilt	168	5700	-4.000	0.082	100	1.00	11.67	12.00	1.079	0.088
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
5g Band3 5500-5700	Front	168	5700	-4.750	0.030	100	1.00	11.67	12.00	1.079	0.032
	Back	168	5700	-3.250	0.052	100	1.00	11.67	12.00	1.079	0.056
	Left	168	5700	1.500	0.016	100	1.00	11.67	12.00	1.079	0.017
	Right	168	5700	-3.250	0.037	100	1.00	11.67	12.00	1.079	0.040
	Top	168	5700	2.500	0.043	100	1.00	11.67	12.00	1.079	0.046
	Bottom	168	5700	-0.500	0.005	100	1.00	11.67	12.00	1.079	0.005

Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
5g Band4 5745-5825	Left Cheek	149	5745	-0.500	0.103	100	1.00	11.37	11.50	1.030	0.106
	Left Tilt	149	5745	-4.500	0.139	100	1.00	11.37	11.50	1.030	0.143
	Right Cheek	149	5745	-1.500	0.061	100	1.00	11.37	11.50	1.030	0.063
	Right Tilt	149	5745	-1.750	0.096	100	1.00	11.37	11.50	1.030	0.099
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
5g Band4 5745-5825	Front	149	5745	-4.500	0.018	100	1.00	11.37	11.50	1.030	0.019
	Back	149	5745	-4.750	0.046	100	1.00	11.37	11.50	1.030	0.047
	Left	149	5745	0.750	0.013	100	1.00	11.37	11.50	1.030	0.013
	Right	149	5745	3.750	0.025	100	1.00	11.37	11.50	1.030	0.026
	Top	149	5745	-0.250	0.034	100	1.00	11.37	11.50	1.030	0.035
	Bottom	149	5745	-1.750	0.004	100	1.00	11.37	11.50	1.030	0.004


Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Bluetooth	Left Cheek	39	2441	0.250	0.043	100	1.00	4.24	4.50	1.062	0.046
	Left Tilt	39	2441	-3.500	0.062	100	1.00	4.24	4.50	1.062	0.066
	Right Cheek	39	2441	-2.250	0.067	100	1.00	4.24	4.50	1.062	0.071
	Right Tilt	39	2441	-1.250	0.092	100	1.00	4.24	4.50	1.062	0.098
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Bluetooth	Front	39	2441	-0.750	0.015	100	1.00	4.24	4.50	1.062	0.016
	Back	39	2441	-0.250	0.026	100	1.00	4.24	4.50	1.062	0.028
	Left	39	2441	-1.750	0.011	100	1.00	4.24	4.50	1.062	0.012
	Right	39	2441	2.000	0.002	100	1.00	4.24	4.50	1.062	0.002
	Top	39	2441	1.250	0.016	100	1.00	4.24	4.50	1.062	0.017
	Bottom	39	2441	-3.000	0.002	100	1.00	4.24	4.50	1.062	0.002

Note:

- 1.The maximum SAR Value of each test band is marked bold.
- 2.SAR plot is provided only for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination.
- 3.Per KDB 447498 D01 v06, for each exposure position, if the highest output power channel Reported SAR $\leq 0.8\text{W/kg}$, other channels SAR testing is not necessary.
- 4.Per KDB 447498 D01 v06, head/body-worn use is evaluated with the device positioned at 0mm/10 mm from a head/flat phantom respectively filled with head tissue-equivalent medium.
- 5.Per KDB Publication 941225 D06 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 mm from the front, back and edges of the device with antennas 2.5 cm or closer to the edge of the device, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.
- 6.Per KDB 447498 D01 v06, the report SAR is measured SAR value adjusted for maximum tune-up tolerance. Scaling Factor= $10^{[(\text{tune-up limit power(dBm)} - \text{Ave.power power (dBm)})/10]}$, where tune-up limit is the maximum rated power among all production units.
- 7.Reported SAR(W/kg)=Measured SAR (W/kg)*Scaling Factor.

11 Multiple Transmitter Information

The SAR measurement positions of each side are as below:

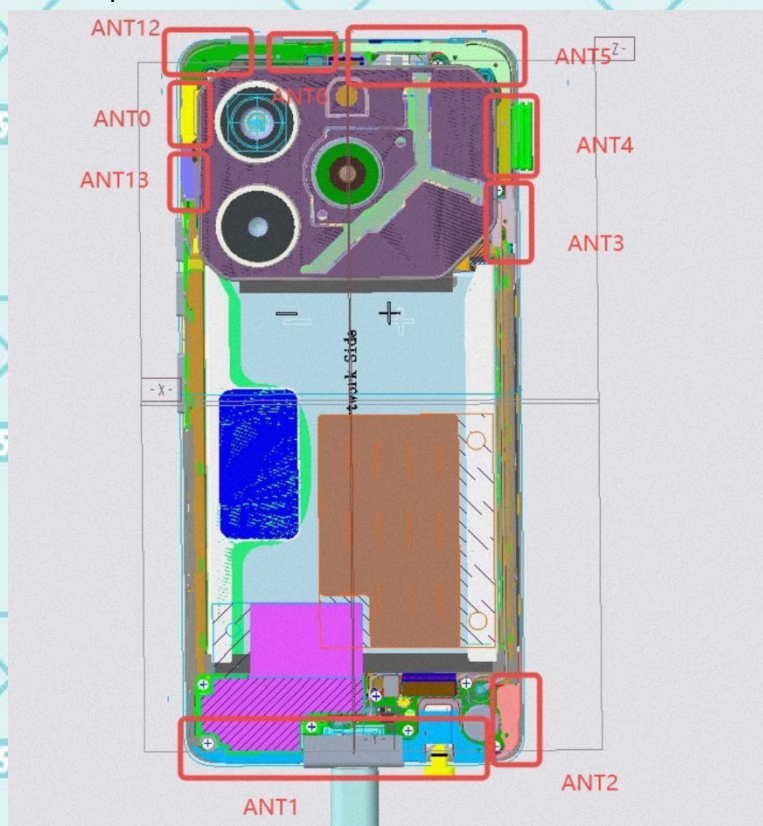

< Rear Side >

Mode	Front side	Rear side	Left side	Right side	Top side	Bottom side
2G/3G/4G /5G Antenna	Yes	Yes	Yes	Yes	Yes	Yes
Wi-Fi/BT Antenna	Yes	Yes	Yes	Yes	Yes	Yes

- 1) Per KDB941225 D06v01r01, the DUT Dimension is bigger than 9 cm x 5 cm, so 10mm is chosen as the test separation distance for Hotspot mode.
When the antenna-to-edge distance is greater than 2.5cm,such position does not need to be tested.

11.1 Simultaneous Transmission Possibilities

The Simultaneous Transmission Possibilities are as below:

Simultaneous Transmission Possibilities				
Simultaneous Tx Combination	Configuration	Head	Body	Hotspot
1	GSM/GPRS/UMTS/LTE/NR +Wi-Fi	YES	YES	YES
2	GSM/GPRS/UMTS/LTE/NR +BT	YES	YES	YES

Note: The device does not support simultaneous BT and Wi-Fi ,because the BT and Wi-Fi share the same antenna and can't transmit simultaneously.

11.1.1 SAR Summation Scenario

Head

Band	Test Position	Scaled SAR			BT SAR 1g(W/kg)	Σ SAR (W/kg)	Llimit (W/kg)
		WWAN SAR 1g(W/kg)	WIFI2.4G SAR 1g(W/kg)	Wi-Fi 5G(Band 3) SAR 1g(W/kg)			
GSM850 (voice)	Left Cheek	0.183	0.068	0.118	0.046	0.301	1.6
	Left Tilt	0.300	0.082	0.175	0.066	0.475	
	Right Cheek	0.515	0.108	0.066	0.071	0.623	
	Right Tilt	0.784	0.141	0.088	0.098	0.925	
GSM1900 (voice)	Left Cheek	0.256	0.068	0.118	0.046	0.374	
	Left Tilt	0.388	0.082	0.175	0.066	0.563	
	Right Cheek	0.450	0.108	0.066	0.071	0.558	
	Right Tilt	0.723	0.141	0.088	0.098	0.864	
WCDMA Band 2	Left Cheek	0.039	0.068	0.118	0.046	0.157	
	Left Tilt	0.063	0.082	0.175	0.066	0.238	
	Right Cheek	0.076	0.108	0.066	0.071	0.184	
	Right Tilt	0.131	0.141	0.088	0.098	0.272	
WCDMA Band 4	Left Cheek	0.096	0.068	0.118	0.046	0.214	
	Left Tilt	0.149	0.082	0.175	0.066	0.324	
	Right Cheek	0.200	0.108	0.066	0.071	0.308	
	Right Tilt	0.331	0.141	0.088	0.098	0.472	
WCDMA Band 5	Left Cheek	0.212	0.068	0.118	0.046	0.330	
	Left Tilt	0.309	0.082	0.175	0.066	0.484	
	Right Cheek	0.492	0.108	0.066	0.071	0.600	
	Right Tilt	0.608	0.141	0.088	0.098	0.749	

Report No.: WSCT-ANAB-R&E241100057A-SAR SAR Evaluation Report

Band	Test Position	Scaled SAR				BT SAR 1g(W/kg)	Σ SAR (W/kg)	Llimit (W/kg)
		RB allocation	WWAN SAR 1g(W/kg)	WIFI2.4G SAR 1g(W/kg)	Wi-Fi 5G(Band 3) 1g(W/kg)			
LTE Band 2 QPSK (20MHz)	Left Cheek	1RB	0.080	0.068	0.118	0.046	0.198	1.6
	Left Tilt		0.130	0.082	0.175	0.066	0.305	
	Right Cheek		0.178	0.108	0.066	0.071	0.286	
	Right Tilt		0.344	0.141	0.088	0.098	0.485	
	Left Cheek	50%RB	0.072	0.068	0.118	0.046	0.190	
	Left Tilt		0.111	0.082	0.175	0.066	0.286	
	Right Cheek		0.163	0.108	0.066	0.071	0.271	
	Right Tilt		0.316	0.141	0.088	0.098	0.457	
LTE Band 4 QPSK (20MHz)	Left Cheek	1RB	0.070	0.068	0.118	0.046	0.188	
	Left Tilt		0.114	0.082	0.175	0.066	0.289	
	Right Cheek		0.152	0.108	0.066	0.071	0.260	
	Right Tilt		0.329	0.141	0.088	0.098	0.470	
	Left Cheek	50%RB	0.065	0.068	0.118	0.046	0.183	
	Left Tilt		0.098	0.082	0.175	0.066	0.273	
	Right Cheek		0.154	0.108	0.066	0.071	0.262	
	Right Tilt		0.293	0.141	0.088	0.098	0.434	
LTE Band 5 QPSK (10MHz)	Left Cheek	1RB	0.050	0.068	0.118	0.046	0.168	
	Left Tilt		0.070	0.082	0.175	0.066	0.245	
	Right Cheek		0.100	0.108	0.066	0.071	0.208	
	Right Tilt		0.138	0.141	0.088	0.098	0.279	
	Left Cheek	50%RB	0.038	0.068	0.118	0.046	0.156	
	Left Tilt		0.062	0.082	0.175	0.066	0.237	
	Right Cheek		0.090	0.108	0.066	0.071	0.198	
	Right Tilt		0.130	0.141	0.088	0.098	0.271	
LTE Band 7 QPSK (10MHz)	Left Cheek	1RB	0.130	0.068	0.118	0.046	0.248	
	Left Tilt		0.180	0.082	0.175	0.066	0.355	
	Right Cheek		0.245	0.108	0.066	0.071	0.353	
	Right Tilt		0.350	0.141	0.088	0.098	0.491	
	Left Cheek	50%RB	0.094	0.068	0.118	0.046	0.212	
	Left Tilt		0.154	0.082	0.175	0.066	0.329	
	Right Cheek		0.219	0.108	0.066	0.071	0.327	
	Right Tilt		0.308	0.141	0.088	0.098	0.449	
LTE Band 12 QPSK (10MHz)	Left Cheek	1RB	0.110	0.068	0.118	0.046	0.228	
	Left Tilt		0.152	0.082	0.175	0.066	0.327	
	Right Cheek		0.171	0.108	0.066	0.071	0.279	
	Right Tilt		0.377	0.141	0.088	0.098	0.518	
	Left Cheek	50%RB	0.087	0.068	0.118	0.046	0.205	
	Left Tilt		0.120	0.082	0.175	0.066	0.295	
	Right Cheek		0.145	0.108	0.066	0.071	0.253	
	Right Tilt		0.352	0.141	0.088	0.098	0.493	
LTE Band 13 QPSK (10MHz)	Left Cheek	1RB	0.178	0.068	0.118	0.046	0.296	
	Left Tilt		0.235	0.082	0.175	0.066	0.410	
	Right Cheek		0.636	0.108	0.066	0.071	0.744	
	Right Tilt		0.777	0.141	0.088	0.098	0.918	
	Left Cheek	50%RB	0.147	0.068	0.118	0.046	0.265	
	Left Tilt		0.217	0.082	0.175	0.066	0.392	
	Right Cheek		0.578	0.108	0.066	0.071	0.686	
	Right Tilt		0.699	0.141	0.088	0.098	0.840	
LTE Band 17 QPSK (10MHz)	Left Cheek	1RB	0.063	0.068	0.118	0.046	0.181	
	Left Tilt		0.091	0.082	0.175	0.066	0.266	
	Right Cheek		0.149	0.108	0.066	0.071	0.257	
	Right Tilt		0.407	0.141	0.088	0.098	0.548	
	Left Cheek	50%RB	0.051	0.068	0.118	0.046	0.169	
	Left Tilt		0.080	0.082	0.175	0.066	0.255	
	Right Cheek		0.184	0.108	0.066	0.071	0.292	
	Right Tilt		0.368	0.141	0.088	0.098	0.509	
LTE Band 38 QPSK (20MHz)	Left Cheek	1RB	0.055	0.068	0.118	0.046	0.173	
	Left Tilt		0.088	0.082	0.175	0.066	0.263	
	Right Cheek		0.177	0.108	0.066	0.071	0.285	
	Right Tilt		0.277	0.141	0.088	0.098	0.418	
	Left Cheek	50%RB	0.046	0.068	0.118	0.046	0.164	
	Left Tilt		0.066	0.082	0.175	0.066	0.241	
	Right Cheek		0.153	0.108	0.066	0.071	0.261	
	Right Tilt		0.229	0.141	0.088	0.098	0.370	

Band	Test Position	Scaled SAR				BT SAR 1g(W/kg)	Σ SAR (W/kg)	Llimit (W/kg)
		RB allocation	WWAN SAR 1g(W/kg)	WIFI2.4G SAR 1g(W/kg)	Wi-Fi 5G(Band 1) 1g(W/kg)			
LTE Band 41 QPSK (20MHz)	Left Cheek	1RB	0.049	0.068	0.118	0.046	0.167	1.6
	Left Tilt		0.087	0.082	0.175	0.066	0.262	
	Right Cheek		0.158	0.108	0.066	0.071	0.266	
	Right Tilt		0.217	0.141	0.088	0.098	0.358	
	Left Cheek	50%RB	0.326	0.068	0.118	0.046	0.444	
	Left Tilt		0.228	0.082	0.175	0.066	0.403	
	Right Cheek		0.173	0.108	0.066	0.071	0.281	
	Right Tilt		0.092	0.141	0.088	0.098	0.233	
LTE Band 42 QPSK (20MHz)	Left Cheek	1RB	0.244	0.068	0.118	0.046	0.362	
	Left Tilt		0.441	0.082	0.175	0.066	0.616	
	Right Cheek		0.110	0.108	0.066	0.071	0.218	
	Right Tilt		0.135	0.141	0.088	0.098	0.276	
	Left Cheek	50%RB	0.219	0.068	0.118	0.046	0.337	
	Left Tilt		0.294	0.082	0.175	0.066	0.469	
	Right Cheek		0.096	0.108	0.066	0.071	0.204	
	Right Tilt		0.115	0.141	0.088	0.098	0.256	
LTE Band 66 QPSK (20MHz)	Left Cheek	1RB	0.072	0.068	0.118	0.046	0.190	
	Left Tilt		0.132	0.082	0.175	0.066	0.307	
	Right Cheek		0.179	0.108	0.066	0.071	0.287	
	Right Tilt		0.336	0.141	0.088	0.098	0.477	
	Left Cheek	50%RB	0.060	0.068	0.118	0.046	0.178	
	Left Tilt		0.107	0.082	0.175	0.066	0.282	
	Right Cheek		0.158	0.108	0.066	0.071	0.266	
	Right Tilt		0.280	0.141	0.088	0.098	0.421	
NR Band 5	Left Cheek	1RB	0.055	0.068	0.118	0.046	0.173	
	Left Tilt		0.089	0.082	0.175	0.066	0.264	
	Right Cheek		0.127	0.108	0.066	0.071	0.235	
	Right Tilt		0.260	0.141	0.088	0.098	0.401	
	Left Cheek	50%RB	0.044	0.068	0.118	0.046	0.162	
	Left Tilt		0.084	0.082	0.175	0.066	0.259	
	Right Cheek		0.103	0.108	0.066	0.071	0.211	
	Right Tilt		0.232	0.141	0.088	0.098	0.373	
NR Band 7	Left Cheek	1RB	0.175	0.068	0.118	0.046	0.293	
	Left Tilt		0.232	0.082	0.175	0.066	0.407	
	Right Cheek		0.330	0.108	0.066	0.071	0.438	
	Right Tilt		0.466	0.141	0.088	0.098	0.607	
	Left Cheek	50%RB	0.132	0.068	0.118	0.046	0.250	
	Left Tilt		0.195	0.082	0.175	0.066	0.370	
	Right Cheek		0.269	0.108	0.066	0.071	0.377	
	Right Tilt		0.392	0.141	0.088	0.098	0.533	
NR Band 12	Left Cheek	1RB	0.120	0.068	0.118	0.046	0.238	
	Left Tilt		0.161	0.082	0.175	0.066	0.336	
	Right Cheek		0.531	0.108	0.066	0.071	0.639	
	Right Tilt		0.700	0.141	0.088	0.098	0.841	
	Left Cheek	50%RB	0.113	0.068	0.118	0.046	0.231	
	Left Tilt		0.146	0.082	0.175	0.066	0.321	
	Right Cheek		0.444	0.108	0.066	0.071	0.552	
	Right Tilt		0.640	0.141	0.088	0.098	0.781	

Band	Test Position	Scaled SAR				BT SAR 1g(W/kg)	Σ SAR (W/kg)	Llimit (W/kg)
		RB allocation	WWAN SAR 1g(W/kg)	WIFI2.4G SAR 1g(W/kg)	Wi-Fi 5G(Band 3) 1g(W/kg)			
NR Band38	Left Cheek	1RB	0.109	0.068	0.118	0.046	0.227	1.6
	Left Tilt		0.157	0.082	0.175	0.066	0.332	
	Right Cheek		0.215	0.108	0.066	0.071	0.323	
	Right Tilt		0.296	0.141	0.088	0.098	0.437	
	Left Cheek	50%RB	0.085	0.068	0.118	0.046	0.203	
	Left Tilt		0.133	0.082	0.175	0.066	0.308	
	Right Cheek		0.186	0.108	0.066	0.071	0.294	
	Right Tilt		0.281	0.141	0.088	0.098	0.422	
NR Band41	Left Cheek	1RB	0.158	0.068	0.118	0.046	0.276	
	Left Tilt		0.211	0.082	0.175	0.066	0.386	
	Right Cheek		0.485	0.108	0.066	0.071	0.593	
	Right Tilt		0.788	0.141	0.088	0.098	0.929	
	Left Cheek	50%RB	0.139	0.068	0.118	0.046	0.257	
	Left Tilt		0.180	0.082	0.175	0.066	0.355	
	Right Cheek		0.316	0.108	0.066	0.071	0.424	
	Right Tilt		0.701	0.141	0.088	0.098	0.842	
NR Band66	Left Cheek	1RB	0.133	0.068	0.118	0.046	0.251	
	Left Tilt		0.203	0.082	0.175	0.066	0.378	
	Right Cheek		0.317	0.108	0.066	0.071	0.425	
	Right Tilt		0.443	0.141	0.088	0.098	0.584	
	Left Cheek	50%RB	0.107	0.068	0.118	0.046	0.225	
	Left Tilt		0.176	0.082	0.175	0.066	0.351	
	Right Cheek		0.285	0.108	0.066	0.071	0.393	
	Right Tilt		0.410	0.141	0.088	0.098	0.551	
NR Band77	Left Cheek	1RB	0.753	0.068	0.118	0.046	0.871	
	Left Tilt		0.949	0.082	0.175	0.066	1.124	
	Right Cheek		0.187	0.108	0.066	0.071	0.295	
	Right Tilt		0.238	0.141	0.088	0.098	0.379	
	Left Cheek	50%RB	0.685	0.068	0.118	0.046	0.803	
	Left Tilt		0.870	0.082	0.175	0.066	1.045	
	Right Cheek		0.166	0.108	0.066	0.071	0.274	
	Right Tilt		0.207	0.141	0.088	0.098	0.348	
NR Band77	Left Cheek	1RB	0.208	0.068	0.118	0.046	0.326	
	Left Tilt		0.284	0.082	0.175	0.066	0.459	
	Right Cheek		0.088	0.108	0.066	0.071	0.196	
	Right Tilt		0.137	0.141	0.088	0.098	0.278	
	Left Cheek	50%RB	0.148	0.068	0.118	0.046	0.266	
	Left Tilt		0.232	0.082	0.175	0.066	0.407	
	Right Cheek		0.079	0.108	0.066	0.071	0.187	
	Right Tilt		0.125	0.141	0.088	0.098	0.266	
NR Band78	Left Cheek	1RB	0.690	0.068	0.118	0.046	0.808	
	Left Tilt		0.848	0.082	0.175	0.066	1.023	
	Right Cheek		0.172	0.108	0.066	0.071	0.280	
	Right Tilt		0.221	0.141	0.088	0.098	0.362	
	Left Cheek	50%RB	0.571	0.068	0.118	0.046	0.689	
	Left Tilt		0.774	0.082	0.175	0.066	0.949	
	Right Cheek		0.135	0.108	0.066	0.071	0.243	
	Right Tilt		0.199	0.141	0.088	0.098	0.340	
NR Band78	Left Cheek	1RB	0.490	0.068	0.118	0.046	0.608	
	Left Tilt		0.467	0.082	0.175	0.066	0.642	
	Right Cheek		0.148	0.108	0.066	0.071	0.256	
	Right Tilt		0.096	0.141	0.088	0.098	0.237	
	Left Cheek	50%RB	0.415	0.068	0.118	0.046	0.533	
	Left Tilt		0.364	0.082	0.175	0.066	0.539	
	Right Cheek		0.115	0.108	0.066	0.071	0.223	
	Right Tilt		0.074	0.141	0.088	0.098	0.215	

Band	Test Position	Scaled SAR				BT SAR 1g(W/kg)	Σ SAR (W/kg)	Llimit (W/kg)
		RB allocation	WWAN SAR 1g(W/kg)	WIFI2.4G SAR 1g(W/kg)	Wi-Fi 5G(Band 3) 1g(W/kg)			
2-n7	Left Cheek	1RB	0.079	0.068	0.118	0.046	0.197	1.6
	Left Tilt		0.115	0.082	0.175	0.066	0.290	
	Right Cheek		0.140	0.108	0.066	0.071	0.248	
	Right Tilt		0.190	0.141	0.088	0.098	0.331	
	Left Cheek	50%RB	0.063	0.068	0.118	0.046	0.181	
	Left Tilt		0.095	0.082	0.175	0.066	0.270	
	Right Cheek		0.118	0.108	0.066	0.071	0.226	
	Right Tilt		0.175	0.141	0.088	0.098	0.316	
2-n66	Left Cheek	1RB	0.066	0.068	0.118	0.046	0.184	
	Left Tilt		0.161	0.082	0.175	0.066	0.336	
	Right Cheek		0.114	0.108	0.066	0.071	0.222	
	Right Tilt		0.199	0.141	0.088	0.098	0.340	
	Left Cheek	50%RB	0.052	0.068	0.118	0.046	0.170	
	Left Tilt		0.137	0.082	0.175	0.066	0.312	
	Right Cheek		0.103	0.108	0.066	0.071	0.211	
	Right Tilt		0.181	0.141	0.088	0.098	0.322	
2-n78	Left Cheek	1RB	0.167	0.068	0.118	0.046	0.285	
	Left Tilt		0.135	0.082	0.175	0.066	0.310	
	Right Cheek		0.120	0.108	0.066	0.071	0.228	
	Right Tilt		0.094	0.141	0.088	0.098	0.235	
	Left Cheek	50%RB	0.156	0.068	0.118	0.046	0.274	
	Left Tilt		0.118	0.082	0.175	0.066	0.293	
	Right Cheek		0.114	0.108	0.066	0.071	0.222	
	Right Tilt		0.085	0.141	0.088	0.098	0.226	
4-n41	Left Cheek	1RB	0.121	0.068	0.118	0.046	0.239	
	Left Tilt		0.119	0.082	0.175	0.066	0.294	
	Right Cheek		0.161	0.108	0.066	0.071	0.269	
	Right Tilt		0.149	0.141	0.088	0.098	0.290	
	Left Cheek	50%RB	0.107	0.068	0.118	0.046	0.225	
	Left Tilt		0.103	0.082	0.175	0.066	0.278	
	Right Cheek		0.155	0.108	0.066	0.071	0.263	
	Right Tilt		0.128	0.141	0.088	0.098	0.269	
4-n78	Left Cheek	1RB	0.073	0.068	0.118	0.046	0.191	
	Left Tilt		0.103	0.082	0.175	0.066	0.278	
	Right Cheek		0.036	0.108	0.066	0.071	0.144	
	Right Tilt		0.058	0.141	0.088	0.098	0.199	
	Left Cheek	50%RB	0.059	0.068	0.118	0.046	0.177	
	Left Tilt		0.089	0.082	0.175	0.066	0.264	
	Right Cheek		0.031	0.108	0.066	0.071	0.139	
	Right Tilt		0.045	0.141	0.088	0.098	0.186	

Band	Test Position	Scaled SAR				BT SAR 1g(W/kg)	Σ SAR (W/kg)	Llimit (W/kg)
		RB allocation	WWAN SAR 1g(W/kg)	WIFI2.4G SAR 1g(W/kg)	Wi-Fi 5G(Band 3) 1g(W/kg)			
5-n7	Left Cheek	1RB	0.048	0.068	0.118	0.046	0.166	1.6
	Left Tilt		0.068	0.082	0.175	0.066	0.243	
	Right Cheek		0.091	0.108	0.066	0.071	0.199	
	Right Tilt		0.122	0.141	0.088	0.098	0.263	
	Left Cheek	50%RB	0.038	0.068	0.118	0.046	0.156	
	Left Tilt		0.061	0.082	0.175	0.066	0.236	
	Right Cheek		0.085	0.108	0.066	0.071	0.193	
	Right Tilt		0.114	0.141	0.088	0.098	0.255	
5-n38	Left Cheek	1RB	0.025	0.068	0.118	0.046	0.143	
	Left Tilt		0.041	0.082	0.175	0.066	0.216	
	Right Cheek		0.062	0.108	0.066	0.071	0.170	
	Right Tilt		0.098	0.141	0.088	0.098	0.239	
	Left Cheek	50%RB	0.020	0.068	0.118	0.046	0.138	
	Left Tilt		0.036	0.082	0.175	0.066	0.211	
	Right Cheek		0.057	0.108	0.066	0.071	0.165	
	Right Tilt		0.090	0.141	0.088	0.098	0.231	
5-n41	Left Cheek	1RB	0.059	0.068	0.118	0.046	0.177	
	Left Tilt		0.078	0.082	0.175	0.066	0.253	
	Right Cheek		0.165	0.108	0.066	0.071	0.273	
	Right Tilt		0.182	0.141	0.088	0.098	0.323	
	Left Cheek	50%RB	0.042	0.068	0.118	0.046	0.160	
	Left Tilt		0.068	0.082	0.175	0.066	0.243	
	Right Cheek		0.148	0.108	0.066	0.071	0.256	
	Right Tilt		0.167	0.141	0.088	0.098	0.308	
5-n66	Left Cheek	1RB	0.053	0.068	0.118	0.046	0.171	
	Left Tilt		0.073	0.082	0.175	0.066	0.248	
	Right Cheek		0.098	0.108	0.066	0.071	0.206	
	Right Tilt		0.125	0.141	0.088	0.098	0.266	
	Left Cheek	50%RB	0.035	0.068	0.118	0.046	0.153	
	Left Tilt		0.060	0.082	0.175	0.066	0.235	
	Right Cheek		0.088	0.108	0.066	0.071	0.196	
	Right Tilt		0.116	0.141	0.088	0.098	0.257	
5-n77	Left Cheek	1RB	0.015	0.068	0.118	0.046	0.133	
	Left Tilt		0.024	0.082	0.175	0.066	0.199	
	Right Cheek		0.033	0.108	0.066	0.071	0.141	
	Right Tilt		0.041	0.141	0.088	0.098	0.182	
	Left Cheek	50%RB	0.014	0.068	0.118	0.046	0.132	
	Left Tilt		0.022	0.082	0.175	0.066	0.197	
	Right Cheek		0.028	0.108	0.066	0.071	0.136	
	Right Tilt		0.039	0.141	0.088	0.098	0.180	
5-n78	Left Cheek	1RB	0.033	0.068	0.118	0.046	0.151	
	Left Tilt		0.038	0.082	0.175	0.066	0.213	
	Right Cheek		0.039	0.108	0.066	0.071	0.147	
	Right Tilt		0.058	0.141	0.088	0.098	0.199	
	Left Cheek	50%RB	0.029	0.068	0.118	0.046	0.147	
	Left Tilt		0.038	0.082	0.175	0.066	0.213	
	Right Cheek		0.036	0.108	0.066	0.071	0.144	
	Right Tilt		0.054	0.141	0.088	0.098	0.195	
7-n7	Left Cheek	1RB	0.066	0.068	0.118	0.046	0.184	
	Left Tilt		0.096	0.082	0.175	0.066	0.271	
	Right Cheek		0.176	0.108	0.066	0.071	0.284	
	Right Tilt		0.264	0.141	0.088	0.098	0.405	
	Left Cheek	50%RB	0.053	0.068	0.118	0.046	0.171	
	Left Tilt		0.081	0.082	0.175	0.066	0.256	
	Right Cheek		0.142	0.108	0.066	0.071	0.250	
	Right Tilt		0.218	0.141	0.088	0.098	0.359	

Report No.: WSCT-ANAB-R&E241100057A-SAR SAR Evaluation Report

Band	Test Position	Scaled SAR				BT SAR 1g(W/kg)	Σ SAR (W/kg)	Llimit (W/kg)
		RB allocation	WWAN SAR 1g(W/kg)	WIFI2.4G SAR 1g(W/kg)	Wi-Fi 5G(Band 3) 1g(W/kg)			
7-n66	Left Cheek	1RB	0.054	0.068	0.118	0.046	0.172	1.6
	Left Tilt		0.087	0.082	0.175	0.066	0.262	
	Right Cheek		0.133	0.108	0.066	0.071	0.241	
	Right Tilt		0.207	0.141	0.088	0.098	0.348	
	Left Cheek	50%RB	0.036	0.068	0.118	0.046	0.154	
	Left Tilt		0.071	0.082	0.175	0.066	0.246	
	Right Cheek		0.125	0.108	0.066	0.071	0.233	
	Right Tilt		0.191	0.141	0.088	0.098	0.332	
7-n77	Left Cheek	1RB	0.386	0.068	0.118	0.046	0.504	
	Left Tilt		0.130	0.082	0.175	0.066	0.305	
	Right Cheek		0.400	0.108	0.066	0.071	0.508	
	Right Tilt		0.142	0.141	0.088	0.098	0.283	
	Left Cheek	50%RB	0.320	0.068	0.118	0.046	0.438	
	Left Tilt		0.100	0.082	0.175	0.066	0.275	
	Right Cheek		0.356	0.108	0.066	0.071	0.464	
	Right Tilt		0.130	0.141	0.088	0.098	0.271	
7-n78	Left Cheek	1RB	0.099	0.068	0.118	0.046	0.217	
	Left Tilt		0.156	0.082	0.175	0.066	0.331	
	Right Cheek		0.070	0.108	0.066	0.071	0.178	
	Right Tilt		0.102	0.141	0.088	0.098	0.243	
	Left Cheek	50%RB	0.085	0.068	0.118	0.046	0.203	
	Left Tilt		0.132	0.082	0.175	0.066	0.307	
	Right Cheek		0.063	0.108	0.066	0.071	0.171	
	Right Tilt		0.094	0.141	0.088	0.098	0.235	
38-n78	Left Cheek	1RB	0.213	0.068	0.118	0.046	0.331	
	Left Tilt		0.180	0.082	0.175	0.066	0.355	
	Right Cheek		0.083	0.108	0.066	0.071	0.191	
	Right Tilt		0.052	0.141	0.088	0.098	0.193	
	Left Cheek	50%RB	0.178	0.068	0.118	0.046	0.296	
	Left Tilt		0.157	0.082	0.175	0.066	0.332	
	Right Cheek		0.072	0.108	0.066	0.071	0.180	
	Right Tilt		0.040	0.141	0.088	0.098	0.181	
41-n41	Left Cheek	1RB	0.071	0.068	0.118	0.046	0.189	
	Left Tilt		0.087	0.082	0.175	0.066	0.262	
	Right Cheek		0.042	0.108	0.066	0.071	0.150	
	Right Tilt		0.054	0.141	0.088	0.098	0.195	
	Left Cheek	50%RB	0.065	0.068	0.118	0.046	0.183	
	Left Tilt		0.071	0.082	0.175	0.066	0.246	
	Right Cheek		0.034	0.108	0.066	0.071	0.142	
	Right Tilt		0.042	0.141	0.088	0.098	0.183	
41-n77	Left Cheek	1RB	0.058	0.068	0.118	0.046	0.176	
	Left Tilt		0.072	0.082	0.175	0.066	0.247	
	Right Cheek		0.038	0.108	0.066	0.071	0.146	
	Right Tilt		0.047	0.141	0.088	0.098	0.188	
	Left Cheek	50%RB	0.049	0.068	0.118	0.046	0.167	
	Left Tilt		0.066	0.082	0.175	0.066	0.241	
	Right Cheek		0.031	0.108	0.066	0.071	0.139	
	Right Tilt		0.040	0.141	0.088	0.098	0.181	
41-n78	Left Cheek	1RB	0.221	0.068	0.118	0.046	0.339	
	Left Tilt		0.163	0.082	0.175	0.066	0.338	
	Right Cheek		0.117	0.108	0.066	0.071	0.225	
	Right Tilt		0.072	0.141	0.088	0.098	0.213	
	Left Cheek	50%RB	0.193	0.068	0.118	0.046	0.311	
	Left Tilt		0.144	0.082	0.175	0.066	0.319	
	Right Cheek		0.079	0.108	0.066	0.071	0.187	
	Right Tilt		0.058	0.141	0.088	0.098	0.199	

Band	Test Position	Scaled SAR				BT SAR 1g(W/kg)	Σ SAR (W/kg)	Llimit (W/kg)
		RB allocation	WWAN SAR 1g(W/kg)	WIFI2.4G SAR 1g(W/kg)	Wi-Fi 5G(Band 3) 1g(W/kg)			
66-n7	Left Cheek	1RB	0.079	0.068	0.118	0.046	0.197	1.6
	Left Tilt		0.154	0.082	0.175	0.066	0.329	
	Right Cheek		0.225	0.108	0.066	0.071	0.333	
	Right Tilt		0.282	0.141	0.088	0.098	0.423	
	Left Cheek	50%RB	0.076	0.068	0.118	0.046	0.194	
	Left Tilt		0.134	0.082	0.175	0.066	0.309	
	Right Cheek		0.217	0.108	0.066	0.071	0.325	
	Right Tilt		0.255	0.141	0.088	0.098	0.396	
66-n38	Left Cheek	1RB	0.146	0.068	0.118	0.046	0.264	
	Left Tilt		0.171	0.082	0.175	0.066	0.346	
	Right Cheek		0.253	0.108	0.066	0.071	0.361	
	Right Tilt		0.308	0.141	0.088	0.098	0.449	
	Left Cheek	50%RB	0.134	0.068	0.118	0.046	0.252	
	Left Tilt		0.158	0.082	0.175	0.066	0.333	
	Right Cheek		0.234	0.108	0.066	0.071	0.342	
	Right Tilt		0.294	0.141	0.088	0.098	0.435	
66-n41	Left Cheek	1RB	0.047	0.068	0.118	0.046	0.165	
	Left Tilt		0.074	0.082	0.175	0.066	0.249	
	Right Cheek		0.065	0.108	0.066	0.071	0.173	
	Right Tilt		0.115	0.141	0.088	0.098	0.256	
	Left Cheek	50%RB	0.041	0.068	0.118	0.046	0.159	
	Left Tilt		0.066	0.082	0.175	0.066	0.241	
	Right Cheek		0.061	0.108	0.066	0.071	0.169	
	Right Tilt		0.102	0.141	0.088	0.098	0.243	
66-n66	Left Cheek	1RB	0.057	0.068	0.118	0.046	0.175	
	Left Tilt		0.080	0.082	0.175	0.066	0.255	
	Right Cheek		0.128	0.108	0.066	0.071	0.236	
	Right Tilt		0.195	0.141	0.088	0.098	0.336	
	Left Cheek	50%RB	0.047	0.068	0.118	0.046	0.165	
	Left Tilt		0.071	0.082	0.175	0.066	0.246	
	Right Cheek		0.120	0.108	0.066	0.071	0.228	
	Right Tilt		0.180	0.141	0.088	0.098	0.321	
66-n77	Left Cheek	1RB	0.067	0.068	0.118	0.046	0.185	
	Left Tilt		0.050	0.082	0.175	0.066	0.225	
	Right Cheek		0.047	0.108	0.066	0.071	0.155	
	Right Tilt		0.032	0.141	0.088	0.098	0.173	
	Left Cheek	50%RB	0.061	0.068	0.118	0.046	0.179	
	Left Tilt		0.039	0.082	0.175	0.066	0.214	
	Right Cheek		0.034	0.108	0.066	0.071	0.142	
	Right Tilt		0.023	0.141	0.088	0.098	0.164	
66-n78	Left Cheek	1RB	0.139	0.068	0.118	0.046	0.257	
	Left Tilt		0.191	0.082	0.175	0.066	0.366	
	Right Cheek		0.125	0.108	0.066	0.071	0.233	
	Right Tilt		0.163	0.141	0.088	0.098	0.304	
	Left Cheek	50%RB	0.105	0.068	0.118	0.046	0.223	
	Left Tilt		0.147	0.082	0.175	0.066	0.322	
	Right Cheek		0.088	0.108	0.066	0.071	0.196	
	Right Tilt		0.125	0.141	0.088	0.098	0.266	

Report No.: WSCT-ANAB-R&E241100057A-SAR SAR Evaluation Report

Hotspot(body-worn10mm)

Band	Test Position	Scaled SAR			BT SAR 1g(W/kg)	Σ SAR (W/kg)	Limit (W/kg)
		WWAN SAR 1g(W/kg)	WIFI2.4G SAR 1g(W/kg)	Wi-Fi 5G(Band 2) 1g(W/kg)			
GSM850 (GPRS 4slots)	Front	0.286	0.021	0.064	0.016	0.350	1.6
	Back	0.389	0.042	0.092	0.028	0.481	
	Left	0.226	0.023	0.049	0.012	0.275	
	right	0.093	0.024	0.057	0.002	0.150	
	Top	0.314	0.030	0.071	0.017	0.385	
	Bottom	0.019	0.002	0.010	0.002	0.029	
GSM1900 (GPRS 4slots)	Front	0.518	0.021	0.064	0.016	0.582	
	Back	0.600	0.042	0.092	0.028	0.692	
	Left	0.406	0.023	0.049	0.012	0.455	
	right	0.106	0.024	0.057	0.002	0.163	
	Top	0.428	0.030	0.071	0.017	0.499	
	Bottom	0.026	0.002	0.010	0.002	0.036	
WCDMA Band 2	Front	0.008	0.021	0.064	0.016	0.072	
	Back	0.018	0.042	0.092	0.028	0.110	
	Left	0.008	0.023	0.049	0.012	0.057	
	right	0.003	0.024	0.057	0.002	0.060	
	Top	0.014	0.030	0.071	0.017	0.085	
	Bottom	0.002	0.002	0.010	0.002	0.012	
WCDMA Band 4	Front	0.054	0.021	0.064	0.016	0.118	
	Back	0.068	0.042	0.092	0.028	0.160	
	Left	0.034	0.023	0.049	0.012	0.083	
	right	0.021	0.024	0.057	0.002	0.078	
	Top	0.041	0.030	0.071	0.017	0.112	
	Bottom	0.003	0.002	0.010	0.002	0.013	
WCDMA Band 5	Front	0.071	0.021	0.064	0.016	0.135	
	Back	0.107	0.042	0.092	0.028	0.199	
	Left	0.083	0.023	0.049	0.012	0.132	
	right	0.021	0.024	0.057	0.002	0.078	
	Top	0.093	0.030	0.071	0.017	0.164	
	Bottom	0.006	0.002	0.010	0.002	0.016	

Report No.: WSCT-ANAB-R&E241100057A-SAR SAR Evaluation Report

Band	Test Position	RB allocation	Scaled SAR			BT SAR 1g(W/kg)	Σ SAR (W/kg)	Llimit (W/kg)
			WWAN SAR 1g(W/kg)	WIFI2.4G SAR 1g(W/kg)	Wi-Fi 5G(Band 2) 1g(W/kg)			
LTE Band 2	Front	1RB	0.033	0.021	0.064	0.016	0.097	1.6
	Back		0.054	0.042	0.092	0.028	0.146	
	Left		0.035	0.023	0.049	0.012	0.084	
	right		0.007	0.024	0.057	0.002	0.064	
	Top		0.038	0.030	0.071	0.017	0.109	
	Bottom		0.002	0.002	0.010	0.002	0.012	
	Front	50%RB	0.024	0.021	0.064	0.016	0.088	
	Back		0.052	0.042	0.092	0.028	0.144	
	Left		0.029	0.023	0.049	0.012	0.078	
	right		0.004	0.024	0.057	0.002	0.061	
	Top		0.032	0.030	0.071	0.017	0.103	
	Bottom		0.002	0.002	0.010	0.002	0.012	
LTE Band 4	Front	1RB	0.027	0.021	0.064	0.016	0.091	
	Back		0.041	0.042	0.092	0.028	0.133	
	Left		0.030	0.023	0.049	0.012	0.079	
	right		0.003	0.024	0.057	0.002	0.060	
	Top		0.029	0.030	0.071	0.017	0.100	
	Bottom		0.002	0.002	0.010	0.002	0.012	
	Front	50%RB	0.023	0.021	0.064	0.016	0.087	
	Back		0.038	0.042	0.092	0.028	0.130	
	Left		0.024	0.023	0.049	0.012	0.073	
	right		0.003	0.024	0.057	0.002	0.060	
	Top		0.029	0.030	0.071	0.017	0.100	
	Bottom		0.002	0.002	0.010	0.002	0.012	
LTE Band 5	Front	1RB	0.011	0.021	0.064	0.016	0.075	
	Back		0.023	0.042	0.092	0.028	0.115	
	Left		0.012	0.023	0.049	0.012	0.061	
	right		0.003	0.024	0.057	0.002	0.060	
	Top		0.016	0.030	0.071	0.017	0.087	
	Bottom		0.002	0.002	0.010	0.002	0.012	
	Front	50%RB	0.008	0.021	0.064	0.016	0.072	
	Back		0.021	0.042	0.092	0.028	0.113	
	Left		0.010	0.023	0.049	0.012	0.059	
	right		0.003	0.024	0.057	0.002	0.060	
	Top		0.017	0.030	0.071	0.017	0.088	
	Bottom		0.002	0.002	0.010	0.002	0.012	
LTE Band 7	Front	1RB	0.082	0.021	0.064	0.016	0.146	
	Back		0.097	0.042	0.092	0.028	0.189	
	Left		0.067	0.023	0.049	0.012	0.116	
	right		0.026	0.024	0.057	0.002	0.083	
	Top		0.075	0.030	0.071	0.017	0.146	
	Bottom		0.015	0.002	0.010	0.002	0.025	
	Front	50%RB	0.066	0.021	0.064	0.016	0.130	
	Back		0.085	0.042	0.092	0.028	0.177	
	Left		0.057	0.023	0.049	0.012	0.106	
	right		0.019	0.024	0.057	0.002	0.076	
	Top		0.063	0.030	0.071	0.017	0.134	
	Bottom		0.007	0.002	0.010	0.002	0.017	

LTE Band 12	Front	1RB	0.028	0.021	0.064	0.016	0.092	1.6
	Back		0.035	0.042	0.092	0.028	0.127	
	Left		0.020	0.023	0.049	0.012	0.069	
	right		0.002	0.024	0.057	0.002	0.059	
	Top		0.022	0.030	0.071	0.017	0.093	
	Bottom		0.002	0.002	0.010	0.002	0.012	
	Front	50%RB	0.023	0.021	0.064	0.016	0.087	
	Back		0.033	0.042	0.092	0.028	0.125	
	Left		0.017	0.023	0.049	0.012	0.066	
	right		0.002	0.024	0.057	0.002	0.059	
	Top		0.018	0.030	0.071	0.017	0.089	
LTE Band 13	Bottom		0.002	0.002	0.010	0.002	0.012	
	Front	1RB	0.057	0.021	0.064	0.016	0.121	
	Back		0.072	0.042	0.092	0.028	0.164	
	Left		0.050	0.023	0.049	0.012	0.099	
	right		0.007	0.024	0.057	0.002	0.064	
	Top		0.053	0.030	0.071	0.017	0.124	
	Bottom		0.002	0.002	0.010	0.002	0.012	
	Front	50%RB	0.052	0.021	0.064	0.016	0.116	
	Back		0.069	0.042	0.092	0.028	0.161	
	Left		0.046	0.023	0.049	0.012	0.095	
	right		0.007	0.024	0.057	0.002	0.064	
LTE Band 17	Top		0.048	0.030	0.071	0.017	0.119	
	Bottom		0.002	0.002	0.010	0.002	0.012	
	Front	1RB	0.037	0.021	0.064	0.016	0.101	
	Back		0.045	0.042	0.092	0.028	0.137	
	Left		0.028	0.023	0.049	0.012	0.077	
	right		0.002	0.024	0.057	0.002	0.059	
	Top		0.035	0.030	0.071	0.017	0.106	
	Bottom		0.002	0.002	0.010	0.002	0.012	
	Front	50%RB	0.032	0.021	0.064	0.016	0.096	
	Back		0.039	0.042	0.092	0.028	0.131	
LTE Band 38	Left		0.023	0.023	0.049	0.012	0.072	
	right		0.002	0.024	0.057	0.002	0.059	
	Top		0.031	0.030	0.071	0.017	0.102	
	Bottom		0.002	0.002	0.010	0.002	0.012	
	Front	1RB	0.050	0.021	0.064	0.016	0.114	
	Back		0.072	0.042	0.092	0.028	0.164	
	Left		0.044	0.023	0.049	0.012	0.093	
	right		0.018	0.024	0.057	0.002	0.075	
	Top		0.048	0.030	0.071	0.017	0.119	
	Bottom		0.005	0.002	0.010	0.002	0.015	
LTE Band 38	Front	50%RB	0.040	0.021	0.064	0.016	0.104	
	Back		0.065	0.042	0.092	0.028	0.157	
	Left		0.032	0.023	0.049	0.012	0.081	
	right		0.011	0.024	0.057	0.002	0.068	
	Top		0.035	0.030	0.071	0.017	0.106	
LTE Band 38	Bottom		0.003	0.002	0.010	0.002	0.013	

Report No.: WSCT-ANAB-R&E241100057A-SAR SAR Evaluation Report

Band	Test Position	RB allocation	Scaled SAR			BT SAR 1g(W/kg)	Σ SAR (W/kg)	Llimit (W/kg)
			WWAN SAR 1g(W/kg)	WIFI2.4G SAR 1g(W/kg)	Wi-Fi 5G(Band 2) 1g(W/kg)			
LTE Band 41	Front	1RB	0.046	0.021	0.064	0.016	0.110	1.6
	Back		0.063	0.042	0.092	0.028	0.155	
	Left		0.039	0.023	0.049	0.012	0.088	
	right		0.007	0.024	0.057	0.002	0.064	
	Top		0.048	0.030	0.071	0.017	0.119	
	Bottom		0.003	0.002	0.010	0.002	0.013	
	Front	50%RB	0.094	0.021	0.064	0.016	0.158	
	Back		0.067	0.042	0.092	0.028	0.159	
	Left		0.059	0.023	0.049	0.012	0.108	
	right		0.029	0.024	0.057	0.002	0.086	
	Top		0.046	0.030	0.071	0.017	0.117	
	Bottom		0.063	0.002	0.010	0.002	0.073	
LTE Band 42	Front	1RB	0.027	0.021	0.064	0.016	0.091	
	Back		0.038	0.042	0.092	0.028	0.130	
	Left		0.009	0.023	0.049	0.012	0.058	
	right		0.014	0.024	0.057	0.002	0.071	
	Top		0.023	0.030	0.071	0.017	0.094	
	Bottom		0.003	0.002	0.010	0.002	0.013	
	Front	50%RB	0.028	0.021	0.064	0.016	0.092	
	Back		0.035	0.042	0.092	0.028	0.127	
	Left		0.007	0.023	0.049	0.012	0.056	
	right		0.012	0.024	0.057	0.002	0.069	
	Top		0.020	0.030	0.071	0.017	0.091	
	Bottom		0.002	0.002	0.010	0.002	0.012	
LTE Band 66	Front	1RB	0.031	0.021	0.064	0.016	0.095	
	Back		0.042	0.042	0.092	0.028	0.134	
	Left		0.024	0.023	0.049	0.012	0.073	
	right		0.005	0.024	0.057	0.002	0.062	
	Top		0.035	0.030	0.071	0.017	0.106	
	Bottom		0.002	0.002	0.010	0.002	0.012	
	Front	50%RB	0.030	0.021	0.064	0.016	0.094	
	Back		0.039	0.042	0.092	0.028	0.131	
	Left		0.027	0.023	0.049	0.012	0.076	
	right		0.004	0.024	0.057	0.002	0.061	
	Top		0.031	0.030	0.071	0.017	0.102	
	Bottom		0.002	0.002	0.010	0.002	0.012	
N5	Front	1RB	0.019	0.021	0.064	0.016	0.083	
	Back		0.043	0.042	0.092	0.028	0.135	
	Left		0.012	0.023	0.049	0.012	0.061	
	right		0.035	0.024	0.057	0.002	0.092	
	Top		0.038	0.030	0.071	0.017	0.109	
	Bottom		0.002	0.002	0.010	0.002	0.012	
	Front	50%RB	0.017	0.021	0.064	0.016	0.081	
	Back		0.040	0.042	0.092	0.028	0.132	
	Left		0.010	0.023	0.049	0.012	0.059	
	right		0.031	0.024	0.057	0.002	0.088	
	Top		0.033	0.030	0.071	0.017	0.104	
	Bottom		0.002	0.002	0.010	0.002	0.012	

N7	Front	1RB	0.056	0.021	0.064	0.016	0.120	1.6
	Back		0.132	0.042	0.092	0.028	0.224	
	Left		0.038	0.023	0.049	0.012	0.087	
	right		0.084	0.024	0.057	0.002	0.141	
	Top		0.093	0.030	0.071	0.017	0.164	
	Bottom		0.008	0.002	0.010	0.002	0.018	
	Front	50%RB	0.051	0.021	0.064	0.016	0.115	
	Back		0.119	0.042	0.092	0.028	0.211	
	Left		0.036	0.023	0.049	0.012	0.085	
	right		0.072	0.024	0.057	0.002	0.129	
	Top		0.084	0.030	0.071	0.017	0.155	
N12	Bottom		0.005	0.002	0.010	0.002	0.015	
	Front	1RB	0.043	0.021	0.064	0.016	0.107	
	Back		0.056	0.042	0.092	0.028	0.148	
	Left		0.012	0.023	0.049	0.012	0.061	
	right		0.017	0.024	0.057	0.002	0.074	
	Top		0.038	0.030	0.071	0.017	0.109	
	Bottom		0.002	0.002	0.010	0.002	0.012	
	Front	50%RB	0.038	0.021	0.064	0.016	0.102	
	Back		0.046	0.042	0.092	0.028	0.138	
	Left		0.010	0.023	0.049	0.012	0.059	
	right		0.011	0.024	0.057	0.002	0.068	
	Top		0.034	0.030	0.071	0.017	0.105	
N38	Bottom		0.002	0.002	0.010	0.002	0.012	
	Front	1RB	0.030	0.021	0.064	0.016	0.094	
	Back		0.092	0.042	0.092	0.028	0.184	
	Left		0.057	0.023	0.049	0.012	0.106	
	right		0.008	0.024	0.057	0.002	0.065	
	Top		0.067	0.030	0.071	0.017	0.138	
	Bottom		0.003	0.002	0.010	0.002	0.013	
	Front	50%RB	0.026	0.021	0.064	0.016	0.090	
	Back		0.089	0.042	0.092	0.028	0.181	
	Left		0.051	0.023	0.049	0.012	0.100	
	right		0.006	0.024	0.057	0.002	0.063	
	Top		0.055	0.030	0.071	0.017	0.126	
	Bottom		0.002	0.002	0.010	0.002	0.012	

Report No.: WSCT-ANAB-R&E241100057A-SAR SAR Evaluation Report

Band	Test Position	RB allocation	Scaled SAR			BT SAR 1g(W/kg)	Σ SAR (W/kg)	Llimit (W/kg)
			WWAN SAR 1g(W/kg)	WIFI2.4G SAR 1g(W/kg)	Wi-Fi 5G(Band 2) 1g(W/kg)			
N41	Front	1RB	0.089	0.021	0.064	0.016	0.120	1.6
	Back		0.235	0.042	0.092	0.028	0.153	
	Left		0.169	0.023	0.049	0.012	0.327	
	right		0.031	0.024	0.057	0.002	0.218	
	Top		0.146	0.030	0.071	0.017	0.088	
	Bottom		0.008	0.002	0.010	0.002	0.217	
	Front	50%RB	0.081	0.021	0.064	0.016	0.018	
	Back		0.223	0.042	0.092	0.028	0.145	
	Left		0.159	0.023	0.049	0.012	0.315	
	right		0.028	0.024	0.057	0.002	0.208	
	Top		0.153	0.030	0.071	0.017	0.085	
	Bottom		0.009	0.002	0.010	0.002	0.224	
N66	Front	1RB	0.045	0.021	0.064	0.016	0.019	
	Back		0.062	0.042	0.092	0.028	0.109	
	Left		0.030	0.023	0.049	0.012	0.154	
	right		0.006	0.024	0.057	0.002	0.079	
	Top		0.036	0.030	0.071	0.017	0.063	
	Bottom		0.003	0.002	0.010	0.002	0.107	
	Front	50%RB	0.037	0.021	0.064	0.016	0.013	
	Back		0.059	0.042	0.092	0.028	0.101	
	Left		0.023	0.023	0.049	0.012	0.151	
	right		0.003	0.024	0.057	0.002	0.072	
	Top		0.030	0.030	0.071	0.017	0.060	
	Bottom		0.002	0.002	0.010	0.002	0.101	
N77	Front	1RB	0.098	0.021	0.064	0.016	0.012	
	Back		0.128	0.042	0.092	0.028	0.162	
	Left		0.028	0.023	0.049	0.012	0.220	
	right		0.093	0.024	0.057	0.002	0.077	
	Top		0.107	0.030	0.071	0.017	0.150	
	Bottom		0.006	0.002	0.010	0.002	0.178	
	Front	50%RB	0.090	0.021	0.064	0.016	0.016	
	Back		0.115	0.042	0.092	0.028	0.154	
	Left		0.022	0.023	0.049	0.012	0.207	
	right		0.086	0.024	0.057	0.002	0.071	
	Top		0.090	0.030	0.071	0.017	0.143	
	Bottom		0.002	0.002	0.010	0.002	0.161	
N77	Front	1RB	0.092	0.021	0.064	0.016	0.012	
	Back		0.126	0.042	0.092	0.028	0.156	
	Left		0.023	0.023	0.049	0.012	0.218	
	right		0.105	0.024	0.057	0.002	0.072	
	Top		0.114	0.030	0.071	0.017	0.162	
	Bottom		0.006	0.002	0.010	0.002	0.185	
	Front	50%RB	0.075	0.021	0.064	0.016	0.016	
	Back		0.099	0.042	0.092	0.028	0.139	
	Left		0.020	0.023	0.049	0.012	0.191	
	right		0.088	0.024	0.057	0.002	0.069	
	Top		0.093	0.030	0.071	0.017	0.145	
	Bottom		0.005	0.002	0.010	0.002	0.164	

N78	Front	1RB	0.110	0.021	0.064	0.016	0.174	1.6
	Back		0.146	0.042	0.092	0.028	0.238	
	Left		0.042	0.023	0.049	0.012	0.091	
	right		0.081	0.024	0.057	0.002	0.138	
	Top		0.048	0.030	0.071	0.017	0.119	
	Bottom		0.011	0.002	0.010	0.002	0.021	
	Front	50%RB	0.098	0.021	0.064	0.016	0.162	
	Back		0.131	0.042	0.092	0.028	0.223	
	Left		0.036	0.023	0.049	0.012	0.085	
	right		0.073	0.024	0.057	0.002	0.130	
	Top		0.085	0.030	0.071	0.017	0.156	
	Bottom		0.010	0.002	0.010	0.002	0.020	
N78	Front	1RB	0.112	0.021	0.064	0.016	0.176	
	Back		0.160	0.042	0.092	0.028	0.252	
	Left		0.046	0.023	0.049	0.012	0.095	
	right		0.090	0.024	0.057	0.002	0.147	
	Top		0.102	0.030	0.071	0.017	0.173	
	Bottom		0.010	0.002	0.010	0.002	0.020	
	Front	50%RB	0.099	0.021	0.064	0.016	0.163	
	Back		0.147	0.042	0.092	0.028	0.239	
	Left		0.040	0.023	0.049	0.012	0.089	
	right		0.079	0.024	0.057	0.002	0.136	
	Top		0.086	0.030	0.071	0.017	0.157	
	Bottom		0.007	0.002	0.010	0.002	0.017	
2-n7	Front	1RB	0.054	0.021	0.064	0.016	0.118	
	Back		0.065	0.042	0.092	0.028	0.157	
	Left		0.039	0.023	0.049	0.012	0.088	
	right		0.010	0.024	0.057	0.002	0.067	
	Top		0.057	0.030	0.071	0.017	0.128	
	Bottom		0.002	0.002	0.010	0.002	0.012	
	Front	50%RB	0.048	0.021	0.064	0.016	0.112	
	Back		0.061	0.042	0.092	0.028	0.153	
	Left		0.036	0.023	0.049	0.012	0.085	
	right		0.009	0.024	0.057	0.002	0.066	
	Top		0.051	0.030	0.071	0.017	0.122	
	Bottom		0.002	0.002	0.010	0.002	0.012	

Report No.: WSCT-ANAB-R&E241100057A-SAR SAR Evaluation Report

Band	Test Position	RB allocation	Scaled SAR			BT SAR 1g(W/kg)	Σ SAR (W/kg)	Llimit (W/kg)
			WWAN SAR 1g(W/kg)	WIFI2.4G SAR 1g(W/kg)	Wi-Fi 5G(Band 2) 1g(W/kg)			
2-n66	Front	1RB	0.070	0.021	0.064	0.016	0.134	1.6
	Back		0.129	0.042	0.092	0.028	0.221	
	Left		0.052	0.023	0.049	0.012	0.101	
	right		0.013	0.024	0.057	0.002	0.070	
	Top		0.087	0.030	0.071	0.017	0.158	
	Bottom		0.006	0.002	0.010	0.002	0.016	
	Front	50%RB	0.063	0.021	0.064	0.016	0.127	
	Back		0.125	0.042	0.092	0.028	0.217	
	Left		0.049	0.023	0.049	0.012	0.098	
	right		0.013	0.024	0.057	0.002	0.070	
	Top		0.085	0.030	0.071	0.017	0.156	
	Bottom		0.005	0.002	0.010	0.002	0.015	
2-n78	Front	1RB	0.095	0.021	0.064	0.016	0.159	1.6
	Back		0.123	0.042	0.092	0.028	0.215	
	Left		0.071	0.023	0.049	0.012	0.120	
	right		0.012	0.024	0.057	0.002	0.069	
	Top		0.097	0.030	0.071	0.017	0.168	
	Bottom		0.003	0.002	0.010	0.002	0.013	
	Front	50%RB	0.087	0.021	0.064	0.016	0.151	
	Back		0.116	0.042	0.092	0.028	0.208	
	Left		0.067	0.023	0.049	0.012	0.116	
	right		0.011	0.024	0.057	0.002	0.068	
	Top		0.096	0.030	0.071	0.017	0.167	
	Bottom		0.002	0.002	0.010	0.002	0.012	
4-n41	Front	1RB	0.046	0.021	0.064	0.016	0.110	1.6
	Back		0.065	0.042	0.092	0.028	0.157	
	Left		0.036	0.023	0.049	0.012	0.085	
	right		0.005	0.024	0.057	0.002	0.062	
	Top		0.044	0.030	0.071	0.017	0.115	
	Bottom		0.002	0.002	0.010	0.002	0.012	
	Front	50%RB	0.045	0.021	0.064	0.016	0.109	
	Back		0.059	0.042	0.092	0.028	0.151	
	Left		0.030	0.023	0.049	0.012	0.079	
	right		0.003	0.024	0.057	0.002	0.060	
	Top		0.040	0.030	0.071	0.017	0.111	
	Bottom		0.002	0.002	0.010	0.002	0.012	
4-n78	Front	1RB	0.032	0.021	0.064	0.016	0.096	1.6
	Back		0.050	0.042	0.092	0.028	0.142	
	Left		0.004	0.023	0.049	0.012	0.053	
	right		0.030	0.024	0.057	0.002	0.087	
	Top		0.027	0.030	0.071	0.017	0.098	
	Bottom		0.002	0.002	0.010	0.002	0.012	
	Front	50%RB	0.031	0.021	0.064	0.016	0.095	
	Back		0.046	0.042	0.092	0.028	0.138	
	Left		0.003	0.023	0.049	0.012	0.052	
	right		0.025	0.024	0.057	0.002	0.082	
	Top		0.019	0.030	0.071	0.017	0.090	
	Bottom		0.002	0.002	0.010	0.002	0.012	
5-n7	Front	1RB	0.022	0.021	0.064	0.016	0.086	1.6
	Back		0.032	0.042	0.092	0.028	0.124	
	Left		0.017	0.023	0.049	0.012	0.066	
	right		0.005	0.024	0.057	0.002	0.062	
	Top		0.021	0.030	0.071	0.017	0.092	
	Bottom		0.003	0.002	0.010	0.002	0.013	
	Front	50%RB	0.019	0.021	0.064	0.016	0.083	
	Back		0.029	0.042	0.092	0.028	0.121	
	Left		0.016	0.023	0.049	0.012	0.065	
	right		0.005	0.024	0.057	0.002	0.062	
	Top		0.018	0.030	0.071	0.017	0.089	
	Bottom		0.002	0.002	0.010	0.002	0.012	

Band	Test Position	RB allocation	Scaled SAR			BT SAR 1g(W/kg)	Σ SAR (W/kg)	Llimit (W/kg)
			WWAN SAR 1g(W/kg)	WIFI2.4G SAR 1g(W/kg)	Wi-Fi 5G(Band 2) 1g(W/kg)			
5-n38	Front	1RB	0.013	0.021	0.064	0.016	0.077	1.6
	Back		0.022	0.042	0.092	0.028	0.114	
	Left		0.012	0.023	0.049	0.012	0.061	
	right		0.002	0.024	0.057	0.002	0.059	
	Top		0.013	0.030	0.071	0.017	0.084	
	Bottom		0.002	0.002	0.010	0.002	0.012	
	Front	50%RB	0.012	0.021	0.064	0.016	0.076	
	Back		0.019	0.042	0.092	0.028	0.111	
	Left		0.010	0.023	0.049	0.012	0.059	
	right		0.002	0.024	0.057	0.002	0.059	
	Top		0.012	0.030	0.071	0.017	0.083	
	Bottom		0.002	0.002	0.010	0.002	0.012	
5-n41	Front	1RB	0.037	0.021	0.064	0.016	0.101	
	Back		0.048	0.042	0.092	0.028	0.140	
	Left		0.031	0.023	0.049	0.012	0.080	
	right		0.002	0.024	0.057	0.002	0.059	
	Top		0.028	0.030	0.071	0.017	0.099	
	Bottom		0.002	0.002	0.010	0.002	0.012	
	Front	50%RB	0.032	0.021	0.064	0.016	0.096	
	Back		0.044	0.042	0.092	0.028	0.136	
	Left		0.030	0.023	0.049	0.012	0.079	
	right		0.002	0.024	0.057	0.002	0.059	
	Top		0.024	0.030	0.071	0.017	0.095	
	Bottom		0.002	0.002	0.010	0.002	0.012	
5-n66	Front	1RB	0.019	0.021	0.064	0.016	0.083	
	Back		0.032	0.042	0.092	0.028	0.124	
	Left		0.015	0.023	0.049	0.012	0.064	
	right		0.003	0.024	0.057	0.002	0.060	
	Top		0.024	0.030	0.071	0.017	0.095	
	Bottom		0.002	0.002	0.010	0.002	0.012	
	Front	50%RB	0.012	0.021	0.064	0.016	0.076	
	Back		0.029	0.042	0.092	0.028	0.121	
	Left		0.016	0.023	0.049	0.012	0.065	
	right		0.002	0.024	0.057	0.002	0.059	
	Top		0.021	0.030	0.071	0.017	0.092	
	Bottom		0.002	0.002	0.010	0.002	0.012	
5-n77	Front	1RB	0.010	0.021	0.064	0.016	0.074	
	Back		0.014	0.042	0.092	0.028	0.106	
	Left		0.008	0.023	0.049	0.012	0.057	
	right		0.002	0.024	0.057	0.002	0.059	
	Top		0.009	0.030	0.071	0.017	0.080	
	Bottom		0.002	0.002	0.010	0.002	0.012	
	Front	50%RB	0.008	0.021	0.064	0.016	0.072	
	Back		0.015	0.042	0.092	0.028	0.107	
	Left		0.007	0.023	0.049	0.012	0.056	
	right		0.002	0.024	0.057	0.002	0.059	
	Top		0.009	0.030	0.071	0.017	0.080	
	Bottom		0.002	0.002	0.010	0.002	0.012	

5-n78	Front	1RB	0.021	0.021	0.064	0.016	0.085	1.6
	Back		0.038	0.042	0.092	0.028	0.130	
	Left		0.020	0.023	0.049	0.012	0.069	
	right		0.003	0.024	0.057	0.002	0.060	
	Top		0.023	0.030	0.071	0.017	0.094	
	Bottom		0.002	0.002	0.010	0.002	0.012	
	Front	50%RB	0.020	0.021	0.064	0.016	0.084	
	Back		0.031	0.042	0.092	0.028	0.123	
	Left		0.018	0.023	0.049	0.012	0.067	
	right		0.003	0.024	0.057	0.002	0.060	
	Top		0.023	0.030	0.071	0.017	0.094	
7-n7	Bottom		0.002	0.002	0.010	0.002	0.012	
	Front	1RB	0.040	0.021	0.064	0.016	0.104	
	Back		0.067	0.042	0.092	0.028	0.159	
	Left		0.037	0.023	0.049	0.012	0.086	
	right		0.012	0.024	0.057	0.002	0.069	
	Top		0.048	0.030	0.071	0.017	0.119	
	Bottom		0.004	0.002	0.010	0.002	0.014	
	Front	50%RB	0.031	0.021	0.064	0.016	0.095	
	Back		0.053	0.042	0.092	0.028	0.145	
	Left		0.030	0.023	0.049	0.012	0.079	
	right		0.009	0.024	0.057	0.002	0.066	
	Top		0.041	0.030	0.071	0.017	0.112	
7-n66	Bottom		0.003	0.002	0.010	0.002	0.013	
	Front	1RB	0.056	0.021	0.064	0.016	0.120	
	Back		0.068	0.042	0.092	0.028	0.160	
	Left		0.044	0.023	0.049	0.012	0.093	
	right		0.017	0.024	0.057	0.002	0.074	
	Top		0.054	0.030	0.071	0.017	0.125	
	Bottom	50%RB	0.006	0.002	0.010	0.002	0.016	
	Front		0.049	0.021	0.064	0.016	0.113	
	Back		0.065	0.042	0.092	0.028	0.157	
	Left		0.043	0.023	0.049	0.012	0.092	
	right		0.014	0.024	0.057	0.002	0.071	
	Top		0.050	0.030	0.071	0.017	0.121	
	Bottom		0.005	0.002	0.010	0.002	0.015	

Band	Test Position	RB allocation	Scaled SAR			BT SAR 1g(W/kg)	Σ SAR (W/kg)	Llimit (W/kg)
			WWAN SAR 1g(W/kg)	WiFi2.4G SAR 1g(W/kg)	Wi-Fi 5G(Band 2) 1g(W/kg)			
7-n77	Front	1RB	0.139	0.021	0.064	0.016	0.203	1.6
	Back		0.220	0.042	0.092	0.028	0.312	
	Left		0.103	0.023	0.049	0.012	0.152	
	right		0.033	0.024	0.057	0.002	0.090	
	Top		0.099	0.030	0.071	0.017	0.170	
	Bottom		0.007	0.002	0.010	0.002	0.017	
	Front	50%RB	0.131	0.021	0.064	0.016	0.195	
	Back		0.211	0.042	0.092	0.028	0.303	
	Left		0.091	0.023	0.049	0.012	0.140	
	right		0.024	0.024	0.057	0.002	0.081	
	Top		0.087	0.030	0.071	0.017	0.158	
7-n78	Bottom	1RB	0.006	0.002	0.010	0.002	0.016	
	Front		0.057	0.021	0.064	0.016	0.121	
	Back		0.071	0.042	0.092	0.028	0.163	
	Left		0.002	0.023	0.049	0.012	0.051	
	right		0.038	0.024	0.057	0.002	0.095	
	Top		0.043	0.030	0.071	0.017	0.114	
	Bottom	50%RB	0.002	0.002	0.010	0.002	0.012	
	Front		0.044	0.021	0.064	0.016	0.108	
	Back		0.056	0.042	0.092	0.028	0.148	
	Left		0.002	0.023	0.049	0.012	0.051	
38-n38	right		0.036	0.024	0.057	0.002	0.093	
	Top		0.042	0.030	0.071	0.017	0.113	
	Bottom		0.002	0.002	0.010	0.002	0.012	
	Front	1RB	0.057	0.021	0.064	0.016	0.121	
	Back		0.078	0.042	0.092	0.028	0.170	
	Left		0.036	0.023	0.049	0.012	0.085	
	right		0.033	0.024	0.057	0.002	0.090	
	Top		0.053	0.030	0.071	0.017	0.124	
	Bottom	50%RB	0.002	0.002	0.010	0.002	0.012	
	Front		0.046	0.021	0.064	0.016	0.110	
	Back		0.064	0.042	0.092	0.028	0.156	
41-n41	Left		0.026	0.023	0.049	0.012	0.075	
	right		0.020	0.024	0.057	0.002	0.077	
	Top		0.042	0.030	0.071	0.017	0.113	
	Bottom		0.002	0.002	0.010	0.002	0.012	
	Front	1RB	0.038	0.021	0.064	0.016	0.102	
	Back		0.053	0.042	0.092	0.028	0.145	
	Left		0.011	0.023	0.049	0.012	0.060	
	right		0.034	0.024	0.057	0.002	0.091	
	Top		0.030	0.030	0.071	0.017	0.101	
	Bottom	50%RB	0.002	0.002	0.010	0.002	0.012	
	Front		0.034	0.021	0.064	0.016	0.098	
	Back		0.043	0.042	0.092	0.028	0.135	
	Left		0.008	0.023	0.049	0.012	0.057	
	right		0.025	0.024	0.057	0.002	0.082	
	Top		0.022	0.030	0.071	0.017	0.093	
	Bottom		0.002	0.002	0.010	0.002	0.012	

41-n77	Front	1RB	0.037	0.021	0.064	0.016	0.101	1.6
	Back		0.050	0.042	0.092	0.028	0.142	
	Left		0.008	0.023	0.049	0.012	0.057	
	right		0.027	0.024	0.057	0.002	0.084	
	Top		0.024	0.030	0.071	0.017	0.095	
	Bottom		0.002	0.002	0.010	0.002	0.012	
	Front	50%RB	0.031	0.021	0.064	0.016	0.095	
	Back		0.042	0.042	0.092	0.028	0.134	
	Left		0.009	0.023	0.049	0.012	0.058	
	right		0.025	0.024	0.057	0.002	0.082	
	Top		0.024	0.030	0.071	0.017	0.095	
41-n78	Bottom		0.002	0.002	0.010	0.002	0.012	
	Front	1RB	0.068	0.021	0.064	0.016	0.132	
	Back		0.084	0.042	0.092	0.028	0.176	
	Left		0.024	0.023	0.049	0.012	0.073	
	right		0.062	0.024	0.057	0.002	0.119	
	Top		0.068	0.030	0.071	0.017	0.139	
	Bottom		0.005	0.002	0.010	0.002	0.015	
	Front	50%RB	0.054	0.021	0.064	0.016	0.118	
	Back		0.068	0.042	0.092	0.028	0.160	
	Left		0.012	0.023	0.049	0.012	0.061	
	right		0.047	0.024	0.057	0.002	0.104	
	Top		0.053	0.030	0.071	0.017	0.124	
	Bottom		0.002	0.002	0.010	0.002	0.012	

Report No.: WSCT-ANAB-R&E241100057A-SAR SAR Evaluation Report

Band	Test Position	RB allocation	Scaled SAR			BT SAR 1g(W/kg)	Σ SAR (W/kg)	Llimit (W/kg)
			WWAN SAR 1g(W/kg)	WIFI2.4G SAR 1g(W/kg)	Wi-Fi 5G(Band 2) 1g(W/kg)			
66-n7	Front	1RB	0.103	0.021	0.064	0.016	0.167	1.6
	Back		0.163	0.042	0.092	0.028	0.255	
	Left		0.113	0.023	0.049	0.012	0.162	
	right		0.026	0.024	0.057	0.002	0.083	
	Top		0.097	0.030	0.071	0.017	0.168	
	Bottom		0.002	0.002	0.010	0.002	0.012	
	Front	50%RB	0.100	0.021	0.064	0.016	0.164	
	Back		0.145	0.042	0.092	0.028	0.237	
	Left		0.102	0.023	0.049	0.012	0.151	
	right		0.022	0.024	0.057	0.002	0.079	
	Top		0.048	0.030	0.071	0.017	0.119	
	Bottom		0.002	0.002	0.010	0.002	0.012	
66-n38	Front	1RB	0.059	0.021	0.064	0.016	0.123	
	Back		0.077	0.042	0.092	0.028	0.169	
	Left		0.046	0.023	0.049	0.012	0.095	
	right		0.019	0.024	0.057	0.002	0.076	
	Top		0.063	0.030	0.071	0.017	0.134	
	Bottom		0.002	0.002	0.010	0.002	0.012	
	Front	50%RB	0.055	0.021	0.064	0.016	0.119	
	Back		0.069	0.042	0.092	0.028	0.161	
	Left		0.044	0.023	0.049	0.012	0.093	
	right		0.017	0.024	0.057	0.002	0.074	
	Top		0.059	0.030	0.071	0.017	0.130	
	Bottom		0.002	0.002	0.010	0.002	0.012	
66-n41	Front	1RB	0.027	0.021	0.064	0.016	0.091	
	Back		0.037	0.042	0.092	0.028	0.129	
	Left		0.016	0.023	0.049	0.012	0.065	
	right		0.002	0.024	0.057	0.002	0.059	
	Top		0.019	0.030	0.071	0.017	0.090	
	Bottom		0.002	0.002	0.010	0.002	0.012	
	Front	50%RB	0.021	0.021	0.064	0.016	0.085	
	Back		0.030	0.042	0.092	0.028	0.122	
	Left		0.014	0.023	0.049	0.012	0.063	
	right		0.002	0.024	0.057	0.002	0.059	
	Top		0.016	0.030	0.071	0.017	0.087	
	Bottom		0.002	0.002	0.010	0.002	0.012	
66-n66	Front	1RB	0.067	0.021	0.064	0.016	0.131	
	Back		0.079	0.042	0.092	0.028	0.171	
	Left		0.059	0.023	0.049	0.012	0.108	
	right		0.015	0.024	0.057	0.002	0.072	
	Top		0.066	0.030	0.071	0.017	0.137	
	Bottom		0.004	0.002	0.010	0.002	0.014	
	Front	50%RB	0.058	0.021	0.064	0.016	0.122	
	Back		0.068	0.042	0.092	0.028	0.160	
	Left		0.048	0.023	0.049	0.012	0.097	
	right		0.010	0.024	0.057	0.002	0.067	
	Top		0.063	0.030	0.071	0.017	0.134	
	Bottom		0.003	0.002	0.010	0.002	0.013	

66-n77	Front	1RB	0.024	0.021	0.064	0.016	0.088	1.6
	Back		0.036	0.042	0.092	0.028	0.128	
	Left		0.003	0.023	0.049	0.012	0.052	
	right		0.018	0.024	0.057	0.002	0.075	
	Top		0.025	0.030	0.071	0.017	0.096	
	Bottom		0.002	0.002	0.010	0.002	0.012	
	Front	50%RB	0.021	0.021	0.064	0.016	0.085	
	Back		0.030	0.042	0.092	0.028	0.122	
	Left		0.002	0.023	0.049	0.012	0.051	
	right		0.013	0.024	0.057	0.002	0.070	
66-n78	Top		0.020	0.030	0.071	0.017	0.091	
	Bottom		0.002	0.002	0.010	0.002	0.012	
	Front	1RB	0.048	0.021	0.064	0.016	0.112	
	Back		0.059	0.042	0.092	0.028	0.151	
	Left		0.010	0.023	0.049	0.012	0.059	
	right		0.041	0.024	0.057	0.002	0.098	
	Top		0.053	0.030	0.071	0.017	0.124	
	Bottom		0.003	0.002	0.010	0.002	0.013	
	Front	50%RB	0.042	0.021	0.064	0.016	0.106	
	Back		0.054	0.042	0.092	0.028	0.146	
	Left		0.010	0.023	0.049	0.012	0.059	
	right		0.034	0.024	0.057	0.002	0.091	
	Top		0.043	0.030	0.071	0.017	0.114	
	Bottom		0.002	0.002	0.010	0.002	0.012	

12 Measurement uncertainty evaluation

12.1 Measurement uncertainty evaluation for SAR test

The following table includes the uncertainty table of the IEEE 1528. The values are determined by Satimo. The breakdown of the individual uncertainties is as follows:

Measurement Uncertainty evaluation for SAR test								
Uncertainty Component	Tol. (±%)	Prob. Dist.	Div.	C _i (1g)	C _i (10g)	1g U _i (±%)	10g U _i (±%)	V _i
measurement system								
Probe Calibration	5.8	N	1	1	1	5.8	5.8	∞
Axial Isotropy	3.5	R	$\sqrt{3}$	$(1-C_p)^{1/2}$	$(1-C_p)^{1/2}$	1.43	1.43	∞
Hemispherical Isotropy	5.9	R	$\sqrt{3}$	$\sqrt{C_p}$	$\sqrt{C_p}$	2.41	2.41	∞
Boundary Effect	1	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	4.7	R	$\sqrt{3}$	1	1	2.71	2.71	∞
system Detection Limits	1	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation response	3	N	1	1	1	3.00	3.00	∞
Readout Electronics	0.5	N	1	1	1	0.50	0.50	∞
Response Time	0	R	$\sqrt{3}$	1	1	0.00	0.00	∞
Integration Time	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
RF Ambient Conditions-Noise	3	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF Ambient Conditions-Reflections	3	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe Positioner Mechanical Tolerance	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to Phantom Shell	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Extrapolation, interpolation and Integration Algorithms for Max.SAR Evaluation	2.3	R	$\sqrt{3}$	1	1	1.33	1.33	∞
Test sample Related								
Test Sample Positioning	2.6	N	1	1	1	2.60	2.60	11
Device Holder Uncertainty	3	N	1	1	1	3.00	3.00	7
Output Power Variation-SAR drift measurement	5	R	$\sqrt{3}$	1	1	2.89	2.89	∞
SAR scaling	2	R	$\sqrt{3}$	1	1	1.15	1.15	∞

Phantom and Tissue Parameters								
Phantom Uncertainty (shape and thickness tolerances)	4	R	$\sqrt{3}$	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviation (in permittivity and conductivity)	2	N	1	1	0.84	2.00	1.68	∞
Liquid conductivity (meas.)	2.5	N	1	0.64	0.43	1.60	1.08	5
Liquid conductivity (target.)	5	R	$\sqrt{3}$	0.64	0.43	1.85	1.24	5
Liquid Permittivity (meas.)	2.5	N	1	0.60	0.49	1.50	1.23	∞
Liquid Permittivity (target.)	5	R	$\sqrt{3}$	0.60	0.49	1.73	1.42	∞
Combined Standard Uncertainty		Rss				10.63	10.54	
Expanded Uncertainty{95% CONFIDENCE INTERVAL}		k				21.26	21.08	