

TEST REPORT

FCC ID: 2ADYY-LJ9

Product: Mobile Phone

Model No.: LJ9

Trade Mark: TECNO

Report No.: WSCT-ANAB-R&E250300017A-Wi-Fi2

Issued Date: 22 May 2025

Issued for:

TECNO MOBILE LIMITED
FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET
FOTAN NT HONGKONG

Issued By:

World Standardization Certification & Testing Group(Shenzhen) Co., Ltd.
Building A-B, Baoli'an Industrial Park, No.58 and 60, Tangtou Avenue, Shiyan
Street, Bao'an District, Shenzhen City, Guangdong Province, China
TEL: +86-755-26996192
FAX: +86-755-86376605

Note: This report shall not be reproduced except in full, without the written approval of World Standardization Certification & Testing Group (Shenzhen) Co., Ltd. This document may be altered or revised by World Standardization Certification & Testing Group (Shenzhen) Co., Ltd. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

TABLE OF CONTENTS

1 TEST CERTIFICATION	3
2 EUT DESCRIPTION	4
3 TEST DESCRIPTION	5
3.1 MEASUREMENT UNCERTAINTY	5
3.2 TEST ENVIRONMENT AND MODE	6
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	7
3.4 DESCRIPTION OF SUPPORT UNITS (CONDUCTED MODE)	8
4 SUMMARY OF TEST RESULTS	9
5 MEASUREMENT INSTRUMENTS	10
6 FACILITIES AND ACCREDITATIONS	11
6.1 FACILITIES	11
6.2 ACCREDITATIONS	11
7 TEST RESULTS AND MEASUREMENT DATA	12
7.1 CONDUCTED EMISSION MEASUREMENT	12
7.2 DEVIATION FROM TEST STANDARD	13
7.3 RADIATED EMISSION MEASUREMENT	16
7.4 ANTENNA REQUIREMENT	39
7.5 EMISSION BANDWIDTH	40
7.6 MAXIMUM CONDUCTED OUTPUT POWER	79
7.7 POWER SPECTRAL DENSITY	151
7.8 FREQUENCY STABILITY	223
7.9 BAND EDGE EMISSIONS	259
7.10 DYNAMIC FREQUENCY SELECTION (DFS)	296
8 TEST SETUP PHOTOGRAPHS	308

Report No.: WSCT-ANAB-R&E250300017A-Wi-Fi2

Issued Date: 22 May 2025

1 Test Certification

Product: Mobile Phone

Model No.: LJ9

Additional Model: TECNO

Applicant: **TECNO MOBILE LIMITED**
FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN
MEI STREET FOTAN NT HONGKONG

Manufacturer: **TECNO MOBILE LIMITED**
FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN
MEI STREET FOTAN NT HONGKONG

Date of Test: 07 March 2025 to 22 May 2025

Applicable Standards: FCC CFR Title 47 FCC Part 15 Subpart E

The above equipment has been tested by World Standardization Certification & Testing Group(Shenzhen)Co., Ltd. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By:

Wang Xiang
(Wang Xiang)

Checked By:

Chen Xu
(Chen Xu)

Approved By:

Qin Shuiquan
(Qin Shuiquan)

Date:

22 May 2025

2 EUT Description

Product:	Mobile Phone
Model No.:	LJ9
Trade Mark:	TECNO
Operation Frequency:	Band 1: 5180-5240 MHz Band 2: 5260-5320 MHz Band 3: 5500-5700 MHz Band 4: 5745-5825 MHz
Modulation type:	IEEE 802.11a/n/ac/ax: OFDM (BPSK/QPSK/16QAM/64QAM/256QAM/1024QAM)
Antenna Type:	Integral Antenna
Antenna Gain	ANT1:-1.7dBi, ANT2:-0.6dBi
Operating Voltage:	Adapter: U700TSA Input: 100-240V~50/60Hz 2.0A Output: 5.0V~3.0A 15.0W or 5.0-10.0V~7.0A MAX or 11.0V~6.4A MAX or 4.0-20.0V~3.5A 70.0W MAX Rechargeable Li-ion Polymer Battery: BL-58GT Rated Voltage: 3.91V Rated Capacity: 5850mAh/22.88Wh Typical Capacity: 6000mAh/23.46Wh Limited Charge Voltage: 4.50V
Remark:	N/A.

Note: 1. N/A stands for no applicable.

2. The antenna gain is provided by the customer. For any reported data issues caused by the antenna gain, World Standardization Certification&Testing Group (Shenzhen) Co., Ltd assumes no responsibility.

3 TEST DESCRIPTION

3.1 MEASUREMENT UNCERTAINTY

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 3.2\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(<1GHz)	$\pm 4.7\text{dB}$
5	All emissions, radiated(>1GHz)	$\pm 4.7\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$
8	Receiver Spurious Emissions	$\pm 2.5\%$
9	Transmitter Unwanted Emissions in the Spurious Domain	$\pm 2.5\%$
10	Transmitter Unwanted Emission in the out-of Band	$\pm 1.3\%$
11	Occupied Channel Bandwidth	$\pm 2.4\%$

NOTE:1.The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

2. The U_{lab} is less than U_{cispr} , compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit; non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

3. For conducted emission test of laboratory have a measurement uncertainty greater than that specified in harmonized standard, this equipment can still be used provided that an adjustment is made follows : any additional uncertainty in the test system over and above that specified in harmonized standard should be used to tighten the test requirements-making the test harder to pass. This procedure will ensure that a test system not compliant with harmonized standard does not increase the probability of passing a EUT that would otherwise have failed a test if a test system compliant with harmonized standard had been used.

3.2 TEST ENVIRONMENT AND MODE

Operating Environment:

Temperature:	25.0 °C
--------------	---------

Humidity:	56 % RH
-----------	---------

Atmospheric Pressure:	1010 mbar
-----------------------	-----------

Test Mode:

Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations(The value of duty cycle is 98.46%)
-------------------	--

The sample was placed (0.8m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. For the full battery state and The output power to the maximum state.

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Test Mode	Description
Mode 1	802.11a
Mode 2	802.11n20
Mode 3	802.11n40
Mode 4	802.11ac20
Mode 5	802.11ac40
Mode 6	802.11ac80

Note:

(1) The measurements are performed at the highest, lowest available channels.

(2) The EUT use new battery.

(3) Record the worst case of each test item in this report.

3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

Test program	***3646633***							
Mode	Test Frequency (MHz)							
	NCB: 20MHz							
802.11a	5180	5240	5260	5320	5500	5700	5745	5825
802.11n	5180	5240	5260	5320	5500	5700	5745	5825
802.11ac	5180	5240	5260	5320	5500	5700	5745	5825
	NCB: 40MHz							
802.11n	5190	5230	5270	5310	5510	5670	5755	5795
802.11ac	5190	5230	5270	5310	5510	5670	5755	5795
	NCB: 80MHz							
802.11ac	5210	5290	5530	5610	5775			

Report No.: WSCT-ANAB-R&E250300017A-Wi-Fi2 Issued Date: 22 May 2025

CONFIGURATION OF SYSTEM UNDER TEST



(EUT: Mobile Phone)

3.4 DESCRIPTION OF SUPPORT UNITS (CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	Adapter	/	U700TSA	/	/

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.
- (4) The adapter supply by the applicant.

4 SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 Subpart C&E			
Standard Section	Test Item	Judgment	Remark
2.1049 15.403(i)	26dB & 99% Bandwidth	PASS	Complies
15.407(e)	6dB Spectrum Bandwidth	PASS	Complies
15.407(a)	Maximum Conducted Output Power	PASS	Complies
15.407(a)	Power Spectral Density	PASS	Complies
15.407(b)	Unwanted Emissions	PASS	Complies
15.207	AC Conducted Emission	PASS	Complies
15.407(g)	Frequency Stability	PASS	Complies
15.407(c)	Automatically Discontinue Transmission	PASS	Complies
15.203 & 15.407(a)	Antenna Requirement	PASS	Complies
15.407(h)	Transmit Power Control (TPC) and Dynamic Frequency Selection (DFS)	PASS	Complies

NOTE:

(1) "N/A" denotes test is not applicable in this test report.

5 MEASUREMENT INSTRUMENTS

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	Calibration Date	Calibration Due.
Test software	--	EZ-EMC	CON-03A	-	-
Test software	--	MTS8310	-	-	-
EMI Test Receiver	R&S	ESCI	100005	11/05/2024	11/04/2025
LISN	AFJ	LS16	16010222119	11/05/2024	11/04/2025
LISN(EUT)	Mestec	AN3016	04/10040	11/05/2024	11/04/2025
Universal Radio Communication Tester	R&S	CMU 200	1100.0008.02	11/05/2024	11/04/2025
Coaxial cable	Megalon	LMR400	N/A	11/05/2024	11/04/2025
GPIO cable	Megalon	GPIO	N/A	11/05/2024	11/04/2025
Spectrum Analyzer	R&S	FSU	100114	11/05/2024	11/04/2025
Pre Amplifier	H.P.	HP8447E	2945A02715	11/05/2024	11/04/2025
Pre-Amplifier	CDSI	PAP-1G18-38	--	11/05/2024	11/04/2025
Bi-log Antenna	SCHWARZBECK	VULB9168	01488	7/29/2024	7/28/2025
9*6*6 Anechoic	--	--	--	11/05/2024	11/04/2025
Horn Antenna	COMPLIANCE ENGINEERING	CE18000	--	11/05/2024	11/04/2025
Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-631	11/05/2024	11/04/2025
Cable	TIME MICROWAVE	LMR-400	N-TYPE04	11/05/2024	11/04/2025
System-Controller	CCS	N/A	N/A	N.C.R	N.C.R
Turn Table	CCS	N/A	N/A	N.C.R	N.C.R
Antenna Tower	CCS	N/A	N/A	N.C.R	N.C.R
RF cable	Murata	MXHQ87WA3000	-	11/05/2024	11/04/2025
Loop Antenna	EMCO	6502	00042960	11/05/2024	11/04/2025
Horn Antenna	SCHWARZBECK	BBHA 9170	1123	11/05/2024	11/04/2025
Power meter	Anritsu	ML2487A	6K00003613	11/05/2024	11/04/2025
Power sensor	Anritsu	MX248XD	--	11/05/2024	11/04/2025
Spectrum Analyzer	Keysight	N9010B	MY60241089	11/05/2024	11/04/2025

6 Facilities and Accreditations

6.1 FACILITIES

All measurement facilities used to collect the measurement data are located at **Building A-B, Baoli'an Industrial Park, No.58 and 60, Tangtou Avenue, Shiyan Street, Bao'an District, Shenzhen City, Guangdong Province, China** of the World Standardization Certification & Testing Group (Shenzhen) Co., Ltd.

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6.2 ACCREDITATIONS

ANAB - Certificate Number: AT-3951

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (ANAB). Certification Number: AT-3951

7 Test Results and Measurement Data

7.1 CONDUCTED EMISSION MEASUREMENT

POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


7.1.1 TEST PROCEDURE

- The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

7.2 DEVIATION FROM TEST STANDARD

No deviation

TEST SETUP

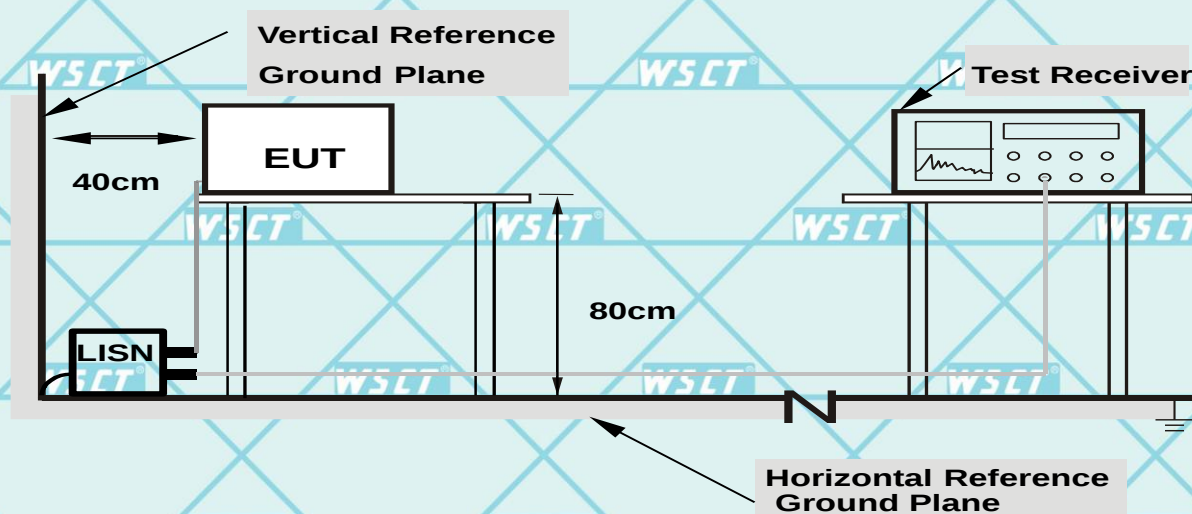

Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

7.2.1 EUT OPERATING CONDITIONS


The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Report No.: WSCT-ANAB-R&E250300017A-Wi-Fi2 Issued Date: 22 May 2025

7.2.2 TEST RESULTS


Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)-worst

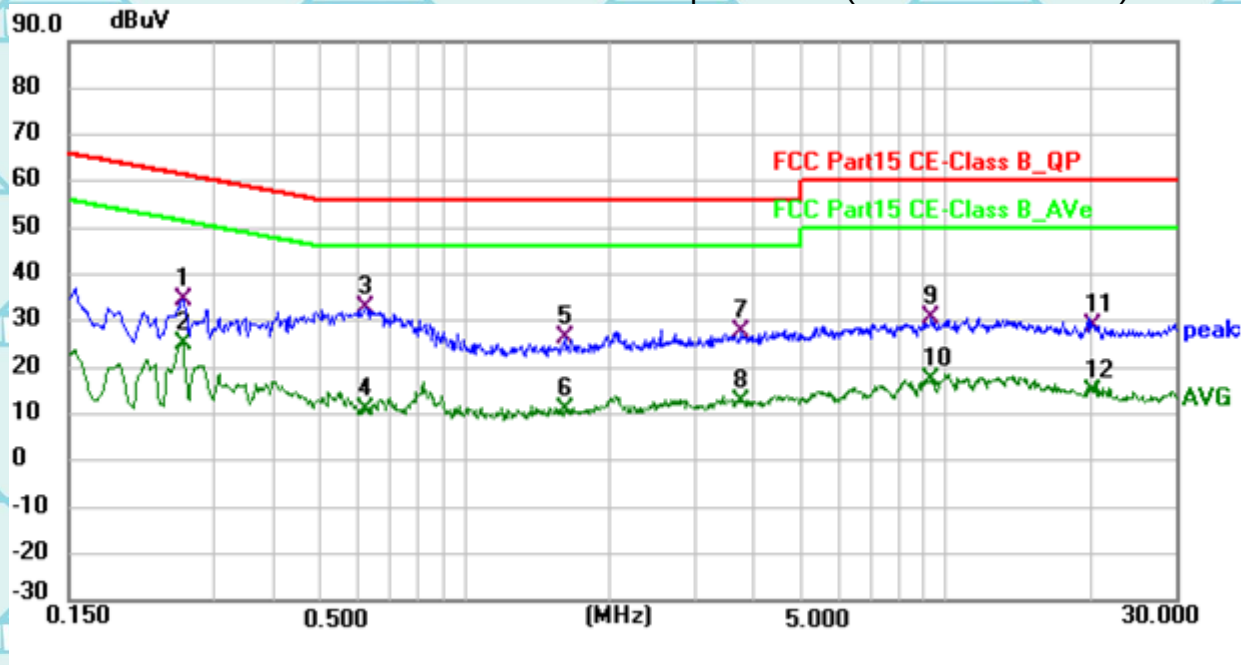

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2580	13.93	20.66	34.59	61.50	-26.91	QP
2	0.2580	4.55	20.66	25.21	51.50	-26.29	AVG
3 *	0.6225	12.38	20.53	32.91	56.00	-23.09	QP
4	0.6225	-9.49	20.53	11.04	46.00	-34.96	AVG
5	1.6170	5.71	20.63	26.34	56.00	-29.66	QP
6	1.6170	-9.64	20.63	10.99	46.00	-35.01	AVG
7	3.7410	7.13	20.59	27.72	56.00	-28.28	QP
8	3.7410	-8.04	20.59	12.55	46.00	-33.45	AVG
9	9.3073	10.17	20.46	30.63	60.00	-29.37	QP
10	9.3073	-3.29	20.46	17.17	50.00	-32.83	AVG
11	20.1930	8.55	20.27	28.82	60.00	-31.18	QP
12	20.1930	-5.37	20.27	14.90	50.00	-35.10	AVG

Remark: All the modes have been investigated, and only worst mode is presented in this report.

Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

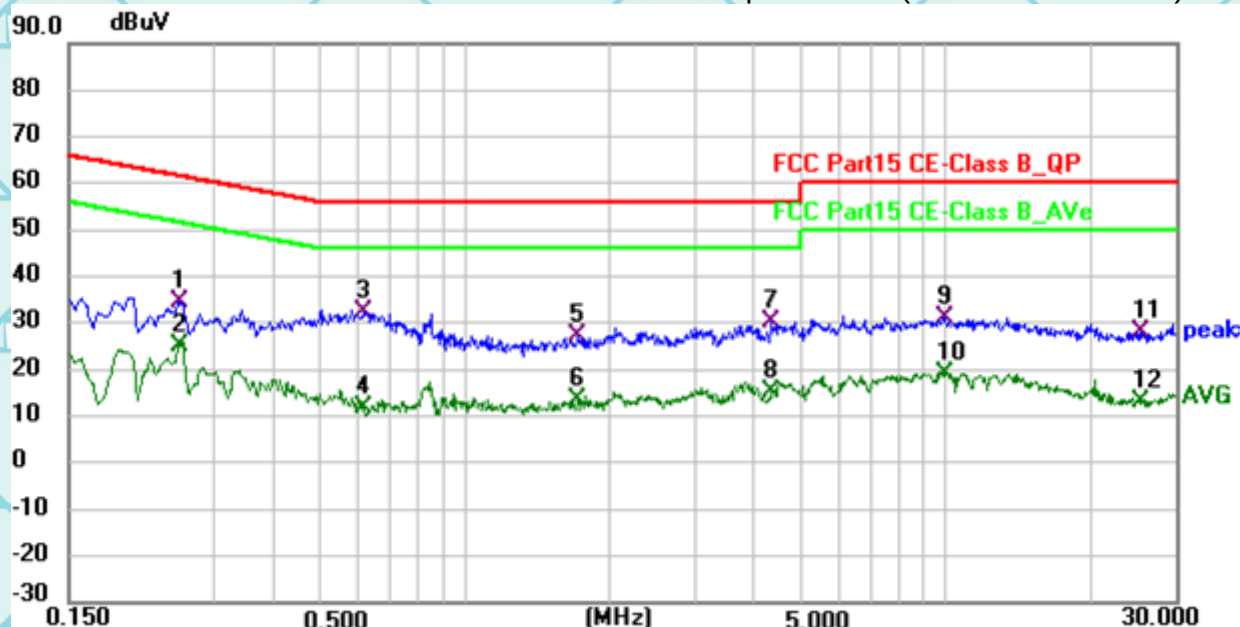

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2535	13.81	20.66	34.47	61.64	-27.17	QP
2	0.2535	4.29	20.66	24.95	51.64	-26.69	AVG
3 *	0.6180	11.62	20.53	32.15	56.00	-23.85	QP
4	0.6180	-8.90	20.53	11.63	46.00	-34.37	AVG
5	1.7250	6.58	20.63	27.21	56.00	-28.79	QP
6	1.7250	-7.07	20.63	13.56	46.00	-32.44	AVG
7	4.3530	9.68	20.58	30.26	56.00	-25.74	QP
8	4.3530	-5.41	20.58	15.17	46.00	-30.83	AVG
9	9.9780	10.49	20.45	30.94	60.00	-29.06	QP
10	9.9780	-1.38	20.45	19.07	50.00	-30.93	AVG
11	25.4490	7.38	20.65	28.03	60.00	-31.97	QP
12	25.4490	-7.51	20.65	13.14	50.00	-36.86	AVG

Note1:

Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Measurement (dBuV) – Limits (dBuV)

Q.P. = Quasi-Peak AVG = average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

7.3 RADIATED EMISSION MEASUREMENT

Radiated Emission Limits (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 1Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

7.3.1 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported


7.3.2 DEVIATION FROM TEST STANDARD

No deviation


Report No.: WSCT-ANAB-R&E250300017A-Wi-Fi2 Issued Date: 22 May 2025

7.3.3 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

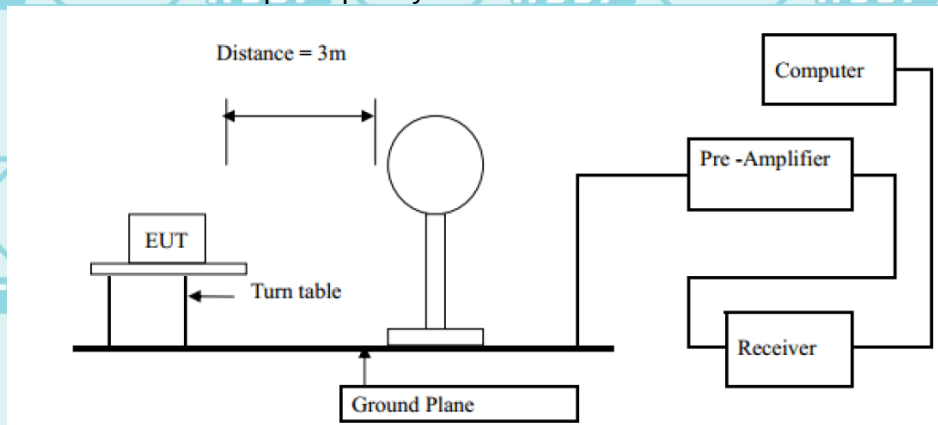

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

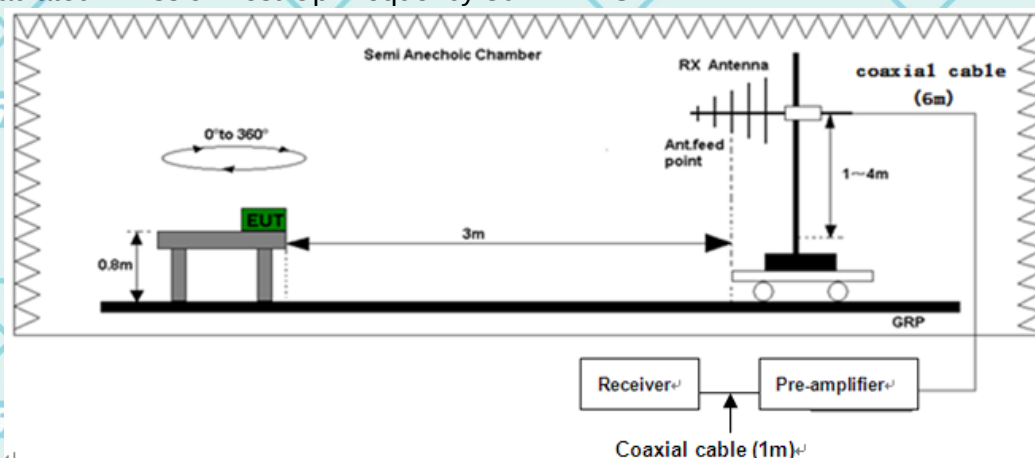

(C) Radiated Emission Test-Up Frequency Above 1GHz

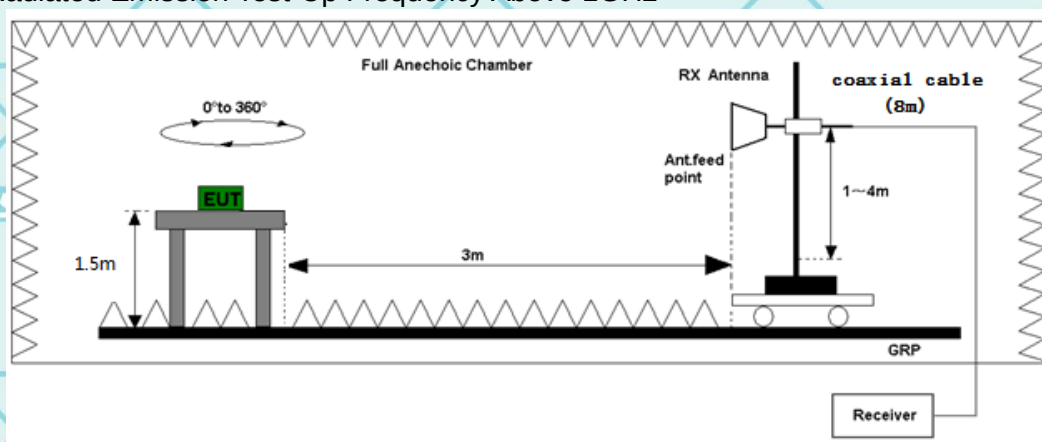

7.3.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.3.5 RESULTS (BELOW 30 MHZ)

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	P
--	--	--	--	P

Note 1: The symbol of "--" in the table which means not application.

Note 2: For the test data above 1 GHz, According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note 3: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Note 4: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and normal link mode is worst.

Report No.: WSCT-ANAB-R&E250300017A-Wi-Fi2 Issued Date: 22 May 2025

7.3.6 TEST RESULTS (BETWEEN 30M – 1000 MHZ)

Please refer to following diagram for individual
Below 1GHz

Horizontal:



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	50.3700	40.28	-6.81	33.47	40.00	-6.53	QP
2		97.9000	39.84	-10.72	29.12	43.50	-14.38	QP
3		309.3599	37.29	0.35	37.64	46.00	-8.36	QP
4		608.1200	27.02	7.88	34.90	46.00	-11.10	QP
5		842.8600	26.76	11.84	38.60	46.00	-7.40	QP
6		990.3000	25.79	14.37	40.16	54.00	-13.84	QP

Remark: All the modes have been investigated, and only worst mode is presented in this report.

Report No.: WSCT-ANAB-R&E250300017A-Wi-Fi2 Issued Date: 22 May 2025

Vertical:



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		43.5800	53.26	-20.52	32.74	40.00	-7.26	QP
2		73.6500	46.41	-20.26	26.15	40.00	-13.85	QP
3		309.3599	49.36	-19.22	30.14	46.00	-15.86	QP
4		607.1500	52.75	-17.69	35.06	46.00	-10.94	QP
5	*	875.8400	55.45	-16.14	39.31	46.00	-6.69	QP
6		994.1800	55.28	-15.31	39.97	54.00	-14.03	QP

Note1:

Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss - Amplifier factor.

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Measurement (dBuV) - Limits (dBuV)


Report No.: WSCT-ANAB-R&E250300017A-Wi-Fi2 Issued Date: 22 May 2025

7.3.7 TEST RESULTS (ABOVE 1GHZ)

Note: 1.The spurious above 18G is noise only, do not show on the report.

2. Report and only recorded the worst-case scenario 802.11a.

11a, 1 GHz to 18 GHz, Channel (5180 MHz), ANT H

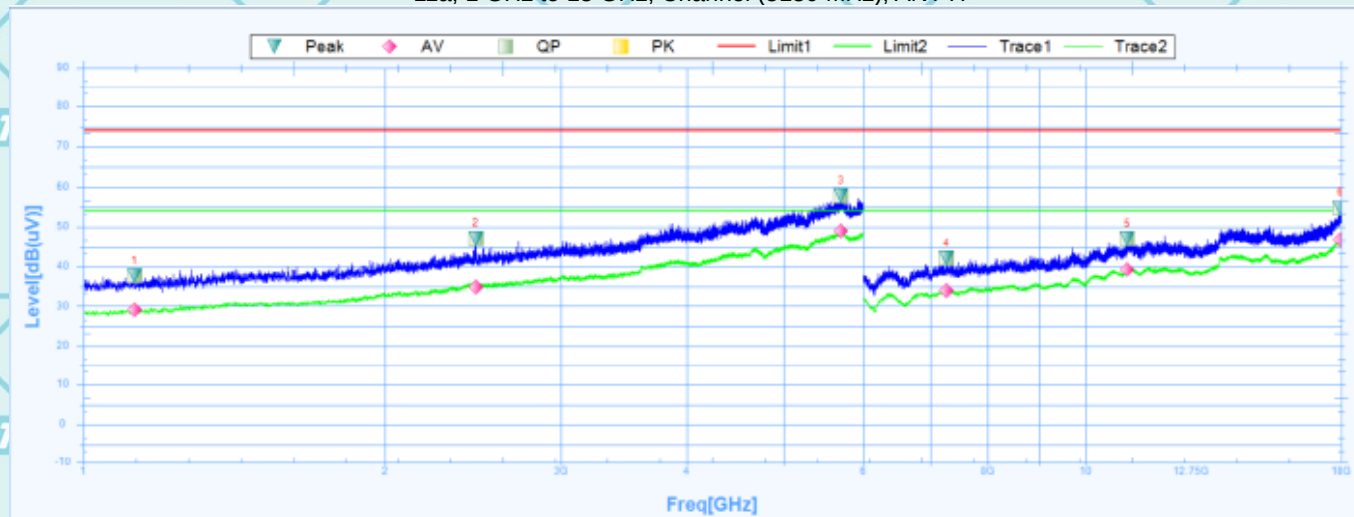


Suspected Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1125.0000	37.69	-2.4	40.09	74	-36.31	315.4	Horizontal	PK	Pass
1	1125.0000	29.03	-2.4	31.43	54	-24.97	315.4	Horizontal	AV	Pass
2	2463.1250	47.11	5.41	41.7	74	-26.89	138.4	Horizontal	PK	Pass
2	2463.1250	34.9	5.41	29.49	54	-19.1	138.4	Horizontal	AV	Pass
3	5704.3750	57.79	21.15	36.64	74	-16.21	120.5	Horizontal	PK	Pass
3	5704.3750	48.98	21.15	27.83	54	-5.02	120.5	Horizontal	AV	Pass
4	7269.0000	42.1	35.9	6.2	74	-31.9	55.5	Horizontal	PK	Pass
4	7269.0000	34.03	35.9	-1.87	54	-19.97	55.5	Horizontal	AV	Pass
5	11014.5000	46.92	39.49	7.43	74	-27.08	1.9	Horizontal	PK	Pass
5	11014.5000	39.18	39.49	-0.31	54	-14.82	1.9	Horizontal	AV	Pass
6	17967.0000	54.84	46.28	8.56	74	-19.16	360.1	Horizontal	PK	Pass
6	17967.0000	46.71	46.28	0.43	54	-7.29	360.1	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E250300017A-Wi-Fi2 Issued Date: 22 May 2025

11a, 1 GHz to 18 GHz, Channel (5180 MHz), ANT V

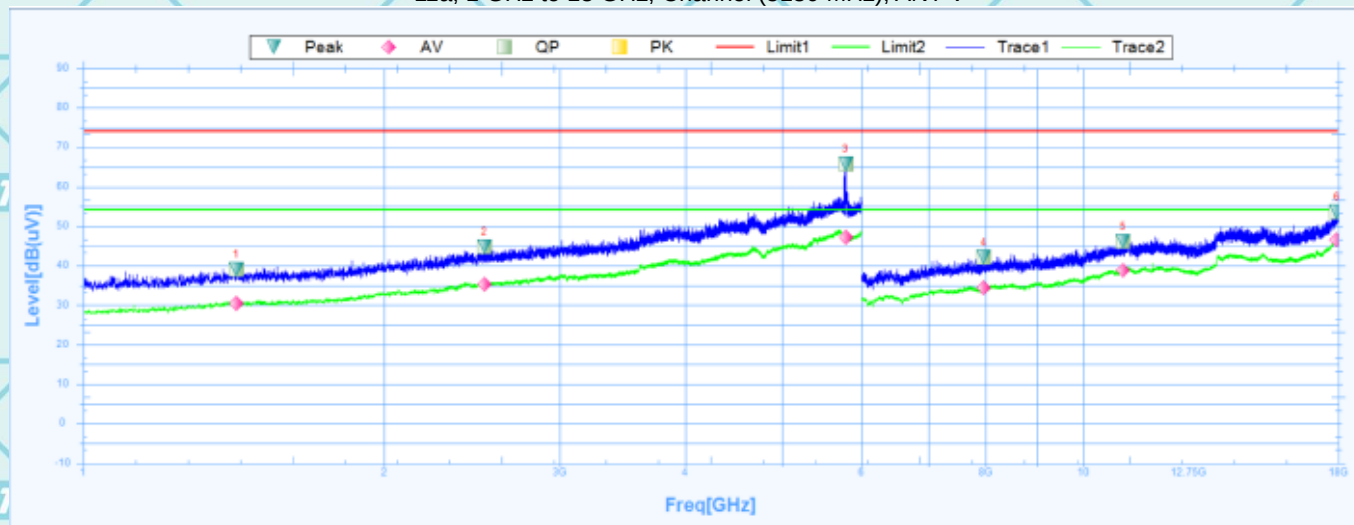


Suspected Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1421.8750	38.96	-0.51	39.47	74	-35.04	167	Vertical	PK	Pass
1	1421.8750	30.54	-0.51	31.05	54	-23.46	167	Vertical	AV	Pass
2	2519.3750	44.78	5.74	39.04	74	-29.22	110.8	Vertical	PK	Pass
2	2519.3750	35.3	5.74	29.56	54	-18.7	110.8	Vertical	AV	Pass
3	5791.2500	65.76	20.38	45.38	74	-8.24	241.1	Vertical	PK	Pass
3	5791.2500	47.32	20.38	26.94	54	-6.68	241.1	Vertical	AV	Pass
4	7957.5000	42.06	36.94	5.12	74	-31.94	78.2	Vertical	PK	Pass
4	7957.5000	34.33	36.94	-2.61	54	-19.67	78.2	Vertical	AV	Pass
5	10965.0000	46.16	39.45	6.71	74	-27.84	208.5	Vertical	PK	Pass
5	10965.0000	38.93	39.45	-0.52	54	-15.07	208.5	Vertical	AV	Pass
6	17935.5000	53.7	46.07	7.63	74	-20.3	149.9	Vertical	PK	Pass
6	17935.5000	46.58	46.07	0.51	54	-7.42	149.9	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E250300017A-Wi-Fi2 Issued Date: 22 May 2025

11a, 1 GHz to 18 GHz, Channel (5240 MHz), ANT H

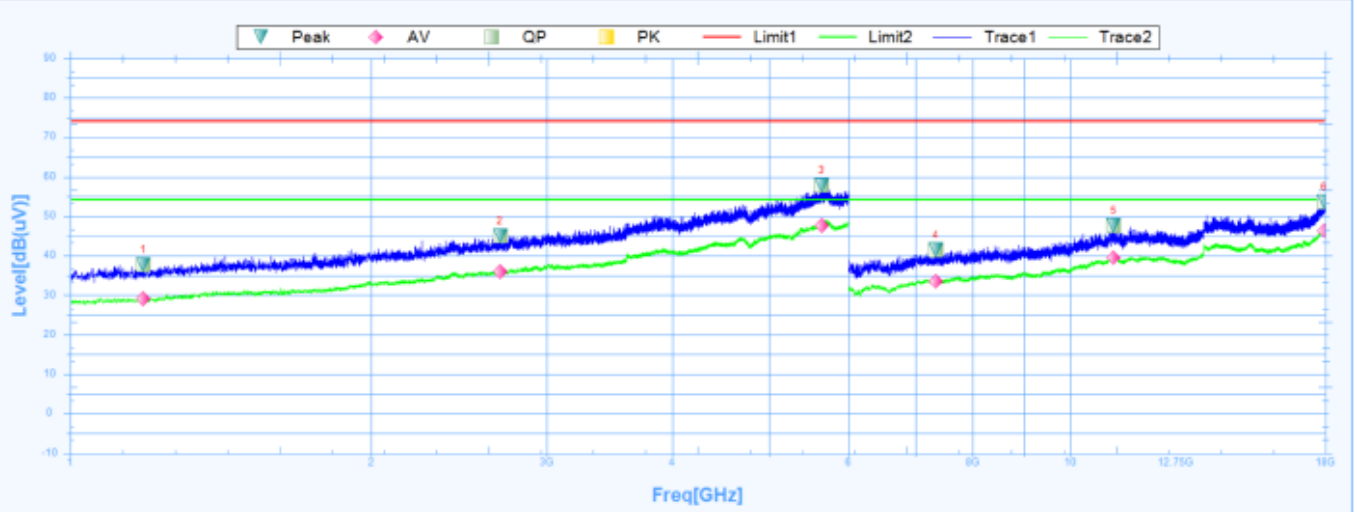


Suspected Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1183.7500	37.73	24.39	13.34	74	-36.27	179	Horizontal	PK	Pass
1	1183.7500	29.1	24.39	4.71	54	-24.9	179	Horizontal	AV	Pass
2	2691.8750	44.99	27.83	17.16	74	-29.01	359.3	Horizontal	PK	Pass
2	2691.8750	36	27.83	8.17	54	-18	359.3	Horizontal	AV	Pass
3	5643.7500	57.88	32.23	25.65	74	-16.12	115.7	Horizontal	PK	Pass
3	5643.7500	47.72	32.23	15.49	54	-6.28	115.7	Horizontal	AV	Pass
4	7339.5000	41.56	6.94	34.62	74	-32.44	9.3	Horizontal	PK	Pass
4	7339.5000	33.53	6.94	26.59	54	-20.47	9.3	Horizontal	AV	Pass
5	11061.0000	47.74	15.82	31.92	74	-26.26	93.8	Horizontal	PK	Pass
5	11061.0000	39.39	15.82	23.57	54	-14.61	93.8	Horizontal	AV	Pass
6	17943.0000	53.69	23.53	30.16	74	-20.31	124.8	Horizontal	PK	Pass
6	17943.0000	46.4	23.53	22.87	54	-7.6	124.8	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E250300017A-Wi-Fi2 Issued Date: 22 May 2025

11a, 1 GHz to 18 GHz, Channel (5240 MHz), ANT V

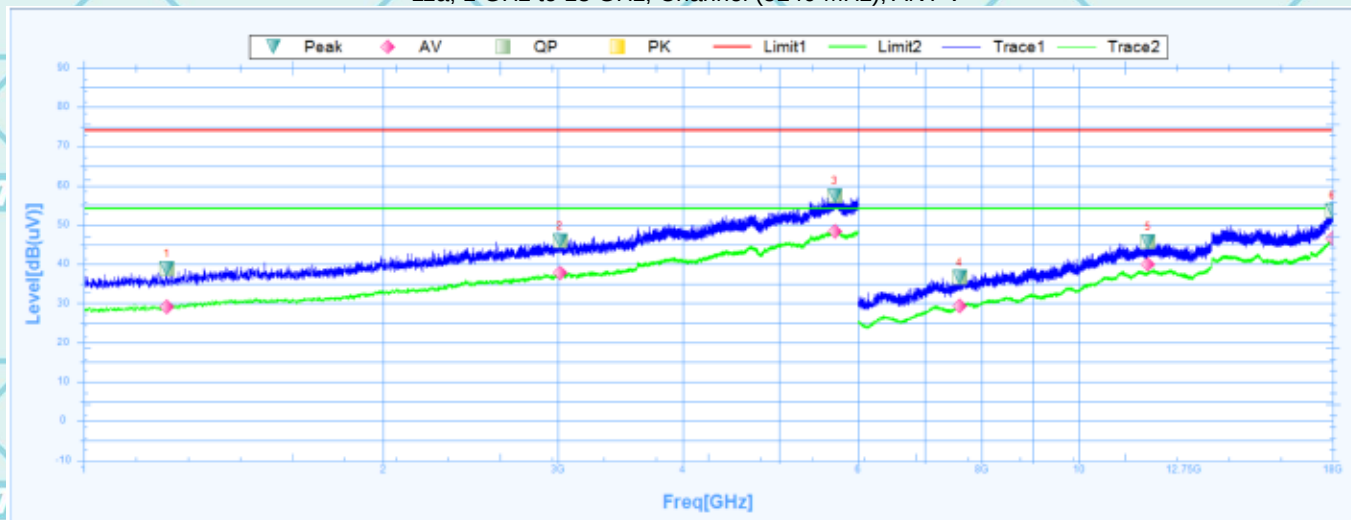

Suspected Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1211.8750	38.82	24.44	14.38	74	-35.18	-0.1	Vertical	PK	Pass
1	1211.8750	29.03	24.44	4.59	54	-24.97	-0.1	Vertical	AV	Pass
1	1211.8750	38.82	24.44	14.38	74	-35.18	-0.1	Vertical	QP	Pass
2	3010.0000	45.88	28.21	17.67	74	-28.12	-0.1	Vertical	PK	Pass
2	3010.0000	37.62	28.21	9.41	54	-16.38	-0.1	Vertical	AV	Pass
2	3010.0000	45.88	28.21	17.67	74	-28.12	-0.1	Vertical	QP	Pass
3	5685.0000	57.31	32.3	25.01	74	-16.69	54.6	Vertical	PK	Pass
3	5685.0000	48.43	32.3	16.13	54	-5.57	54.6	Vertical	AV	Pass
3	5685.0000	57.31	32.3	25.01	74	-16.69	54.6	Vertical	QP	Pass
4	7593.0000	36.59	7.89	28.7	74	-37.41	360	Vertical	PK	Pass
4	7593.0000	29.29	7.89	21.4	54	-24.71	360	Vertical	AV	Pass
4	7593.0000	36.59	7.89	28.7	74	-37.41	360	Vertical	QP	Pass
5	11745.0000	45.74	16.11	29.63	74	-28.26	136.7	Vertical	PK	Pass
5	11745.0000	40.01	16.11	23.9	54	-13.99	136.7	Vertical	AV	Pass
5	11745.0000	45.74	16.11	29.63	74	-28.26	136.7	Vertical	QP	Pass
6	17980.5000	53.57	23.79	29.78	74	-20.43	15.8	Vertical	PK	Pass
6	17980.5000	46.64	23.79	22.85	54	-7.36	15.8	Vertical	AV	Pass
6	17980.5000	53.57	23.79	29.78	74	-20.43	15.8	Vertical	QP	Pass

Report No.: WSCT-ANAB-R&E250300017A-Wi-Fi2 Issued Date: 22 May 2025

11a, 1 GHz to 18 GHz, Channel (5260 MHz), ANT H




Suspected Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1486.8750	40.75	-0.39	41.14	74	-33.25	218.4	Horizontal	PK	Pass
1	1486.8750	30.61	-0.39	31	54	-23.39	218.4	Horizontal	AV	Pass
2	2721.8750	45.57	6.42	39.15	74	-28.43	16.4	Horizontal	PK	Pass
2	2721.8750	35.91	6.42	29.49	54	-18.09	16.4	Horizontal	AV	Pass
3	5616.8750	57.55	20.3	37.25	74	-16.45	16.4	Horizontal	PK	Pass
3	5616.8750	47.6	20.3	27.3	54	-6.4	16.4	Horizontal	AV	Pass
4	7614.0000	42.23	36.42	5.81	74	-31.77	349.2	Horizontal	PK	Pass
4	7614.0000	34.14	36.42	-2.28	54	-19.86	349.2	Horizontal	AV	Pass
5	11085.0000	46.84	39.42	7.42	74	-27.16	142.8	Horizontal	PK	Pass
5	11085.0000	39.21	39.42	-0.21	54	-14.79	142.8	Horizontal	AV	Pass
6	17934.0000	54.08	46.06	8.02	74	-19.92	9.3	Horizontal	PK	Pass
6	17934.0000	46.32	46.06	0.26	54	-7.68	9.3	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E250300017A-Wi-Fi2 Issued Date: 22 May 2025

11a, 1 GHz to 18 GHz, Channel (5260 MHz), ANT V

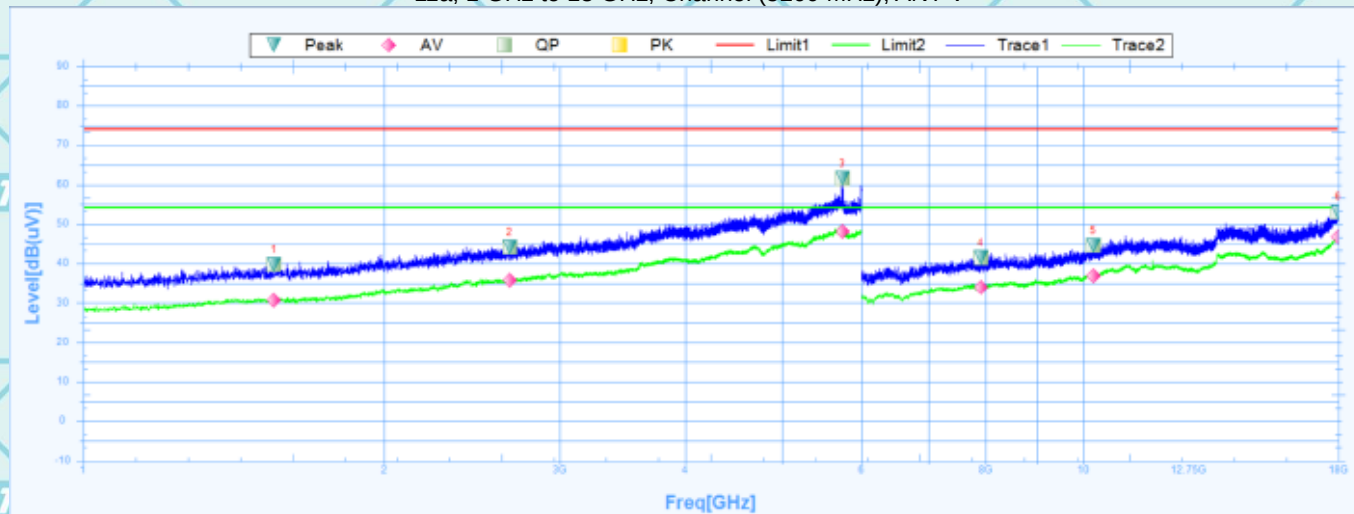


Suspected Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1551.8750	39.73	24.95	14.78	74	-34.27	261.7	Vertical	PK	Pass
1	1551.8750	30.57	24.95	5.62	54	-23.43	261.7	Vertical	AV	Pass
2	2670.0000	44.2	27.8	16.4	74	-29.8	345	Vertical	PK	Pass
2	2670.0000	35.72	27.8	7.92	54	-18.28	345	Vertical	AV	Pass
3	5745.6250	61.63	32.39	29.24	74	-12.37	358.2	Vertical	PK	Pass
3	5745.6250	48.19	32.39	15.8	54	-5.81	358.2	Vertical	AV	Pass
4	7897.5000	41.44	8.03	33.41	74	-32.56	103.3	Vertical	PK	Pass
4	7897.5000	33.87	8.03	25.84	54	-20.13	103.3	Vertical	AV	Pass
5	10233.0000	44.52	13.09	31.43	74	-29.48	53	Vertical	PK	Pass
5	10233.0000	36.88	13.09	23.79	54	-17.12	53	Vertical	AV	Pass
6	17989.5000	53.07	23.86	29.21	74	-20.93	255.1	Vertical	PK	Pass
6	17989.5000	46.85	23.86	22.99	54	-7.15	255.1	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E250300017A-Wi-Fi2 Issued Date: 22 May 2025

11a, 1 GHz to 18 GHz, Channel (5320 MHz), ANT H

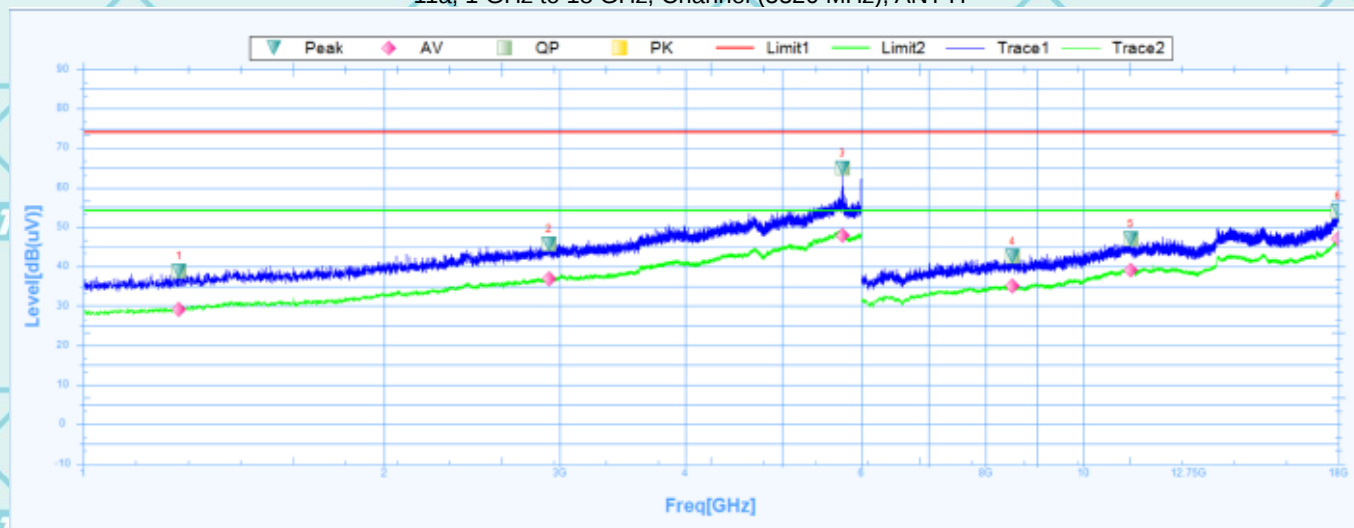

Suspected Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1247.5000	38.76	24.57	14.19	74	-35.24	59.4	Horizontal	PK	Pass
1	1247.5000	29.02	24.57	4.45	54	-24.98	59.4	Horizontal	AV	Pass
1	1247.5000	38.76	24.57	14.19	74	-35.24	59.4	Horizontal	QP	Pass
2	2923.1250	45.61	28.11	17.5	74	-28.39	8.8	Horizontal	PK	Pass
2	2923.1250	36.9	28.11	8.79	54	-17.1	8.8	Horizontal	AV	Pass
2	2923.1250	45.61	28.11	17.5	74	-28.39	8.8	Horizontal	QP	Pass
3	5745.6250	64.9	32.39	32.51	74	-9.1	358.2	Horizontal	PK	Pass
3	5745.6250	47.92	32.39	15.53	54	-6.08	358.2	Horizontal	AV	Pass
3	5745.6250	64.9	32.39	32.51	74	-9.1	358.2	Horizontal	QP	Pass
4	8500.5000	42.49	9.22	33.27	74	-31.51	0.5	Horizontal	PK	Pass
4	8500.5000	35.03	9.22	25.81	54	-18.97	0.5	Horizontal	AV	Pass
4	8500.5000	42.49	9.22	33.27	74	-31.51	0.5	Horizontal	QP	Pass
5	11161.5000	46.96	15.79	31.17	74	-27.04	43.6	Horizontal	PK	Pass
5	11161.5000	38.96	15.79	23.17	54	-15.04	43.6	Horizontal	AV	Pass
5	11161.5000	46.96	15.79	31.17	74	-27.04	43.6	Horizontal	QP	Pass
6	17992.5000	54.09	23.88	30.21	74	-19.91	130.8	Horizontal	PK	Pass
6	17992.5000	46.93	23.88	23.05	54	-7.07	130.8	Horizontal	AV	Pass
6	17992.5000	54.09	23.88	30.21	74	-19.91	130.8	Horizontal	QP	Pass

Report No.: WSCT-ANAB-R&E250300017A-Wi-Fi2 Issued Date: 22 May 2025

11a, 1 GHz to 18 GHz, Channel (5320 MHz), ANT V




Suspected Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1405.0000	39.62	25.1	14.52	74	-34.38	194.6	Vertical	PK	Pass
1	1405.0000	30.64	25.1	5.54	54	-23.36	194.6	Vertical	AV	Pass
2	2922.5000	45.8	28.11	17.69	74	-28.2	351.9	Vertical	PK	Pass
2	2922.5000	37.07	28.11	8.96	54	-16.93	351.9	Vertical	AV	Pass
3	5741.2500	61.27	32.39	28.88	74	-12.73	146.7	Vertical	PK	Pass
3	5741.2500	47.99	32.39	15.6	54	-6.01	146.7	Vertical	AV	Pass
4	8188.5000	42.07	8.72	33.35	74	-31.93	18.2	Vertical	PK	Pass
4	8188.5000	34.47	8.72	25.75	54	-19.53	18.2	Vertical	AV	Pass
5	11158.5000	46.74	15.8	30.94	74	-27.26	207.2	Vertical	PK	Pass
5	11158.5000	38.97	15.8	23.17	54	-15.03	207.2	Vertical	AV	Pass
6	17953.5000	54.08	23.6	30.48	74	-19.92	130.7	Vertical	PK	Pass
6	17953.5000	46.43	23.6	22.83	54	-7.57	130.7	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E250300017A-Wi-Fi2 Issued Date: 22 May 2025

11a, 1 GHz to 18 GHz, Channel (5500 MHz), ANT H

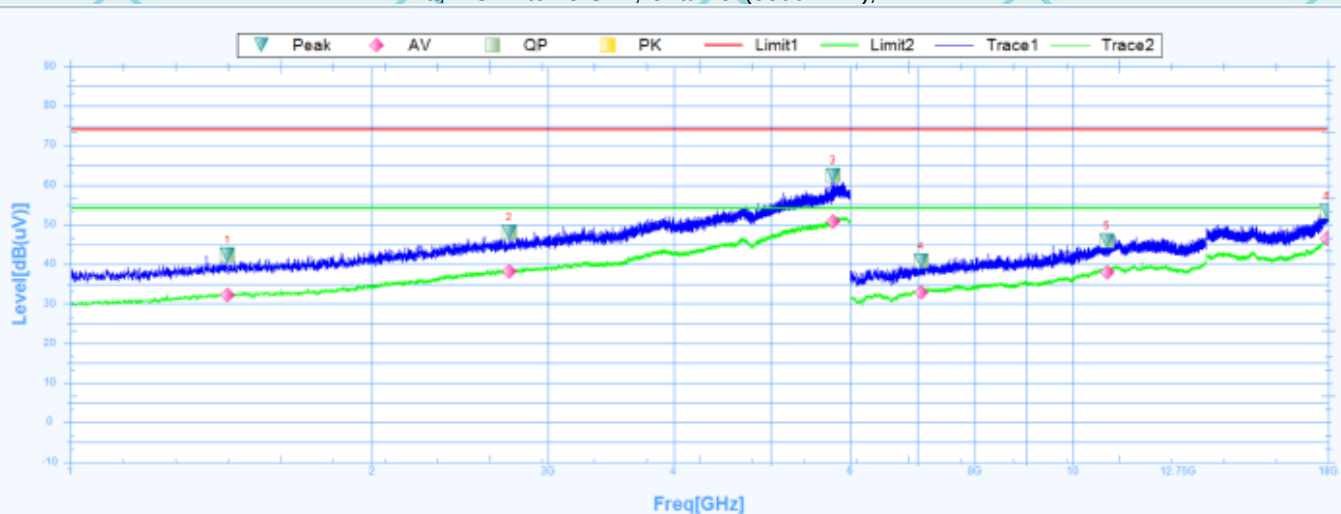


Suspected Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1434.3750	42.31	25.07	17.24	74	-31.69	17.6	Horizontal	PK	Pass
1	1434.3750	32.13	25.07	7.06	54	-21.87	17.6	Horizontal	AV	Pass
2	2741.8750	48.1	27.89	20.21	74	-25.9	218.4	Horizontal	PK	Pass
2	2741.8750	38.23	27.89	10.34	54	-15.77	218.4	Horizontal	AV	Pass
3	5772.5000	62.48	32.44	30.04	74	-11.52	241.1	Horizontal	PK	Pass
3	5772.5000	50.84	32.44	18.4	54	-3.16	241.1	Horizontal	AV	Pass
4	7060.5000	40.82	6.56	34.26	74	-33.18	360	Horizontal	PK	Pass
4	7060.5000	32.92	6.56	26.36	54	-21.08	360	Horizontal	AV	Pass
5	10821.0000	45.95	14.81	31.14	74	-28.05	63.8	Horizontal	PK	Pass
5	10821.0000	38.02	14.81	23.21	54	-15.98	63.8	Horizontal	AV	Pass
6	17965.5000	53.42	23.68	29.74	74	-20.58	102.1	Horizontal	PK	Pass
6	17965.5000	46.55	23.68	22.87	54	-7.45	102.1	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E250300017A-Wi-Fi2 Issued Date: 22 May 2025

11a, 1 GHz to 18 GHz, Channel (5500 MHz), ANT V

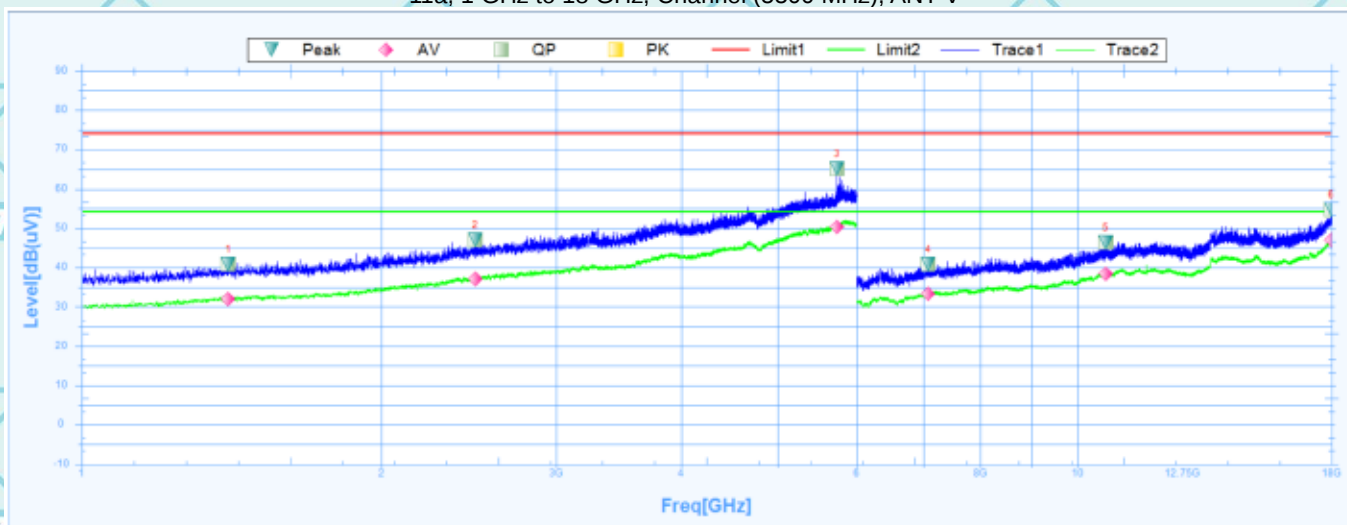


Suspected Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1403.7500	40.75	25.1	15.65	74	-33.25	-0.1	Vertical	PK	Pass
1	1403.7500	32	25.1	6.9	54	-22	-0.1	Vertical	AV	Pass
2	2485.0000	46.91	27.55	19.36	74	-27.09	273.4	Vertical	PK	Pass
2	2485.0000	37.01	27.55	9.46	54	-16.99	273.4	Vertical	AV	Pass
3	5738.1250	65.12	32.38	32.74	74	-8.88	151.4	Vertical	PK	Pass
3	5738.1250	50.4	32.38	18.02	54	-3.6	151.4	Vertical	AV	Pass
4	7081.5000	40.85	6.65	34.2	74	-33.15	219.7	Vertical	PK	Pass
4	7081.5000	33.27	6.65	26.62	54	-20.73	219.7	Vertical	AV	Pass
5	10678.5000	46.25	14.57	31.68	74	-27.75	341.8	Vertical	PK	Pass
5	10678.5000	38.47	14.57	23.9	54	-15.53	341.8	Vertical	AV	Pass
6	17985.0000	54.7	23.82	30.88	74	-19.3	359.6	Vertical	PK	Pass
6	17985.0000	47.04	23.82	23.22	54	-6.96	359.6	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E250300017A-Wi-Fi2 Issued Date: 22 May 2025

11a, 1 GHz to 18 GHz, Channel (5700 MHz), ANT H

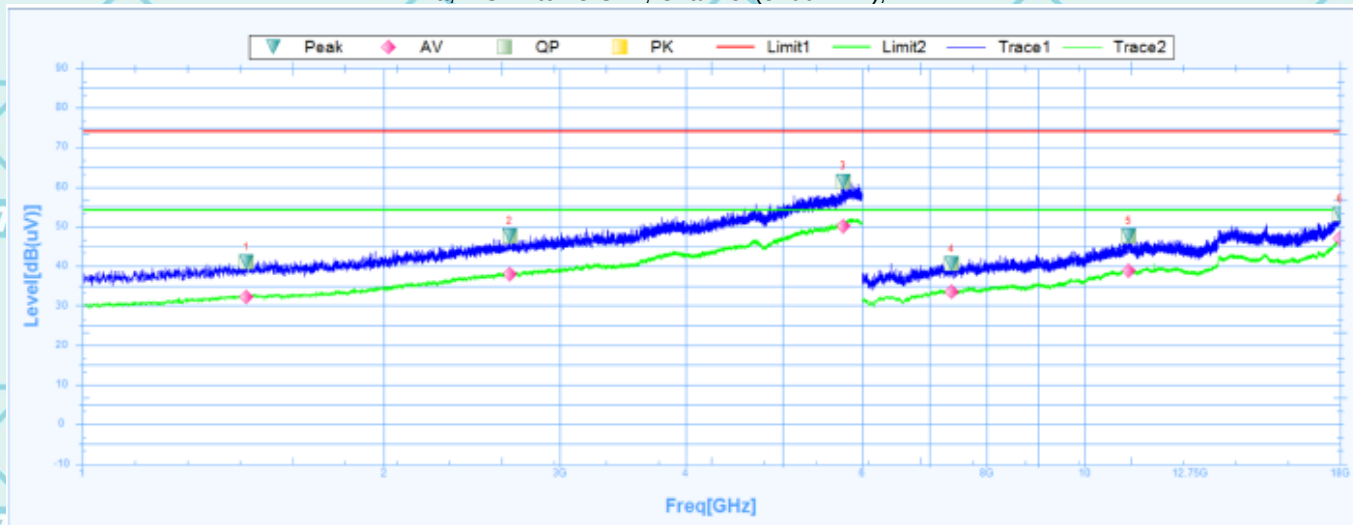


Suspected Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1457.5000	41.05	25.04	16.01	74	-32.95	1.2	Horizontal	PK	Pass
1	1457.5000	32.2	25.04	7.16	54	-21.8	1.2	Horizontal	AV	Pass
2	2669.3750	47.74	27.8	19.94	74	-26.26	3.1	Horizontal	PK	Pass
2	2669.3750	37.96	27.8	10.16	54	-16.04	3.1	Horizontal	AV	Pass
3	5746.8750	61.46	32.39	29.07	74	-12.54	12.2	Horizontal	PK	Pass
3	5746.8750	50.15	32.39	17.76	54	-3.85	12.2	Horizontal	AV	Pass
4	7363.5000	40.67	7.03	33.64	74	-33.33	121.6	Horizontal	PK	Pass
4	7363.5000	33.44	7.03	26.41	54	-20.56	121.6	Horizontal	AV	Pass
5	11076.0000	47.58	15.86	31.72	74	-26.42	321.2	Horizontal	PK	Pass
5	11076.0000	38.76	15.86	22.9	54	-15.24	321.2	Horizontal	AV	Pass
6	17988.0000	53.1	23.84	29.26	74	-20.9	259	Horizontal	PK	Pass
6	17988.0000	47.03	23.84	23.19	54	-6.97	259	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E250300017A-Wi-Fi2 Issued Date: 22 May 2025

11a, 1 GHz to 18 GHz, Channel (5700 MHz), ANT V

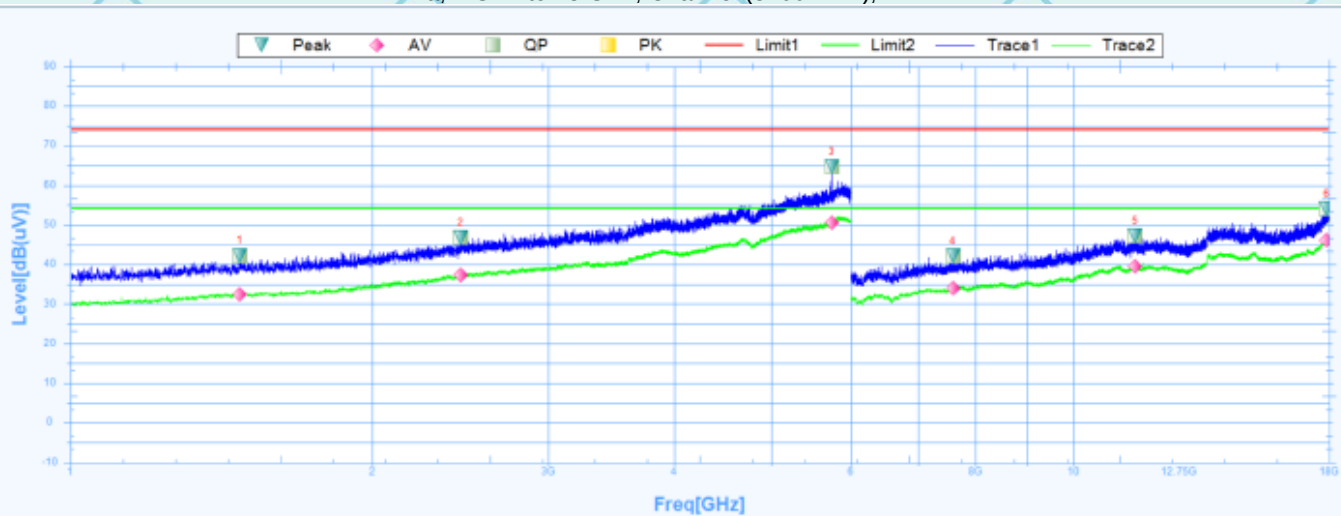


Suspected Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1475.6250	42.24	25.02	17.22	74	-31.76	174.9	Vertical	PK	Pass
1	1475.6250	32.48	25.02	7.46	54	-21.52	174.9	Vertical	AV	Pass
2	2451.2500	46.68	27.43	19.25	74	-27.32	359.9	Vertical	PK	Pass
2	2451.2500	37.33	27.43	9.9	54	-16.67	359.9	Vertical	AV	Pass
3	5746.2500	64.63	32.39	32.24	74	-9.37	141.4	Vertical	PK	Pass
3	5746.2500	50.49	32.39	18.1	54	-3.51	141.4	Vertical	AV	Pass
4	7587.0000	42.11	7.87	34.24	74	-31.89	282.6	Vertical	PK	Pass
4	7587.0000	33.98	7.87	26.11	54	-20.02	282.6	Vertical	AV	Pass
5	11530.5000	47.19	16.21	30.98	74	-26.81	183.4	Vertical	PK	Pass
5	11530.5000	39.52	16.21	23.31	54	-14.48	183.4	Vertical	AV	Pass
6	17893.5000	54.01	23.22	30.79	74	-19.99	1	Vertical	PK	Pass
6	17893.5000	46.08	23.22	22.86	54	-7.92	1	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E250300017A-Wi-Fi2 Issued Date: 22 May 2025

11a, 1 GHz to 18 GHz, Channel (5745 MHz), ANT H

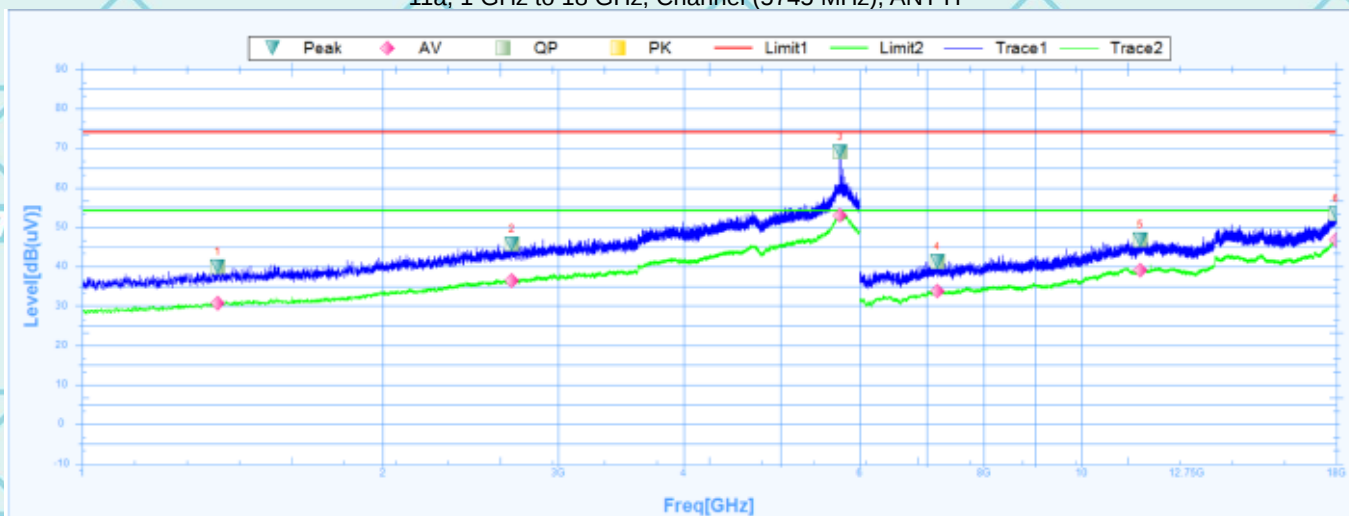


Susputed Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1366.2500	39.87	24.98	14.89	74	-34.13	46.2	Horizontal	PK	Pass
1	1366.2500	30.61	24.98	5.63	54	-23.39	46.2	Horizontal	AV	Pass
2	2695.0000	45.71	27.83	17.88	74	-28.29	159.8	Horizontal	PK	Pass
2	2695.0000	36.37	27.83	8.54	54	-17.63	159.8	Horizontal	AV	Pass
3	5740.0000	69.04	32.38	36.66	74	-4.96	63	Horizontal	PK	Pass
3	5740.0000	52.86	32.38	20.48	54	-1.14	63	Horizontal	AV	Pass
4	7177.5000	41.33	7.04	34.29	74	-32.67	0.5	Horizontal	PK	Pass
4	7177.5000	33.75	7.04	26.71	54	-20.25	0.5	Horizontal	AV	Pass
5	11457.0000	46.69	16.01	30.68	74	-27.31	103.4	Horizontal	PK	Pass
5	11457.0000	38.99	16.01	22.98	54	-15.01	103.4	Horizontal	AV	Pass
6	17986.5000	53.4	23.83	29.57	74	-20.6	263.5	Horizontal	PK	Pass
6	17986.5000	46.8	23.83	22.97	54	-7.2	263.5	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E250300017A-Wi-Fi2 Issued Date: 22 May 2025

11a, 1 GHz to 18 GHz, Channel (5745 MHz), ANT V

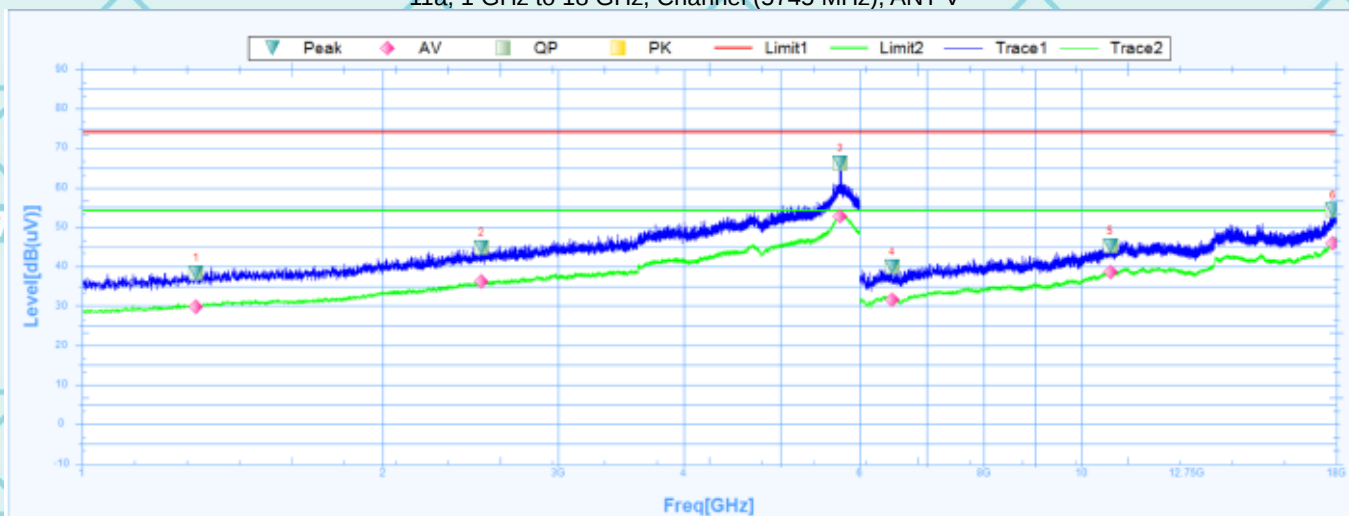


Suspected Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1300.6250	38.38	24.75	13.63	74	-35.62	27.2	Vertical	PK	Pass
1	1300.6250	29.8	24.75	5.05	54	-24.2	27.2	Vertical	AV	Pass
2	2510.6250	44.77	27.61	17.16	74	-29.23	51	Vertical	PK	Pass
2	2510.6250	36.18	27.61	8.57	54	-17.82	51	Vertical	AV	Pass
3	5740.0000	66.3	32.38	33.92	74	-7.7	-0.1	Vertical	PK	Pass
3	5740.0000	52.83	32.38	20.45	54	-1.17	-0.1	Vertical	AV	Pass
4	6471.0000	39.93	4.66	35.27	74	-34.07	116.9	Vertical	PK	Pass
4	6471.0000	31.54	4.66	26.88	54	-22.46	116.9	Vertical	AV	Pass
5	10692.0000	45.28	14.59	30.69	74	-28.72	0	Vertical	PK	Pass
5	10692.0000	38.53	14.59	23.94	54	-15.47	0	Vertical	AV	Pass
6	17856.0000	54.31	22.98	31.33	74	-19.69	0	Vertical	PK	Pass
6	17856.0000	45.88	22.98	22.9	54	-8.12	0	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E250300017A-Wi-Fi2 Issued Date: 22 May 2025

11a, 1 GHz to 18 GHz, Channel (5825 MHz), ANT H

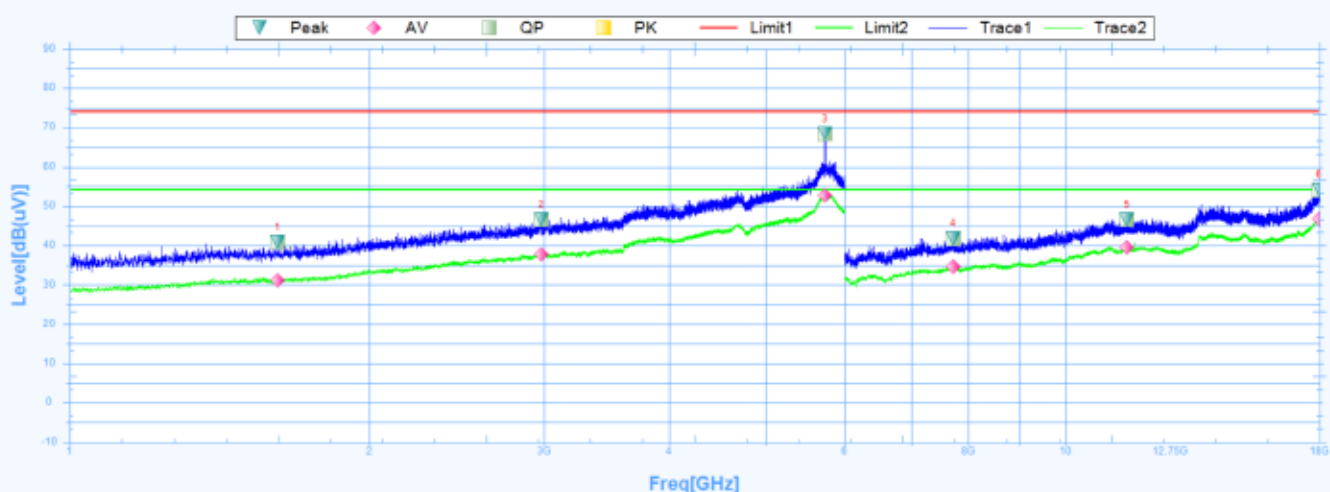


Suspected Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1616.8750	40.78	24.91	15.87	74	-33.22	360.1	Horizontal	PK	Pass
1	1616.8750	31.11	24.91	6.2	54	-22.89	360.1	Horizontal	AV	Pass
2	2978.1250	46.58	28.17	18.41	74	-27.42	304.2	Horizontal	PK	Pass
2	2978.1250	37.64	28.17	9.47	54	-16.36	304.2	Horizontal	AV	Pass
3	5738.1250	68.42	32.38	36.04	74	-5.58	127.2	Horizontal	PK	Pass
3	5738.1250	52.73	32.38	20.35	54	-1.27	127.2	Horizontal	AV	Pass
4	7719.0000	41.8	7.96	33.84	74	-32.2	355.9	Horizontal	PK	Pass
4	7719.0000	34.53	7.96	26.57	54	-19.47	355.9	Horizontal	AV	Pass
5	11533.5000	46.63	16.22	30.41	74	-27.37	65.4	Horizontal	PK	Pass
5	11533.5000	39.5	16.22	23.28	54	-14.5	65.4	Horizontal	AV	Pass
6	17982.0000	54.17	23.8	30.37	74	-19.83	345.8	Horizontal	PK	Pass
6	17982.0000	46.89	23.8	23.09	54	-7.11	345.8	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E250300017A-Wi-Fi2 Issued Date: 22 May 2025

11a, 1 GHz to 18 GHz, Channel (5825 MHz), ANT V

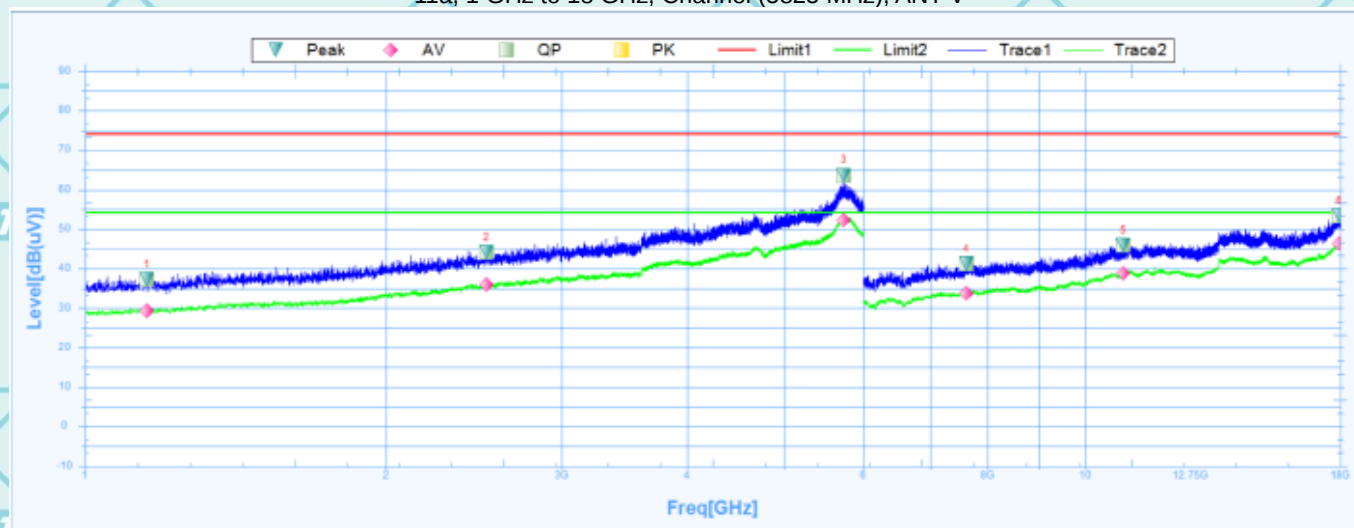

Suspected Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1152.5000	37.37	24.38	12.99	74	-36.63	145.6	Vertical	PK	Pass
1	1152.5000	29.38	24.38	5	54	-24.62	145.6	Vertical	AV	Pass
2	2521.8750	44.09	27.63	16.46	74	-29.91	44	Vertical	PK	Pass
2	2521.8750	35.92	27.63	8.29	54	-18.08	44	Vertical	AV	Pass
3	5740.0000	63.67	32.38	31.29	74	-10.33	229.3	Vertical	PK	Pass
3	5740.0000	52.37	32.38	19.99	54	-1.63	229.3	Vertical	AV	Pass
4	7612.5000	41.29	7.96	33.33	74	-32.71	61.5	Vertical	PK	Pass
4	7612.5000	33.81	7.96	25.85	54	-20.19	61.5	Vertical	AV	Pass
5	10921.5000	45.99	15.18	30.81	74	-28.01	199	Vertical	PK	Pass
5	10921.5000	38.78	15.18	23.6	54	-15.22	199	Vertical	AV	Pass
6	17958.0000	53.38	23.63	29.75	74	-20.62	103.4	Vertical	PK	Pass
6	17958.0000	46.36	23.63	22.73	54	-7.64	103.4	Vertical	AV	Pass

Note:

1. All emissions not reported were more than 20dB below the specified limit or in the noise floor.
2. Emission Level= Reading Level+ Probe Factor +Cable Loss.
3. Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

7.3.8 RESTRICTED BANDS REQUIREMENTS**Test Result(Only recorded the worst case in the report):**

Frequency	Reading	Correct Factor	Emission Level	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
802.11a(6Mbps) Test channel:36							
5150	64.52	-5.24	59.28	68.23	8.95	H	PK
5150	55.11	-5.24	49.87	54	4.13	H	AV
5150	60.56	-4.87	55.69	68.23	12.54	V	PK
5150	54.27	-4.87	49.40	54	4.60	V	AV
802.11a(6Mbps) Test channel:48							
5350	60.78	-5.24	55.54	68.23	12.69	H	PK
5350	53.51	-5.24	48.27	54	5.73	H	AV
5350	62.95	-4.87	58.08	68.23	10.15	V	PK
5350	54.06	-4.87	49.19	54	4.81	V	AV
802.11a(6Mbps) Test channel: 165							
5850	63.19	-5.24	57.95	122.23	64.28	H	PK
5850	53.56	-4.87	48.69	122.23	73.54	V	PK

Note: Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = Attenuation factor + Cable loss

Level (dBμV) = Reading level (dBμV) + Corr. Factor (dB)

Limit (dBμV) = Limit stated in standard

Margin (dB) = Level (dBμV) – Limits (dBμV)

7.4 ANTENNA REQUIREMENT

Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

Antenna Gain

The Bluetooth antenna is a Integral Antenna. it meets the standards, and the best case gain of the antenna is" ANT1:-1.7dBi, ANT2:-0.6dBi".

Please refer to the attached "LJ9 Internal Photo" for the antenna location

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = GANT + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = 10 log(NANT/NSS=1) dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for NANT ≤ 4.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with GANT set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain GANT is set equal to the antenna having the highest gain, i.e., F2)f)i).

For PSD, the directional gain calculation is following F2)f)ii) of KDB 662911 D01 v02r01.

The directional gain "DG" is calculated as following table.

<CDD Modes>	Ant1 (dBi)	Ant2 (dBi)	DG for power (dBi)	DG for PSD (dBi)
5180~5825MHz	-1.7	-0.6	-0.6	1.88

Power limit reduction = Composite gain – 6dBi, (min = 0)

PSD limit reduction = Composite gain + PSD Array gain – 6dBi, (min = 0)

7.5 EMISSION BANDWIDTH

7.5.1 TEST EQUIPMENT

Please refer to Section 5 this report.

7.5.2 TEST PROCEDURE

-26dB Bandwidth and 99% Occupied Bandwidth:	
Test Method:	a) The transmitter was radiated to the spectrum analyzer in peak hold mode. b) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
Test Equipment Setting – 26dB Bandwidth:	Test Equipment Setting – 99% Bandwidth:
a) Attenuation: Auto b) Span Frequency: > 26dB Bandwidth c) RBW: Approximately 1% of the emission bandwidth d) VBW: VBW > RBW e) Detector: Peak f) Trace: Max Hold g) Sweep Time: Auto	a) Span: 1.5 times to 5.0 times the OBW b) RBW: 1 % to 5 % of the OBW c) VBW: $\geq 3 \times \text{RBW}$ d) Detector: Peak e) Trace: Max Hold
6 dB Bandwidth:	
Test Method:	a) The transmitter was radiated to the spectrum analyzer in peak hold mode. b) Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (C) Emission Bandwidth. c) Multiple antenna system was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band. d) Measured the spectrum width with power higher than 6dB below carrier.
Test Equipment Setting:	
a) Attenuation: Auto b) Span Frequency: > 6dB Bandwidth c) RBW: 100kHz d) VBW: $\geq 3 \times \text{RBW}$	e) Detector: Peak f) Trace: Max Hold g) Sweep Time: Auto
Maximum Conducted Output Power Measurement:	
Test Method:	a) The transmitter output (antenna port) was connected to the power meter. b) Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (E) Maximum conducted output power =>3. Measurement using a Power Meter (PM) =>b) Method PM-G (Measurement using a gated RF average power meter). c) Multiple antenna systems was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band. d) When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.
Test Equipment Setting: Detector - Average	
Power Spectral Density:	
Test Method:	a) The transmitter output (antenna port) was connected RF switch to the spectrum analyzer. b) Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (F) Maximum Power Spectral Density (PSD). c) Multiple antenna systems was performed in accordance KDB662911 D01 v02r01 in-Band Power Spectral Density (PSD) Measurements (a) Measure and sum the spectra across the outputs. d) When measuring first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3 and so on up to the Nth output to obtain the value for the first frequency bin of the summed spectrum. The summed spectrum value for each of the other frequency bins is computed in the same way. e) For 5.725~5.85 GHz, the measured result of PSD level must add 10log(500kHz/RBW)

and the final result should ≤ 30 dBm.

Test Equipment Setting:

- | | |
|---|---|
| <ul style="list-style-type: none"> a) Attenuation: Auto b) Span Frequency: Encompass the entire emissions bandwidth (EBW) of the signal c) RBW: 1000 kHz d) VBW: 3000 kHz | <ul style="list-style-type: none"> e) Detector: RMS f) Trace: AVERAGE g) Sweep Time: Auto h) Trace Average: 100 times |
|---|---|

Note: If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas RBW (< 500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.

Frequency Stability Measurement:

Test Method:

- a) The transmitter output (antenna port) was connected to the spectrum analyzer.
- b) EUT have transmitted absence of modulation signal and fixed channelize.
- c) Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
- d) Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
- e) f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11 specification).
- f) The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
- g) Extreme temperature is $0^\circ\text{C} \sim 40^\circ\text{C}$

Test Equipment Setting:

- | | |
|---|---|
| <ul style="list-style-type: none"> a) Attenuation: Auto b) Span Frequency: Entire absence of modulation emissions bandwidth c) RBW: 10 kHz d) VBW: 10 kHz | <ul style="list-style-type: none"> e) Sweep Time: Auto |
|---|---|

7.5.3 CONFIGURATION OF THE EUT

Same as section 3.4 of this report

7.5.4 EUT OPERATING CONDITION

Same as section 3.5 of this report.

Report No.: WSCT-ANAB-R&E250300017A-Wi-Fi2 Issued Date: 22 May 2025

7.5.5 LIMIT

-26dB Bandwidth and 99% Occupied Bandwidth:	
Limit:	No restriction limits.
-6 dB Bandwidth:	
Limit:	For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.
Test Equipment Setting:	
a) Attenuation: Auto	e) Detector: Peak
b) Span Frequency: > 6dB Bandwidth	f) Trace: Max Hold
c) RBW: 100kHz	g) Sweep Time: Auto
d) VBW: $\geq 3 \times$ RBW	
Maximum Conducted Output Power Measurement:	
☒ 5.15~5.25 GHz	
☐ Limit of Outdoor access point:	☐ Limit of Indoor access point:
The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
☐ Limit of Fixed point-to-point access points:	☒ Limit of Mobile and portable client devices:
The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.	The maximum conducted output power over the frequency band of operation shall not exceed 250 mW (24dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
☒ 5.25-5.35 GHz & ☒ 5.470-5.725 GHz	
The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW (24dBm) or 11 dBm 10 log B, where B is the 26 dB emission bandwidth in megahertz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
☒ 5.725~5.85 GHz	
The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power.	
Power Spectral Density	
☒ 5.15~5.25 GHz	
☐ Limit of Outdoor access point: 17 dBm/MHz	☐ Limit of Indoor access point: 17 dBm/MHz
☐ Limit of Fixed point-to-point access points: 17 dBm/MHz	☒ Limit of Mobile and portable client devices: 11 dBm/MHz
☐ 5.25-5.35 GHz	11 dBm/MHz
☐ 5.470-5.725 GHz	11 dBm/MHz
☒ 5.725~5.85 GHz	30 dBm/500kHz
Frequency Stability Measurement:	
Limit:	In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual. The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE

802.11n specification).

7.5.6 TEST RESULT

-26dB Bandwidth and 99% Occupied Bandwidth

Product	: EUT-Sample	Test Mode	: See section 3.4
Test Item	: -26dB Bandwidth/-6dB Bandwidth and 99% Occupied Bandwidth	Temperature	: 25 °C
Test Voltage	: DC 3.91V	Humidity	: 56%RH
Test Result	: PASS		

-26Db&99% Bandwidth

Mode	Frequency (MHz)	-26 dB Bandwidth (MHz)	99%dB Bandwidth (MHz)	Verdict
a	5180	23.00	16.446	Pass
a	5240	20.12	16.392	Pass
a	5260	19.51	16.406	Pass
a	5320	23.34	16.563	Pass
a	5500	25.16	16.534	Pass
a	5700	26.47	16.768	Pass
n20	5180	24.83	17.589	Pass
n20	5240	20.49	17.572	Pass
n20	5260	23.34	17.681	Pass
n20	5320	24.30	17.790	Pass
n20	5500	25.09	17.719	Pass
n20	5700	26.11	17.735	Pass
n40	5190	57.46	36.555	Pass
n40	5230	45.17	36.026	Pass
n40	5270	40.33	36.119	Pass
n40	5310	52.25	36.154	Pass
n40	5510	52.04	36.263	Pass
n40	5670	54.89	36.246	Pass
ac20	5180	24.68	17.650	Pass
ac20	5240	24.37	17.596	Pass
ac20	5260	22.35	17.657	Pass
ac20	5320	23.19	17.719	Pass
ac20	5500	23.75	17.696	Pass
ac20	5700	22.39	17.722	Pass
ac40	5190	56.26	36.570	Pass
ac40	5230	40.55	36.034	Pass
ac40	5270	40.35	36.066	Pass
ac40	5310	48.16	36.187	Pass
ac40	5510	49.19	36.242	Pass
ac40	5670	53.86	36.224	Pass
ac80	5210	105.1	75.861	Pass
ac80	5290	104.1	75.803	Pass
ac80	5530	106.5	75.848	Pass
ac80	5610	79.68	75.738	Pass
ax20	5180	25.76	18.884	Pass

ax20	5240	20.92	18.848	Pass
ax20	5260	21.28	18.859	Pass
ax20	5320	23.98	18.953	Pass
ax20	5500	25.84	18.902	Pass
ax20	5700	23.46	18.894	Pass
ax40	5190	48.87	37.678	Pass
ax40	5230	39.31	37.534	Pass
ax40	5270	39.37	37.505	Pass
ax40	5310	49.03	37.650	Pass
ax40	5510	50.94	37.741	Pass
ax40	5670	52.16	37.727	Pass
ax80	5210	87.82	77.361	Pass
ax80	5290	99.05	77.337	Pass
ax80	5530	79.73	77.431	Pass
ax80	5610	80.12	77.298	Pass
ax160	5250	161.0	155.79	Pass
ax160	5570	163.1	156.10	Pass

-6dB&99% Bandwidth

Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	99%dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
a	5745	15.40	16.453	0.5	Pass
a	5825	16.31	16.403	0.5	Pass
n20	5745	14.94	17.562	0.5	Pass
n20	5825	12.78	17.540	0.5	Pass
n40	5755	35.01	36.090	0.5	Pass
n40	5795	35.28	35.951	0.5	Pass
ac20	5745	15.09	17.552	0.5	Pass
ac20	5825	15.01	17.523	0.5	Pass
ac40	5755	33.89	36.086	0.5	Pass
ac40	5795	35.00	35.948	0.5	Pass
ac80	5775	75.42	75.680	0.5	Pass
ax20	5745	16.20	18.894	0.5	Pass
ax20	5825	16.28	18.812	0.5	Pass
ax40	5755	35.12	37.713	0.5	Pass
ax40	5795	37.69	37.690	0.5	Pass
ax80	5775	77.42	77.118	0.5	Pass

Report No.: WSCT-ANAB-R&E250300017A-Wi-Fi2 Issued Date: 22 May 2025

-26Db&99% Bandwidth

