



TEST REPORT

FCC ID: 2ADYY-T16RA

Product: Laptop Computer

Model No.: T16RA

Trade Mark: TECNO

Report No.: WSCT-A2LA-R&E240300010A-Wi-Fi1

Issued Date: 03 April 2024

Issued for:

TECNO MOBILE LIMITED

FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI
STREET FOTAN NT HONGKONG

Issued By:

World Standardization Certification & Testing Group (Shenzhen) Co., Ltd.
Building A-B, Baoshi Science & Technology Park, Baoshi Road,
Bao'an District, Shenzhen, Guangdong, China

TEL: +86-755-26996192

FAX: +86-755-86376605



Note: The results contained in this report pertain only to the tested sample. This report shall not be reproduced, except in full, without written approval of World Standardization Certification & Testing Group (Shenzhen) Co., Ltd. This report must not be used by the client to claim product certification, approval, or any agency of the U.S. Government.





TABLE OF CONTENTS

1. Test Certification	3
2. Test Result Summary	4
3. EUT Description	5
4. Genera Information	7
4.1. TEST ENVIRONMENT AND MODE	7
4.2. DESCRIPTION OF SUPPORT UNITS	8
5. Facilities and Accreditations	9
5.1. FACILITIES	9
5.2. ACCREDITATIONS	9
5.3. MEASUREMENT UNCERTAINTY	10
5.4. MEASUREMENT INSTRUMENTS	11
6. Test Results and Measurement Data	12
6.1. ANTENNA REQUIREMENT	12
6.2. CONDUCTED EMISSION	13
6.3. POWER SPECTRAL DENSITY	27
6.4. CONDUCTED BAND EDGE AND SPURIOUS EMISSION MEASUREMENT	42
6.5. RADIATED SPURIOUS EMISSION MEASUREMENT	63





1. Test Certification

Product: Laptop Computer
Model No.: T16RA
Trade Mark: TECNO
Applicant: TECNO MOBILE LIMITED
Address: FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25
SHAN MEI STREET FOTAN NT HONGKONG
Manufacturer: TECNO MOBILE LIMITED
Address: FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25
SHAN MEI STREET FOTAN NT HONGKONG
Date of Test: 22 February 2024 to 02 April 2024
Applicable Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247

The above equipment has been tested by World Standardization Certification & Testing Group(Shenzhen)Co., Ltd. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By:

Wang Xiang

(Wang Xiang)

Checked By:

Mo Peiyun

(Mo Peiyun)

Approved By:

Liu Fuxin

(Liu Fuxin)

Date: 03 April 2024





2. Test Result Summary

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203/§15.247 (c)	PASS
AC Power Line Conducted Emission	§15.207	PASS
Conducted Peak Output Power	§15.247 (b)(3) §2.1046	PASS
6dB Emission Bandwidth	§15.247 (a)(2) §2.1049	PASS
Power Spectral Density	§15.247 (e)	PASS
Band Edge	§15.247(d) §2.1051, §2.1057	PASS
Spurious Emission	§15.205/§15.209 §2.1053, §2.1057	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

3. EUT Description

Product:	Laptop Computer
Model No.:	T16RA
Trade Mark:	TECNO
Operation Frequency:	2412MHz~2462MHz (802.11b/g/n(HT20)) 2422MHz~2452MHz (802.11n(HT40))
Channel Separation:	5MHz
Modulation type:	DSSS (DBPSK, DQPSK, CCK) for IEEE 802.11b OFDM/OFDMA(BPSK,QPSK,16QAM,64QAM) for IEEE 802.11g/n
Antenna Type:	Integral Antenna
Antenna Gain	MAIN ANT: 2.40dBi AUX ANT: 2.70 dBi
Rechargeable Li-Polymer Battery:	Model: 528282-3S1P Rated Voltage: 11.61V Rated Capacity: 6460mAh/75Wh Typical Capacity: 6550mAh/76.04Wh Limited Charge Voltage: 13.35V
Adapter:	Adapter: TCW-A61S-65W Input: 100-240V~50/60Hz 1.5A Max Output:PD:5V---3A 9V---3A 12V---3A 15V---3A 20V---3.25A PPS:3.3-11V---5A Max
Remark:	N/A.

Operation Frequency each of channel For 802.11b/g/n(HT20)

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Operation Frequency each of channel For 802.11n (HT40)

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
--	--	4	2427MHz	7	2442MHz	--	--
--	--	5	2432MHz	8	2447MHz	--	--
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

802.11b/g/n (HT20)

Channel	Frequency
The lowest channel	2412MHz
The middle channel	2437MHz
The Highest channel	2462MHz

802.11n (HT40)

Channel	Frequency
The lowest channel	2422MHz
The middle channel	2437MHz
The Highest channel	2452MHz



4. Genera Information

4.1. Test environment and mode

Operating Environment:

Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar

Test Mode:

Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations(The value of duty cycle is 98.46%)
-------------------	--

The sample was placed (0.8m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. For the full battery state and The output power to the maximum state.

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

Mode
802.11b
802.11g
802.11n(H20)
802.11n(H40)

Final Test Mode:

Operation mode:	Keep the EUT in continuous transmitting with modulation
-----------------	---

1. For WIFI function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.2. According to ANSI C63.10 standards, the test results are both the "worst case" and "worst setup" 1Mbps for 802.11b, 6Mbps for 802.11g, 6.5Mbps for 802.11n(H20). Duty cycle setting during the transmission is 98.5% with maximum power setting for all modulations.



4.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
Adapter	Adapter1	/	/	ADAPTER
Router	Archer AX6000	/	TE7AX6000	/

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. For conducted measurements (Output Power, 6dB Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.



5. Facilities and Accreditations

5.1. Facilities

All measurement facilities used to collect the measurement data are located at **Building A-B, Baoshi Science & Technology Park, Baoshi Road, Bao'an District, Shenzhen, Guangdong, China of the World Standardization Certification & Testing Group(Shenzhen) CO., LTD**

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 32. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.2. ACCREDITATIONS

CNAS - Registration Number: L3732

China National Accreditation Service for Conformity Assessment, The test firm Registration Number: L3732

FCC - Designation Number: CN1303

World Standardization Certification & Testing Group(Shenzhen) CO., LTD. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Designation Number: CN1303.

A2LA - Certificate Number: 5768.01

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number: 5768.01



5.3.Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission Test	$\pm 3.2\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(<1GHz)	$\pm 4.7\text{dB}$
5	All emissions, radiated(>1GHz)	$\pm 4.7\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2.0\%$





5.4.MEASUREMENT INSTRUMENTS

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	Calibration Date	Calibration Due.
Test software	--	EZ-EMC	CON-03A	-	-
Test software	--	MTS8310	-	-	-
EMI Test Receiver	R&S	ESCI	100005	11/05/2023	11/04/2024
LISN	AFJ	LS16	16010222119	11/05/2023	11/04/2024
LISN(EUT)	Mestec	AN3016	04/10040	11/05/2023	11/04/2024
Universal Radio Communication Tester	R&S	CMU 200	1100.0008.02	11/05/2023	11/04/2024
Coaxial cable	Megalon	LMR400	N/A	11/05/2023	11/04/2024
GPIOB cable	Megalon	GPIOB	N/A	11/05/2023	11/04/2024
Spectrum Analyzer	R&S	FSU	100114	11/05/2023	11/04/2024
Pre Amplifier	H.P.	HP8447E	2945A02715	11/05/2023	11/04/2024
Pre-Amplifier	CDSI	PAP-1G18-38	--	11/05/2023	11/04/2024
Bi-log Antenna	SUNOL Sciences	JB3	A021907	11/05/2023	11/04/2024
9*6*6 Anechoic	--	--	--	11/05/2023	11/04/2024
Horn Antenna	COMPLIANCE ENGINEERING	CE18000	--	11/05/2023	11/04/2024
Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-631	11/05/2023	11/04/2024
Cable	TIME MICROWAVE	LMR-400	N-TYPE04	11/05/2023	11/04/2024
System-Controller	CCS	N/A	N/A	N.C.R	N.C.R
Turn Table	CCS	N/A	N/A	N.C.R	N.C.R
Antenna Tower	CCS	N/A	N/A	N.C.R	N.C.R
RF cable	Murata	MXHQ87WA3000	-	11/05/2023	11/04/2024
Loop Antenna	EMCO	6502	00042960	11/05/2023	11/04/2024
Horn Antenna	SCHWARZBECK	BBHA 9170	1123	11/05/2023	11/04/2024
Power meter	Anritsu	ML2487A	6K00003613	11/05/2023	11/04/2024
Power sensor	Anritsu	MX248XD	--	11/05/2023	11/04/2024
Spectrum Analyzer	Keysight	N9010B	MY60241089	11/05/2023	11/04/2024



6. Test Results and Measurement Data

6.1. Antenna requirement

Standard requirement:

FCC Part15 C Section 15.203 /247(c)


15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

E.U.T Antenna:

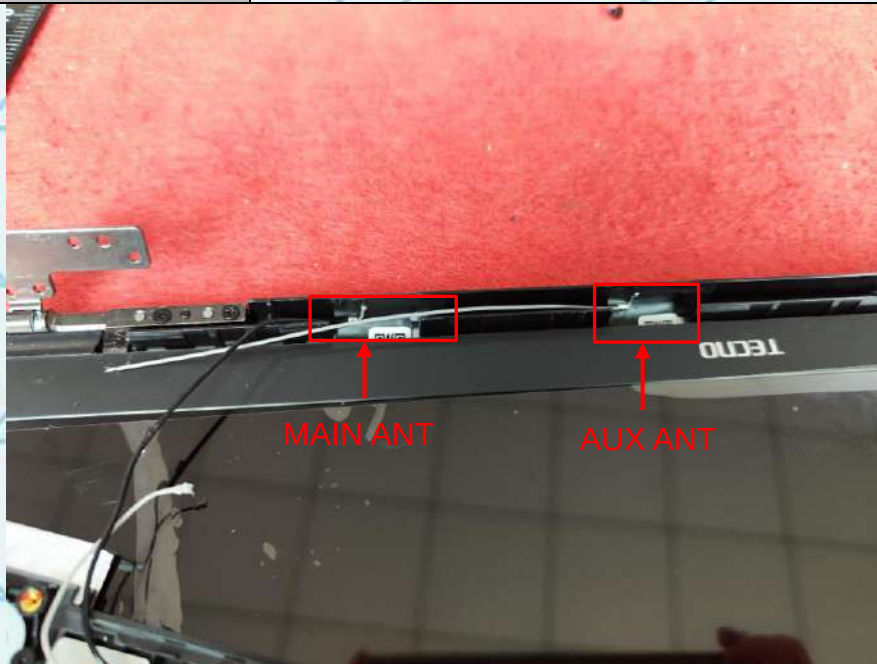



6.2. Conducted Emission

6.2.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2014														
Frequency Range:	150 kHz to 30 MHz														
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
Limits:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test Setup:	Reference Plane 40cm 80cm E.U.T. AC power LISN Filter AC power EMI Receiver Test table/Insulation plane Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m														
Test Mode:	Charging + transmitting with modulation														
Test Procedure:	1. The E.U.T is connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2014 on conducted measurement.														
Test Result:	PASS														




6.2.2. Test data

Please refer to following diagram for individual

The worst mode is MIMO802.11n20


Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

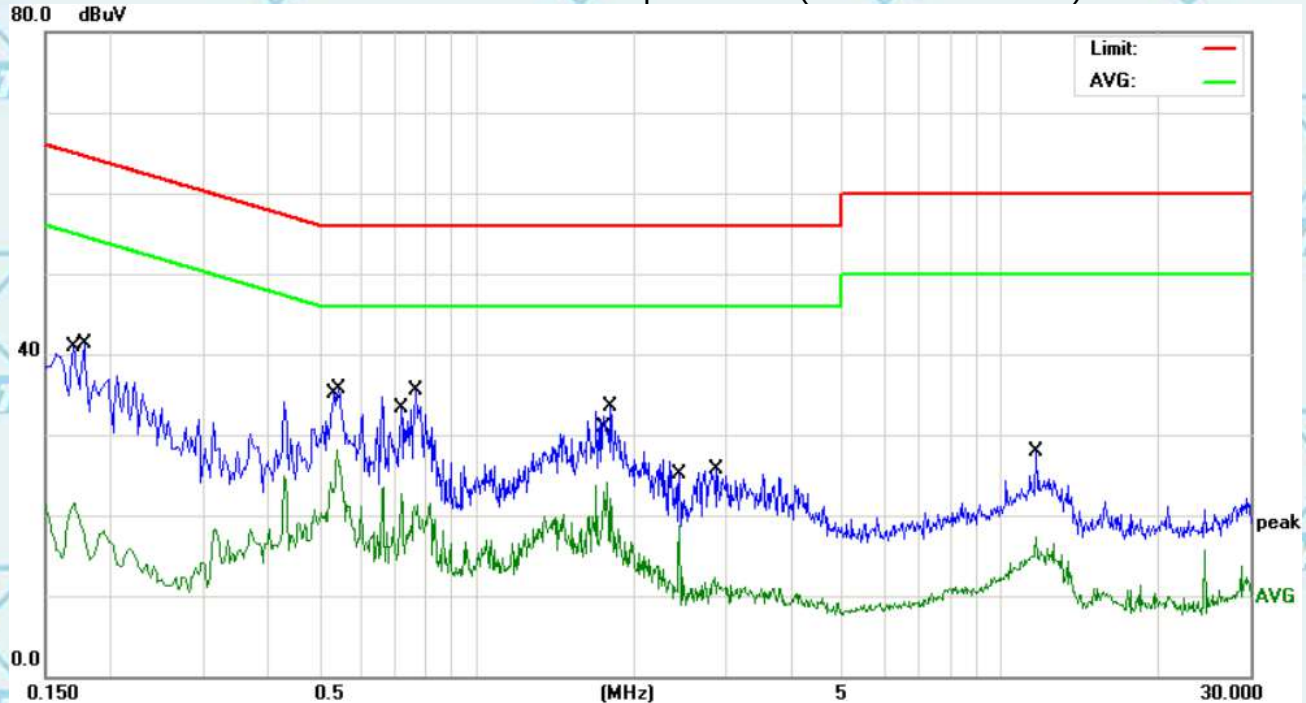

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1700	11.12	10.45	21.57	54.96	-33.39	AVG
2		0.1780	30.87	10.45	41.32	64.57	-23.25	QP
3		0.5340	24.66	10.52	35.18	56.00	-20.82	QP
4	*	0.5420	17.61	10.52	28.13	46.00	-17.87	AVG
5		0.7180	12.23	10.53	22.76	46.00	-23.24	AVG
6		0.7660	24.96	10.54	35.50	56.00	-20.50	QP
7		1.7740	13.49	10.67	24.16	46.00	-21.84	AVG
8		1.8060	22.82	10.68	33.50	56.00	-22.50	QP
9		2.4380	8.08	10.71	18.79	46.00	-27.21	AVG
10		2.8740	14.91	10.72	25.63	56.00	-30.37	QP
11		11.7260	17.02	10.96	27.98	60.00	-32.02	QP
12		11.7260	6.39	10.96	17.35	50.00	-32.65	AVG



Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

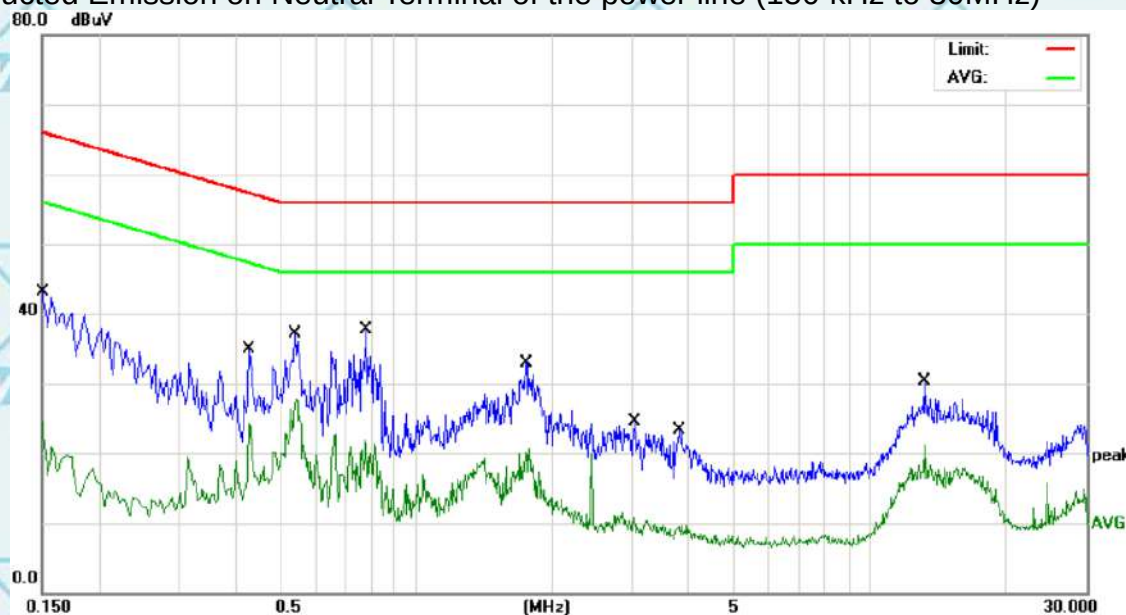

No.	Mk.	Freq. MHz	Reading Level dBμV	Correct Factor dB	Measure- ment dBμV	Limit dBμV	Over dB	Detector
1		0.1500	32.63	10.45	43.08	65.99	-22.91	QP
2		0.1500	14.00	10.45	24.45	55.99	-31.54	AVG
3		0.4300	24.42	10.50	34.92	57.25	-22.33	QP
4	*	0.5460	17.19	10.52	27.71	46.00	-18.29	AVG
5		0.7740	11.33	10.54	21.87	46.00	-24.13	AVG
6		0.7780	27.11	10.54	37.65	56.00	-18.35	QP
7		1.7500	22.28	10.67	32.95	56.00	-23.05	QP
8		1.7740	10.08	10.67	20.75	46.00	-25.25	AVG
9		3.0180	-0.05	10.72	10.67	46.00	-35.33	AVG
10		3.8060	12.48	10.73	23.21	56.00	-32.79	QP
11		13.1940	19.17	11.07	30.24	60.00	-29.76	QP
12		13.1940	9.98	11.07	21.05	50.00	-28.95	AVG

Note1:

Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss

Measurement (dBμV) = Reading level (dBμV) + Corr. Factor (dB)

Limit (dBμV) = Limit stated in standard

Margin (dB) = Measurement (dBμV) – Limits (dBμV)


Q.P. = Quasi-Peak AVG = average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.



6.2.3. Peak Power

6.2.4. Test Specification

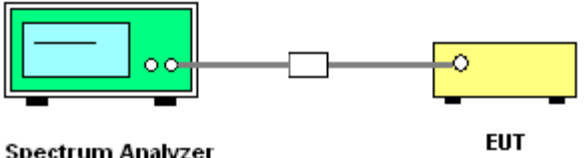Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	KDB 558074
Limit:	30dBm
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v04. 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Measure the conducted output power and record the results in the test report.
Test Result:	PASS



- (i) If all antennas have the same gain, G_{ANT} :
Directional gain = $G_{ANT} + 10 \log(N_{ANT}/N_{SS})$ dBi, where N_{SS} = the number of independent spatial streams of data and G_{ANT} is the antenna gain in dBi. (This formula can also be applied when antennas have different gains if the highest antenna gain is substituted for G_{ANT} .)
- (ii) If antenna gains are not equal and each transmit antenna is driven by only one spatial stream, directional gain may be calculated by either of the following two formulas.
- Directional gain* = $G_{ANT\ MAX} + 10 \log(N_{ANT}/N_{SS})$ dBi, where N_{SS} = the number of independent spatial streams of data and $G_{ANT\ MAX}$ is the gain of the antenna having the highest gain (in dBi).

Or,

$$\bullet \text{ Directional Gain} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

N_{SS} = the number of independent spatial streams of data;

N_{ANT} = the total number of antennas

$g_{j,k} = 10^{G_k/20}$ if the k th antenna is being fed by spatial stream j , or zero if it is not;
 G_k is the gain in dBi of the k th antenna.

For power measurements on IEEE 802.11 devices, 1,2

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less, for 20-MHz channel widths with $N_{ANT} \geq 5$.

Note: $N_{ANT}=2$, satisfy the condition $N_{ANT} \leq 4$, so Array gain=0dB, Directional gain= G_{ANT} +Array gain=2.70dBi+0dB=2.70dBi, not more than 6, so the power limit is unchanged.





6.2.5. Test Data

MAIN Ant1

Mode	Frequency (MHz)	Total Power (dBm)	Limit (dBm)	Verdict
b	2412	19.54	30	Pass
b	2437	19.57	30	Pass
b	2462	19.45	30	Pass
g	2412	23	30	Pass
g	2437	23.34	30	Pass
g	2462	23.05	30	Pass
n20	2412	22.94	30	Pass
n20	2437	23.17	30	Pass
n20	2462	22.97	30	Pass
n40	2422	21.4	30	Pass
n40	2437	23.66	30	Pass
n40	2452	21.04	30	Pass

AUX Ant2

Mode	Frequency (MHz)	Total Power (dBm)	Limit (dBm)	Verdict
b	2412	19.62	30	Pass
b	2437	19.64	30	Pass
b	2462	19.52	30	Pass
g	2412	23.65	30	Pass
g	2437	23.41	30	Pass
g	2462	23.61	30	Pass
n20	2412	23.49	30	Pass
n20	2437	23.26	30	Pass
n20	2462	23.44	30	Pass
n40	2422	21.77	30	Pass
n40	2437	23.57	30	Pass
n40	2452	21.54	30	Pass


MIMO Mode

Mode	Frequency (MHz)	Total Power (dBm)	Limit (dBm)	Verdict
n20	2412	26.23	30	Pass
n20	2437	26.23	30	Pass
n20	2462	26.22	30	Pass
n40	2422	24.60	30	Pass
n40	2437	26.63	30	Pass
n40	2452	24.31	30	Pass



6.3. Emission Bandwidth

6.3.1. Test Specification

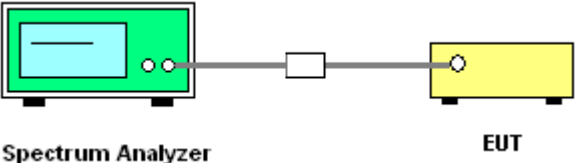Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	KDB 558074
Limit:	>500kHz
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v04. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz. 4. Measure and record the results in the test report.
Test Result:	PASS



6.3.2. Test data(worst)

Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
b	2412	10.109	0.5	Pass
b	2437	10.1	0.5	Pass
b	2462	10.064	0.5	Pass
g	2412	14.44	0.5	Pass
g	2437	15.069	0.5	Pass
g	2462	16.026	0.5	Pass
n20	2412	14.991	0.5	Pass
n20	2437	16.102	0.5	Pass
n20	2462	15.738	0.5	Pass
n40	2422	35.064	0.5	Pass
n40	2437	35.101	0.5	Pass
n40	2452	35.053	0.5	Pass

Test Graphs
-6dB Bandwidth b 2412MHz

-6dB Bandwidth b 2437MHz





-6dB Bandwidth b 2462MHz



-6dB Bandwidth g 2412MHz














6.4. Power Spectral Density

6.4.1. Test Specification

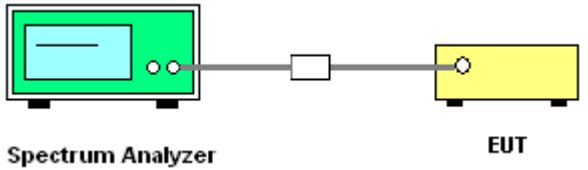Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	KDB 558074
Limit:	The average power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The testing follows Measurement Procedure 10.3 Method AVGPS of FCC KDB Publication No.558074 D01 DTS Meas. Guidance v04 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW): $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$. Video bandwidth VBW $\geq 3 \times \text{RBW}$. Set the span to at least 1.5 times the OBW. 5. Detector = RMS, Sweep time = auto couple. 6. Employ trace averaging (RMS) mode over a minimum of 100 traces. Use the peak marker function to determine the maximum power level. 6. Measure and record the results in the test report.
Test Result:	PASS

- (i) If all antennas have the same gain, G_{ANT} :
Directional gain = $G_{ANT} + 10 \log(N_{ANT}/N_{SS})$ dBi, where N_{SS} = the number of independent spatial streams of data and G_{ANT} is the antenna gain in dBi. (This formula can also be applied when antennas have different gains if the highest antenna gain is substituted for G_{ANT} .)
- (ii) If antenna gains are not equal and each transmit antenna is driven by only one spatial stream, directional gain may be calculated by either of the following two formulas.
- Directional gain = $G_{ANT MAX} + 10 \log(N_{ANT}/N_{SS})$ dBi, where N_{SS} = the number of independent spatial streams of data and $G_{ANT MAX}$ is the gain of the antenna having the highest gain (in dBi).

Or,

$$\bullet \text{ Directional Gain} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

N_{SS} = the number of independent spatial streams of data;

N_{ANT} = the total number of antennas

$g_{j,k} = 10^{G_k / 20}$ if the k th antenna is being fed by spatial stream j , or zero if it is not;
 G_k is the gain in dBi of the k th antenna.

For power spectral density (PSD) measurements on all devices,
Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

Note: $N_{ANT}=2$, Array gain= $10 \log(N_{ANT}/N_{SS})=10 \log(2/1)=3.01$ dB,

Directional gain= G_{ANT} +Array gain= 2.70 dB+ 3.01 dB= 5.71 dB, not exceeding 6, so psd limits remain unchanged.

6.4.2. Test data(worst)

MAIN Ant1

Mode	Frequency (MHz)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
b	2412	-7.05	8	Pass
b	2437	-6.66	8	Pass
b	2462	-7.04	8	Pass
g	2412	-8.29	8	Pass
g	2437	-8.37	8	Pass
g	2462	-8.85	8	Pass
n20	2412	-8.81	8	Pass
n20	2437	-8.57	8	Pass
n20	2462	-9.24	8	Pass
n40	2422	-14.16	8	Pass
n40	2437	-11.79	8	Pass
n40	2452	-14.44	8	Pass

AUX Ant2

Mode	Frequency (MHz)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
b	2412	-7.05	8	Pass
b	2437	-6.79	8	Pass
b	2462	-6.81	8	Pass
g	2412	-8.87	8	Pass
g	2437	-7.93	8	Pass
g	2462	-8.6	8	Pass
n20	2412	-8.88	8	Pass
n20	2437	-8.76	8	Pass
n20	2462	-8.26	8	Pass
n40	2422	-13.72	8	Pass
n40	2437	-11.63	8	Pass
n40	2452	-14.1	8	Pass

MIMO Mode

Mode	Frequency (MHz)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
n20	2412	-5.84	8	Pass
n20	2437	-5.65	8	Pass
n20	2462	-5.71	8	Pass
n40	2422	-10.92	8	Pass
n40	2437	-8.70	8	Pass
n40	2452	-11.26	8	Pass



MAIN Ant1 Test Graphs

PSD b 2412MHz



PSD b 2437MHz






PSD b 2462MHz




PSD g 2412MHz

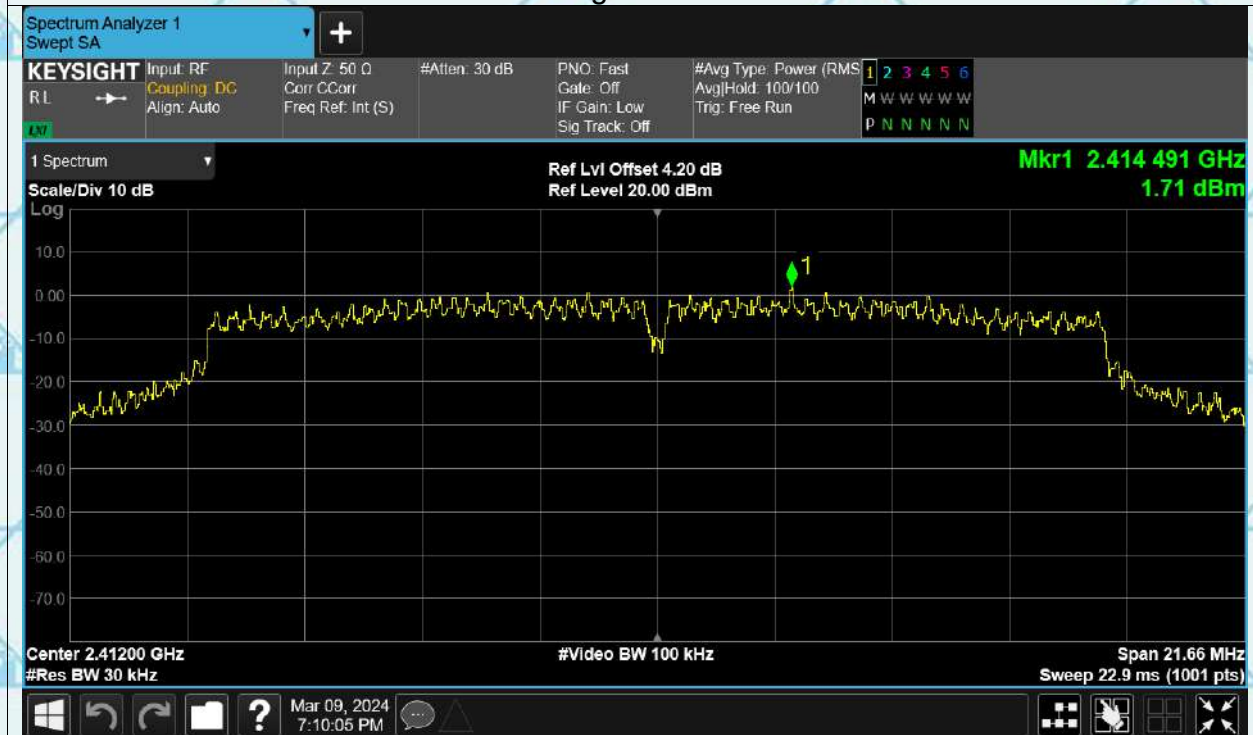




PSD g 2437MHz

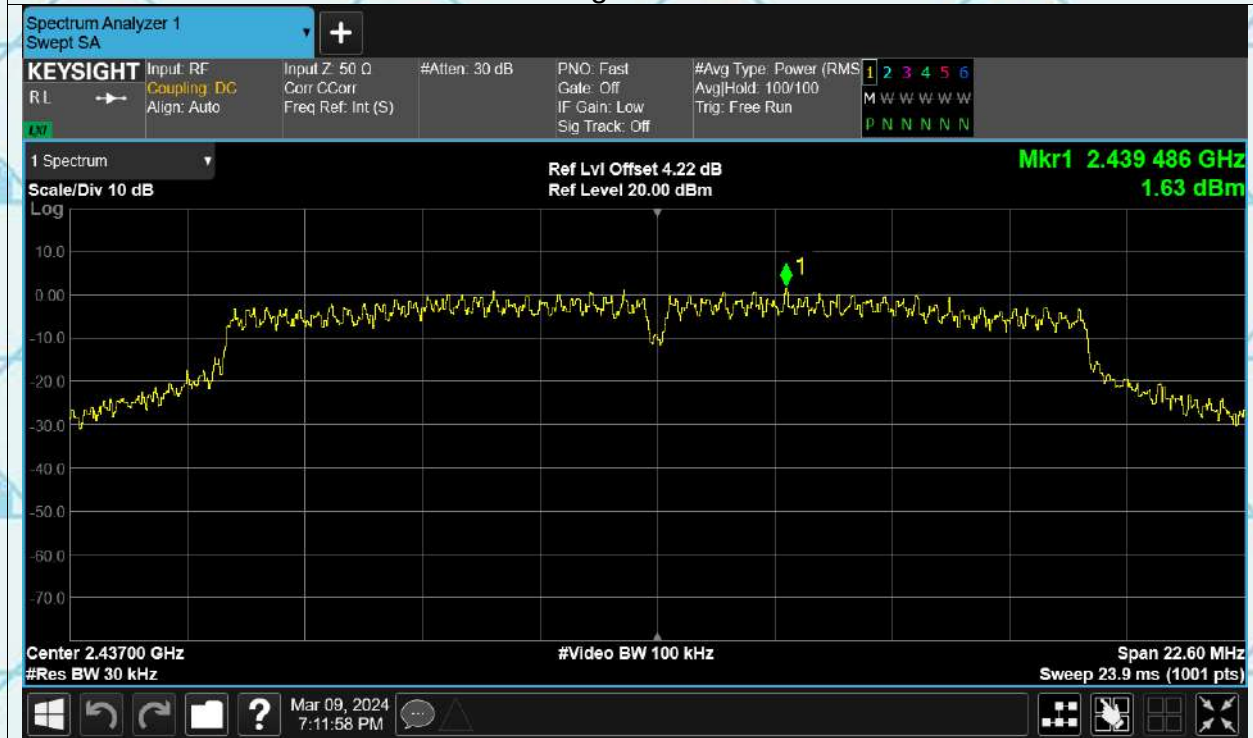


PSD g 2462MHz

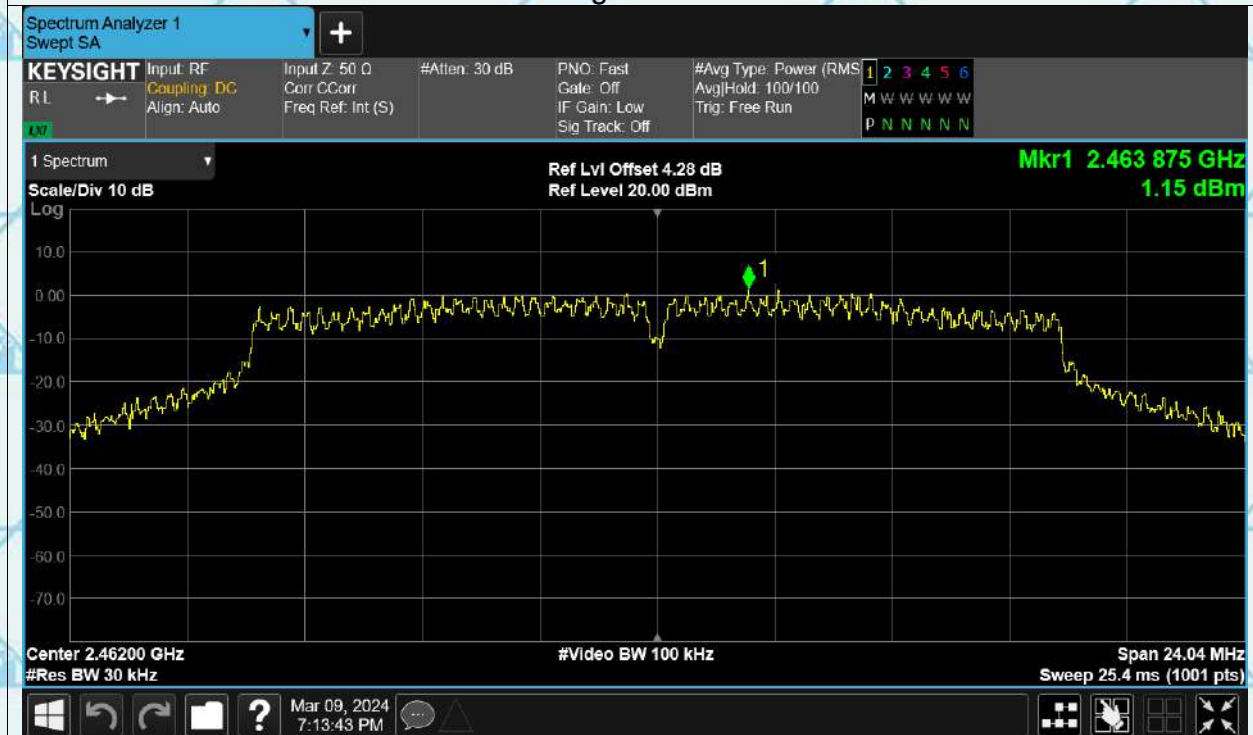




PSD n20 2412MHz

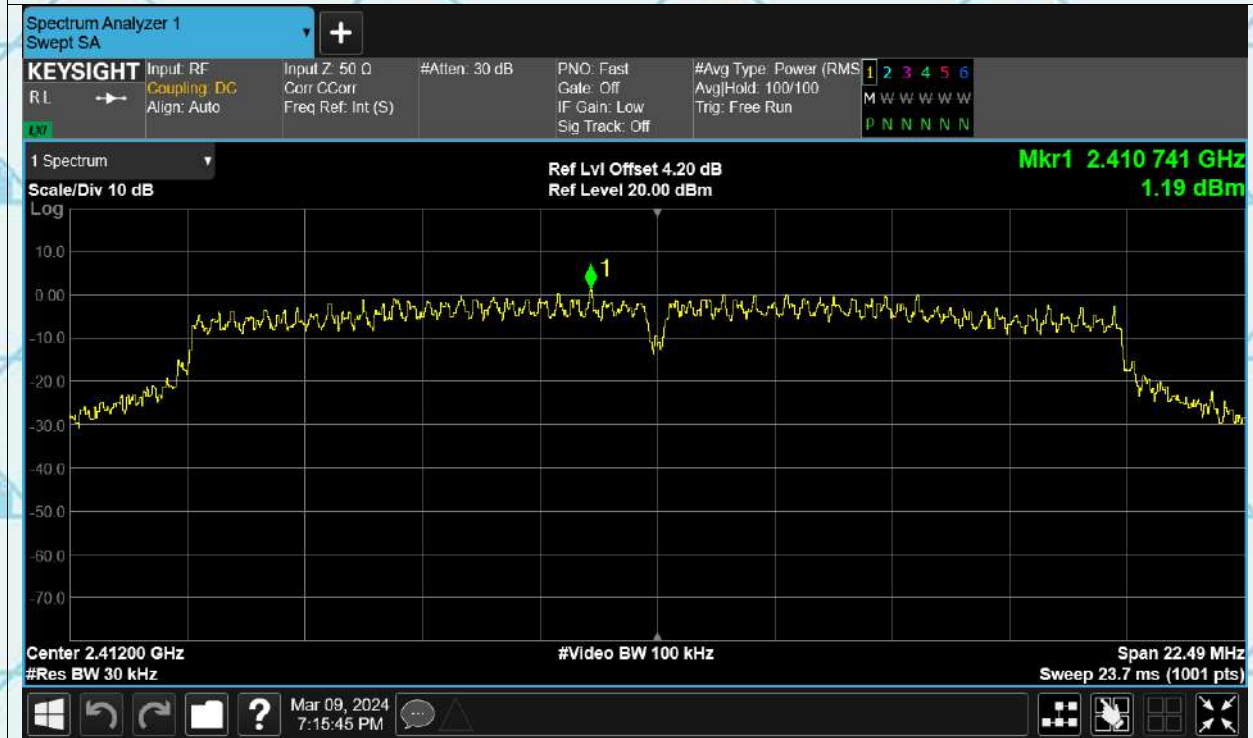


PSD n20 2437MHz

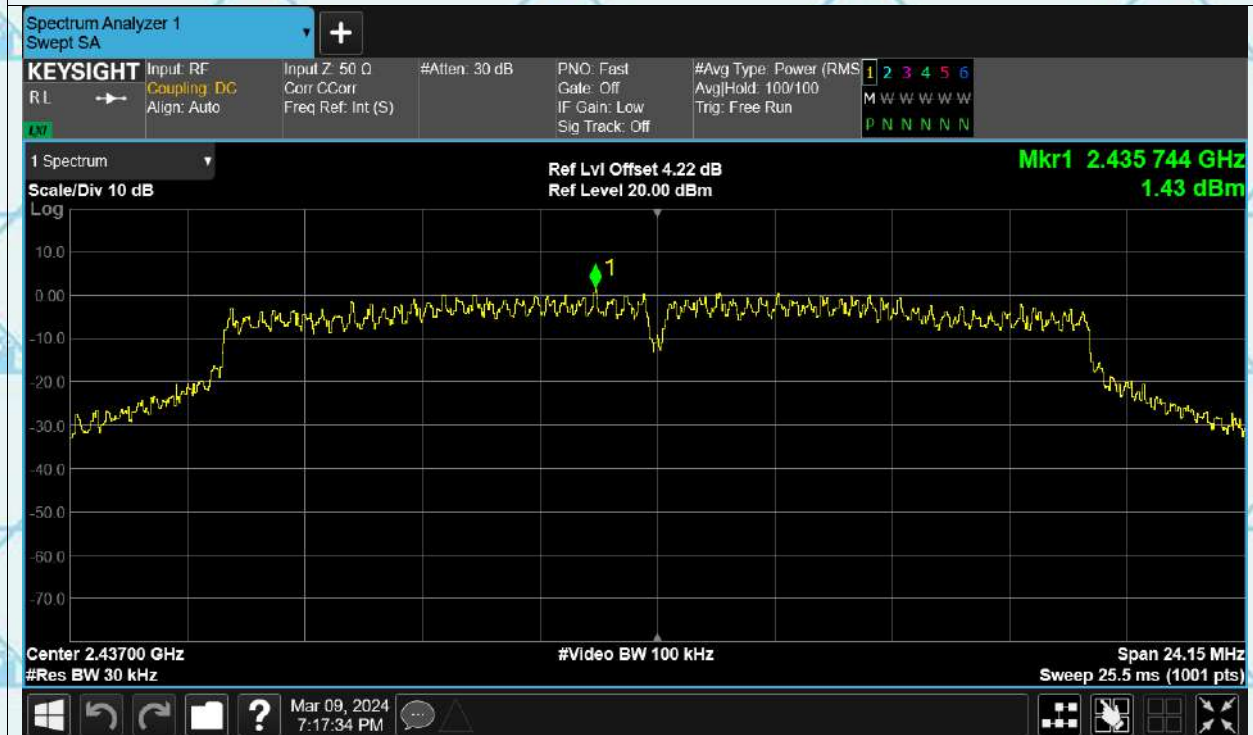



PSD n20 2462MHz

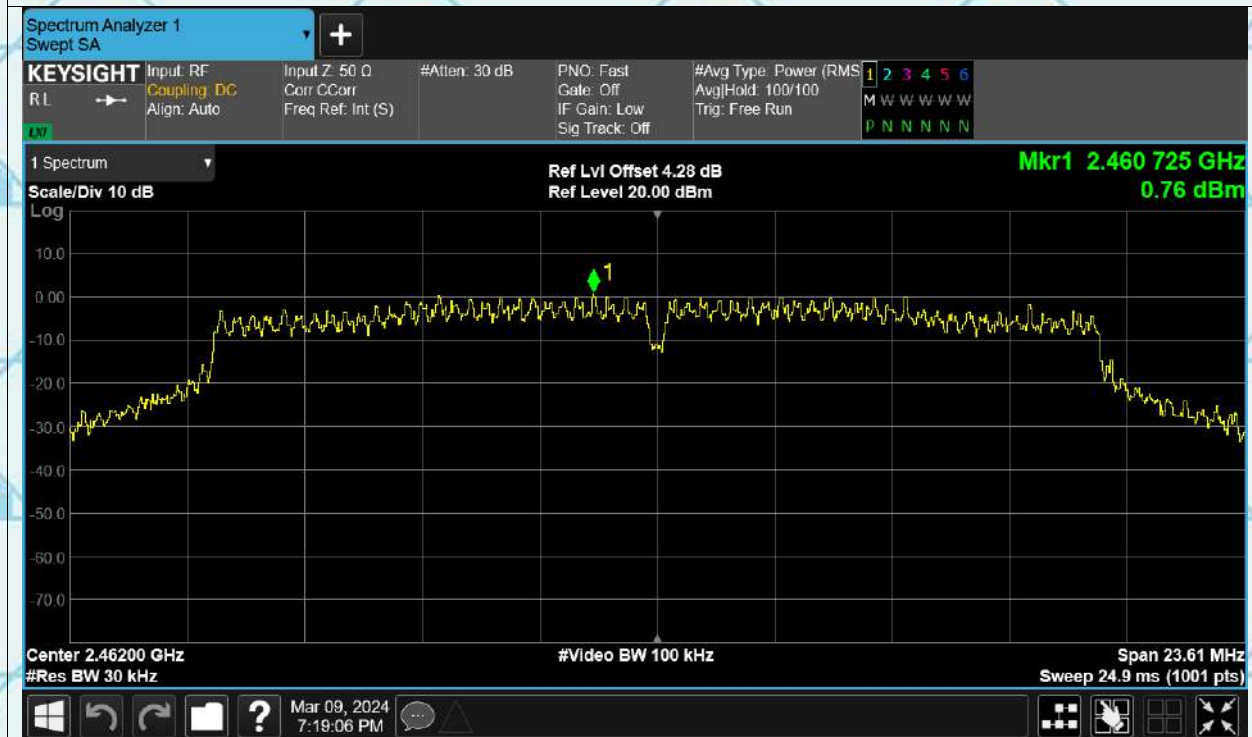


PSD n40 2422MHz






PSD n40 2437MHz

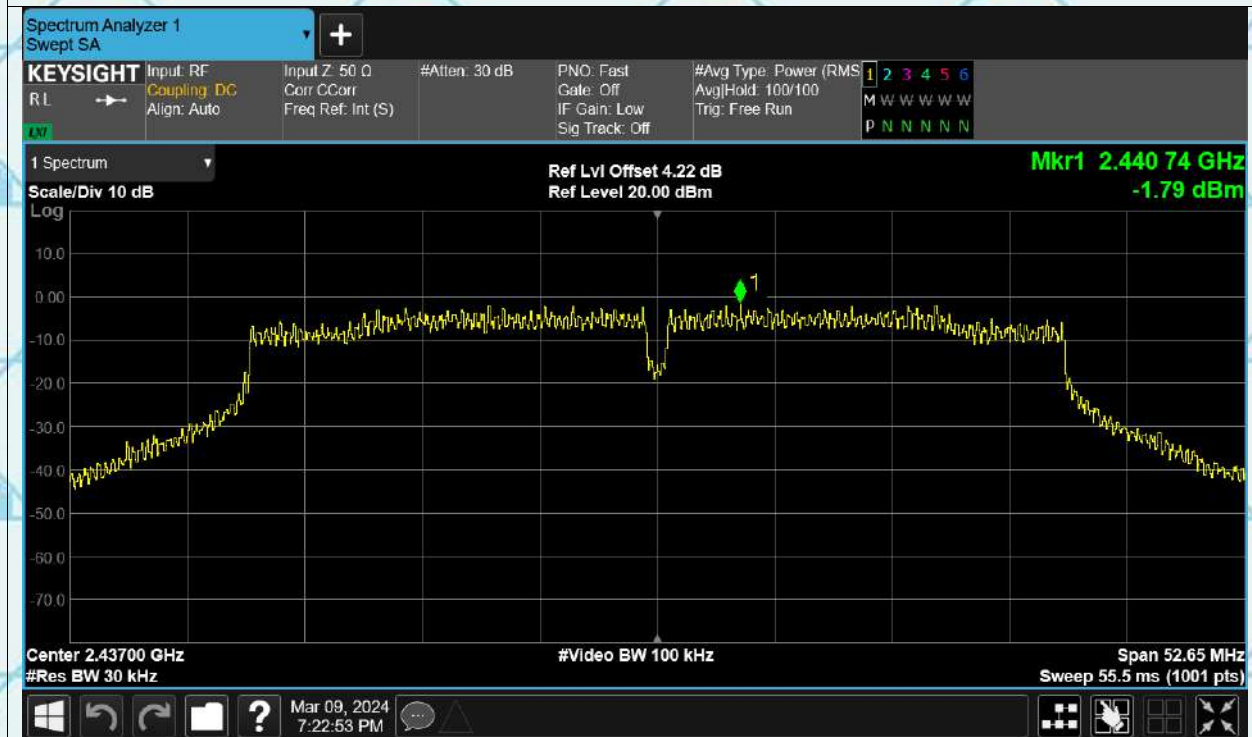

PSD n40 2452MHz

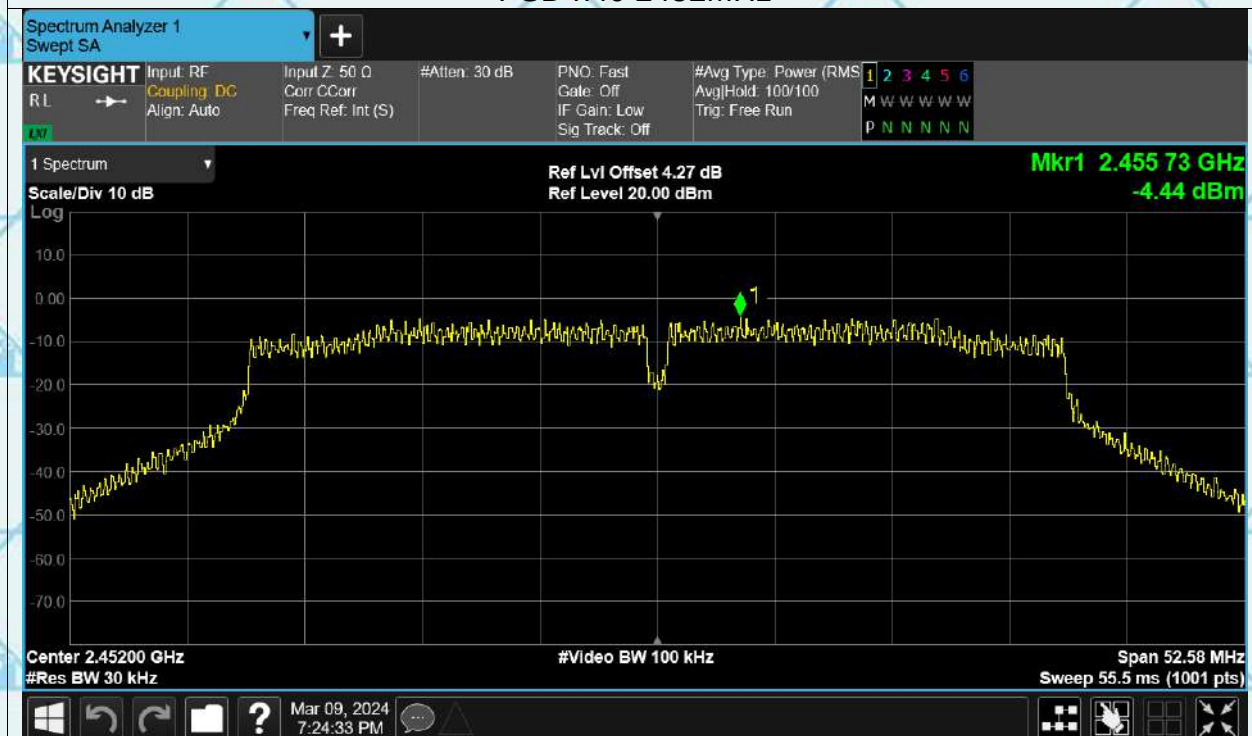



AUX Ant2 Test Graphs

PSD b 2412MHz



PSD b 2437MHz






PSD b 2462MHz




PSD g 2412MHz

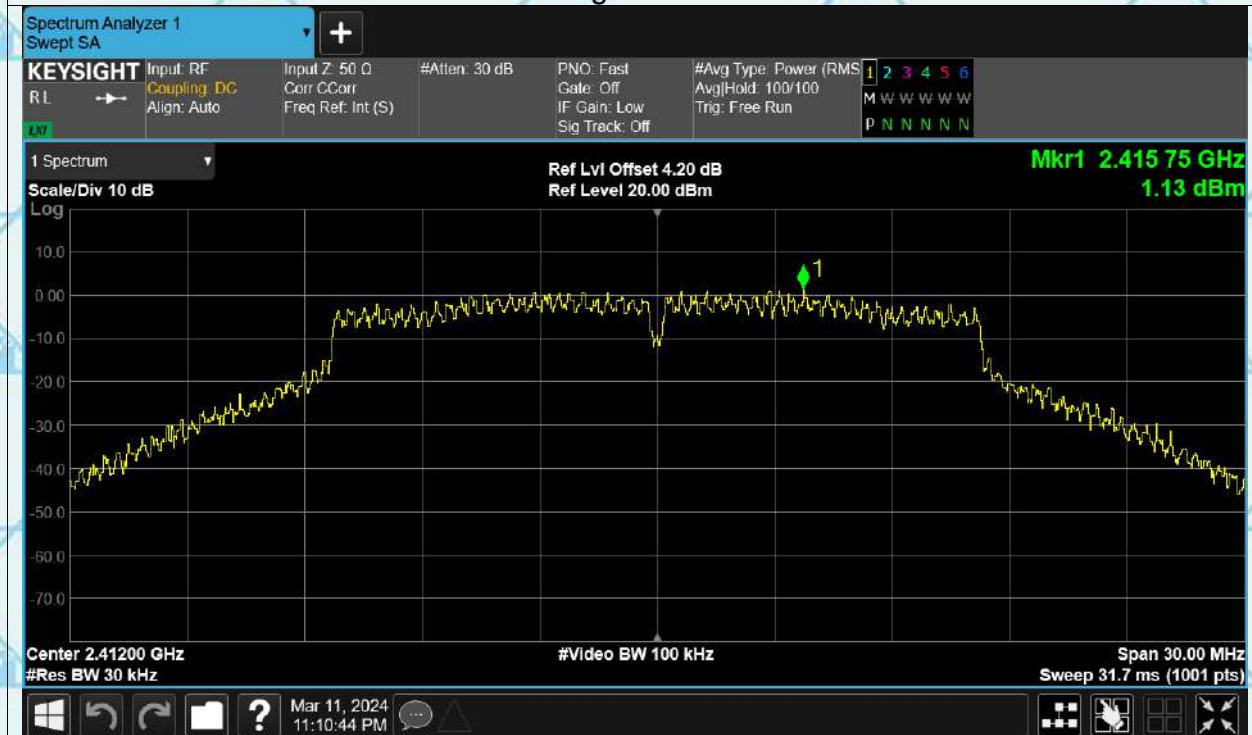




PSD g 2437MHz

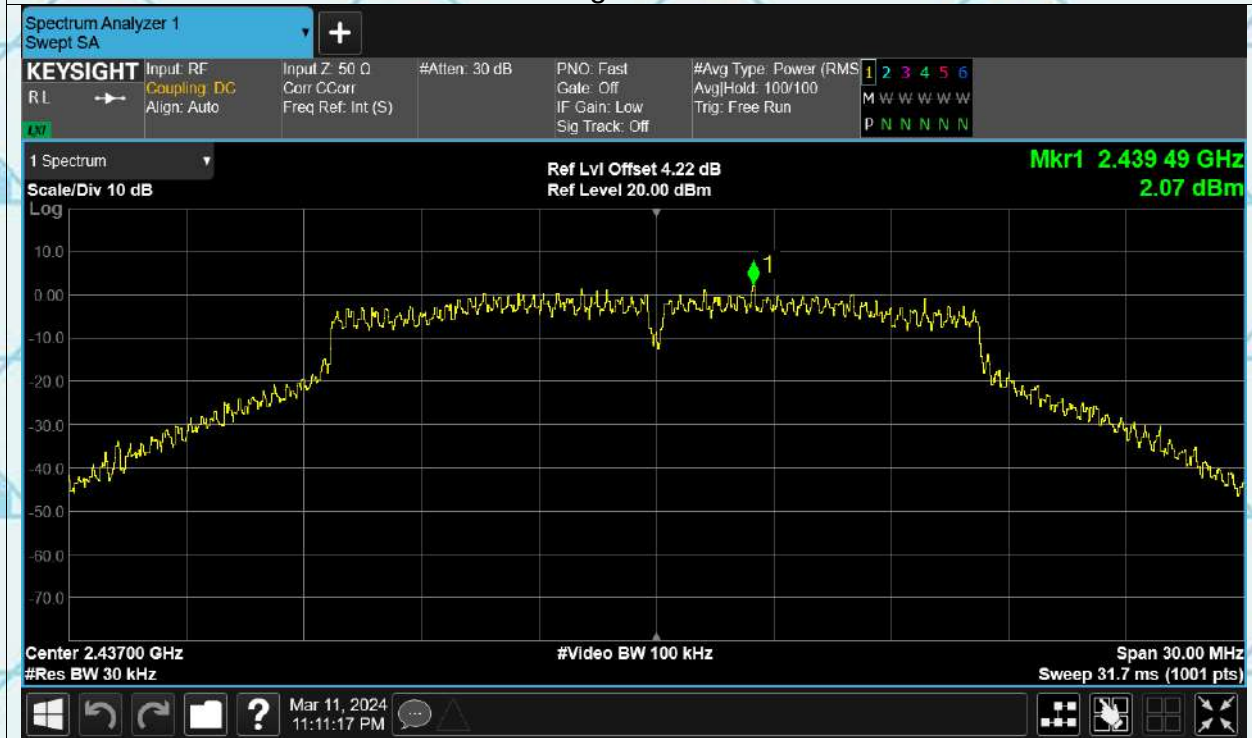


PSD g 2462MHz

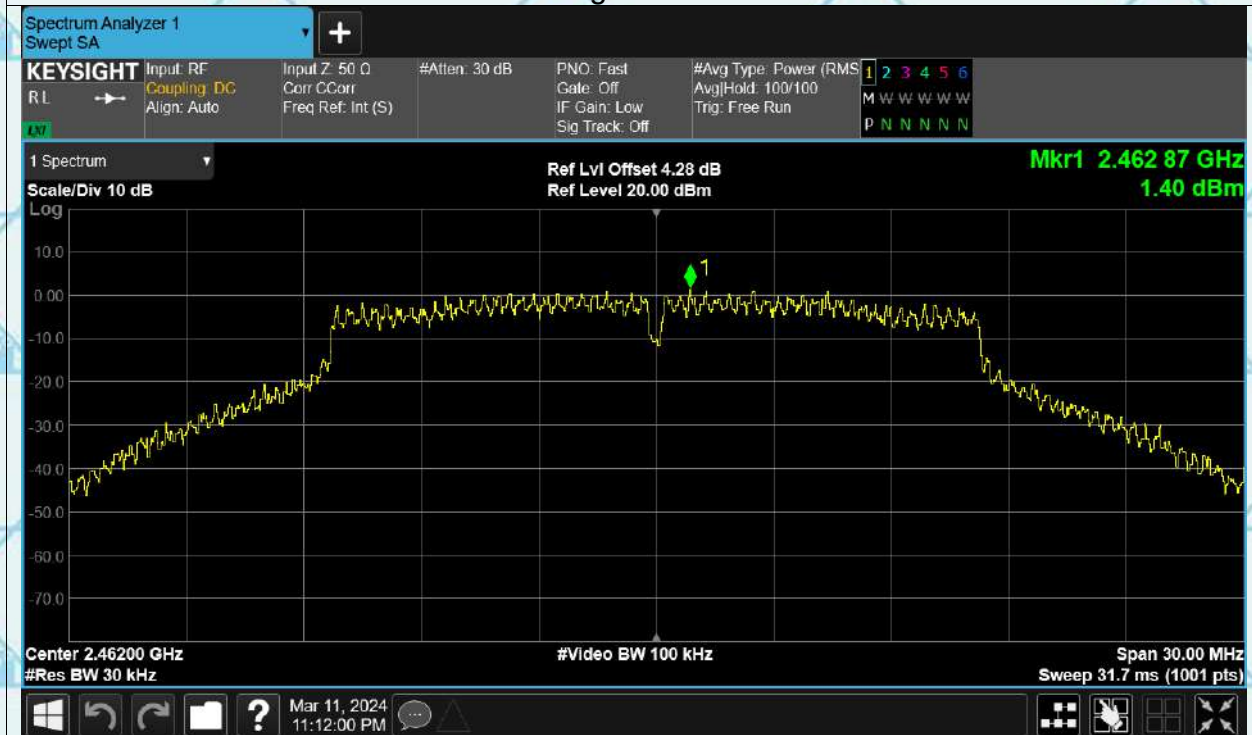




PSD n20 2412MHz

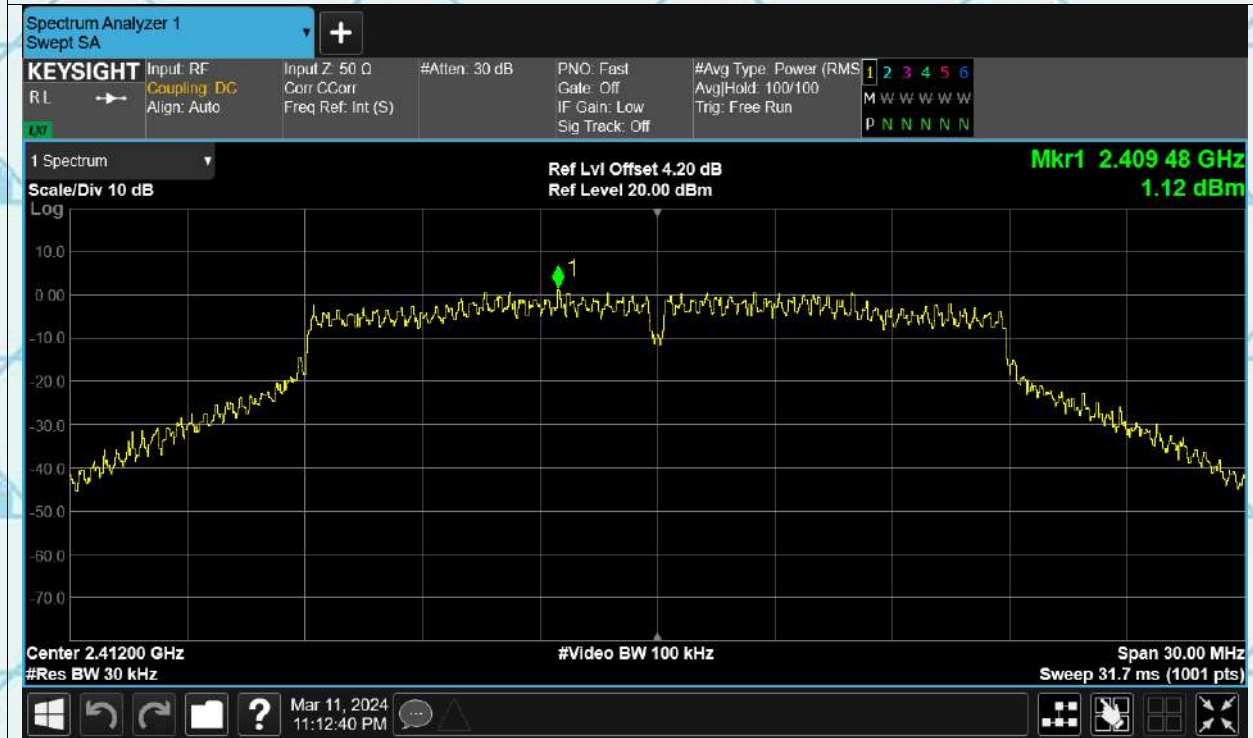


PSD n20 2437MHz

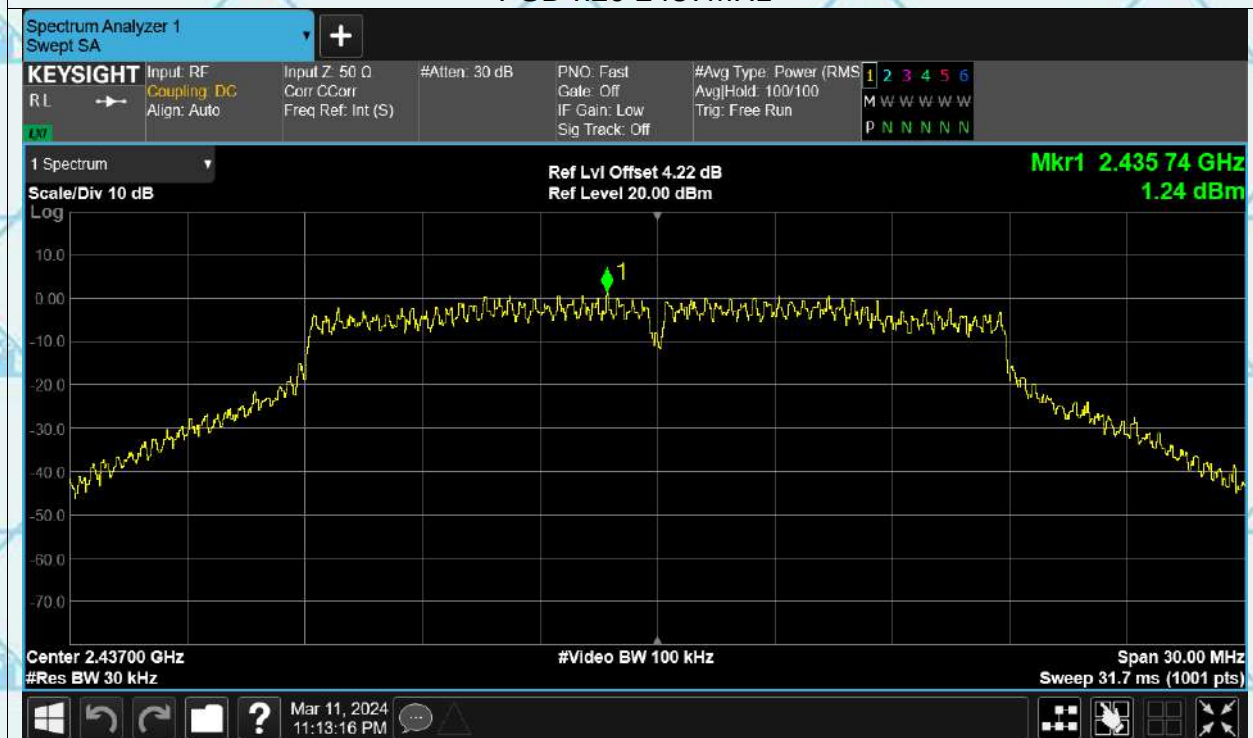



PSD n20 2462MHz

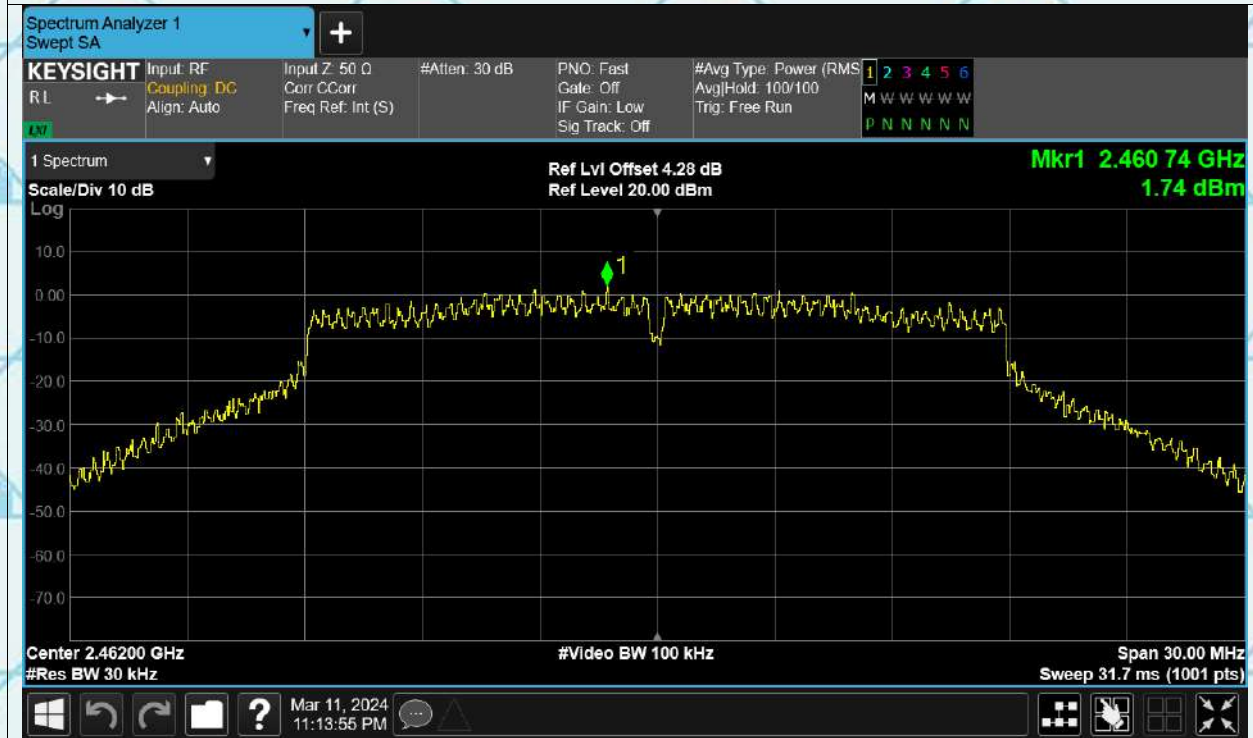

PSD n40 2422MHz






PSD n40 2437MHz




PSD n40 2452MHz

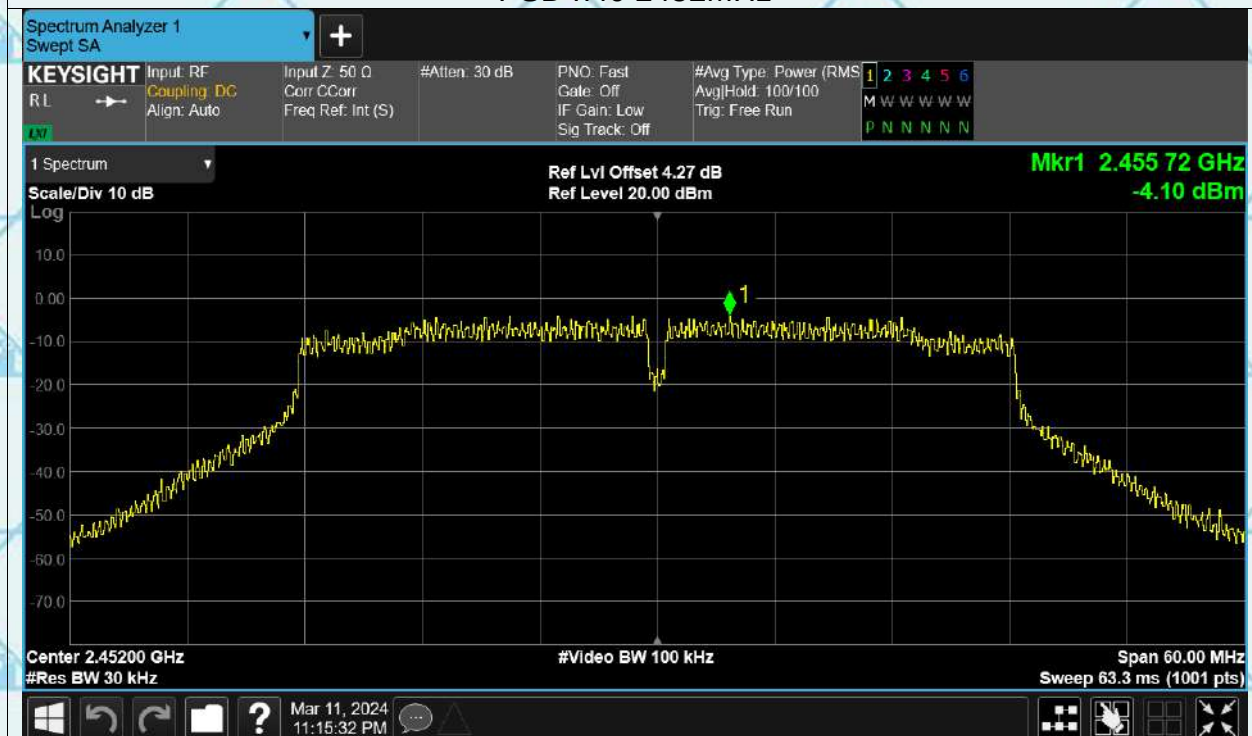



6.5. Conducted Band Edge and Spurious Emission Measurement



6.5.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074
Limit:	In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04. 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d). 5. Measure and record the results in the test report. 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
Test Result:	PASS



6.5.2. Test Data

Band Edge

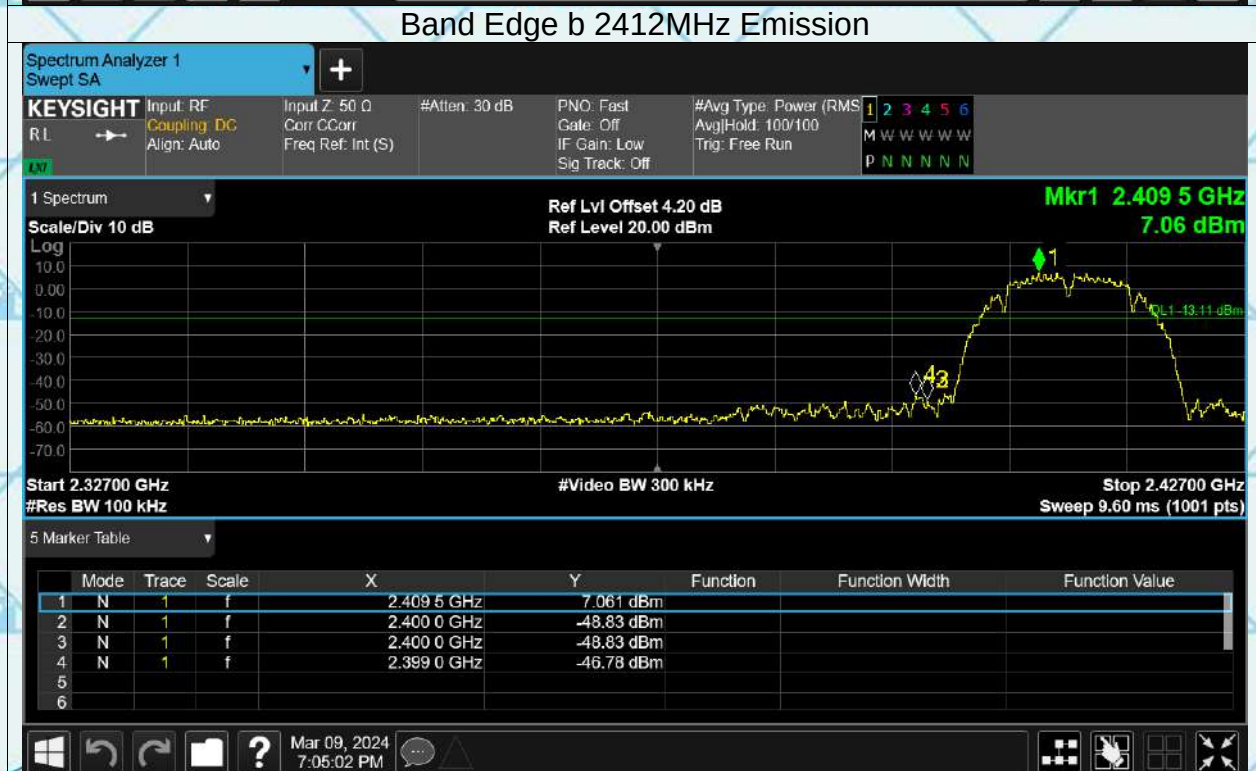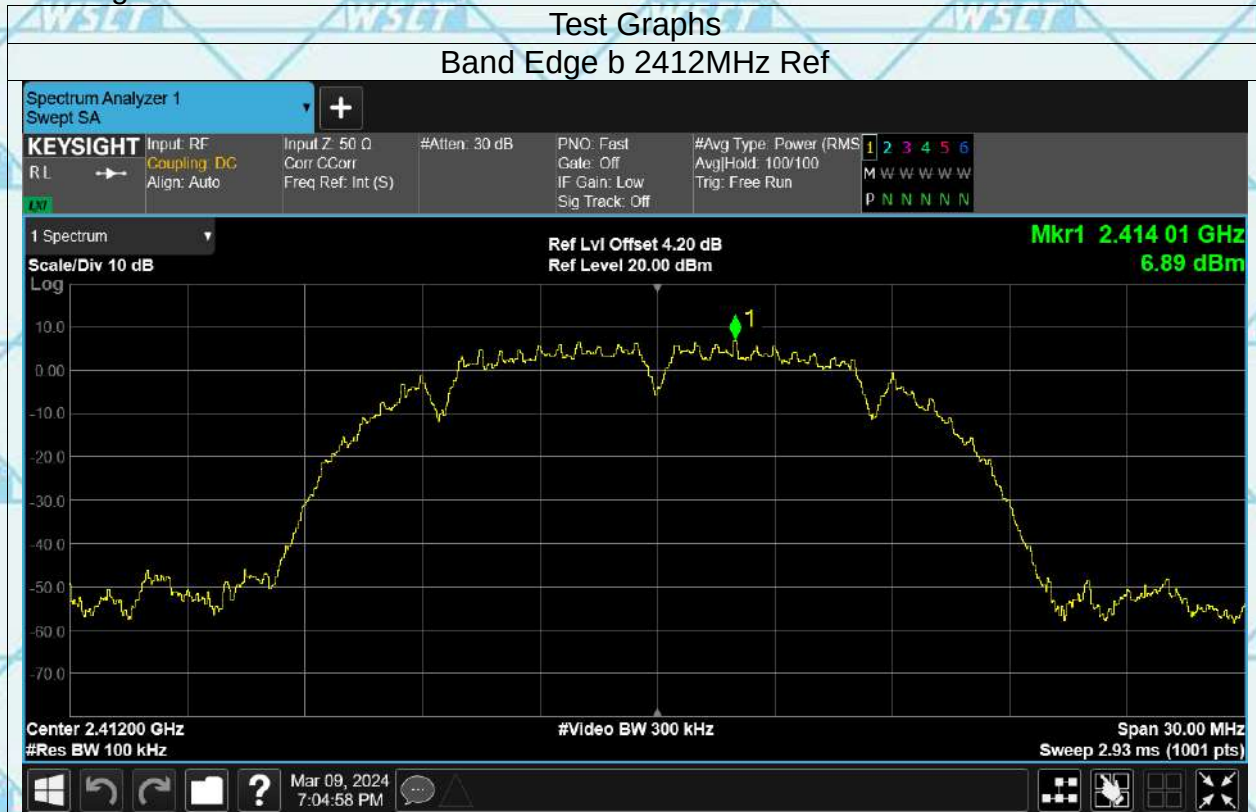



Band Edge b 2462MHz Ref



Band Edge b 2462MHz Emission






Band Edge g 2412MHz Ref



Band Edge g 2412MHz Emission

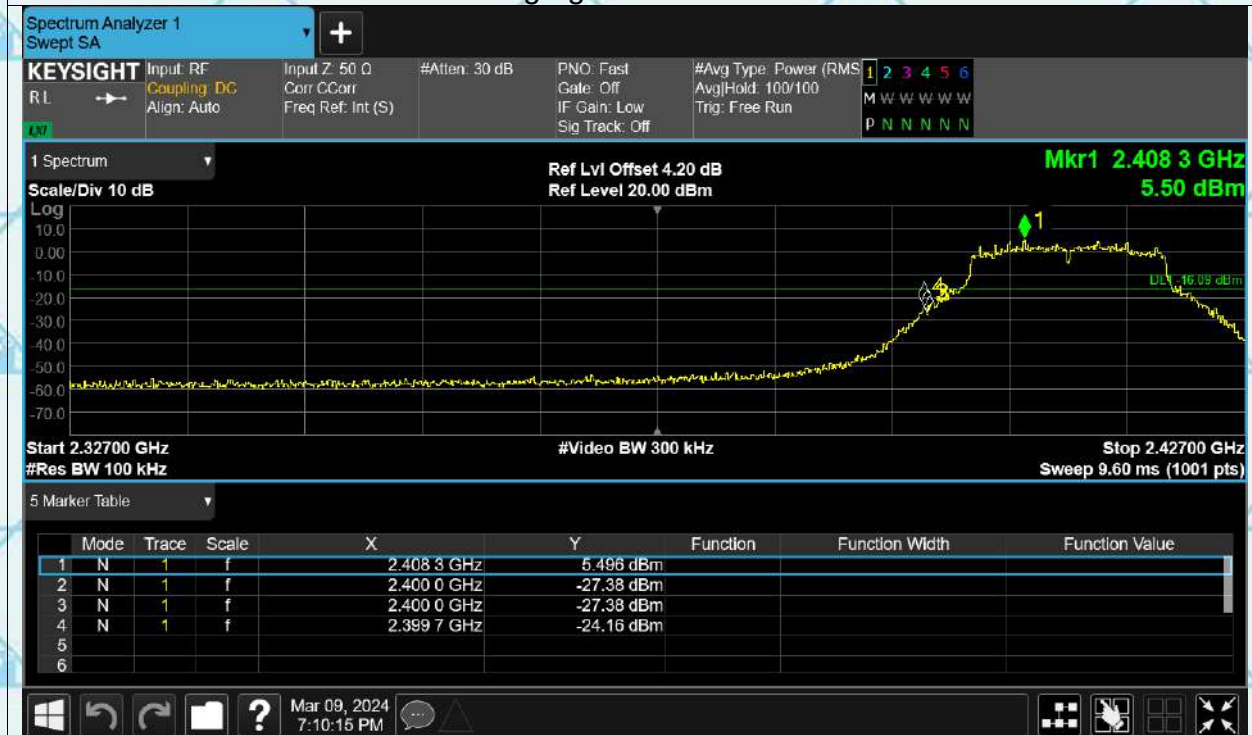



Band Edge g 2462MHz Ref



Band Edge g 2462MHz Emission






Band Edge n20 2412MHz Ref



Band Edge n20 2412MHz Emission

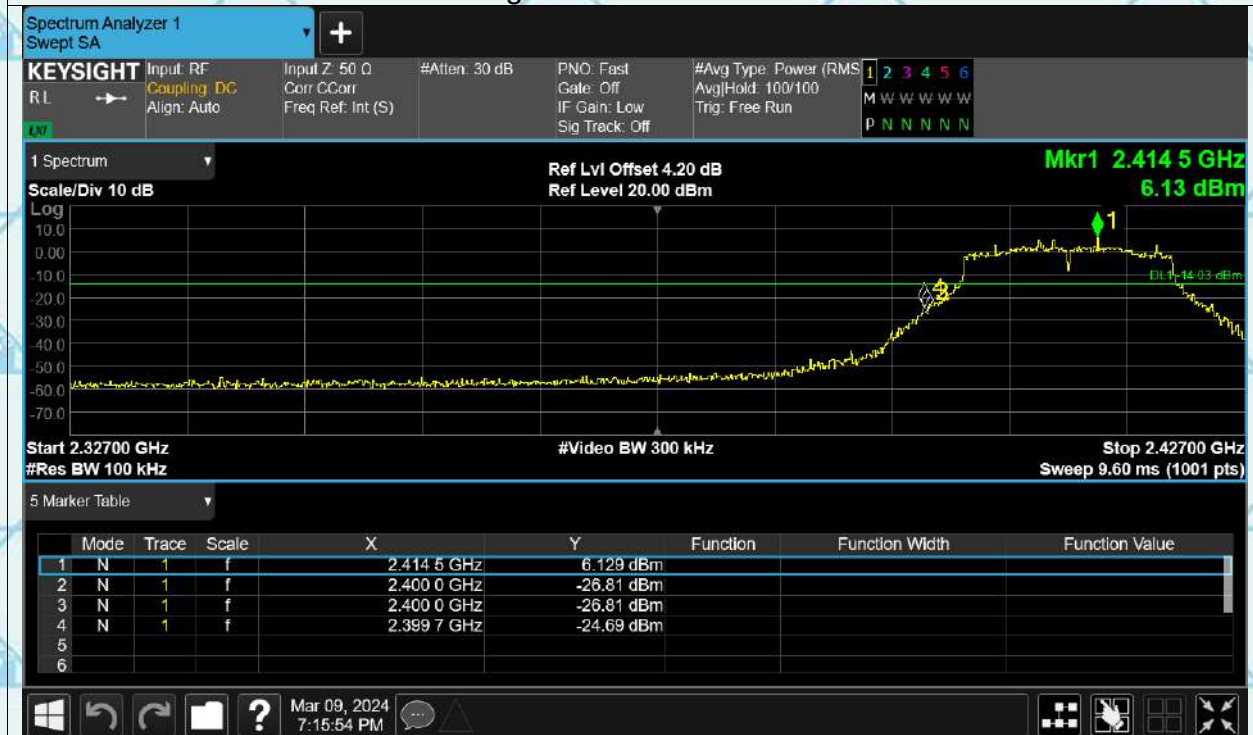




Band Edge n20 2462MHz Ref



Band Edge n20 2462MHz Emission

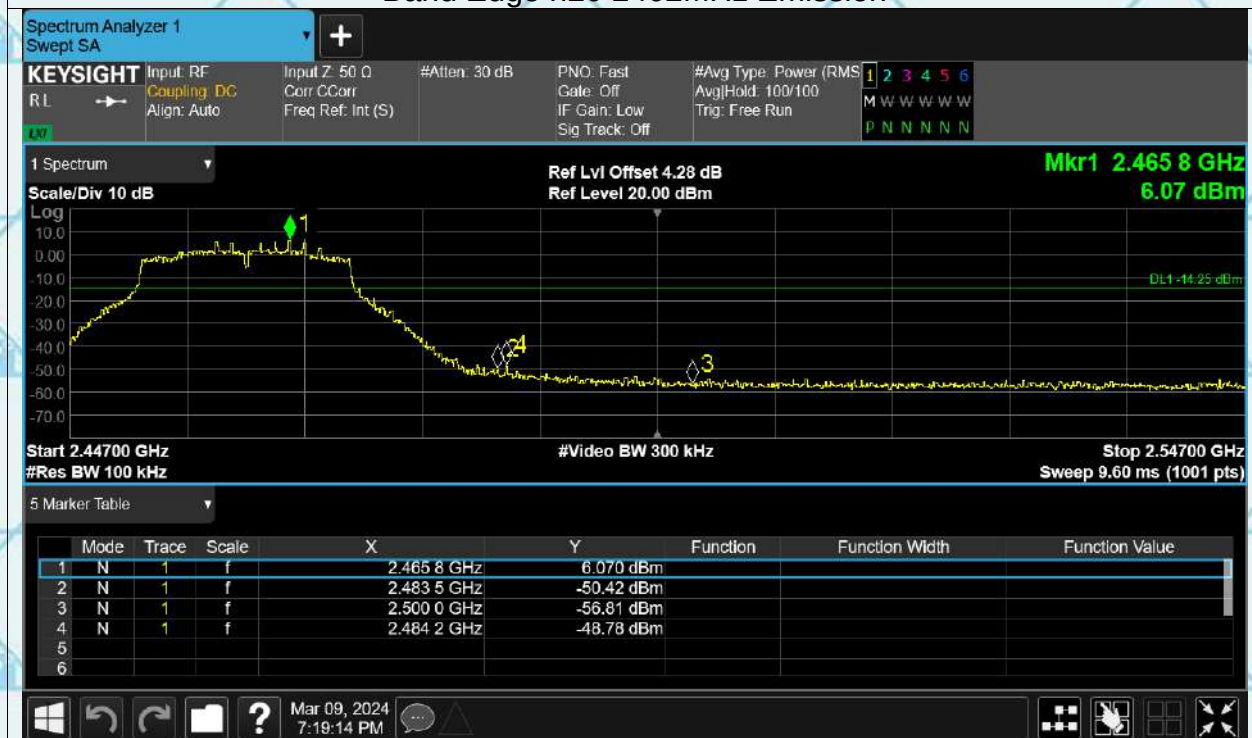



Band Edge n40 2422MHz Ref



Band Edge n40 2422MHz Emission





Band Edge n40 2452MHz Ref



Band Edge n40 2452MHz Emission






Conducted RF Spurious Emission

Test Graphs
b 2412MHz

b 2412MHz

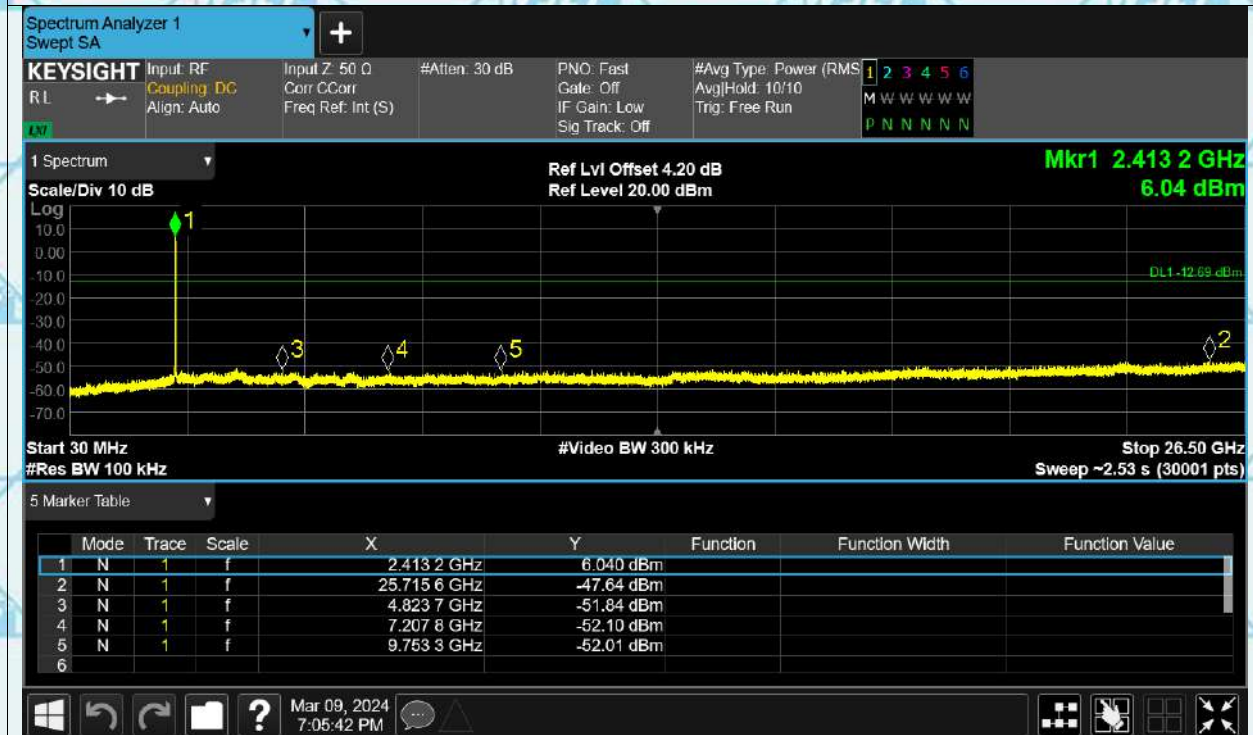




b 2437MHz



b 2437MHz

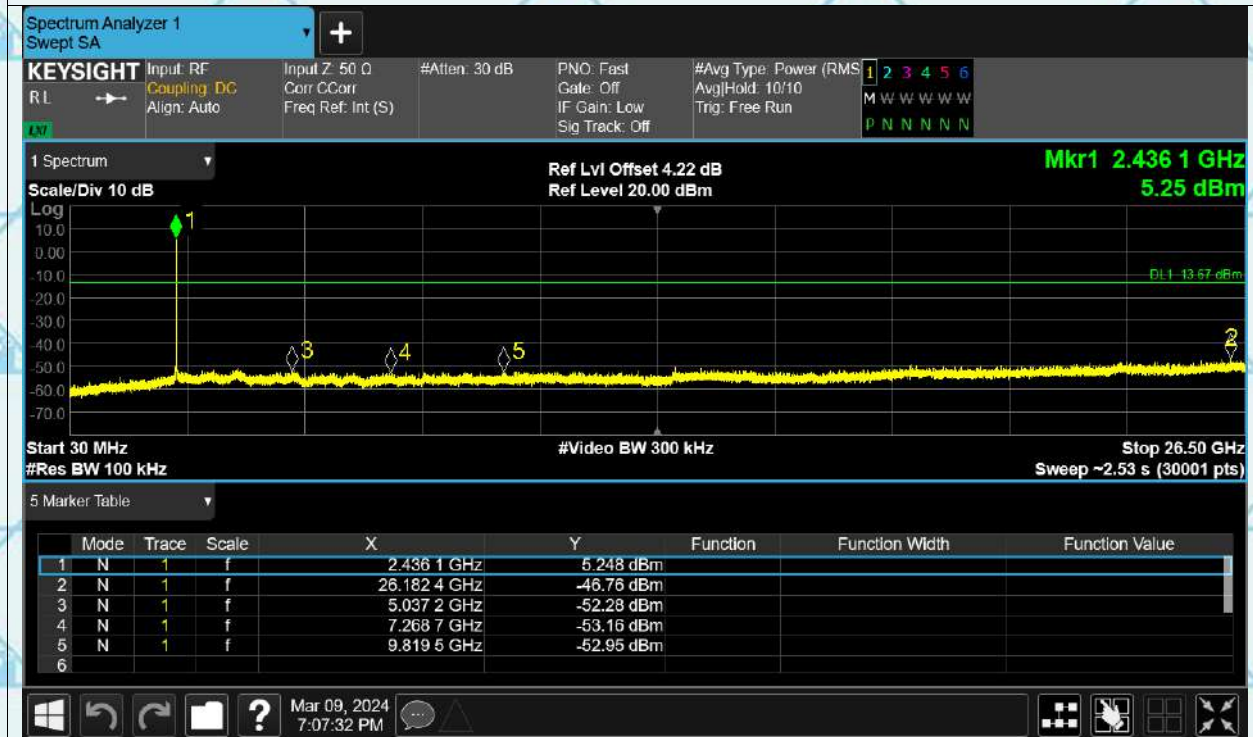




b 2462MHz



b 2462MHz

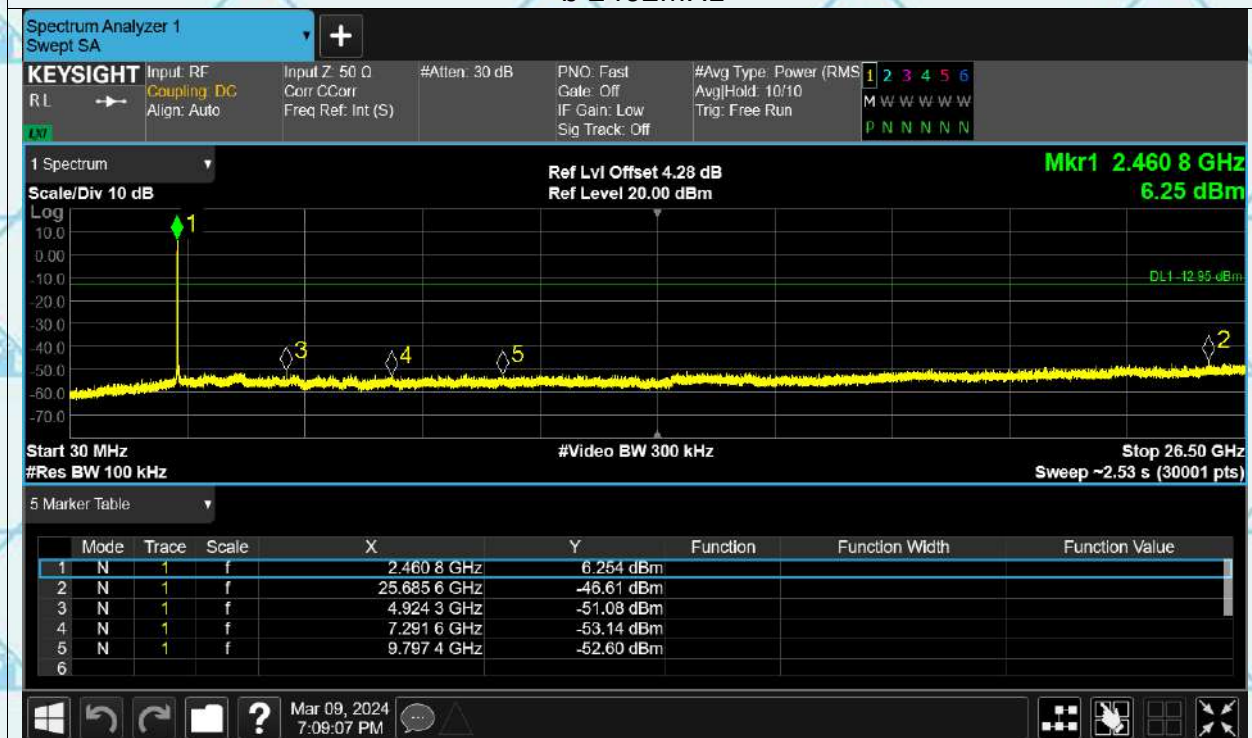



g 2412MHz



g 2412MHz






g 2437MHz



g 2437MHz

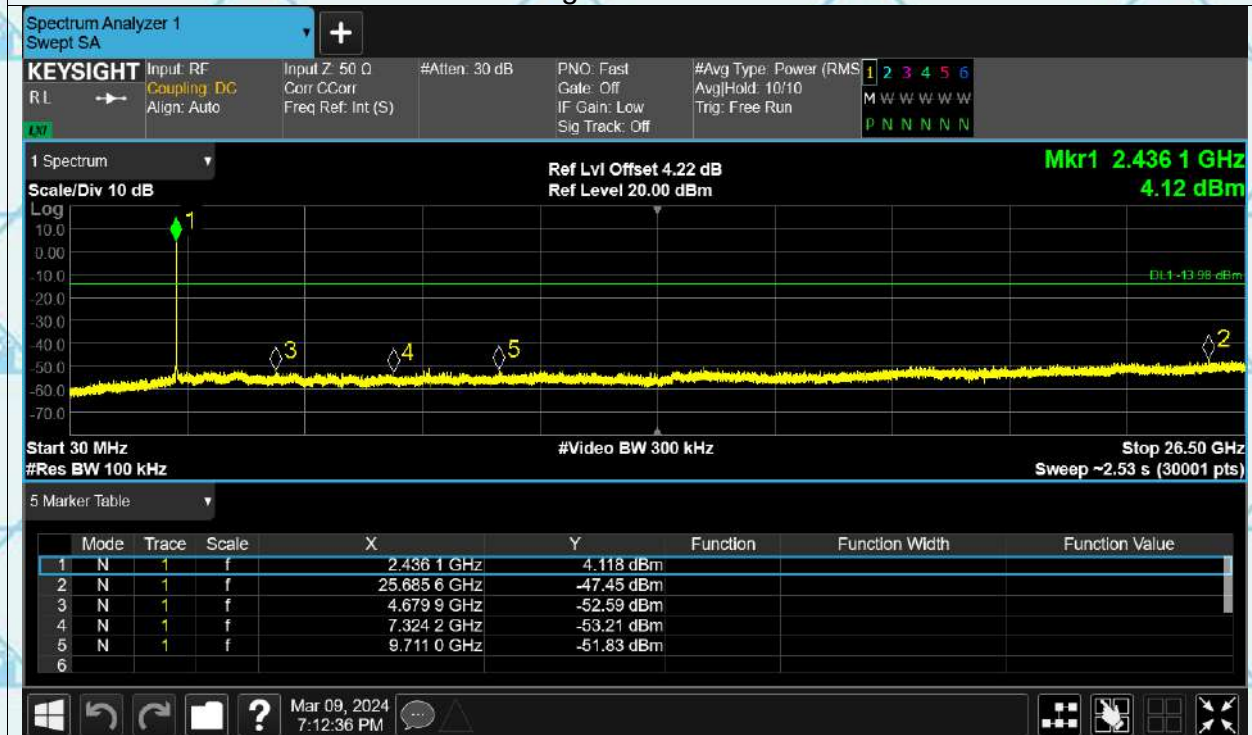




g 2462MHz



g 2462MHz

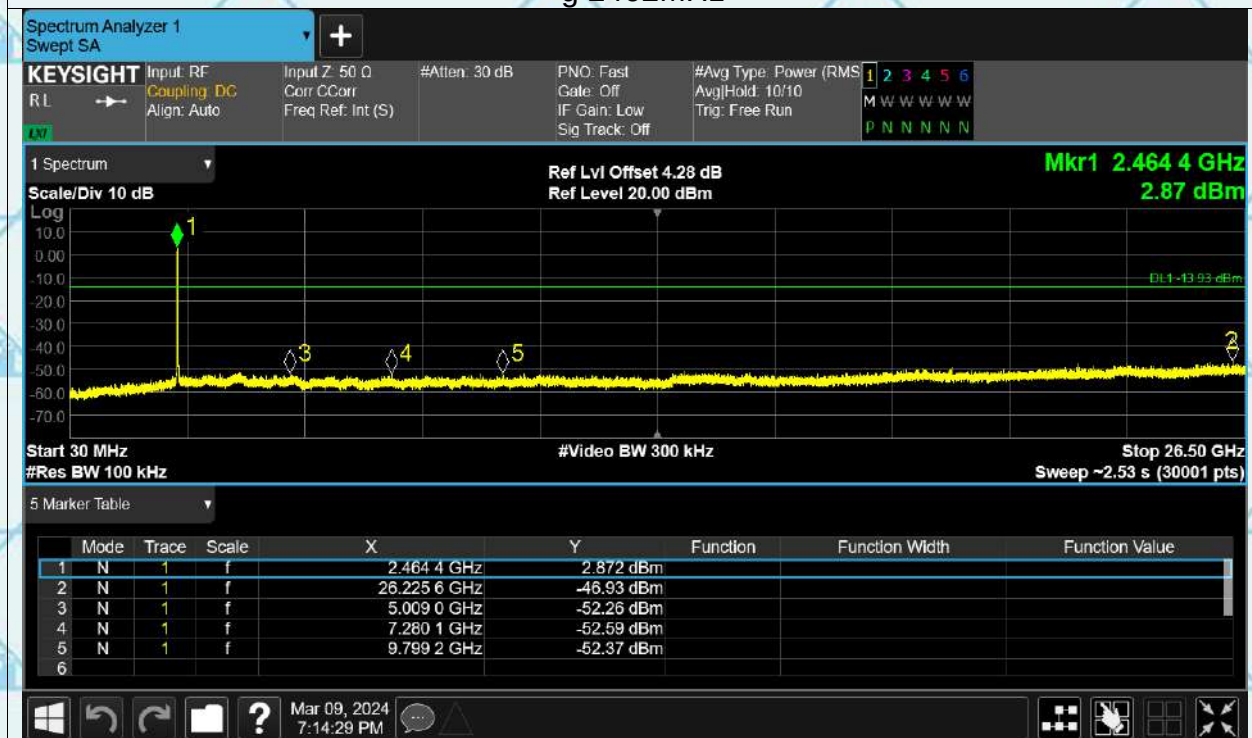




n20 2412MHz



n20 2412MHz

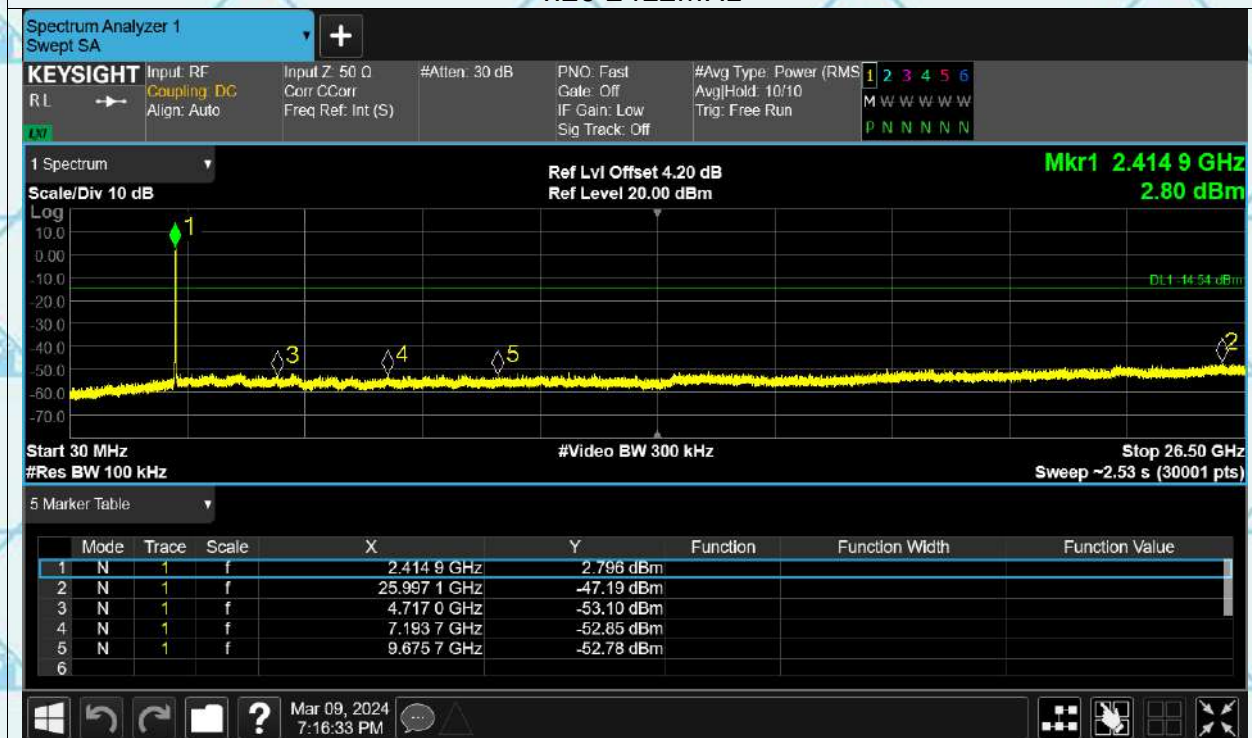




n20 2437MHz



n20 2437MHz

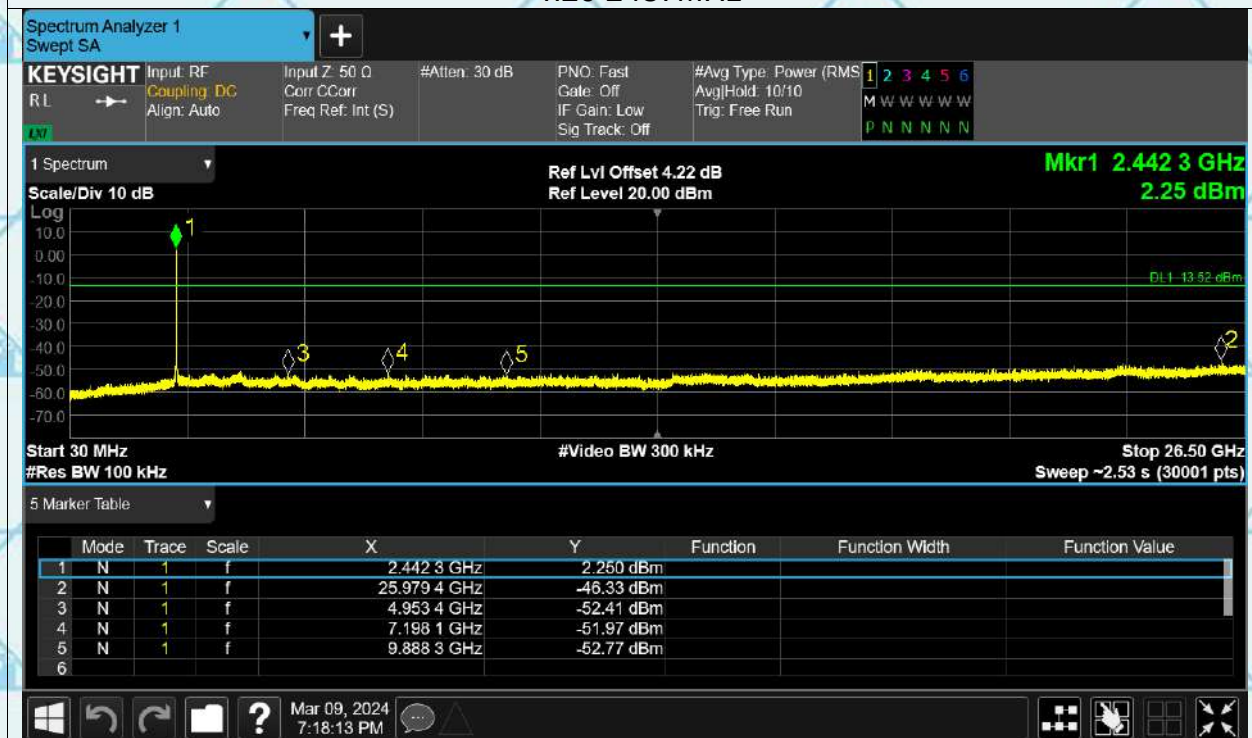




n20 2462MHz



n20 2462MHz

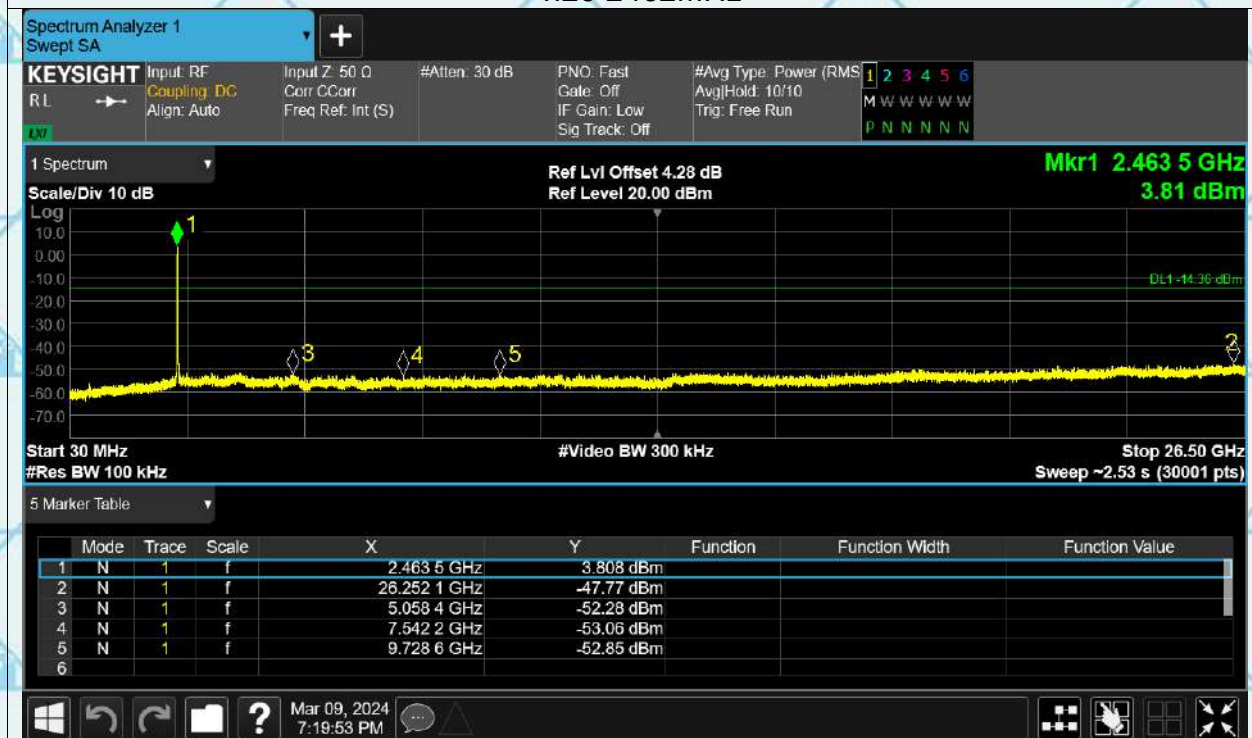



n40 2422MHz



n40 2422MHz






n40 2437MHz



n40 2437MHz

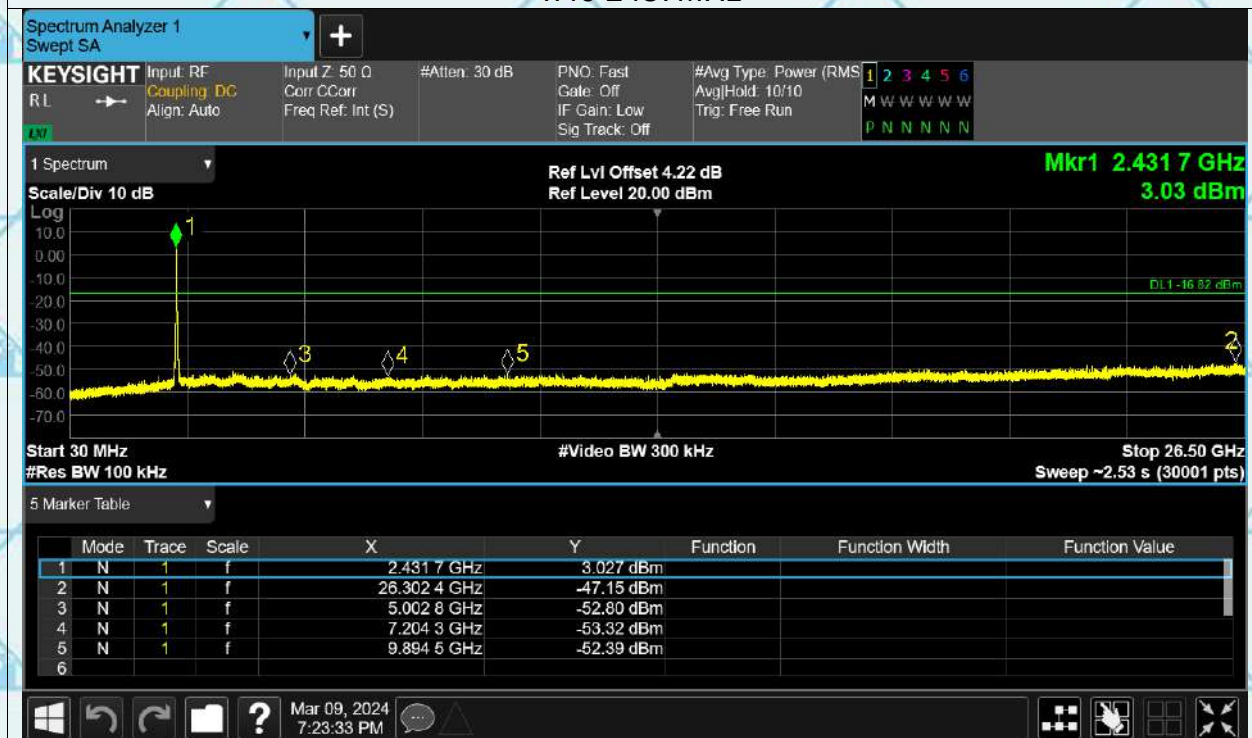




n40 2452MHz




n40 2452MHz

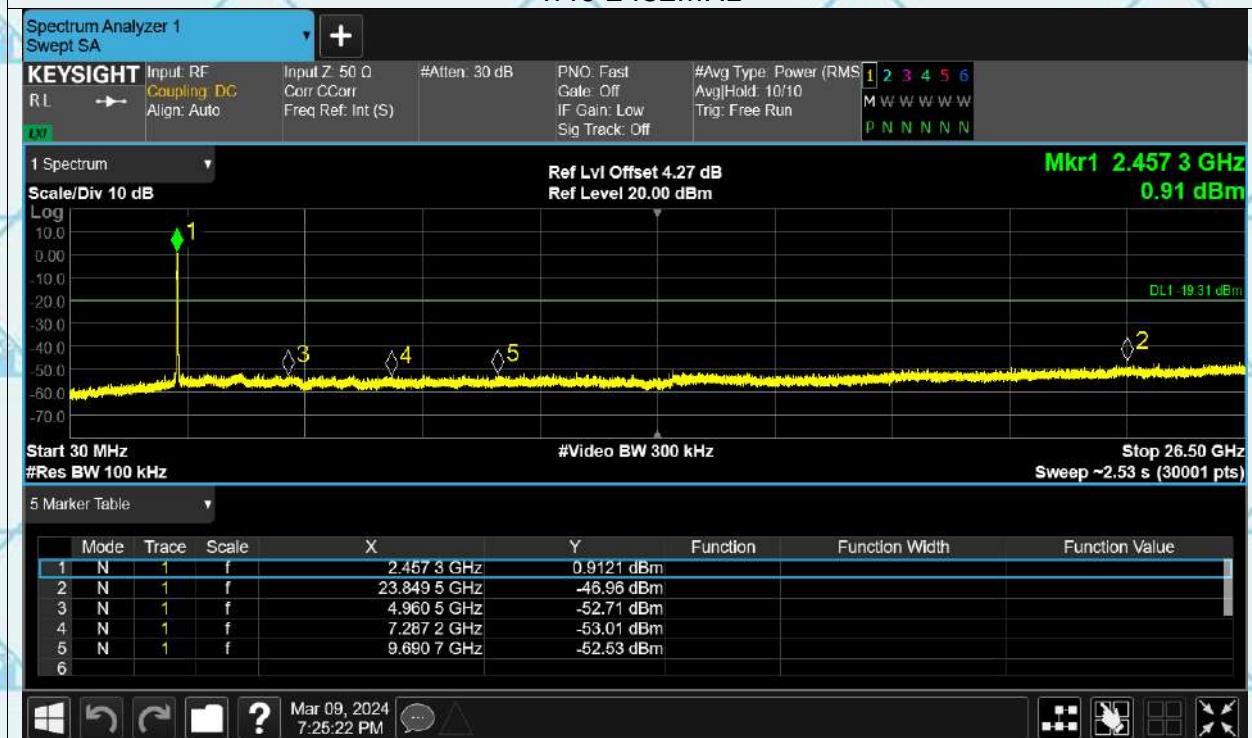





6.6. Radiated Spurious Emission Measurement

6.6.1. Test Specification

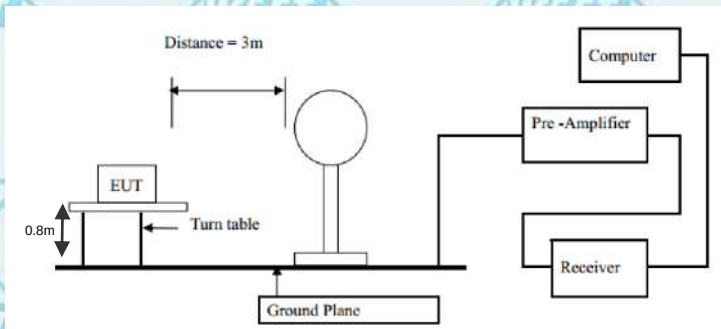Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10: 2014				
Frequency Range:	9 kHz to 25 GHz				
Measurement Distance:	3 m				
Antenna Polarization:	Horizontal & Vertical				
Operation mode:	Transmitting mode with modulation				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
Peak		1MHz	10Hz	Average Value	
Limit:	Frequency		Field Strength (microvolts/meter)		Measurement Distance (meters)
	0.009-0.490		2400/F(KHz)		300
	0.490-1.705		24000/F(KHz)		30
	1.705-30		30		30
	30-88		100		3
	88-216		150		3
	216-960		200		3
	Above 960		500		3
	Frequency		Field Strength (microvolts/meter)	Measurement Distance (meters)	Detector
	Above 1GHz		500	3	Average
		5000	3	Peak	
Test setup:	For radiated emissions below 30MHz				
					
	30MHz to 1GHz				

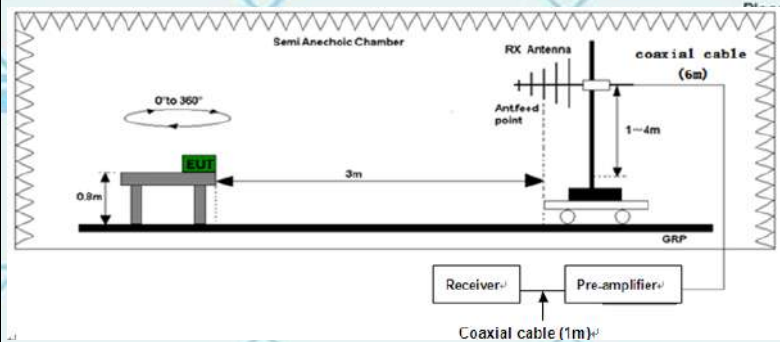

Above 1GHz

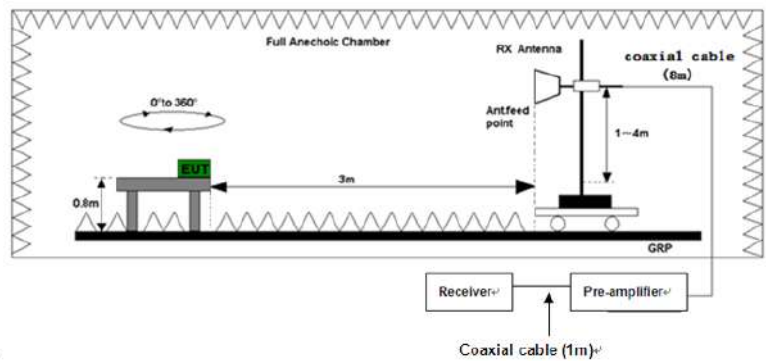

Test Procedure:

- For the radiated emission test below 1GHz:
The EUT was placed on a turntable with 0.8 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level.
- For the radiated emission test above 1GHz:
Place the measurement antenna on a turntable with 1.5 meter above ground, which is away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.



	3. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level 4. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported. 5. Use the following spectrum analyzer settings: (1) Span shall wide enough to fully capture the emission being measured; (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold; (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement. For average measurement: VBW = 10 Hz, when duty cycle is no less than 98 percent. VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
Test results:	PASS





6.6.2. Test Data(worst)

Please refer to following diagram for individual
The worst mode is MIMO802.11n(H20)
Below 1GHz

Horizontal:
80.0 dBuV/m



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	!	30.3173	36.34	-1.72	34.62	40.00	-5.38	QP
2	*	37.9450	36.83	-0.80	36.03	40.00	-3.97	QP
3	!	76.5121	39.23	-4.48	34.75	40.00	-5.25	QP
4		110.1816	38.88	-3.21	35.67	43.50	-7.83	QP
5	!	191.0738	40.05	-3.43	36.62	43.50	-6.88	QP
6		268.4853	38.57	-0.98	37.59	46.00	-8.41	QP



Vertical:



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	!	38.0783	35.32	-0.77	34.55	40.00	-5.45	QP
2	!	76.7808	40.02	-4.51	35.51	40.00	-4.49	QP
3	!	120.6991	41.79	-2.03	39.76	43.50	-3.74	QP
4	*	190.4050	43.83	-3.37	40.46	43.50	-3.04	QP
5	!	263.8190	41.57	-1.26	40.31	46.00	-5.69	QP
6		996.4996	26.56	14.44	41.00	54.00	-13.00	QP

Note1:

Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss - Amplifier factor.

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Measurement (dBuV) - Limits (dBuV)





Above 1GHz

802.11b

Freq. (MHz)	Low channel: 2412MHz						
	Ant.Pol	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
4824	V	59.11	41.84	74	54	-14.89	-12.16
7236	V	59.48	39.04	74	54	-14.52	-14.96
4824	H	59.76	40.81	74	54	-14.24	-13.19
7236	H	58.70	39.70	74	54	-15.30	-14.30
Freq. (MHz)	Middle channel: 2437MHz						
	Ant.Pol	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
4874	V	60.72	41.93	74	54	-13.28	-12.07
7311	V	59.42	40.14	74	54	-14.58	-13.86
4874	H	59.94	39.87	74	54	-14.06	-14.13
7311	H	59.49	40.49	74	54	-14.51	-13.51
Freq. (MHz)	High channel: 2462MHz						
	Ant.Pol	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
4924	V	59.03	40.34	74	54	-14.97	-13.66
7386	V	58.28	39.52	74	54	-15.72	-14.48
4924	H	59.91	40.24	74	54	-14.09	-13.76
7386	H	58.49	39.49	74	54	-15.51	-14.51

802.11g

Freq. (MHz)	Low channel: 2412MHz						
	Ant.Pol	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
4824	V	59.11	41.84	74	54	-14.89	-12.16
7236	V	59.48	39.04	74	54	-14.52	-14.96
4824	H	59.76	40.81	74	54	-14.24	-13.19
7236	H	58.70	39.70	74	54	-15.30	-14.30
Freq. (MHz)	Middle channel: 2437MHz						
	Ant.Pol	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
4874	V	60.72	41.93	74	54	-13.28	-12.07
7311	V	59.42	40.14	74	54	-14.58	-13.86
4874	H	59.94	39.87	74	54	-14.06	-14.13
7311	H	59.49	40.49	74	54	-14.51	-13.51
Freq. (MHz)	High channel: 2462MHz						
	Ant.Pol	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
4924	V	59.03	40.34	74	54	-14.97	-13.66
7386	V	58.28	39.52	74	54	-15.72	-14.48
4924	H	59.91	40.24	74	54	-14.09	-13.76
7386	H	58.49	39.49	74	54	-15.51	-14.51



20MHz(802.11n)

Freq. (MHz)	Low channel: 2412MHz						
	Ant.Pol	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
4824	V	59.82	40.98	74	54	-14.18	-13.02
7236	V	59.86	39.10	74	54	-14.14	-14.90
4824	H	59.84	40.00	74	54	-14.16	-14.00
7236	H	59.49	40.49	74	54	-14.51	-13.51
Freq. (MHz)	Middle channel: 2437MHz						
	Ant.Pol	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
4874	V	58.81	41.70	74	54	-15.19	-12.30
7311	V	58.68	40.25	74	54	-15.32	-13.75
4874	H	59.31	39.05	74	54	-14.69	-14.95
7311	H	58.99	39.99	74	54	-15.01	-14.01
Freq. (MHz)	High channel: 2462MHz						
	Ant.Pol	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
4924	V	58.11	40.51	74	54	-15.89	-13.49
7386	V	58.23	40.08	74	54	-15.77	-13.92
4924	H	58.42	40.01	74	54	-15.58	-13.99
7386	H	58.56	39.56	74	54	-15.44	-14.44



40MHz(802.11n)

Freq. (MHz)	Low channel: 2412MHz						
	Ant.Pol	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
4824	V	60.28	40.73	74	54	-13.72	-13.27
7236	V	58.91	39.87	74	54	-15.09	-14.13
4824	H	59.45	40.26	74	54	-14.55	-13.74
7236	H	58.59	39.59	74	54	-15.41	-14.41

Freq. (MHz)	Middle channel: 2437MHz						
	Ant.Pol	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
4874	V	58.43	40.90	74	54	-15.57	-13.10
7311	V	59.22	40.06	74	54	-14.78	-13.94
4874	H	58.88	39.09	74	54	-15.12	-14.91
7311	H	58.44	39.44	74	54	-15.56	-14.56

Freq. (MHz)	High channel: 2462MHz						
	Ant.Pol	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
4924	V	59.00	41.43	74	54	-15.00	-12.57
7386	V	59.00	40.08	74	54	-15.00	-13.92
4924	H	59.70	39.52	74	54	-14.30	-14.48
7386	H	58.94	39.94	74	54	-15.06	-14.06

Note:

1. All emissions not reported were more than 20dB below the specified limit or in the noise floor.
2. Emission Level= Reading Level+ Probe Factor +Cable Loss.
3. Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.



Restricted Bands Requirements

Test result for 802.11b Mode (the worst case)

Frequency	Reading	Correct Factor	Emission Level	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel							
2390	66.15	-8.73	57.42	74	-16.58	H	PK
2390	47.09	-8.73	38.36	54	-15.64	H	AV
2390	69.98	-8.73	61.25	74	-12.75	V	PK
2390	49.61	-8.73	40.88	54	-13.12	V	AV
High Channel							
2483.5	66.82	-8.17	58.65	74	-15.35	H	PK
2483.5	49.62	-8.17	41.45	54	-12.55	H	AV
2483.5	65.91	-8.17	57.74	74	-16.26	V	PK
2483.5	46.40	-8.17	38.23	54	-15.77	V	AV

*****END OF REPORT*****