# RF TEST REPORT



Report No.: 17070226-FCC-R4
Supersede Report No.: N/A

| Applicant              | TECNO MOBILE LIMITED                            |                             |     |  |
|------------------------|---|-----------------------------|-----|--|
| Product Name           | Mobile pho                                      | Mobile phone                |     |  |
| Model No.              | WX4 Pro   |                             |     |  |
| Serial No.             | N/A   |                             |     |  |
| Test Standard          | FCC Part 1                                      | 5.247: 2016, ANSI C63.10: 2 | 013 |  |
| Test Date              | March 28 to                                     | March 28 to April 17, 2017  |     |  |
| Issue Date             | April 17, 2017                                  |                             |     |  |
| Test Result            | Pass Fail                                       |                             |     |  |
| Equipment compl        | Equipment complied with the specification       |                             |     |  |
| Equipment did no       | Equipment did not comply with the specification |                             |     |  |
| Loven                  | Luo   | David Huang                 |     |  |
| Loren Lu<br>Test Engir |   | David Huang<br>Checked By   |     |  |

This test report may be reproduced in full only

Test result presented in this test report is applicable to the tested sample only

#### Issued by:

#### SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park
South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn



| Test Report No. | 17070226-FCC-R4 |
|-----------------|-----------------|
| Page            | 2 of 50         |

# **Laboratories Introduction**

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

## **Accreditations for Conformity Assessment**

| Country/Region | Scope                              |
|----------------|------------------------------------|
| USA            | EMC, RF/Wireless, SAR, Telecom     |
| Canada         | EMC, RF/Wireless, SAR, Telecom     |
| Taiwan         | EMC, RF, Telecom, SAR, Safety      |
| Hong Kong      | RF/Wireless, SAR, Telecom          |
| Australia      | EMC, RF, Telecom, SAR, Safety      |
| Korea          | EMI, EMS, RF, SAR, Telecom, Safety |
| Japan          | EMI, RF/Wireless, SAR, Telecom     |
| Singapore      | EMC, RF, SAR, Telecom              |
| Europe         | EMC, RF, SAR, Telecom, Safety      |



| Test Report No. | 17070226-FCC-R4 |
|-----------------|-----------------|
| Page            | 3 of 50         |

| This page has be | een left blank | intentionally. |
|------------------|----------------|----------------|
|------------------|----------------|----------------|



| Test Report No. | 17070226-FCC-R4 |
|-----------------|-----------------|
| Page            | 4 of 50         |

# **CONTENTS**

| 1.  | REPORT REVISION HISTORY  | 5  |
|-----|--|----|
| 2.  | CUSTOMER INFORMATION   | 5  |
| 3.  | TEST SITE INFORMATION  |    |
| 4.  |  |    |
| 5.  | TEST SUMMARY   |    |
| 6.  | MEASUREMENTS, EXAMINATION AND DERIVED RESULTS                  |    |
| 6.1 | ANTENNA REQUIREMENT  |    |
|     | DTS (6 DB) CHANNEL BANDWIDTH                                   |    |
| 6.3 | MAXIMUM OUTPUT POWER   | 13 |
| 6.4 | POWER SPECTRAL DENSITY   | 15 |
| 6.5 | BAND-EDGE & UNWANTED EMISSIONS INTO RESTRICTED FREQUENCY BANDS | 17 |
| 6.6 | AC POWER LINE CONDUCTED EMISSIONS                              | 20 |
| 6.7 | RADIATED EMISSIONS & RESTRICTED BAND                           | 26 |
| ANI | NEX A. TEST INSTRUMENT   | 32 |
| ANI | NEX B. EUT AND TEST SETUP PHOTOGRAPHS                          | 33 |
| ANI | NEX C. TEST SETUP AND SUPPORTING EQUIPMENT                     | 45 |
| ANI | NEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST     | 49 |
| ANI | NEX E. DECLARATION OF SIMILARITY                               | 50 |



| Test Report No. | 17070226-FCC-R4 |
|-----------------|-----------------|
| Page            | 5 of 50         |

# 1. Report Revision History

| Report No.      | Report Version | Description | Issue Date     |
|-----------------|----------------|-------------|----------------|
| 17070226-FCC-R4 | NONE           | Original    | April 17, 2017 |
|                 |                |             |                |
|                 |                |             |                |
|                 |                |             |                |
|                 |                |             |                |
|                 |                |             |                |

# 2. Customer information

| Applicant Name   | TECNO MOBILE LIMITED  |
|------------------|---|
| Applicant Add    | ROOMS 05-15, 13A/F., SOUTH TOWER, WORLD FINANCE CENTRE,                       |
|                  | HARBOUR CITY, 17 CANTON ROAD, TSIM SHA TSUI, KOWLOON, HONG                    |
|                  | KONG  |
| Manufacturer     | SHENZHEN TECNO TECHNOLOGY CO.,LTD.  |
| Manufacturer Add | 1-4th Floor,3rd Building,Pacific Industrial Park,No.2088,Shenyan Road,Yantian |
|                  | District,Shenzhen,Guangdong,China   |

# 3. Test site information

| Lab performing tests     | SIEMIC (Shenzhen-China) LABORATORIES                                    |  |
|--------------------------|---|--|
| Lab performing tests     |   |  |
|                          | Zone A, Floor 1, Building 2 Wan Ye Long Technology Park                 |  |
| Lab Address              | South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China |  |
|                          | 518108  |  |
| FCC Test Site No.        | 718246  |  |
| IC Test Site No.         | 4842E-1   |  |
| Test Software of Radiate | Dedicted Fusicaion Draggers To Chamber v2.0                             |  |
| d Emission               | Radiated Emission Program-To Shenzhen v2.0                              |  |
| Test Software of         | E7 EMO( 1 00A4)   |  |
| Conducted Emission       | EZ-EMC(ver.lcp-03A1)  |  |



| Test Report No. | 17070226-FCC-R4 |
|-----------------|-----------------|
| Page            | 6 of 50         |

# 4. Equipment under Test (EUT) Information

Description of EUT: Mobile phone

Main Model: WX4 Pro

Serial Model: N/A

Date EUT received: March 27, 2017

Test Date(s): March 28 to April 17, 2017

Equipment Category: DTS

GSM850: -0.2dBi PCS1900:1.7dBi

UMTS-FDD Band V: -0.2dBi UMTS-FDD Band II:1.7dBi

LTE Band II:1.7dBi
Antenna Gain:

LTE Band IV:1.7dBi

LTE Band VII:2.5dBi

WIFI:2.0dBi

Bluetooth/BLE:2.0dBi

GPS: 1.7dBi

Antenna Type: PIFA antenna

GSM / GPRS: GMSK EGPRS: GMSK,8PSK UMTS-FDD: QPSK

Type of Modulation:

802.11b/g/n: DSSS, OFDM

Bluetooth: GFSK, π /4DQPSK, 8DPSK

BLE: GFSK GPS:BPSK



| Test Report No. | 17070226-FCC-R4 |
|-----------------|-----------------|
| Page            | 7 of 50         |

GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz

PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz

UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz

UMTS-FDD Band II TX:1852.4  $\sim$  1907.6 MHz;

RX: 1932.4 ~ 1987.6 MHz

RF Operating Frequency (ies): LTE Band II TX: 1850.7~ 1909.3 MHz; RX : 1930.7 ~ 1989.3 MHz

LTE Band IV TX: 1710.7 ~ 1754.3 MHz; RX : 2110.7 ~ 2154.3 MHz

LTE Band VII TX: 2502.5 ~ 2567.5 MHz; RX : 2622.5 ~ 2687.5 MHz

WIFI: 802.11b/g/n(20M): 2412-2462 MHz

WIFI: 802.11n(40M): 2422-2452 MHz

Bluetooth& BLE: 2402-2480 MHz

GPS: 1575.42 MHz

Max. Output Power: 2.214dBm

GSM 850: 124CH

PCS1900: 299CH

UMTS-FDD Band V: 102CH

UMTS-FDD Band II: 277CH

Number of Channels: WIFI:802.11b/g/n(20M): 11CH

WIFI:802.11n(40M):7CH

Bluetooth: 79CH

BLE: 40CH

GPS:1CH

Port: USB Port, Earphone Port

Adapter:

Model:A8-501000

Input: AC100-240V~50/60Hz,200mA

Output: DC 5.0V,1.0A

Input Power:

Battery:

Model:BL-28BT

Spec:3.85V,10.78Wh,2800mAh Limited charge voltage:4.4V



| Test Report No. | 17070226-FCC-R4 |
|-----------------|-----------------|
| Page            | 8 of 50         |

Trade Name : TECNO

FCC ID: 2ADYY-WX4PRO

GPRS/EGPRS Multi-slot class 8/10/12



| Test Report No. | 17070226-FCC-R4 |
|-----------------|-----------------|
| Page            | 9 of 50         |

# 5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

| FCC Rules                       | Description of Test   | Result     |
|---------------------------------|---|------------|
| §15.203                         | Antenna Requirement   | Compliance |
| §15.247 (a)(2)                  | DTS (6 dB) CHANNEL BANDWIDTH  | Compliance |
| §15.247(b)(3)                   | Conducted Maximum Output Power  | Compliance |
| §15.247(e)                      | Power Spectral Density  | Compliance |
| §15.247(d)                      | Band-Edge & Unwanted Emissions into Restricted Frequency Bands          | Compliance |
| §15.207 (a),                    | AC Power Line Conducted Emissions Compl                                 |            |
| §15.205, §15.209,<br>§15.247(d) | Radiated Emissions & Unwanted Emissions into Restricted Frequency Bands | Compliance |

#### **Measurement Uncertainty**

| Emissions                 |  |               |  |
|---------------------------|--|---------------|--|
| Test Item                 | Description  | Uncertainty   |  |
| Band-Edge & Unwanted      |  |               |  |
| Emissions into Restricted |  |               |  |
| Frequency Bands and       | Confidence level of approximately 95% (in the case |               |  |
| Radiated Emissions &      | where distributions are normal), with a coverage   | +5.6dB/-4.5dB |  |
| Unwanted Emissions        | factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)        |               |  |
| into Restricted Frequency |  |               |  |
| Bands                     |  |               |  |
| -                         | -  | -             |  |



| Test Report No. | 17070226-FCC-R4 |
|-----------------|-----------------|
| Page            | 10 of 50        |

## 6. Measurements, Examination And Derived Results

#### 6.1 Antenna Requirement

#### **Applicable Standard**

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **Antenna Connector Construction**

The EUT has 3 antennas:

A permanently attached PIFA antenna for Bluetooth/BLE/WIFI/GPS, the gain is 2.0dBi for Bluetooth/BLE and WIFI, 1.7dBi for GPS.

A permanently attached PIFA antenna for GSM/PCS/UMTS, the gain is -0.2dBi for GSM850, 1.7dBi for PCS1900, -0.2dBi for UMTS-FDD Band V, 1.7dBi for UMTS-FDD Band II.

A permanently attached PIFA antenna for LTE Band II/IV/VII, the gain is 1.7dBi for LTE Band II, the gain is 1.7dBi for LTE Band IV, the gain is 2.5dBi for LTE Band VII.

The antenna meets up with the ANTENNA REQUIREMENT.

Result: Compliance.



| Test Report No. | 17070226-FCC-R4 |
|-----------------|-----------------|
| Page            | 11 of 50        |

# 6.2 DTS (6 dB) Channel Bandwidth

| Temperature          | 24oC           |
|----------------------|----------------|
| Relative Humidity    | 52%            |
| Atmospheric Pressure | 1007mbar       |
| Test date :          | April 10, 2017 |
| Tested By :          | Loren Luo      |

| Spec           | Item   | Applicable   |  |  |  |
|----------------|--|--|--|--|--|
| § 15.247(a)(2) | a)   | a) 6dB BW≥ 500kHz;                                 |  |  |  |
| RSS Gen(4.6.1) | b)   | b) 99% BW: For FCC reference only; required by IC. |  |  |  |
| Test Setup     | Spectrum Analyzer EUT  |  |  |  |  |
| Test Procedure | Spectrum Analyzer EUT  558074 D01 DTS MEAS Guidance v03r03, 8.1 DTS bandwidth 6dB Emission bandwidth measurement procedure  - Set RBW = 100 kHz.  - Set the video bandwidth (VBW) ≥ 3 RBW.  - Detector = Peak.  - Trace mode = max hold.  - Sweep = auto couple.  - Allow the trace to stabilize.  Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. |  |  |  |  |
| Remark         |  |  |  |  |  |
| Result         | Pas  | ss Fail  |  |  |  |

| Test Data | Yes             | □ <sub>N/A</sub> |
|-----------|-----------------|------------------|
| Test Plot | Yes (See below) | □ <sub>N/A</sub> |




| Test Report No. | 17070226-FCC-R4 |
|-----------------|-----------------|
| Page            | 12 of 50        |

#### 6dB Bandwidth measurement result

#### **Test Data**

| СН   | Frequency (MHz) | 6dB Bandwidth (kHz) | 99% Occupied Bandwidth (MHz) |
|------|-----------------|---------------------|------------------------------|
| Low  | 2402            | 729.114             | 1.0568                       |
| Mid  | 2440            | 717.366             | 1.0591                       |
| High | 2480            | 716.267             | 1.0541                       |

#### **Test Plots**

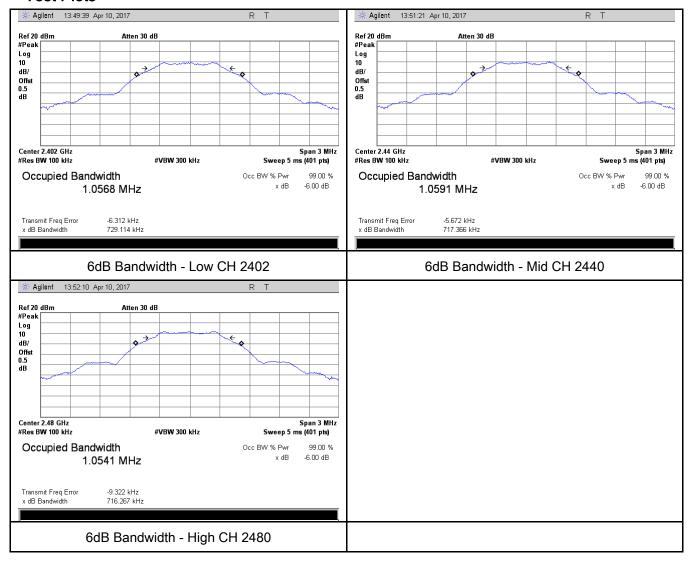



| Test Report No. | 17070226-FCC-R4 |
|-----------------|-----------------|
| Page            | 13 of 50        |

# 6.3 Maximum Output Power

| Temperature          | 24oC           |
|----------------------|----------------|
| Relative Humidity    | 52%            |
| Atmospheric Pressure | 1007mbar       |
| Test date :          | April 10, 2017 |
| Tested By :          | Loren Luo      |

## Requirement(s):

| Spec       | Item                               | Requirement  | Applicable |  |  |  |  |  |
|------------|------------------------------------|--|------------|--|--|--|--|--|
|            | a)                                 | FHSS in 2400-2483.5MHz with ≥ 75 channels: ≤ 1 Watt            |            |  |  |  |  |  |
|            | b)                                 | b) FHSS in 5725-5850MHz: ≤ 1 Watt                              |            |  |  |  |  |  |
| §15.247(b) | c)                                 | For all other FHSS in the 2400-2483.5MHz band: ≤ 0.125         |            |  |  |  |  |  |
| (3),RSS210 | Watt.                              |  |            |  |  |  |  |  |
| (A8.4)     | d)                                 | FHSS in 902-928MHz with ≥ 50 channels: ≤ 1 Watt                |            |  |  |  |  |  |
| (* 131 1)  | e)                                 | FHSS in 902-928MHz with ≥ 25 & <50 channels: ≤ 0.25            |            |  |  |  |  |  |
|            |                                    | Watt   |            |  |  |  |  |  |
|            | f)                                 | DTS in 902-928MHz, 2400-2483.5MHz: ≤ 1 Watt                    | >          |  |  |  |  |  |
| Test Setup |                                    | Spectrum Analyzer EUT  |            |  |  |  |  |  |
|            | 558074                             | D01 DTS MEAS Guidance v03r03, 9.1.2 Integrated band power meth | od         |  |  |  |  |  |
|            | Maximu                             | m output power measurement procedure                           |            |  |  |  |  |  |
|            | a) Set th                          | ne RBW ≥ DTS bandwidth.  |            |  |  |  |  |  |
|            | b) Set V                           | BW≥ 3×RBW.   |            |  |  |  |  |  |
| Test       | c) Set sp                          | oan ≥ 3 x RBW  |            |  |  |  |  |  |
| Procedure  | d) Swee                            | p time = auto couple.  |            |  |  |  |  |  |
|            | e) Detec                           | otor = peak.   |            |  |  |  |  |  |
|            | f) Trace                           | mode = max hold.   |            |  |  |  |  |  |
|            | g) Allow trace to fully stabilize. |  |            |  |  |  |  |  |
|            | h) Use p                           | peak marker function to determine the peak amplitude level.    |            |  |  |  |  |  |
| Remark     |                                    |  |            |  |  |  |  |  |
| Result     | Pas                                | s Fail   |            |  |  |  |  |  |



| Test Report No. | 17070226-FCC-R4 |
|-----------------|-----------------|
| Page            | 14 of 50        |


| Test Data | Yes             | □ <sub>N/A</sub> |
|-----------|-----------------|------------------|
| Test Plot | Yes (See below) | □ <sub>N/A</sub> |

#### Output Power measurement result

#### **Test Data**

| Туре   | СН   | Frequency<br>(MHz) | Conducted Power (dBm) | Limit<br>(dBm) | Result |
|--------|------|--------------------|-----------------------|----------------|--------|
| Output | Low  | 2402               | -0.540                | 30             | Pass   |
| Output | Mid  | 2440               | -0.153                | 30             | Pass   |
| power  | High | 2480               | 2.214                 | 30             | Pass   |

#### **Test Plots**

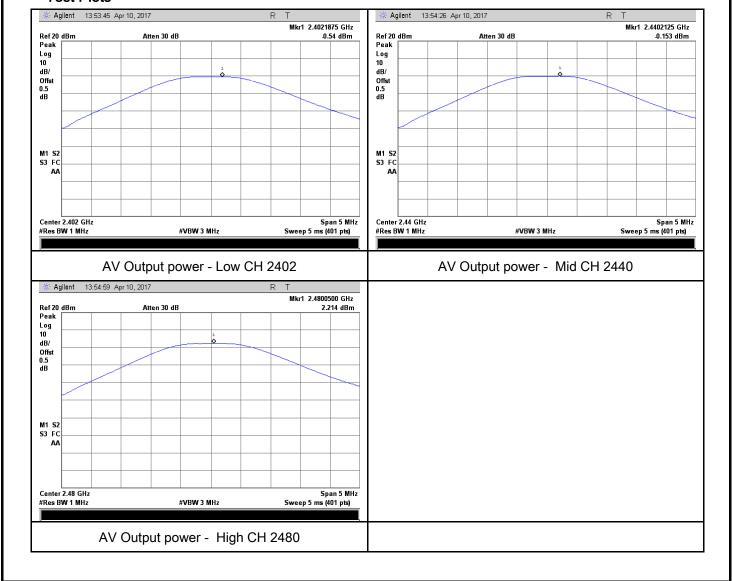



| Test Report No. | 17070226-FCC-R4 |
|-----------------|-----------------|
| Page            | 15 of 50        |

# 6.4 Power Spectral Density

| Temperature          | 24oC           |
|----------------------|----------------|
| Relative Humidity    | 52%            |
| Atmospheric Pressure | 1007mbar       |
| Test date :          | April 10, 2017 |
| Tested By :          | Loren Luo      |

| Spec              | Item   | Requirement   | Applicable |  |  |  |
|-------------------|--|---|------------|--|--|--|
| §15.247(e)        | a)   | a) The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. |            |  |  |  |
| Test Setup        |  | Spectrum Analyzer EUT   |            |  |  |  |
| Test<br>Procedure | Spectrum Analyzer EUT  558074 D01 DTS MEAS Guidance v03r03, 10.2 power spectral density method power spectral density measurement procedure  - a) Set analyzer center frequency to DTS channel center frequency.  - b) Set the span to 1.5 times the DTS bandwidth.  - c) Set the RBW to: 3 kHz ≤ RBW ≤ 100 kHz.  - d) Set the VBW ≥ 3 × RBW.  - e) Detector = peak.  - f) Sweep time = auto couple.  - g) Trace mode = max hold.  - h) Allow trace to fully stabilize.  - i) Use the peak marker function to determine the maximum amplitude level within the RBW.  - j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat. |   |            |  |  |  |
| Remark            |  |   |            |  |  |  |
| Result            | Pas  | ss Fail   |            |  |  |  |

| Test Data | Yes             | □ <sub>N/A</sub> |
|-----------|-----------------|------------------|
| Test Plot | Yes (See below) | □ <sub>N/A</sub> |



| Test Report No. | 17070226-FCC-R4 |
|-----------------|-----------------|
| Page            | 16 of 50        |


## Power Spectral Density measurement result

#### **Test Data**

| Туре | СН   | Freq<br>(MHz) | Reading (dBm) | Factor<br>(dB) | Result<br>(dBm) | Limit<br>(dBm) | Result |
|------|------|---------------|---------------|----------------|-----------------|----------------|--------|
| PSD  | Low  | 2402          | -9.819        | -5.23          | -15.049         | 8              | Pass   |
|      | Mid  | 2440          | -9.484        | -5.23          | -14.714         | 8              | Pass   |
|      | High | 2480          | -7.136        | -5.23          | -12.366         | 8              | Pass   |

Note: factor=10log(3/10)=-5.23

#### **Test Plots**

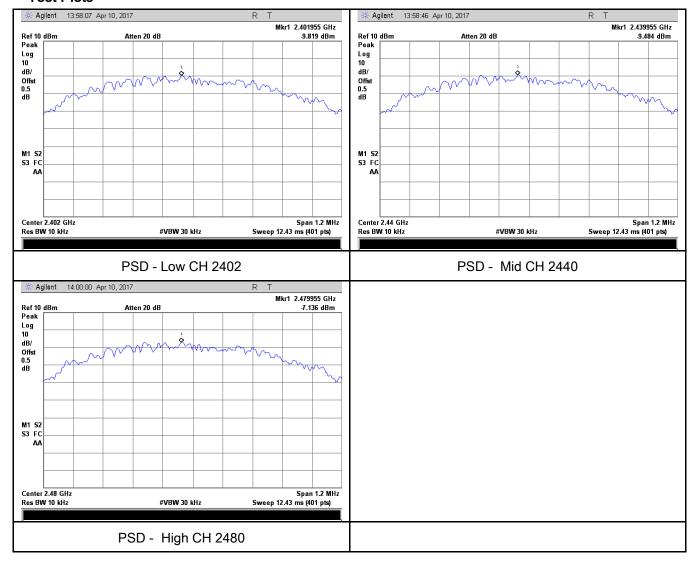



| Test Report No. | 17070226-FCC-R4 |
|-----------------|-----------------|
| Page            | 17 of 50        |

# 6.5 Band-Edge & Unwanted Emissions into Restricted Frequency Bands

| Temperature          | 25°C           |
|----------------------|----------------|
| Relative Humidity    | 55%            |
| Atmospheric Pressure | 1023mbar       |
| Test date :          | March 29, 2017 |
| Tested By:           | Loren Luo      |

## Requirement(s):

| Spec              | Item  | Requirement Applicable  |  |  |
|-------------------|---|---|--|--|
| §15.247(d)        | a)  | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. |  |  |
| Test Setup        | Ant. Tower  Support Units  Ground Plane  Test Receiver  |   |  |  |
| Test<br>Procedure | Radiated Method Only     1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.     2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range. |   |  |  |




| Test Report No. | 17070226-FCC-R4 |
|-----------------|-----------------|
| Page            | 18 of 50        |

|           |   | - 3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a            |  |  |
|-----------|---|--|--|--|
|           |   | convenient frequency span including 100kHz bandwidth from band edge, check         |  |  |
|           |   | the emission of EUT, if pass then set Spectrum Analyzer as below:                  |  |  |
|           |   | a. The resolution bandwidth and video bandwidth of test receiver/spectrum          |  |  |
|           |   | analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz.             |  |  |
|           |   | b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video   |  |  |
|           |   | bandwidth is 3MHz with Peak detection for Peak measurement at frequency above      |  |  |
|           |   | 1GHz.  |  |  |
|           |   | c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the     |  |  |
|           |   | video bandwidth is 10Hz with Peak detection for Average Measurement as below       |  |  |
|           |   | at frequency above 1GHz.   |  |  |
|           |   | - 4. Measure the highest amplitude appearing on spectral display and set it as a   |  |  |
|           |   | reference level. Plot the graph with marking the highest point and edge frequency. |  |  |
|           |   | - 5. Repeat above procedures until all measured frequencies were complete.         |  |  |
| Remark    |   |  |  |  |
| Result    |   | Pass Fail  |  |  |
|           |   |  |  |  |
|           |   |  |  |  |
| Test Data | Y | es N/A   |  |  |
| Test Plot | Y | es (See below)   |  |  |



| Test Report No. | 17070226-FCC-R4 |
|-----------------|-----------------|
| Page            | 19 of 50        |

# Test Plots Band Edge measurement result

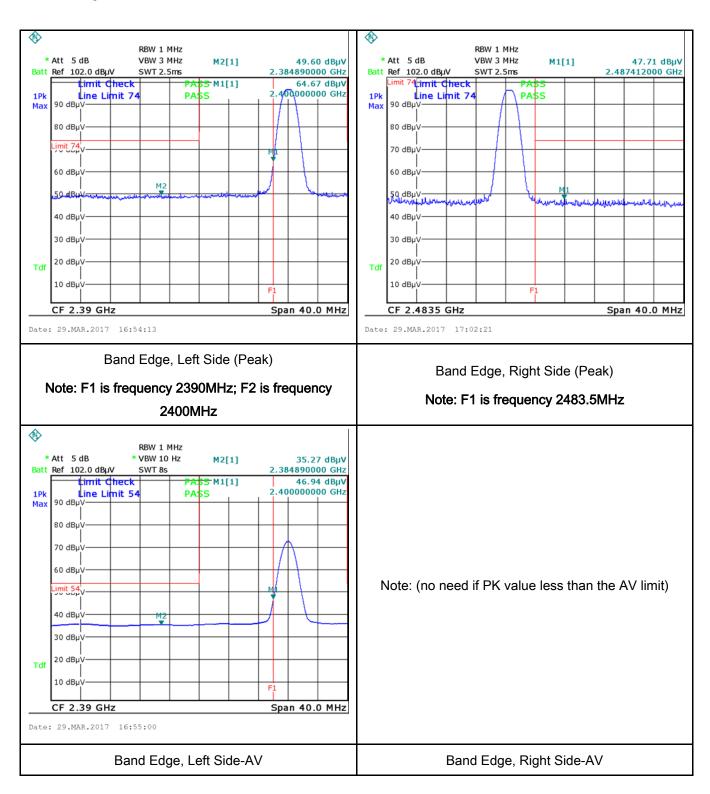



| Test Report No. | 17070226-FCC-R4 |
|-----------------|-----------------|
| Page            | 20 of 50        |

# 6.6 AC Power Line Conducted Emissions

| Temperature          | 25°C           |
|----------------------|----------------|
| Relative Humidity    | 55%            |
| Atmospheric Pressure | 1023mbar       |
| Test date :          | March 29, 2017 |
| Tested By :          | Loren Luo      |

## Requirement(s):

| Spec                                  | Item  | Requirement  |         | Applicable |              |
|---------------------------------------|---|--|---------|------------|--------------|
| 47CFR§15.<br>207,<br>RSS210<br>(A8.1) | a)  | For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu] H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.  Frequency ranges  Limit (dBµV) |         |            | 7 (ppilodbie |
| (710.1)                               |   | (MHz)  | QP      | Average    |              |
|                                       |   | 0.15 ~ 0.5   | 66 – 56 | 56 – 46    |              |
|                                       |   | 0.5 ~ 5  | 56      | 46         |              |
|                                       |   | 5 ~ 30   | 60      | 50         |              |
| Test Setup                            | Vertical Ground Reference Plane  But  Horizontal Ground Reference Plane  Note: 1. Support units were connected to second LISN.  |  |         |            |              |
|                                       | 2.Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.  |  |         |            |              |
| Procedure                             | <ol> <li>The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table.</li> <li>The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains.</li> <li>The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss</li> </ol> |  |         |            |              |



| Test Report No. | 17070226-FCC-R4 |
|-----------------|-----------------|
| Page            | 21 of 50        |


|        | coaxial cable.  |  |  |
|--------|---|--|--|
|        | 4. All other supporting equipment were powered separately from another main supply.     |  |  |
|        | 5. The EUT was switched on and allowed to warm up to its normal operating condition.    |  |  |
|        | 6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power)      |  |  |
|        | over the required frequency range using an EMI test receiver.                           |  |  |
|        | 7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the  |  |  |
|        | selected frequencies and the necessary measurements made with a receiver bandwidth      |  |  |
|        | setting of 10 kHz.  |  |  |
|        | 8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power). |  |  |
| Remark |   |  |  |
| Result | Pass Fail   |  |  |
|        |   |  |  |
|        |   |  |  |

| Test Data | Yes             | □ <sub>N/A</sub> |
|-----------|-----------------|------------------|
| Test Plot | Yes (See below) | □ <sub>N/A</sub> |



| Test Report No. | 17070226-FCC-R4 |
|-----------------|-----------------|
| Page            | 22 of 50        |

Test Mode: Transmitting Mode

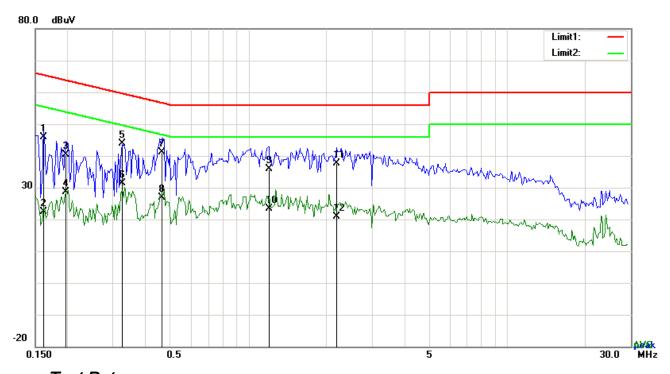

## Test Data


# Phase Line Plot at 120Vac, 60Hz

| No. | P/L | Frequency<br>(MHz) | Reading<br>(dBµV) | Detector | Corrected (dB) | Result<br>(dBµV) | Limit<br>(dBµV) | Margin<br>(dB) |
|-----|-----|--------------------|-------------------|----------|----------------|------------------|-----------------|----------------|
| 1   | L1  | 0.1617             | 35.80             | QP       | 10.03          | 45.83            | 65.38           | -19.55         |
| 2   | L1  | 0.1617             | 12.44             | AVG      | 10.03          | 22.47            | 55.38           | -32.91         |
| 3   | L1  | 0.1968             | 30.44             | QP       | 10.03          | 40.47            | 63.74           | -23.27         |
| 4   | L1  | 0.1968             | 18.55             | AVG      | 10.03          | 28.58            | 53.74           | -25.16         |
| 5   | L1  | 0.3255             | 33.74             | QP       | 10.03          | 43.77            | 59.57           | -15.80         |
| 6   | L1  | 0.3255             | 21.45             | AVG      | 10.03          | 31.48            | 49.57           | -18.09         |
| 7   | L1  | 0.4659             | 31.18             | QP       | 10.03          | 41.21            | 56.59           | -15.38         |
| 8   | L1  | 0.4659             | 16.76             | AVG      | 10.03          | 26.79            | 46.59           | -19.80         |
| 9   | L1  | 1.1991             | 25.82             | QP       | 10.03          | 35.85            | 56.00           | -20.15         |
| 10  | L1  | 1.1991             | 13.34             | AVG      | 10.03          | 23.37            | 46.00           | -22.63         |
| 11  | L1  | 2.2014             | 27.58             | QP       | 10.05          | 37.63            | 56.00           | -18.37         |
| 12  | L1  | 2.2014             | 10.94             | AVG      | 10.05          | 20.99            | 46.00           | -25.01         |



| Test Report No. | 17070226-FCC-R4 |
|-----------------|-----------------|
| Page            | 23 of 50        |

Test Mode: Transmitting Mode

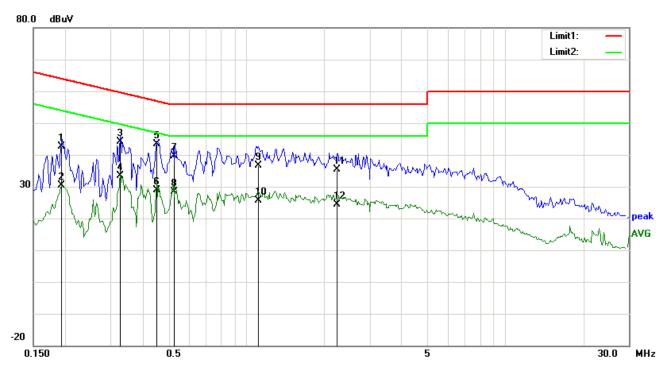

## Test Data


# Phase Neutral Plot at 120Vac, 60Hz

| No. | P/L | Frequency<br>(MHz) | Reading<br>(dBµV) | Detector | Corrected (dB) | Result<br>(dBµV) | Limit<br>(dBµV) | Margin<br>(dB) |
|-----|-----|--------------------|-------------------|----------|----------------|------------------|-----------------|----------------|
| 1   | N   | 0.1929             | 32.49             | QP       | 10.02          | 42.51            | 63.91           | -21.40         |
| 2   | Ν   | 0.1929             | 20.43             | AVG      | 10.02          | 30.45            | 53.91           | -23.46         |
| 3   | Ν   | 0.3255             | 34.05             | QP       | 10.02          | 44.07            | 59.57           | -15.50         |
| 4   | Ν   | 0.3255             | 23.29             | AVG      | 10.02          | 33.31            | 49.57           | -16.26         |
| 5   | Ν   | 0.4503             | 33.45             | QP       | 10.02          | 43.47            | 56.87           | -13.40         |
| 6   | Ν   | 0.4503             | 18.84             | AVG      | 10.02          | 28.86            | 46.87           | -18.01         |
| 7   | N   | 0.5283             | 29.61             | QP       | 10.02          | 39.63            | 56.00           | -16.37         |
| 8   | Ν   | 0.5283             | 18.39             | AVG      | 10.02          | 28.41            | 46.00           | -17.59         |
| 9   | Ν   | 1.1133             | 26.57             | QP       | 10.03          | 36.60            | 56.00           | -19.40         |
| 10  | Ν   | 1.1133             | 15.65             | AVG      | 10.03          | 25.68            | 46.00           | -20.32         |
| 11  | N   | 2.2482             | 25.31             | QP       | 10.04          | 35.35            | 56.00           | -20.65         |
| 12  | N   | 2.2482             | 14.26             | AVG      | 10.04          | 24.30            | 46.00           | -21.70         |



| Test Report No. | 17070226-FCC-R4 |
|-----------------|-----------------|
| Page            | 24 of 50        |

| Test Mode: | Transmitting Mode |
|------------|-------------------|
|            |                   |

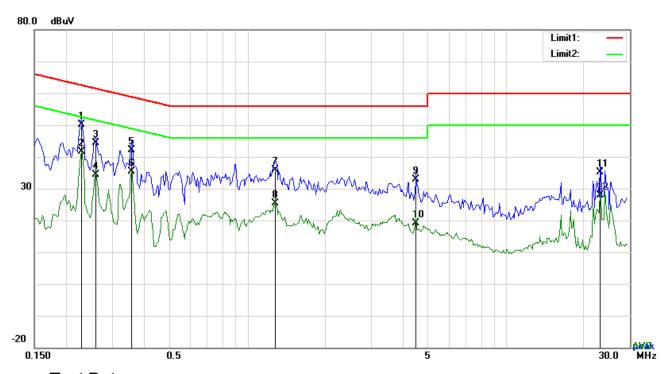

Test Data


# Phase Line Plot at 240Vac, 60Hz

| No. | P/L | Frequency<br>(MHz) | Reading<br>(dBµV) | Detector | Corrected (dB) | Result<br>(dBµV) | Limit<br>(dBµV) | Margin<br>(dB) |
|-----|-----|--------------------|-------------------|----------|----------------|------------------|-----------------|----------------|
| 1   | L1  | 0.2280             | 40.18             | QP       | 10.03          | 50.21            | 62.52           | -12.31         |
| 2   | L1  | 0.2280             | 31.67             | AVG      | 10.03          | 41.70            | 52.52           | -10.82         |
| 3   | L1  | 0.2592             | 34.24             | QP       | 10.03          | 44.27            | 61.46           | -17.19         |
| 4   | L1  | 0.2592             | 24.24             | AVG      | 10.03          | 34.27            | 51.46           | -17.19         |
| 5   | L1  | 0.3567             | 32.21             | QP       | 10.03          | 42.24            | 58.80           | -16.56         |
| 6   | L1  | 0.3567             | 25.24             | AVG      | 10.03          | 35.27            | 48.80           | -13.53         |
| 7   | L1  | 1.2810             | 25.97             | QP       | 10.03          | 36.00            | 56.00           | -20.00         |
| 8   | L1  | 1.2810             | 15.24             | AVG      | 10.03          | 25.27            | 46.00           | -20.73         |
| 9   | L1  | 4.4859             | 22.71             | QP       | 10.07          | 32.78            | 56.00           | -23.22         |
| 10  | L1  | 4.4859             | 9.12              | AVG      | 10.07          | 19.19            | 46.00           | -26.81         |
| 11  | L1  | 23.1318            | 24.79             | QP       | 10.36          | 35.15            | 60.00           | -24.85         |
| 12  | L1  | 23.1318            | 17.58             | AVG      | 10.36          | 27.94            | 50.00           | -22.06         |



| Test Report No. | 17070226-FCC-R4 |
|-----------------|-----------------|
| Page            | 25 of 50        |

Test Mode: Transmitting Mode

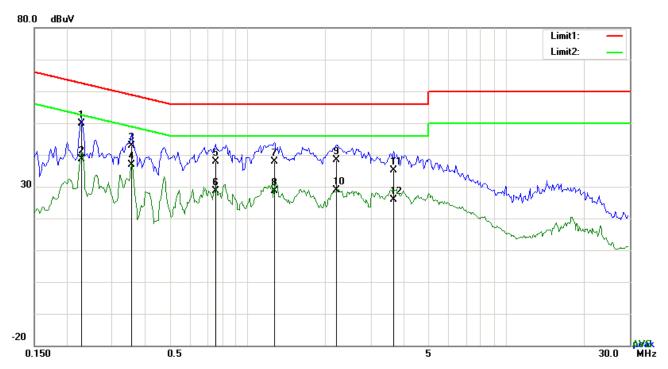

## Test Data

# Phase Neutral Plot at 240Vac, 60Hz

| No. | P/L | Frequency<br>(MHz) | Reading<br>(dBµV) | Detector | Corrected (dB) | Result<br>(dBµV) | Limit<br>(dBµV) | Margin<br>(dB) |
|-----|-----|--------------------|-------------------|----------|----------------|------------------|-----------------|----------------|
| 1   | N   | 0.2280             | 39.85             | QP       | 10.02          | 49.87            | 62.52           | -12.65         |
| 2   | N   | 0.2280             | 28.50             | AVG      | 10.02          | 38.52            | 52.52           | -14.00         |
| 3   | N   | 0.3567             | 32.83             | QP       | 10.02          | 42.85            | 58.80           | -15.95         |
| 4   | N   | 0.3567             | 26.93             | AVG      | 10.02          | 36.95            | 48.80           | -11.85         |
| 5   | N   | 0.7545             | 27.85             | QP       | 10.03          | 37.88            | 56.00           | -18.12         |
| 6   | N   | 0.7545             | 18.51             | AVG      | 10.03          | 28.54            | 46.00           | -17.46         |
| 7   | N   | 1.2732             | 27.86             | QP       | 10.03          | 37.89            | 56.00           | -18.11         |
| 8   | N   | 1.2732             | 18.49             | AVG      | 10.03          | 28.52            | 46.00           | -17.48         |
| 9   | N   | 2.2131             | 28.41             | QP       | 10.04          | 38.45            | 56.00           | -17.55         |
| 10  | N   | 2.2131             | 18.75             | AVG      | 10.04          | 28.79            | 46.00           | -17.21         |
| 11  | N   | 3.6708             | 24.96             | QP       | 10.06          | 35.02            | 56.00           | -20.98         |
| 12  | N   | 3.6708             | 15.80             | AVG      | 10.06          | 25.86            | 46.00           | -20.14         |



| Test Report No. | 17070226-FCC-R4 |
|-----------------|-----------------|
| Page            | 26 of 50        |

# 6.7 Radiated Emissions & Restricted Band


| Temperature          | 25°C           |
|----------------------|----------------|
| Relative Humidity    | 55%            |
| Atmospheric Pressure | 1023mbar       |
| Test date :          | March 29, 2017 |
| Tested By :          | Loren Luo      |

#### Requirement(s):

| Spec                        | Item | Requirement  |  | Applicable |
|-----------------------------|------|--|--|------------|
|                             | a)   | Except higher limit as specified else emissions from the low-power radio exceed the field strength levels spet the level of any unwanted emission the fundamental emission. The tight edges  | o-frequency devices shall not ecified in the following table and as shall not exceed the level of  | <b>\</b>   |
|                             |      | Frequency range (MHz)  | Field Strength (μV/m)  |            |
|                             |      | 30 – 88  | 100  |            |
|                             |      | 88 – 216   | 150  |            |
| 47CFR§15.                   |      | 216 - 960  | 200  |            |
| •                           |      | Above 960  | 500  |            |
| 247(d),<br>RSS210<br>(A8.5) | b)   | For non-restricted band, In any 100 frequency band in which the spread modulated intentional radiator is oppower that is produced by the intentional solution of 20 dB or 30dB below that in the 100 band that contains the highest lever determined by the measurement mused. Attenuation below the general is not required  20 dB down  30 | d spectrum or digitally perating, the radio frequency ational radiator shall be at least 0 kHz bandwidth within the l of the desired power, sethod on output power to be | <b>\\</b>  |
|                             | c)   | or restricted band, emission must a emission limits specified in 15.209  | also comply with the radiated  | ~          |



| Test Report No. | 17070226-FCC-R4 |
|-----------------|-----------------|
| Page            | 27 of 50        |

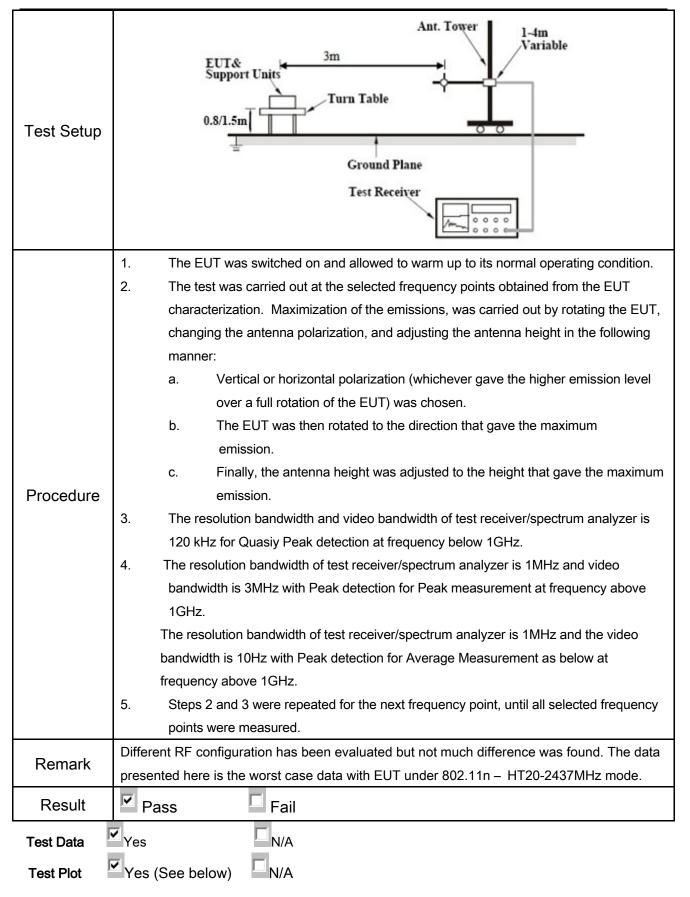




| Test Report No. | 17070226-FCC-R4 |
|-----------------|-----------------|
| Page            | 28 of 50        |

Test Mode: Transmitting Mode

#### Below 1GHz

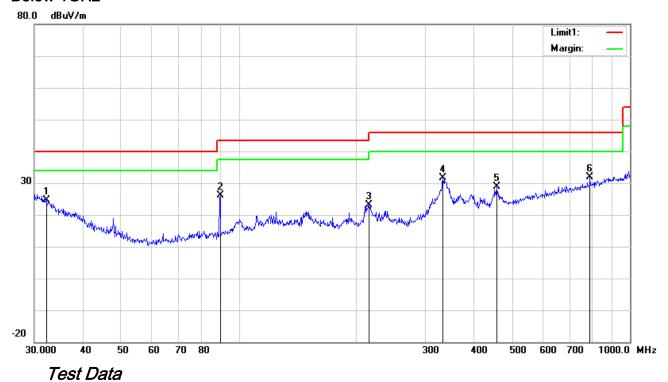


# Horizontal Polarity Plot @3m

| No. | P/L | Frequency | Reading  | Detect | Ant_F  | PA_G  | Cab_L | Result   | Limit    | Margin | Height | Degr |
|-----|-----|-----------|----------|--------|--------|-------|-------|----------|----------|--------|--------|------|
|     |     | (MHz)     | (dBuV/m) | or     | (dB/m) | (dB)  | (dB)  | (dBuV/m) | (dBuV/m) | (dB)   | (cm)   | (°)  |
| 1   | Н   | 32.1795   | 26.38    | peak   | 19.72  | 22.27 | 0.68  | 24.51    | 40.00    | -15.49 | 100    | 331  |
| 2   | Н   | 89.5900   | 39.42    | peak   | 7.98   | 22.32 | 0.96  | 26.04    | 43.50    | -17.46 | 100    | 326  |
| 3   | Н   | 215.2678  | 32.06    | peak   | 11.89  | 22.35 | 1.59  | 23.19    | 43.50    | -20.31 | 100    | 73   |
| 4   | Н   | 332.5187  | 37.59    | peak   | 14.28  | 22.20 | 1.95  | 31.62    | 46.00    | -14.38 | 100    | 100  |
| 5   | Н   | 455.9058  | 31.73    | peak   | 16.82  | 21.90 | 2.16  | 28.81    | 46.00    | -17.19 | 100    | 64   |
| 6   | Н   | 790.6188  | 28.84    | peak   | 21.29  | 21.17 | 2.94  | 31.90    | 46.00    | -14.10 | 100    | 143  |



| Test Report No. | 17070226-FCC-R4 |
|-----------------|-----------------|
| Page            | 29 of 50        |

## Below 1GHz

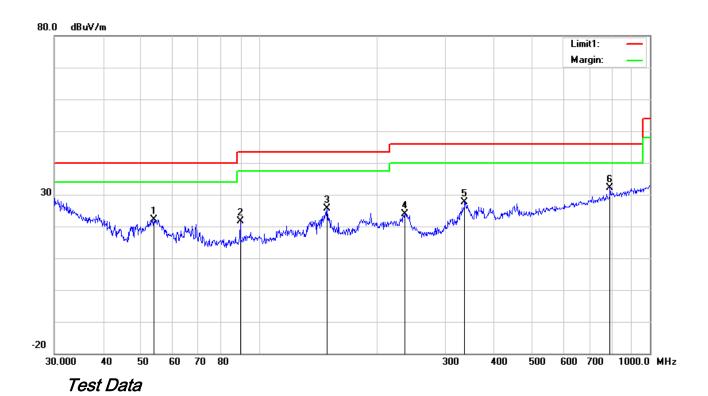

# Vertical Polarity Plot @3m

| No. | P/L | Frequency | Reading  | Detect | Ant_F  | PA_G  | Cab_L | Result   | Limit    | Margin | Height | Degr |
|-----|-----|-----------|----------|--------|--------|-------|-------|----------|----------|--------|--------|------|
|     |     | (MHz)     | (dBuV/m) | or     | (dB/m) | (dB)  | (dB)  | (dBuV/m) | (dBuV/m) | (dB)   | (cm)   | (°)  |
| 1   | V   | 53.8818   | 35.85    | peak   | 7.97   | 22.39 | 0.78  | 22.21    | 40.00    | -17.79 | 100    | 28   |
| 2   | V   | 89.5900   | 34.96    | peak   | 7.98   | 22.32 | 0.96  | 21.58    | 43.50    | -21.92 | 100    | 153  |
| 3   | V   | 149.4857  | 33.98    | peak   | 12.60  | 22.34 | 1.34  | 25.58    | 43.50    | -17.92 | 100    | 312  |
| 4   | ٧   | 235.8164  | 32.96    | peak   | 11.60  | 22.32 | 1.65  | 23.89    | 46.00    | -22.11 | 100    | 261  |
| 5   | V   | 336.0352  | 33.47    | peak   | 14.36  | 22.19 | 1.97  | 27.61    | 46.00    | -18.39 | 100    | 261  |
| 6   | V   | 790.6188  | 29.14    | peak   | 21.29  | 21.17 | 2.94  | 32.20    | 46.00    | -13.80 | 100    | 330  |



| Test Report No. | 17070226-FCC-R4 |
|-----------------|-----------------|
| Page            | 30 of 50        |

## Above 1GHz

| Test Mode: | Transmitting Mode |
|------------|-------------------|
|------------|-------------------|

## Low Channel (2402 MHz)

| Frequency<br>(MHz) | S.A.<br>Reading<br>(dBµV) | Detector<br>(PK/AV) | Polarity<br>(H/V) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Pre-<br>Amp.<br>Gain<br>(dB) | Cord.<br>Amp.<br>(dBµV/m) | Limit<br>(dBµV/m) | Margin<br>(dB) |
|--------------------|---------------------------|---------------------|-------------------|--------------------------|-----------------------|------------------------------|---------------------------|-------------------|----------------|
| 4804               | 38.37                     | AV                  | V                 | 33.83                    | 6.86                  | 31.72                        | 47.34                     | 54                | -6.66          |
| 4804               | 38.27                     | AV                  | Н                 | 33.83                    | 6.86                  | 31.72                        | 47.24                     | 54                | -6.76          |
| 4804               | 48.84                     | PK                  | V                 | 33.83                    | 6.86                  | 31.72                        | 57.81                     | 74                | -16.19         |
| 4804               | 47.7                      | PK                  | Н                 | 33.83                    | 6.86                  | 31.72                        | 56.67                     | 74                | -17.33         |
| 17792              | 23.85                     | AV                  | V                 | 45.03                    | 11.21                 | 32.38                        | 47.71                     | 54                | -6.29          |
| 17792              | 24.61                     | AV                  | Н                 | 45.03                    | 11.21                 | 32.38                        | 48.47                     | 54                | -5.53          |
| 17792              | 40.98                     | PK                  | V                 | 45.03                    | 11.21                 | 32.38                        | 64.84                     | 74                | -9.16          |
| 17792              | 40.43                     | PK                  | Н                 | 45.03                    | 11.21                 | 32.38                        | 64.29                     | 74                | -9.71          |

## Middle Channel (2440 MHz)

| Frequency<br>(MHz) | S.A.<br>Reading<br>(dBµV) | Detector<br>(PK/AV) | Polarity<br>(H/V) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Pre-<br>Amp.<br>Gain<br>(dB) | Cord.<br>Amp.<br>(dBµV/m) | Limit<br>(dBµV/m) | Margin<br>(dB) |
|--------------------|---------------------------|---------------------|-------------------|--------------------------|-----------------------|------------------------------|---------------------------|-------------------|----------------|
| 4880               | 38.26                     | AV                  | V                 | 33.86                    | 6.82                  | 31.82                        | 47.12                     | 54                | -6.88          |
| 4880               | 37.86                     | AV                  | Н                 | 33.86                    | 6.82                  | 31.82                        | 46.72                     | 54                | -7.28          |
| 4880               | 47.8                      | PK                  | V                 | 33.86                    | 6.82                  | 31.82                        | 56.66                     | 74                | -17.34         |
| 4880               | 47.95                     | PK                  | Н                 | 33.86                    | 6.82                  | 31.82                        | 56.81                     | 74                | -17.19         |
| 17809              | 24.16                     | AV                  | V                 | 45.15                    | 11.18                 | 32.41                        | 48.08                     | 54                | -5.92          |
| 17809              | 24.25                     | AV                  | Н                 | 45.15                    | 11.18                 | 32.41                        | 48.17                     | 54                | -5.83          |
| 17809              | 41.91                     | PK                  | V                 | 45.15                    | 11.18                 | 32.41                        | 65.83                     | 74                | -8.17          |
| 17809              | 40.26                     | PK                  | Н                 | 45.15                    | 11.18                 | 32.41                        | 64.18                     | 74                | -9.82          |



| Test Report No. | 17070226-FCC-R4 |
|-----------------|-----------------|
| Page            | 31 of 50        |

#### High Channel (2480 MHz)

| Frequency<br>(MHz) | S.A.<br>Reading<br>(dBµV) | Detector<br>(PK/AV) | Polarity<br>(H/V) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Pre-<br>Amp.<br>Gain<br>(dB) | Cord.<br>Amp.<br>(dBµV/m) | Limit<br>(dBµV/m) | Margin<br>(dB) |
|--------------------|---------------------------|---------------------|-------------------|--------------------------|-----------------------|------------------------------|---------------------------|-------------------|----------------|
| 4960               | 38.93                     | AV                  | V                 | 33.9                     | 6.76                  | 31.92                        | 47.67                     | 54                | -6.33          |
| 4960               | 38.23                     | AV                  | Η                 | 33.9                     | 6.76                  | 31.92                        | 46.97                     | 54                | -7.03          |
| 4960               | 48.4                      | PK                  | V                 | 33.9                     | 6.76                  | 31.92                        | 57.14                     | 74                | -16.86         |
| 4960               | 47.32                     | PK                  | Ι                 | 33.9                     | 6.76                  | 31.92                        | 56.06                     | 74                | -17.94         |
| 17797              | 25.05                     | AV                  | ٧                 | 45.22                    | 11.35                 | 32.38                        | 49.24                     | 54                | -4.76          |
| 17797              | 24.64                     | AV                  | Η                 | 45.22                    | 11.35                 | 32.38                        | 48.83                     | 54                | -5.17          |
| 17797              | 41.63                     | PK                  | V                 | 45.22                    | 11.35                 | 32.38                        | 65.82                     | 74                | -8.18          |
| 17797              | 40.64                     | PK                  | Н                 | 45.22                    | 11.35                 | 32.38                        | 64.83                     | 74                | -9.17          |

#### Note:

- 1, The testing has been conformed to 10\*2480MHz=24,800MHz 2, All other emissions more than 30 dB below the limit
- 3, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.



| Test Report No. | 17070226-FCC-R4 |
|-----------------|-----------------|
| Page            | 32 of 50        |

# Annex A. TEST INSTRUMENT

| Instrument                              | Model    | Serial #    | Cal Date   | Cal Due    | In use      |
|---|----------|-------------|------------|------------|-------------|
| AC Line Conducted                       |          |             |            |            |             |
| EMI test receiver                       | ESCS30   | 8471241027  | 09/16/2016 | 09/15/2017 | ~           |
| Line Impedance                          | LI-125A  | 191106      | 09/24/2016 | 09/23/2017 | <b>&gt;</b> |
| Line Impedance                          | LI-125A  | 191107      | 09/24/2016 | 09/23/2017 | <b>&gt;</b> |
| LISN                                    | ISN T800 | 34373       | 09/24/2016 | 09/23/2017 | <b>&gt;</b> |
| Double Ridge Horn<br>Antenna (1 ~18GHz) | AH-118   | 71283       | 09/23/2016 | 09/22/2017 | V           |
| Transient Limiter                       | LIT-153  | 531118      | 08/31/2016 | 08/30/2017 | V           |
| RF conducted test                       |          |             |            |            |             |
| Agilent ESA-E SERIES                    | E4407B   | MY45108319  | 09/16/2016 | 09/15/2017 | <b>&gt;</b> |
| Power Splitter                          | 1#       | 1#          | 08/31/2016 | 08/30/2017 | <b>V</b>    |
| DC Power Supply                         | E3640A   | MY40004013  | 09/16/2016 | 09/15/2017 | <b>~</b>    |
| Radiated Emissions                      |          |             |            |            |             |
| EMI test receiver                       | ESL6     | 100262      | 09/16/2016 | 09/15/2017 | ~           |
| Positioning Controller                  | UC3000   | MF780208282 | 11/18/2016 | 11/17/2017 | ~           |
| OPT 010 AMPLIFIER<br>(0.1-1300MHz)      | 8447E    | 2727A02430  | 08/31/2016 | 08/30/2017 | V           |
| Microwave Preamplifier<br>(1 ~ 26.5GHz) | 8449B    | 3008A02402  | 03/23/2017 | 03/22/2018 | <b>\</b>    |
| Bilog Antenna<br>(30MHz~6GHz)           | JB6      | A110712     | 09/20/2016 | 09/19/2017 | V           |
| Double Ridge Horn<br>Antenna (1 ~18GHz) | AH-118   | 71283       | 09/23/2016 | 09/22/2017 | <u>X</u>    |
| Universal Radio<br>Communication Tester | CMU200   | 121393      | 09/24/2016 | 09/23/2017 | V           |



| Test Report No. | 17070226-FCC-R4 |
|-----------------|-----------------|
| Page            | 33 of 50        |

# Annex B. EUT And Test Setup Photographs

## Annex B.i. Photograph: EUT External Photo

Whole Package View



Adapter - Lable View





| Test Report No. | 17070226-FCC-R4 |  |
|-----------------|-----------------|--|
| Page            | 34 of 50        |  |

**EUT - Front View** 




EUT - Rear View





| Test Report No. | 17070226-FCC-R4 |
|-----------------|-----------------|
| Page            | 35 of 50        |

**EUT - Top View** 

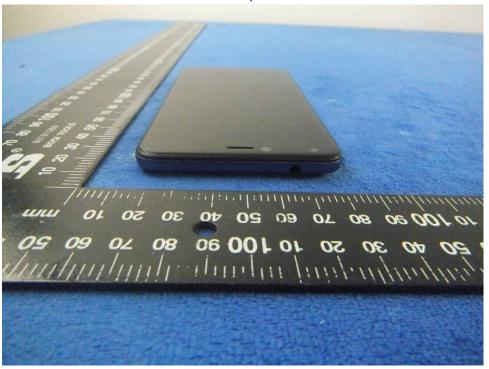


**EUT - Bottom View** 





| Test Report No. | 17070226-FCC-R4 |
|-----------------|-----------------|
| Page            | 36 of 50        |

EUT - Left View

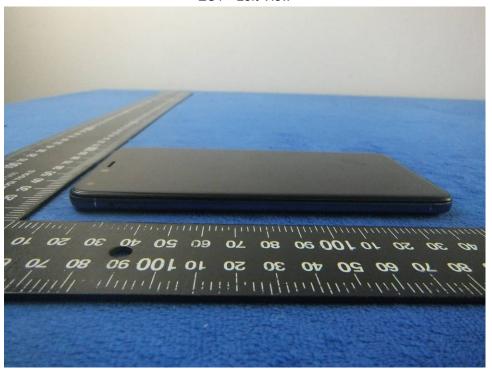


**EUT - Right View** 





| Test Report No. | 17070226-FCC-R4 |
|-----------------|-----------------|
| Page            | 37 of 50        |

#### Annex B.ii. Photograph: EUT Internal Photo






Cover Off - Top View 2





| Test Report No. | 17070226-FCC-R4 |
|-----------------|-----------------|
| Page            | 38 of 50        |

Battery - Front View

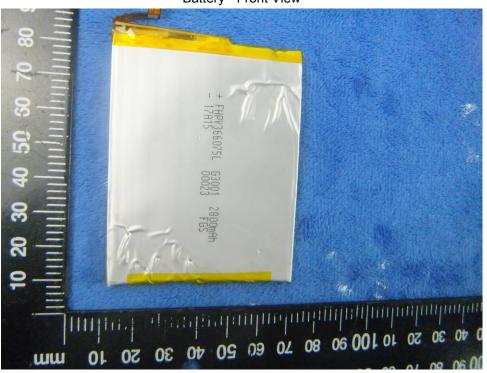


Battery - Rear View






| Test Report No. | 17070226-FCC-R4 |
|-----------------|-----------------|
| Page            | 39 of 50        |

Mainboard with Shielding - Front View

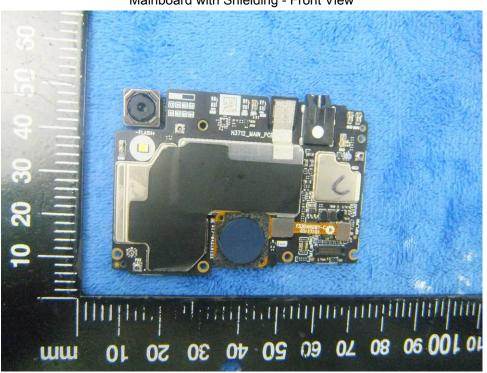


Mainboard without Shielding - Front View

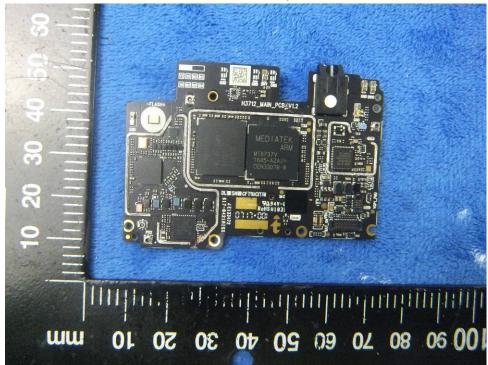




| Test Report No. | 17070226-FCC-R4 |
|-----------------|-----------------|
| Page            | 40 of 50        |

#### Mainboard with Shielding - Rear View

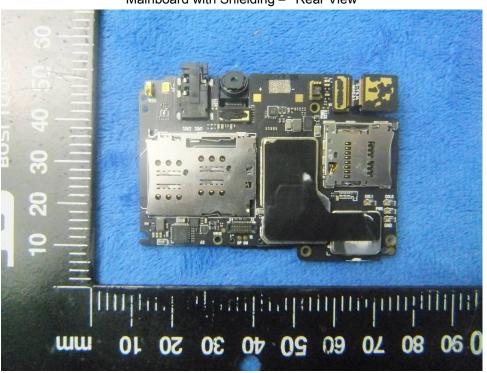

Mainboard without Shielding - Rear View

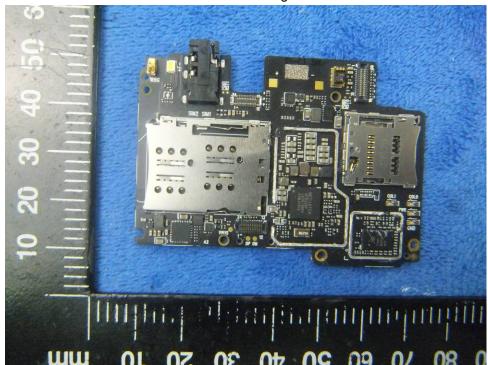



| Test Report No. | 17070226-FCC-R4 |
|-----------------|-----------------|
| Page            | 41 of 50        |

LCD - Front View




LCD - Rear View






| Test Report No. | 17070226-FCC-R4 |
|-----------------|-----------------|
| Page            | 42 of 50        |

#### GSM/PCS/UMTS-FDD Antenna View

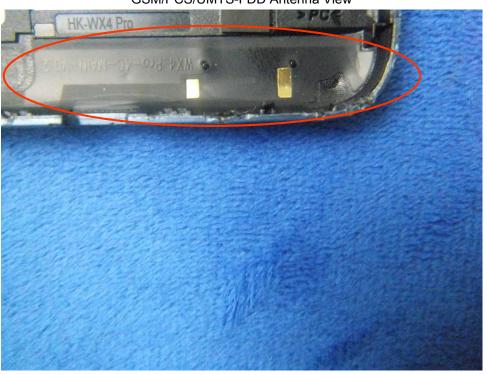

WIFI/BT/BLE/GPS - Antenna View

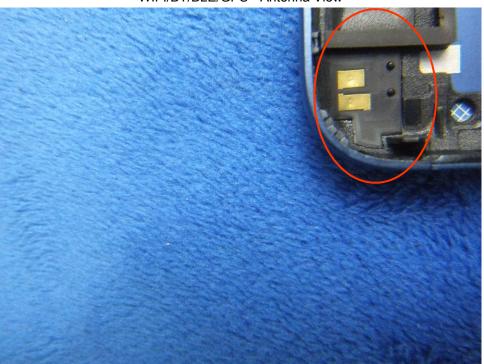



| Test Report No. | 17070226-FCC-R4 |
|-----------------|-----------------|
| Page            | 43 of 50        |

LTE - Antenna View





| Test Report No. | 17070226-FCC-R4 |
|-----------------|-----------------|
| Page            | 44 of 50        |

## Annex B.iii. Photograph: Test Setup Photo



Conducted Emissions Test Setup Front View



Conducted Emissions Test Setup Side View



Radiated Spurious Emissions Test Setup Below 1GHz



Radiated Spurious Emissions Test Setup Above 1GHz




| Test Report No. | 17070226-FCC-R4 |
|-----------------|-----------------|
| Page            | 45 of 50        |

## Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

## Annex C.ii. TEST SET UP BLOCK


## Block Configuration Diagram for AC Line Conducted Emissions

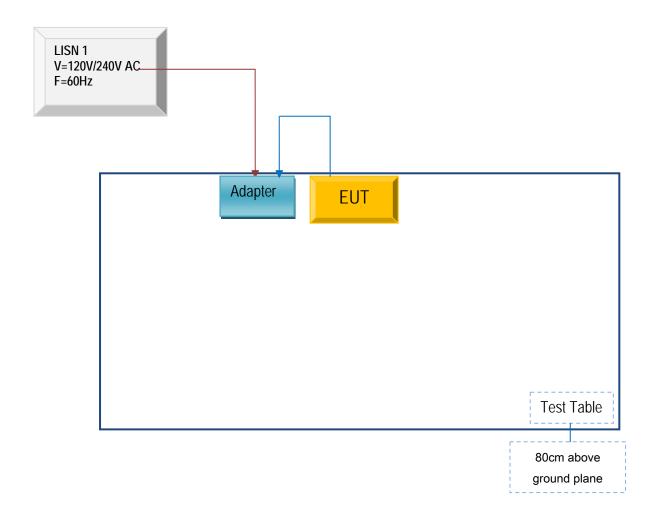



| Test Report No. | 17070226-FCC-R4 |
|-----------------|-----------------|
| Page            | 46 of 50        |


# Block Configuration Diagram for Radiated Emissions (Below 1GHz).

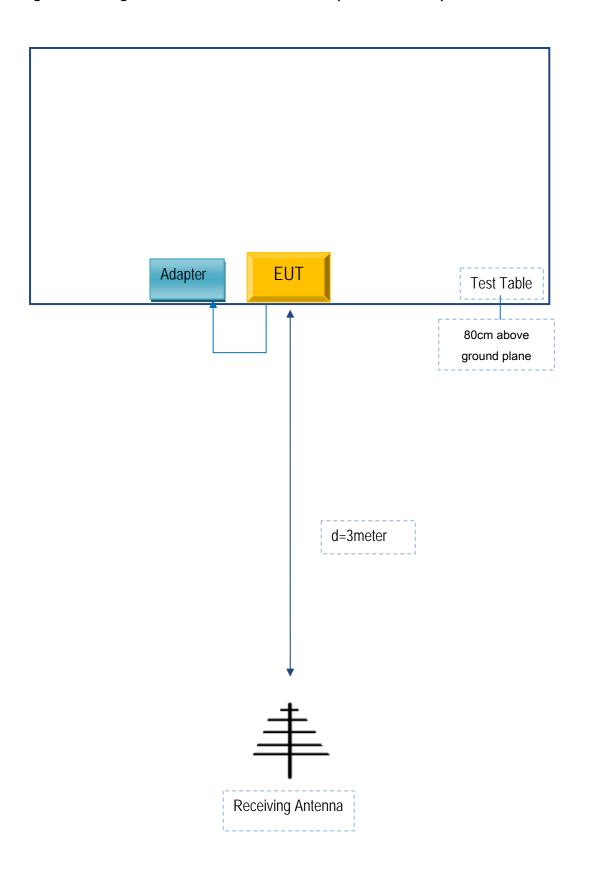



| Test Report No. | 17070226-FCC-R4 |
|-----------------|-----------------|
| Page            | 47 of 50        |

# Block Configuration Diagram for Radiated Emissions ( Above 1GHz ) .

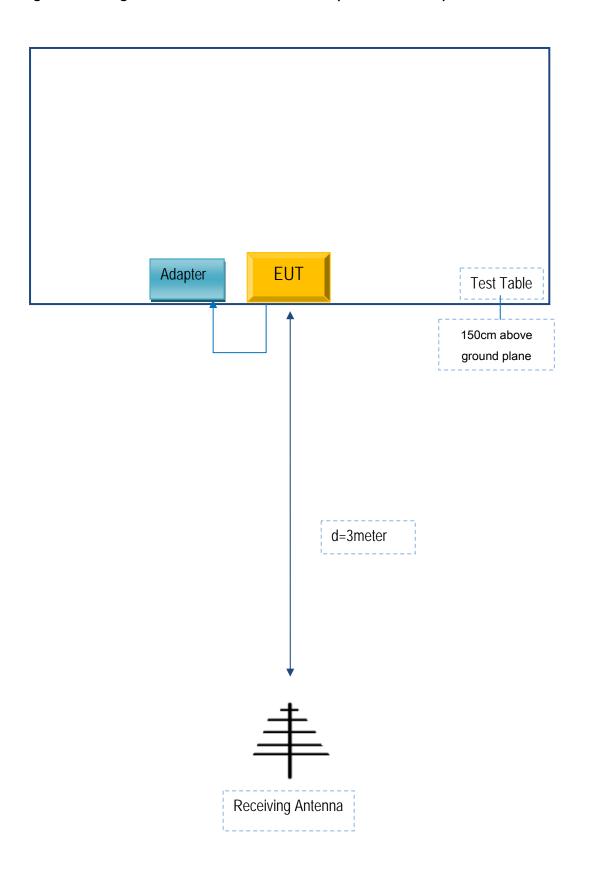



| Test Report No. | 17070226-FCC-R4 |
|-----------------|-----------------|
| Page            | 48 of 50        |

## Annex C. il. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

#### Supporting Equipment:

| Manufacturer         | Equipment<br>Description | Model    | Serial No |
|----------------------|--------------------------|----------|-----------|
| TECNO MOBILE LIMITED | Adapter                  | A8-50100 | F1012     |

#### Supporting Cable:

| Cable type | Shield Type  | Ferrite<br>Core | Length | Serial No |
|------------|--------------|-----------------|--------|-----------|
| USB Cable  | Un-shielding | No              | 0.8m   | F1012     |



| Test Report No. | 17070226-FCC-R4 |
|-----------------|-----------------|
| Page            | 49 of 50        |

# Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see the attachment



| Test Report No. | 17070226-FCC-R4 |
|-----------------|-----------------|
| Page            | 50 of 50        |

# Annex E. DECLARATION OF SIMILARITY

N/A