



**313 West 12800 South, Suite 311  
Draper, UT 84020  
(801) 260-4040**

## **Test Report**

### **Certification**

<b>FCC ID</b>	2ADZ3C001
<b>Equipment Under Test</b>	MD001
<b>Test Report Serial No</b>	V040725_04
<b>Dates of Test</b>	May 23 – 25, 2017
<b>Report Issue Date</b>	June 2, 2017

<b>Test Specifications:</b>	<b>Applicant:</b>
FCC Part 15, Subpart C	Sure-Fi, Inc. 3000 Vista Way, Suite 1 Provo, UT 84606 U.S.A.



## Certification of Engineering Report

This report has been prepared by VPI Laboratories, Inc. to document compliance of the device described below with the requirements of Federal Communications Commission (FCC) Part 15, Subpart C. This report may be reproduced in full. Partial reproduction of this report may only be made with the written consent of the laboratory. The results in this report apply only to the sample tested.

<b>Applicant</b>	Sure-Fi, Inc.
<b>Manufacturer</b>	Sure-Fi, Inc.
<b>Brand Name</b>	Sure-Fi
<b>Model Number</b>	MD001
<b>FCC ID</b>	2ADZ3C001


On this 2<sup>nd</sup> day of June 2017, I, individually and for VPI Laboratories, Inc., certify that the statements made in this engineering report are true, complete, and correct to the best of my knowledge, and are made in good faith.

Although NVLAP has accredited the VPI Laboratories, Inc. EMC testing facilities, this report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

VPI Laboratories, Inc.



Tested by: Norman P. Hansen

  
Reviewed by: Joseph W. Jackson

<b>Revision History</b>		
<b>Revision</b>	<b>Description</b>	<b>Date</b>
01	Original Report Release	June 2, 2017
02	Correct the table of 6.2.4 to show the correct bandwidth	June 9, 2017
03	Correct spelling of BLE module manufacturer in section 2.2	June 13, 2017
04	Remove hyphen from FCC ID	June 14, 2017

## Table of Contents

1	Client Information.....	5
1.1	Applicant.....	5
1.2	Manufacturer.....	5
2	Equipment Under Test (EUT).....	6
2.1	Identification of EUT.....	6
2.2	Description of EUT.....	6
2.3	EUT and Support Equipment.....	6
2.4	Interface Ports on EUT .....	7
2.5	Modification Incorporated/Special Accessories on EUT.....	7
2.6	Deviation from Test Standard.....	7
3	Test Specification, Methods and Procedures .....	8
3.1	Test Specification.....	8
3.2	Methods & Procedures.....	8
3.3	Test Procedure .....	12
4	Operation of EUT During Testing .....	13
4.1	Operating Environment.....	13
4.2	Operating Modes.....	13
4.3	EUT Exercise Software.....	13
5	Summary of Test Results .....	14
5.1	FCC Part 15, Subpart C .....	14
5.2	Result .....	14
6	Measurements, Examinations and Derived Results.....	15
6.1	General Comments.....	15
6.2	Test Results.....	15
7	Test Procedures and Test Equipment.....	73
7.1	Conducted Emissions at Mains Ports.....	73
7.2	Direct Connection at the Antenna Port Test .....	74
7.3	Radiated Emissions .....	75
7.4	Equipment Calibration .....	76
7.5	Measurement Uncertainty .....	77
8	Photographs .....	78

## 1 Client Information

### 1.1 Applicant

<b>Company Name</b>	Sure-Fi, Inc. 3000 Vista Way, Suite 1 Provo, UT 84606 U.S.A.
<b>Contact Name</b>	Mark Hall
<b>Title</b>	President

### 1.2 Manufacturer

<b>Company Name</b>	Sure-Fi, Inc. 3000 Vista Way, Suite 1 Provo, UT 84606 U.S.A.
<b>Contact Name</b>	Mark Hall
<b>Title</b>	President

## 2 Equipment Under Test (EUT)

### 2.1 Identification of EUT

<b>Brand Name</b>	Sure-Fi		
<b>Model Number</b>	MD001		
<b>Hardware Version</b>	1.0		
<b>Serial Number</b>	None		
<b>Dimensions (cm)</b>	10    x    4    x    0.2		

### 2.2 Description of EUT

The MD001 is a module containing a 902 – 928 MHz transceiver and a Raytac MDBT42Q BLE module. Power was provided to the EUT via a Volgen KTPS05-05015U-VI power supply. The BLE module carries FCC ID SH6MDBT42Q and IC# 8017A-MDBT42Q. The 902 – 928 MHz transceiver operates on 72 channels that are spaced 350 kHz apart, starting at 902.5 MHz and ending at 927.35 MHz. The MD001 uses a trace antenna with a maximum gain of 2.64 dBi. The transceiver may be operated in the modes as shown in the table below. This report covers the FHSS and Hybrid operation of the device when operating at 250 kHz LoRa, 125 kHz LoRa, 62.5 kHz LoRa and 31.25 kHz LoRa.

Modulation & BW	DTS	FHSS	Hybrid	DTS Power Setting	FHSS Power Setting	Hybrid Power Setting
500 kHz LoRa	X	---	X	11/182	---	11/182
500 kHz FSK	X	---	---	11/132	---	---
250 kHz LoRa	---	X	X	---	11/274	11/137
125 kHz LoRa	---	X	X	---	11/274	11/125
62.5 kHz LoRa	---	X	X	---	11/274	11/117
31.25 kHz LoRa	---	X	X	---	11/274	11/112

This report covers the 902 – 928 MHz transceiver subject to FCC Part 15, Subpart C. The circuitry of the device subject to FCC Subpart B was found to be compliant and is covered in VPI Laboratories, Inc. report V040723.

### 2.3 EUT and Support Equipment

The EUT and support equipment used during the test are listed below.

<b>Brand Name</b>	<b>Description</b>	<b>Name of Interface Ports / Interface Cables</b>
<b>Model Number</b> BN: Sure-Fi MN: MD001 (Note 1) SN: None	Transceiver Module	See Section 2.4
<b>Model Number</b> BN: Volgen MN: KTPS05-05015U-VI SN: None	Power Supply	AC/Direct connection to the AC Mains DC/2 unshielded conductors (Note 2)

Notes: (1) EUT

(2) Interface port connected to EUT (See Section 2.4)

The support equipment listed above was not modified in order to achieve compliance with this standard.

## 2.4 Interface Ports on EUT

Name of Port	No. of Ports Fitted to EUT	Cable Description/Length
DC	1	2 unshielded conductors/1.5 meters

## 2.5 Modification Incorporated/Special Accessories on EUT

The following modifications were made to the EUT by the Client during testing to comply with the specification. This report is not complete without an accompanying signed attestation, that the product will have all of the documented modifications incorporated into the product when manufactured and placed on the market.

- The maximum power settings to be incorporated in production code are shown in the table of section 2.2. For testing covered in this report, those settings are 11/274 when operating using FHSS. When operating in Hybrid mode, at 250 kHz LoRa the maximum setting is 11/137, at 125 kHz LoRa the maximum setting is 11/125, at 62.5 kHz LoRa the maximum setting is 11/117, and at 31.25 kHz LoRa the maximum setting is 11/112. These settings are set in the firmware and not user accessible.

## 2.6 Deviation from Test Standard

There were no deviations from the test specification.

### 3 Test Specification, Methods and Procedures

#### 3.1 Test Specification

<b>Title</b>	FCC PART 15, Subpart C (47 CFR 15) 15.203, 15.207, and 15.247 Limits and methods of measurement of radio interference characteristics of radio frequency devices.
<b>Purpose of Test</b>	The tests were performed to demonstrate initial compliance

#### 3.2 Methods & Procedures

##### 3.2.1 §15.203 Antenna Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

##### 3.2.2 §15.207 Conducted Limits

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency range (MHz)	Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50*	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

\*Decreases with the logarithm of the frequency.

**Table 1: Limits for conducted emissions at mains ports of Class B ITE.**

##### 3.2.3 §15.247 Operation within the bands 902 – 928 MHz, 2400 – 2483.5 MHz, and 5725 – 5850 MHz

- a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions.

- 1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400 – 2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudorandomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.
  - i. For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.
  - ii. Frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75 hopping frequencies. The maximum 20 dB bandwidth of the hopping channel is 1 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.
  - iii. Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 non-overlapping channels are used.
- 2) Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

b) The maximum peak output power of the intentional radiator shall not exceed the following:

- 1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
- 2) For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.
- 3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725 – 5850 MHz bands: 1 watt. As an alternative to a peak power measurement,

compliance with the Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

- 4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- c) Operation with directional antenna gains greater than 6 dBi.
  - 1) Fixed point-to-point operation:
    - i. Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.
    - ii. Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.
    - iii. Fixed, point-to-point operation, as used in paragraphs (b)(4)(i) and (b)(4)(ii) of this section, excludes the use of point-to-multipoint systems, omnidirectional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum or digitally modulated intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of this responsibility.
  - 2) In addition to the provisions in paragraphs (b)(1), (b)(3), (b)(4) and (c)(1)(i) of this section, transmitters operating in the 2400-2483.5 MHz band that emit multiple directional beams, simultaneously or sequentially, for the purpose of directing signals to individual receivers or to groups of receivers provided the emissions comply with the following:
    - i. Different information must be transmitted to each receiver.
    - ii. If the transmitter employs an antenna system that emits multiple directional beams but does not emit multiple directional beams

simultaneously, the total output power conducted to the array or arrays that comprise the device, i.e., the sum of the power supplied to all antennas, antenna elements, staves, etc. and summed across all carriers or frequency channels, shall not exceed the limit specified in paragraph (b)(1) or (b)(3) of this section, as applicable. However, the total conducted output power shall be reduced by 1 dB below the specified limits for each 3 dB that the directional gain of the antenna /antenna array exceeds 6 dBi. The directional antenna gain shall be computed as follows:

- A. The directional gain shall be calculated as the sum of  $10 \log$  (number of array elements or staves) plus the directional gain of the element or stave having the highest gain.
- B. A lower value for the directional gain than that calculated in paragraph (c)(2)(ii)(A) of this section will be accepted if sufficient evidence is presented, e.g., due to shading of the array or coherence loss in the beamforming.

- iii. If a transmitter employs an antenna that operates simultaneously on multiple directional beams using the same or different frequency channels, the power supplied to each emission beam is subject to the power limit specified in paragraph (c)(2)(ii) of this section. If transmitted beams overlap, the power shall be reduced to ensure that their aggregate power does not exceed the limit specified in paragraph (c)(2)(ii) of this section. In addition, the aggregate power transmitted simultaneously on all beams shall not exceed the limit specified in paragraph (c)(2)(ii) of this section by more than 8 dB.
- iv. Transmitters that emit a single directional beam shall operate under the provisions of paragraph (c)(1) of this section.

- d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
- e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
- f) For the purposes of this section, hybrid systems are those that employ a combination of both frequency hopping and digital modulation techniques. The frequency hopping operation of the hybrid system, with the direct sequence or digital modulation operation turned off, shall have an average time of occupancy on any frequency not to exceed 0.4 seconds within a time period in seconds equal to the number of hopping frequencies employed multiplied by 0.4. The digital

modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

- g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.
- h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.
- i) Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See § 1.1307(b)(1) of this Chapter.

Note: Spread spectrum systems are sharing these bands on a noninterference basis with systems supporting critical Government requirements that have been allocated the usage of these bands, secondary only to ISM equipment operated under the provisions of Part 18 of this Chapter. Many of these Government systems are airborne radiolocation systems that emit a high EIRP which can cause interference to other users. Also, investigations of the effect of spread spectrum interference to U. S. Government operations in the 902-928 MHz band may require a future decrease in the power limits allowed for spread spectrum operation.

### 3.3 Test Procedure

The testing was performed according to the procedures in ANSI C63.10-2013 and 47 CFR Part 15. Testing was performed at the VPI Laboratories, Inc. Wanship Upper Open Area Test Site, located at 29145 Old Lincoln Highway, Wanship, UT. VPI Laboratories, Inc. is accredited by National Voluntary Laboratory Accreditation Program (NVLAP); NVLAP Lab Code: 100272-0, which is effective until September 30, 2017.

## 4 Operation of EUT During Testing

### 4.1 Operating Environment

<b>Power Supply</b>	120 VAC
<b>AC Mains Frequency</b>	60 Hz

### 4.2 Operating Modes

The transmitter was tested on 3 orthogonal axes while in a constant transmit mode at the upper, middle, and lower channels. As required by §15.31(e), the power to the module was varied with no change seen in the transmitter characteristics.

### 4.3 EUT Exercise Software

Sure-Fi Module Developer 1.0 was used to exercise the EUT.

## 5 Summary of Test Results

### 5.1 FCC Part 15, Subpart C

#### 5.1.1 Summary of Tests

Section	Environmental Phenomena	Frequency Range (MHz)	Result
15.203	Antenna Requirements	Structural requirement	Complied
15.207	Conducted Disturbance at Mains Ports	0.15 to 30	Complied
15.247(a)	Channel Separation	902 - 928	Complied
15.247(a)	20 dB Bandwidth	902 - 928	Complied
15.247(a)	Time of Occupancy	902 - 928	Complied
15.247(b)	Peak Output Power	902 - 928	Complied
15.247(d)	Spurious Emissions	0.009 - 9280	0.009 - 9280
15.247(g)	Channel Usage	902 - 928	Complied (Note 1)
15.247(h)	Channel Intelligence/Avoidance	902 - 928	Complied (Note 1)
15.247(i)	RF Exposure	902 - 928	Complied (Note 1)
Note 1: Compliance with these requirements is shown in documents filed with the FCC at the time of Certification.			

### 5.2 Result

In the configuration tested, the EUT complied with the requirements of the specification.

## 6 Measurements, Examinations and Derived Results

### 6.1 General Comments

This section contains the test results only. Details of the test methods used and a list of the test equipment used during the measurements can be found in Section 7 of this report.

### 6.2 Test Results

#### 6.2.1 §15.203 Antenna Requirements

The EUT uses a trace on the PCB as an antenna. A maximum gain of 2.64 dBi was calculated using measurements made at the time of testing.

##### Result

The EUT complied with the specification.

#### 6.2.2 §15.207 Conducted Emissions at AC Mains Ports

Frequency (MHz)	AC Mains Lead	Detector	Measured Level (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)
0.16	Hot Lead	Quasi-Peak (Note 2)	52.4	65.5	-13.1
0.16	Hot Lead	Average (Note 2)	37.2	55.5	-18.3
0.20	Hot Lead	Peak (Note 1)	48.2	53.6	-5.4
0.26	Hot Lead	Peak (Note 1)	44.3	51.5	-7.2
0.48	Hot Lead	Quasi-Peak (Note 1)	41.0	46.3	-5.3
0.83	Hot Lead	Peak (Note 1)	37.0	46.0	-9.0
1.03	Hot Lead	Peak (Note 1)	36.7	46.0	-9.3
0.15	Neutral Lead	Quasi-Peak (Note 2)	53.0	66.0	-13.0
0.15	Neutral Lead	Average (Note 2)	34.5	56.0	-21.5
0.20	Neutral Lead	Quasi-Peak (Note 1)	48.3	53.6	-5.3
0.25	Neutral Lead	Peak (Note 1)	45.7	51.7	-6.0
0.42	Neutral Lead	Peak (Note 1)	41.0	47.5	-6.5
0.49	Neutral Lead	Peak (Note 1)	40.1	46.1	-6.0
0.69	Neutral Lead	Peak (Note 1)	37.7	46.0	-8.3


Note 1: The reference detector used for the measurements was Quasi-Peak or Peak and the data was compared to the average limit; therefore, the EUT was deemed to meet both the average and quasi-peak limits.  
 Note 2: The reference detector used for the measurements was quasi-peak and average and the data was compared to the respective limits.

##### Result

The EUT complied with the specification limit by a margin of 5.3 dB.

#### 6.2.3 §15.247(a) Channel Separation

The EUT must have the hopping channel carrier frequencies separated by 25 kHz or the 20 dB bandwidth, whichever is greater. A plot showing a 350 kHz channel separation is shown below. The 20 dB bandwidth for each mode of operation is shown in section 6.2.4.

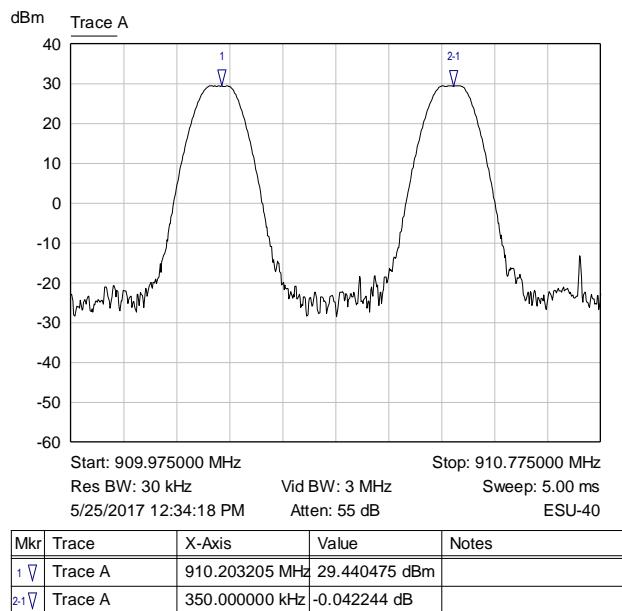
**Graph 1: Channel Separation Plot**


## Result

The the EUT complies with the specification.

### 6.2.4 §15.247(a)(2) Emissions Bandwidth


The 20 dB bandwidth of the hopping channels are shown in the table and plots below.

Operational Mode	Frequency (MHz)	Emissions 20 dB Bandwidth (kHz)
250 kHz LoRa	902.50	301
	914.75	294
	927.35	300
125 kHz LoRa	902.50	151
	914.75	152
	927.35	165
62.5 kHz LoRa	902.50	69.5
	914.75	98.5
	927.35	70.5
31.25 kHz LoRa	902.50	37.0
	914.75	36.4
	927.35	36.4

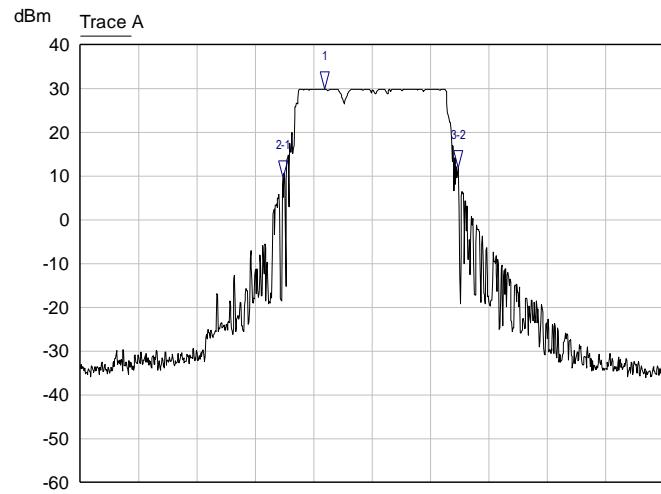


Mkr	Trace	X-Axis	Value	Notes
1	Trace A	902.419000 MHz	29.907990 dBm	
2-1	Trace A	-72.000000 kHz	-20.409577 dB	
3-2	Trace A	301.000000 kHz	2.295565 dB	

**Graph 2: Lowest Channel 20 dB Bandwidth – 250 kHz LoRa**

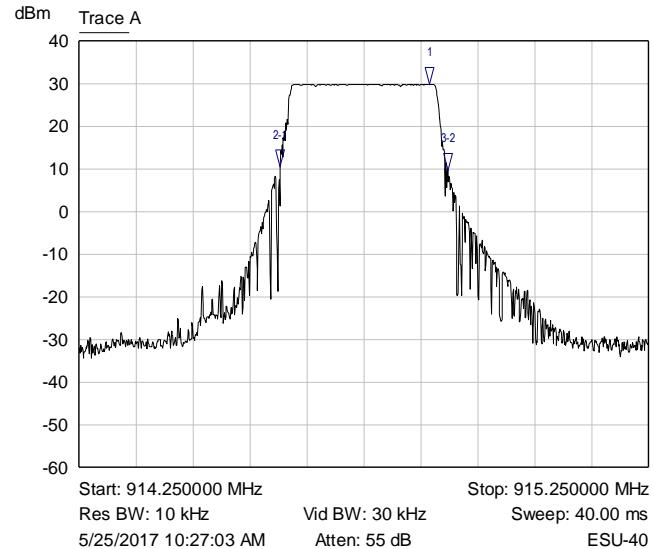


Mkr	Trace	X-Axis	Value	Notes
1	Trace A	914.865000 MHz	29.783796 dBm	
2-1	Trace A	-262.000000 kHz	-19.311468 dB	
3-2	Trace A	294.000000 kHz	-0.850727 dB	

**Graph 3: Middle Channel 20 dB Bandwidth – 250 kHz LoRa**

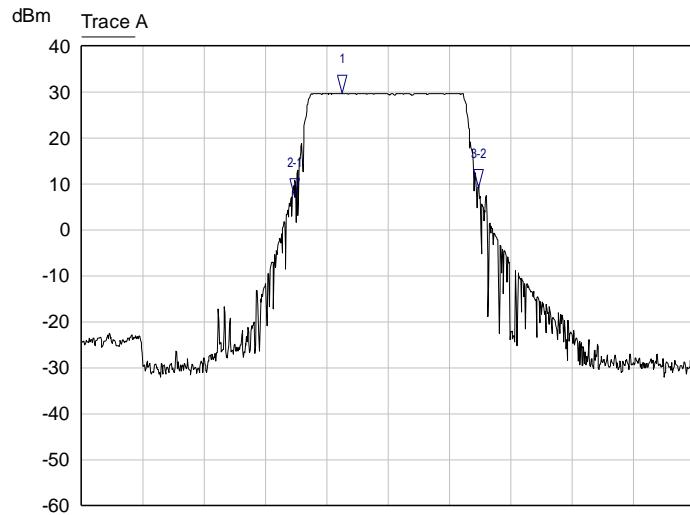


Mkr	Trace	X-Axis	Value	Notes
1	Trace A	927.275000 MHz	29.638519 dBm	
2-1	Trace A	-78.000000 kHz	-22.492963 dB	
3-2	Trace A	300.000000 kHz	1.946807 dB	

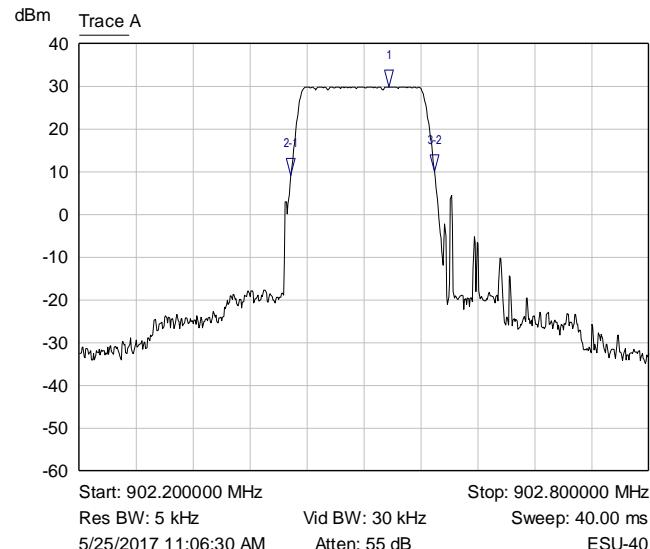**Graph 4: Highest Channel 20 dB Bandwidth – 250 kHz LoRa**


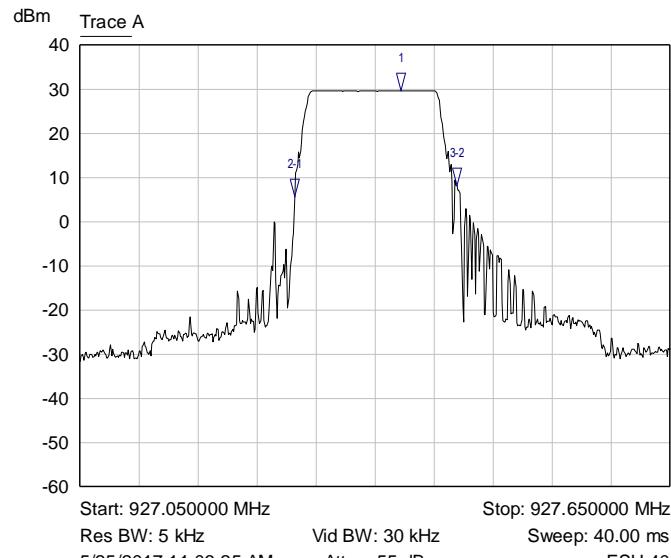
Mkr	Trace	X-Axis	Value	Notes
1	Trace A	902.526000 MHz	29.815300 dBm	
2-1	Trace A	-103.000000 kHz	-20.682478 dB	
3-2	Trace A	151.000000 kHz	0.899834 dB	

**Graph 5: Lowest Channel 20 dB Bandwidth – 125 kHz LoRa**

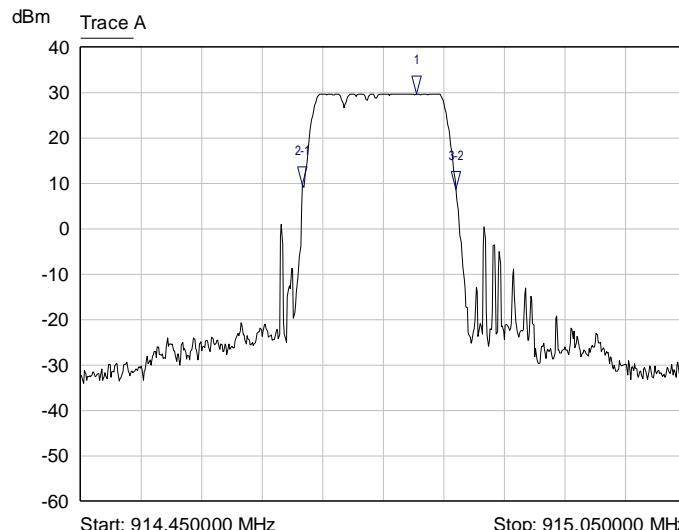


Mkr	Trace	X-Axis	Value	Notes
1 	Trace A	914.783000 MHz	29.740959 dBm	
2 	Trace A	-113.000000 kHz	-20.054788 dB	
3.2 	Trace A	152.000000 kHz	-0.977015 dB	

**Graph 6: Middle Channel 20 dB Bandwidth – 125 kHz LoRa**



Mkr	Trace	X-Axis	Value	Notes
1 	Trace A	927.376000 MHz	29.615927 dBm	
2 	Trace A	-108.000000 kHz	-23.882734 dB	
3.2 	Trace A	165.000000 kHz	2.435918 dB	


**Graph 7: Highest Channel 20 dB Bandwidth – 125 kHz LoRa**

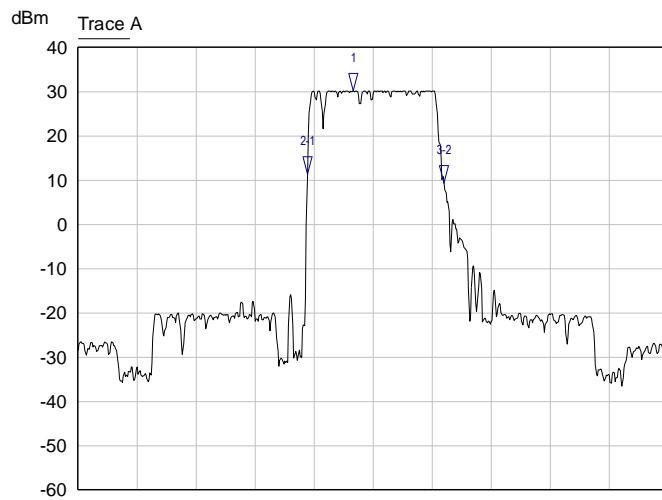

Start: 902.350000 MHz Stop: 902.650000 MHz  
 Res BW: 2 kHz Vid BW: 5 kHz Sweep: 125.00 ms  
 5/25/2017 11:29:14 AM Atten: 55 dB ESU-40

Mkr	Trace	X-Axis	Value	Notes
1	Trace A	902.490000 MHz	30.147140 dBm	
2-1	Trace A	-23.500000 kHz	-18.742089 dB	
3-2	Trace A	69.500000 kHz	-2.085179 dB	


**Graph 8: Lowest Channel 20 dB Bandwidth – 62.5 kHz LoRa**

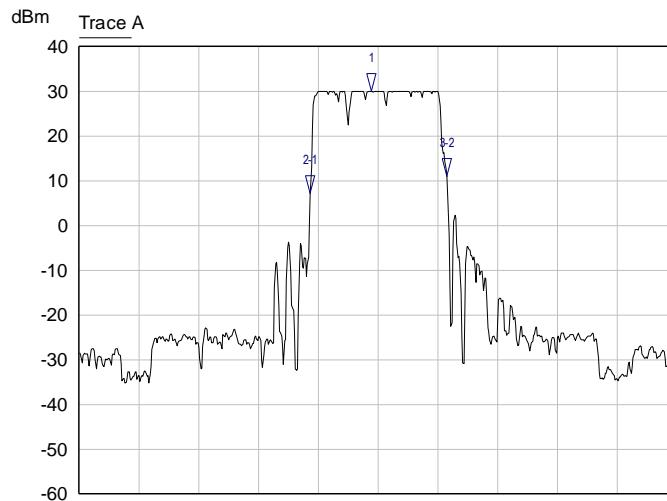

Start: 914.600000 MHz Stop: 914.900000 MHz  
 Res BW: 2 kHz Vid BW: 5 kHz Sweep: 125.00 ms  
 5/25/2017 11:27:54 AM Atten: 55 dB ESU-40


Mkr	Trace	X-Axis	Value	Notes
1	Trace A	914.746500 MHz	30.023190 dBm	
2-1	Trace A	-30.500000 kHz	-22.799966 dB	
3-2	Trace A	68.500000 kHz	3.696304 dB	

**Graph 9: Middle Channel 20 dB Bandwidth – 62.5 kHz LoRa**

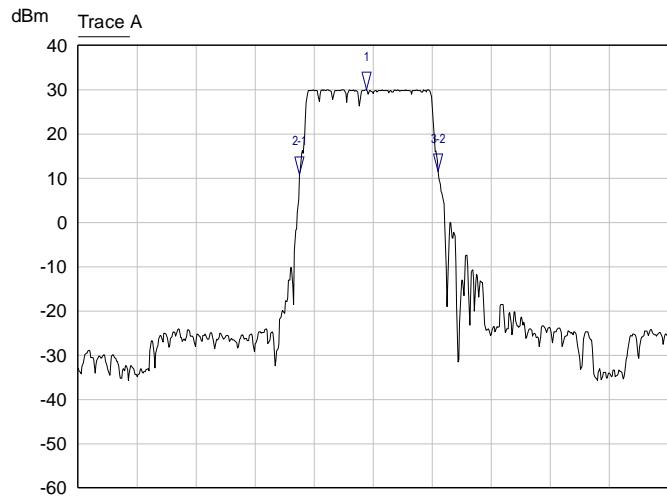


Mkr	Trace	X-Axis	Value	Notes
1	Trace A	927.346500 MHz	29.924973 dBm	
2-1	Trace A	-34.000000 kHz	-19.093358 dB	
3-2	Trace A	70.500000 kHz	0.592546 dB	

**Graph 10: Highest Channel 20 dB Bandwidth – 62.5 kHz LoRa**

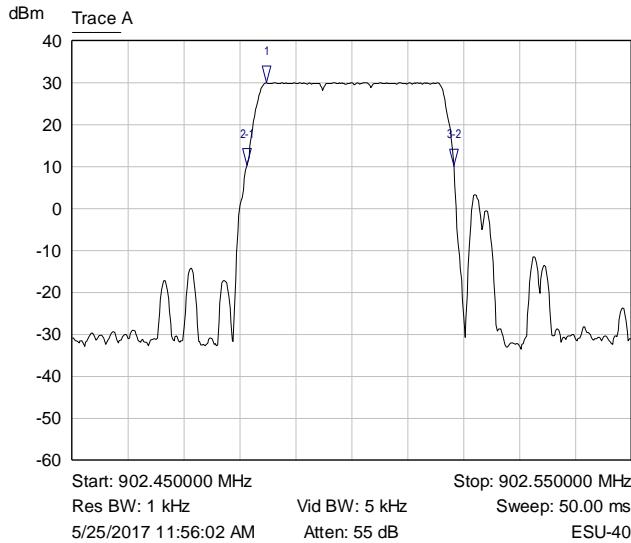


Mkr	Trace	X-Axis	Value	Notes
1	Trace A	902.484800 MHz	29.945265 dBm	
2-1	Trace A	-3.600000 kHz	-19.552368 dB	
3-2	Trace A	37.000000 kHz	-0.214791 dB	

**Graph 11: Lowest Channel 20 dB Bandwidth – 31.25 kHz LoRa**

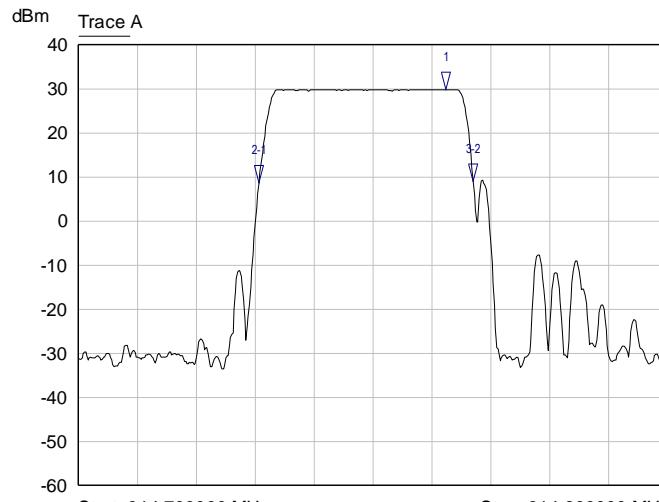

Mkr	Trace	X-Axis	Value	Notes
1	Trace A	914.762400 MHz	29.857647 dBm	
2	Trace A	-31.800000 kHz	-21.120753 dB	
3	Trace A	36.400000 kHz	0.250446 dB	

**Graph 12: Middle Channel 20 dB Bandwidth – 31.25 kHz LoRa**

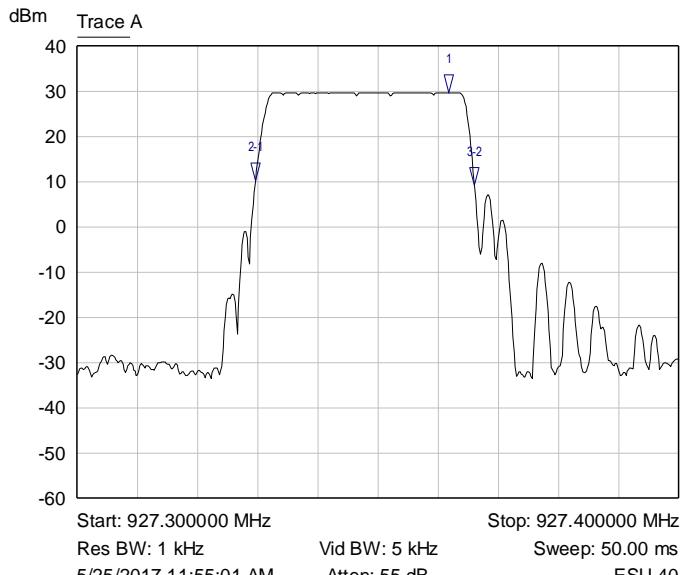

Mkr	Trace	X-Axis	Value	Notes
1	Trace A	927.361800 MHz	29.736444 dBm	
2	Trace A	-32.200000 kHz	-19.556912 dB	
3	Trace A	36.400000 kHz	-0.990369 dB	

**Graph 13: Highest Channel 20 dB Bandwidth – 31.25 kHz LoRa**


## Result

In the configurations tested, the EUT complied with the requirements of the specification.


### 6.2.5 §15.247(a) Channel Occupancy

#### 250 kHz LoRa Operation


The EUT transmissions on a single frequency must not exceed 0.4 seconds in a 10 second time period. The EUT transmits a total of 8 times in a 10 second period. One transmission is the preamble, lasting 249.038 ms and 7 data transmissions of 16.378 ms. Total on time at one frequency in 10 seconds is 363.684 ms (1 x 249.038) + (7 x 16.378). See the plots below.

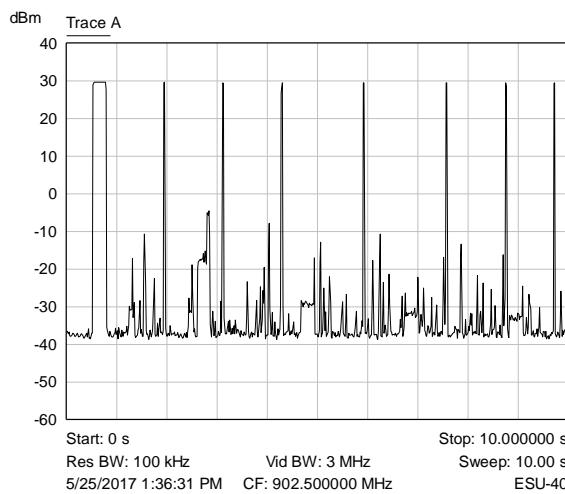

**Graph 14: Hits in 10 seconds**

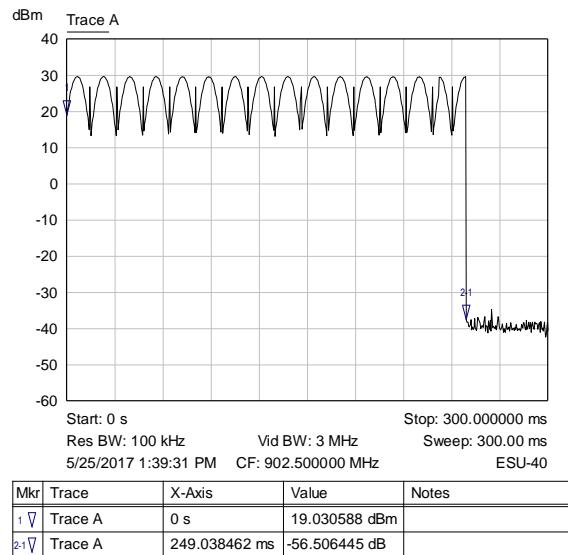



**Graph 15: Preamble On Time**

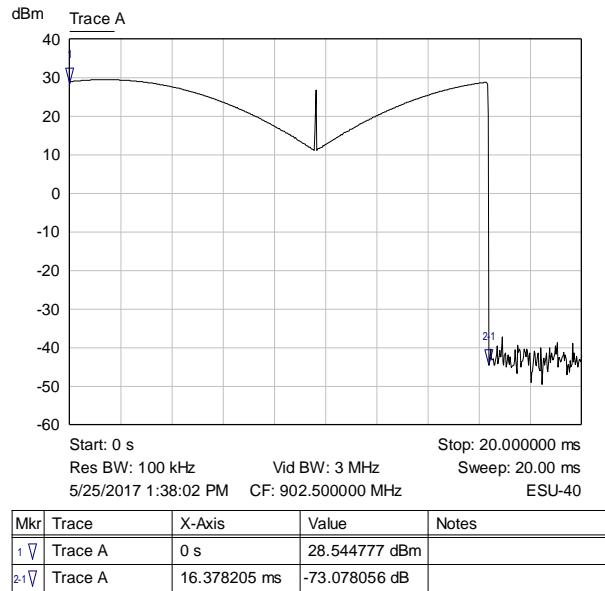
**Graph 16: Data On Time**

### 125 kHz LoRa Operation


The EUT transmissions on a single frequency must not exceed 0.4 seconds in a 20 second time period. The EUT transmits a total of 30 times in a 20 second period. One transmission is the preamble, lasting 125.321 ms and 29 data transmissions of 8.173 ms. Total on time at one frequency in 20 seconds is 362.338 ms  $(1 \times 125.321) + (29 \times 8.173)$ . See the plots below.

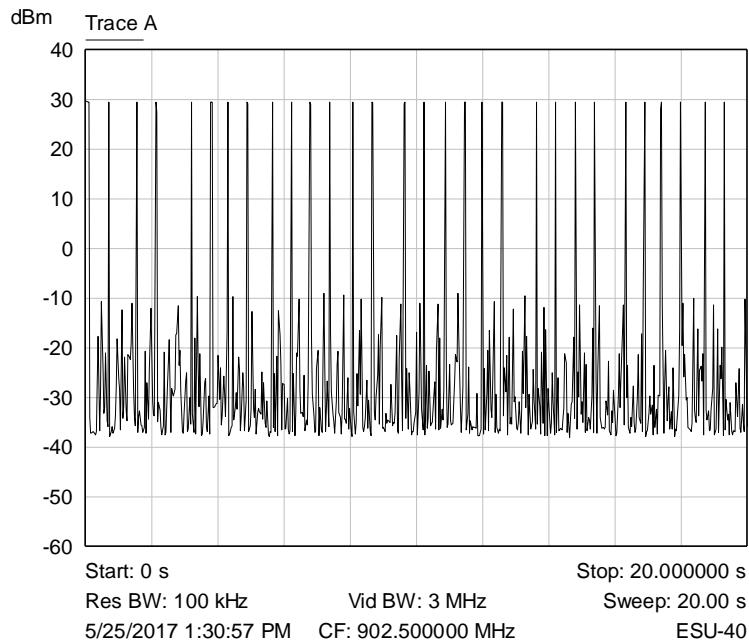
**Graph 17: Hits in 10 seconds**

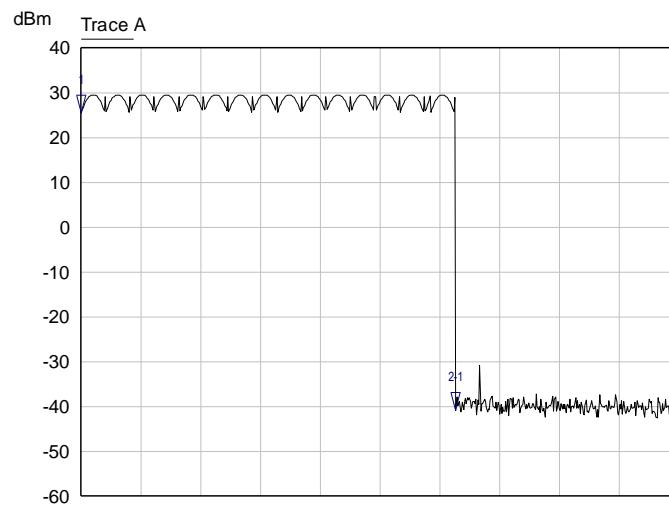

Mkr	Trace	X-Axis	Value	Notes
1	Trace A	0 s	25.577797 dBm	
2:1	Trace A	125.320513 ms	-66.405094 dB	

**Graph 18: Preamble On Time**

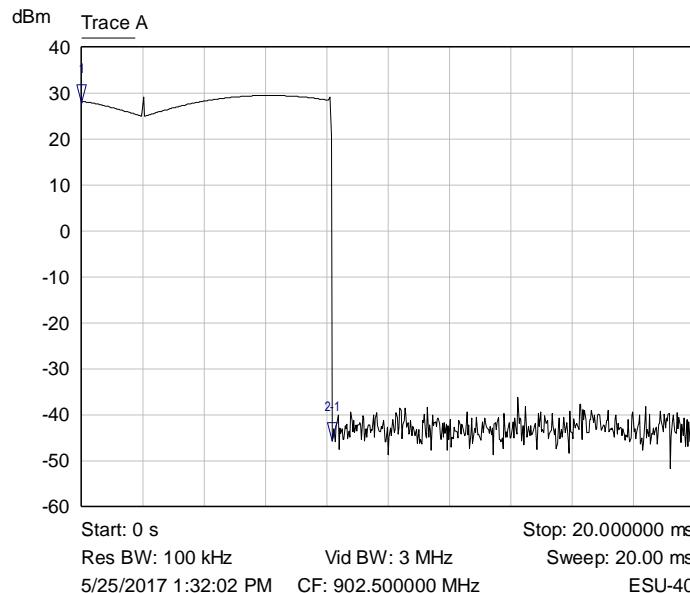


Mkr	Trace	X-Axis	Value	Notes
1	Trace A	0 s	27.868591 dBm	
2:1	Trace A	8.173077 ms	-73.456001 dB	


**Graph 19: Data On Time**

## 62.5 kHz LoRa Operation


The EUT transmissions on a single frequency must not exceed 0.4 seconds in a 20 second time period. The EUT transmits a total of 27 times in a 20 second period. One transmission is the preamble, lasting 125.321 ms and 26 data transmissions of 8.173 ms. Total on time at one frequency in 20 seconds is 337.019 ms (1 x 125.321) + (29 x 8.173). See the plots below.

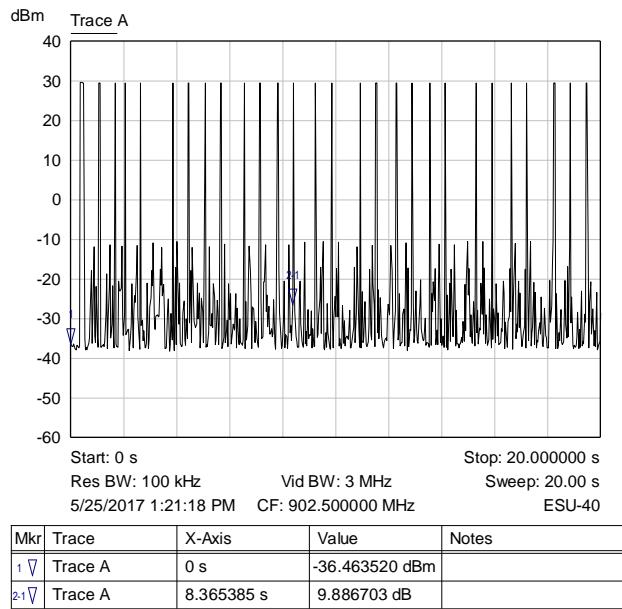

**Graph 20: Hits in 10 seconds**

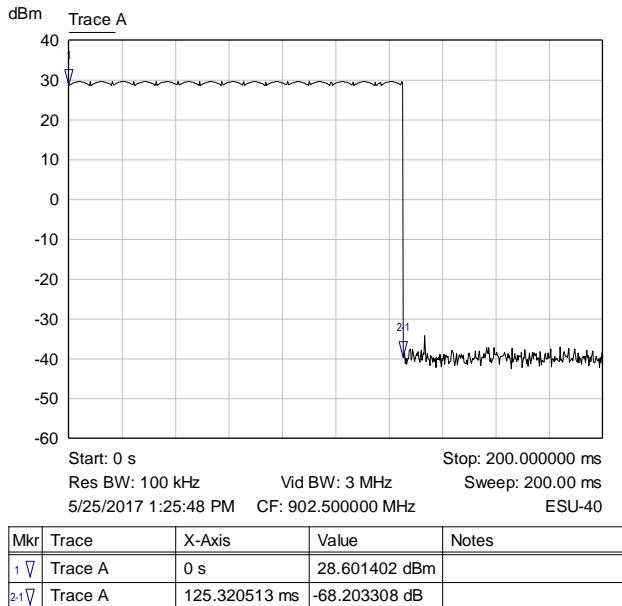


**Graph 21: Preamble On Time**

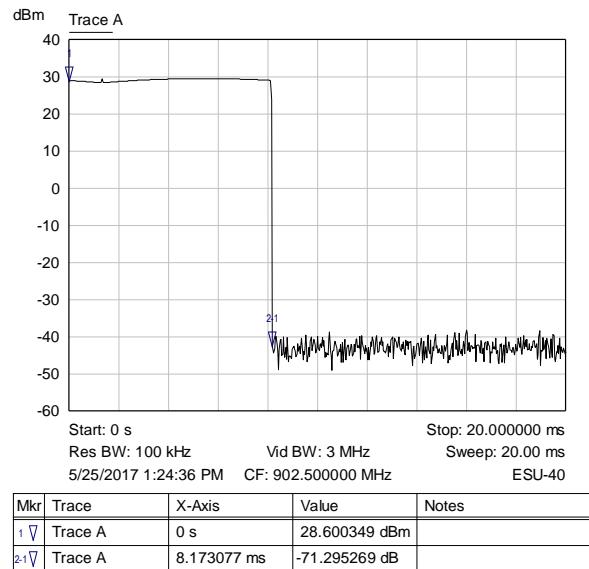



**Graph 22: Data On Time**

### 31.25 kHz LoRa Operation

The EUT transmissions on a single frequency must not exceed 0.4 seconds in a 20 second time period. The EUT transmits a total of 33 times in a 20 second period. One transmission is the preamble, lasting 128.481 ms and 32 data transmissions of 8.173 ms. Total on time at one frequency in 20 seconds is 390.017 ms  $(1 \times 128.481) + (32 \times 8.173)$ . See the plots below.

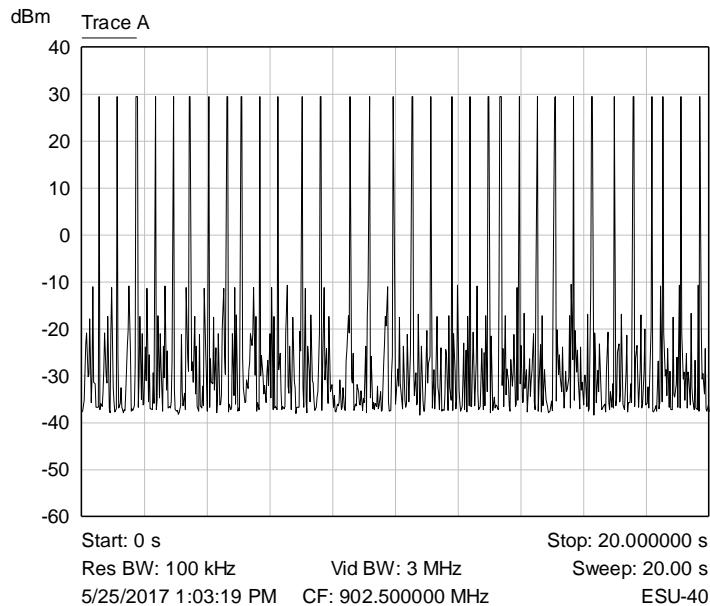

**Graph 23: Hits in 10 seconds**

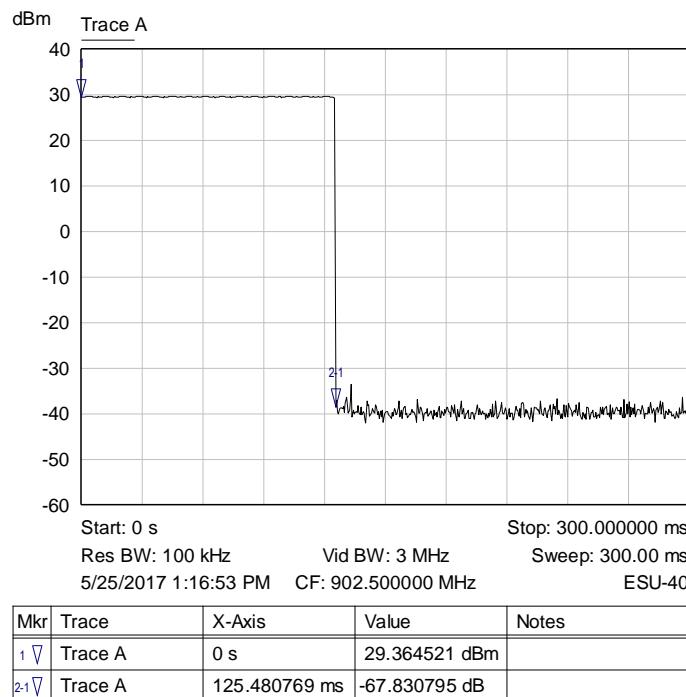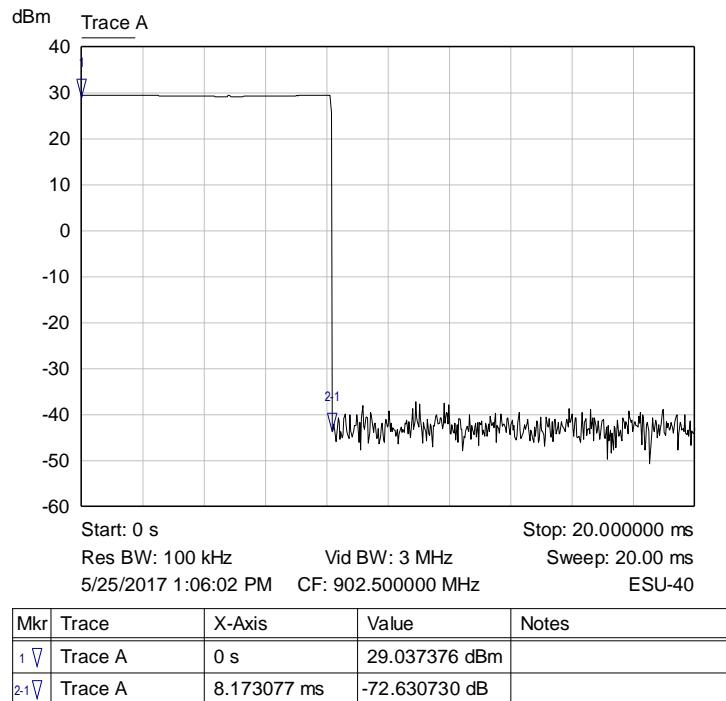
**Graph 24: Preamble On Time**

**Graph 25: Data On Time**

## Result

In the configurations tested, the EUT complied with the requirements of the specification.


### 6.2.6 §15.247(b)(3) Peak Output Power

The antenna used with the EUT has a gain of 2.64 dBi. The EUT uses 72 hopping channels. The limit for this device is 1 Watt or 30 dBm. Plots are shown below and the results of this testing are summarized in the table.


Operational Mode	Frequency (MHz)	Peak Output Power (dBm)	Peak Output Power (Watt)
250 kHz LoRa	902.50	29.63	0.91833
	914.75	29.54	0.89950
	927.35	29.45	0.88105
125 kHz LoRa	902.50	29.96	0.99083
	914.75	29.92	0.98175
	927.35	29.80	0.95499
62.5 kHz LoRa	902.50	29.99	0.99770
	914.75	29.89	0.97500
	927.35	29.76	0.94624
31.25 kHz LoRa	902.50	29.97	0.99312
	914.75	29.87	0.97051
	927.35	29.79	0.95280

## Result


In the configuration tested, the RF peak output power was less than 1 Watt (30 dBm); therefore, the EUT complied with the requirements of the specification.

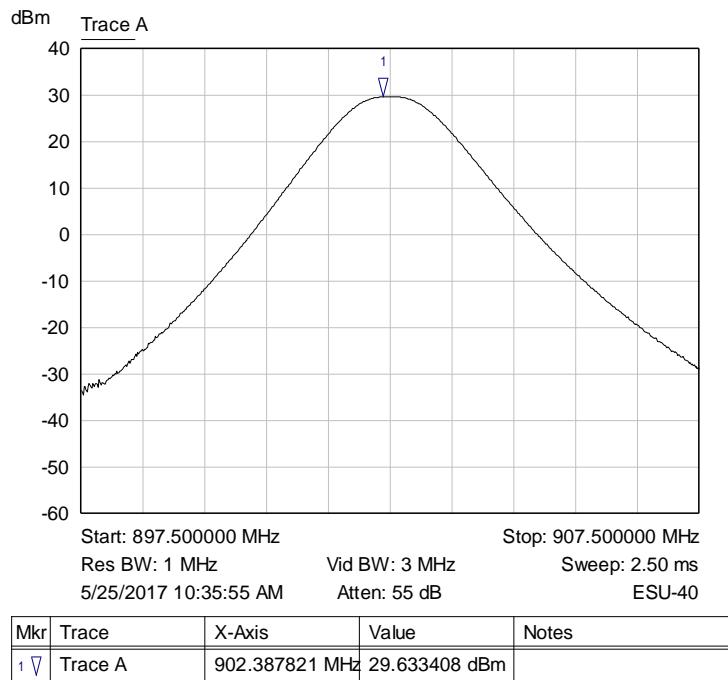


**Graph 26: Lowest Channel Output Power – 250 kHz LoRa**

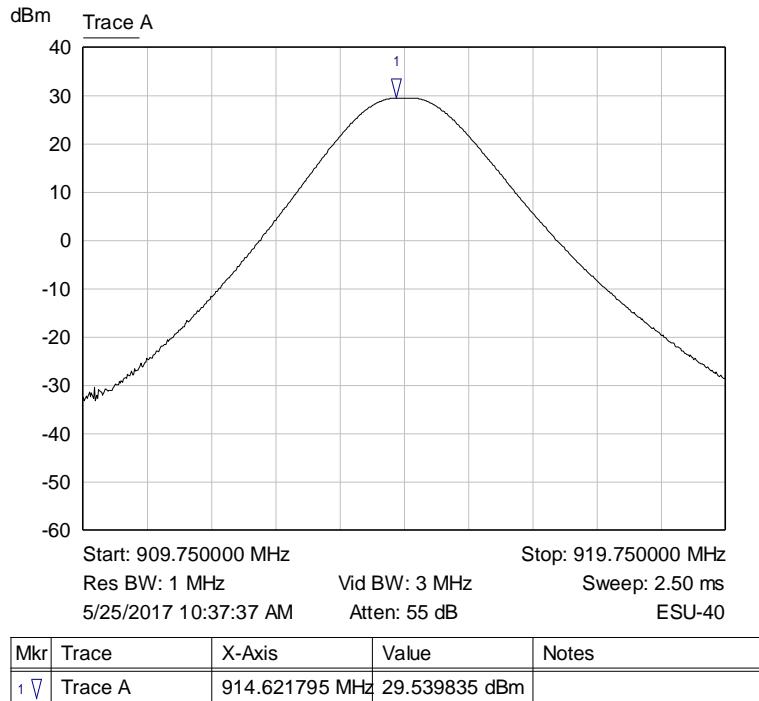


**Graph 27: Middle Channel Output Power – 250 kHz LoRa**

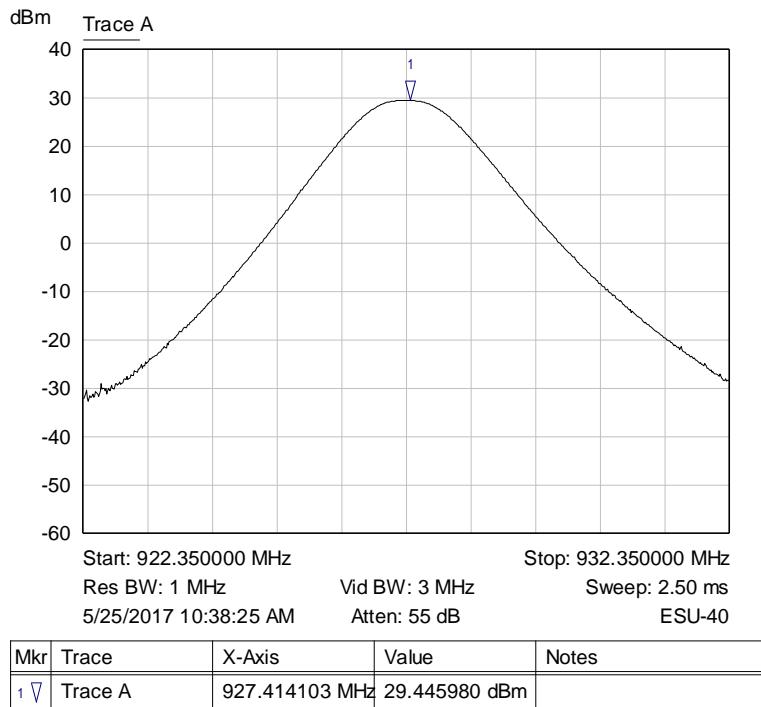


**Graph 28: Upper Channel Output Power – 250 kHz LoRa**

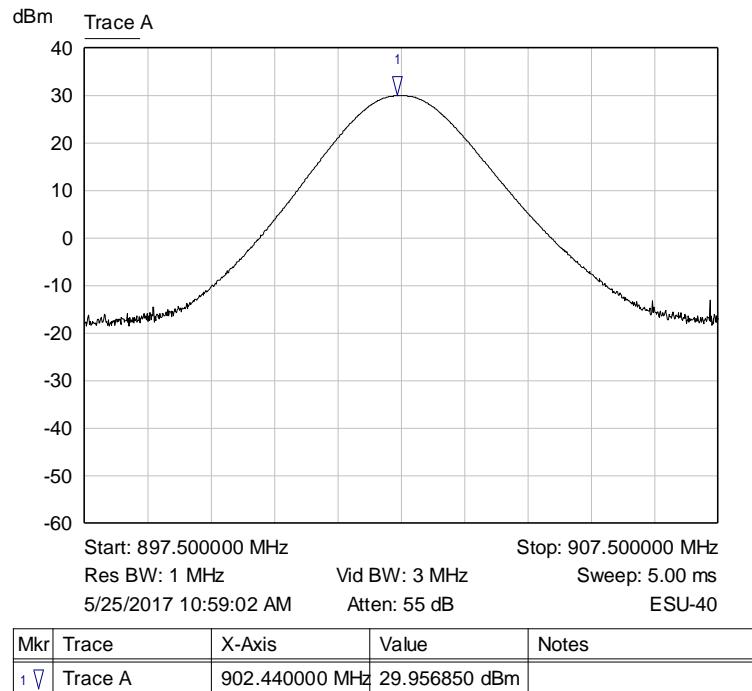


**Graph 29: Lowest Channel Output Power – 125 kHz LoRa**

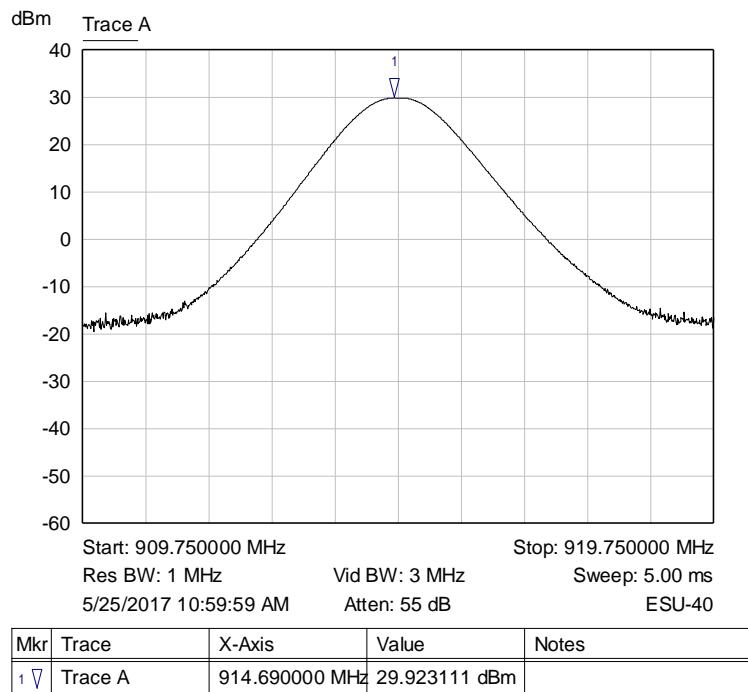


**Graph 30: Middle Channel Output Power – 125 kHz LoRa**

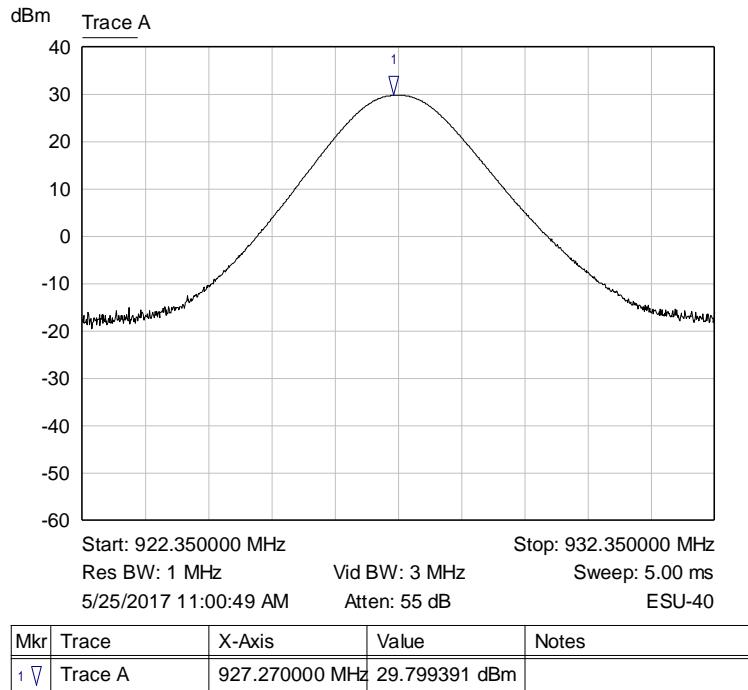


**Graph 31: Upper Channel Output Power – 125 kHz LoRa**

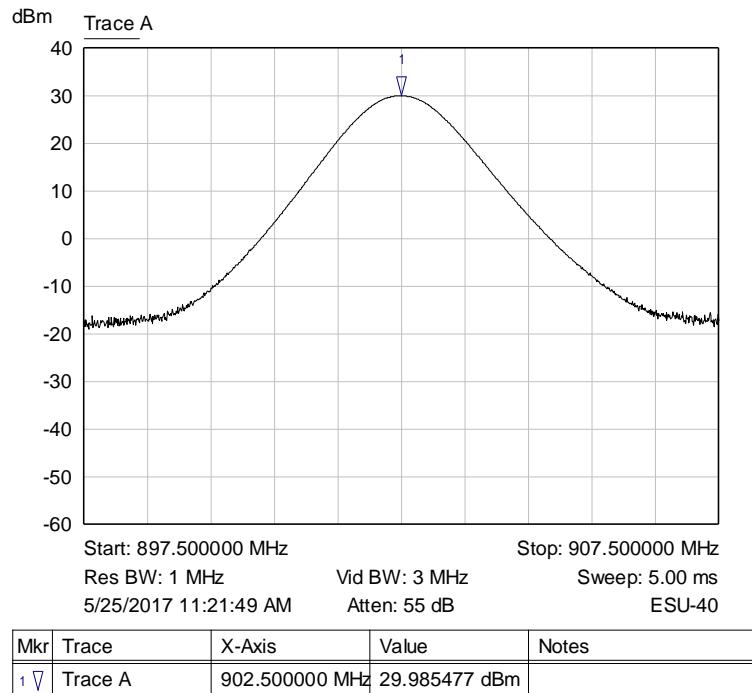


**Graph 32: Lowest Channel Output Power – 62.5 kHz LoRa**

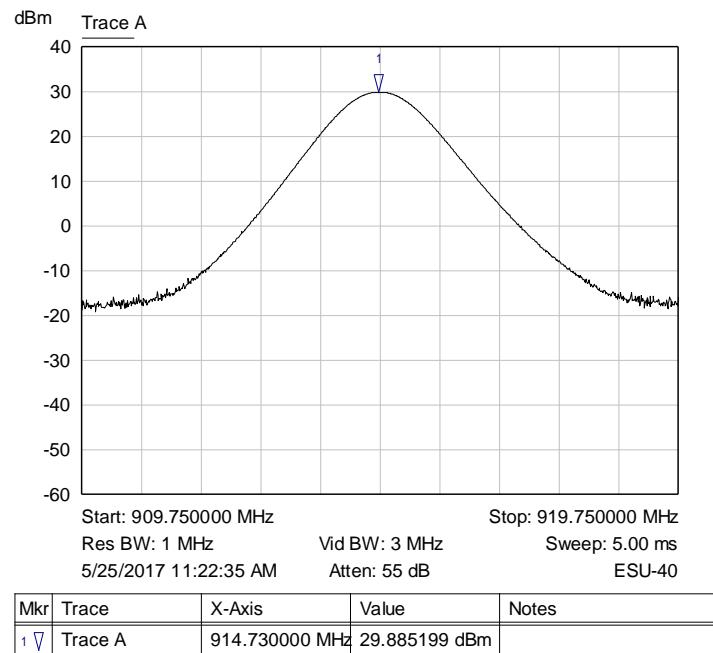


**Graph 33: Middle Channel Output Power – 62.5 kHz LoRa**

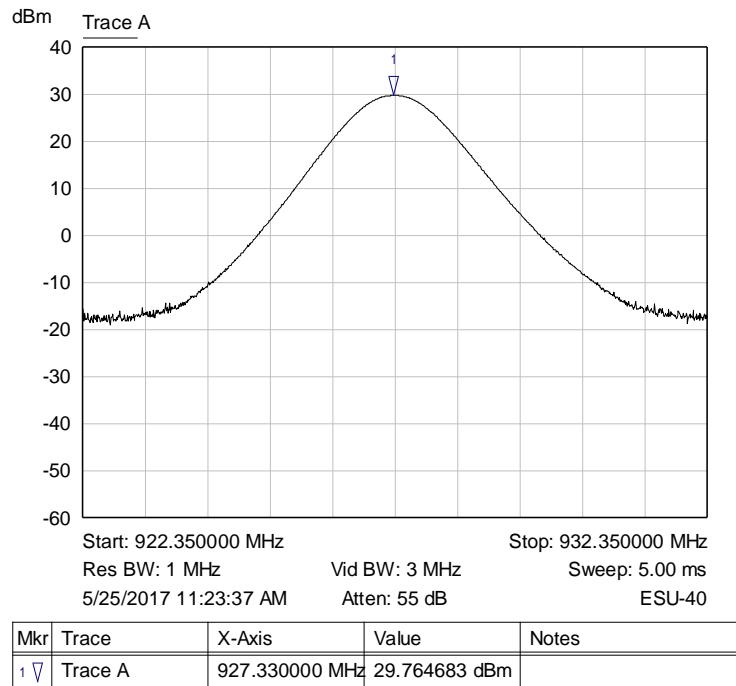


**Graph 34: Upper Channel Output Power – 62.5 kHz LoRa**

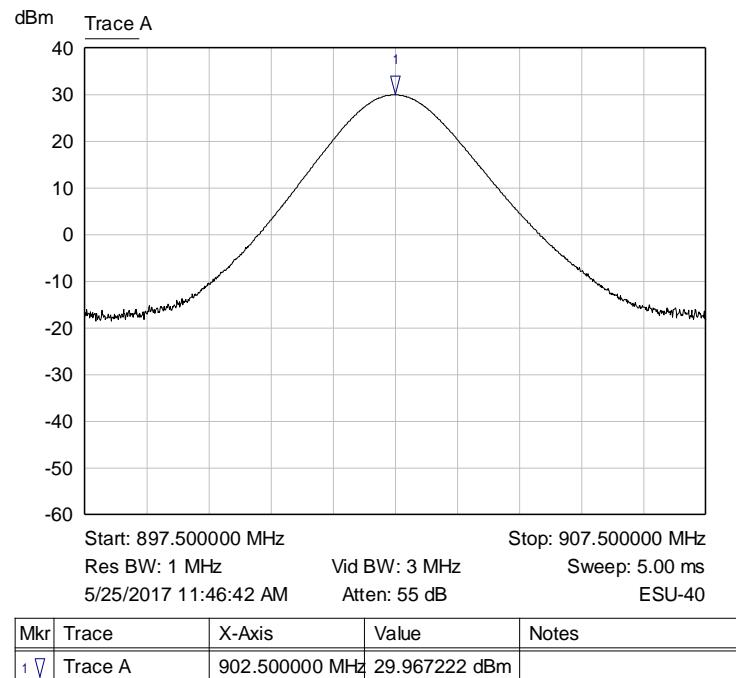

**Graph 35: Lowest Channel Output Power – 31.25 kHz LoRa**

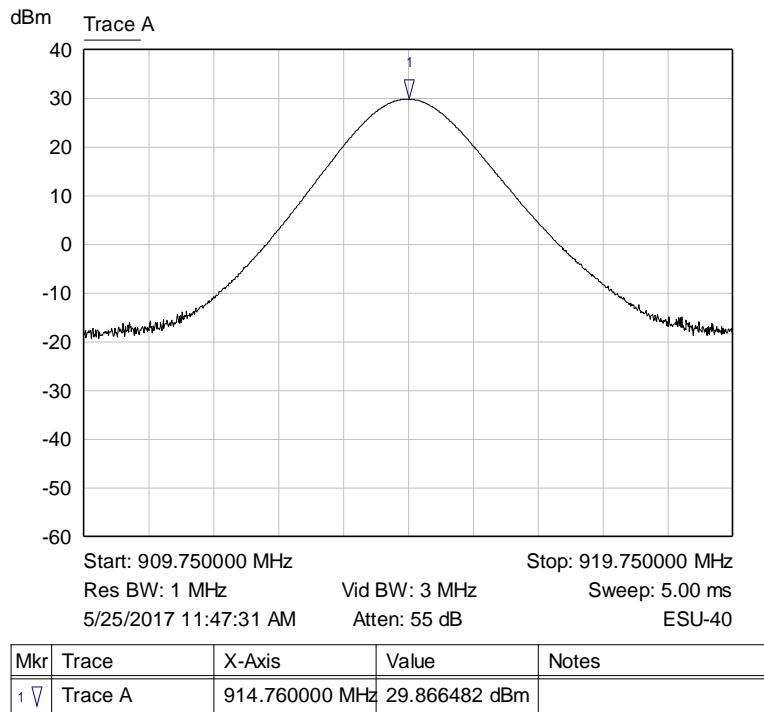

**Graph 36: Middle Channel Output Power – 31.25 kHz LoRa**

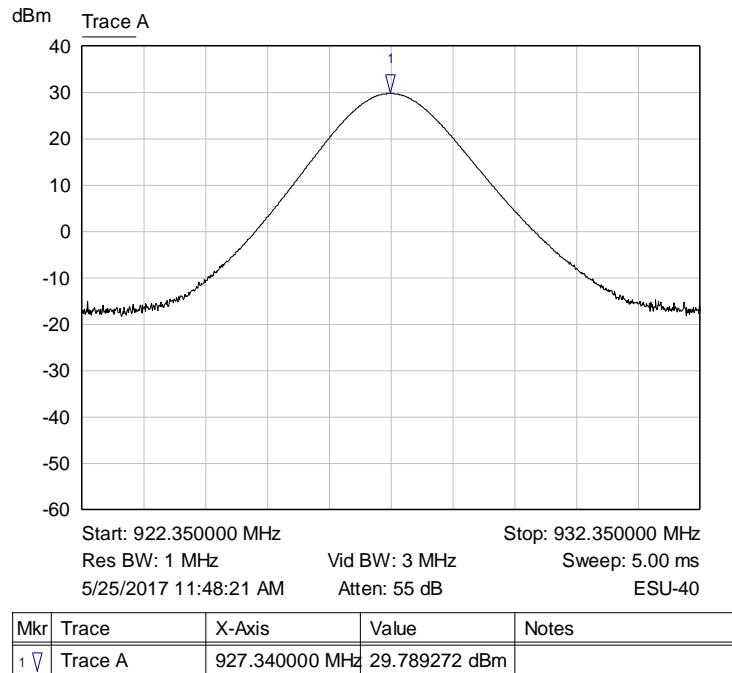

**Graph 37: Upper Channel Output Power – 31.25 kHz LoRa**

## 6.2.7 §15.247(d) Spurious Emissions

### Conducted Spurious Emissions

The frequency range from the lowest frequency generated or used in the device to the tenth harmonic of the highest fundamental frequency was investigated to measure any antenna-conducted emissions. The tables show the measurement data from spurious emissions noted across the frequency range when transmitting at the lowest frequency, middle frequency, and upper frequency. Shown below are plots with the EUT tuned to the upper and lower channels. These demonstrate compliance with the provisions of this section at the band edges.

The emissions must be attenuated 20 dB below the highest power level measured within the authorized band as measured with a 100 kHz RBW. The highest power measured using 250 kHz LoRa was 29.5 dBm; therefore, the criteria is  $29.5 - 20 = 9.5$  dBm. The highest power measured using 125 kHz LoRa was 29.5 dBm; therefore, the criteria is  $29.5 - 20 = 9.5$  dBm. The highest power measured using 62.5 kHz LoRa was 29.5 dBm; therefore, the criteria is  $29.63 - 20 = 9.5$  dBm. The highest power measured using 31.25 kHz LoRa was 29.5 dBm; therefore, the criteria is  $29.63 - 20 = 9.5$  dBm.

Frequency (MHz)	Corrected Level (dBm)	Criteria (dBm)	Margin (dB)
1805.00	-37.6	9.5	-47.1
2707.50	-35.9	9.5	-45.4
3610.00	-32.6	9.5	-42.1
4512.50	-31.4	9.5	-40.9
5415.00	-35.4	9.5	-44.9
6317.50	-34.9	9.5	-44.4
7220.00	-34.9	9.5	-44.4
8122.50	-34.8	9.5	-44.3
9025.00	-34.9	9.5	-44.4

Table 2: Transmitting on the Lowest Channel – 250 kHz LoRa

Frequency (MHz)	Corrected Level (dBm)	Criteria (dBm)	Margin (dB)
1829.50	-34.7	9.5	-44.2
2744.25	-34.0	9.5	-43.5
3659.00	-31.5	9.5	-41.0
4573.75	-31.0	9.5	-40.5
5488.50	-34.3	9.5	-43.8
6403.25	-34.0	9.5	-43.5
7318.00	-33.9	9.5	-43.4
8233.75	-34.1	9.5	-43.6

Frequency (MHz)	Corrected Level (dBm)	Criteria (dBm)	Margin (dB)
9147.50	-33.8	9.5	-43.3

**Table 3: Transmitting on the Middle Channel – 250 kHz LoRa**

Frequency (MHz)	Corrected Level (dBm)	Criteria (dBm)	Margin (dB)
1854.70	-33.6	9.5	-43.1
2782.05	-33.9	9.5	-43.4
3709.40	-34.5	9.5	-44.0
4636.75	-30.69	9.5	-40.2
5564.10	-33.9	9.5	-43.4
6491.45	-34.1	9.5	-43.6
7418.80	-34.0	9.5	-43.5
8346.15	-34.3	9.5	-43.8
9273.50	-34.2	9.5	-43.7

**Table 4: Transmitting on the Highest Channel – 250 kHz LoRa**

Frequency (MHz)	Corrected Level (dBm)	Criteria (dBm)	Margin (dB)
1805.00	-35.2	9.5	-44.7
2707.50	-34.3	9.5	-43.8
3610.00	-32.7	9.5	-42.2
4512.50	-31.1	9.5	-40.6
5415.00	-34.3	9.5	-43.8
6317.50	-32.7	9.5	-42.2
7220.00	-33.8	9.5	-43.3
8122.50	-33.8	9.5	-43.3
9025.00	-34.0	9.5	-43.5

**Table 5: Transmitting on the Lowest Channel – 125 kHz LoRa**

Frequency (MHz)	Corrected Level (dBm)	Criteria (dBm)	Margin (dB)
1829.50	-35.5	9.5	-45.0
2744.25	-34.4	9.5	-43.9

Frequency (MHz)	Corrected Level (dBm)	Criteria (dBm)	Margin (dB)
3659.00	-32.1	9.5	-41.6
4573.75	-30.1	9.5	-39.6
5488.50	-34.0	9.5	-43.5
6403.25	-33.2	9.5	-42.7
7318.00	-33.3	9.5	-42.8
8233.75	-34.4	9.5	-43.9
9147.50	-32.8	9.5	-42.3

**Table 6: Transmitting on the Middle Channel – 125 kHz LoRa**

Frequency (MHz)	Corrected Level (dBm)	Criteria (dBm)	Margin (dB)
1854.70	-34.3	9.5	-43.8
2782.05	-34.0	9.5	-43.5
3709.40	-32.6	9.5	-42.1
4636.75	-30.5	9.5	-40.0
5564.10	-33.8	9.5	-43.3
6491.45	-32.9	9.5	-42.4
7418.80	-34.6	9.5	-44.1
8346.15	-33.5	9.5	-43.0
9273.50	-33.0	9.5	-42.5

**Table 7: Transmitting on the Highest Channel – 125 kHz LoRa**

Frequency (MHz)	Corrected Level (dBm)	Criteria (dBm)	Margin (dB)
1805.00	-35.0	9.5	-44.5
2707.50	-33.7	9.5	-43.2
3610.00	-30.7	9.5	-40.2
4512.50	-30.4	9.5	-39.9
5415.00	-33.69	9.5	-43.2
6317.50	-33.8	9.5	-43.3
7220.00	-33.6	9.5	-43.1
8122.50	-34.0	9.5	-43.5

Frequency (MHz)	Corrected Level (dBm)	Criteria (dBm)	Margin (dB)
9025.00	-33.4	9.5	-42.9

**Table 8: Transmitting on the Lowest Channel – 62.5 kHz LoRa**

Frequency (MHz)	Corrected Level (dBm)	Criteria (dBm)	Margin (dB)
1829.50	-35.2	9.5	-44.7
2744.25	-32.2	9.5	-41.7
3659.00	-30.8	9.5	-40.3
4573.75	-29.8	9.5	-39.3
5488.50	-34.2	9.5	-43.7
6403.25	-33.9	9.5	-43.4
7318.00	-33.8	9.5	-43.3
8233.75	-34.2	9.5	-43.7
9147.50	-33.5	9.5	-43.0

**Table 9: Transmitting on the Middle Channel – 62.5 kHz LoRa**

Frequency (MHz)	Corrected Level (dBm)	Criteria (dBm)	Margin (dB)
1854.70	-35.2	9.5	-44.7
2782.05	-32.7	9.5	-42.2
3709.40	-31.1	9.5	-40.6
4636.75	-30.2	9.5	-39.7
5564.10	-34.4	9.5	-43.9
6491.45	-34.2	9.5	-43.7
7418.80	-34.1	9.5	-43.6
8346.15	-33.9	9.5	-43.4
9273.50	-33.2	9.5	-42.7

**Table 10: Transmitting on the Highest Channel – 62.5 kHz LoRa**

Frequency (MHz)	Corrected Level (dBm)	Criteria (dBm)	Margin (dB)
1805.00	-35.7	9.5	-45.2
2707.50	-32.6	9.5	-42.1

Frequency (MHz)	Corrected Level (dBm)	Criteria (dBm)	Margin (dB)
3610.00	-32.3	9.5	-41.8
4512.50	-31.0	9.5	-40.5
5415.00	-34.6	9.5	-44.1
6317.50	-34.0	9.5	-43.5
7220.00	-33.6	9.5	-43.1
8122.50	-33.6	9.5	-43.1
9025.00	-33.5	9.5	-43.0


**Table 11: Transmitting on the Lowest Channel – 31.25 kHz LoRa**


Frequency (MHz)	Corrected Level (dBm)	Criteria (dBm)	Margin (dB)
1829.50	-34.5	9.5	-44.0
2744.25	-34.0	9.5	-43.5
3659.00	-31.9	9.5	-41.4
4573.75	-29.7	9.5	-39.2
5488.50	-34.1	9.5	-43.6
6403.25	-33.8	9.5	-43.3
7318.00	-33.8	9.5	-43.3
8233.75	-33.9	9.5	-43.4
9147.50	-32.9	9.5	-42.4

**Table 12: Transmitting on the Middle Channel – 31.25 kHz LoRa**


Frequency (MHz)	Corrected Level (dBm)	Criteria (dBm)	Margin (dB)
1854.70	-35.2	9.5	-44.7
2782.05	-33.9	9.5	-43.4
3709.40	-31.6	9.5	-41.1
4636.75	-30.5	9.5	-40.0
5564.10	-33.8	9.5	-43.3
6491.45	-34.0	9.5	-43.5
7418.80	-33.9	9.5	-43.4
8346.15	-33.8	9.5	-43.3

Frequency (MHz)	Corrected Level (dBm)	Criteria (dBm)	Margin (dB)
9273.50	-33.8	9.5	-43.3

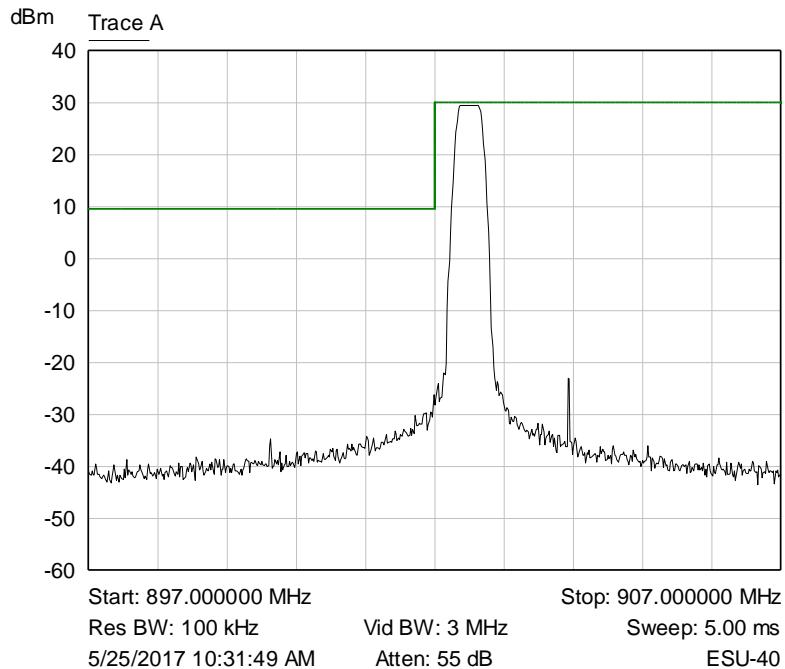**Table 13: Transmitting on the Highest Channel – 31.25 kHz LoRa**

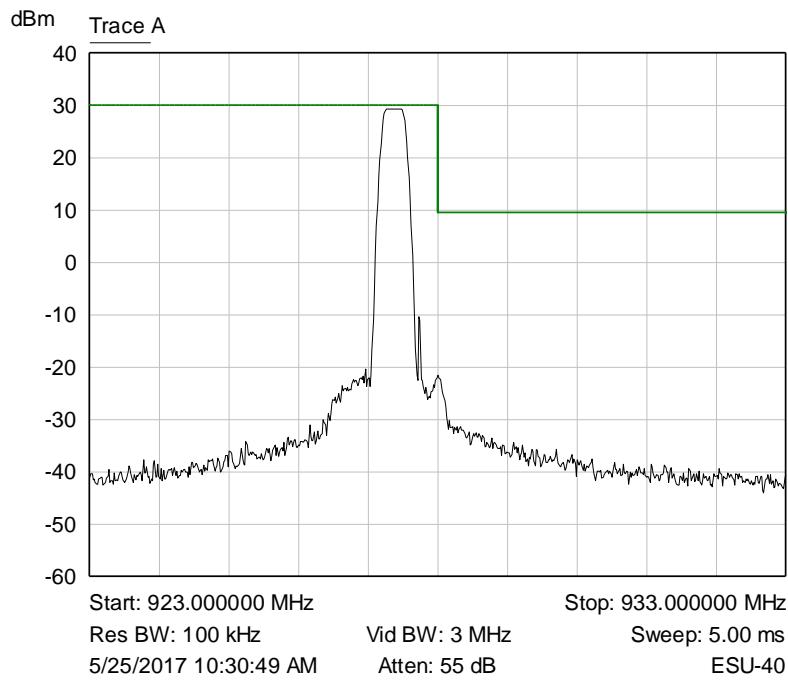**Graph 38: Lower Channel Plot – 250 kHz LoRa**

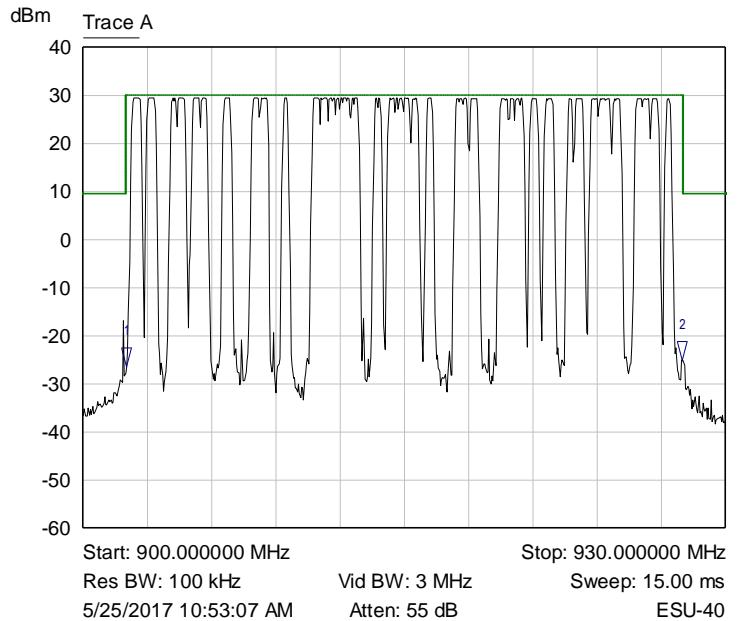


**Graph 39: Upper Channel Plot – 250 kHz LoRa**




Mkr	Trace	X-Axis	Value	Notes
1 ▽	Trace A	902.019231 MHz	-26.557213 dBm	
2 ▽	Trace A	927.980769 MHz	-25.120369 dBm	


**Graph 40: Operating Band Plot While Hopping – 250 kHz LoRa**

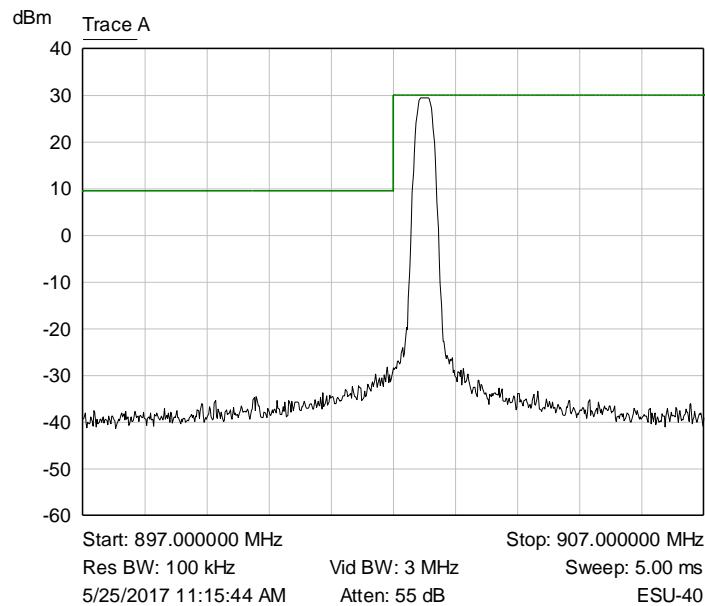


**Graph 41: Lower Channel Plot – 125 kHz LoRa**

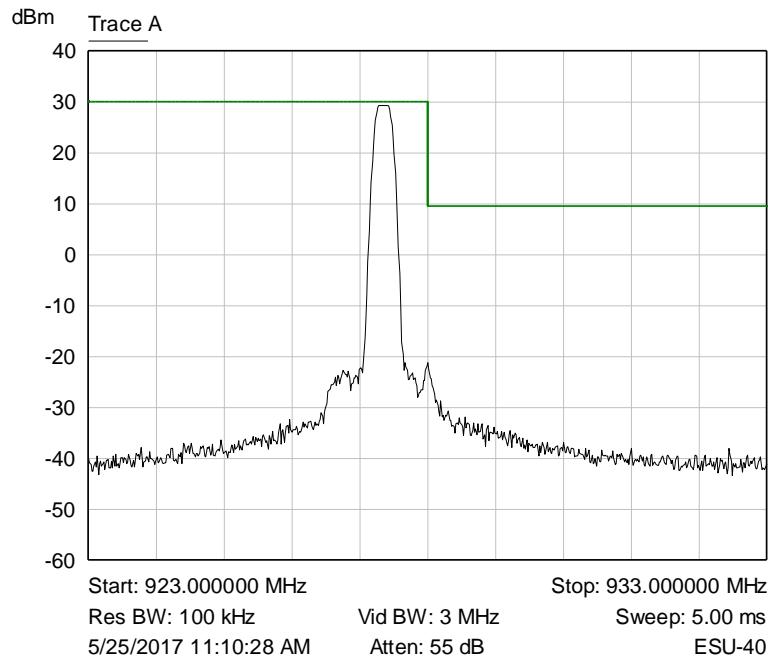


**Graph 42: Upper Channel Plot – 125 kHz LoRa**

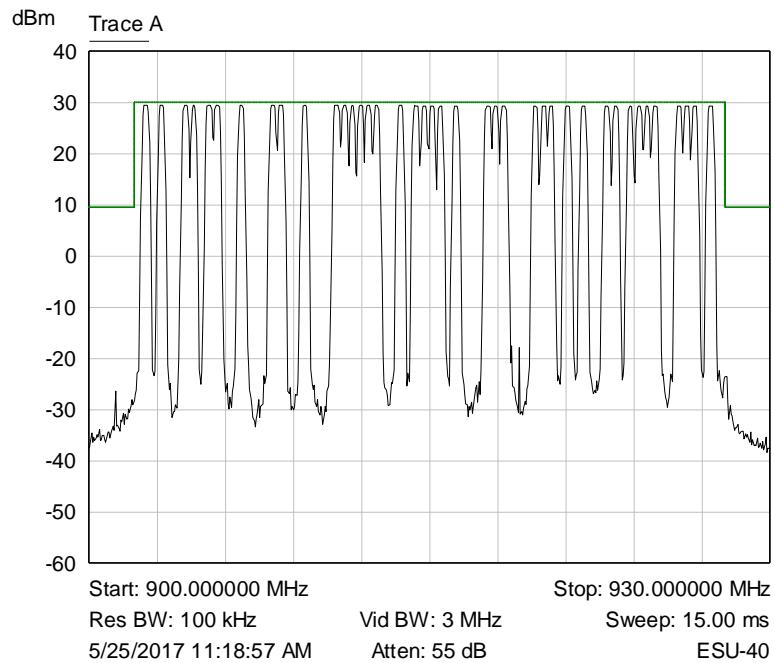


**Graph 43: Operating Band While Hopping – 125 kHz LoRa**

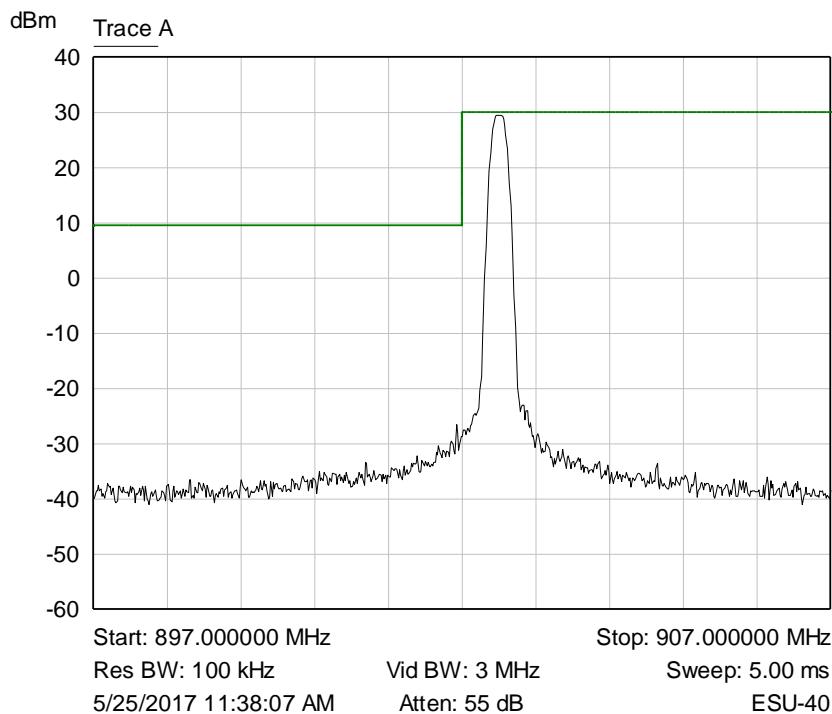



**Graph 44: Lower Channel Plot –62.5 kHz LoRa**

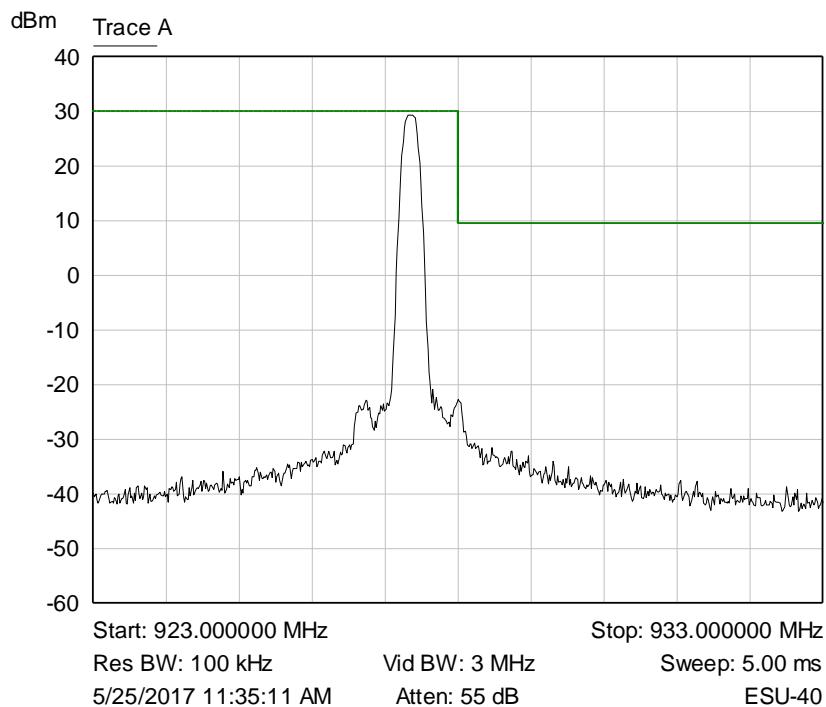


**Graph 45: Upper Channel Plot – 62.5 kHz LoRa**

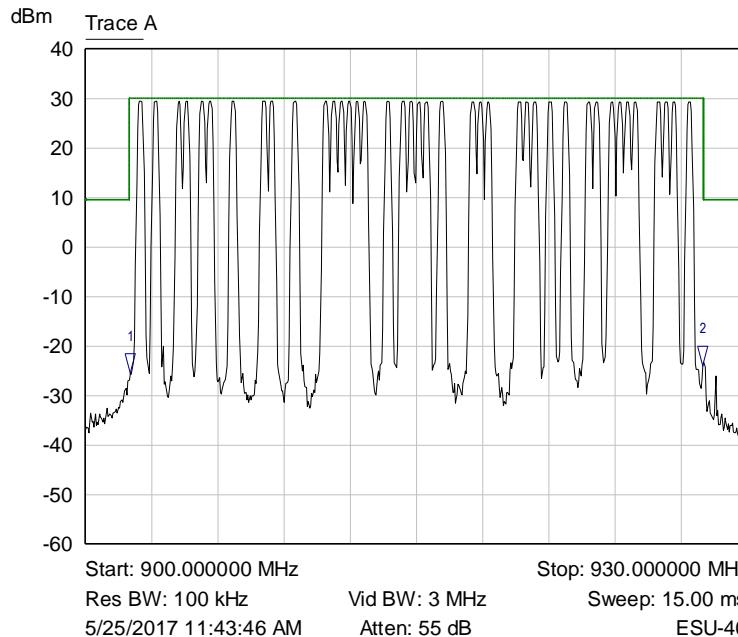

Mkr	Trace	X-Axis	Value	Notes
1 ▽	Trace A	902.019231 MHz	-25.566422 dBm	
2 ▽	Trace A	927.980769 MHz	-24.027164 dBm	

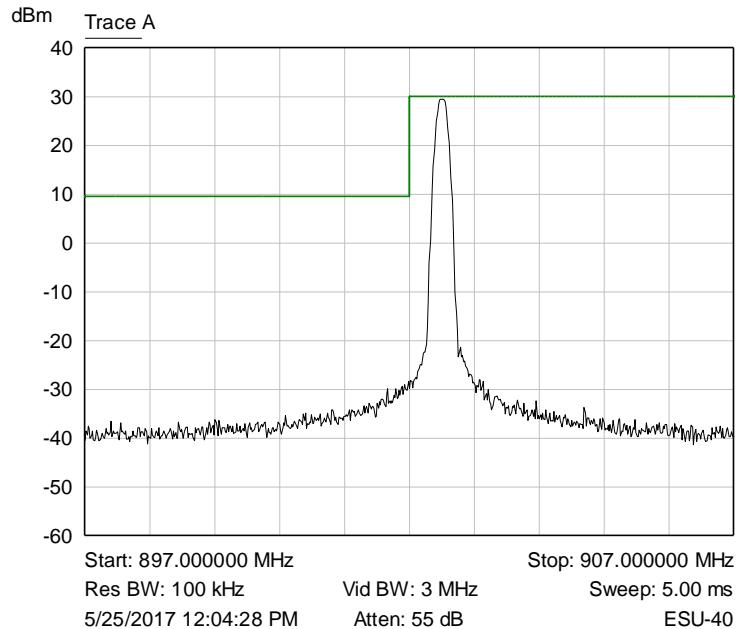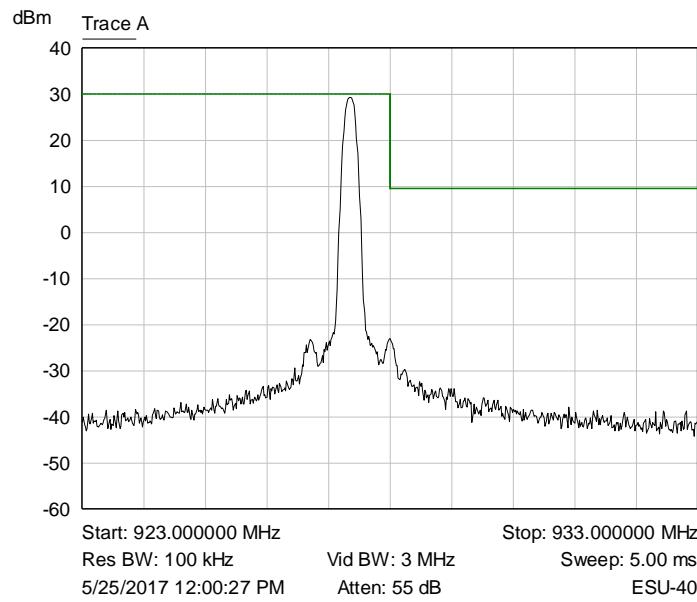**Graph 46: Operating Band While Hopping – 62.5 kHz LoRa**

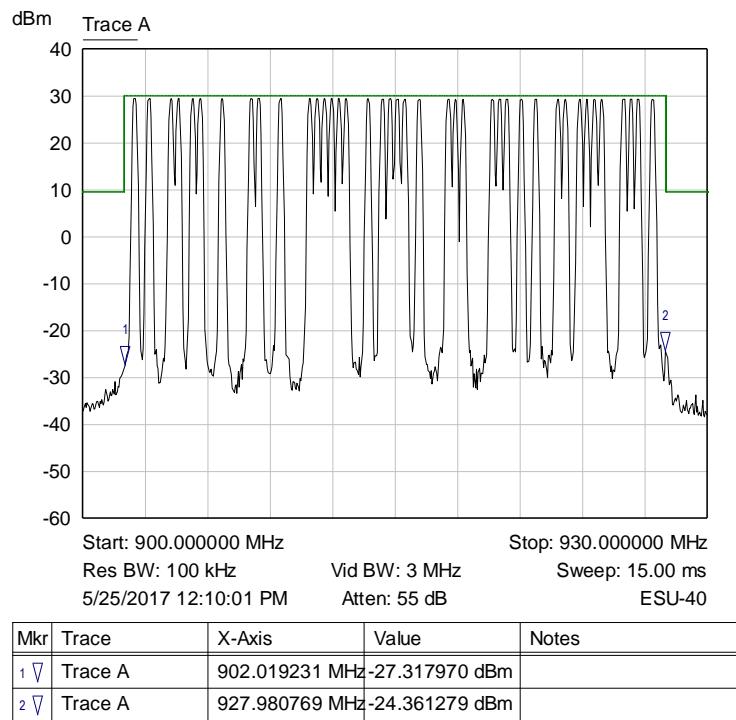**Graph 47: Lower Channel Plot – 31.25 kHz LoRa**

**Graph 48: Upper Channel Plot – 31.25 kHz LoRa**


**Graph 49: Operating Band While Hopping – 31.25 kHz LoRa**

## Result

Conducted spurious emissions were attenuated 20 dB or more from the fundamental; therefore, the EUT complies with the specification.

## Radiated Spurious Emissions in the Restricted Bands of §15.205

The frequency range from the lowest frequency generated or used in the device to the tenth harmonic of the highest fundamental emission was investigated to measure any radiated emissions in the restricted bands. The following tables show measurements of any emission that fell into the restricted bands of §15.205. The tables show the worst-case emission measured from the EUT. For frequencies above 12.5 GHz, a measurement distance of 1 meter was used. The noise floor was a minimum of 6 dB below the limit. The emissions in the restricted bands must meet the limits specified in §15.209. Tabular data for each of the spurious emissions is shown below for each of the units.

Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dB $\mu$ V)	Correction Factor (dB)	Field Strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2707.5	Peak	Vertical	18.9	34.0	52.9	74.0	-21.1
2707.5	Average	Vertical	16.8	34.0	50.8	54.0	-3.2
2707.5	Peak	Horizontal	15.0	34.0	49.0	74.0	-25.0
2707.5	Average	Horizontal	11.8	34.0	45.8	54.0	-8.2
3610.0	Peak	Vertical	11.7	37.2	48.9	74.0	-25.1
3610.0	Average	Vertical	6.7	37.2	43.9	54.0	-10.1

Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dB $\mu$ V)	Correction Factor (dB)	Field Strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
3610.0	Peak	Horizontal	14.1	37.2	51.3	74.0	-22.7
3610.0	Average	Horizontal	10.3	37.2	47.5	54.0	-6.5
4512.5	Peak	Vertical	6.1	38.9	45.0	74.0	-29.0
4512.5	Average	Vertical	-1.3	38.9	37.6	54.0	-16.4
4512.5	Peak	Horizontal	9.6	38.9	48.5	74.0	-25.5
4512.5	Average	Horizontal	5.4	38.9	44.3	54.0	-9.7
5415.0	Peak	Vertical	6.8	41.1	47.9	74.0	-26.1
5415.0	Average	Vertical	-1.6	41.1	39.5	54.0	-14.5
5415.0	Peak	Horizontal	8.1	41.1	49.2	74.0	-24.8
5415.0	Average	Horizontal	1.7	41.1	42.8	54.0	-11.2
7220.0	Peak	Vertical	5.5	44.3	49.8	74.0	-24.2
7220.0	Average	Vertical	-2.0	44.3	42.3	54.0	-11.7
7220.0	Peak	Horizontal	6.0	44.3	50.3	74.0	-23.7
7220.0	Average	Horizontal	0.1	44.3	44.4	54.0	-9.6
8122.5	Peak	Vertical	7.5	46.0	53.5	74.0	-20.5
8122.5	Average	Vertical	2.8	46.0	48.8	54.0	-5.2
8122.5	Peak	Horizontal	6.2	46.0	52.2	74.0	-21.8
8122.5	Average	Horizontal	-1.1	46.0	44.9	54.0	-9.1
9025.0	Peak	Vertical	13.4	47.5	60.9	74.0	-13.1
9025.0	Average	Vertical	4.7	47.5	52.2	54.0	-1.8
9025.0	Peak	Horizontal	9.1	47.5	56.6	74.0	-17.4
9025.0	Average	Horizontal	0.5	47.5	48.0	54.0	-6.0

**Table 14: Transmitting at the Lowest Frequency – 250 kHz LoRa**

Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dB $\mu$ V)	Correction Factor (dB)	Field Strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2744.3	Peak	Vertical	16.9	34.1	51.0	74.0	-23.0
2744.3	Average	Vertical	14.2	34.1	48.3	54.0	-5.7
2744.3	Peak	Horizontal	12.7	34.1	46.8	74.0	-27.2
2744.3	Average	Horizontal	8.4	34.1	42.5	54.0	-11.5
3659.0	Peak	Vertical	8.8	37.3	46.1	74.0	-27.9
3659.0	Average	Vertical	3.5	37.3	40.8	54.0	-13.2
3659.0	Peak	Horizontal	13.1	37.3	50.4	74.0	-23.6

Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dB $\mu$ V)	Correction Factor (dB)	Field Strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
3659.0	Average	Horizontal	9.0	37.3	46.3	54.0	-7.7
4573.8	Peak	Vertical	5.2	39.1	44.3	74.0	-29.7
4573.8	Average	Vertical	-2.3	39.1	36.8	54.0	-17.2
4573.8	Peak	Horizontal	6.8	39.1	45.9	74.0	-28.1
4573.8	Average	Horizontal	1.3	39.1	40.4	54.0	-13.6
5488.5	Peak	Vertical	5.3	41.3	46.6	74.0	-27.4
5488.5	Average	Vertical	-4.7	41.3	36.6	54.0	-17.4
5488.5	Peak	Horizontal	5.6	41.3	46.9	74.0	-27.1
5488.5	Average	Horizontal	-2.2	41.3	39.1	54.0	-14.9
7318.0	Peak	Vertical	5.2	44.6	49.8	74.0	-24.2
7318.0	Average	Vertical	-2.3	44.6	42.3	54.0	-11.7
7318.0	Peak	Horizontal	6.9	44.6	51.5	74.0	-22.5
7318.0	Average	Horizontal	0.6	44.6	45.2	54.0	-8.8
8232.8	Peak	Vertical	5.6	46.2	51.8	74.0	-22.2
8232.8	Average	Vertical	-1.3	46.2	44.9	54.0	-9.1
8232.8	Peak	Horizontal	6.9	46.2	53.1	74.0	-20.9
8232.8	Average	Horizontal	-3.2	46.2	43.0	54.0	-11.0
9147.5	Peak	Vertical	11.2	47.6	58.8	74.0	-15.2
9147.5	Average	Vertical	0.2	47.6	47.8	54.0	-6.2
9147.5	Peak	Horizontal	6.4	47.6	54.0	74.0	-20.0
9147.5	Average	Horizontal	1.9	47.6	49.5	54.0	-4.5

**Table 15: Transmitting at the Middle Frequency – 250 kHz LoRa**

Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dB $\mu$ V)	Correction Factor (dB)	Field Strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2782.1	Peak	Vertical	12.9	34.3	47.2	74.0	-26.8
2782.1	Average	Vertical	8.6	34.3	42.9	54.0	-11.1
2782.1	Peak	Horizontal	10.0	34.3	44.3	74.0	-29.7
2782.1	Average	Horizontal	5.2	34.3	39.5	54.0	-14.5
3709.5	Peak	Vertical	9.0	37.5	46.5	74.0	-27.5
3709.5	Average	Vertical	5.3	37.5	42.8	54.0	-11.2
3709.5	Peak	Horizontal	12.9	37.5	50.4	74.0	-23.6
3709.5	Average	Horizontal	9.0	37.5	46.5	54.0	-7.5

Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dB $\mu$ V)	Correction Factor (dB)	Field Strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4636.8	Peak	Vertical	6.1	39.2	45.3	74.0	-28.7
4636.8	Average	Vertical	-2.1	39.2	37.1	54.0	-16.9
4636.8	Peak	Horizontal	8.3	39.2	47.5	74.0	-26.5
4636.8	Average	Horizontal	2.6	39.2	41.8	54.0	-12.2
5564.2	Peak	Vertical	5.0	41.4	46.4	74.0	-27.6
5564.2	Average	Vertical	-5.7	41.4	35.7	54.0	-18.3
5564.2	Peak	Horizontal	6.7	41.4	48.1	74.0	-25.9
5564.2	Average	Horizontal	-0.4	41.4	41.0	54.0	-13.0
7418.9	Peak	Vertical	5.4	44.9	50.3	74.0	-23.7
7418.9	Average	Vertical	-2.3	44.9	42.6	54.0	-11.4
7418.9	Peak	Horizontal	5.3	44.9	50.2	74.0	-23.8
7418.9	Average	Horizontal	-1.9	44.9	43.0	54.0	-11.0
8346.2	Peak	Vertical	5.9	46.4	52.3	74.0	-21.7
8346.2	Average	Vertical	-0.3	46.4	46.1	54.0	-7.9
8346.2	Peak	Horizontal	4.0	46.4	50.4	74.0	-23.6
8346.2	Average	Horizontal	-7.0	46.4	39.4	54.0	-14.6
9273.5	Peak	Vertical	8.2	47.7	55.9	74.0	-18.1
9273.5	Average	Vertical	-1.9	47.7	45.8	54.0	-8.2
9273.5	Peak	Horizontal	4.2	47.7	51.9	74.0	-22.1
9273.5	Average	Horizontal	-2.2	47.7	45.5	54.0	-8.5

**Table 16: Transmitting at the Highest Frequency – 250 kHz LoRa**

Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dB $\mu$ V)	Correction Factor (dB)	Field Strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2707.5	Peak	Vertical	18.0	34.0	52.0	74.0	-22.0
2707.5	Average	Vertical	15.9	34.0	49.9	54.0	-4.1
2707.5	Peak	Horizontal	14.9	34.0	48.9	74.0	-25.1
2707.5	Average	Horizontal	11.9	34.0	45.9	54.0	-8.1
3610.0	Peak	Vertical	9.2	37.2	46.4	74.0	-27.6
3610.0	Average	Vertical	4.3	37.2	41.5	54.0	-12.5
3610.0	Peak	Horizontal	13.3	37.2	50.5	74.0	-23.5
3610.0	Average	Horizontal	9.6	37.2	46.8	54.0	-7.2
4512.5	Peak	Vertical	5.4	38.9	44.3	74.0	-29.7

Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dB $\mu$ V)	Correction Factor (dB)	Field Strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4512.5	Average	Vertical	-1.6	38.9	37.3	54.0	-16.7
4512.5	Peak	Horizontal	9.4	38.9	48.3	74.0	-25.7
4512.5	Average	Horizontal	4.4	38.9	43.3	54.0	-10.7
5415.0	Peak	Vertical	6.6	41.1	47.7	74.0	-26.3
5415.0	Average	Vertical	-0.5	41.1	40.6	54.0	-13.4
5415.0	Peak	Horizontal	7.2	41.1	48.3	74.0	-25.7
5415.0	Average	Horizontal	0.7	41.1	41.8	54.0	-12.2
7220.0	Peak	Vertical	5.7	44.3	50.0	74.0	-24.0
7220.0	Average	Vertical	-2.7	44.3	41.6	54.0	-12.4
7220.0	Peak	Horizontal	6.0	44.3	50.3	74.0	-23.7
7220.0	Average	Horizontal	-1.3	44.3	43.0	54.0	-11.0
8122.5	Peak	Vertical	7.6	46.0	53.6	74.0	-20.4
8122.5	Average	Vertical	-1.8	46.0	44.2	54.0	-9.8
8122.5	Peak	Horizontal	5.2	46.0	51.2	74.0	-22.8
8122.5	Average	Horizontal	-2.2	46.0	43.8	54.0	-10.2
9025.0	Peak	Vertical	12.6	47.5	60.1	74.0	-13.9
9025.0	Average	Vertical	4.2	47.5	51.7	54.0	-2.3
9025.0	Peak	Horizontal	6.9	47.5	54.4	74.0	-19.6
9025.0	Average	Horizontal	2.0	47.5	49.5	54.0	-4.5

**Table 17: Transmitting at the Lowest Frequency – 125 kHz LoRa**

Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dB $\mu$ V)	Correction Factor (dB)	Field Strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2744.3	Peak	Vertical	16.9	34.1	51.0	74.0	-23.0
2744.3	Average	Vertical	14.2	34.1	48.3	54.0	-5.7
2744.3	Peak	Horizontal	12.4	34.1	46.5	74.0	-27.5
2744.3	Average	Horizontal	8.5	34.1	42.6	54.0	-11.4
3659.0	Peak	Vertical	8.8	37.3	46.1	74.0	-27.9
3659.0	Average	Vertical	1.9	37.3	39.2	54.0	-14.8
3659.0	Peak	Horizontal	13.4	37.3	50.7	74.0	-23.3
3659.0	Average	Horizontal	9.6	37.3	46.9	54.0	-7.1
4573.8	Peak	Vertical	4.6	39.1	43.7	74.0	-30.3
4573.8	Average	Vertical	-3.2	39.1	35.9	54.0	-18.1

Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dB $\mu$ V)	Correction Factor (dB)	Field Strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4573.8	Peak	Horizontal	7.7	39.1	46.8	74.0	-27.2
4573.8	Average	Horizontal	2.3	39.1	41.4	54.0	-12.6
5488.5	Peak	Vertical	4.7	41.3	46.0	74.0	-28.0
5488.5	Average	Vertical	-5.3	41.3	36.0	54.0	-18.0
5488.5	Peak	Horizontal	5.1	41.3	46.4	74.0	-27.6
5488.5	Average	Horizontal	-2.5	41.3	38.8	54.0	-15.2
7318.0	Peak	Vertical	4.9	44.6	49.5	74.0	-24.5
7318.0	Average	Vertical	-2.9	44.6	41.7	54.0	-12.3
7318.0	Peak	Horizontal	5.7	44.6	50.3	74.0	-23.7
7318.0	Average	Horizontal	-0.3	44.6	44.3	54.0	-9.7
8232.8	Peak	Vertical	5.9	46.2	52.1	74.0	-21.9
8232.8	Average	Vertical	-1.1	46.2	45.1	54.0	-8.9
8232.8	Peak	Horizontal	4.6	46.2	50.8	74.0	-23.2
8232.8	Average	Horizontal	-3.5	46.2	42.7	54.0	-11.3
9147.5	Peak	Vertical	11.1	47.6	58.7	74.0	-15.3
9147.5	Average	Vertical	3.0	47.6	50.6	54.0	-3.4
9147.5	Peak	Horizontal	6.4	47.6	54.0	74.0	-20.0
9147.5	Average	Horizontal	1.5	47.6	49.1	54.0	-4.9

**Table 18: Transmitting at the Middle Frequency – 125 kHz LoRa**

Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dB $\mu$ V)	Correction Factor (dB)	Field Strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2782.1	Peak	Vertical	12.4	34.3	46.7	74.0	-27.3
2782.1	Average	Vertical	9.2	34.3	43.5	54.0	-10.5
2782.1	Peak	Horizontal	9.7	34.3	44.0	74.0	-30.0
2782.1	Average	Horizontal	4.5	34.3	38.8	54.0	-15.2
3709.5	Peak	Vertical	10.4	37.5	47.9	74.0	-26.1
3709.5	Average	Vertical	5.9	37.5	43.4	54.0	-10.6
3709.5	Peak	Horizontal	12.9	37.5	50.4	74.0	-23.6
3709.5	Average	Horizontal	9.1	37.5	46.6	54.0	-7.4
4636.8	Peak	Vertical	6.2	39.2	45.4	74.0	-28.6
4636.8	Average	Vertical	-2.6	39.2	36.6	54.0	-17.4
4636.8	Peak	Horizontal	7.3	39.2	46.5	74.0	-27.5

Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dB $\mu$ V)	Correction Factor (dB)	Field Strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4636.8	Average	Horizontal	1.8	39.2	41.0	54.0	-13.0
5564.2	Peak	Vertical	4.4	41.4	45.8	74.0	-28.2
5564.2	Average	Vertical	-2.5	41.4	38.9	54.0	-15.1
5564.2	Peak	Horizontal	6.2	41.4	47.6	74.0	-26.4
5564.2	Average	Horizontal	-1.8	41.4	39.6	54.0	-14.4
7418.9	Peak	Vertical	4.2	44.9	49.1	74.0	-24.9
7418.9	Average	Vertical	-4.5	44.9	40.4	54.0	-13.6
7418.9	Peak	Horizontal	5.4	44.9	50.3	74.0	-23.7
7418.9	Average	Horizontal	-2.5	44.9	42.4	54.0	-11.6
8346.2	Peak	Vertical	4.0	46.4	50.4	74.0	-23.6
8346.2	Average	Vertical	-5.5	46.4	40.9	54.0	-13.1
8346.2	Peak	Horizontal	7.1	46.4	53.5	74.0	-20.5
8346.2	Average	Horizontal	-0.2	46.4	46.2	54.0	-7.8
9273.5	Peak	Vertical	6.2	47.7	53.9	74.0	-20.1
9273.5	Average	Vertical	0.3	47.7	48.0	54.0	-6.0
9273.5	Peak	Horizontal	5.2	47.7	52.9	74.0	-21.1
9273.5	Average	Horizontal	-0.7	47.7	47.0	54.0	-7.0

**Table 19: Transmitting at the Highest Frequency –125 kHz LoRa**

Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dB $\mu$ V)	Correction Factor (dB)	Field Strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2707.5	Peak	Vertical	18.2	34.0	52.2	74.0	-21.8
2707.5	Average	Vertical	16.3	34.0	50.3	54.0	-3.7
2707.5	Peak	Horizontal	14.7	34.0	48.7	74.0	-25.3
2707.5	Average	Horizontal	11.7	34.0	45.7	54.0	-8.3
3610.0	Peak	Vertical	10.3	37.2	47.5	74.0	-26.5
3610.0	Average	Vertical	6.0	37.2	43.2	54.0	-10.8
3610.0	Peak	Horizontal	13.2	37.2	50.4	74.0	-23.6
3610.0	Average	Horizontal	9.8	37.2	47.0	54.0	-7.0
4512.5	Peak	Vertical	5.2	38.9	44.1	74.0	-29.9
4512.5	Average	Vertical	-0.9	38.9	38.0	54.0	-16.0
4512.5	Peak	Horizontal	7.3	38.9	46.2	74.0	-27.8
4512.5	Average	Horizontal	3.2	38.9	42.1	54.0	-11.9

Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dB $\mu$ V)	Correction Factor (dB)	Field Strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
5415.0	Peak	Vertical	5.5	41.1	46.6	74.0	-27.4
5415.0	Average	Vertical	-2.8	41.1	38.3	54.0	-15.7
5415.0	Peak	Horizontal	7.0	41.1	48.1	74.0	-25.9
5415.0	Average	Horizontal	0.3	41.1	41.4	54.0	-12.6
7220.0	Peak	Vertical	5.3	44.3	49.6	74.0	-24.4
7220.0	Average	Vertical	-1.2	44.3	43.1	54.0	-10.9
7220.0	Peak	Horizontal	4.5	44.3	48.8	74.0	-25.2
7220.0	Average	Horizontal	-3.4	44.3	40.9	54.0	-13.1
8122.5	Peak	Vertical	6.4	46.0	52.4	74.0	-21.6
8122.5	Average	Vertical	0.5	46.0	46.5	54.0	-7.5
8122.5	Peak	Horizontal	5.5	46.0	51.5	74.0	-22.5
8122.5	Average	Horizontal	-2.3	46.0	43.7	54.0	-10.3
9025.0	Peak	Vertical	12.7	47.5	60.2	74.0	-13.8
9025.0	Average	Vertical	5.9	47.5	53.4	54.0	-0.6
9025.0	Peak	Horizontal	5.6	47.5	53.1	74.0	-20.9
9025.0	Average	Horizontal	0.2	47.5	47.7	54.0	-6.3

**Table 20: Transmitting at the Lowest Frequency – 62.5 kHz LoRa**

Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dB $\mu$ V)	Correction Factor (dB)	Field Strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2744.3	Peak	Vertical	17.7	34.1	51.8	74.0	-22.2
2744.3	Average	Vertical	15.6	34.1	49.7	54.0	-4.3
2744.3	Peak	Horizontal	12.8	34.1	46.9	74.0	-27.1
2744.3	Average	Horizontal	8.8	34.1	42.9	54.0	-11.1
3659.0	Peak	Vertical	8.7	37.3	46.0	74.0	-28.0
3659.0	Average	Vertical	3.9	37.3	41.2	54.0	-12.8
3659.0	Peak	Horizontal	13.1	37.3	50.4	74.0	-23.6
3659.0	Average	Horizontal	9.6	37.3	46.9	54.0	-7.1
4573.8	Peak	Vertical	5.2	39.1	44.3	74.0	-29.7
4573.8	Average	Vertical	-2.8	39.1	36.3	54.0	-17.7
4573.8	Peak	Horizontal	7.6	39.1	46.7	74.0	-27.3
4573.8	Average	Horizontal	2.3	39.1	41.4	54.0	-12.6
5488.5	Peak	Vertical	5.4	41.3	46.7	74.0	-27.3

Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dB $\mu$ V)	Correction Factor (dB)	Field Strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
5488.5	Average	Vertical	-5.0	41.3	36.3	54.0	-17.7
5488.5	Peak	Horizontal	6.2	41.3	47.5	74.0	-26.5
5488.5	Average	Horizontal	-2.1	41.3	39.2	54.0	-14.8
7318.0	Peak	Vertical	5.3	44.6	49.9	74.0	-24.1
7318.0	Average	Vertical	-2.3	44.6	42.3	54.0	-11.7
7318.0	Peak	Horizontal	7.1	44.6	51.7	74.0	-22.3
7318.0	Average	Horizontal	0.9	44.6	45.5	54.0	-8.5
8232.8	Peak	Vertical	5.9	46.2	52.1	74.0	-21.9
8232.8	Average	Vertical	0.2	46.2	46.4	54.0	-7.6
8232.8	Peak	Horizontal	6.4	46.2	52.6	74.0	-21.4
8232.8	Average	Horizontal	-4.3	46.2	41.9	54.0	-12.1
9147.5	Peak	Vertical	11.8	47.6	59.4	74.0	-14.6
9147.5	Average	Vertical	4.1	47.6	51.7	54.0	-2.3
9147.5	Peak	Horizontal	6.0	47.6	53.6	74.0	-20.4
9147.5	Average	Horizontal	0.6	47.6	48.2	54.0	-5.8

**Table 21: Transmitting at the Middle Frequency – 62.5 kHz LoRa**

Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dB $\mu$ V)	Correction Factor (dB)	Field Strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2782.1	Peak	Vertical	13.1	34.3	47.4	74.0	-26.6
2782.1	Average	Vertical	10.3	34.3	44.6	54.0	-9.4
2782.1	Peak	Horizontal	9.2	34.3	43.5	74.0	-30.5
2782.1	Average	Horizontal	2.6	34.3	36.9	54.0	-17.1
3709.5	Peak	Vertical	8.7	37.5	46.2	74.0	-27.8
3709.5	Average	Vertical	4.1	37.5	41.6	54.0	-12.4
3709.5	Peak	Horizontal	12.4	37.5	49.9	74.0	-24.1
3709.5	Average	Horizontal	8.9	37.5	46.4	54.0	-7.6
4636.8	Peak	Vertical	5.4	39.2	44.6	74.0	-29.4
4636.8	Average	Vertical	-3.1	39.2	36.1	54.0	-17.9
4636.8	Peak	Horizontal	7.8	39.2	47.0	74.0	-27.0
4636.8	Average	Horizontal	2.0	39.2	41.2	54.0	-12.8
5564.2	Peak	Vertical	4.4	41.4	45.8	74.0	-28.2
5564.2	Average	Vertical	-6.5	41.4	34.9	54.0	-19.1

Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dB $\mu$ V)	Correction Factor (dB)	Field Strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
5564.2	Peak	Horizontal	5.4	41.4	46.8	74.0	-27.2
5564.2	Average	Horizontal	-1.7	41.4	39.7	54.0	-14.3
7418.9	Peak	Vertical	3.6	44.9	48.5	74.0	-25.5
7418.9	Average	Vertical	-5.0	44.9	39.9	54.0	-14.1
7418.9	Peak	Horizontal	4.8	44.9	49.7	74.0	-24.3
7418.9	Average	Horizontal	-1.9	44.9	43.0	54.0	-11.0
8346.2	Peak	Vertical	5.0	46.4	51.4	74.0	-22.6
8346.2	Average	Vertical	-2.3	46.4	44.1	54.0	-9.9
8346.2	Peak	Horizontal	4.3	46.4	50.7	74.0	-23.3
8346.2	Average	Horizontal	-6.0	46.4	40.4	54.0	-13.6
9273.5	Peak	Vertical	7.9	47.7	55.6	74.0	-18.4
9273.5	Average	Vertical	0.2	47.7	47.9	54.0	-6.1
9273.5	Peak	Horizontal	5.4	47.7	53.1	74.0	-20.9
9273.5	Average	Horizontal	0.1	47.7	47.8	54.0	-6.2

**Table 22: Transmitting at the Highest Frequency – 62.5 kHz LoRa**

Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dB $\mu$ V)	Correction Factor (dB)	Field Strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2707.5	Peak	Vertical	18.4	34.0	52.4	74.0	-21.6
2707.5	Average	Vertical	16.5	34.0	50.5	54.0	-3.5
2707.5	Peak	Horizontal	14.6	34.0	48.6	74.0	-25.4
2707.5	Average	Horizontal	12.2	34.0	46.2	54.0	-7.8
3610.0	Peak	Vertical	7.6	37.2	44.8	74.0	-29.2
3610.0	Average	Vertical	1.7	37.2	38.9	54.0	-15.1
3610.0	Peak	Horizontal	13.1	37.2	50.3	74.0	-23.7
3610.0	Average	Horizontal	9.8	37.2	47.0	54.0	-7.0
4512.5	Peak	Vertical	5.2	38.9	44.1	74.0	-29.9
4512.5	Average	Vertical	-1.1	38.9	37.8	54.0	-16.2
4512.5	Peak	Horizontal	8.5	38.9	47.4	74.0	-26.6
4512.5	Average	Horizontal	3.5	38.9	42.4	54.0	-11.6
5415.0	Peak	Vertical	6.2	41.1	47.3	74.0	-26.7
5415.0	Average	Vertical	-2.4	41.1	38.7	54.0	-15.3
5415.0	Peak	Horizontal	6.7	41.1	47.8	74.0	-26.2

Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dB $\mu$ V)	Correction Factor (dB)	Field Strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
5415.0	Average	Horizontal	0.7	41.1	41.8	54.0	-12.2
7220.0	Peak	Vertical	5.0	44.3	49.3	74.0	-24.7
7220.0	Average	Vertical	-3.0	44.3	41.3	54.0	-12.7
7220.0	Peak	Horizontal	5.1	44.3	49.4	74.0	-24.6
7220.0	Average	Horizontal	-1.0	44.3	43.3	54.0	-10.7
8122.5	Peak	Vertical	6.9	46.0	52.9	74.0	-21.1
8122.5	Average	Vertical	2.2	46.0	48.2	54.0	-5.8
8122.5	Peak	Horizontal	3.7	46.0	49.7	74.0	-24.3
8122.5	Average	Horizontal	-2.6	46.0	43.4	54.0	-10.6
9025.0	Peak	Vertical	12.2	47.5	59.7	74.0	-14.3
9025.0	Average	Vertical	6.0	47.5	53.5	54.0	-0.5
9025.0	Peak	Horizontal	5.5	47.5	53.0	74.0	-21.0
9025.0	Average	Horizontal	0.1	47.5	47.6	54.0	-6.4

**Table 23: Transmitting at the Lowest Frequency – 31.25 kHz LoRa**

Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dB $\mu$ V)	Correction Factor (dB)	Field Strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2744.3	Peak	Vertical	17.0	34.1	51.1	74.0	-22.9
2744.3	Average	Vertical	14.6	34.1	48.7	54.0	-5.3
2744.3	Peak	Horizontal	13.4	34.1	47.5	74.0	-26.5
2744.3	Average	Horizontal	11.0	34.1	45.1	54.0	-8.9
3659.0	Peak	Vertical	8.5	37.3	45.8	74.0	-28.2
3659.0	Average	Vertical	3.3	37.3	40.6	54.0	-13.4
3659.0	Peak	Horizontal	12.8	37.3	50.1	74.0	-23.9
3659.0	Average	Horizontal	9.1	37.3	46.4	54.0	-7.6
4573.8	Peak	Vertical	12.1	39.1	51.2	74.0	-22.8
4573.8	Average	Vertical	8.4	39.1	47.5	54.0	-6.5
4573.8	Peak	Horizontal	7.6	39.1	46.7	74.0	-27.3
4573.8	Average	Horizontal	2.3	39.1	41.4	54.0	-12.6
5488.5	Peak	Vertical	4.1	41.3	45.4	74.0	-28.6
5488.5	Average	Vertical	-4.8	41.3	36.5	54.0	-17.5
5488.5	Peak	Horizontal	5.4	41.3	46.7	74.0	-27.3
5488.5	Average	Horizontal	-2.3	41.3	39.0	54.0	-15.0

Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dB $\mu$ V)	Correction Factor (dB)	Field Strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
7318.0	Peak	Vertical	4.9	44.6	49.5	74.0	-24.5
7318.0	Average	Vertical	-2.9	44.6	41.7	54.0	-12.3
7318.0	Peak	Horizontal	6.6	44.6	51.2	74.0	-22.8
7318.0	Average	Horizontal	0.9	44.6	45.5	54.0	-8.5
8232.8	Peak	Vertical	5.6	46.2	51.8	74.0	-22.2
8232.8	Average	Vertical	-0.4	46.2	45.8	54.0	-8.2
8232.8	Peak	Horizontal	4.8	46.2	51.0	74.0	-23.0
8232.8	Average	Horizontal	-4.5	46.2	41.7	54.0	-12.3
9147.5	Peak	Vertical	11.5	47.6	59.1	74.0	-14.9
9147.5	Average	Vertical	4.3	47.6	51.9	54.0	-2.1
9147.5	Peak	Horizontal	5.3	47.6	52.9	74.0	-21.1
9147.5	Average	Horizontal	1.3	47.6	48.9	54.0	-5.1

**Table 24: Transmitting at the Middle Frequency – 31.25 kHz LoRa**

Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dB $\mu$ V)	Correction Factor (dB)	Field Strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2782.1	Peak	Vertical	12.8	34.3	47.1	74.0	-26.9
2782.1	Average	Vertical	10.1	34.3	44.4	54.0	-9.6
2782.1	Peak	Horizontal	10.0	34.3	44.3	74.0	-29.7
2782.1	Average	Horizontal	5.8	34.3	40.1	54.0	-13.9
3709.5	Peak	Vertical	8.9	37.5	46.4	74.0	-27.6
3709.5	Average	Vertical	4.1	37.5	41.6	54.0	-12.4
3709.5	Peak	Horizontal	13.4	37.5	50.9	74.0	-23.1
3709.5	Average	Horizontal	10.1	37.5	47.6	54.0	-6.4
4636.8	Peak	Vertical	5.3	39.2	44.5	74.0	-29.5
4636.8	Average	Vertical	-2.6	39.2	36.6	54.0	-17.4
4636.8	Peak	Horizontal	7.5	39.2	46.7	74.0	-27.3
4636.8	Average	Horizontal	1.6	39.2	40.8	54.0	-13.2
5564.2	Peak	Vertical	4.7	41.4	46.1	74.0	-27.9
5564.2	Average	Vertical	-5.0	41.4	36.4	54.0	-17.6
5564.2	Peak	Horizontal	5.7	41.4	47.1	74.0	-26.9
5564.2	Average	Horizontal	-1.1	41.4	40.3	54.0	-13.7
7418.9	Peak	Vertical	4.7	44.9	49.6	74.0	-24.4

Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dB $\mu$ V)	Correction Factor (dB)	Field Strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
7418.9	Average	Vertical	-3.4	44.9	41.5	54.0	-12.5
7418.9	Peak	Horizontal	5.9	44.9	50.8	74.0	-23.2
7418.9	Average	Horizontal	-0.5	44.9	44.4	54.0	-9.6
8346.2	Peak	Vertical	5.0	46.4	51.4	74.0	-22.6
8346.2	Average	Vertical	-1.3	46.4	45.1	54.0	-8.9
8346.2	Peak	Horizontal	3.5	46.4	49.9	74.0	-24.1
8346.2	Average	Horizontal	-6.3	46.4	40.1	54.0	-13.9
9273.5	Peak	Vertical	5.3	47.7	53.0	74.0	-21.0
9273.5	Average	Vertical	-1.1	47.7	46.6	54.0	-7.4
9273.5	Peak	Horizontal	4.4	47.7	52.1	74.0	-21.9
9273.5	Average	Horizontal	-2.1	47.7	45.6	54.0	-8.4

**Table 25: Transmitting at the Highest Frequency – 31.25 kHz LoRa**

## Result


The radiated spurious emissions in the restricted bands met the limits specified in §15.209; therefore, the EUT complies with the specification


### 6.2.8 §15.247(f) Hybrid Operation

With the frequency hopping turned off, the power spectral density in any 3 kHz band shall not exceed 8 dBm during any interval of continuous operation. The table and plots below show the maximum conducted average power spectral density and maximum conducted output power when the EUT is in hybrid operation using the maximum power settings shown in section 2.2 of this report.

Operational Mode	Frequency (MHz)	Conducted Average Power Output (dBm)	Conducted Average Power Spectral Density (dBm)
250 kHz LoRa	902.50	23.61	7.90
	914.75	23.16	7.69
	927.35	24.09	7.93
125 kHz LoRa	902.50	20.10	7.36
	914.75	20.93	6.57
	927.35	21.60	7.76
62.5 kHz LoRa	902.50	17.27	5.77
	914.75	18.17	6.84
	927.35	18.95	7.73


Operational Mode	Frequency (MHz)	Conducted Average Power Output (dBm)	Conducted Average Power Spectral Density (dBm)
31.25 kHz LoRa	902.50	15.59	5.78
	914.75	15.79	6.51
	927.35	16.56	7.59

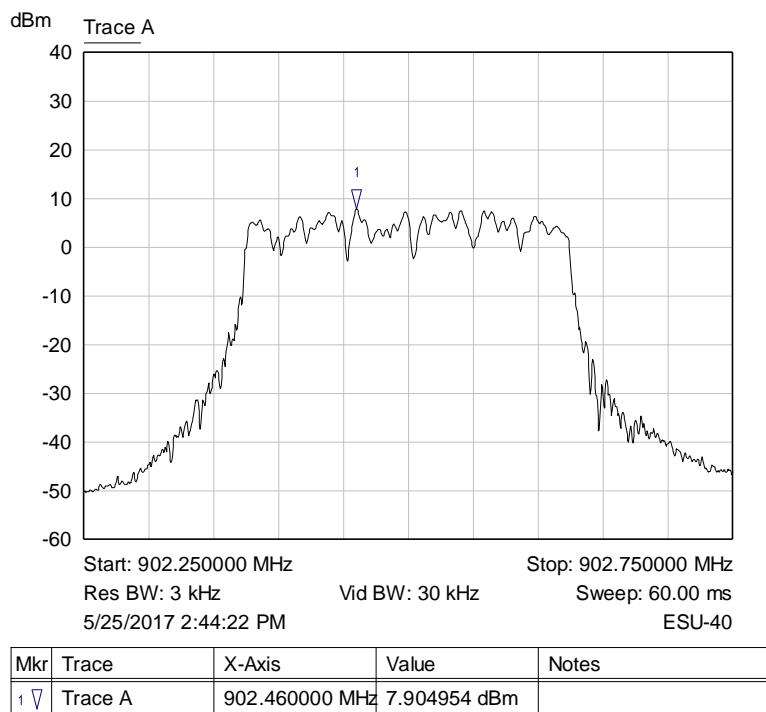**Table 26: Average PSD and Power in Hybrid Operation**

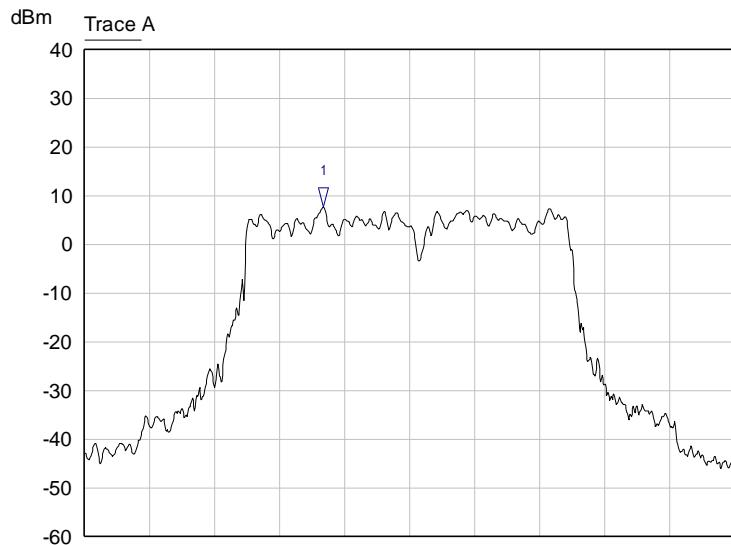**Graph 50: Lower Channel PSD – 250 kHz LoRa**




Mkr	Trace	X-Axis	Value	Notes
1 	Trace A	914.683500 MHz	7.685077 dBm	

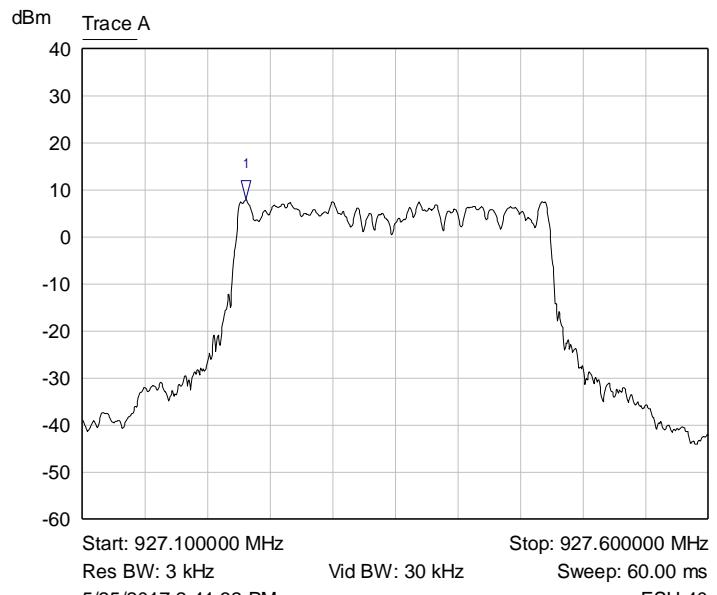**Graph 51: Middle Channel PSD – 250 kHz LoRa**




Mkr	Trace	X-Axis	Value	Notes
1 	Trace A	927.230500 MHz	7.931772 dBm	


**Graph 52: Upper Channel PSD – 250 kHz LoRa**

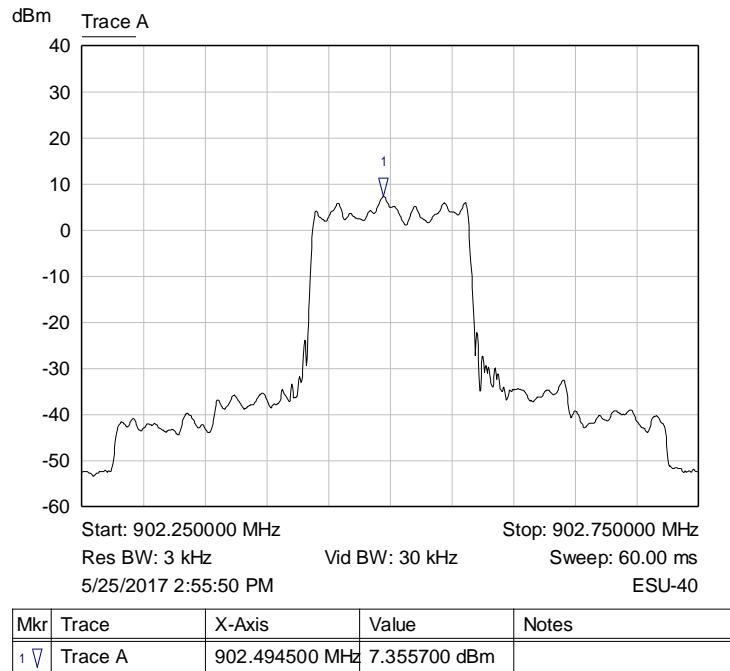


**Graph 53: Lower Channel PSD – 125kHz LoRa**

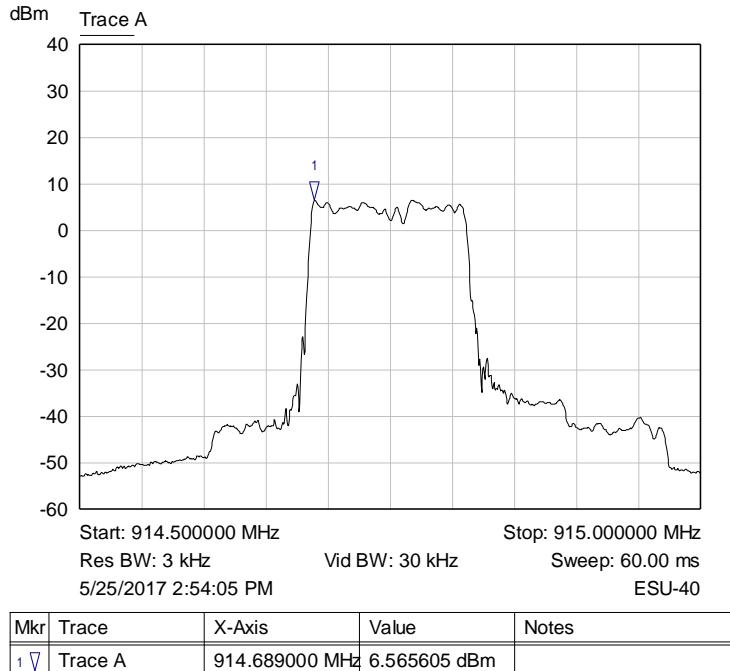


**Graph 54: Middle Channel PSD – 125 kHz LoRa**

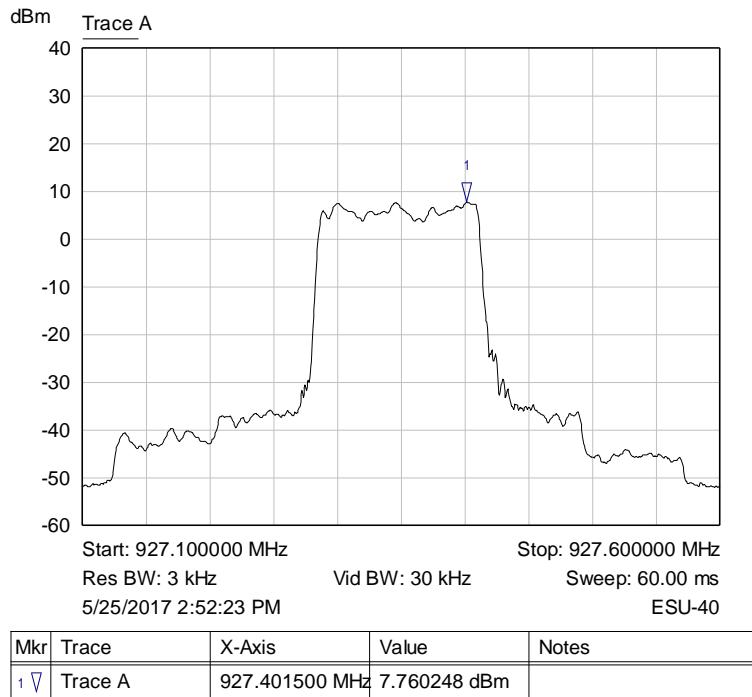


**Graph 55: Upper Channel PSD – 125 kHz LoRa**

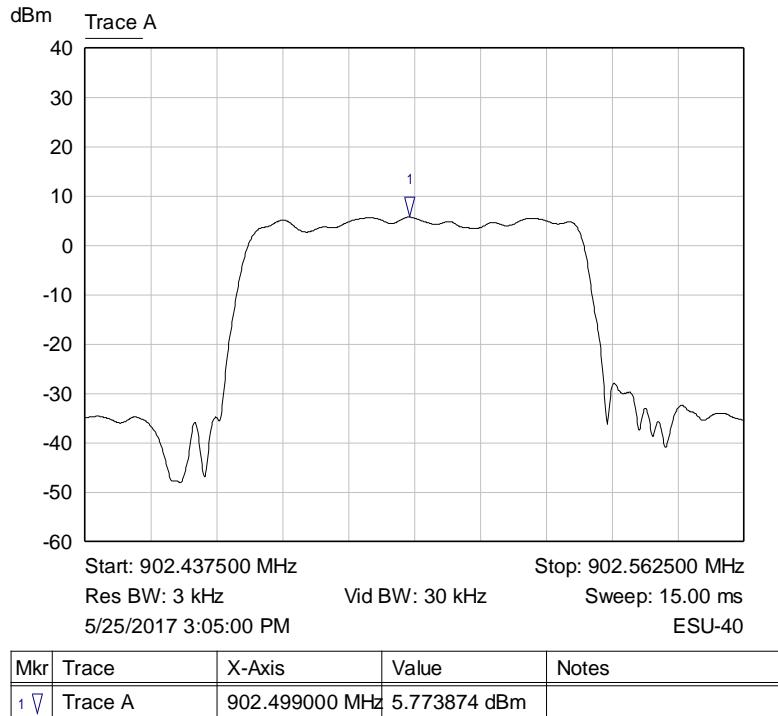


**Graph 56: Lower Channel PSD – 62.5 kHz LoRa**

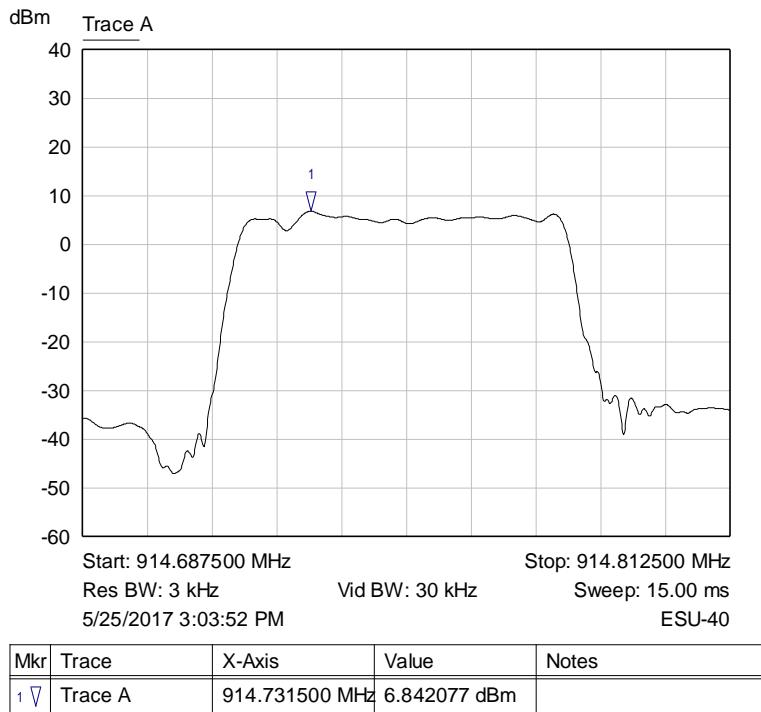

**Graph 57: Middle Channel PSD – 62.5 kHz LoRa**

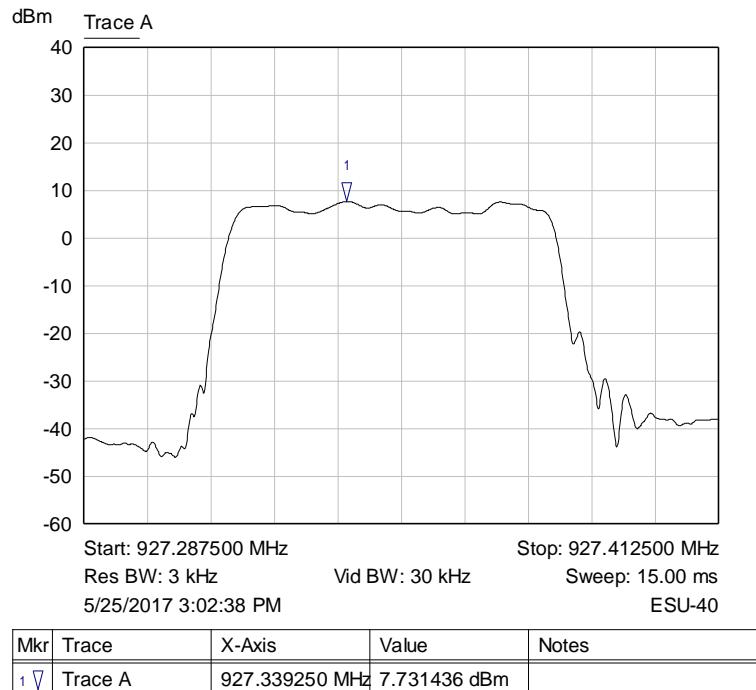


**Graph 58: Upper Channel PSD – 62.5 kHz LoRa**

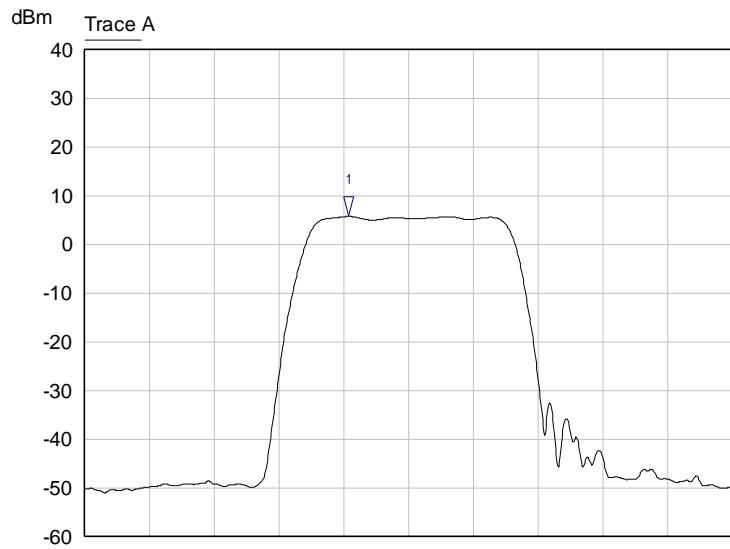


Mkr	Trace	X-Axis	Value	Notes
1 ▽	Trace A	902.490700 MHz	5.784785 dBm	

**Graph 59: Lower Channel PSD – 31.25 kHz LoRa**

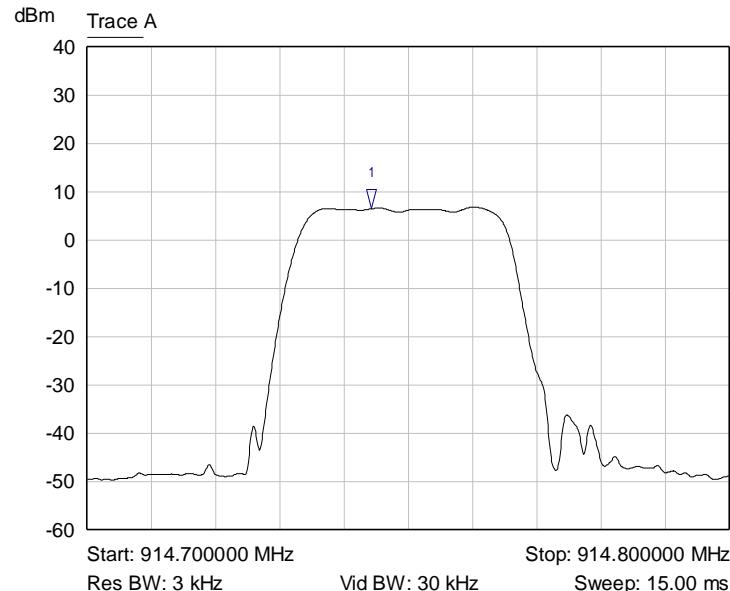


Mkr	Trace	X-Axis	Value	Notes
1 ▽	Trace A	914.744300 MHz	6.506795 dBm	


**Graph 60: Middle Channel PSD – 31.25 kHz LoRa**

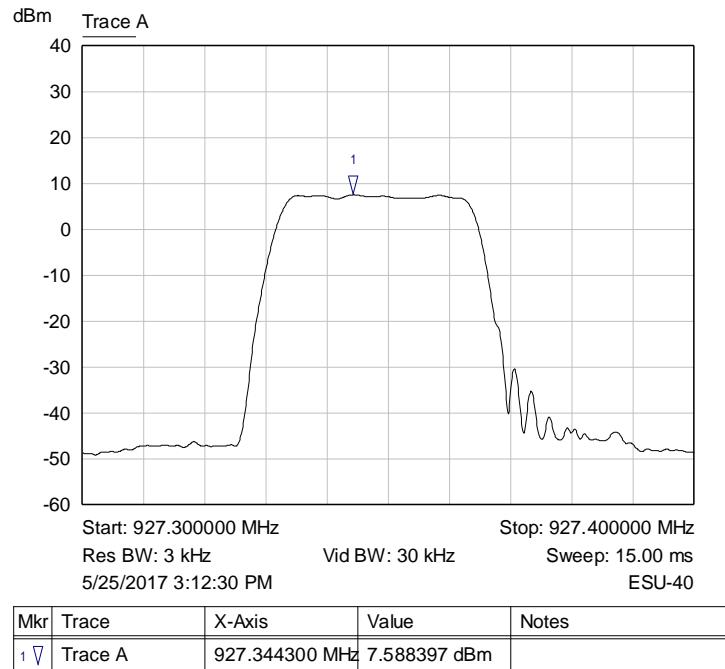


**Graph 61: Upper Channel PSD – 31.25 kHz LoRa**

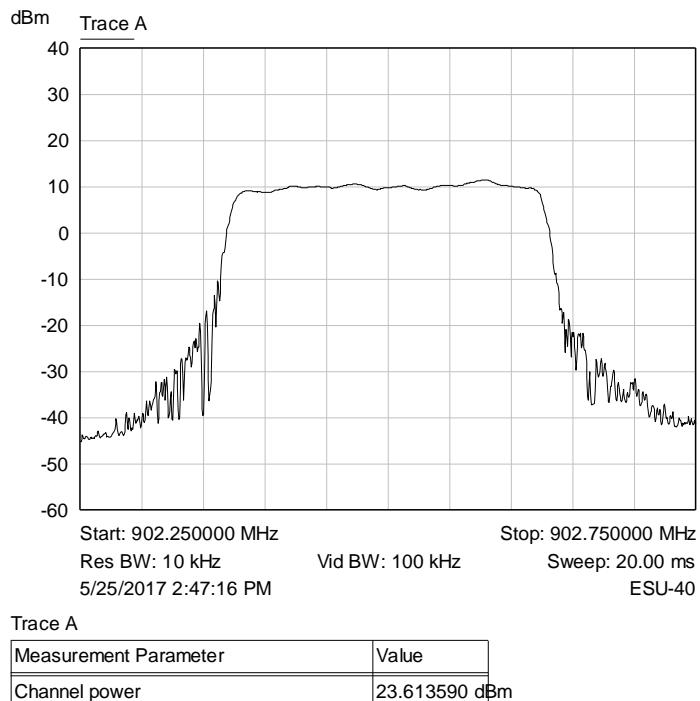


**Graph 62: Lower Channel Output Power – 250 kHz LoRa**

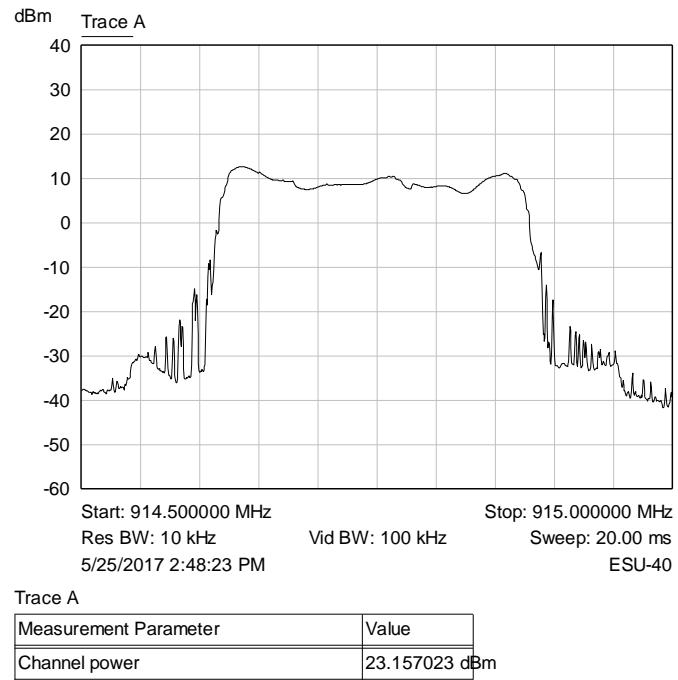


**Graph 63: Middle Channel Output Power – 250 kHz LoRa**

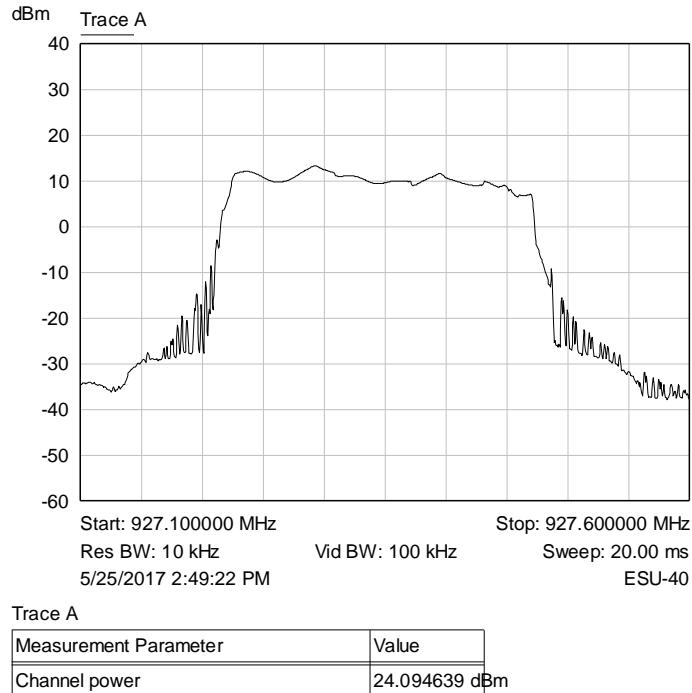


**Graph 64: Upper Channel Output Power – 250 kHz LoRa**

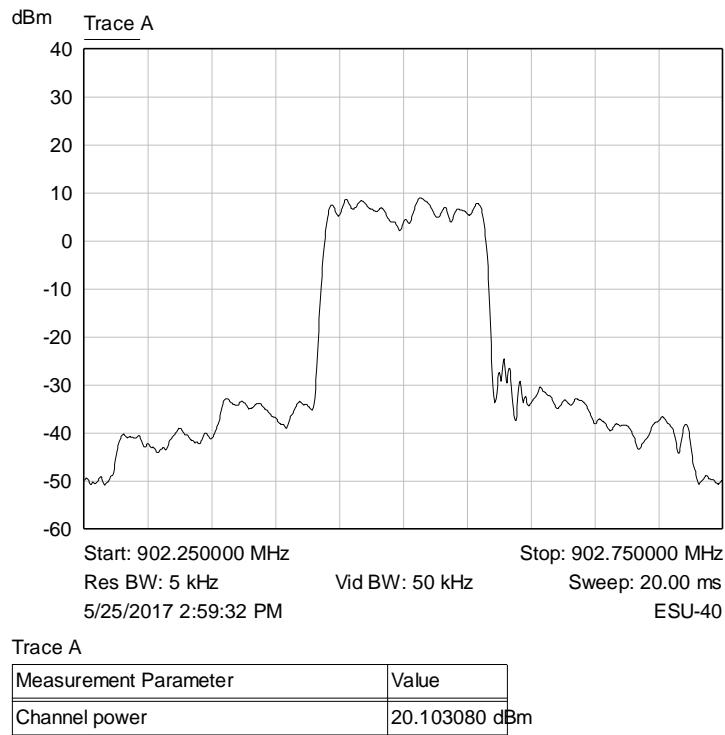


**Graph 65: Lower Channel Output Power – 125kHz LoRa**

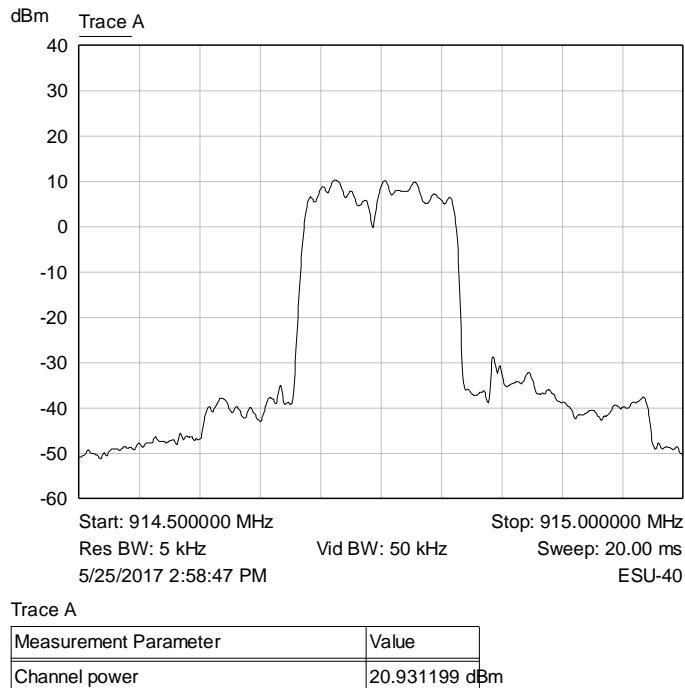


**Graph 66: Middle Channel Output Power – 125 kHz LoRa**

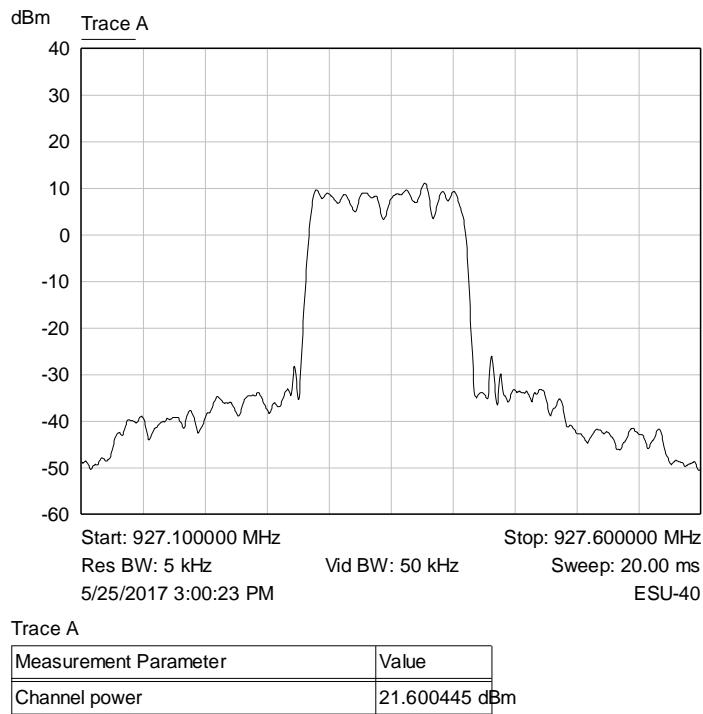


**Graph 67: Upper Channel Output Power – 125 kHz LoRa**

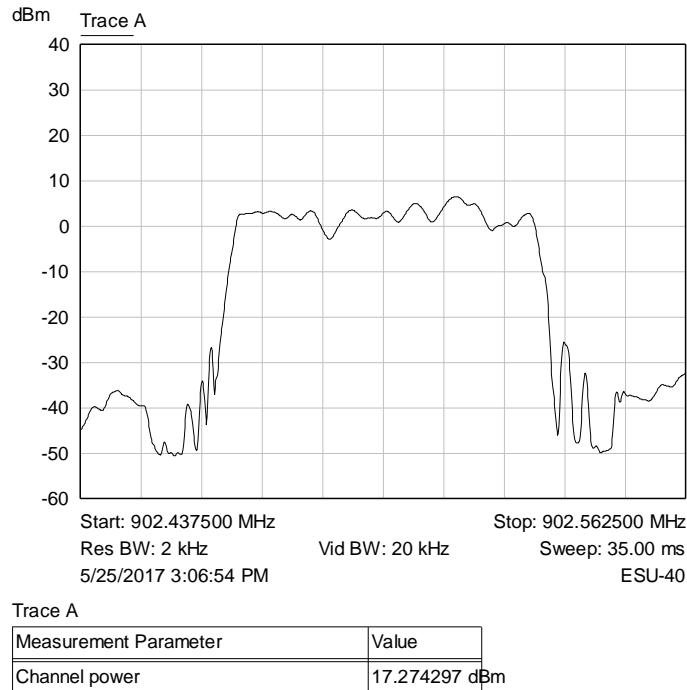


**Graph 68: Lower Channel Output Power – 62.5 kHz LoRa**

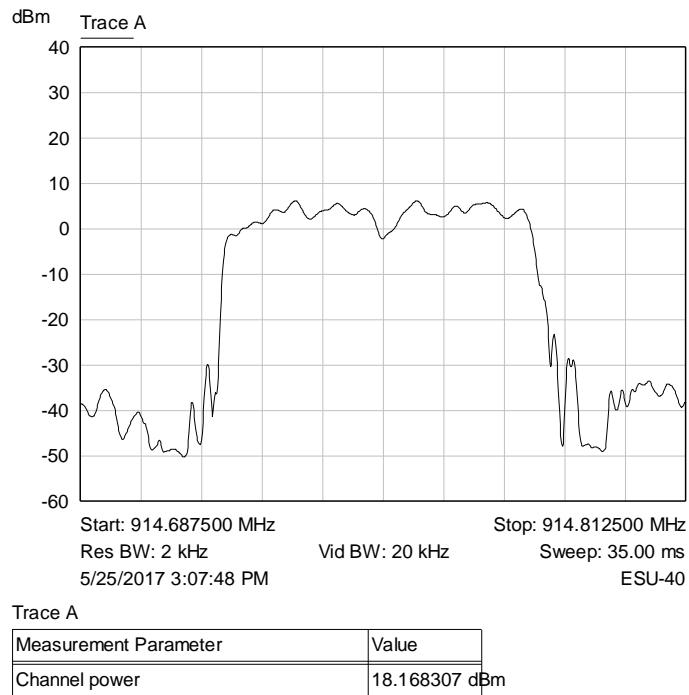


**Graph 69: Middle Channel Output Power – 62.5 kHz LoRa**

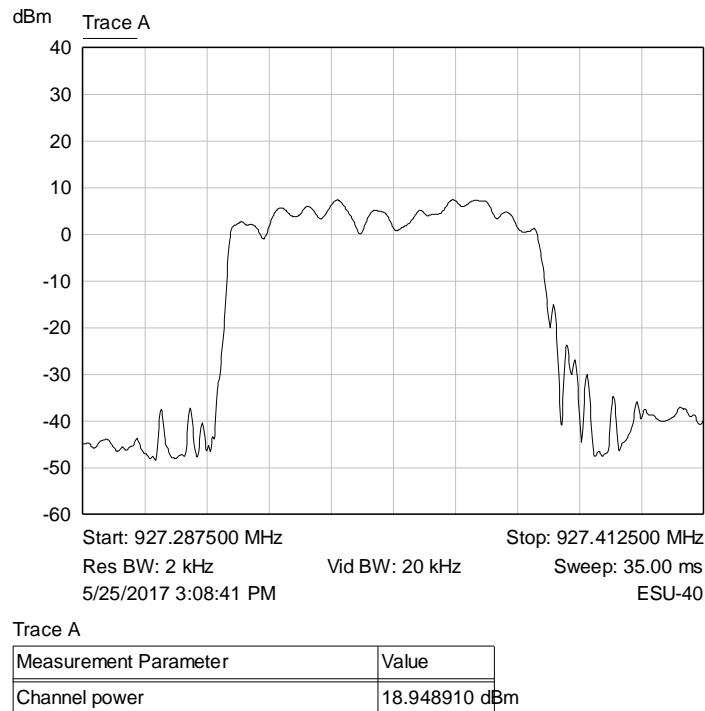


**Graph 70: Upper Channel Output Power – 62.5 kHz LoRa**

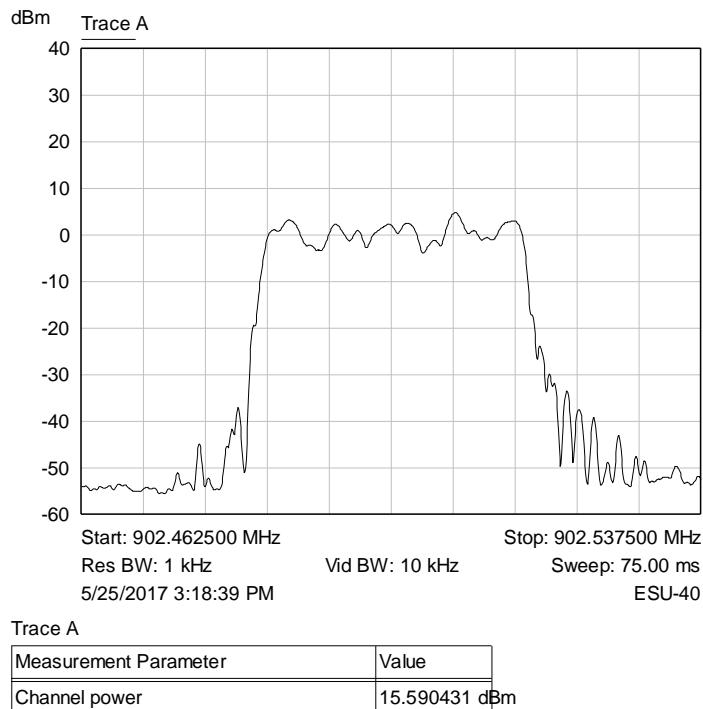

**Graph 71: Lower Channel Output Power – 31.25 kHz LoRa**

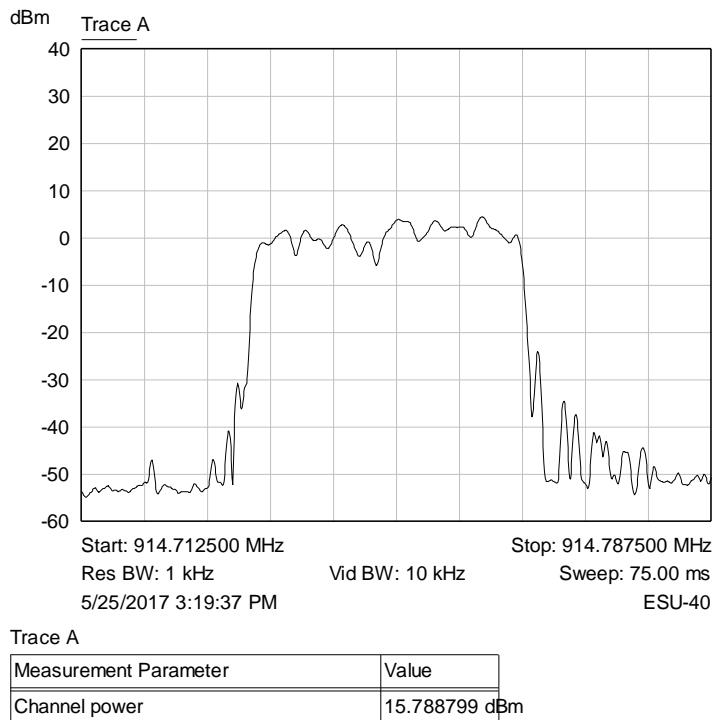

**Graph 72: Middle Channel Output Power – 31.25 kHz LoRa**

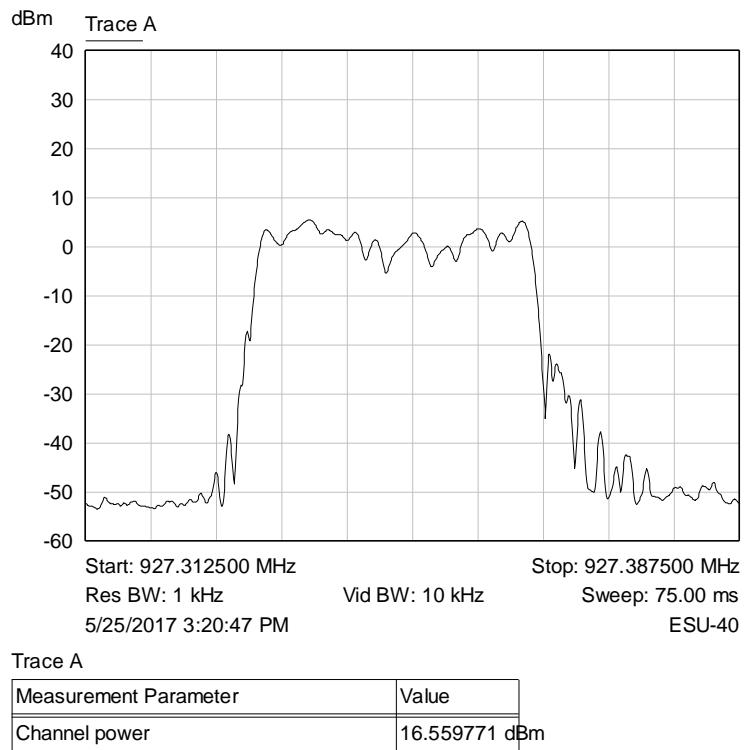

**Graph 73: Upper Channel Output Power – 31.25 kHz LoRa**

## 7 Test Procedures and Test Equipment

### 7.1 Conducted Emissions at Mains Ports

The conducted emissions at mains and telecommunications ports from the EUT were measured using a spectrum analyzer with a quasi-peak adapter for peak, quasi-peak and average readings. The quasi-peak adapter uses a bandwidth of 9 kHz, with the spectrum analyzer's resolution bandwidth set at 100 kHz, for readings in the 150 kHz to 30 MHz frequency ranges.

The conducted emissions at mains ports measurements are performed in a screen room using a (50 Ω/50 μH) Line Impedance Stabilization Network (LISN).

Where mains flexible power cords are longer than 1 m, the excess cable is folded back and forth as far as possible so as to form a bundle not exceeding 0.4 m in length.

Where the EUT is a collection of devices with each device having its own power cord, the point of connection for the LISN is determined from the following rules:

- Each power cord, which is terminated in a mains supply plug, shall be tested separately.
- Power cords, which are not specified by the manufacturer to be connected via a host unit, shall be tested separately.
- Power cords which are specified by the manufacturer to be connected via a host unit or other power supplying equipment shall be connected to that host unit and the power cords of that host unit connected to the LISN and tested.
- Where a special connection is specified, the necessary hardware to effect the connection is supplied by the manufacturer for the testing purpose.
- When testing equipment with multiple mains cords, those cords not under test are connected to an artificial mains network (AMN) different than the AMN used for the mains cord under test.

For testing, desktop EUT are placed on a non-conducting table at least 0.8 meters from the metallic floor and placed 40 cm from the vertical coupling plane (copper plating in the wall behind EUT table). Floor standing equipment is placed directly on the earth grounded floor.

Type of Equipment	Manufacturer	Model Number	Asset Number	Date of Last Calibration	Due Date of Calibration
Spectrum Analyzer	Hewlett Packard	8566B	V034141	02/15/2017	02/15/2018
Quasi-Peak Detector	Hewlett Packard	85650A	V039474	03/16/2017	03/16/2018
LISN	VPI Labs	LISN-COMM-50	V034042	02/24/2017	02/24/2018
Conductance Cable Wanship Upper Site	VPI Labs	Cable J	V034832	01/09/2017	01/09/2018
Transient Limiter	Hewlett Packard	11947A	V033591	01/09/2017	01/09/2018
Test Software (AC)	VPI Labs	Revision 01	V035674	N/A	N/A

**Table 27: List of equipment used for conducted emissions testing at mains ports.**

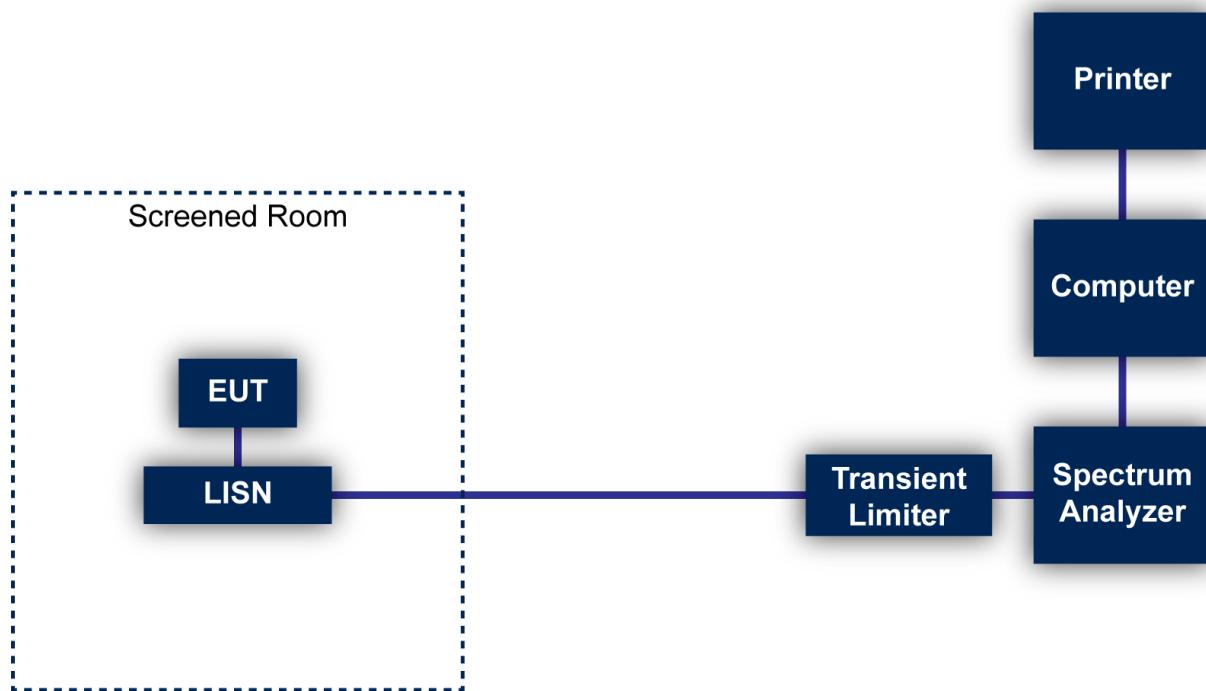


Figure 1: Conducted Emissions Test

## 7.2 Direct Connection at the Antenna Port Test

Type of Equipment	Manufacturer	Model Number	Asset Number	Date of Last Calibration	Due Date of Calibration
Spectrum Analyzer/Receiver	Rohde & Schwarz	ESU40	V033119	06/17/2016	06/17/2017
6 dB Attenuator	Pasternack	PE7004-6	V033645	01/09/2017	01/09/2018
Low Loss Cable	N/A	N/A	V034173	01/09/2017	01/09/2018

### 7.2.1 Test Configuration Block Diagram



Figure 2: Direct Connection at the Antenna Port Test

### 7.3 Radiated Emissions

The radiated emissions from the EUT were measured using a spectrum analyzer with a quasi-peak adapter for peak and quasi-peak readings.

A preamplifier with a fixed gain of 26 dB and a power amplifier with a fixed gain of 22 dB were used to increase the sensitivity of the measuring instrumentation. The quasi-peak adapter uses a bandwidth of 120 kHz, with the spectrum analyzer's resolution bandwidth set at 1 MHz, for readings in the 30 to 1000 MHz frequency ranges. For frequencies below 30 MHz, a 9 kHz resolution Bandwidth was used.

A loop antenna was used to measure frequencies below 30 MHz. A biconilog antenna was used to measure the frequency range of 30 to 1000 MHz, at a distance of 3 meters from the EUT. The readings obtained by these antennas are correlated to the levels obtained with a tuned dipole antenna by adding antenna factors. A double-ridged guide antenna was used to measure the emissions at frequencies above 1000 MHz at a distance of 3 meters from the EUT.

The configuration of the EUT was varied to find the maximum radiated emission. The EUT was connected to the peripherals listed in Section 2.3 via the interconnecting cables listed in Section 2.4. A technician manually manipulated these interconnecting cables to obtain worst-case radiated emissions. The EUT was rotated 360 degrees, and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission. Where there were multiple interface ports all of the same type, cables are either placed on all of the ports or cables added to these ports until the emissions do not increase by more than 2 dB.


Desktop EUT are measured on a non-conducting table 0.8 meters above the ground plane. For frequencies above 1000 MHz, the EUT is placed on a table 1.5 meters above the ground plane. The table is placed on a turntable, which is level with the ground plane. For equipment normally placed on floors, the equipment shall be placed directly on the turntable.

For radiated emissions testing that is performed at distances closer than the specified distance; an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.

Type of Equipment	Manufacturer	Model Number	Asset Number	Date of Last Calibration	Due Date of Calibration
Spectrum Analyzer/Receiver	Rohde & Schwarz	ESU40	V033119	06/17/2016	06/17/2017
Spectrum Analyzer	Hewlett Packard	8566B	V034141	02/15/2017	02/15/2018
Quasi-Peak Detector	Hewlett Packard	85650A	V039474	03/16/2017	03/16/2018
Loop Antenna	EMCO	6502	V034216	01/25/2017	01/25/2019
Biconilog Antenna	EMCO	3142E-PA	V035736	06/24/2016	06/24/2018
Double Ridged Guide Antenna	EMCO	3115	V033469	02/09/2016	02/09/2018
High Frequency Amplifier	Miteq	AFS4-001018000-35-10P-4	V033997	01/09/2017	01/09/2018
900 MHz High Pass Filter	Micro-Tronics	HPM50108-03	V034185	01/09/2017	01/09/2018
6' High Frequency Cable	Microcoax	UFB197C-0-0720-000000	V033638	01/09/2017	01/09/2018

Type of Equipment	Manufacturer	Model Number	Asset Number	Date of Last Calibration	Due Date of Calibration
20' High Frequency Cable	Microcoax	UFB197C-1-3120-000000	V033979	01/09/2017	01/09/2018
3 Meter Radiated Emissions Cable Wanship Upper Site	Microcoax	UFB205A-0-4700-000000	V033639	01/09/2017	01/09/2018
Pre/Power-Amplifier	Hewlett Packard	8447F	V034218	09/07/2016	09/07/2017
Test Software (FCC)	VPI Labs	Revision 01	V035673	N/A	N/A

**Table 28: List of equipment used for radiated emissions testing.**

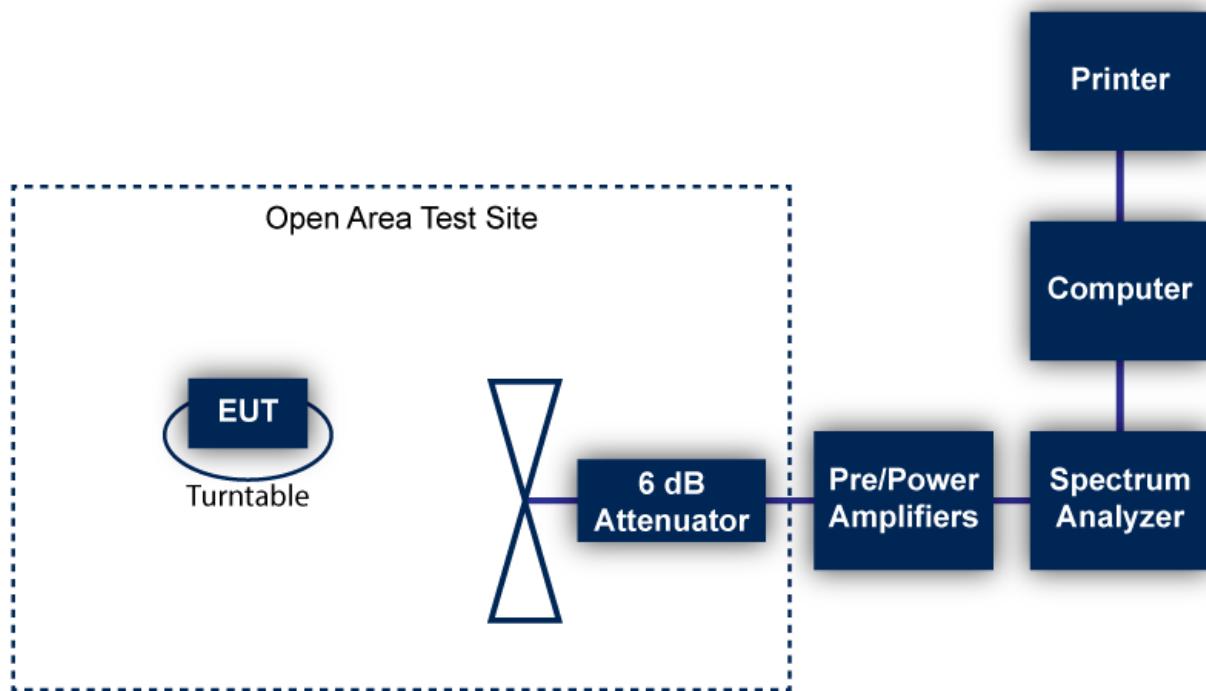

**Figure 3: Radiated Emissions Test**


## 7.4 Equipment Calibration

All applicable equipment is calibrated using either an independent calibration laboratory or VPI Laboratories, Inc. personnel at intervals defined in ANSI C63.4:2014 following outlined calibration procedures. All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Supporting documentation relative to tractability is on file and is available for examination upon request.


## 7.5 Measurement Uncertainty

Test	Uncertainty ( $\pm$ dB)	Confidence (%)
Conducted Emissions	2.8	95
Radiated Emission (9 kHz to 30 MHz)	3.3	95
Radiated Emissions (30 MHz to 1 GHz)	3.4	95
Radiated Emissions (1 GHz to 18 GHz)	5.0	95


## 8 Photographs

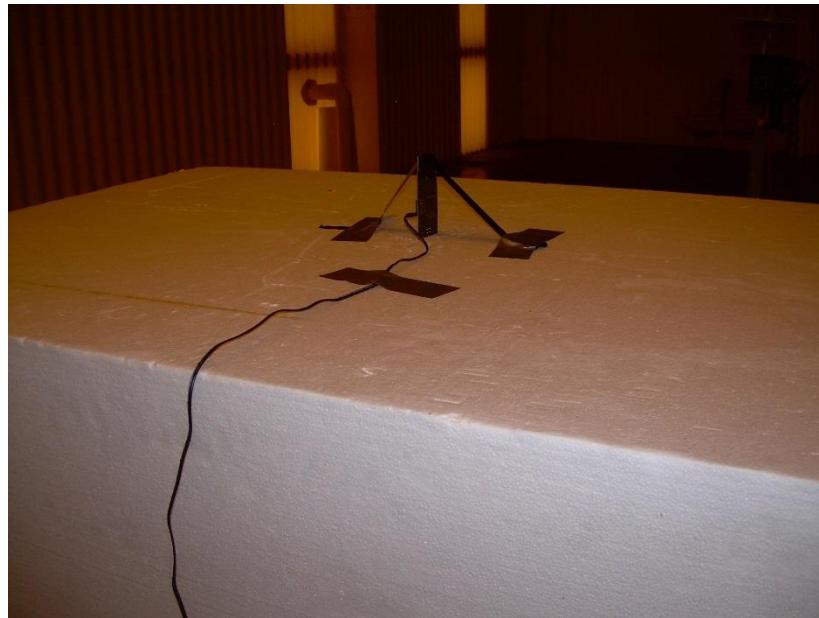


**Photograph 1: Back View Radiated Emissions Vertical Configuration – Emissions Below 1000 MHz**

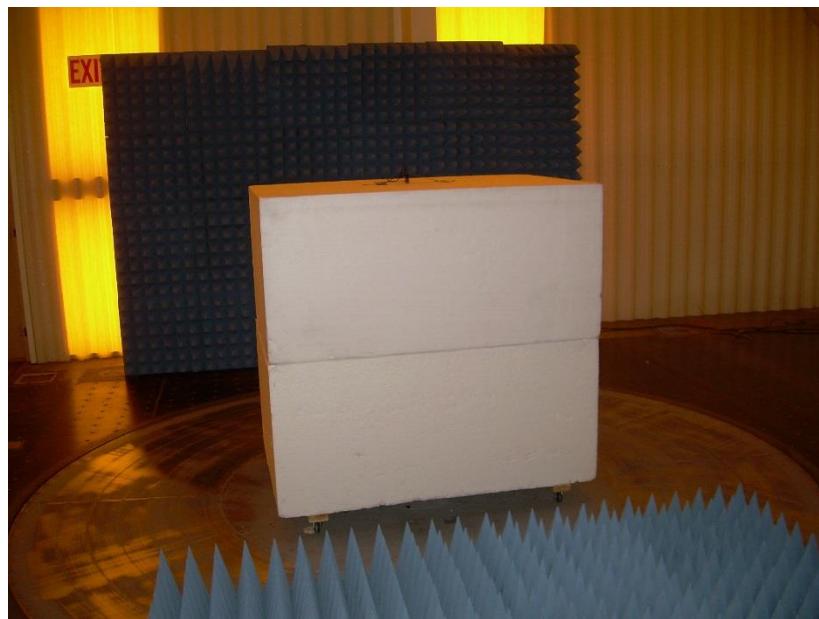


**Photograph 2: Front View Radiated Emissions Vertical Configuration – Emissions Above 1000 MHz**

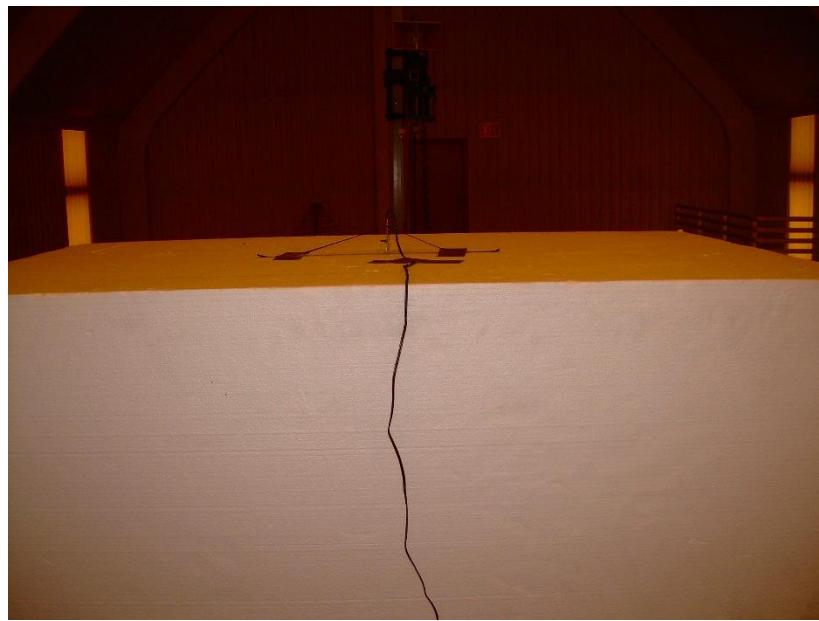

**Photograph 3: Back View Radiated Emissions Vertical Configuration – Emissions Above 1000 MHz**

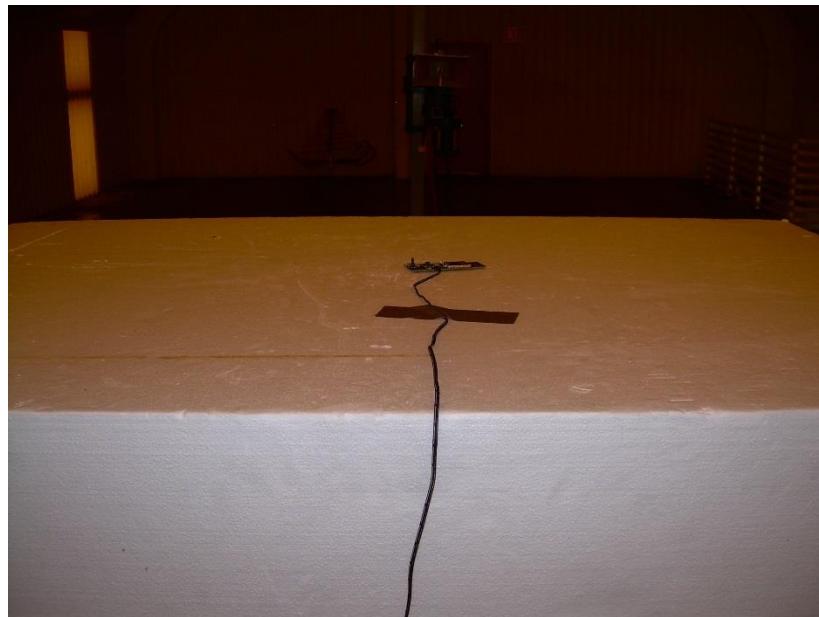

**Photograph 4: Back View Radiated Emissions Horizontal (Flat) Configuration – Emissions Above 1000 MHz**

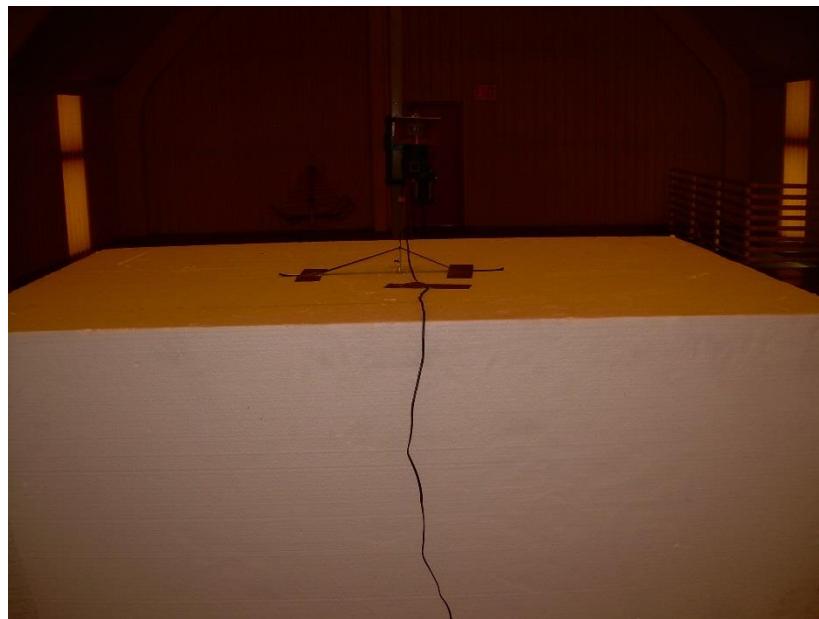


**Photograph 5: Back View Radiated Emissions On Edge Configuration – Emissions Above 1000 MHz**




**Photograph 6 – Front View Conducted Emissions Worst-Case Configuration**




**Photograph 7 – Back View Conducted Emissions Worst-Case Configuration**

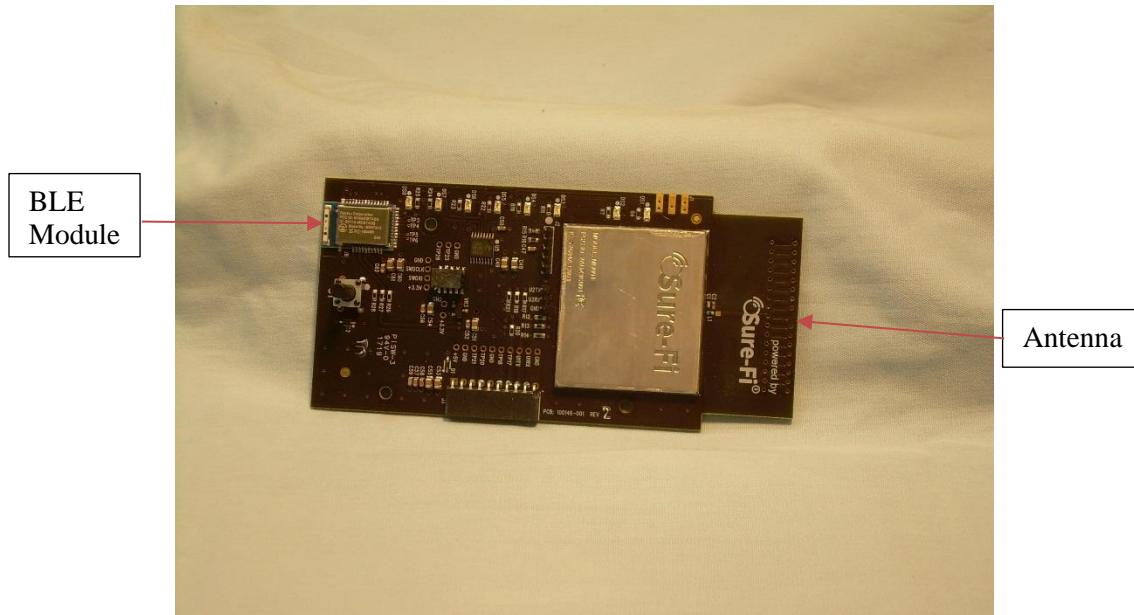

**Photograph 8 – Front View of the EUT**

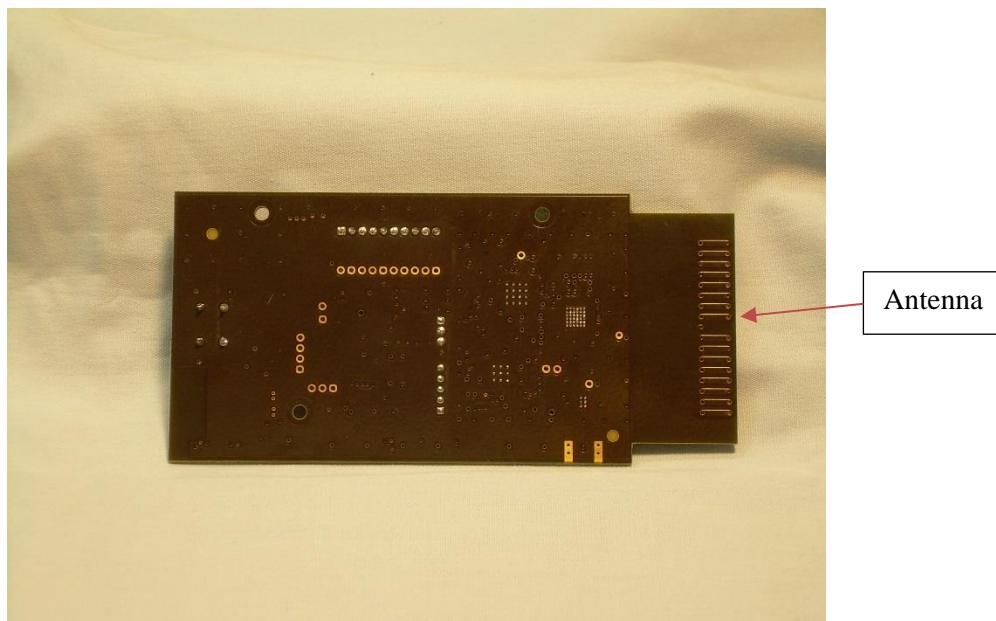

### **Photograph 9 – Back View of the EUT**

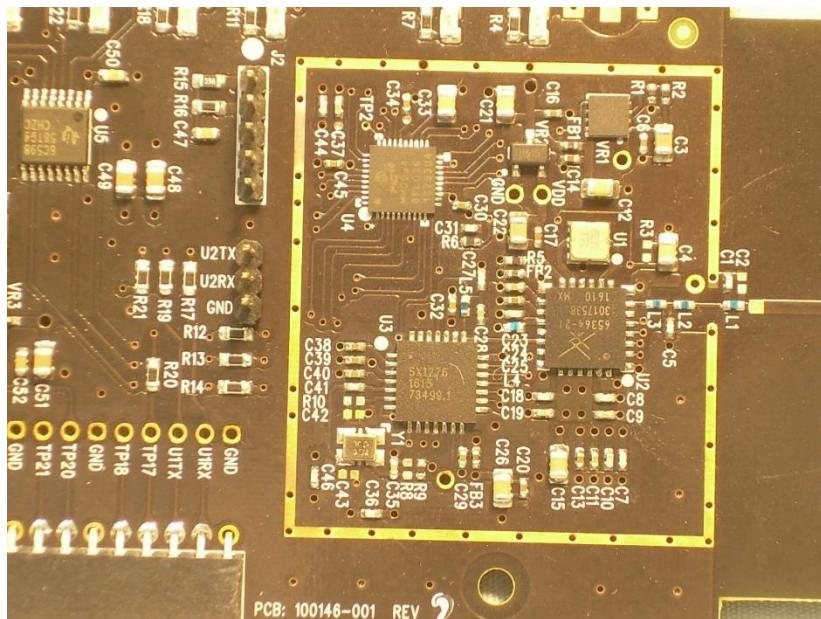


### Photograph 10 – Circuitry Under the RF Shield


**Reference Test Set Up Photographs**



**Photograph 11: Test Setup for Emissions Below 30 MHz**

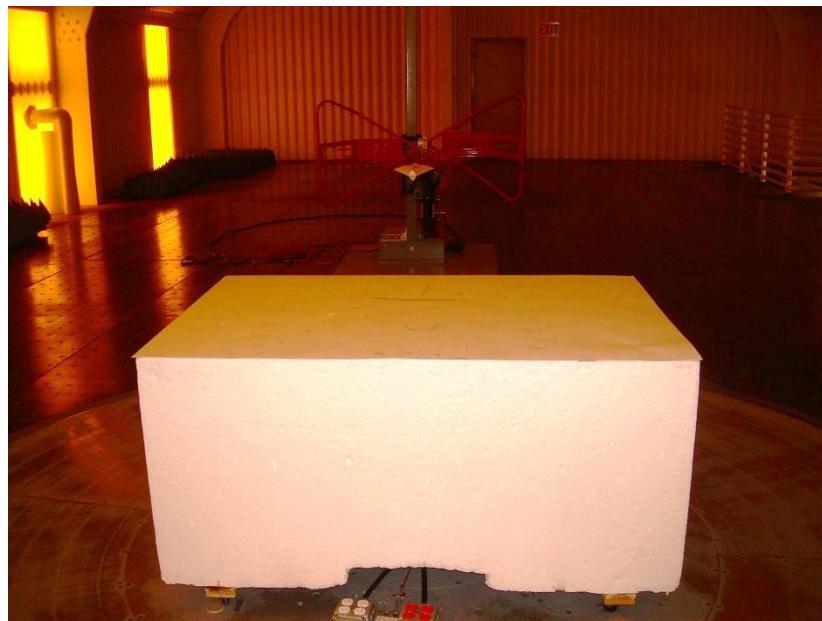

**Photograph 12: Test Setup for Emission from 30 MHz to 1000 MHz**

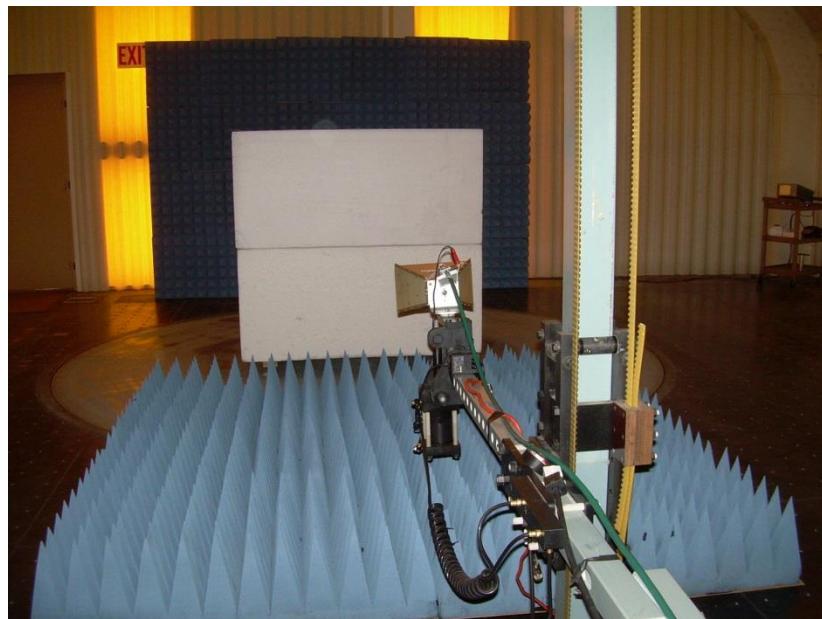

**Photograph 13: Test Setup for Emissions Above 1000 MHz**

--- End of Report ---