Appendix B

RF Test Data for 5.2GWIFI (Conducted Measurement)

Product Name: Gaming tablet

Test Model: MGS101-08

Environmental Conditions

Temperature:	24.5°C
Relative Humidity:	52.7%
ATM Pressure:	100.0 kPa
Test Engineer:	Jose Zhu
Supervised by:	Nick Peng

B.1 -26dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant0	26.598	---	Pass
NVNT	a	5200	Ant0	24.973	---	Pass
NVNT	a	5240	Ant0	28.549	---	Pass
NVNT	n20	5180	Ant0	29.148	---	Pass
NVNT	n20	5200	Ant0	24.851	---	Pass
NVNT	n20	5240	Ant0	29.143	---	Pass
NVNT	n40	5190	Ant0	47.545	---	Pass
NVNT	n40	5230	Ant0	49.131	---	Pass
NVNT	ac20	5180	Ant0	27.344	---	Pass
NVNT	ac20	5200	Ant0	27.824	---	Pass
NVNT	ac20	5240	Ant0	28.023	---	Pass
NVNT	ac40	5190	Ant0	43.11	---	Pass
NVNT	ac40	5230	Ant0	47.916	---	Pass
NVNT	ac80	5210	Ant0	85.146	---	Pass

Test Graphs

-26dB Bandwidth NVNT a 5180MHz Ant0

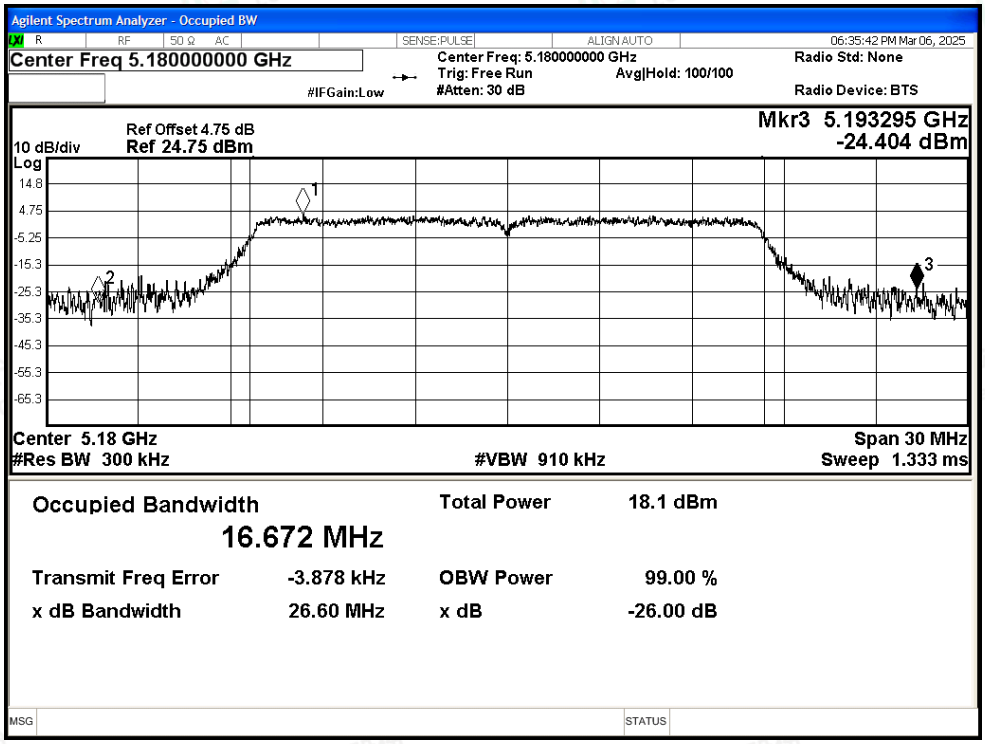

-26dB Bandwidth NVNT a 5200MHz Ant0

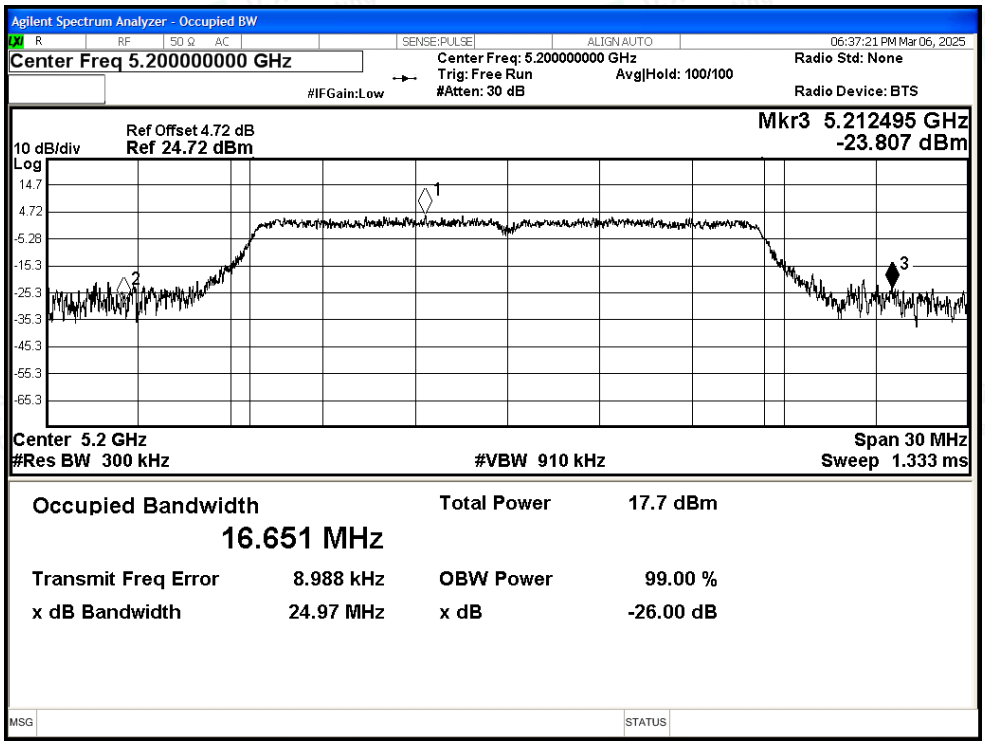

-26dB Bandwidth NVNT a 5240MHz Ant0

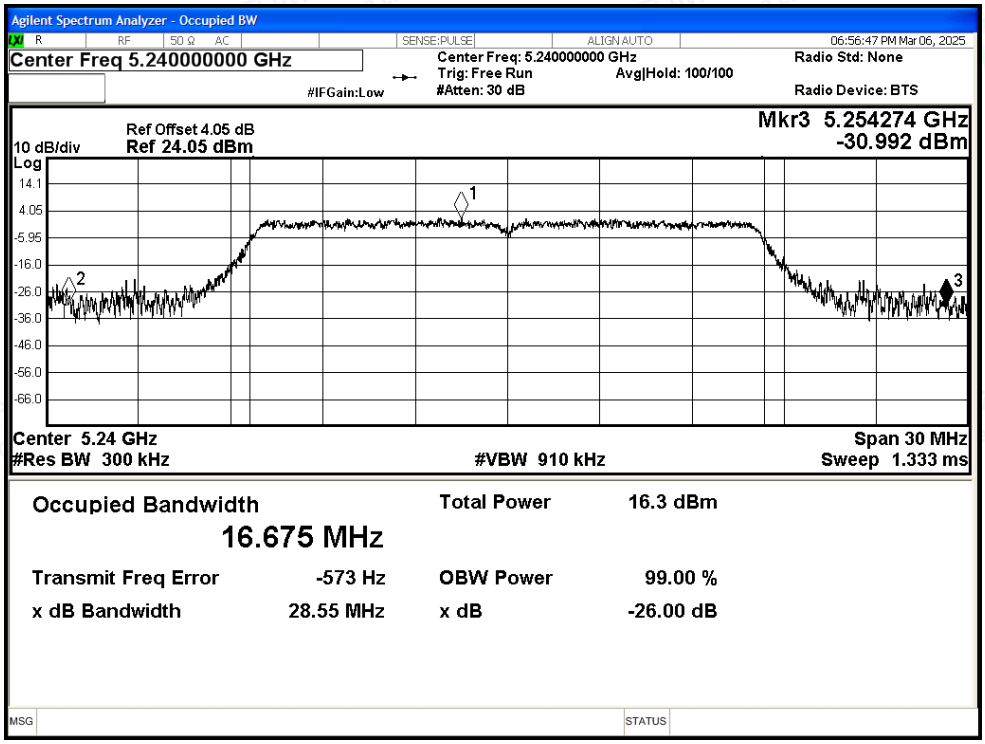

-26dB Bandwidth NVNT n20 5180MHz Ant0

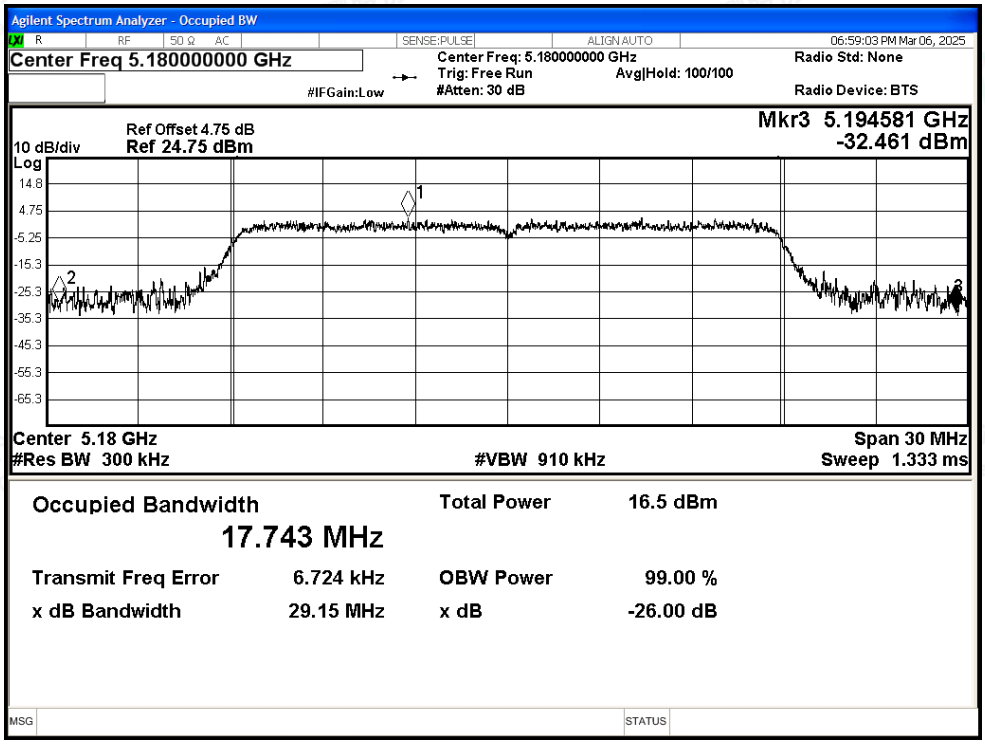

-26dB Bandwidth NVNT n20 5200MHz Ant0

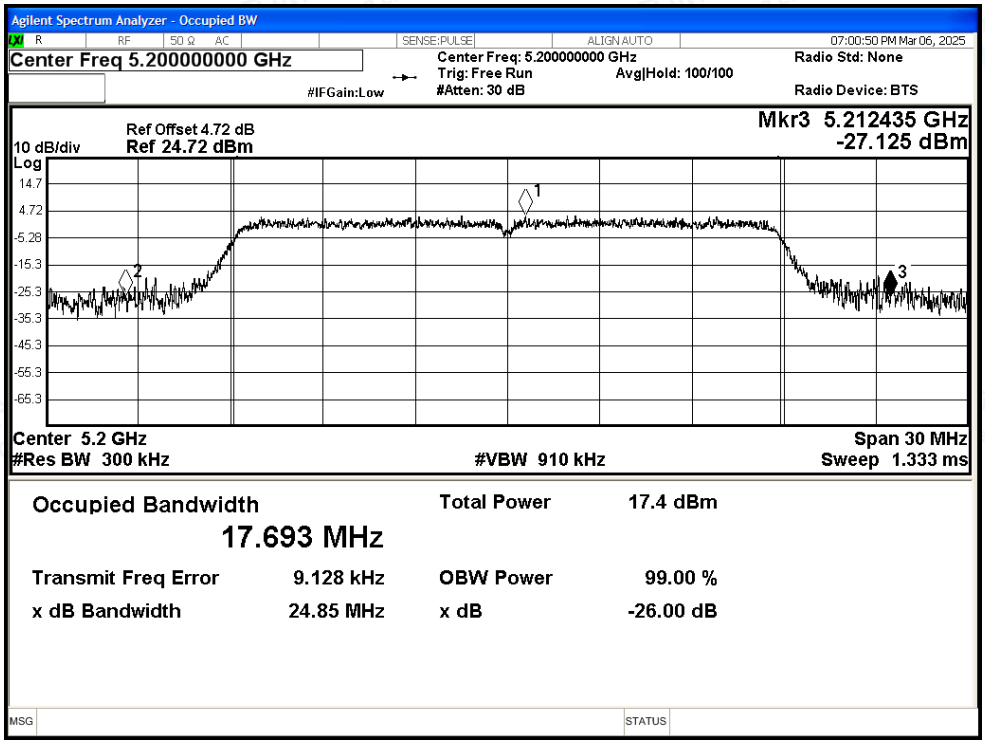

-26dB Bandwidth NVNT n20 5240MHz Ant0

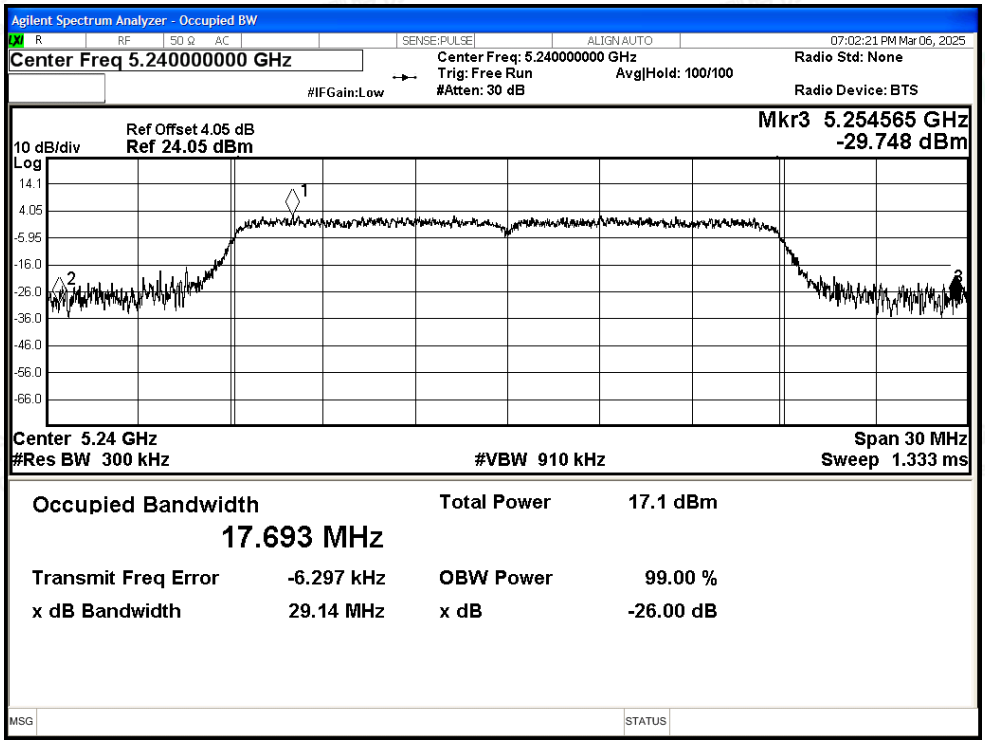

-26dB Bandwidth NVNT n40 5190MHz Ant0

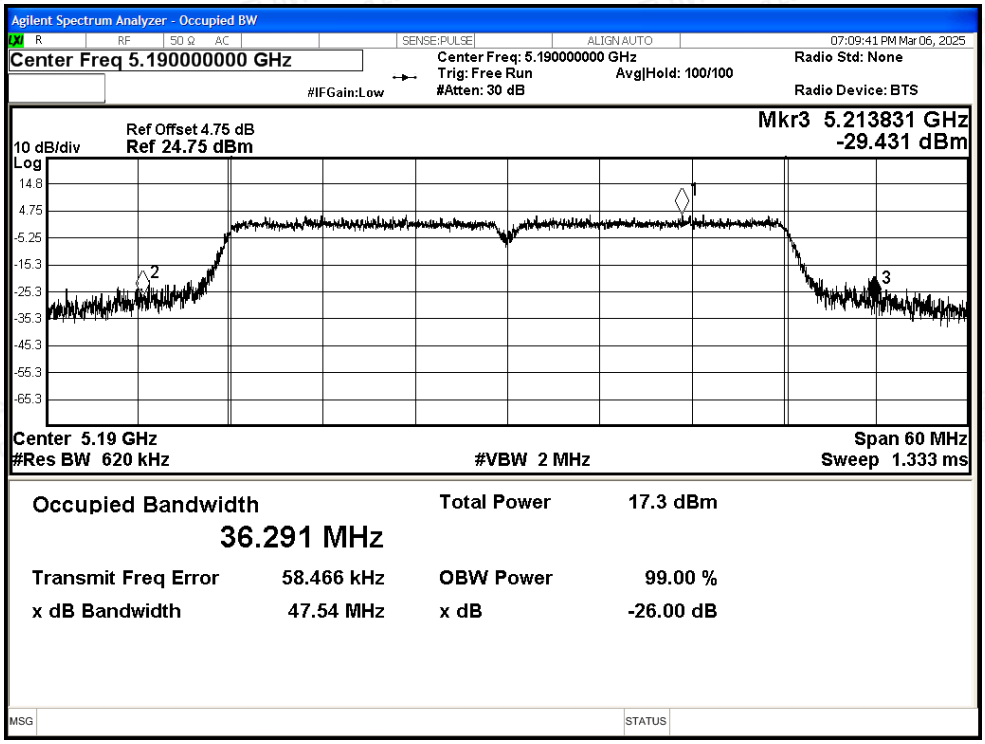

-26dB Bandwidth NVNT n40 5230MHz Ant0

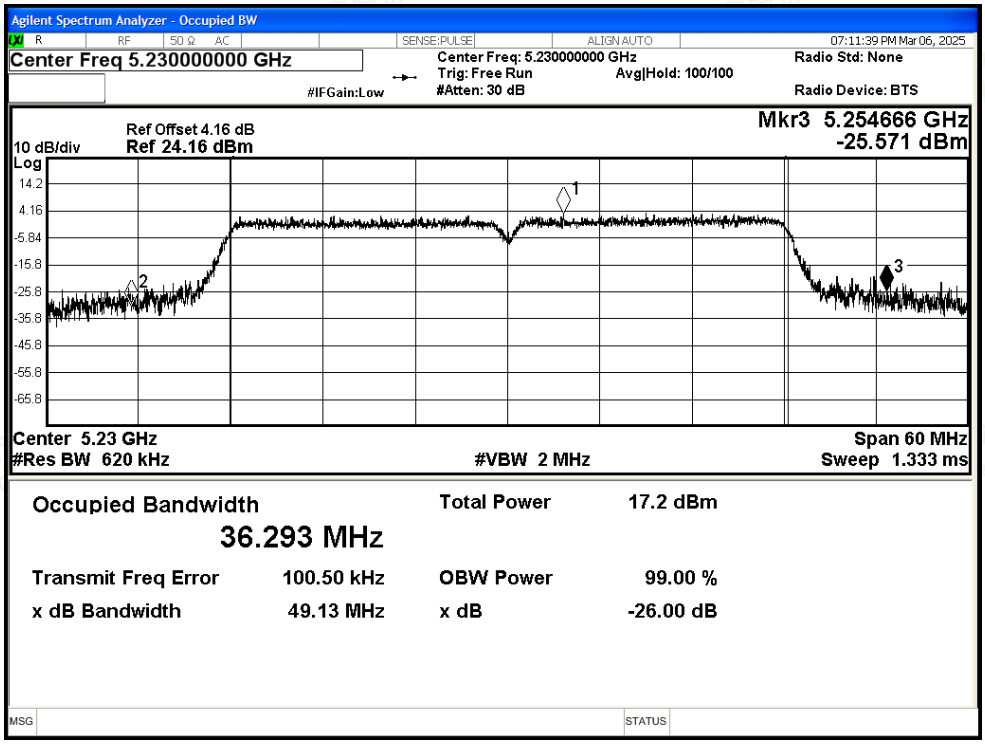

-26dB Bandwidth NVNT ac20 5180MHz Ant0

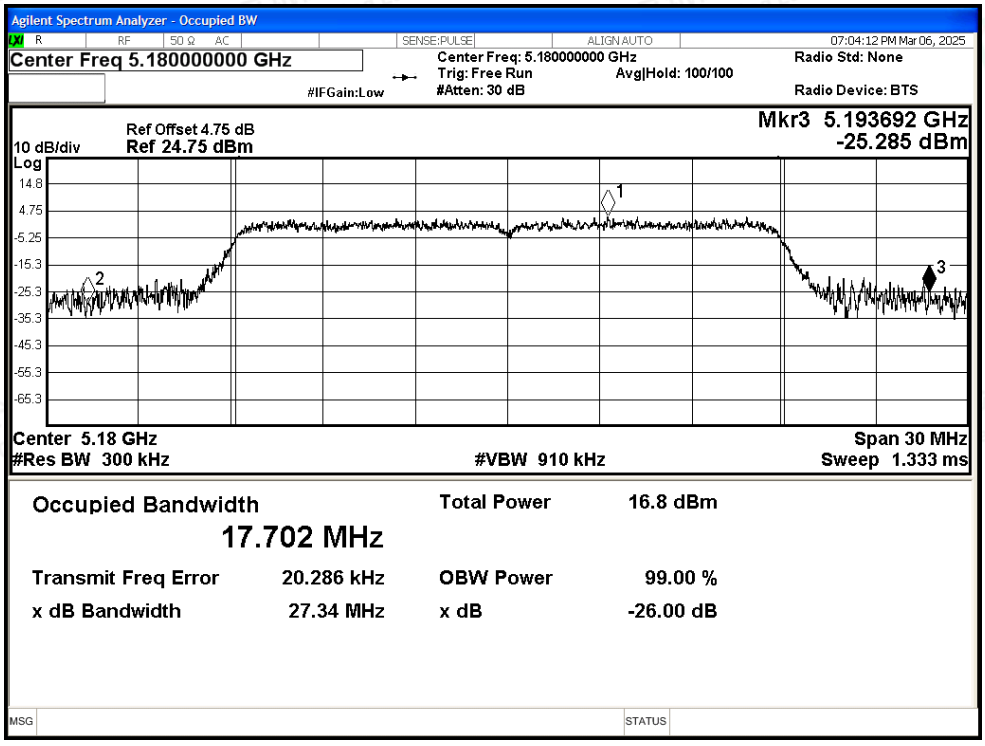

-26dB Bandwidth NVNT ac20 5200MHz Ant0

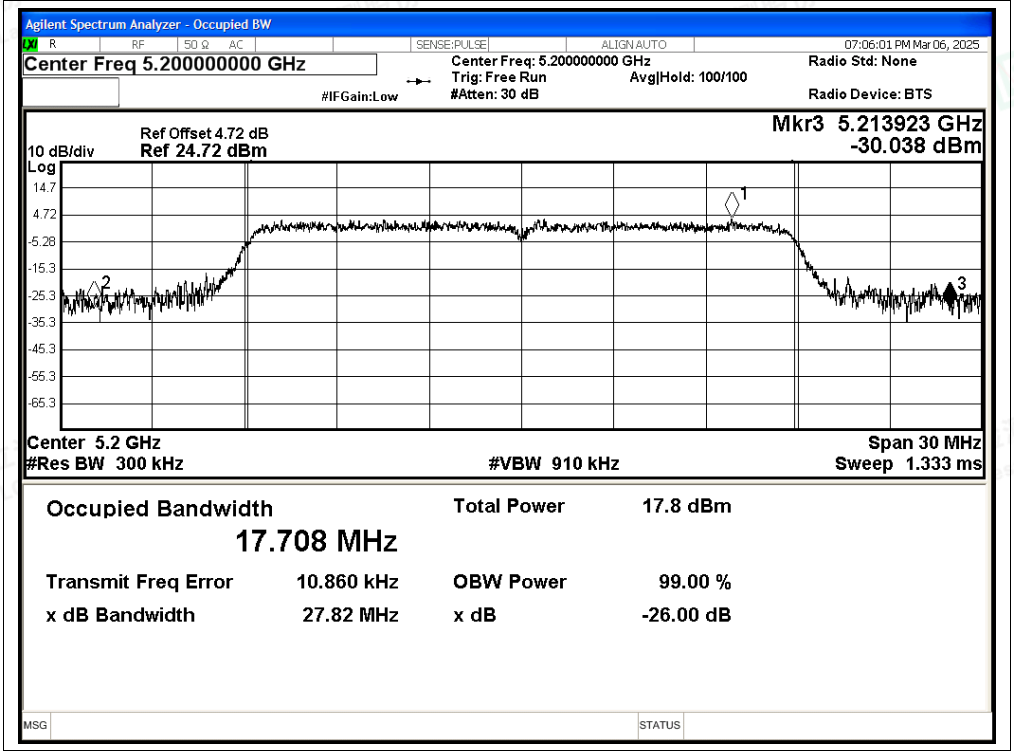

-26dB Bandwidth NVNT ac20 5240MHz Ant0

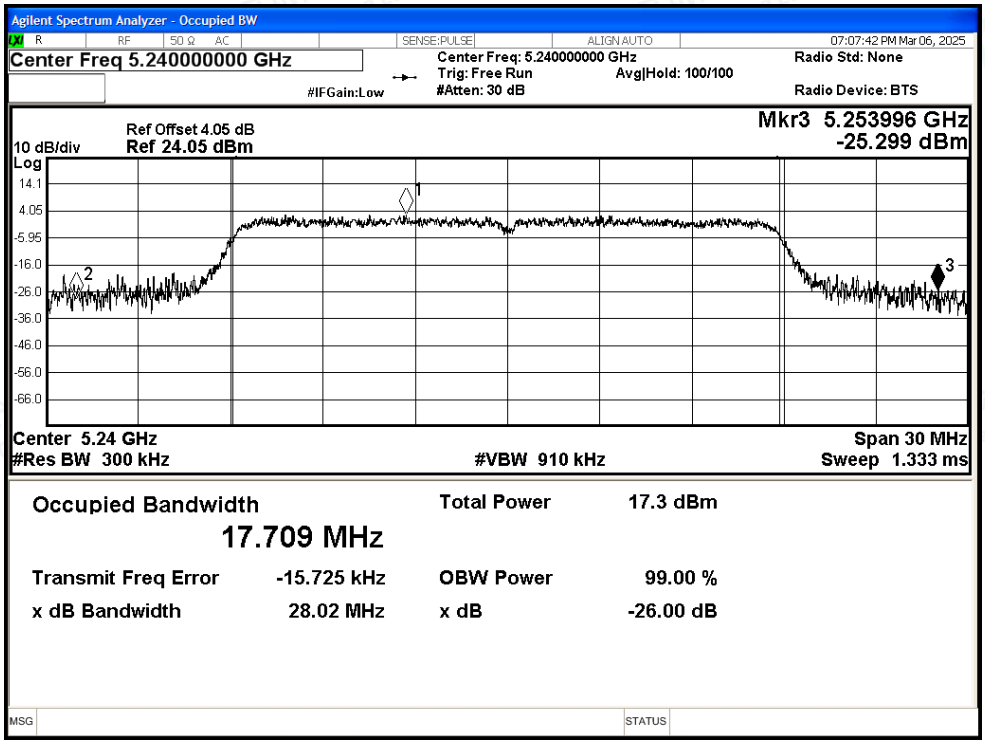

-26dB Bandwidth NVNT ac40 5190MHz Ant0

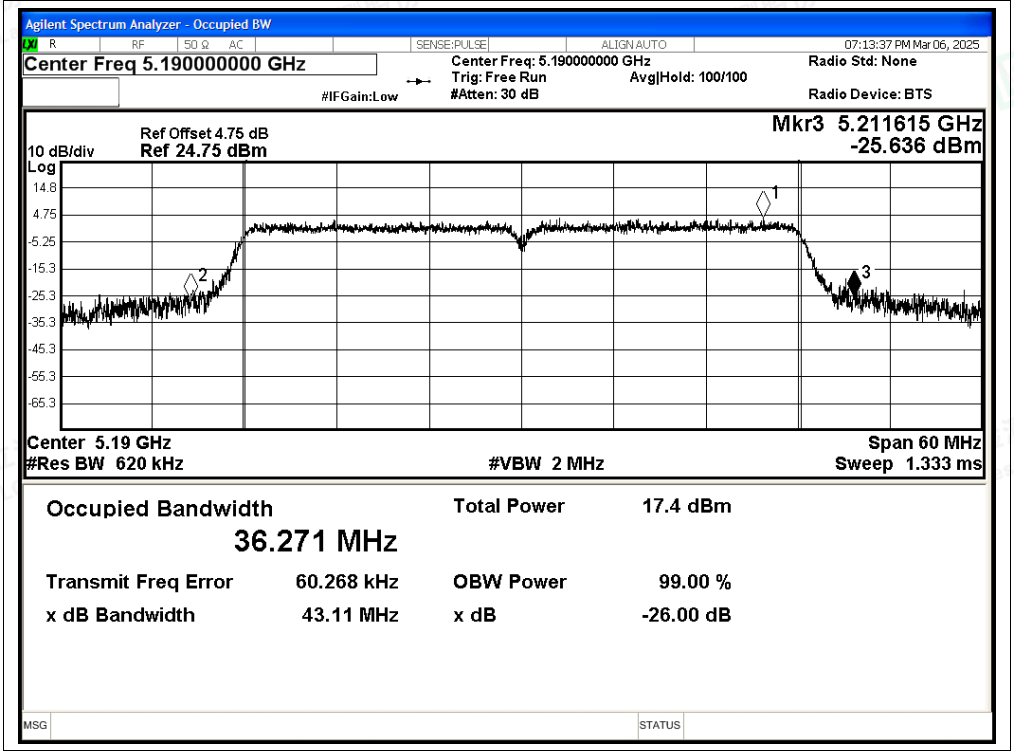

-26dB Bandwidth NVNT ac40 5230MHz Ant0

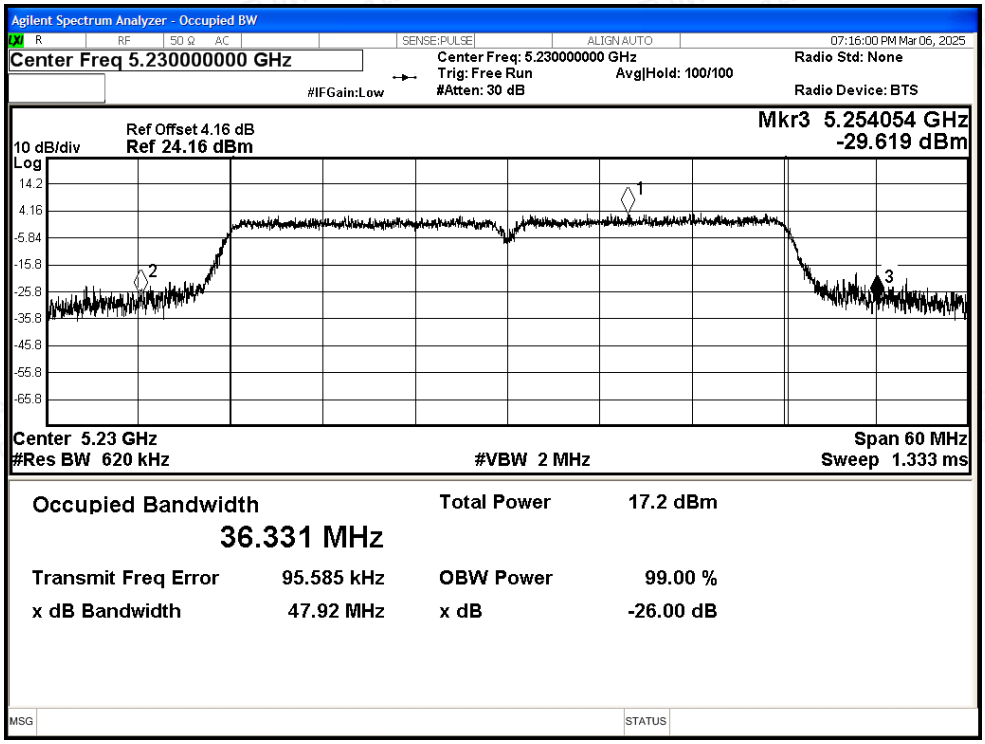

-26dB Bandwidth NVNT ac80 5210MHz Ant0

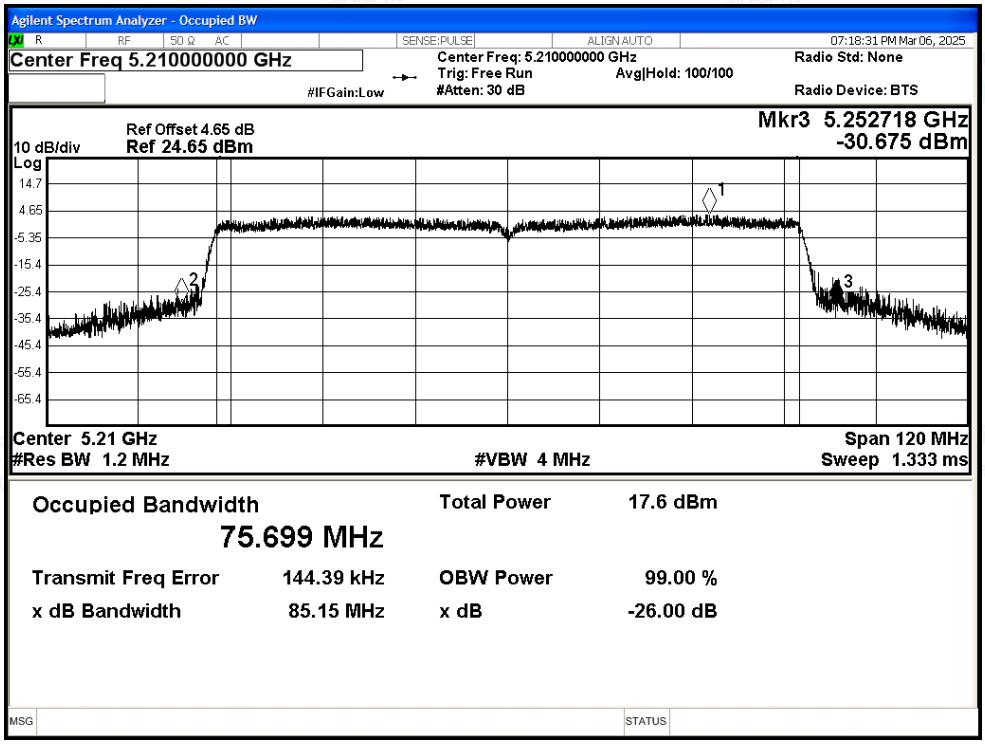

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant1	25.903	---	Pass
NVNT	a	5200	Ant1	28.171	---	Pass
NVNT	a	5240	Ant1	27.046	---	Pass
NVNT	n20	5180	Ant1	28.02	---	Pass
NVNT	n20	5200	Ant1	29.325	---	Pass
NVNT	n20	5240	Ant1	28.143	---	Pass
NVNT	n40	5190	Ant1	48.994	---	Pass
NVNT	n40	5230	Ant1	44.004	---	Pass
NVNT	ac20	5180	Ant1	29.044	---	Pass
NVNT	ac20	5200	Ant1	29.389	---	Pass
NVNT	ac20	5240	Ant1	28.419	---	Pass
NVNT	ac40	5190	Ant1	43.358	---	Pass
NVNT	ac40	5230	Ant1	42.855	---	Pass
NVNT	ac80	5210	Ant1	86.536	---	Pass

Test Graphs

-26dB Bandwidth NVNT a 5180MHz Ant1

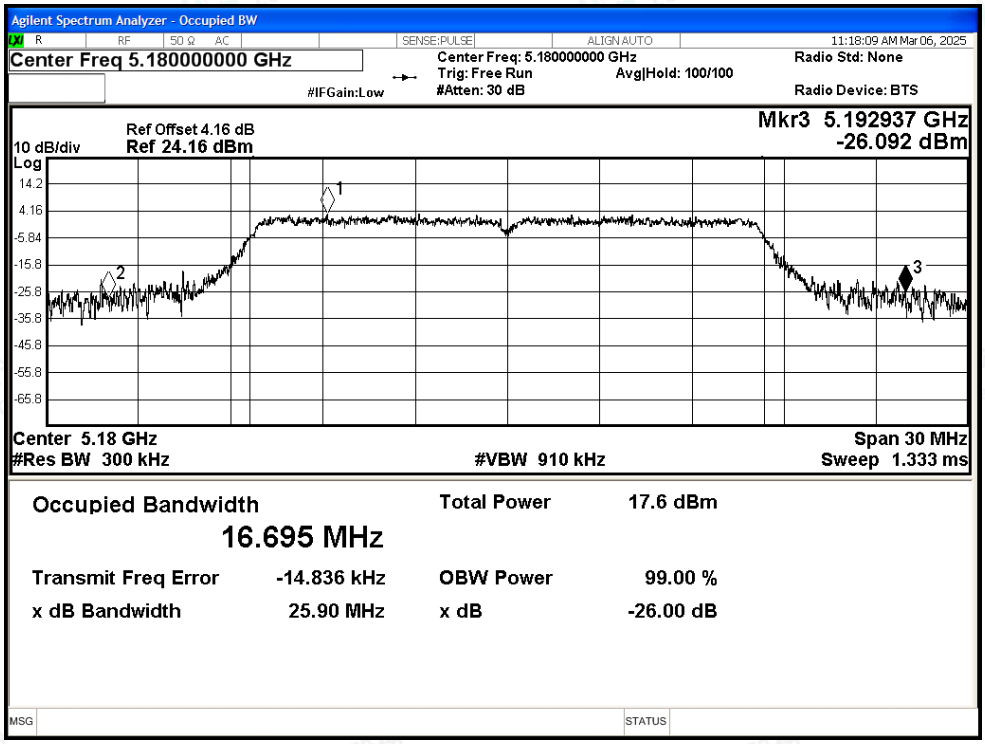

-26dB Bandwidth NVNT a 5200MHz Ant1

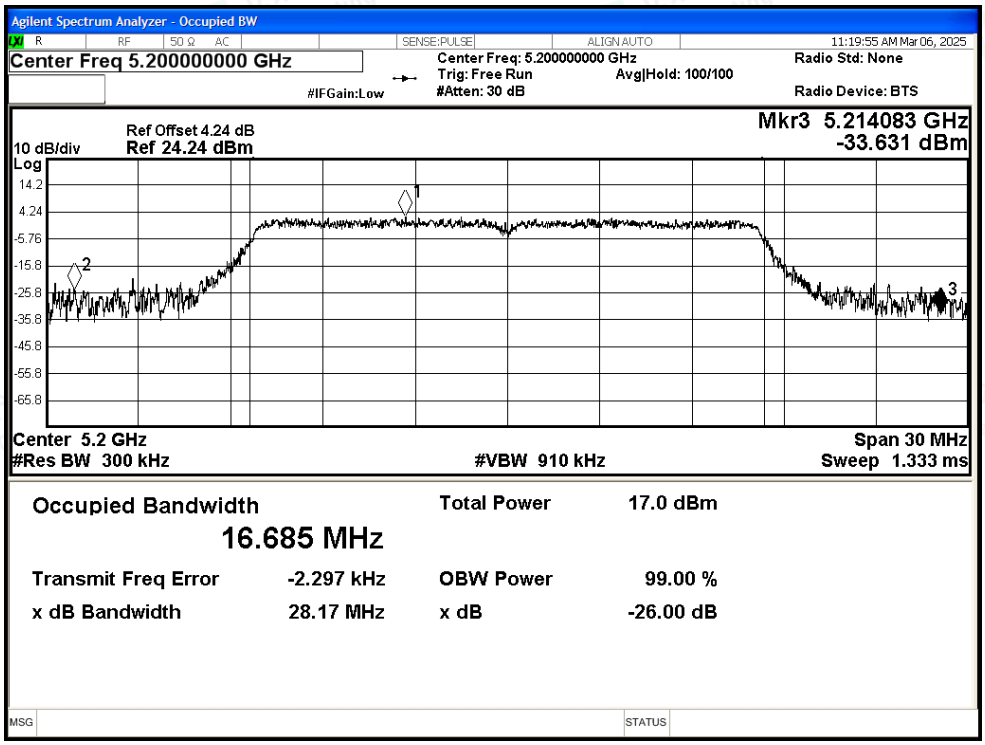

-26dB Bandwidth NVNT a 5240MHz Ant1

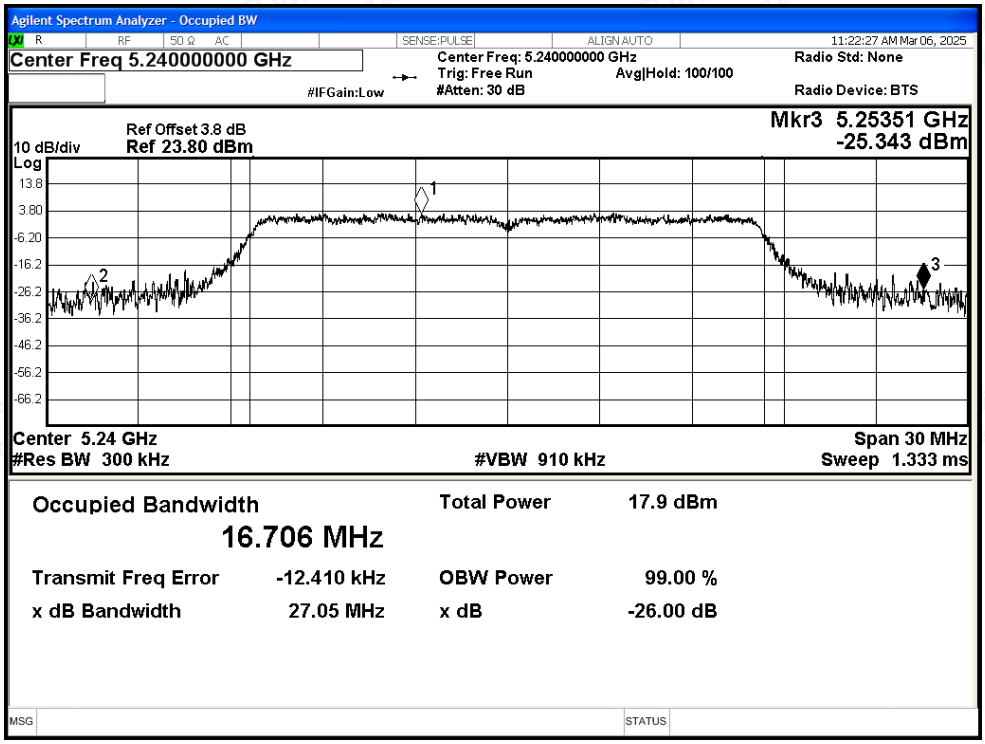

-26dB Bandwidth NVNT n20 5180MHz Ant1

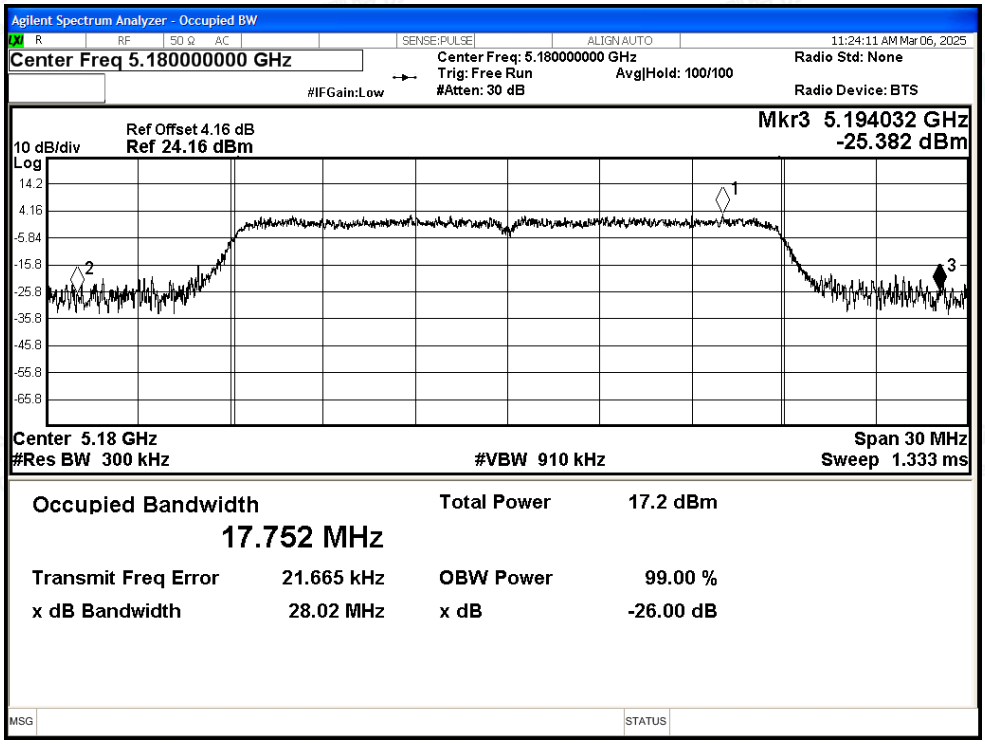

-26dB Bandwidth NVNT n20 5200MHz Ant1

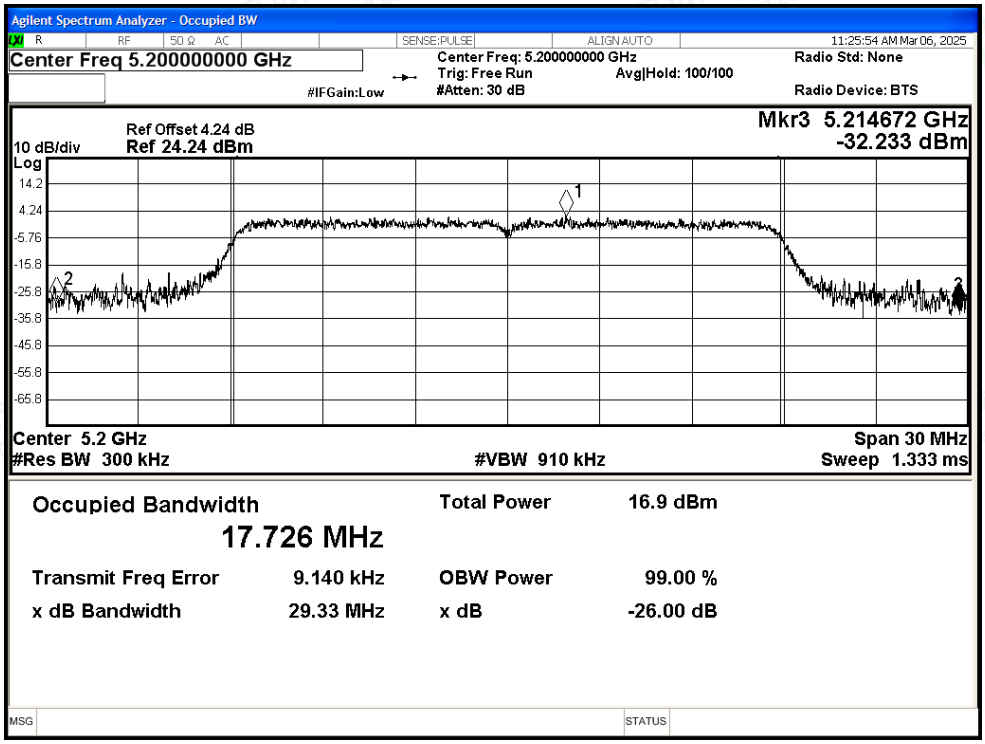

-26dB Bandwidth NVNT n20 5240MHz Ant1

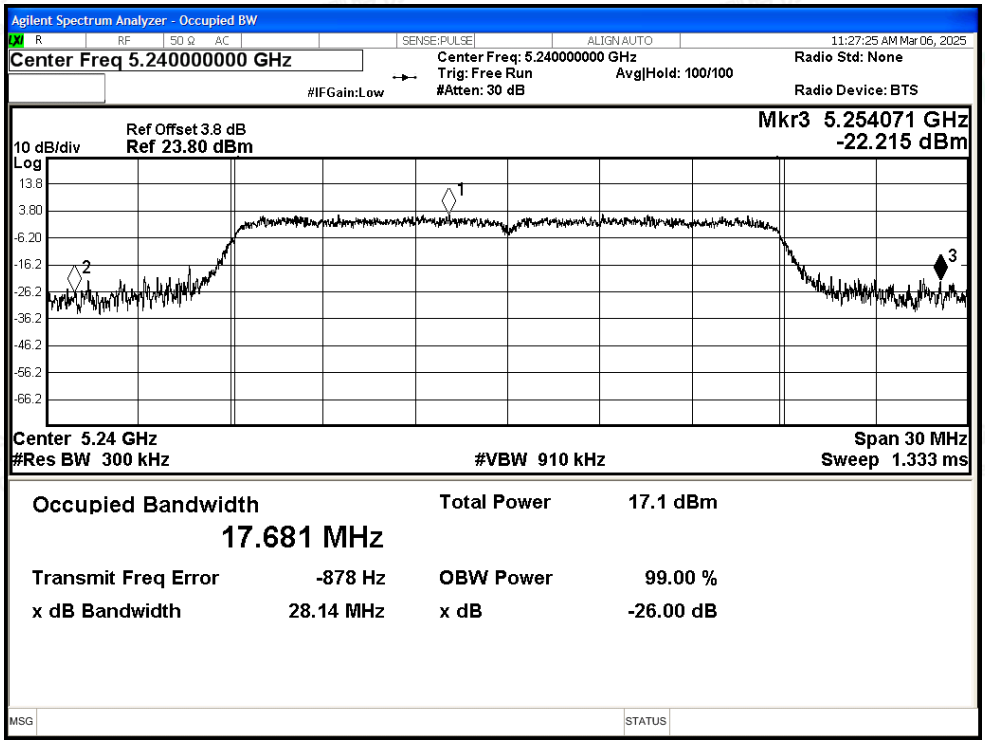

-26dB Bandwidth NVNT n40 5190MHz Ant1

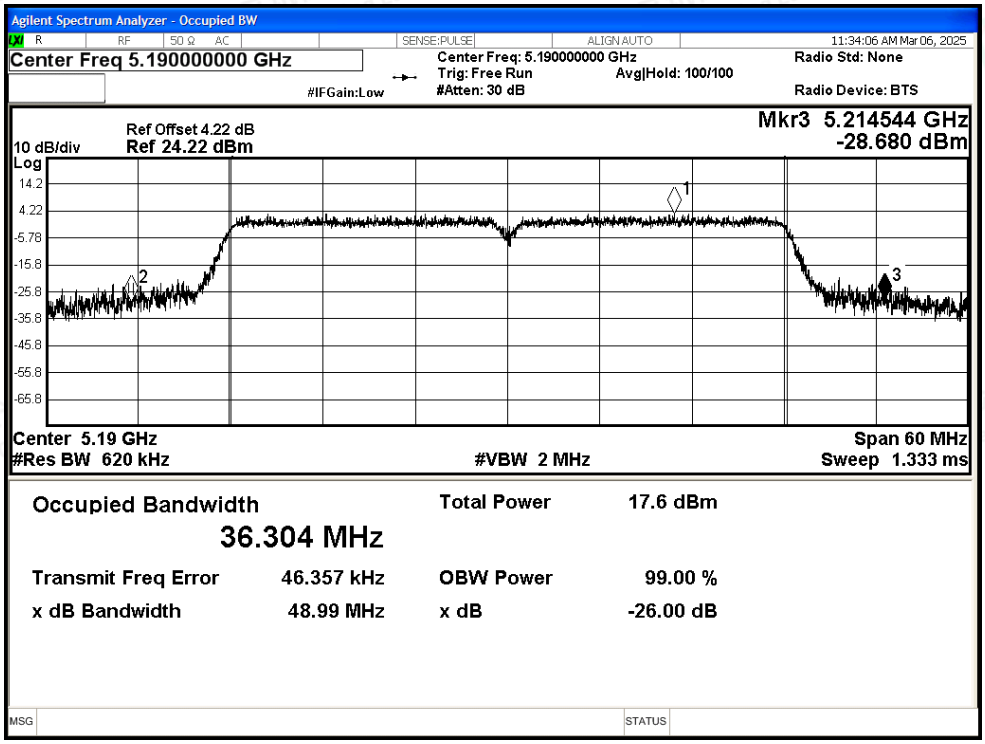

-26dB Bandwidth NVNT n40 5230MHz Ant1

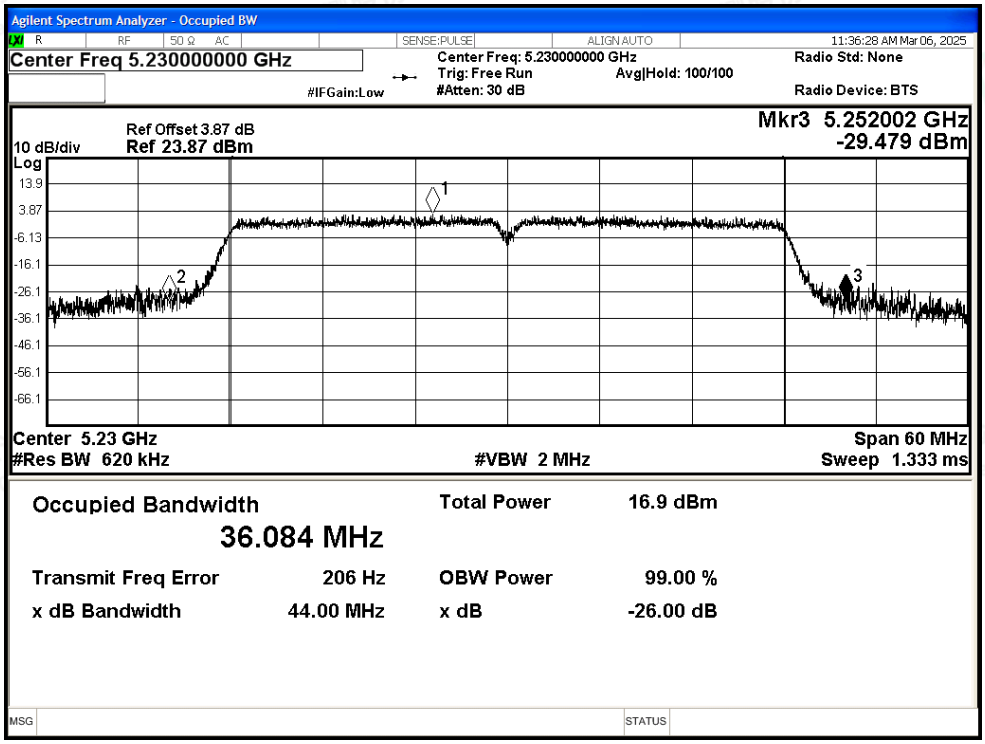

-26dB Bandwidth NVNT ac20 5180MHz Ant1

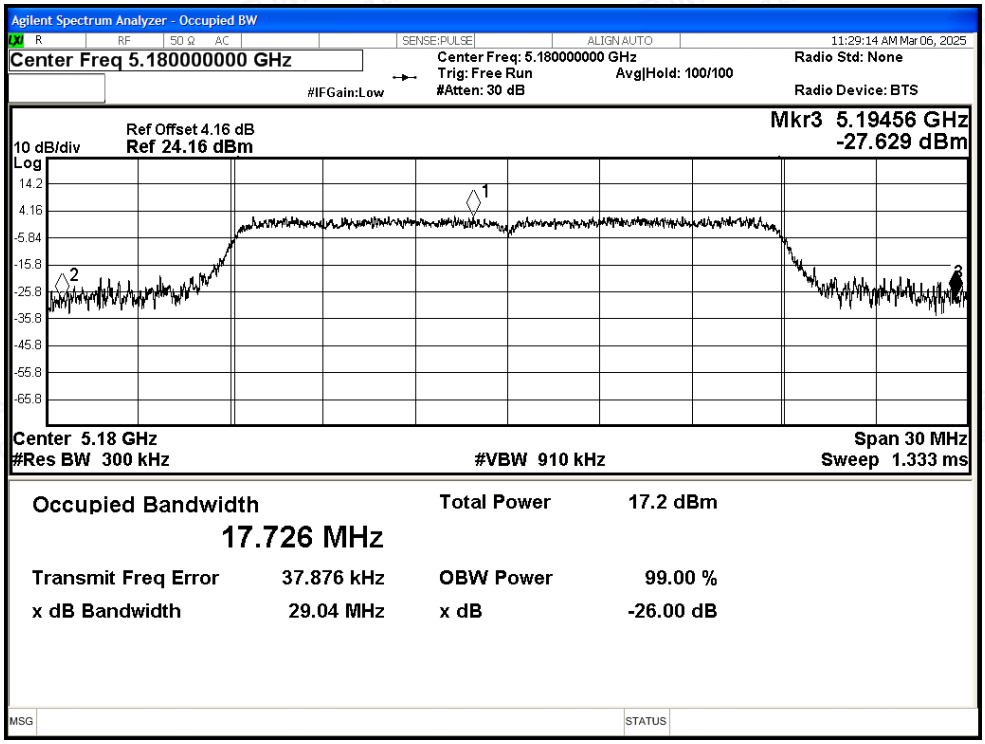

-26dB Bandwidth NVNT ac20 5200MHz Ant1

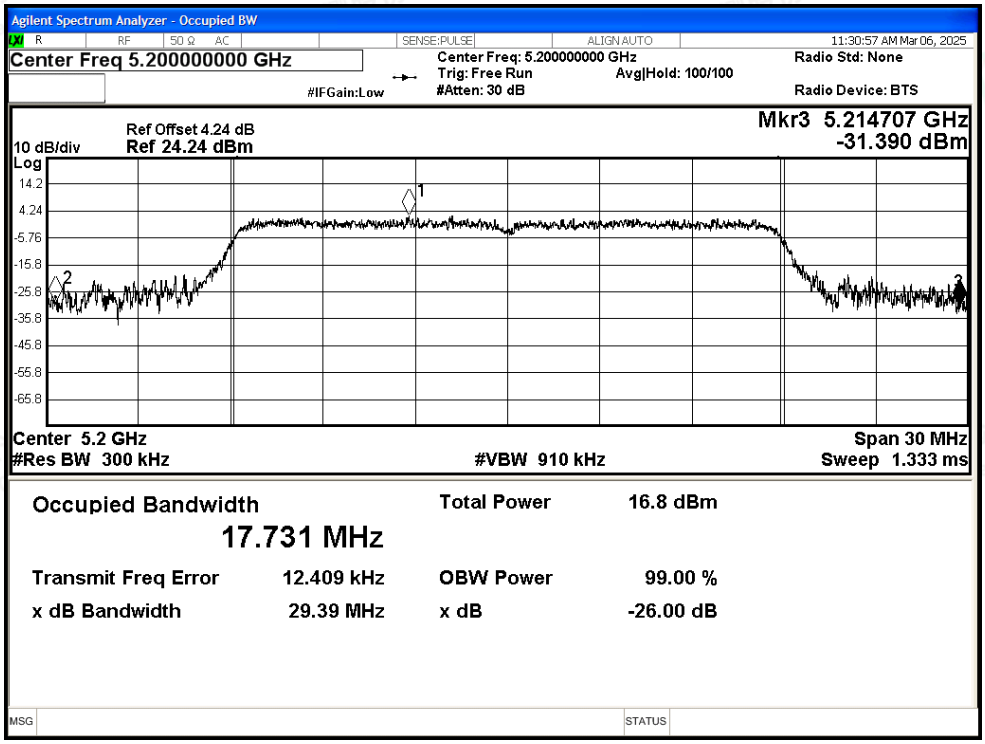

-26dB Bandwidth NVNT ac20 5240MHz Ant1

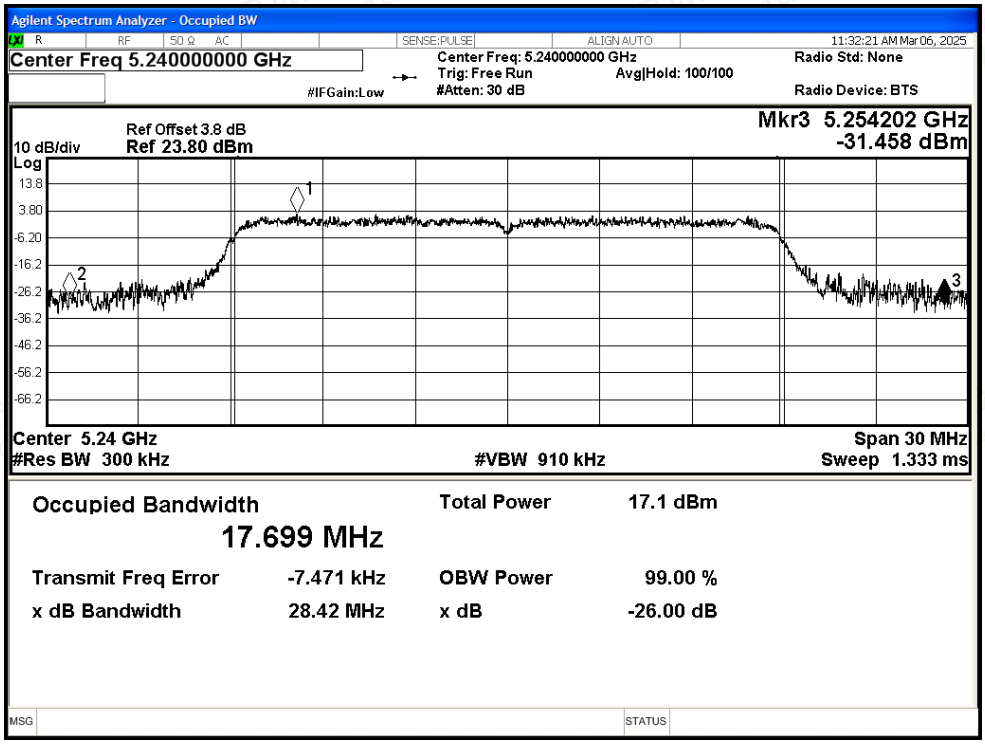

-26dB Bandwidth NVNT ac40 5190MHz Ant1

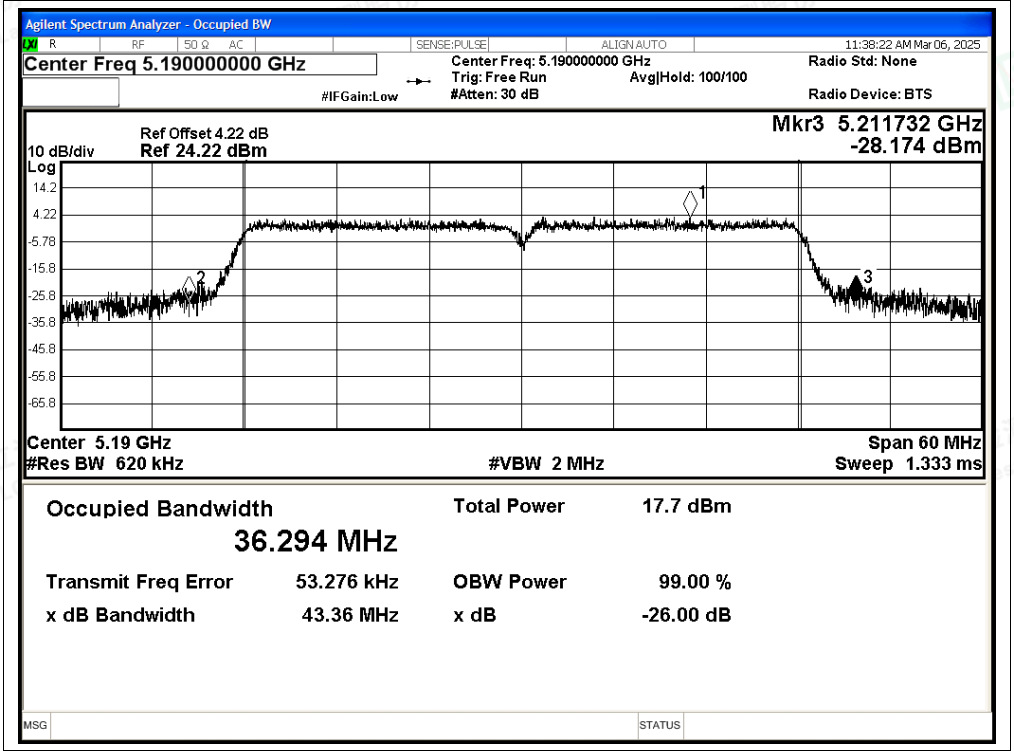

-26dB Bandwidth NVNT ac40 5230MHz Ant1

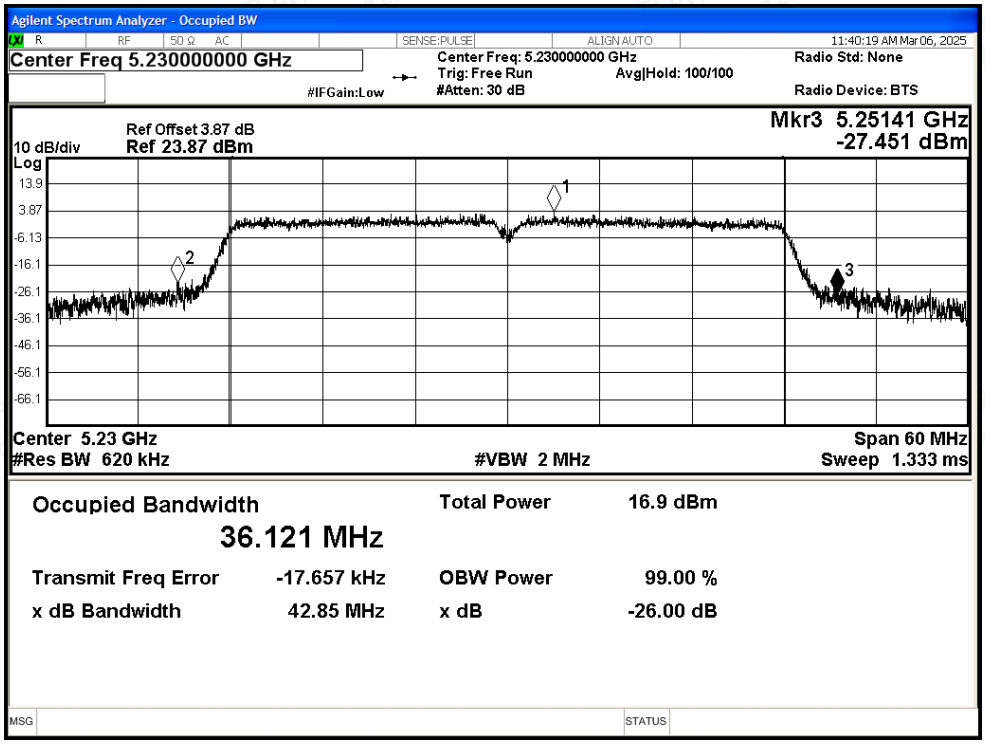

-26dB Bandwidth NVNT ac80 5210MHz Ant1

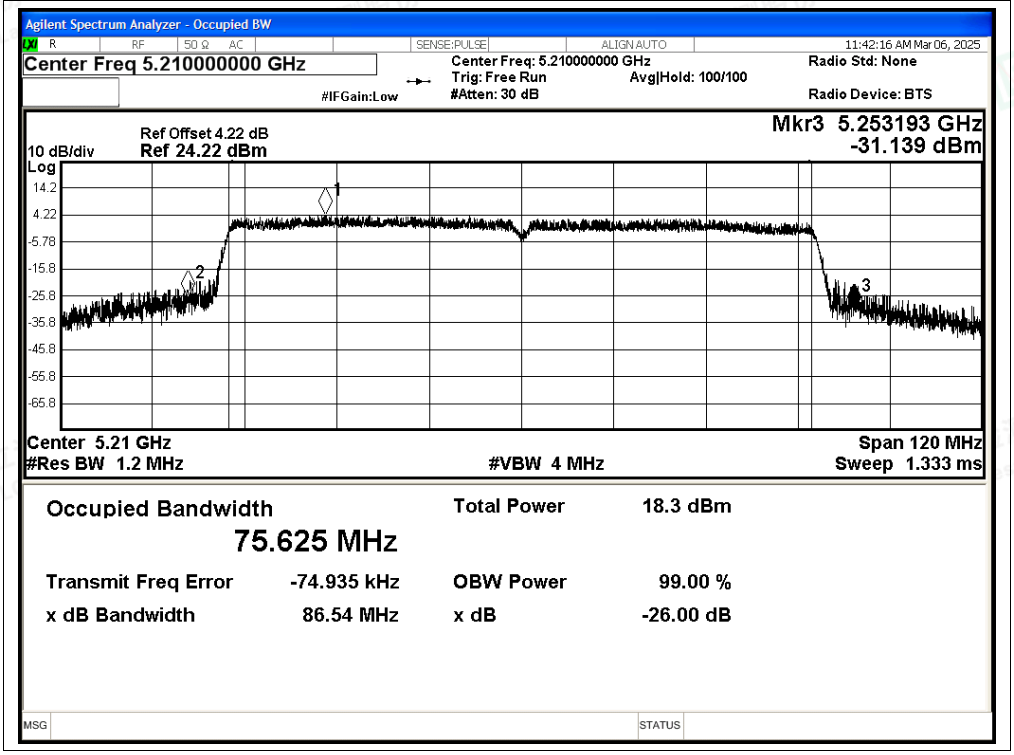

B.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant0	12.31	0.24	12.55	24	Pass
NVNT	a	5200	Ant0	12.07	0.24	12.31	24	Pass
NVNT	a	5240	Ant0	11.55	0.24	11.79	24	Pass
NVNT	n20	5180	Ant0	10.96	0.12	11.08	24	Pass
NVNT	n20	5200	Ant0	11.82	0.12	11.94	24	Pass
NVNT	n20	5240	Ant0	11.47	0.12	11.59	24	Pass
NVNT	n40	5190	Ant0	10.91	0.24	11.15	24	Pass
NVNT	n40	5230	Ant0	10.81	0.24	11.05	24	Pass
NVNT	ac20	5180	Ant0	11.26	0.12	11.38	24	Pass
NVNT	ac20	5200	Ant0	10.96	0.12	11.08	24	Pass
NVNT	ac20	5240	Ant0	11.8	0.12	11.92	24	Pass
NVNT	ac40	5190	Ant0	10.91	0.24	11.15	24	Pass
NVNT	ac40	5230	Ant0	10.72	0.24	10.96	24	Pass
NVNT	ac80	5210	Ant0	10.5	0.25	10.75	24	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	11.87	0.24	12.11	24	Pass
NVNT	a	5200	Ant1	11.37	0.24	11.61	24	Pass
NVNT	a	5240	Ant1	12.09	0.24	12.33	24	Pass
NVNT	n20	5180	Ant1	11.8	0.12	11.92	24	Pass
NVNT	n20	5200	Ant1	11.26	0.12	11.38	24	Pass
NVNT	n20	5240	Ant1	11.62	0.12	11.74	24	Pass
NVNT	n40	5190	Ant1	11.29	0.24	11.53	24	Pass
NVNT	n40	5230	Ant1	10.49	0.23	10.72	24	Pass
NVNT	ac20	5180	Ant1	11.69	0.12	11.81	24	Pass
NVNT	ac20	5200	Ant1	11.3	0.12	11.42	24	Pass
NVNT	ac20	5240	Ant1	11.6	0.12	11.72	24	Pass
NVNT	ac40	5190	Ant1	11.29	0.24	11.53	24	Pass
NVNT	ac40	5230	Ant1	10.52	0.24	10.76	24	Pass
NVNT	ac80	5210	Ant1	10.96	0.47	11.43	24	Pass

MIMO

Condition	Mode	Frequency (MHz)	Report EIRP Power (dBm)			Limit (dBm)	Verdict
			Ant0	Ant1	Ant0+Ant1		
NVNT	n20	5180	11.08	11.92	14.53	24	Pass
NVNT	n20	5200	11.94	11.38	14.68	24	Pass
NVNT	n20	5240	11.59	11.74	14.68	24	Pass
NVNT	n40	5190	11.15	11.53	14.35	24	Pass
NVNT	n40	5230	11.05	10.72	13.90	24	Pass
NVNT	ac20	5180	11.38	11.81	14.61	24	Pass
NVNT	ac20	5200	11.08	11.42	14.26	24	Pass
NVNT	ac20	5240	11.92	11.72	14.83	24	Pass
NVNT	ac40	5190	11.15	11.53	14.35	24	Pass
NVNT	ac40	5230	10.96	10.76	13.87	24	Pass
NVNT	ac80	5210	10.75	11.43	14.11	24	Pass

B.3 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/MHz)	Duty Factor (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5180	Ant0	1.99	0.24	2.23	11	Pass
NVNT	a	5200	Ant0	1.41	0.24	1.65	11	Pass
NVNT	a	5240	Ant0	0.36	0.24	0.60	11	Pass
NVNT	n20	5180	Ant0	0.47	0.12	0.59	11	Pass
NVNT	n20	5200	Ant0	1.11	0.12	1.23	11	Pass
NVNT	n20	5240	Ant0	0.86	0.12	0.98	11	Pass
NVNT	n40	5190	Ant0	-2.43	0.24	-2.19	11	Pass
NVNT	n40	5230	Ant0	-2.19	0.24	-1.95	11	Pass
NVNT	ac20	5180	Ant0	0.66	0.12	0.78	11	Pass
NVNT	ac20	5200	Ant0	1.44	0.12	1.56	11	Pass
NVNT	ac20	5240	Ant0	0.95	0.12	1.07	11	Pass
NVNT	ac40	5190	Ant0	-2.74	0.24	-2.50	11	Pass
NVNT	ac40	5230	Ant0	-2.68	0.24	-2.44	11	Pass
NVNT	ac80	5210	Ant0	-5.82	0.25	-5.57	11	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/MHz)	Duty Factor (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5180	Ant1	1.12	0.24	1.36	11	Pass
NVNT	a	5200	Ant1	0.91	0.24	1.15	11	Pass
NVNT	a	5240	Ant1	1.53	0.24	1.77	11	Pass
NVNT	n20	5180	Ant1	0.9	0.12	1.02	11	Pass
NVNT	n20	5200	Ant1	0.36	0.12	0.48	11	Pass
NVNT	n20	5240	Ant1	0.7	0.12	0.82	11	Pass
NVNT	n40	5190	Ant1	-2.68	0.24	-2.44	11	Pass
NVNT	n40	5230	Ant1	-3.13	0.23	-2.9	11	Pass
NVNT	ac20	5180	Ant1	0.93	0.12	1.05	11	Pass
NVNT	ac20	5200	Ant1	0.48	0.12	0.6	11	Pass
NVNT	ac20	5240	Ant1	0.75	0.12	0.87	11	Pass
NVNT	ac40	5190	Ant1	-2.5	0.24	-2.26	11	Pass
NVNT	ac40	5230	Ant1	-3.12	0.24	-2.88	11	Pass
NVNT	ac80	5210	Ant1	-5.14	0.47	-4.67	11	Pass

MIMO

Condition	Mode	Frequency (MHz)	EIRP PSD (dBm/MHz)			Limit (dBm/MHz)	Verdict
			Ant0	Ant1	Ant0+Ant1		
NVNT	n20	5180	0.59	1.02	3.82	10.55	Pass
NVNT	n20	5200	1.23	0.48	3.88	10.55	Pass
NVNT	n20	5240	0.98	0.82	3.91	10.55	Pass
NVNT	n40	5190	-2.19	-2.44	0.70	10.55	Pass
NVNT	n40	5230	-1.95	-2.9	0.61	10.55	Pass
NVNT	ac20	5180	0.78	1.05	3.93	10.55	Pass
NVNT	ac20	5200	1.56	0.6	4.12	10.55	Pass
NVNT	ac20	5240	1.07	0.87	3.98	10.55	Pass
NVNT	ac40	5190	-2.50	-2.26	0.63	10.55	Pass
NVNT	ac40	5230	-2.44	-2.88	0.36	10.55	Pass
NVNT	ac80	5210	-5.57	-4.67	-2.09	10.55	Pass

Test Graphs

PSD NVNT a 5180MHz Ant0

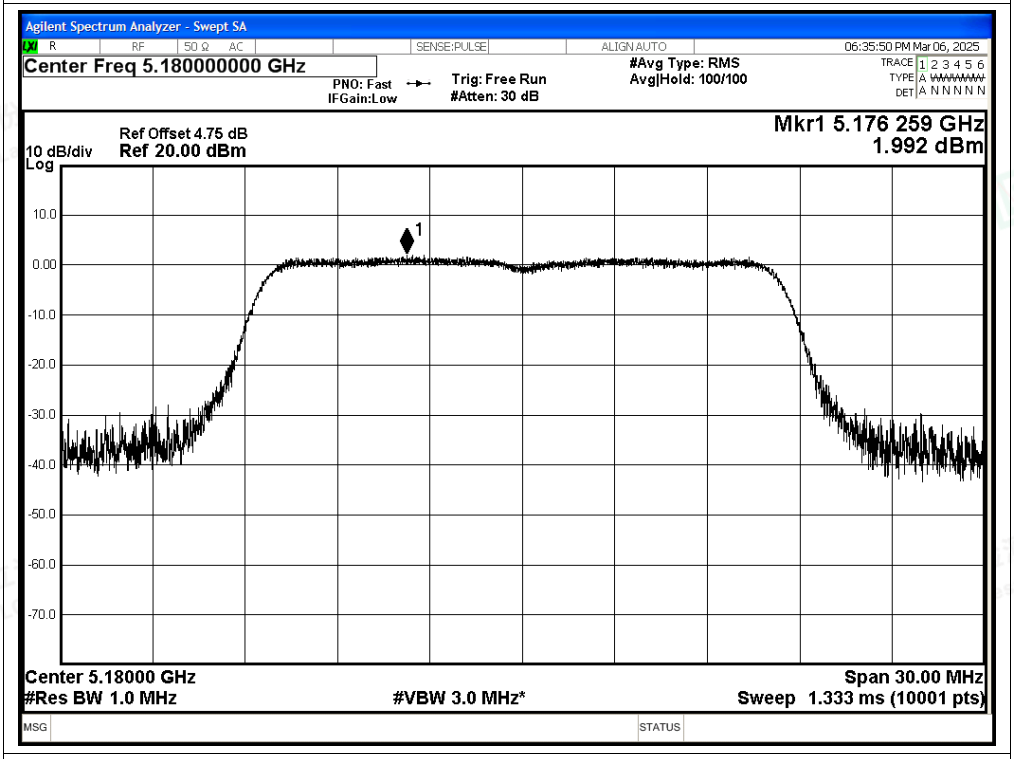

PSD NVNT a 5200MHz Ant0

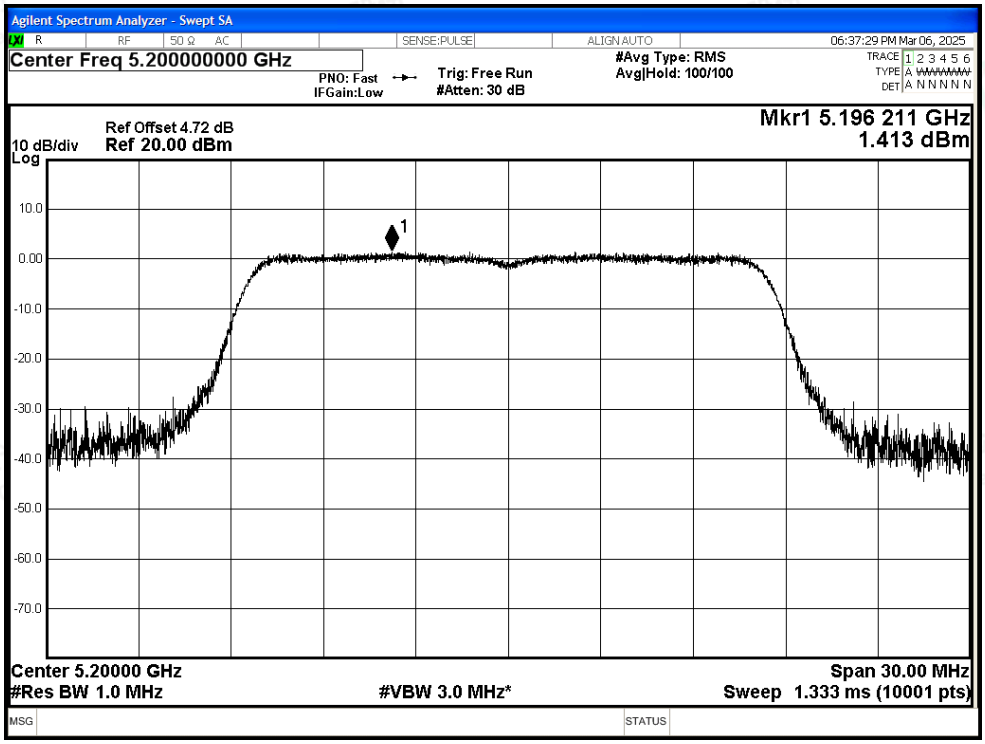

PSD NVNT a 5240MHz Ant0

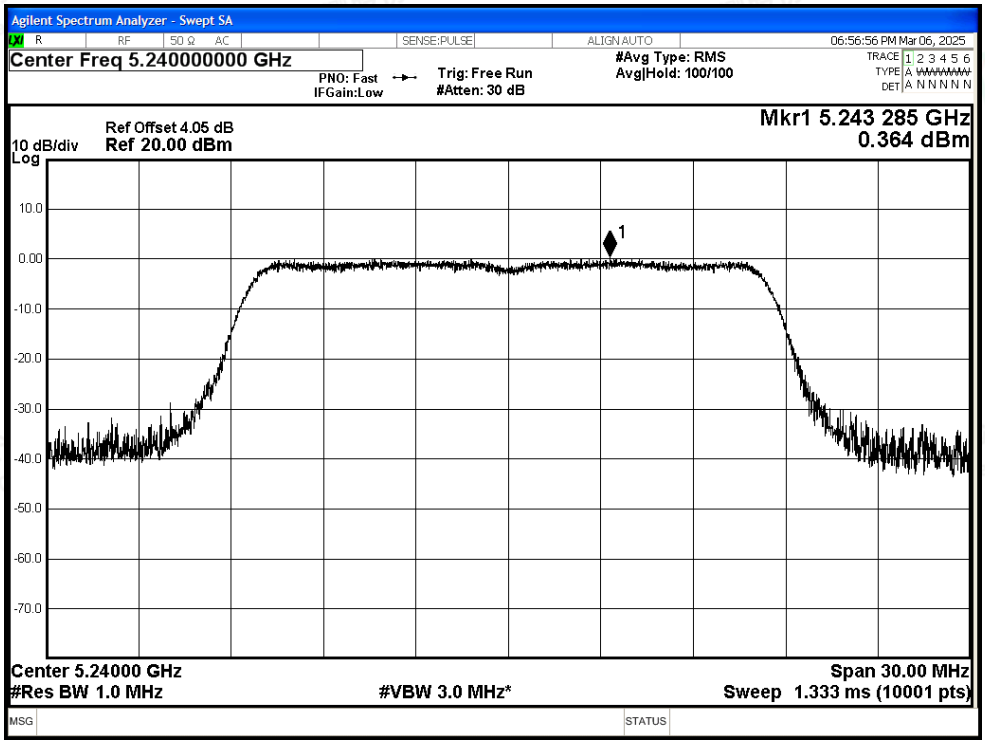

PSD NVNT n20 5180MHz Ant0

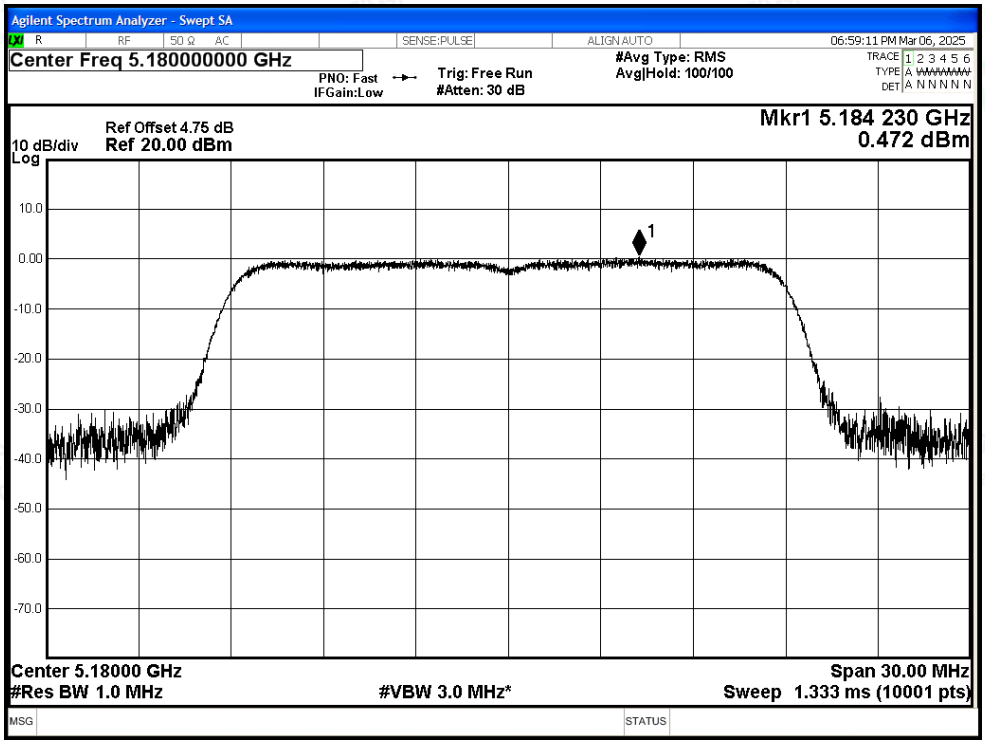

PSD NVNT n20 5200MHz Ant0

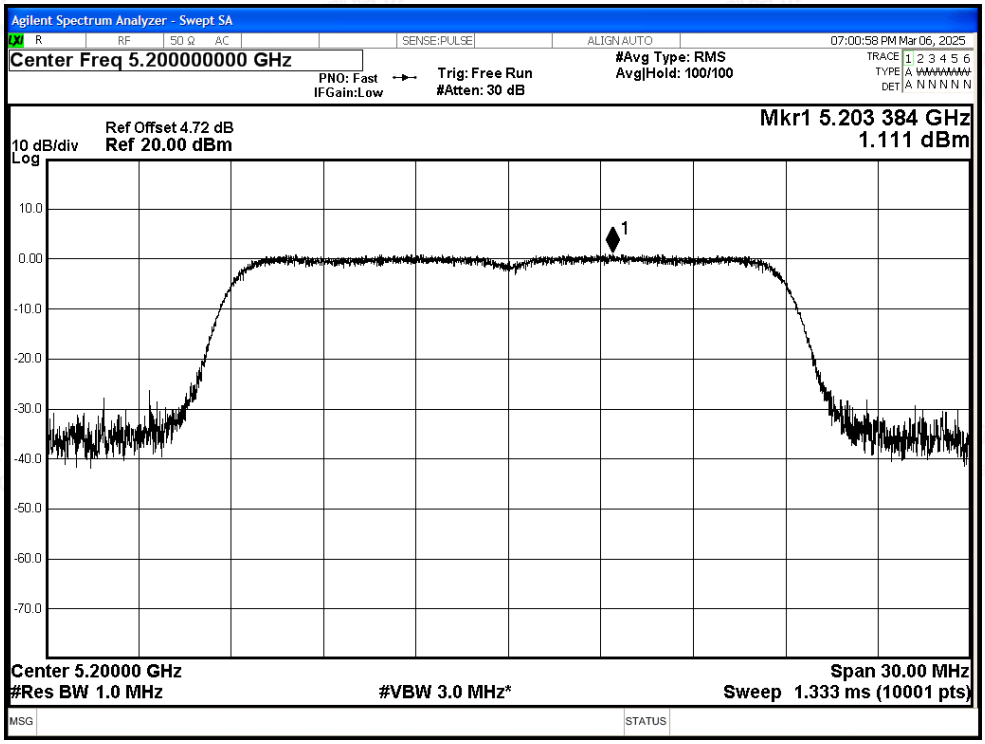

PSD NVNT n20 5240MHz Ant0

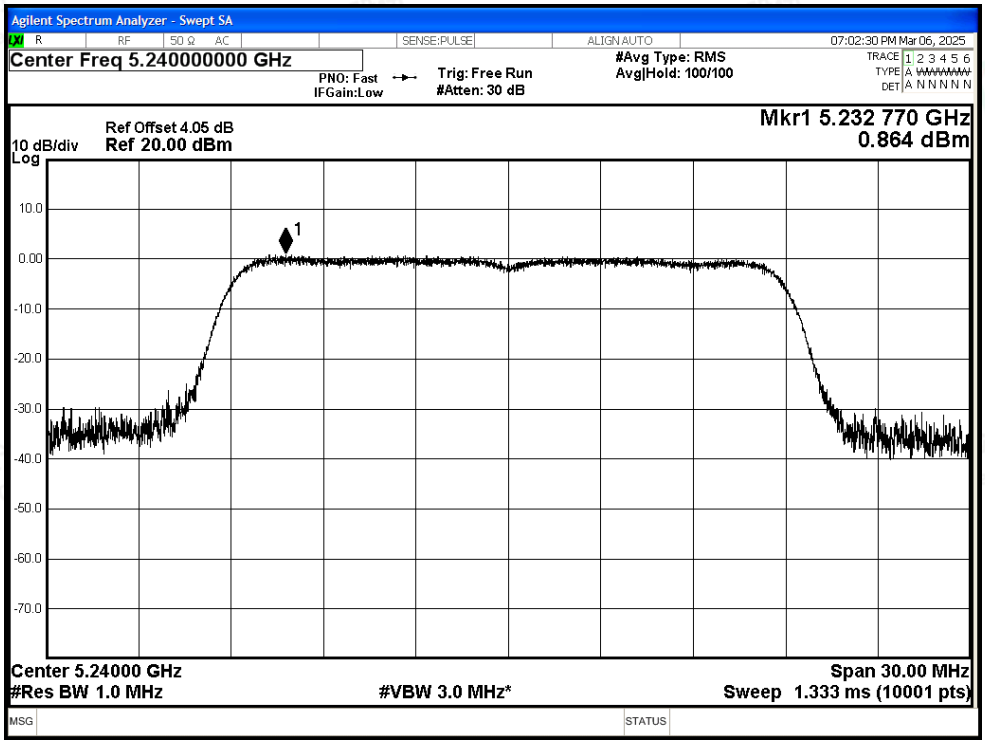

PSD NVNT n40 5190MHz Ant0

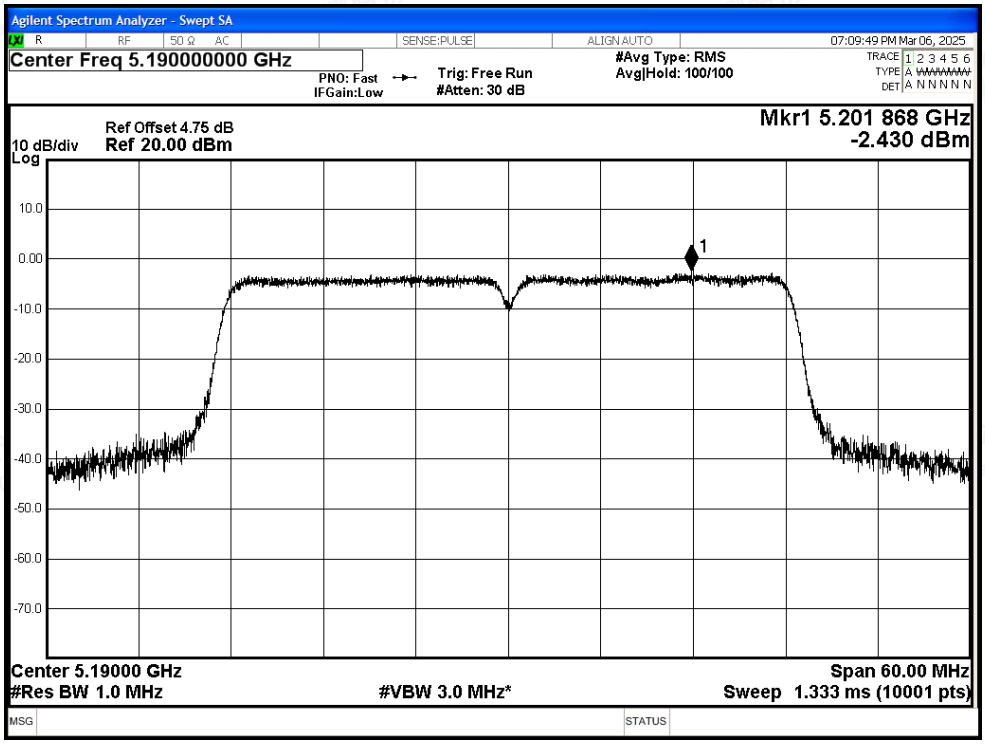

PSD NVNT n40 5230MHz Ant0

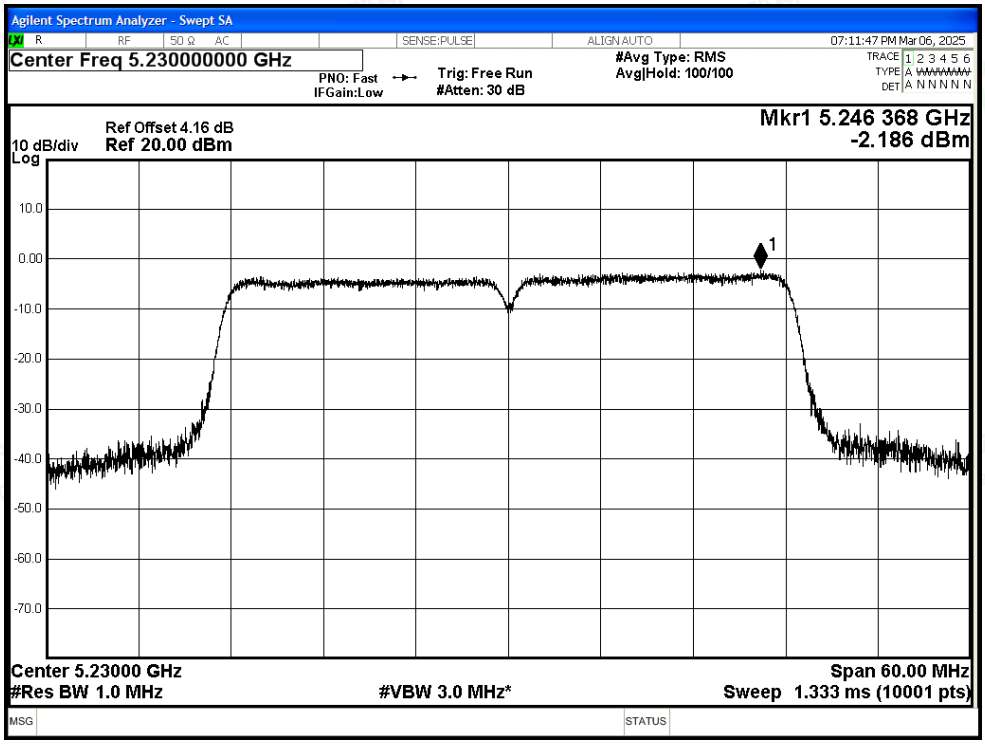

PSD NVNT ac20 5180MHz Ant0

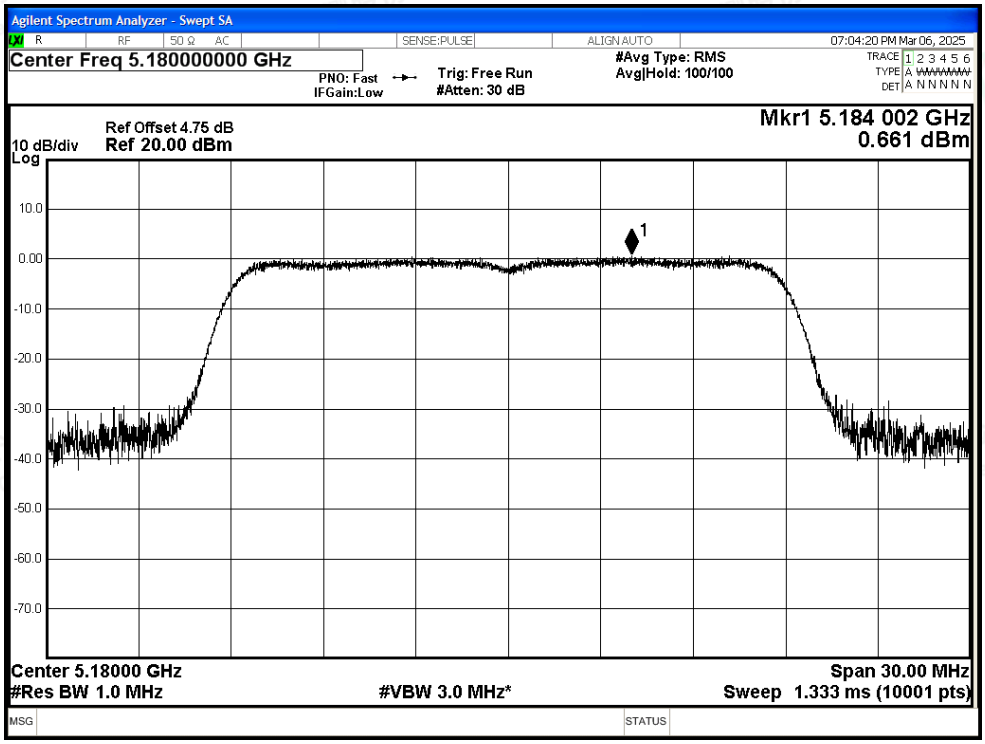

PSD NVNT ac20 5200MHz Ant0

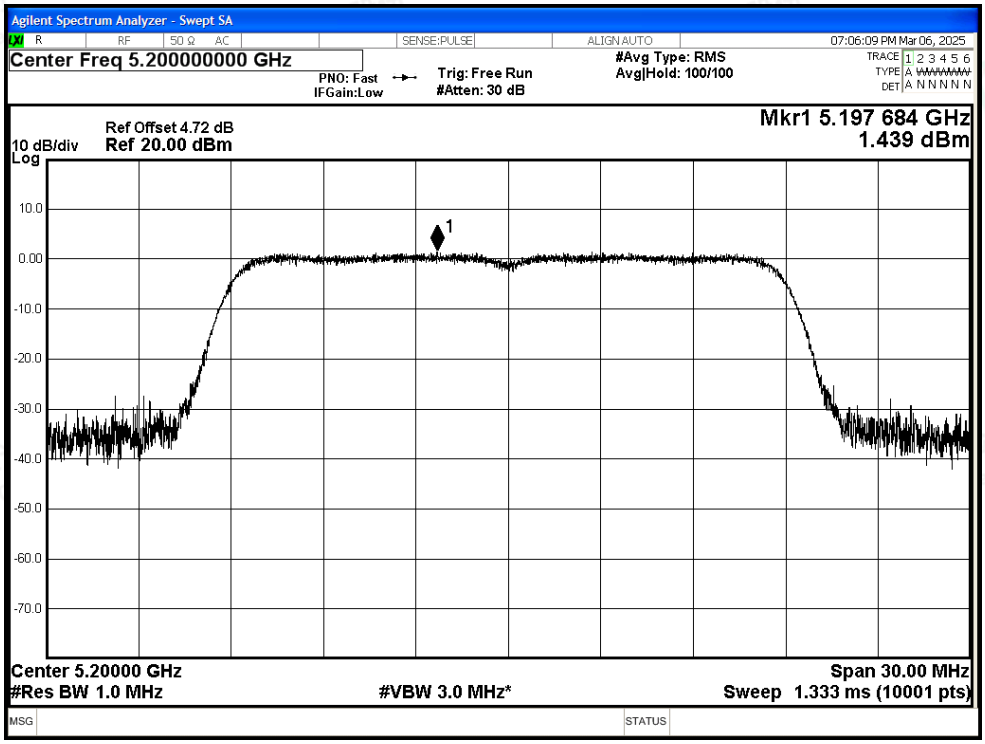

PSD NVNT ac20 5240MHz Ant0

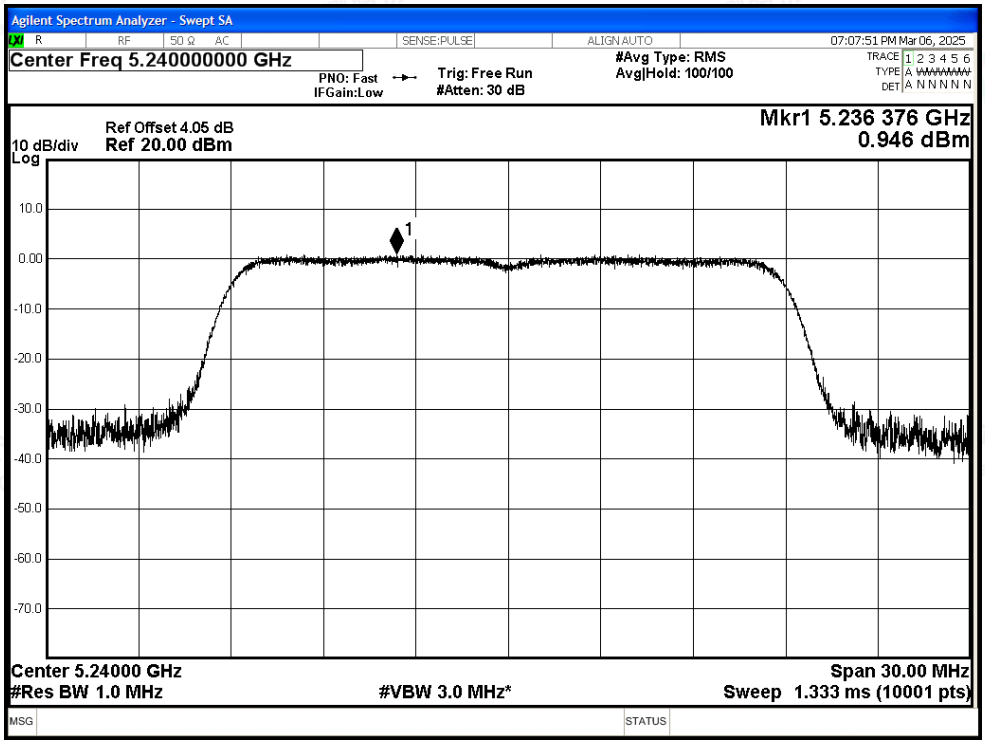

PSD NVNT ac40 5190MHz Ant0

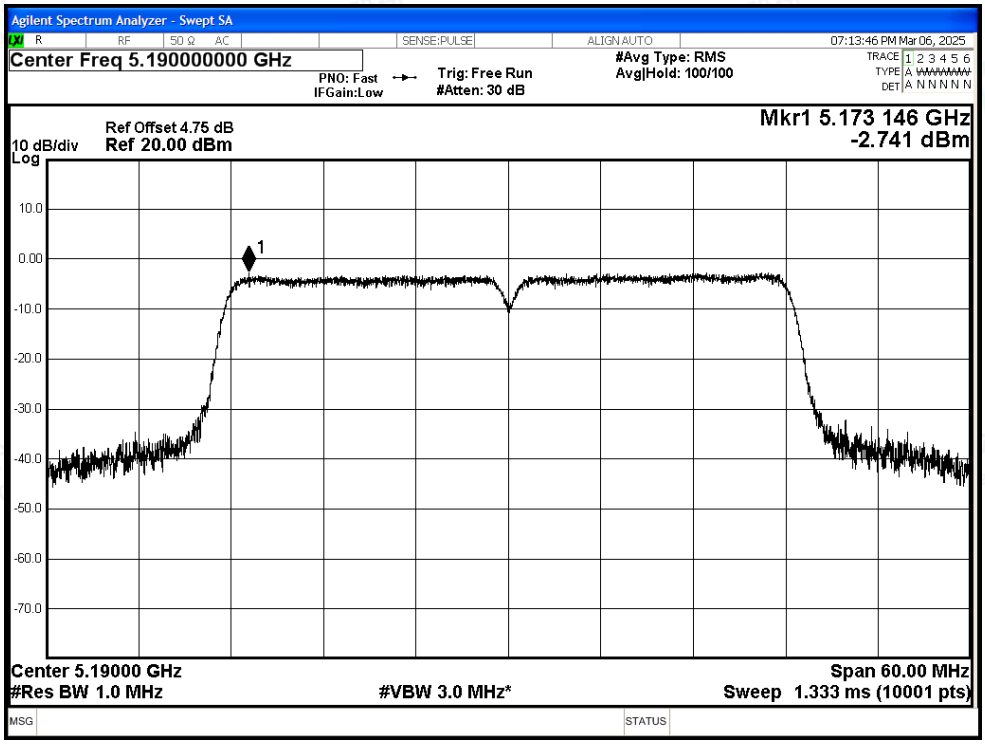

PSD NVNT ac40 5230MHz Ant0

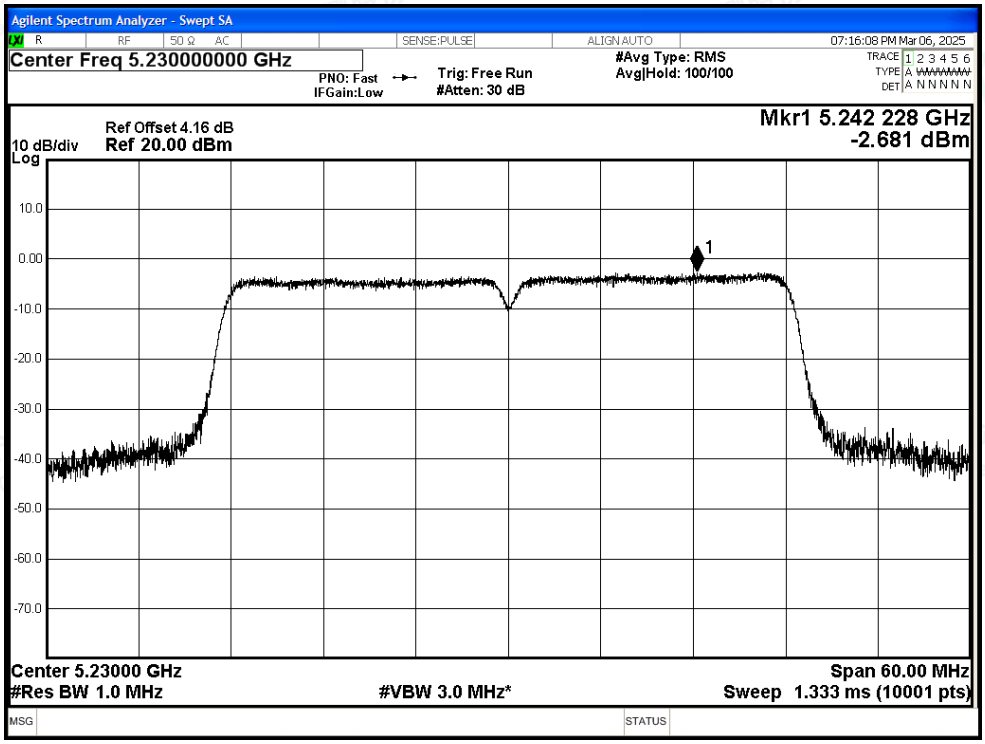

PSD NVNT ac80 5210MHz Ant0

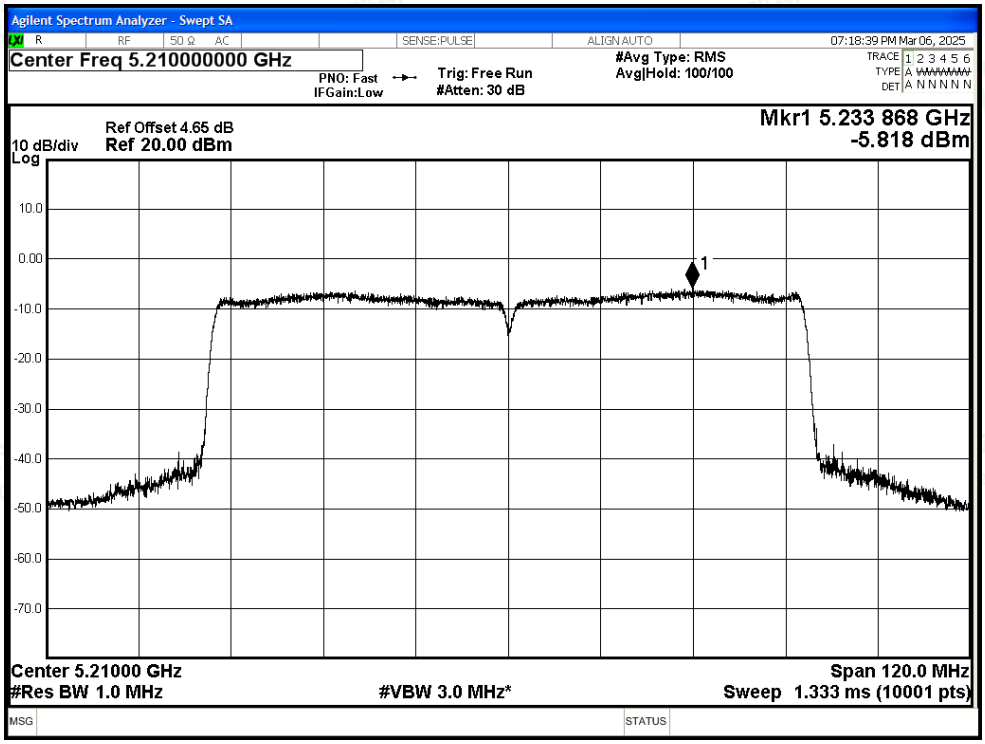

Test Graphs

PSD NVNT a 5180MHz Ant1

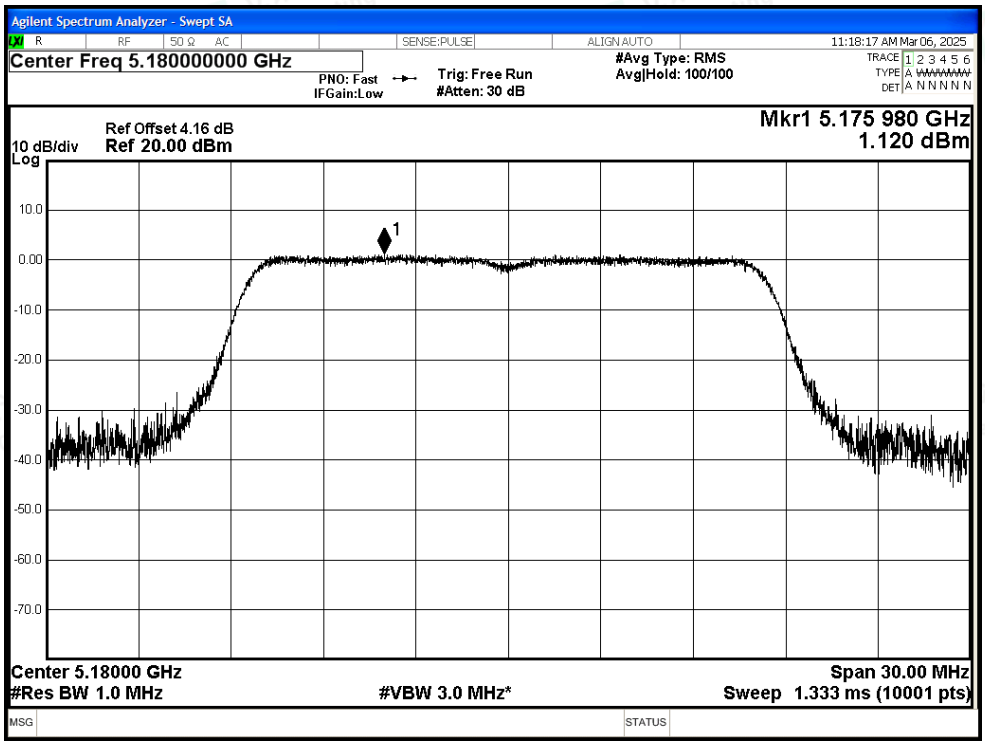

PSD NVNT a 5200MHz Ant1

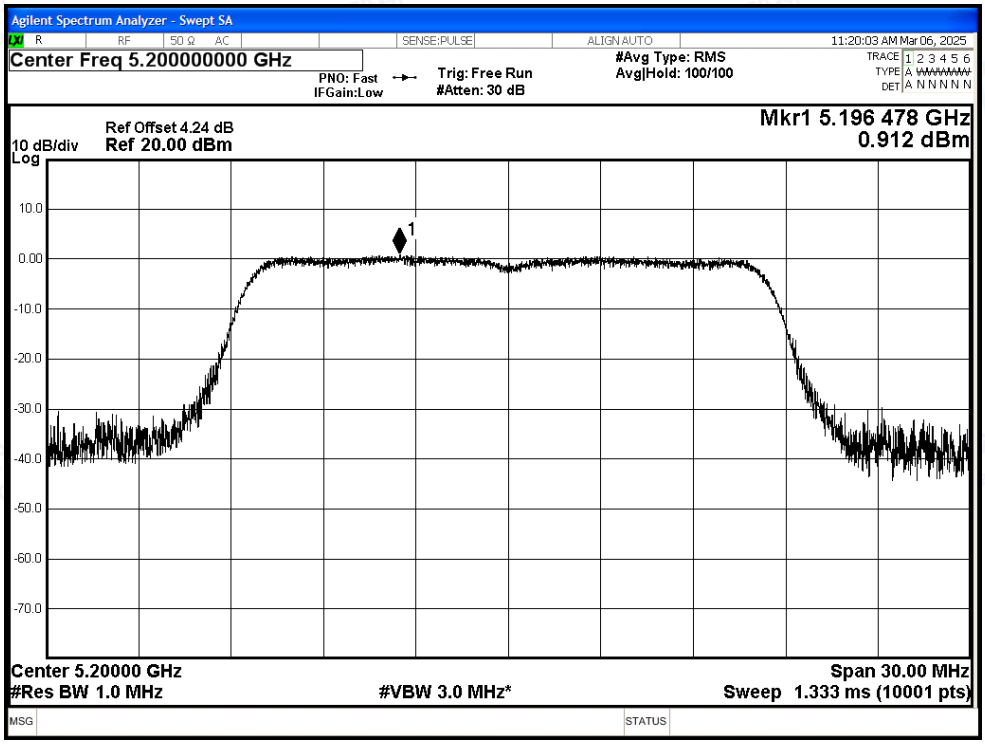

PSD NVNT a 5240MHz Ant1

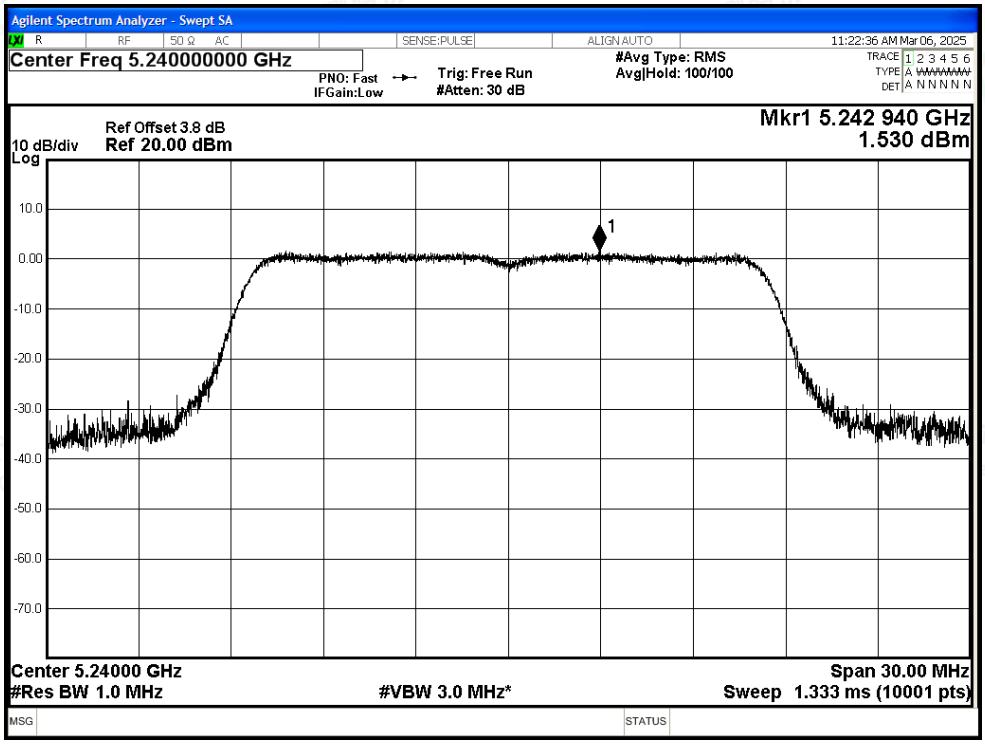

PSD NVNT n20 5180MHz Ant1

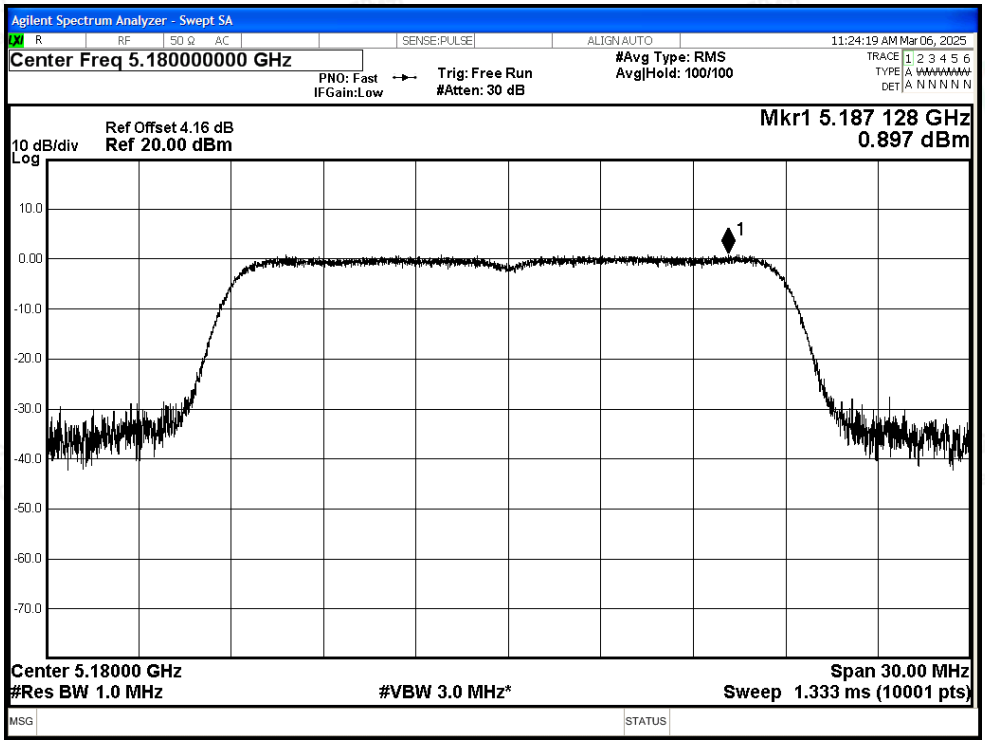

PSD NVNT n20 5200MHz Ant1

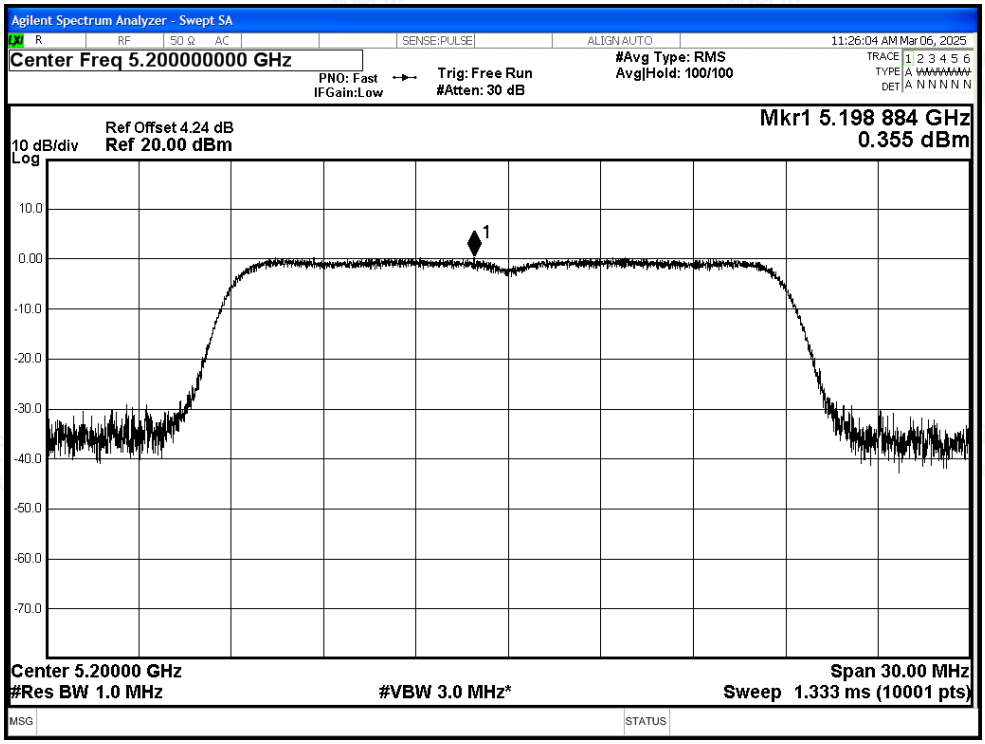

PSD NVNT n20 5240MHz Ant1

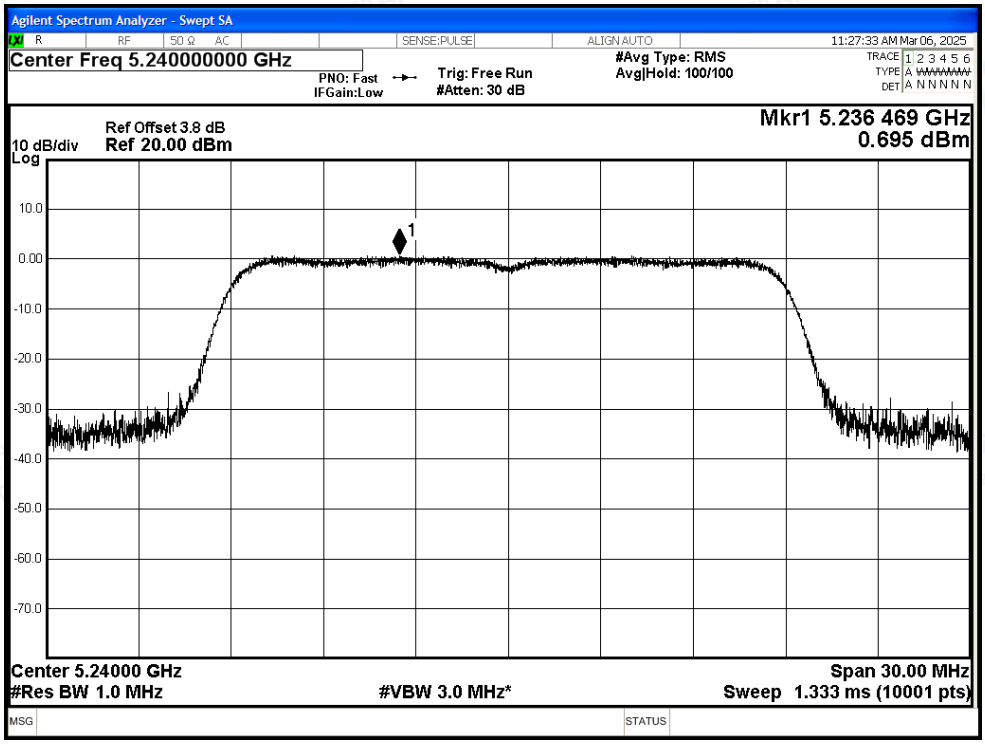

PSD NVNT n40 5190MHz Ant1

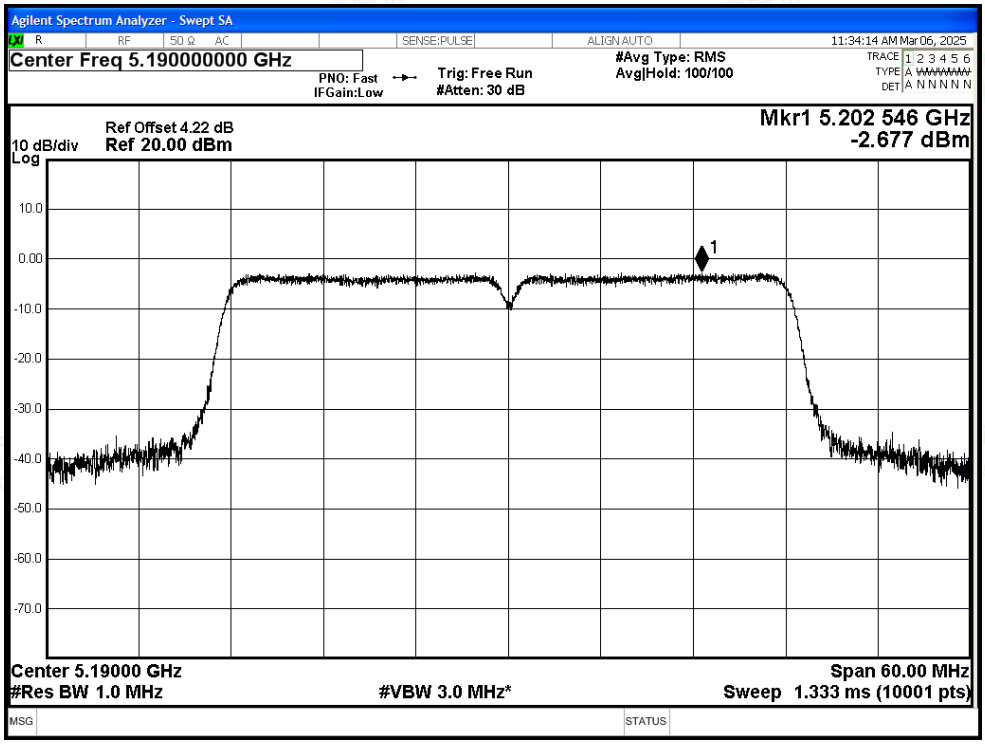

PSD NVNT n40 5230MHz Ant1

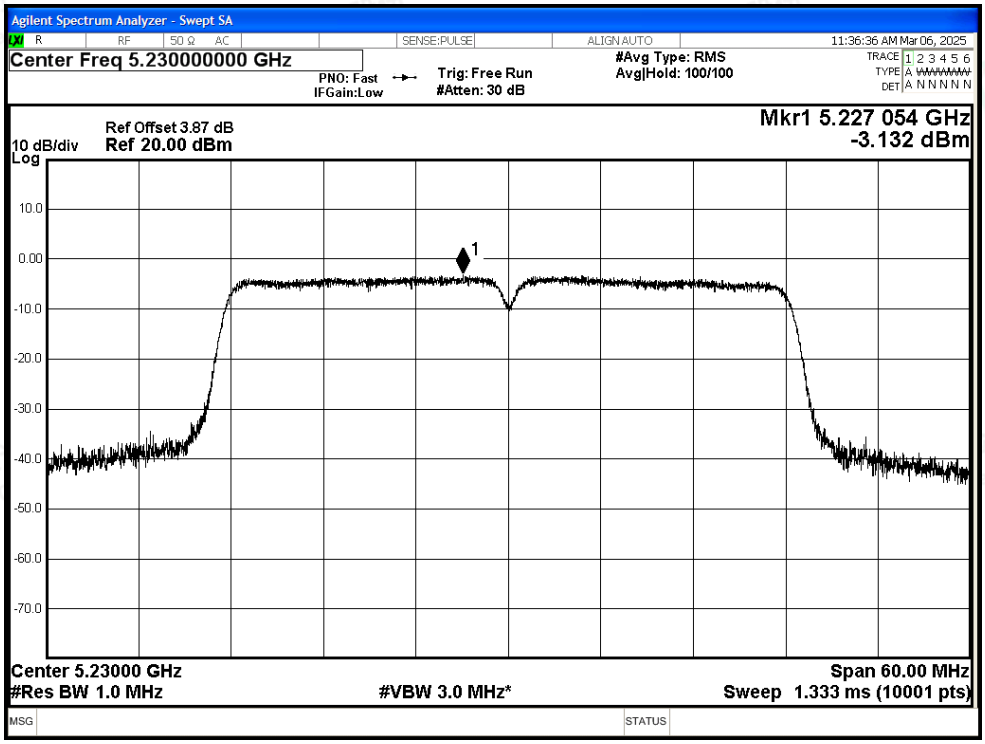

PSD NVNT ac20 5180MHz Ant1

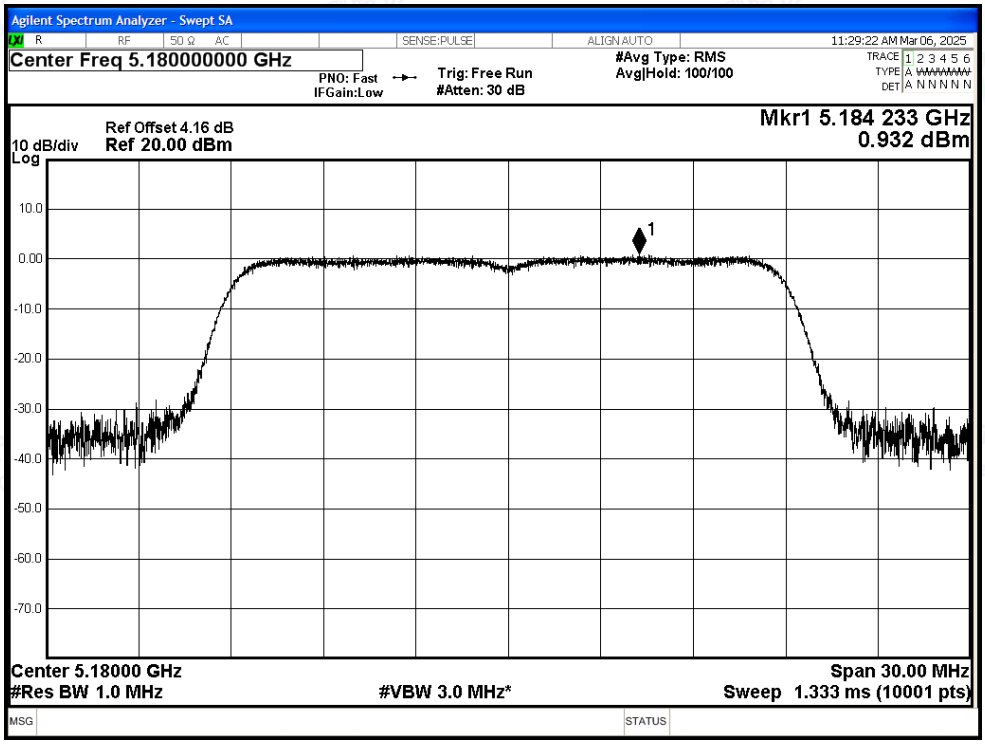

PSD NVNT ac20 5200MHz Ant1

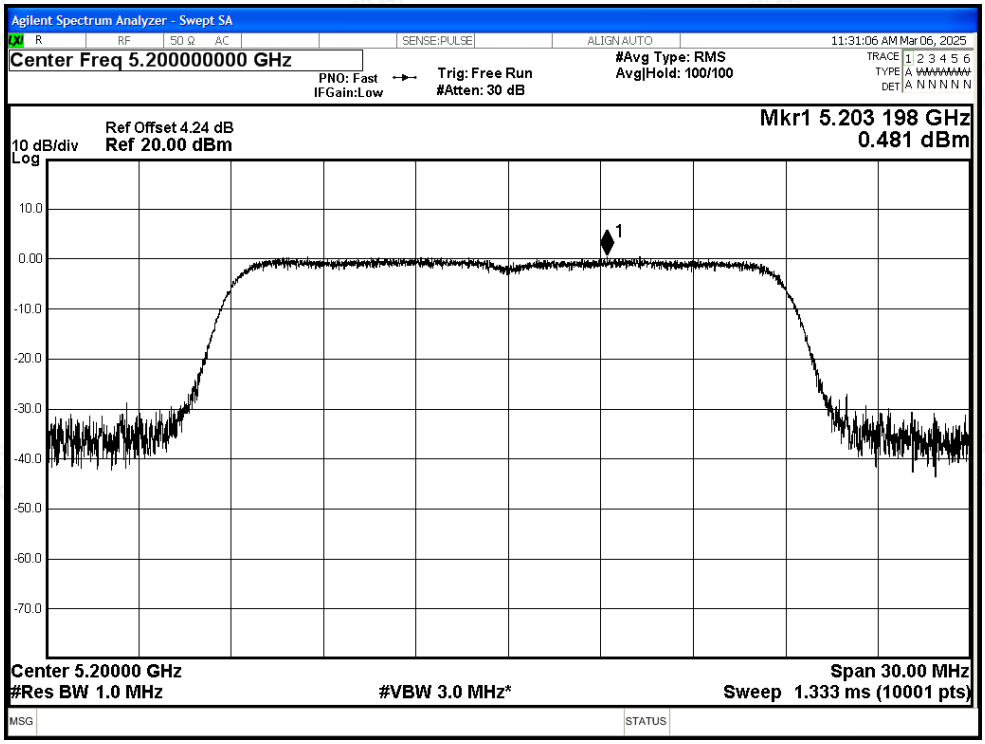

PSD NVNT ac20 5240MHz Ant1

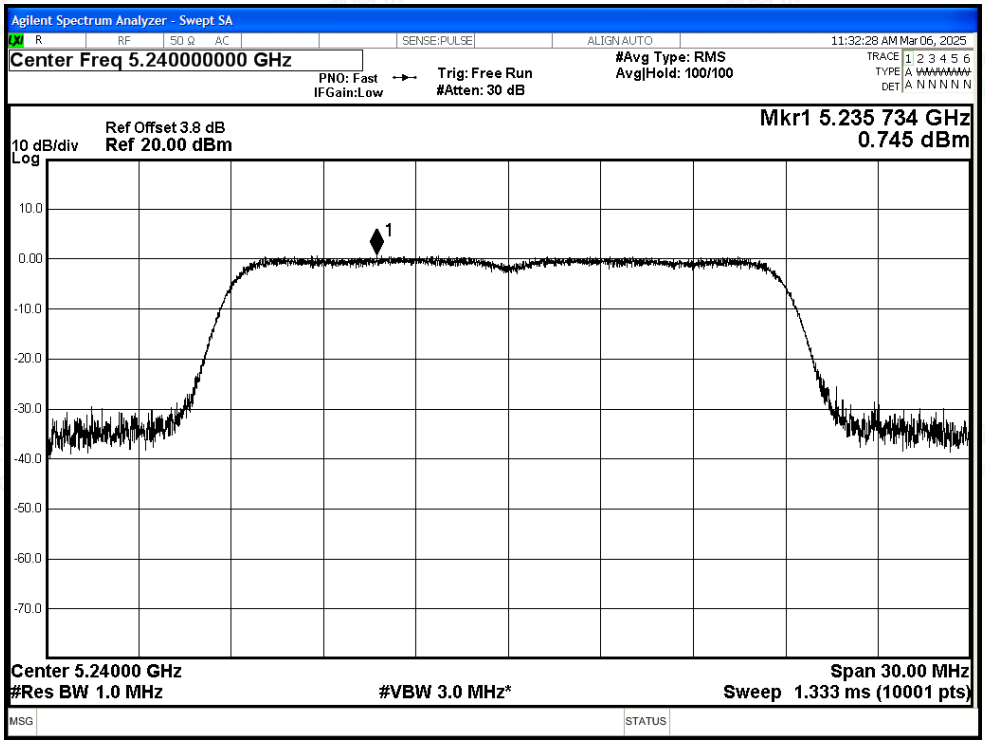

PSD NVNT ac40 5190MHz Ant1

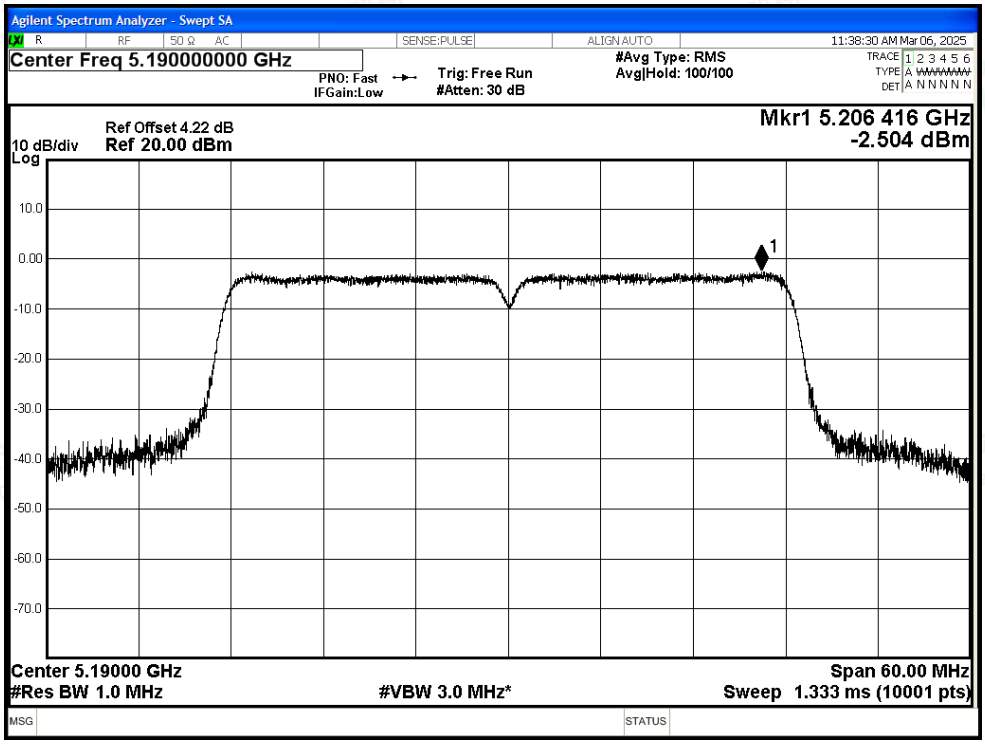

PSD NVNT ac40 5230MHz Ant1

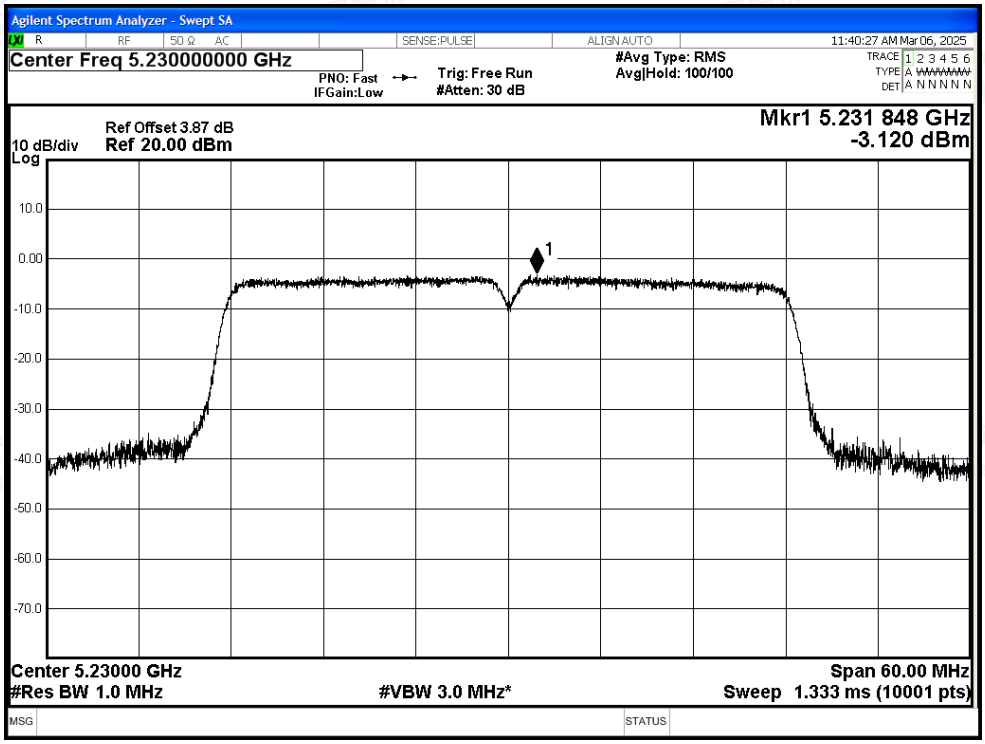

PSD NVNT ac80 5210MHz Ant1

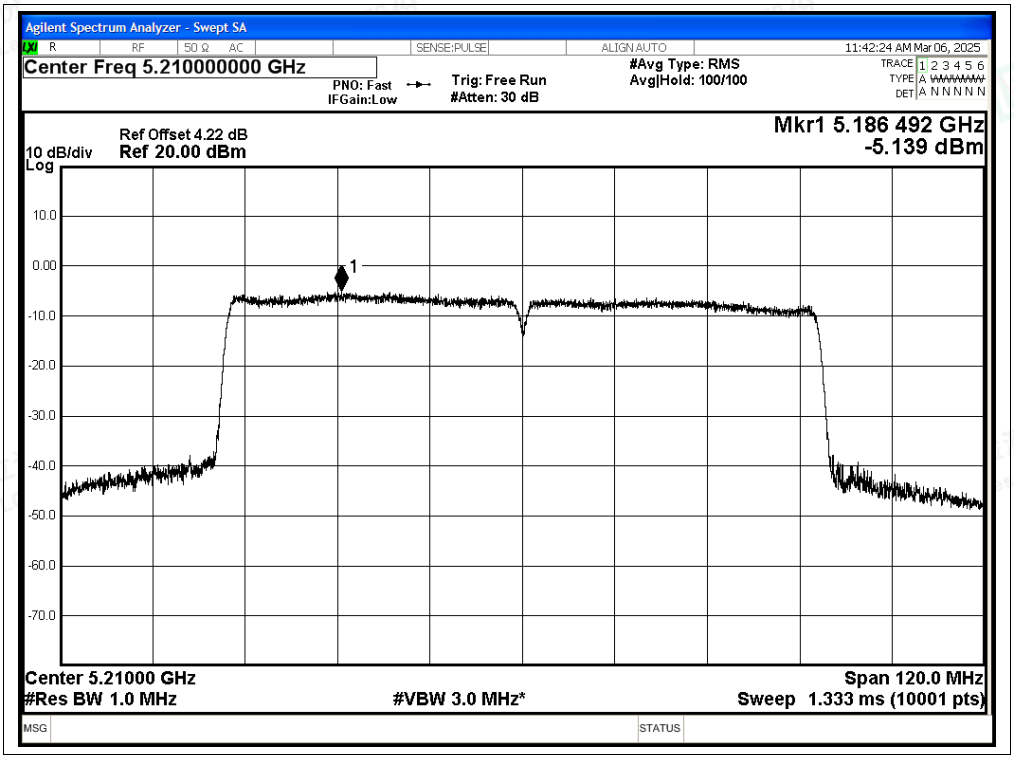
Agilent Spectrum Analyzer - Swept SA
Center Freq 5.210000000 GHz
PNO: Fast
IFGain:Low
Trig: Free Run
#Atten: 30 dB
#Avg Type: RMS
Avg|Hold: 100/100
11:42:24 AM Mar 06, 2025
Ref Offset 4.22 dB
10 dB/div
Log
Ref 20.00 dBm
Mkr1 5.186 492 GHz
-5.139 dBm
Center 5.21000 GHz
#Res BW 1.0 MHz
#VBW 3.0 MHz*
Span 120.0 MHz
Sweep 1.333 ms (10001 pts)

B.4 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	a	5180	Ant0	4500	-48.48	2.62	-	49.37	Peak	68.2	Pass
NVNT	a	5180	Ant0	4500	-57.1	2.62	0.24	40.99	Average	54	Pass
NVNT	a	5180	Ant0	5098.5	-43.99	2.62	-	53.86	Peak	68.2	Pass
NVNT	a	5180	Ant0	5143.3	-54.51	2.62	0.24	43.58	Average	54	Pass
NVNT	a	5180	Ant0	5150	-45.32	2.62	-	52.53	Peak	68.2	Pass
NVNT	a	5180	Ant0	5150	-54.73	2.62	0.24	43.36	Average	54	Pass
NVNT	a	5240	Ant0	5350	-48.21	2.62	-	49.64	Peak	68.2	Pass
NVNT	a	5240	Ant0	5350	-56.51	2.62	0	41.34	Average	54	Pass
NVNT	a	5240	Ant0	5351.28	-45.72	2.62	-	52.13	Peak	68.2	Pass
NVNT	a	5240	Ant0	5351.04	-55.65	2.62	0	42.20	Average	54	Pass
NVNT	a	5240	Ant0	5460	-50.03	2.62	-	47.82	Peak	68.2	Pass
NVNT	a	5240	Ant0	5460	-56.71	2.62	0	41.14	Average	54	Pass
NVNT	n20	5180	Ant0	4500	-48.7	2.62	-	49.15	Peak	68.2	Pass
NVNT	n20	5180	Ant0	4500	-57.2	2.62	0.12	40.77	Average	54	Pass
NVNT	n20	5180	Ant0	5147.5	-43.72	2.62	-	54.13	Peak	68.2	Pass
NVNT	n20	5180	Ant0	5148.9	-53.62	2.62	0.12	44.35	Average	54	Pass
NVNT	n20	5180	Ant0	5150	-44.16	2.62	-	53.69	Peak	68.2	Pass
NVNT	n20	5180	Ant0	5150	-54.47	2.62	0.12	43.50	Average	54	Pass
NVNT	n20	5240	Ant0	5350	-49.57	2.62	-	48.28	Peak	68.2	Pass
NVNT	n20	5240	Ant0	5350	-56.81	2.62	0.12	41.16	Average	54	Pass
NVNT	n20	5240	Ant0	5391.36	-46.2	2.62	-	51.65	Peak	68.2	Pass
NVNT	n20	5240	Ant0	5390.64	-56.07	2.62	0.12	41.90	Average	54	Pass
NVNT	n20	5240	Ant0	5460	-50.9	2.62	-	46.95	Peak	68.2	Pass
NVNT	n20	5240	Ant0	5460	-56.96	2.62	0.12	41.01	Average	54	Pass
NVNT	n40	5190	Ant0	4500	-49.01	2.62	-	48.84	Peak	68.2	Pass
NVNT	n40	5190	Ant0	4500	-57.4	2.62	0.24	40.69	Average	54	Pass
NVNT	n40	5190	Ant0	5148.24	-44.37	2.62	-	53.48	Peak	68.2	Pass
NVNT	n40	5190	Ant0	5149.7	-53.5	2.62	0.24	44.59	Average	54	Pass
NVNT	n40	5190	Ant0	5150	-44.64	2.62	-	53.21	Peak	68.2	Pass
NVNT	n40	5190	Ant0	5150	-53.5	2.62	0.24	44.59	Average	54	Pass
NVNT	n40	5230	Ant0	5350	-48.77	2.62	-	49.08	Peak	68.2	Pass
NVNT	n40	5230	Ant0	5350	-56.93	2.62	0.24	41.16	Average	54	Pass
NVNT	n40	5230	Ant0	5419.5	-46.41	2.62	-	51.44	Peak	68.2	Pass
NVNT	n40	5230	Ant0	5440.56	-56.08	2.62	0.24	42.01	Average	54	Pass
NVNT	n40	5230	Ant0	5460	-49.77	2.62	-	48.08	Peak	68.2	Pass
NVNT	n40	5230	Ant0	5460	-56.85	2.62	0.24	41.24	Average	54	Pass

NVNT	ac20	5180	Ant0	4500	-48.87	2.62	-	48.98	Peak	68.2	Pass
NVNT	ac20	5180	Ant0	4500	-57.38	2.62	0.12	40.59	Average	54	Pass
NVNT	ac20	5180	Ant0	5148.9	-42.34	2.62	-	55.51	Peak	68.2	Pass
NVNT	ac20	5180	Ant0	5148.9	-54.07	2.62	0.12	43.90	Average	54	Pass
NVNT	ac20	5180	Ant0	5150	-42.81	2.62	-	55.04	Peak	68.2	Pass
NVNT	ac20	5180	Ant0	5150	-54.67	2.62	0.12	43.30	Average	54	Pass
NVNT	ac20	5240	Ant0	5350	-49.83	2.62	-	48.02	Peak	68.2	Pass
NVNT	ac20	5240	Ant0	5350	-56.91	2.62	0.12	41.06	Average	54	Pass
NVNT	ac20	5240	Ant0	5422.32	-46.53	2.62	-	51.32	Peak	68.2	Pass
NVNT	ac20	5240	Ant0	5372.64	-56.24	2.62	0.12	41.73	Average	54	Pass
NVNT	ac20	5240	Ant0	5460	-48.67	2.62	-	49.18	Peak	68.2	Pass
NVNT	ac20	5240	Ant0	5460	-56.77	2.62	0.12	41.20	Average	54	Pass
NVNT	ac40	5190	Ant0	4500	-50.51	2.62	-	47.34	Peak	68.2	Pass
NVNT	ac40	5190	Ant0	4500	-57.19	2.62	0.24	40.90	Average	54	Pass
NVNT	ac40	5190	Ant0	5149.7	-41.17	2.62	-	56.68	Peak	68.2	Pass
NVNT	ac40	5190	Ant0	5149.7	-52.67	2.62	0.24	45.42	Average	54	Pass
NVNT	ac40	5190	Ant0	5150	-41.17	2.62	-	56.68	Peak	68.2	Pass
NVNT	ac40	5190	Ant0	5150	-52.67	2.62	0.24	45.42	Average	54	Pass
NVNT	ac40	5230	Ant0	5350	-48.22	2.62	-	49.63	Peak	68.2	Pass
NVNT	ac40	5230	Ant0	5350	-56.15	2.62	0.24	41.94	Average	54	Pass
NVNT	ac40	5230	Ant0	5452.44	-46.51	2.62	-	51.34	Peak	68.2	Pass
NVNT	ac40	5230	Ant0	5434.62	-56.04	2.62	0.24	42.05	Average	54	Pass
NVNT	ac40	5230	Ant0	5460	-49.16	2.62	-	48.69	Peak	68.2	Pass
NVNT	ac40	5230	Ant0	5460	-57.49	2.62	0.24	40.60	Average	54	Pass
NVNT	ac80	5210	Ant0	5350	-47.98	2.62	-	49.87	Peak	68.2	Pass
NVNT	ac80	5210	Ant0	5350	-55.51	2.62	0.25	42.59	Average	54	Pass
NVNT	ac80	5210	Ant0	5450.1	-45.45	2.62	-	52.40	Peak	68.2	Pass
NVNT	ac80	5210	Ant0	5356.05	-54.99	2.62	0.25	43.11	Average	54	Pass
NVNT	ac80	5210	Ant0	5460	-47.39	2.62	-	50.46	Peak	68.2	Pass
NVNT	ac80	5210	Ant0	5460	-56.32	2.62	0.25	41.78	Average	54	Pass
NVNT	ac80	5210	Ant0	4500	-49.72	2.62	-	48.13	Peak	68.2	Pass
NVNT	ac80	5210	Ant0	4500	-57.24	2.62	0.25	40.86	Average	54	Pass
NVNT	ac80	5210	Ant0	5149.38	-42.48	2.62	-	55.37	Peak	68.2	Pass
NVNT	ac80	5210	Ant0	5149.38	-53.52	2.62	0.25	44.58	Average	54	Pass
NVNT	ac80	5210	Ant0	5150	-42.63	2.62	-	55.22	Peak	68.2	Pass
NVNT	ac80	5210	Ant0	5150	-52.86	2.62	0.25	45.24	Average	54	Pass

Test Graphs

Restrict Band NVNT a 5180MHz Ant0 Peak

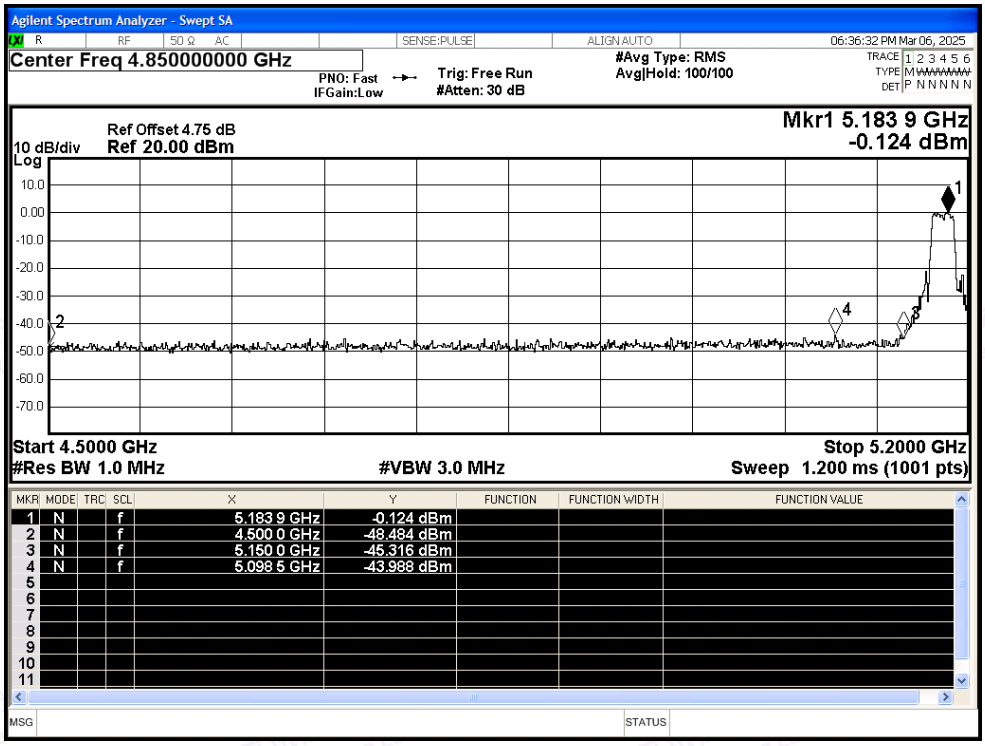

Restrict Band NVNT a 5180MHz Ant0 Average

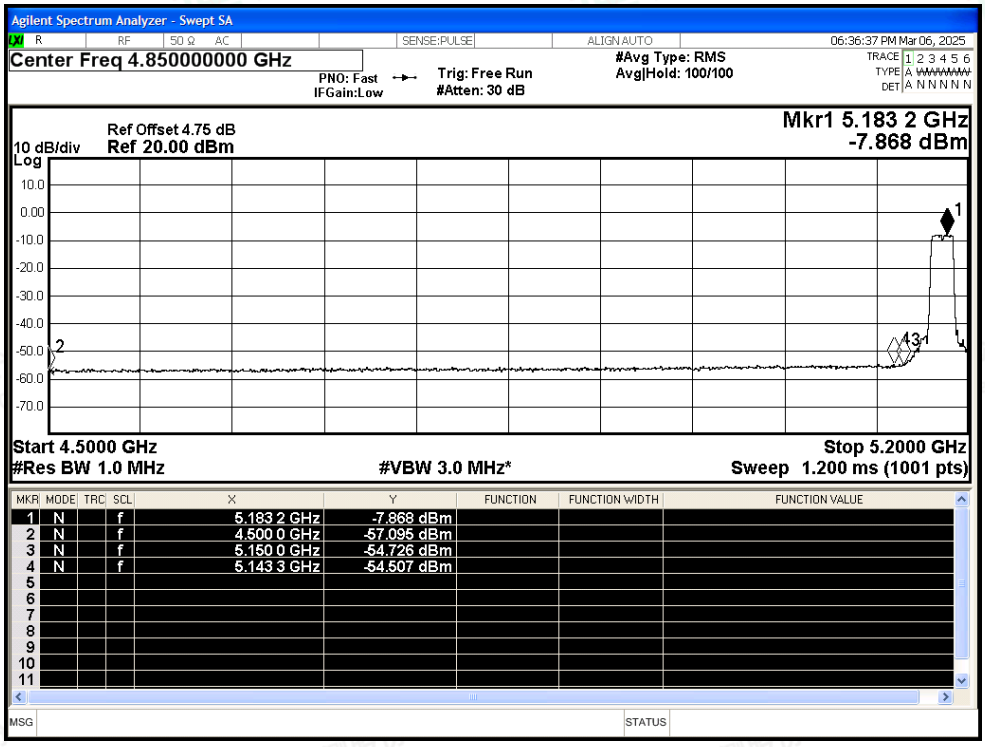

Restrict Band NVNT a 5240MHz Ant0 Peak

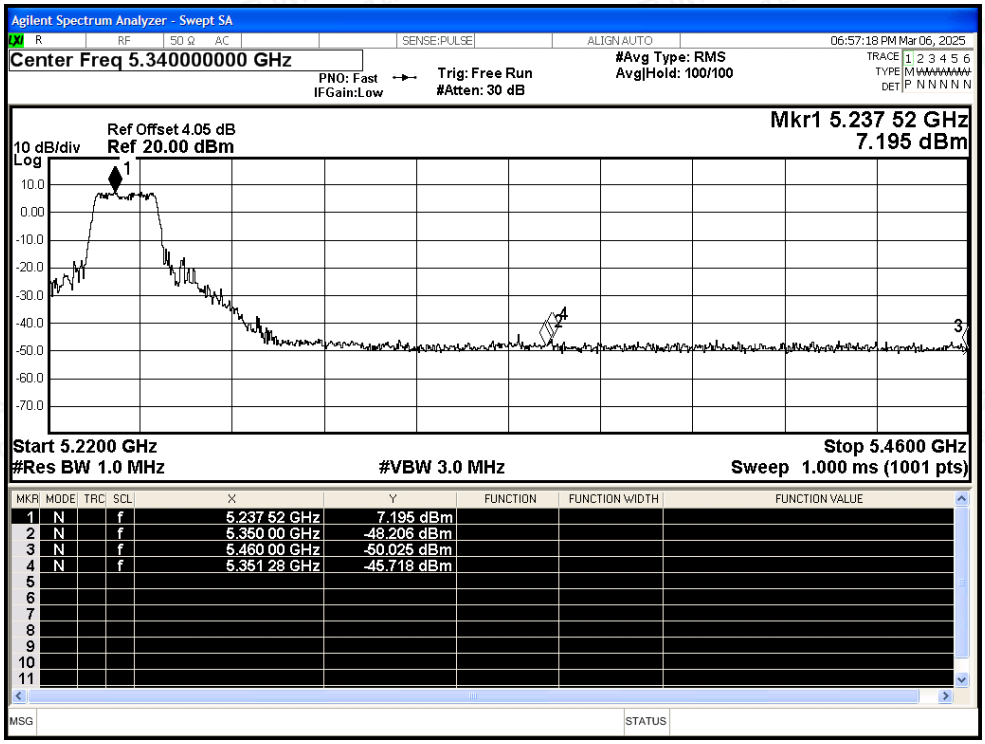

Restrict Band NVNT a 5240MHz Ant0 Average

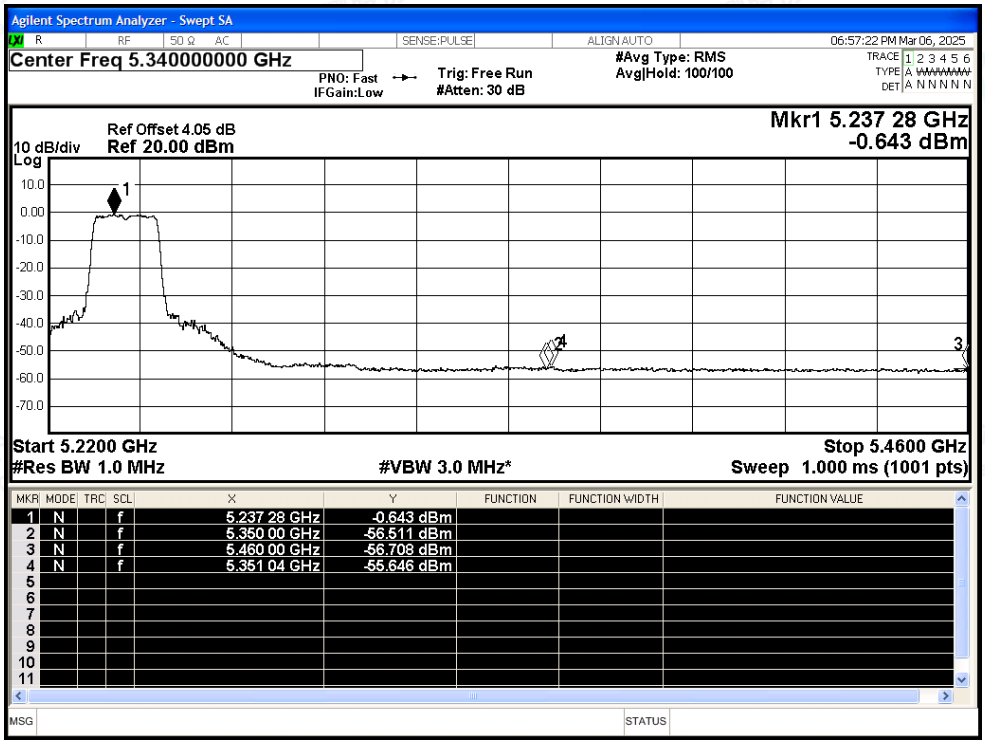

Restrict Band NVNT n20 5180MHz Ant0 Peak

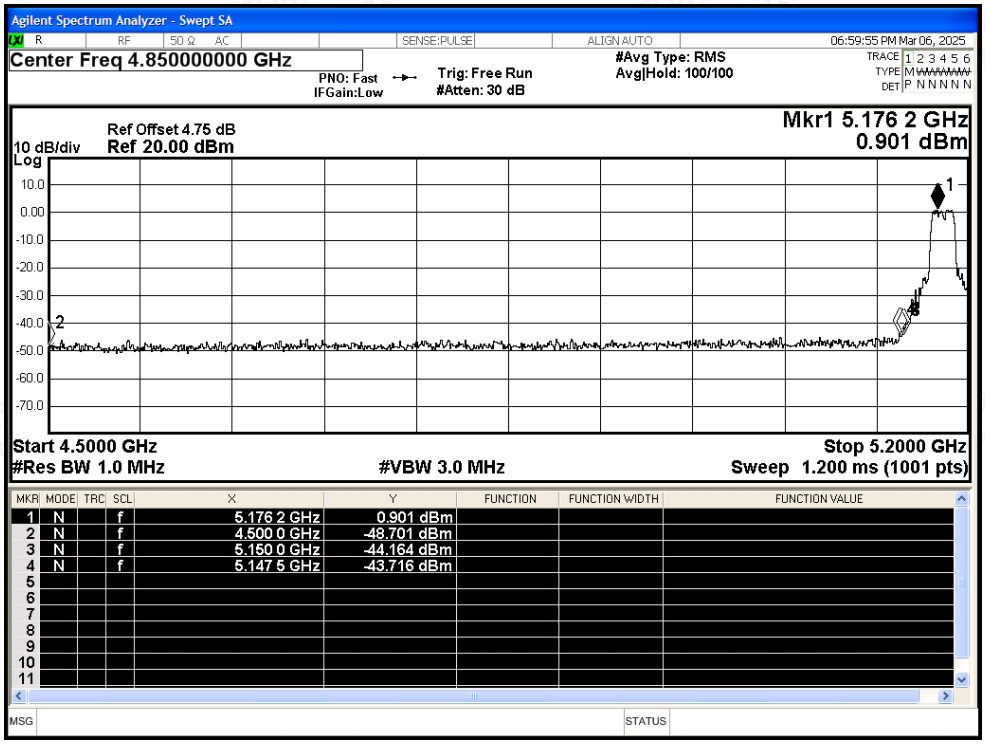

Restrict Band NVNT n20 5180MHz Ant0 Average

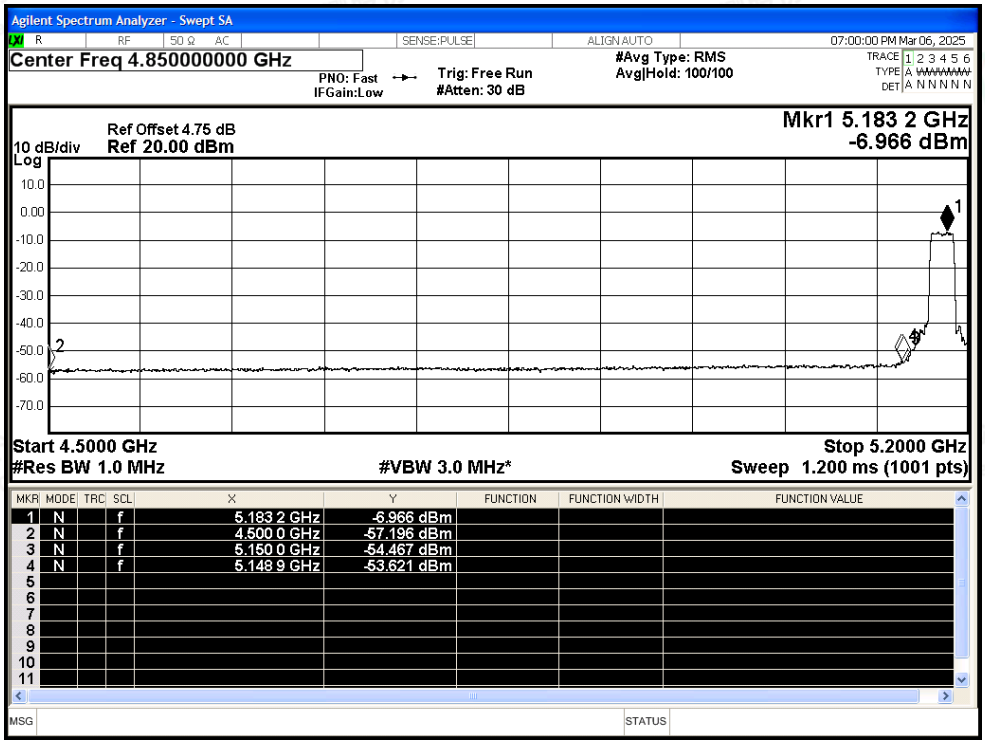

Restrict Band NVNT n20 5240MHz Ant0 Peak

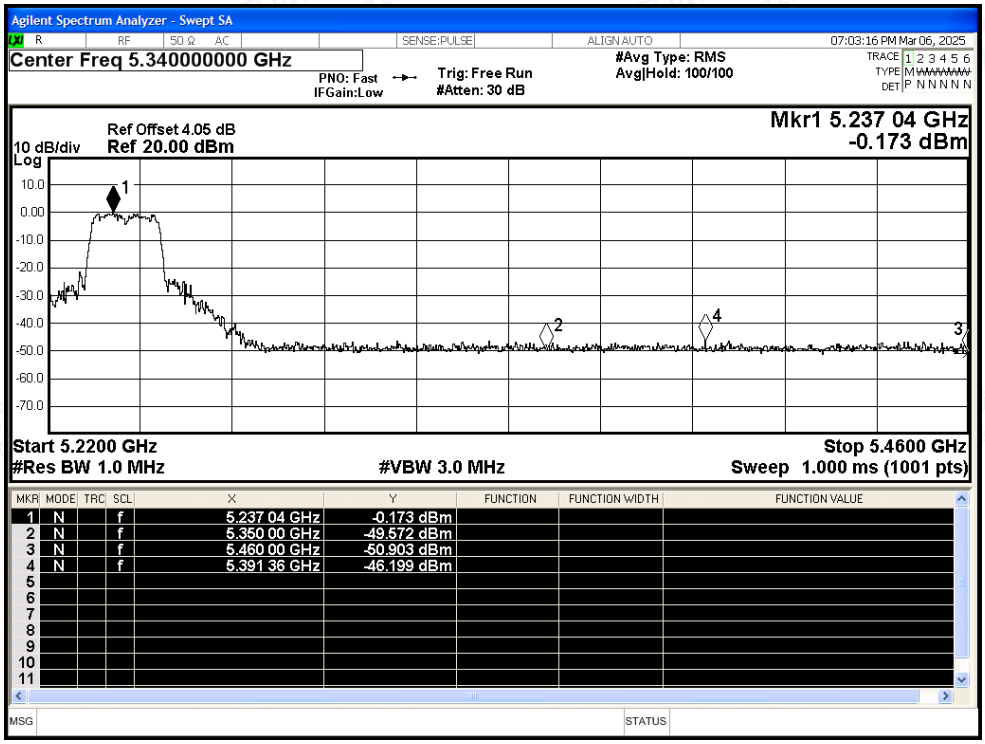

Restrict Band NVNT n20 5240MHz Ant0 Average

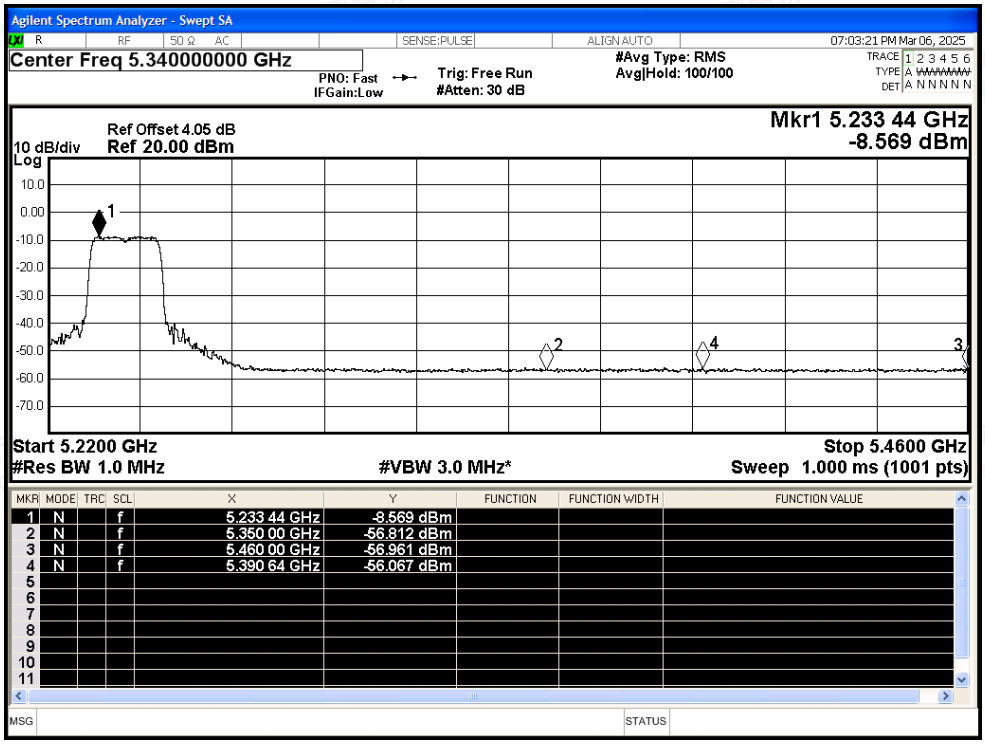

Restrict Band NVNT n40 5190MHz Ant0 Peak

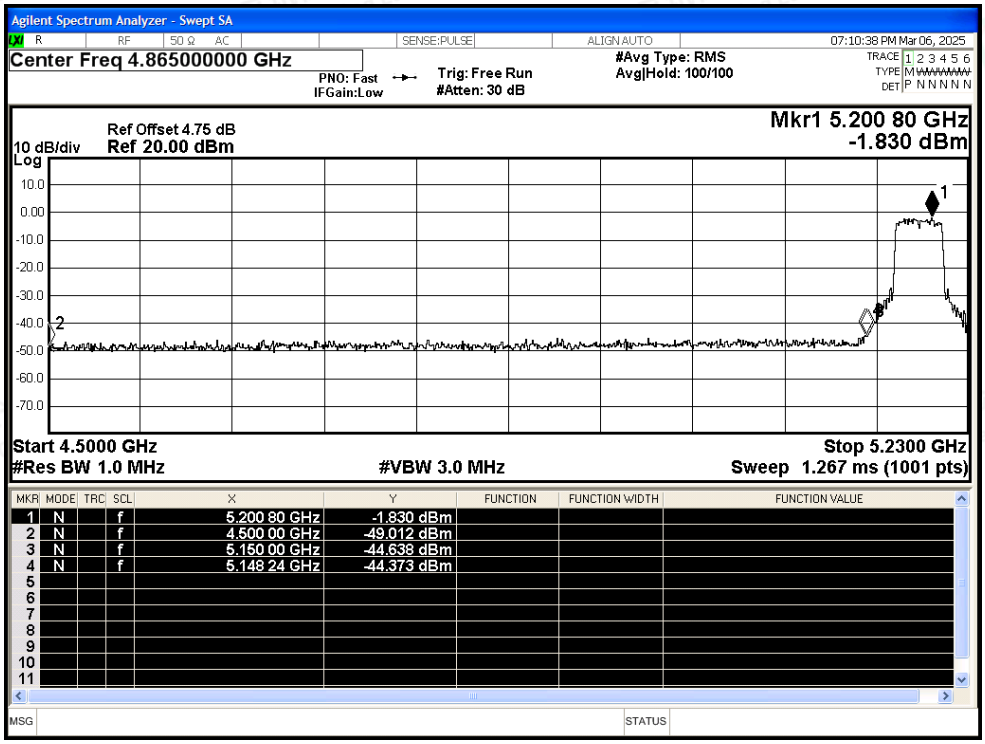

Restrict Band NVNT n40 5190MHz Ant0 Average

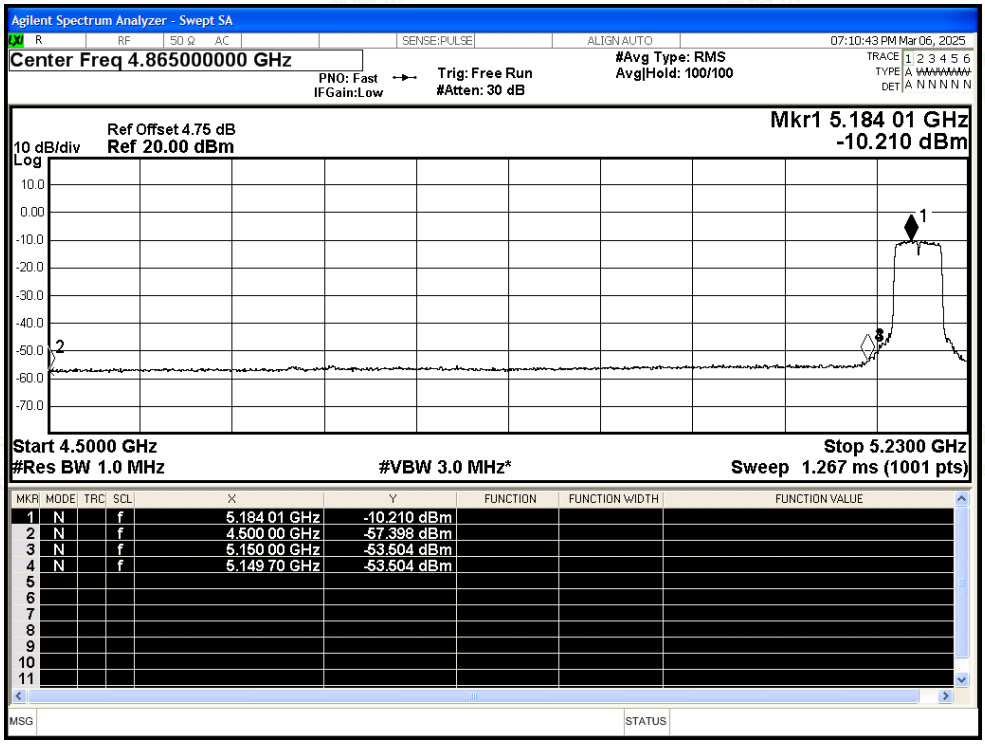

Restrict Band NVNT n40 5230MHz Ant0 Peak

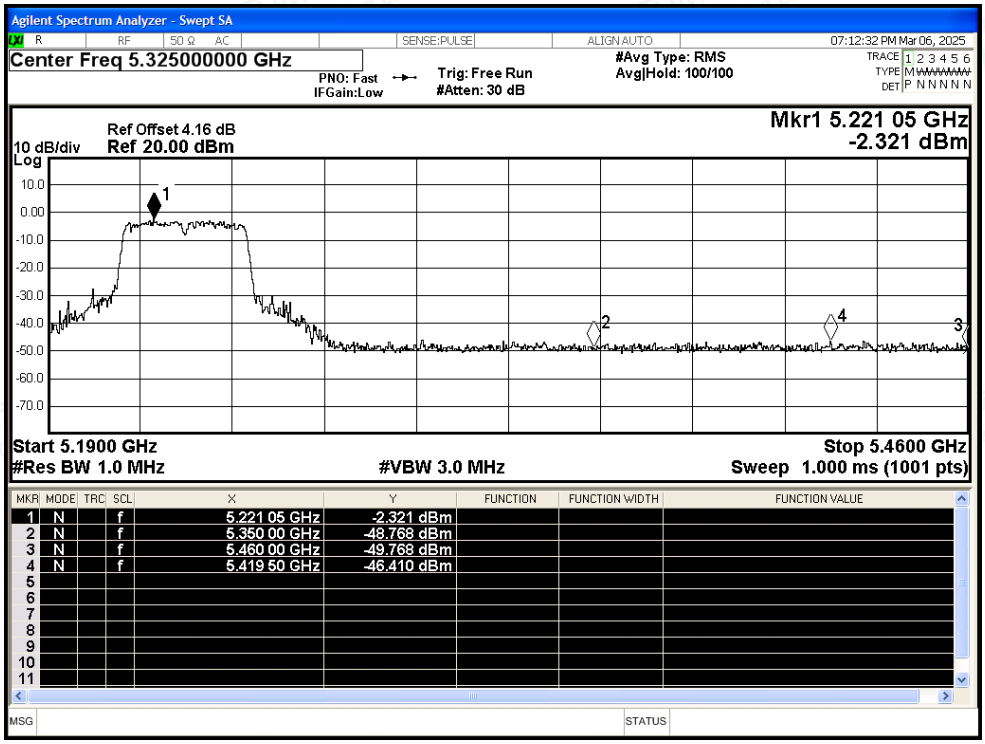

Restrict Band NVNT n40 5230MHz Ant0 Average

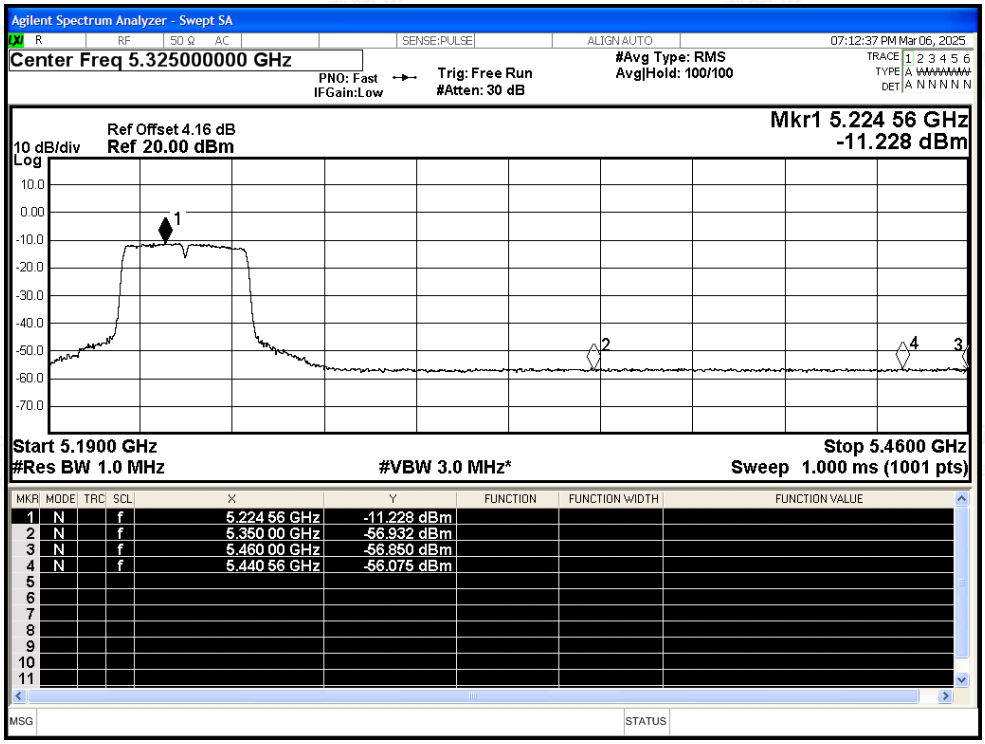

Restrict Band NVNT ac20 5180MHz Ant0 Peak

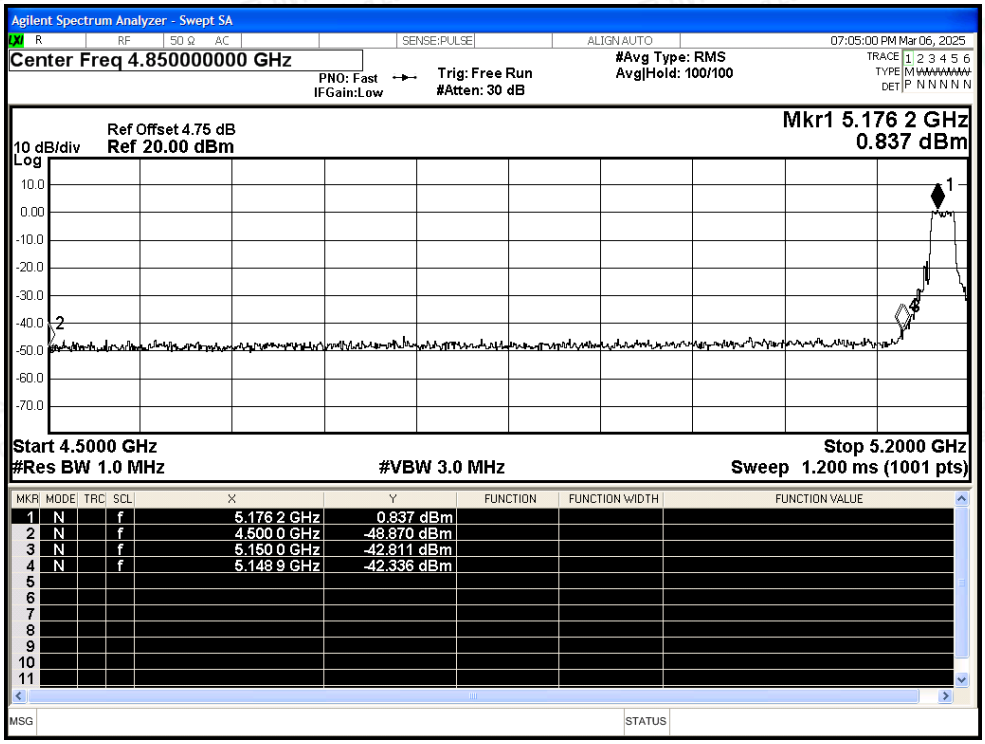

Restrict Band NVNT ac20 5180MHz Ant0 Average

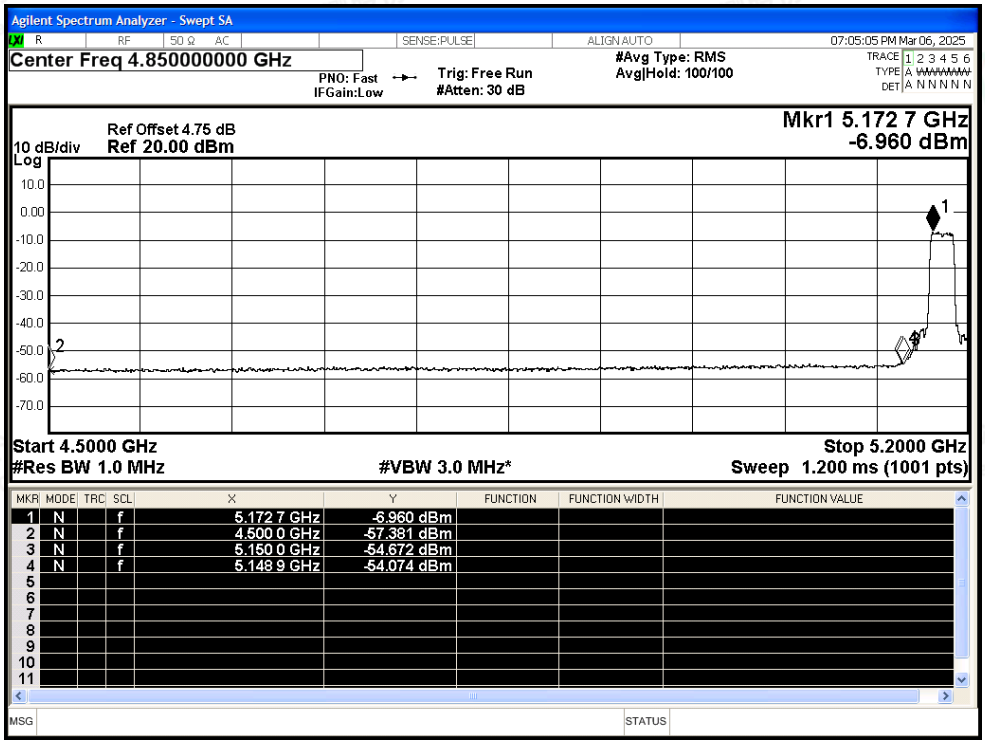

Restrict Band NVNT ac20 5240MHz Ant0 Peak

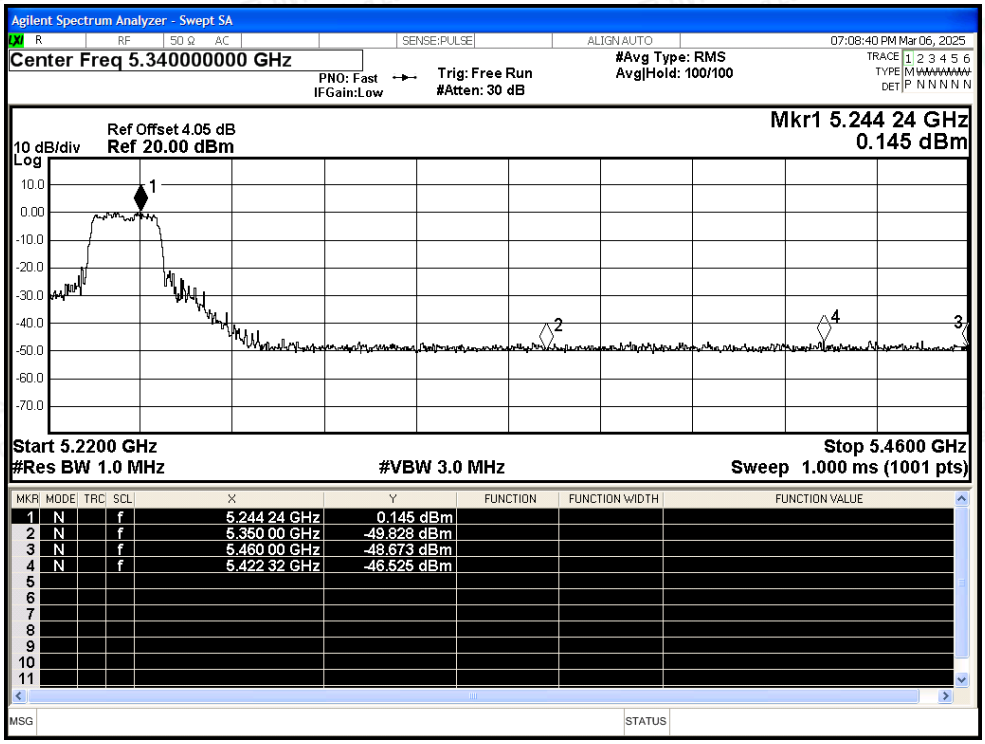

Restrict Band NVNT ac20 5240MHz Ant0 Average

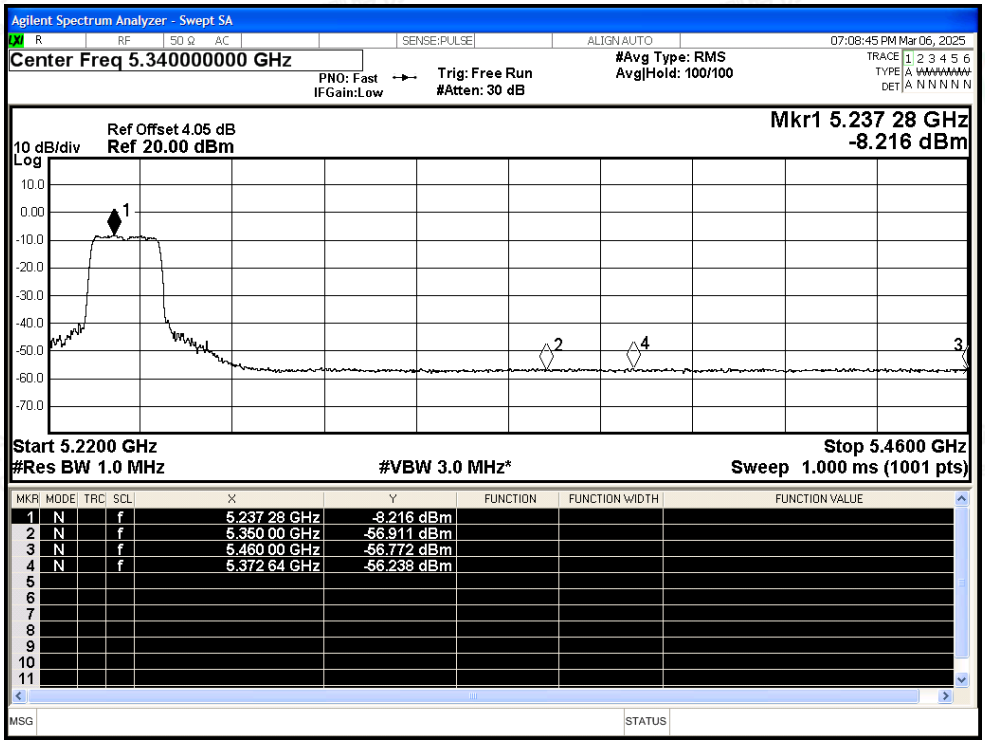

Restrict Band NVNT ac40 5190MHz Ant0 Peak

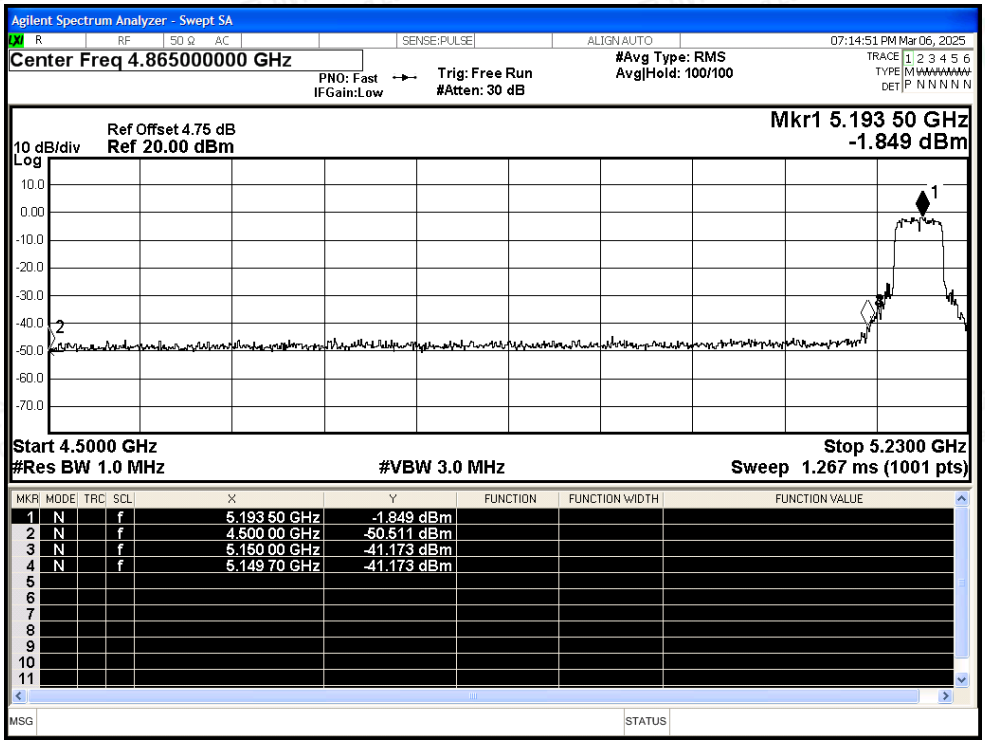

Restrict Band NVNT ac40 5190MHz Ant0 Average

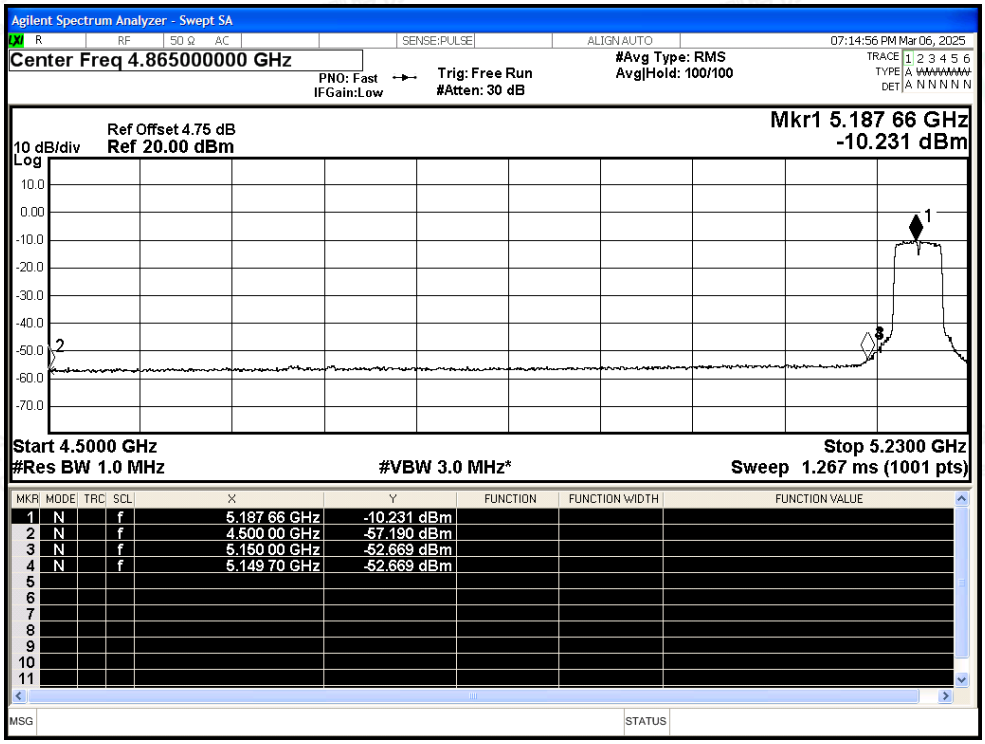

Restrict Band NVNT ac40 5230MHz Ant0 Peak

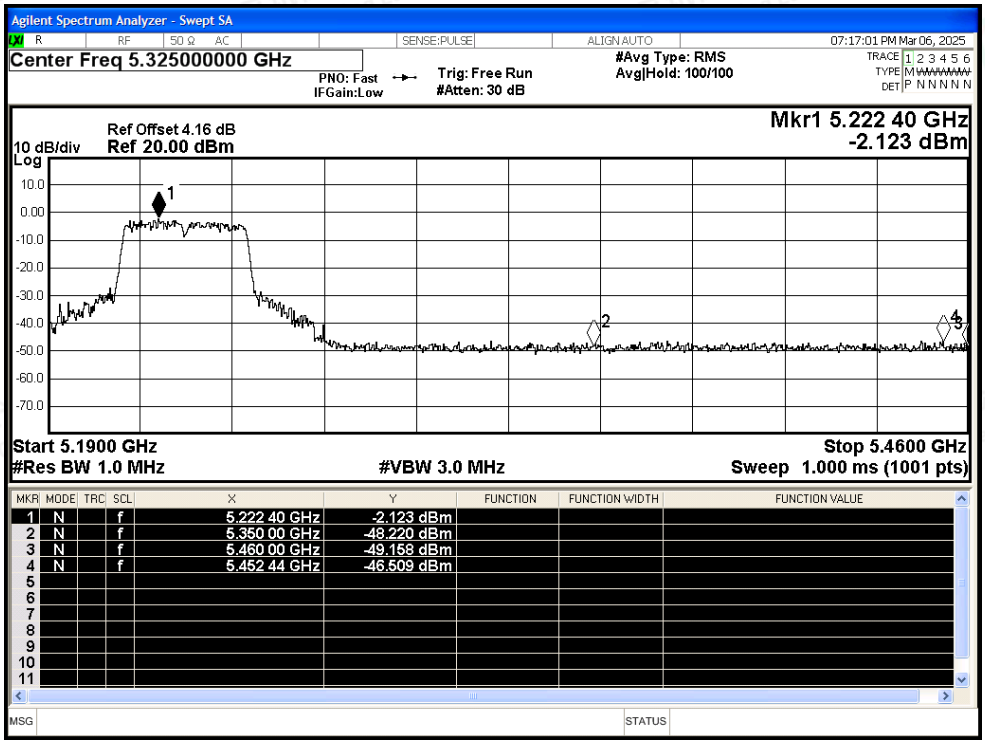

Restrict Band NVNT ac40 5230MHz Ant0 Average

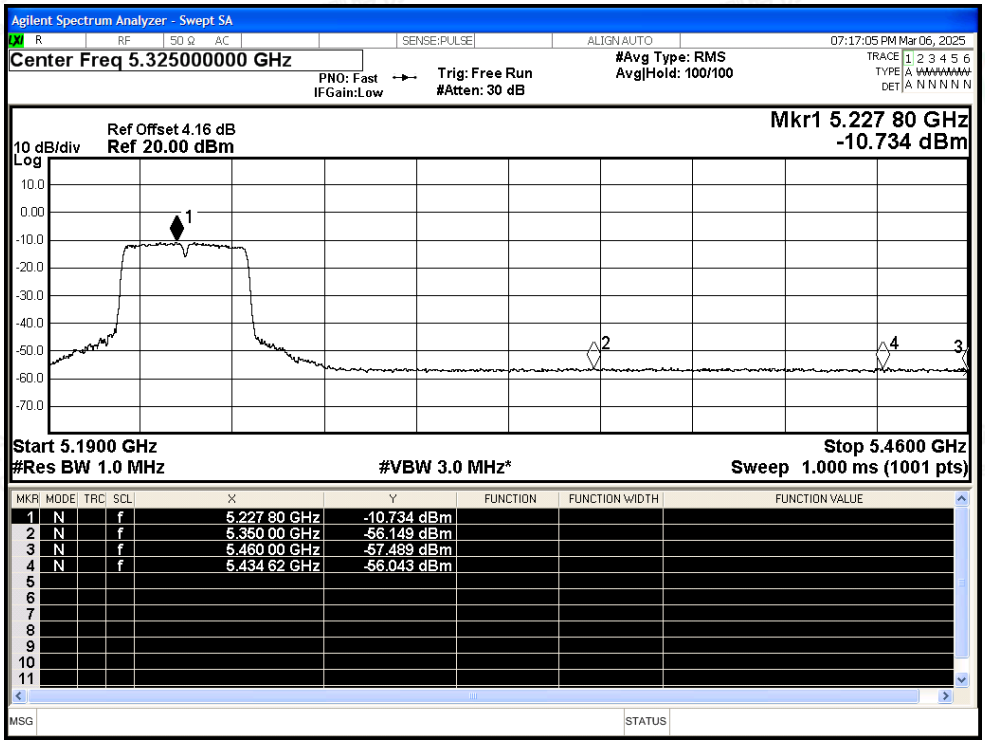

Restrict Band NVNT ac80 5210MHz Ant0 Peak

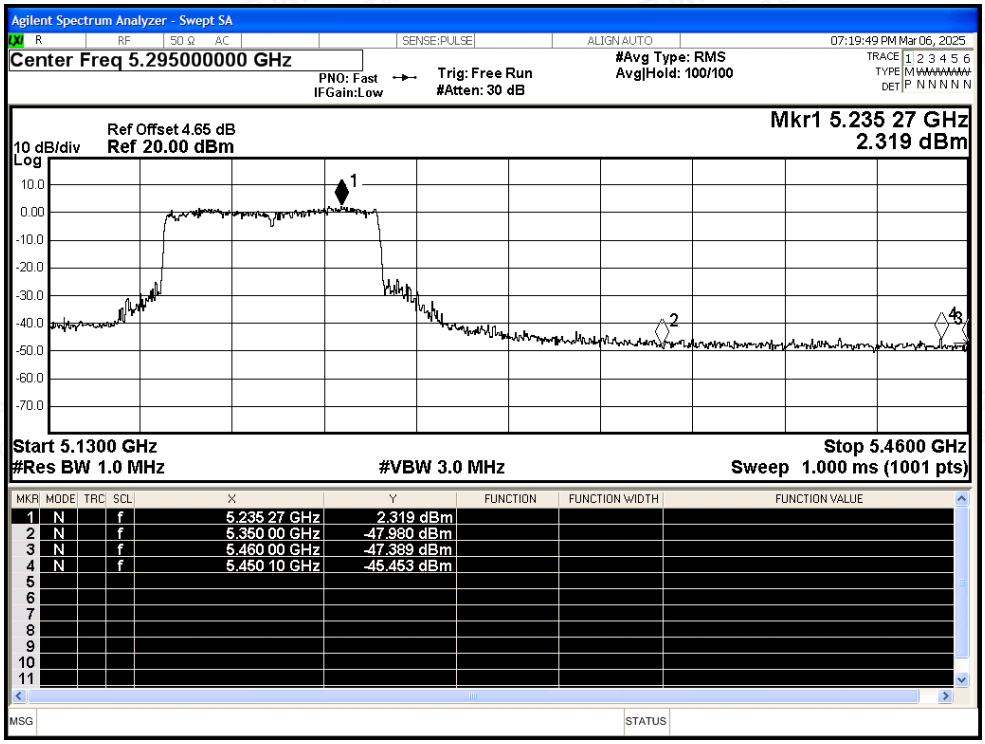

Restrict Band NVNT ac80 5210MHz Ant0 Average

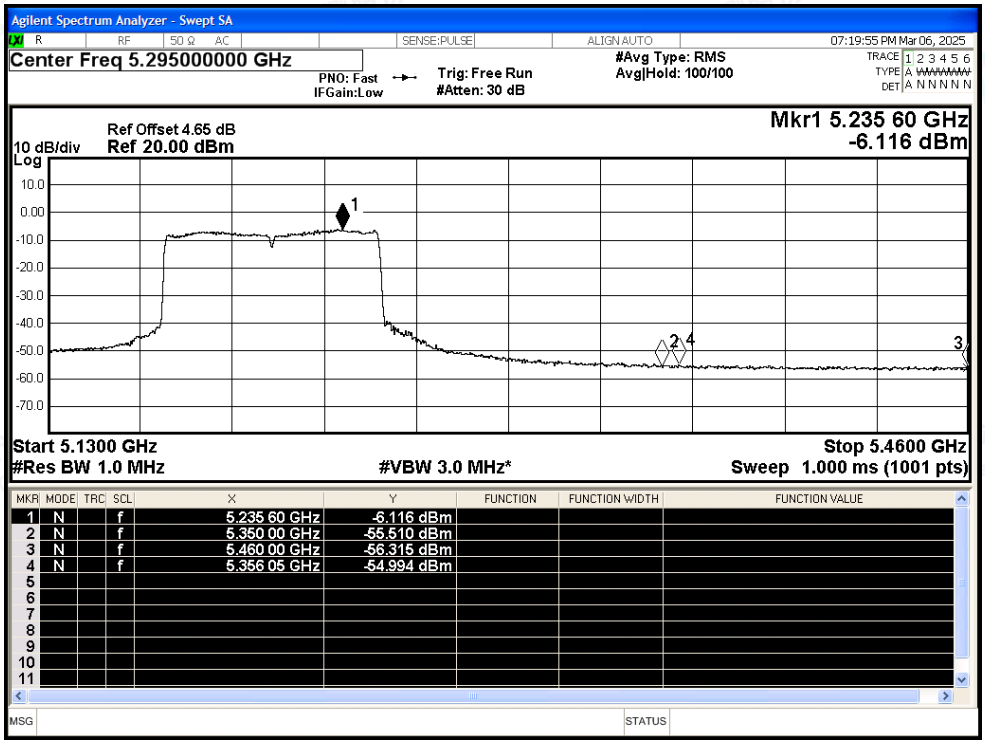

Restrict Band NVNT ac80 5210MHz Ant0 Peak

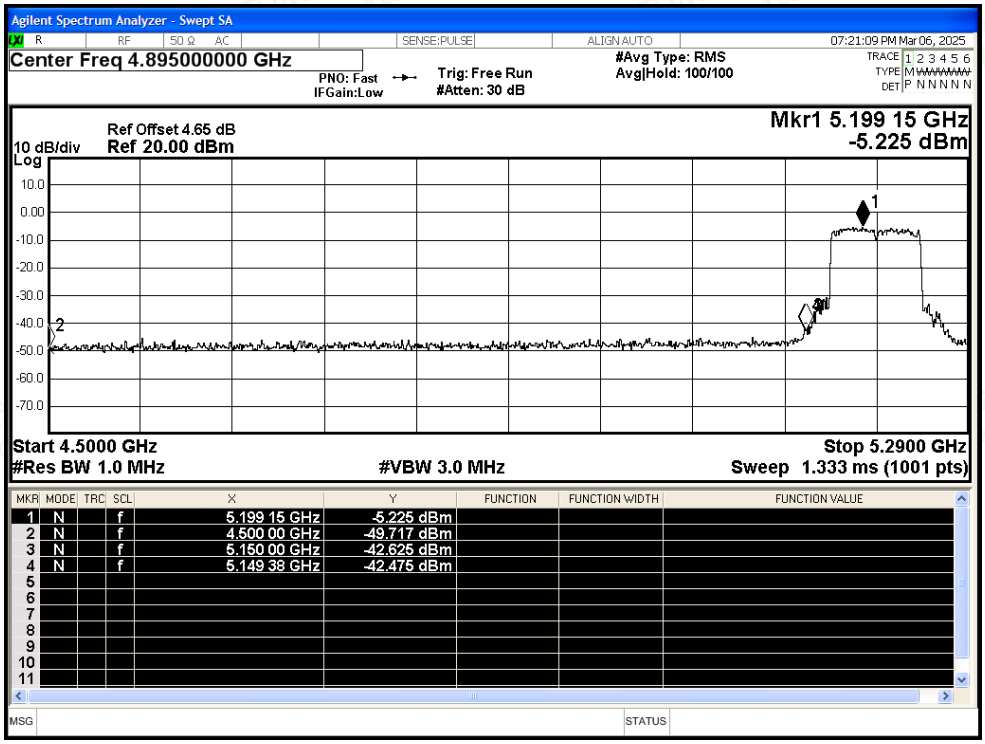

Restrict Band NVNT ac80 5210MHz Ant0 Average

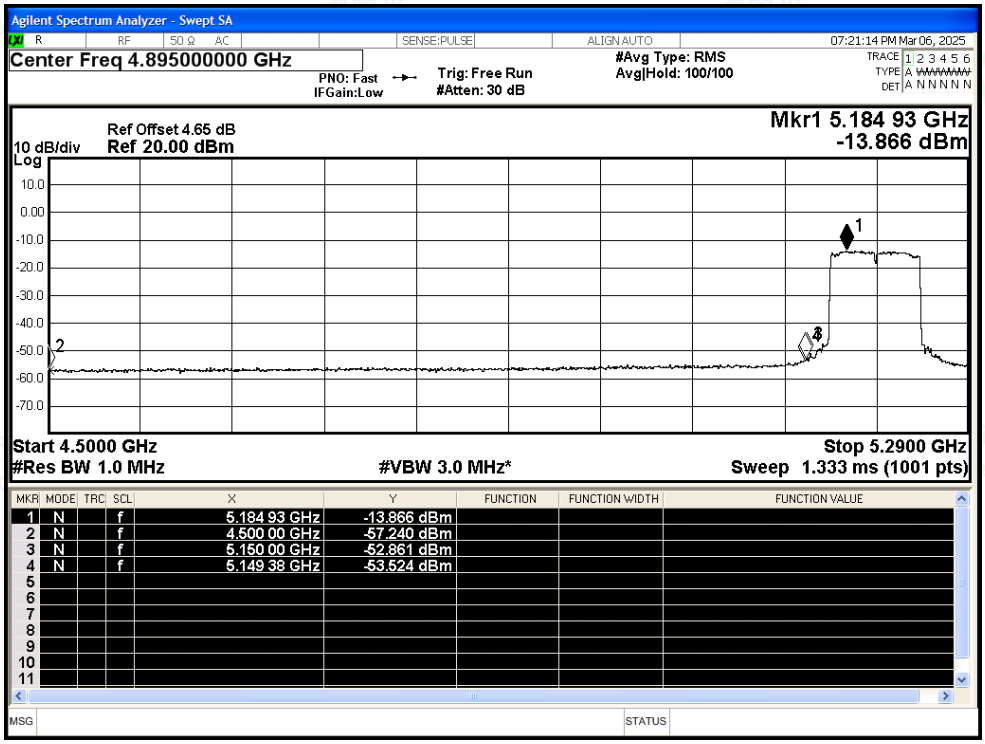

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	a	5180	Ant1	4500	-48.47	4.13	-	50.89	Peak	68.2	Pass
NVNT	a	5180	Ant1	4500	-58.05	4.13	0.24	41.55	Average	54	Pass
NVNT	a	5180	Ant1	5120.2	-45.22	4.13	-	54.14	Peak	68.2	Pass
NVNT	a	5180	Ant1	5147.5	-55.22	4.13	0.24	44.38	Average	54	Pass
NVNT	a	5180	Ant1	5150	-44.69	4.13	-	54.67	Peak	68.2	Pass
NVNT	a	5180	Ant1	5150	-56.45	4.13	0.24	43.15	Average	54	Pass
NVNT	a	5240	Ant1	5350	-45.94	4.13	-	53.42	Peak	68.2	Pass
NVNT	a	5240	Ant1	5350	-55.96	4.13	0.24	43.64	Average	54	Pass
NVNT	a	5240	Ant1	5350.08	-45.94	4.13	-	53.42	Peak	68.2	Pass
NVNT	a	5240	Ant1	5350.08	-55.96	4.13	0.24	43.64	Average	54	Pass
NVNT	a	5240	Ant1	5460	-48.91	4.13	-	50.45	Peak	68.2	Pass
NVNT	a	5240	Ant1	5460	-56.55	4.13	0.24	43.05	Average	54	Pass
NVNT	n20	5180	Ant1	4500	-50.16	4.13	-	49.20	Peak	68.2	Pass
NVNT	n20	5180	Ant1	4500	-57.62	4.13	0.12	41.86	Average	54	Pass
NVNT	n20	5180	Ant1	5148.2	-45.13	4.13	-	54.23	Peak	68.2	Pass
NVNT	n20	5180	Ant1	5147.5	-55.25	4.13	0.12	44.23	Average	54	Pass
NVNT	n20	5180	Ant1	5150	-40.25	4.13	-	59.11	Peak	68.2	Pass
NVNT	n20	5180	Ant1	5150	-54.77	4.13	0.12	44.71	Average	54	Pass
NVNT	n20	5240	Ant1	5350	-46.81	4.13	-	52.55	Peak	68.2	Pass
NVNT	n20	5240	Ant1	5350	-56.98	4.13	0.12	42.50	Average	54	Pass
NVNT	n20	5240	Ant1	5366.4	-45.54	4.13	-	53.82	Peak	68.2	Pass
NVNT	n20	5240	Ant1	5352	-56.38	4.13	0.12	43.10	Average	54	Pass
NVNT	n20	5240	Ant1	5460	-49.36	4.13	-	50.00	Peak	68.2	Pass
NVNT	n20	5240	Ant1	5460	-57.47	4.13	0.12	42.01	Average	54	Pass
NVNT	n40	5190	Ant1	4500	-48.94	4.13	-	50.42	Peak	68.2	Pass
NVNT	n40	5190	Ant1	4500	-58.02	4.13	0.24	41.58	Average	54	Pass
NVNT	n40	5190	Ant1	5148.97	-42.9	4.13	-	56.46	Peak	68.2	Pass
NVNT	n40	5190	Ant1	5148.24	-54.86	4.13	0.24	44.74	Average	54	Pass
NVNT	n40	5190	Ant1	5150	-44.58	4.13	-	54.78	Peak	68.2	Pass
NVNT	n40	5190	Ant1	5150	-55.15	4.13	0.24	44.45	Average	54	Pass
NVNT	n40	5230	Ant1	5350	-49.89	4.13	-	49.47	Peak	68.2	Pass
NVNT	n40	5230	Ant1	5350	-57.76	4.13	0.23	41.83	Average	54	Pass
NVNT	n40	5230	Ant1	5437.32	-45.33	4.13	-	54.03	Peak	68.2	Pass
NVNT	n40	5230	Ant1	5448.39	-56.44	4.13	0.23	43.15	Average	54	Pass
NVNT	n40	5230	Ant1	5460	-49.65	4.13	-	49.71	Peak	68.2	Pass
NVNT	n40	5230	Ant1	5460	-57.08	4.13	0.23	42.51	Average	54	Pass
NVNT	ac20	5180	Ant1	4500	-48.96	4.13	-	50.40	Peak	68.2	Pass
NVNT	ac20	5180	Ant1	4500	-58.27	4.13	0.12	41.21	Average	54	Pass