

TESTREPORT

Applicant Name : Shenzhen Hollyland Technology Co.,Ltd
Address : 8F, Building 5D,Skyworth Innovation Valley, Tangtou Road,
Shiyan Street, Baoan District Shenzhen, China
Report Number : RA221215-61840E-RF-00B
FCC ID: 2ADZC-5803R

Test Standard (s)

FCC PART 15.407

Sample Description

Product Type: FULL-DUPLEX WIRELESS INTERCOM SYSTEM
Model No.: Solidcom C1 Pro
Multiple Model(s) No.: N/A
Trade Mark: HOLLYLAND
Date Received: 2022/12/15
Report Date: 2023/01/31

Test Result:	Pass*
--------------	-------


* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Approved By:



Nick Fang
EMC Engineer



Candy Li
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "★". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China
Tel: +86 755-26503290 Fax: +86 755-26503396 Web: www.atc-lab.com

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	5
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	6
TEST FACILITY	6
SYSTEM TEST CONFIGURATION	7
DESCRIPTION OF TEST CONFIGURATION	7
EUT EXERCISE SOFTWARE	7
DUTY CYCLE	7
EQUIPMENT MODIFICATIONS	7
SUMMARY OF TEST RESULTS	10
TEST EQUIPMENT LIST	11
FCC §15.407 (F) & §1.1310 & §2.1091 –MPE-BASED EXEMPTION	13
APPLICABLE STANDARD	13
FCC §15.203 – ANTENNA REQUIREMENT	15
APPLICABLE STANDARD	15
ANTENNA CONNECTOR CONSTRUCTION	15
FCC §15.407 (B) (6) §15.207 (A) – CONDUCTED EMISSIONS	16
APPLICABLE STANDARD	16
EUT SETUP	16
EMI TEST RECEIVER SETUP.....	16
TEST PROCEDURE	16
CORRECTED FACTOR & MARGIN CALCULATION	17
TEST DATA	17
§15.205 & §15.209 & §15.407(B)– UNDESIRABLE EMISSION	20
APPLICABLE STANDARD	20
EUT SETUP	20
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	21
TEST PROCEDURE	21
CORRECTED FACTOR & MARGIN CALCULATION	22
TEST DATA	22
FCC §15.407(A),(E) – 26 DB & 6DB EMISSION BANDWIDTH.....	28
APPLICABLE STANDARD	28
TEST PROCEDURE	28
TEST DATA	29
FCC §15.407(A) – CONDUCTED TRANSMITTER OUTPUT POWER.....	30
APPLICABLE STANDARD	30
TEST PROCEDURE	30
TEST DATA	31

FCC §15.407(A) - POWER SPECTRAL DENSITY32
 TEST PROCEDURE32
 TEST DATA33
APPENDIX34
 APPENDIX A1: EMISSION BANDWIDTH34
 APPENDIX A2: OCCUPIED CHANNEL BANDWIDTH35
 APPENDIX B: DUTY CYCLE36
 APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER37
 APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY38

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	RA221215-61840E-RF-00B	Original Report	2023/01/31

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Frequency Range	5G Wi-Fi: 5190MHz
Mode	802.11n40
Maximum Conducted Average Output Power	18.16dBm
Modulation Technique	OFDM
Antenna Specification*	2.16dBi(It is provided by the applicant)
Voltage Range	DC 12V from adapter or DC 14.8V from V-Mount/G-Mount Battery or DC 7.4V from NP-F Battery
Sample serial number	1VLR (Assigned by ATC)
Sample/EUT Status	Good condition
Adapter Information	Model: GQ24-120200-AX Input: AC 100-240V, 50/60Hz, 1.0A Max Output: DC 12.0V, 2.0A, 24.0W

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and E of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. And KDB789033 D02 General U-NII Test Procedures New Rules v02r01.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF output power, conducted		0.73dB
Unwanted Emission, conducted		1.6dB
AC Power Lines Conducted Emissions		2.72dB
Emissions, Radiated	30MHz - 1GHz	4.28dB
	1GHz- 18GHz	4.98dB
	18GHz- 26.5GHz	5.06dB
	26.5GHz- 40GHz	4.72dB
Temperature		1 °C
Humidity		6%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 429 7.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode, which was provided by manufacturer.

For 5150-5250MHz Band, 1channel is provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	/	/

EUT Exercise Software

“XCOM.exe *” was used. The software and power level was provided by the manufacturer.

The worst case was performed under:

U-NII	Mode	Data rate	Power Level
5150 – 5250MHz	802.11n-HT40	MCS0	12

The worse-case data rates are determined to be as follows for each mode based upon investigations by measuring the output power and PSD across all data rated bandwidths, and modulations.

Duty cycle

Test Result: Pass. Please refer to the Appendix.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Lenovo	PC	ThinkPad	5A26954NT
Hollyland	Battery*2	NP-F750 Li-ion Battery	Unknown
HongBo	Battery	DC 14.8V 10.4Ah Li-ion Battery	Unknown
Hollyland	Load*4	Unknown	Unknown
Hollyland	Earphone	Unknown	Unknown
Hikvision	Router	DS-3WR03-E	2296HW22D

External I/O Cable


Cable Description	Length (m)	From Port	To
Un-Shielding Un-Detachable AC Cable	1.0	Receptacle	LISN
Un-Shielding Un-Detachable DC Cable	1.5	EUT	Adapter
Un-Shielding Detachable USB Cable	1.0	EUT	PC
Un-Shielding Detachable RJ45 Cable	8.0	EUT	Router
Un-Shielding Un-Detachable RJ45 Cable*2	0.5	EUT	Load
Un-Shielding Un-Detachable DC Cable*2	0.5	EUT	Load

Block Diagram of Test Setup

For Conducted Emissions:

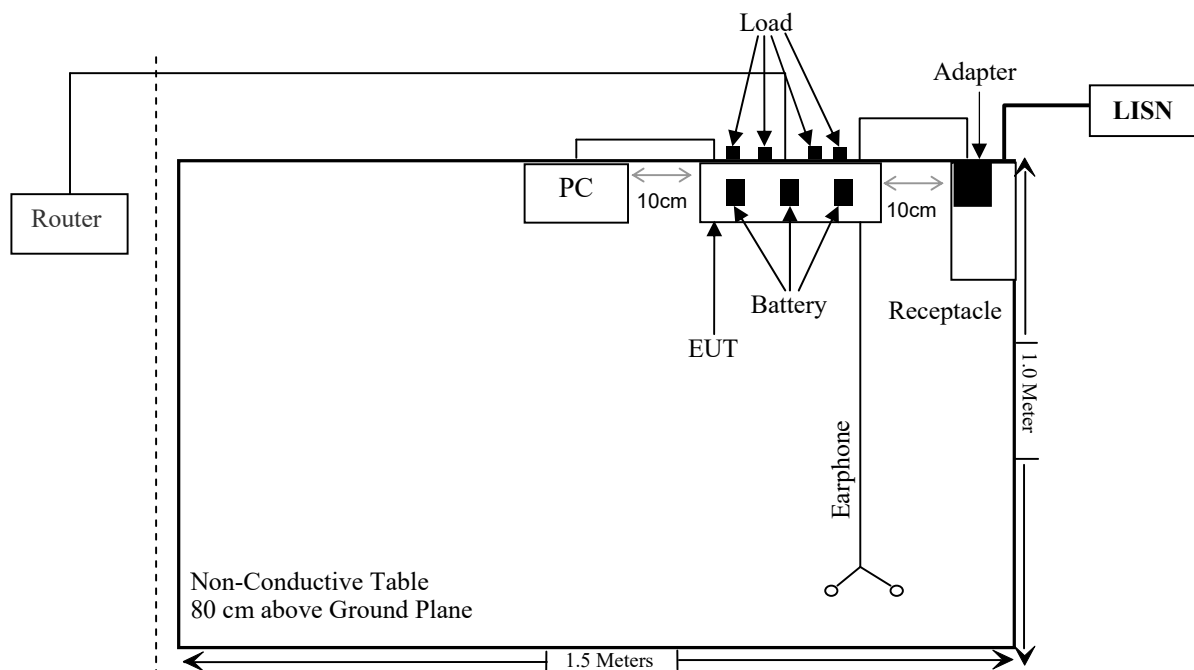

For Radiated Emissions:

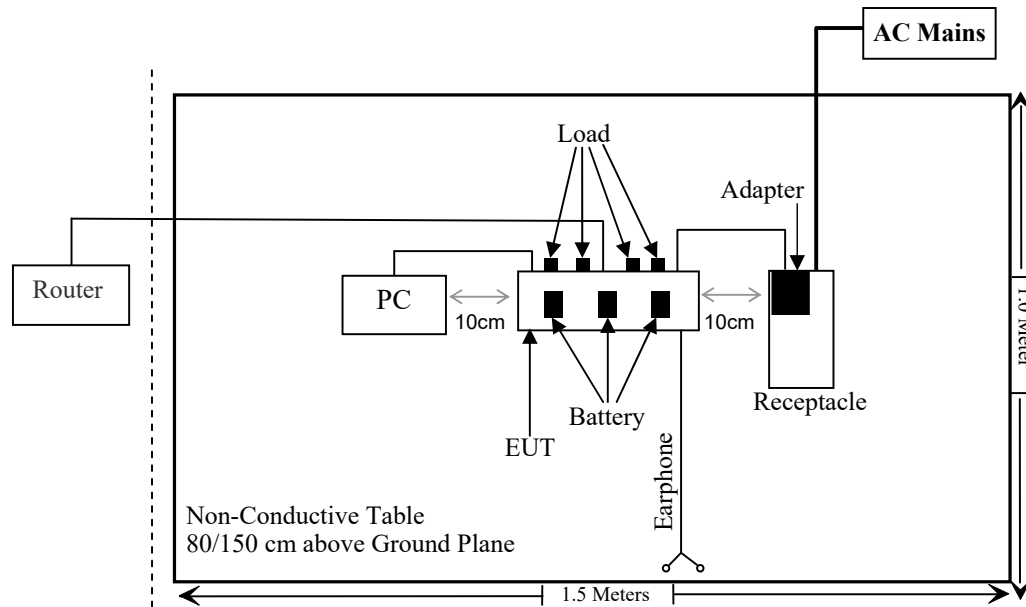

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.407 (f) & §1.1310 & §2.1091	MPE-Based Exemption	Compliant
§15.203	Antenna Requirement	Compliant
§15.407(b)(9)& §15.207(a)	Conducted Emissions	Compliant
§15.205& §15.209 &§15.407(b)	Undesirable Emission& Restricted Bands	Compliant
§15.407(a) (e)	26 dB Emission Bandwidth & 6dB Bandwidth	Compliant
§15.407(a)	Conducted Transmitter Output Power	Compliant
§15.407 (a)	Power Spectral Density	Compliant
§15.407 (h)	Transmit Power Control (TPC)	Not Applicable
§15.407 (h)	Dynamic Frequency Selection (DFS)	Not Applicable

Not Applicable: the EUT not operating within frequency range of 5250-5350MHz&5470-5725MHz.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde& Schwarz	EMI Test Receiver	ESCI	100784	2022/11/25	2023/11/24
Rohde & Schwarz	L.I.S.N.	ENV216	101314	2022/11/25	2023/11/24
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2022/12/07	2023/12/06
Unknown	RF Coaxial Cable	No.17	N0350	2022/11/25	2023/11/24
Conducted Emission Test Software: e3 19821b (V9)					
Radiated Emissions Test					
Rohde& Schwarz	Test Receiver	ESR	102725	2022/11/25	2023/11/24
Rohde&Schwarz	Spectrum Analyzer	FSV40	101949	2022/11/25	2023/11/24
SONOMA INSTRUMENT	Amplifier	310 N	186131	2022/11/08	2023/11/07
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2022/11/08	2023/11/07
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2022/11/08	2023/11/07
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2022/11/30	2025/11/29
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2022/12/26	2025/12/25
Radiated Emission Test Software: e3 19821b (V9)					
Unknown	RF Coaxial Cable	No.10	N050	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.11	N1000	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.12	N040	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.13	N300	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.14	N800	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.15	N600	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.16	N650	2022/11/25	2023/11/24
CD	Band Reject Filter	BRM-5.15/5.35g-45	075	2022/11/25	2023/11/24

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde&Schwarz	Spectrum Analyzer	FSV-40	101495	2022/11/25	2023/11/24
Tonscend	RF Control Unit	JS0806-2	19G8060182	2022/10/24	2023/10/23
Agilent	USB wideband power sensor	U2021XA	MY54250003	2022/06/27	2023/06/26
WEINSCHL	10dB Attenuator	5324	AU 3842	2022/11/25	2023/11/24
Unknown	RF Cable	Unknown	1	Each time	

* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.407 (f) & §1.1310 & §2.1091 –MPE-Based Exemption

Applicable Standard

According to subpart 15.407 (f) and subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

According to KDB 447498 D04 Interim General RF Exposure Guidance

MPE-Based Exemption:

General frequency and separation-distance dependent MPE-based effective radiated power(ERP) thresholds are in Table B.1 [Table 1 of § 1.1307(b)(1)(i)(C)] to support an exemption from further evaluation from 300 kHz through 100 GHz.

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$.
1.34-30	$3,450 R^2/f^2$.
30-300	$3.83 R^2$.
300-1,500	$0.0128 R^2 f$.
1,500-100,000	$19.2 R^2$.

R is the minimum separation distance in meters

f = frequency in MHz

For multiple RF sources: Multiple RF sources are exempt if:

in the case of fixed RF sources operating in the same time-averaging period, or of multiple mobile or portable RF sources within a device operating in the same time averaging period, if the sum of the fractional contributions to the applicable thresholds is less than or equal to 1 as indicated in the following equation.

$$\sum_{i=1}^a \frac{P_i}{P_{th,i}} + \sum_{j=1}^b \frac{ERP_j}{ERP_{th,j}} + \sum_{k=1}^c \frac{Evaluated_k}{Exposure Limit_k} \leq 1$$

Where:

a = number of fixed, mobile, or portable RF sources claiming exemption using paragraph (b)(3)(i)(B) of this section for P_{th}, including existing exempt transmitters and those being added.

b = number of fixed, mobile, or portable RF sources claiming exemption using paragraph (b)(3)(i)(C) of this section for Threshold ERP, including existing exempt transmitters and those being added.

c = number of existing fixed, mobile, or portable RF sources with known evaluation for the specified minimum distance including existing evaluated transmitters.

P_i = the available maximum time-averaged power or the ERP, whichever is greater, for fixed, mobile, or portable RF source i at a distance between 0.5 cm and 40 cm (inclusive).

$P_{th,i}$ = the exemption threshold power (P_{th}) according to paragraph (b)(3)(i)(B) of this section for fixed, mobile, or portable RF source i.

ERP_j = the ERP of fixed, mobile, or portable RF source j.

ERP_{th,j} = exemption threshold ERP for fixed, mobile, or portable RF source j, at a distance of at least $\lambda/2\pi$ according to the applicable formula of paragraph (b)(3)(i)(C) of this section.

Evaluated_k = the maximum reported SAR or MPE of fixed, mobile, or portable RF source k either in the device or at the transmitter site from an existing evaluation at the location of exposure.

Exposure Limit_k = either the general population/uncontrolled maximum permissible exposure (MPE) or specific absorption rate (SAR) limit for each fixed, mobile, or portable RF source k, as applicable from § 1.1310 of this chapter.

Test result

For worst case:

Mode	Frequency (MHz)	Tune up conducted power	Antenna Gain		ERP		Evaluation Distance (m)	ERP Limit (mW)
		(dBm)	(dBi)	(dBd)	(dBm)	(mW)		
5G Wi-Fi	5150-5250	18.5	2.16	0.01	18.51	70.96	0.2	768
DECT	1920-1930	19.0	4.33	2.18	21.18	131.22	0.2	768

Note 1: The tune up conducted power and antenna gain was declared by the applicant.

Note 2: 0dBd=2.15dBi.

Note 3: The DECT function can transmit at the same time with the Wi-Fi function.

Simultaneous transmitting consideration (worst case):

The ratio= $ERP_{DECT}/limit + ERP_{Wi-Fi}/limit = 131.22/768 + 70.96/768 = 0.263 < 1.0$

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliant.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a) Antenna must be permanently attached to the unit.
- b) Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.407 (a), if the transmitting antennas of directional gain greater than 6dBi are used, the transmit power and power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has one integral antennas arrangement for 5G Wi-Fi, which were permanently attached to the EUT. Please refer to the EUT photos.

Type	Antenna Gain	Impedance	Frequency Range
PCB	2.16dBi	50 Ω	5150-5250MHz


Result: Compliant.

FCC §15.407 (b) (6) §15.207 (a) – CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207, §15.407(b) (6)

EUT Setup

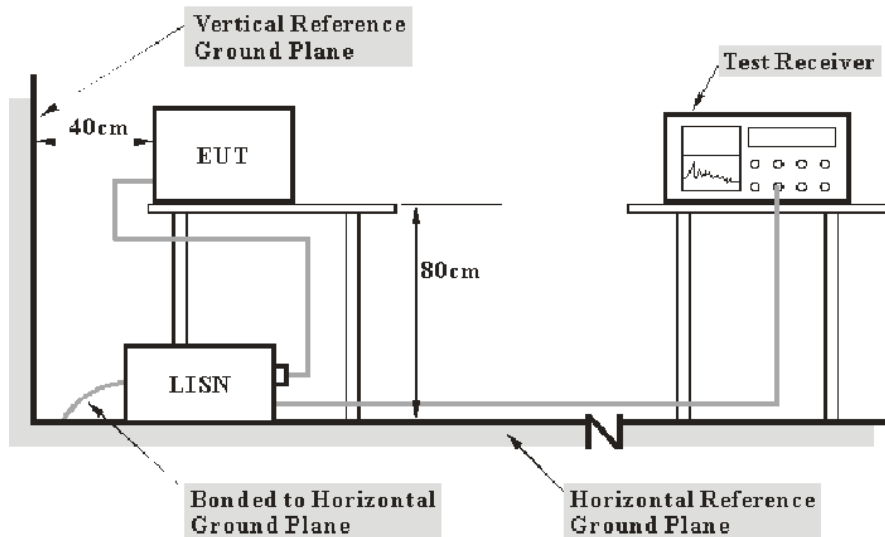

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and Average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “Over Limit” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over limit of -7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Over Limit} = \text{Level} - \text{Limit}$$

$$\text{Level} = \text{Reading level} + \text{Factor}$$


Test Data

Environmental Conditions

Temperature:	22°C
Relative Humidity:	51 %
ATM Pressure:	101.0 kPa


The testing was performed by Jason Liu on 2023-01-16.

EUT operation mode: Transmitting (worst case for 802.11 n40 5190MHz)

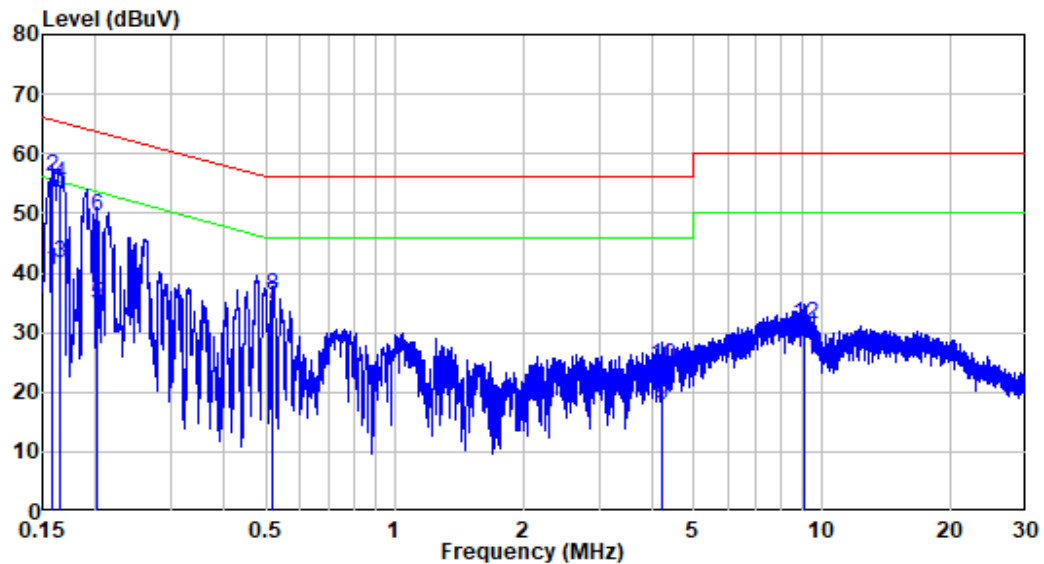AC 120V/60 Hz, Line

Site : Shielding Room
 Condition: Line
 Job No. : RA221215-61840E-RF
 Mode : 5G WIFI

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.158	9.90	30.65	40.55	55.56	-15.01	Average
2	0.158	9.90	46.16	56.06	65.56	-9.50	QP
3	0.164	9.90	31.76	41.66	55.25	-13.59	Average
4	0.164	9.90	44.97	54.87	65.25	-10.38	QP
5	0.202	9.90	24.74	34.64	53.55	-18.91	Average
6	0.202	9.90	39.59	49.49	63.55	-14.06	QP
7	0.517	9.82	24.93	34.75	46.00	-11.25	Average
8	0.517	9.82	26.34	36.16	56.00	-19.84	QP
9	4.227	9.94	7.84	17.78	46.00	-28.22	Average
10	4.227	9.94	14.46	24.40	56.00	-31.60	QP
11	9.041	9.99	16.69	26.68	50.00	-23.32	Average
12	9.041	9.99	21.34	31.33	60.00	-28.67	QP

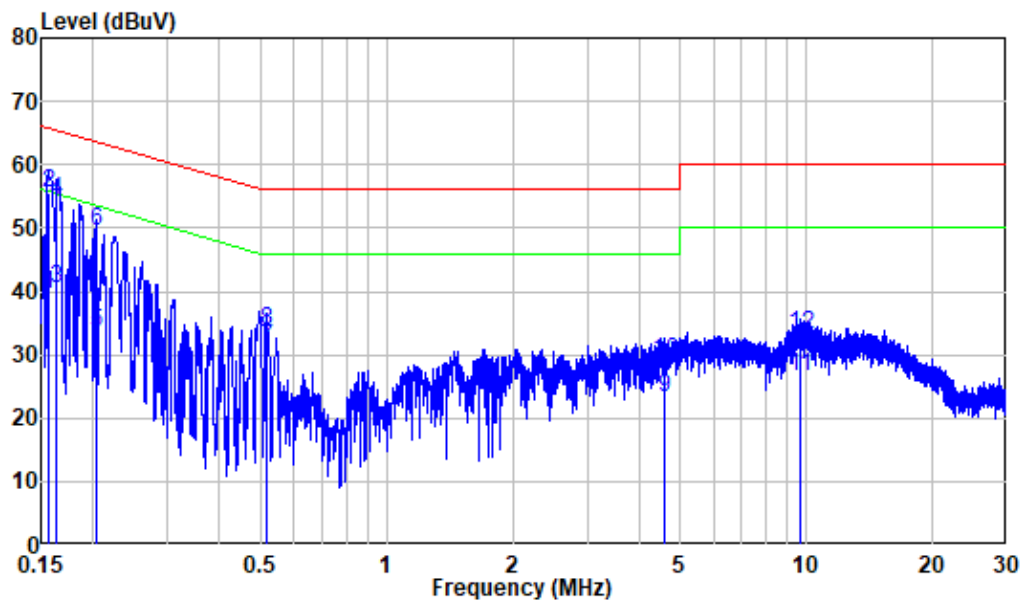AC 120V/60 Hz, Neutral

Site : Shielding Room
 Condition: Neutral
 Job No. : RA221215-61840E-RF
 Mode : 5G WIFI

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.156	9.80	29.76	39.56	55.68	-16.12	Average
2	0.156	9.80	45.79	55.59	65.68	-10.09	QP
3	0.164	9.80	30.80	40.60	55.27	-14.67	Average
4	0.164	9.80	44.48	54.28	65.27	-10.99	QP
5	0.203	9.80	23.73	33.53	53.50	-19.97	Average
6	0.203	9.80	39.70	49.50	63.50	-14.00	QP
7	0.517	9.90	21.23	31.13	46.00	-14.87	Average
8	0.517	9.90	23.93	33.83	56.00	-22.17	QP
9	4.601	9.90	13.40	23.30	46.00	-22.70	Average
10	4.601	9.90	19.19	29.09	56.00	-26.91	QP
11	9.660	10.01	16.56	26.57	50.00	-23.43	Average
12	9.660	10.01	23.15	33.16	60.00	-26.84	QP

§15.205 & §15.209 & §15.407(B)– UNDESIRABLE EMISSION

Applicable Standard

FCC §15.407 (b); §15.209; §15.205;


(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:


- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

EUT Setup

Below 1 GHz:

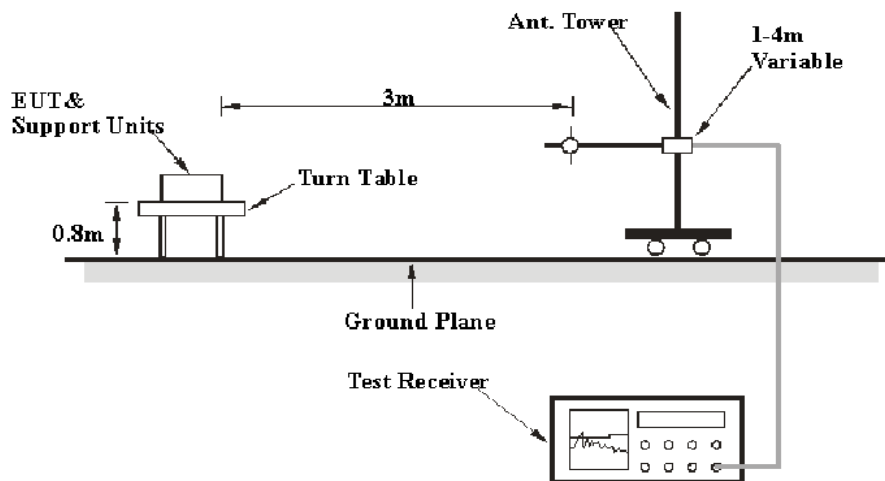

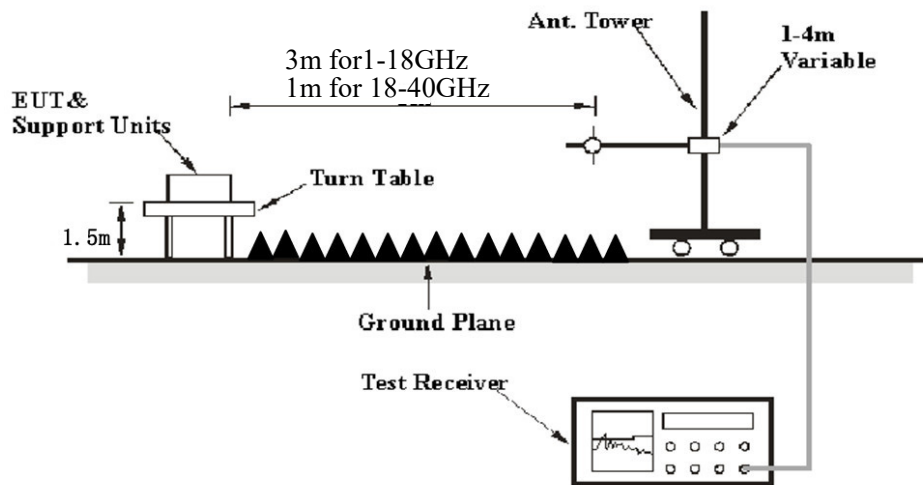Above 1 GHz:

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC 15.209 and FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1MHz	10 Hz ^{Note 1}	/	Average
	1MHz	> 1/T ^{Note 2}	/	Average

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

Test Procedure**Radiated Spurious Emission**

During the radiated emission test, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all the installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

According to ANSI C63.10-2013,9.4: For field strength measurements made at other than the distance at which the applicable limit is specified, extrapolate the measured field strength to the field strength at the distance specified by the limit using an inverse distance correction factor (20 dB/decade of distance). In some cases, a different distance correction factor may be required;

$$E_{\text{SpecLimit}} = E_{\text{Meas}} + 20 \log \left(\frac{d_{\text{Meas}}}{d_{\text{SpecLimit}}} \right)$$

where

$E_{\text{SpecLimit}}$	is the field strength of the emission at the distance specified by the limit, in dBμV/m
E_{Meas}	is the field strength of the emission at the measurement distance, in dBμV/m
d_{Meas}	is the measurement distance, in m
$d_{\text{SpecLimit}}$	is the distance specified by the limit, in m

So the extrapolation factor of 1m is $20 \cdot \log(1/3) = -9.5$ dB, for 18-40GHz range, the limit of 1m distance was added by 9.5dB from limit of 3m to compared with the result measurement at 1m distance.

Corrected Factor & Margin Calculation

The Corrected Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin/Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin/over limit of -7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\begin{aligned} \text{Margin/Over limit} &= \text{Corrected Amplitude/Level} - \text{Limit} \\ \text{Corrected Amplitude/Level} &= \text{Reading} + \text{Factor} \end{aligned}$$

Test Data

Environmental Conditions

Temperature:	24~24.5℃
Relative Humidity:	50~57 %
ATM Pressure:	101.0 kPa


The testing was performed by Jimi Zheng on 2023-01-18 for below 1GHz and Jason Liu on 2023-01-06 for above 1GHz.

EUT operation mode: Transmitting (Pre-scan in the X,Y and Z axes of orientation, the worst case X-axes of orientation was recorded)

30MHz-1GHz: (worst case for 802.11 n40 5190MHz)

Note: When the test result of Peak was less than the limit of QP more than 6dB, just the peak value was recorded.


Horizontal

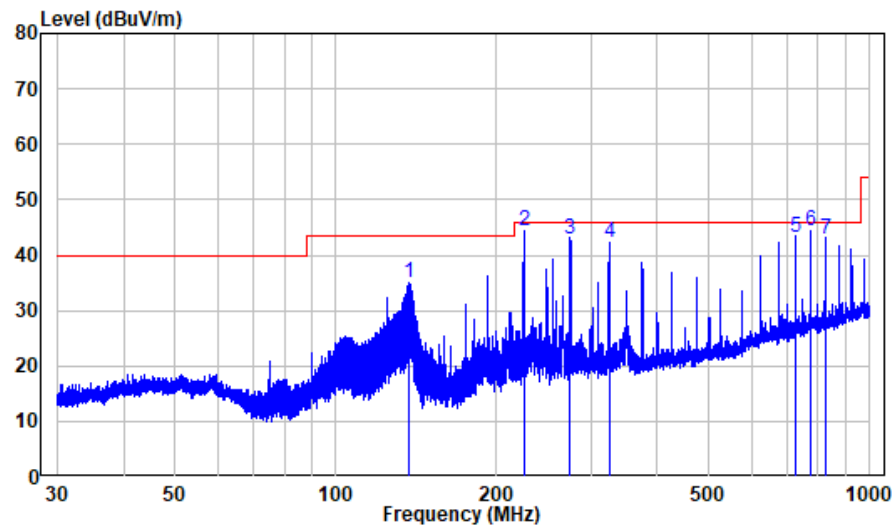

Site : chamber
Condition: 3m HORIZONTAL
Job No. : RA221215-61840E-RF
Test Mode: 5G WIFI

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	137.420	-15.27	50.43	35.16	43.50	-8.34	Peak
2	225.209	-11.25	55.70	44.45	46.00	-1.55	QP
3	274.916	-9.92	52.91	42.99	46.00	-3.01	QP
4	325.026	-8.27	50.60	42.33	46.00	-3.67	QP
5	724.896	-1.28	44.59	43.31	46.00	-2.69	QP
6	774.837	0.03	44.21	44.24	46.00	-1.76	QP
7	824.597	0.06	42.80	42.86	46.00	-3.14	QP

Vertical

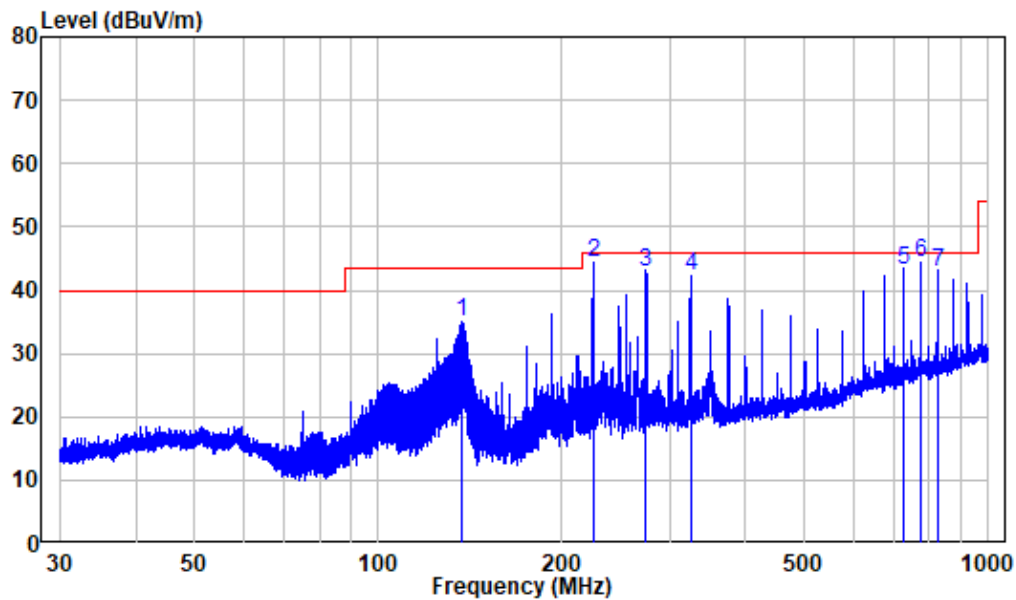

Site : chamber
 Condition: 3m HORIZONTAL
 Job No. : RA221215-61840E-RF
 Test Mode: 5G WIFI

	Freq	Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	137.420	-15.27	50.43	35.16	43.50	-8.34	Peak
2	225.209	-11.25	55.70	44.45	46.00	-1.55	QP
3	274.916	-9.92	52.91	42.99	46.00	-3.01	QP
4	325.026	-8.27	50.60	42.33	46.00	-3.67	QP
5	724.896	-1.28	44.59	43.31	46.00	-2.69	QP
6	774.837	0.03	44.21	44.24	46.00	-1.76	QP
7	824.597	0.06	42.80	42.86	46.00	-3.14	QP

Above 1GHz:**5150-5250 MHz:**

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11N40									
5190 MHz									
4500	66.60	PK	30	2.1	H	-4.72	61.88	74	-12.12
4500	53.00	AV	30	2.1	H	-4.72	48.28	54	-5.72
4500	66.55	PK	232	1.4	V	-4.72	61.83	74	-12.17
4500	53.19	AV	232	1.4	V	-4.72	48.47	54	-5.53
5150	64.91	PK	178	2.5	H	-2.73	62.18	74	-11.82
5150	52.83	AV	178	2.5	H	-2.73	50.10	54	-3.90
5150	65.02	PK	192	2.3	V	-2.73	62.29	74	-11.71
5150	52.90	AV	192	2.3	V	-2.73	50.17	54	-3.83
5350	64.76	PK	162	2.2	H	-2.33	62.43	74	-11.57
5350	52.04	AV	162	2.2	H	-2.33	49.71	54	-4.29
5350	64.00	PK	324	1.9	V	-2.33	61.67	74	-12.33
5350	51.21	AV	324	1.9	V	-2.33	48.88	54	-5.12
5460	63.35	PK	129	1.3	H	-2.26	61.09	74	-12.91
5460	50.26	AV	129	1.3	H	-2.26	48.00	54	-6.00
5460	63.13	PK	166	2.5	V	-2.26	60.87	74	-13.13
5460	49.82	AV	166	2.5	V	-2.26	47.56	54	-6.44
10380	51.95	PK	26	1.7	H	8.18	60.13	68.2	-8.07
10380	51.92	PK	219	1.7	V	8.18	60.10	68.2	-8.10



Note:



Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Absolute Level (Corrected Amplitude)= Factor + Reading

Margin = Absolute Level (Corrected Amplitude) - Limit

The other spurious emission which is 20dB below to the limit or in the noise floor was not recorded.

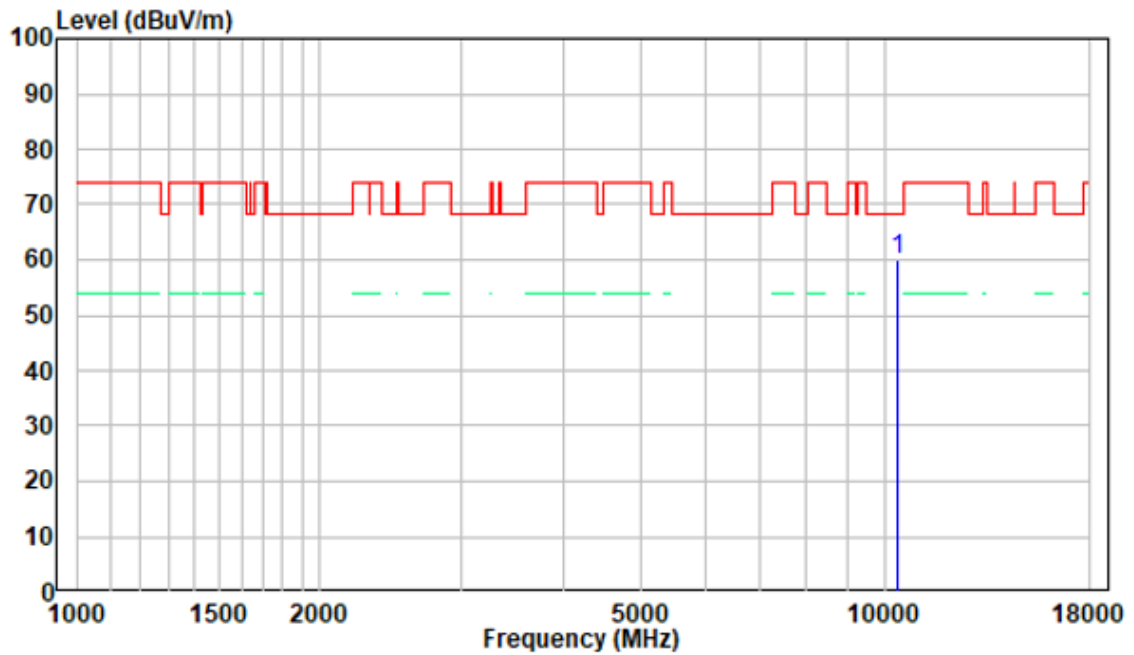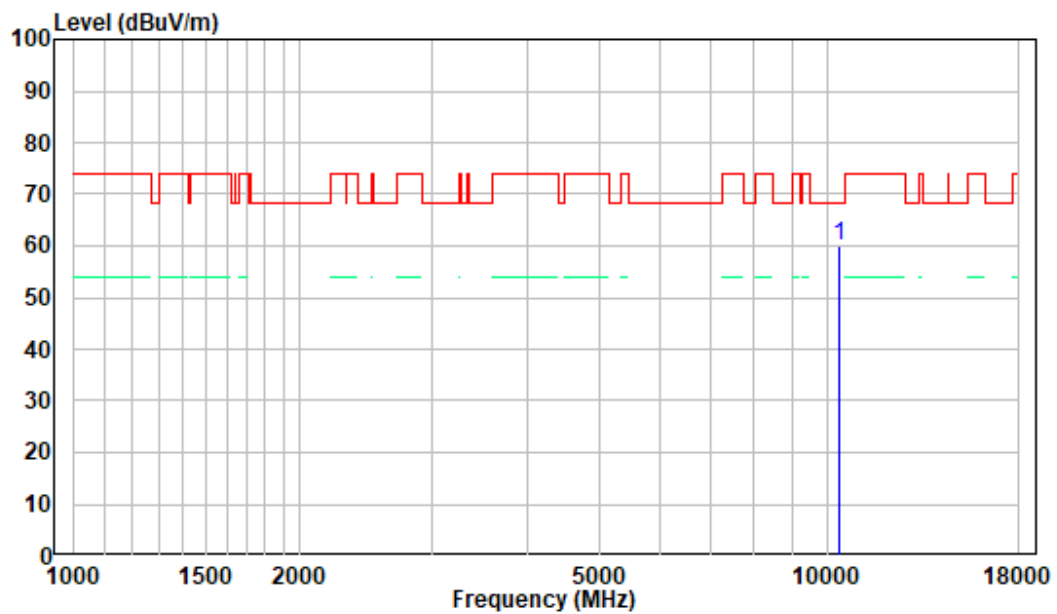1-18 GHz:**Pre-scan Plots:****802.11n40, 5190MHz****Horizontal****Vertical**

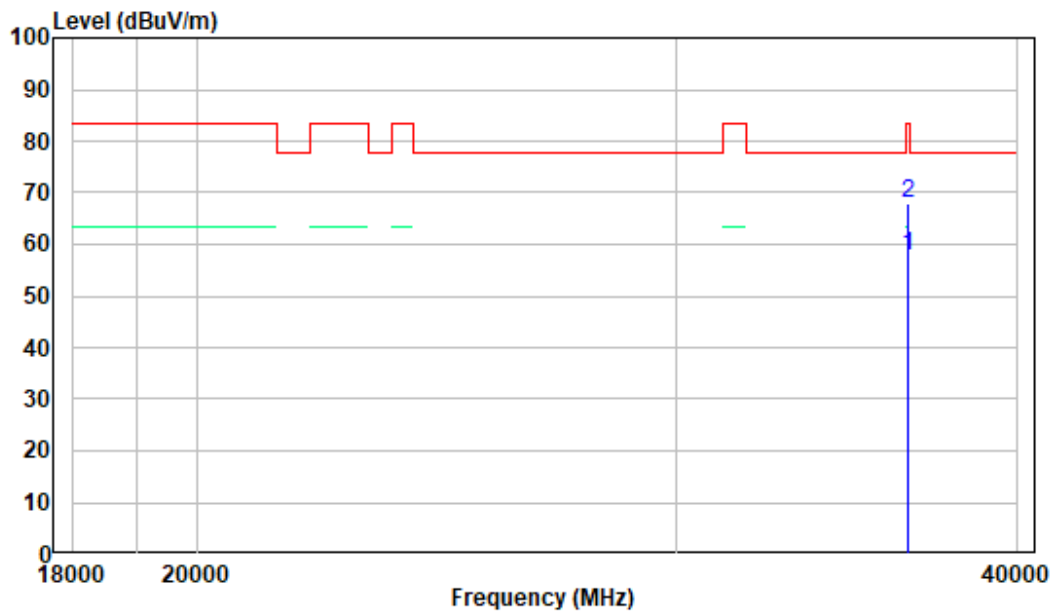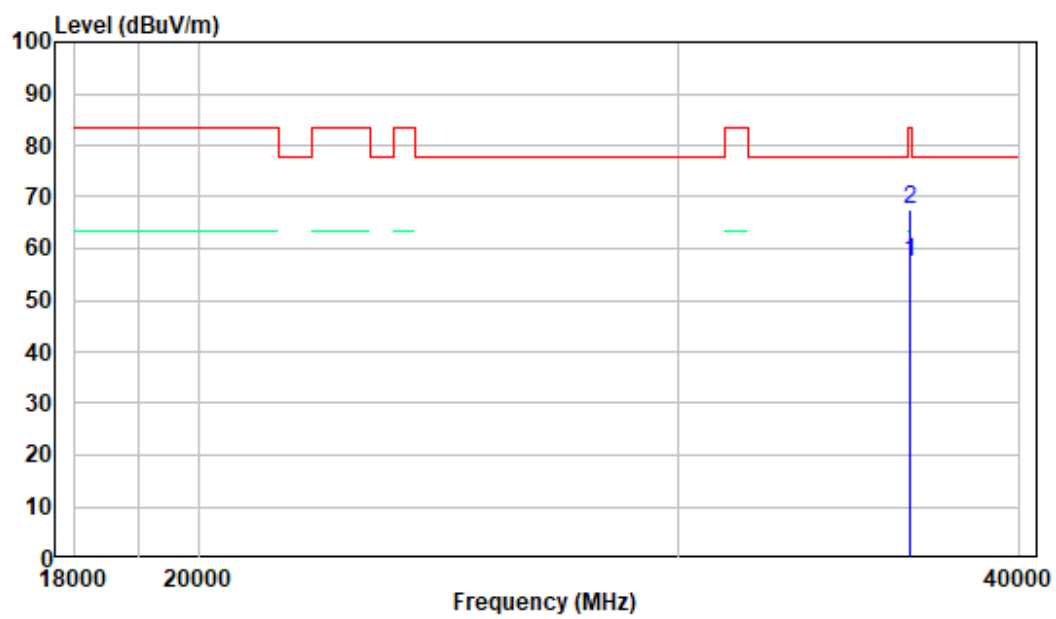18 -40GHz:**Pre-scan Plots:****802.11n40, 5190MHz****Horizontal****Vertical**

FCC §15.407(a),(e) – 26 dB & 6dB EMISSION BANDWIDTH

Applicable Standard

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure


1. Emission Bandwidth (EBW)

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = Peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.725-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Data**Environmental Conditions**

Temperature:	24.8℃
Relative Humidity:	53 %
ATM Pressure:	101.0 kPa

The testing was performed by Jesse on 2023-01-04.

EUT operation mode: Transmitting

Test Result: Pass

Please refer to the Appendix.

FCC §15.407(a) – CONDUCTED TRANSMITTER OUTPUT POWER

Applicable Standard

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

Place the EUT on a bench and set it in transmitting mode.

- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
- Add a correction factor to the display.

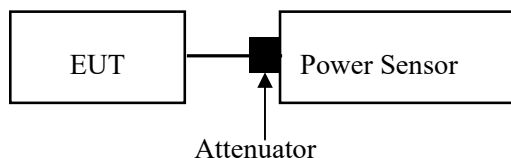

Test Data**Environmental Conditions**

Temperature:	24.8℃
Relative Humidity:	53 %
ATM Pressure:	101.0 kPa

The testing was performed by Jesse on 2023-01-04.

EUT operation mode: Transmitting

Test Result: Pass

Please refer to the Appendix.

FCC §15.407(a) - POWER SPECTRAL DENSITY

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:

- Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- Set $VBW \geq 3 RBW$.
- If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log(500 \text{ kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log(1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.



Test Data**Environmental Conditions**

Temperature:	24.8℃
Relative Humidity:	53 %
ATM Pressure:	101.0 kPa

The testing was performed by Jesse on 2023-01-04.

EUT operation mode: Transmitting

Test Result: Pass


Please refer to the Appendix.

APPENDIX

Appendix A1: Emission Bandwidth Test Result

Test Mode	Antenna	Frequency[MHz]	26db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11N40SISO	Ant1	5190	46.24	5166.72	5212.96	---	---

Test Graphs

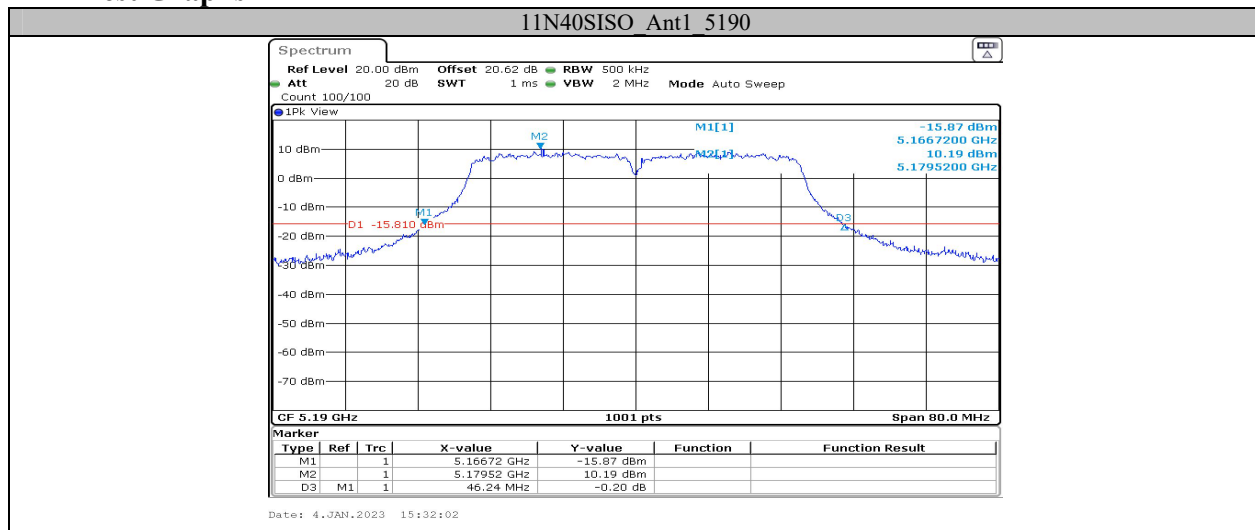


Appendix A2: Occupied channel bandwidth Test Result

Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11N40SISO	Ant1	5190	37.722	5171.139	5208.861	---	---

Note: the EUT not operate with any part of OBW fall within 5250-5350MHz and 5470-5725MHz range.


Test Graphs

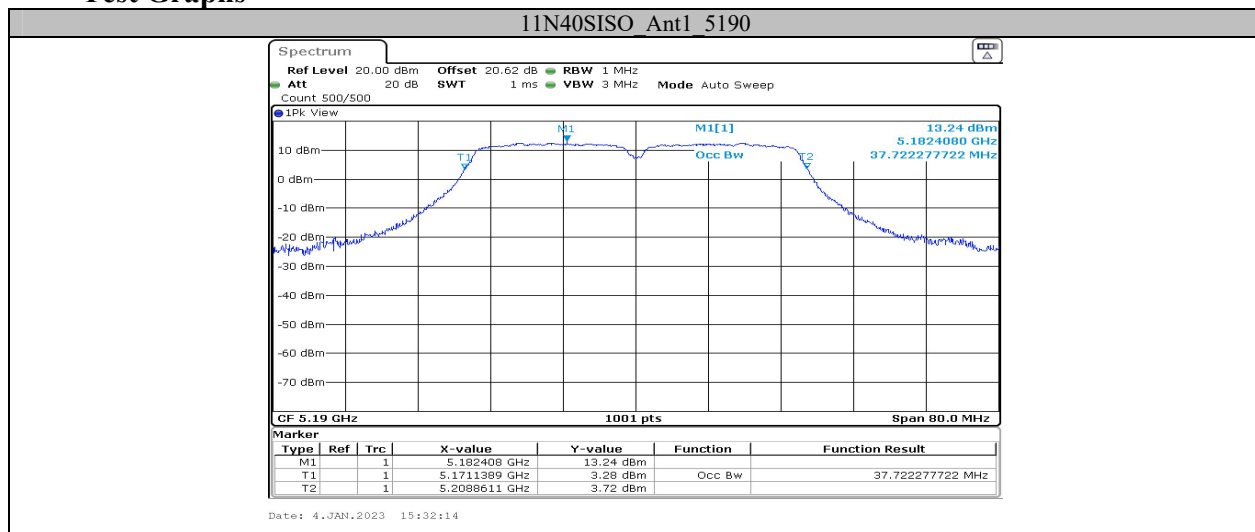

Appendix B: Duty Cycle
Test Result

Test Mode	Antenna	Frequency [MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
11N40SISO	Ant1	5190	0.94	0.98	95.92

Test Graphs

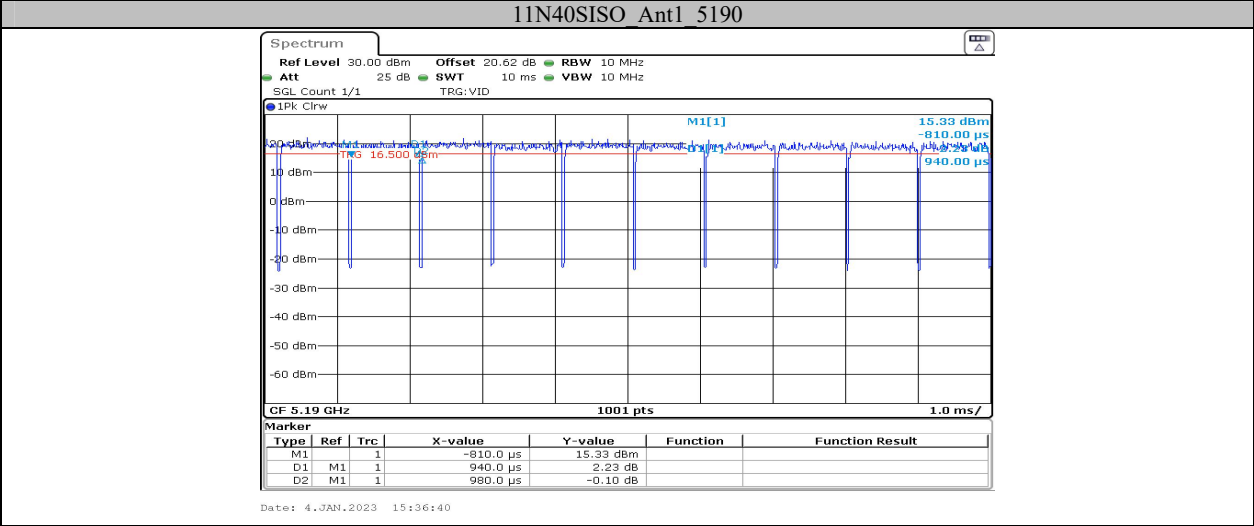

**Appendix C: Maximum conducted output power
Test Result**

Test Mode	Antenna	Frequency [MHz]	Reading [dBm]	Duty Cycle [%]	DC Factor [dBm]	Result [dBm]	Limit [dBm]	Verdict
11N40SISO	Ant1	5190	17.98	95.92	0.18	18.16	≤23.98	PASS

Note: the EUT is a client device.

Appendix D: Maximum power spectral density**Test Result**

Test Mode	Antenna	Frequency[MHz]	Result [dBm/MHz]	Limit[dBm/MHz]	Verdict
11N40SISO	Ant1	5190	3.61	≤11.00	PASS

Note1: The Duty Cycle Factor is compensated in the graph.

Note2: the EUT is a client device.

Test Graphs

***** END OF REPORT *****