


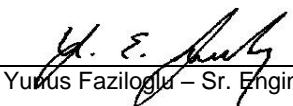

BUREAU
VERITAS

Bureau Veritas Consumer Products Services Inc.

Test Report

Report No	ET0720-1
Client	Dermal Photonics Corp.
Address	100 Corporate Place Suite 303 Peabody MA, 01960
Phone	603-264-3405
Items tested	Product Name: NIRA Laser, Model: 104-001
FCC ID	2ADZENIRD
FRN	0028133858
Equipment Type	Digital Transmission System
Equipment Code	DTS
Emission Designator	1M05F1D
FCC/IC Rule Parts	CFR Title 47 FCC Part 15.247, ISED Canada RSS-247 Issue 2
Test Dates	Apr 1-10, 2019
Results	As detailed within this report
Prepared by	 Christopher Hamel – Test Engineer
Authorized by	 Yuris Faziloglu – Sr. Engineer
Issue Date	<u>6/5/2019</u>
Conditions of Issue	This Test Report is issued subject to the conditions stated in the 'Conditions of Testing' section on page 32 of this report.

Contents

Contents.....	2
Summary.....	3
Test Methodology.....	4
Product Tested - Configuration Documentation	5
Statement of Conformity.....	6
Test Results	7
Radiated Spurious Emissions	7
AC Line Conducted Emissions.....	16
Measurement Uncertainty.....	17
Conditions Of Testing	18
Appendix A.....	20

Report REV Sep-08-2017 - YF



Bureau Veritas Consumer Products Services Inc.
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 2 of 32

Summary

This test report supports an application for certification of a transmitter operating pursuant to:
CFR Title 47 FCC Part 15.247, ISED Canada RSS-247 Issue 2

The product is the NIRA Laser, Model: 104-001. It is a direct sequence spread spectrum transmitter that operates in the 2402 – 2480 MHz frequency range.

Antenna Type: PCB Trace

Gain: 1.6dBi

We found that the product met the above requirements without modification.

Test samples were received in good condition.



Bureau Veritas Consumer Products Services Inc.
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 3 of 32

Test Methodology

All testing was performed according to the following rules/procedures/documents:
CFR Title 47 FCC Part 15.247, ISED Canada RSS-247 Issue 2, ISED Canada RSS-Gen Issue 5, FCC KDB 558074 D01 15.247 Measurement Guidance v05r01 and ANSI C63.10-2013

Radiated emissions were maximized by rotating the device around 3 orthogonal planes (X, Y and Z) as well as varying the test antenna's height and polarity. EUT antenna is internal, therefore could not be maximized separately.

EUT operating voltage is 3.6V DC from battery. External USB power supply is provided with the EUT for charging. EUT cannot transmit during charging; therefore AC line conducted emissions requirements are not applicable.

Following bandwidths were used during radiated spurious emissions testing.

Frequency	RBW	VBW
30-1000MHz	120kHz	1MHz
1-25GHz	1MHz	3MHz



Product Tested - Configuration Documentation

EUT Configuration			
Work Order:	T0720		
Company:	Dermal Photonics		
Company Address:	100 Corporate Pl, Suite 303 Peabody, MA, 01960		
Contact:	Felix Feldchtein		
	Model Number	Product Name	Serial Number
EUT:	104-001	NIRA Laser	Sample 1
EUT Description:	Skincare Laser		
EUT Max Frequency:	2480 MHz (Tx), 2488MHz (non-Tx)		
EUT Min Frequency:	2402 MHz		
Software Operating Mode Description:			
Test firmware allowing transmission of modulated signal on 3 channels (Low: 2402MHz, Mid: 2440MHz, High: 2480MHz)			



Bureau Veritas Consumer Products Services Inc.
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 5 of 32

Statement of Conformity

RSS-GEN	RSP-100	RSS 247	Part 15	Comments
6.4			15.15(b)	There are no controls accessible to the users that vary the output power.
	3.1		15.19	The label is shown in the label exhibit.
	3.2		15.21	Information to the user is shown in the instruction manual exhibit.
			15.27	No special accessories are required for compliance.
3.2			15.31	The EUT was tested in accordance with the measurement standards in this section.
6.13.2			15.33	Frequency range was investigated according to this section, unless noted in specific rule section under which the equipment operates.
6.13.1			15.35	The EUT emissions were measured using the measurement detector and bandwidth specified in this section, unless noted in specific rule section under which the equipment operates.
6.8			15.203	EUT uses a non-detachable internal PCB trace antenna.
8.10			15.205 15.209	The fundamental is not in a restricted band and the spurious and harmonic emissions in the restricted bands comply with the general emission limits of 15.209 and RSS-Gen.

Refer to Appendix A of this report for antenna port conducted measurements.



Test Results

Radiated Spurious Emissions

LIMITS

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

[15.247(d)]

Radiated emissions were maximized by rotating the device around 3 orthogonal planes (X, Y and Z) and worst case emissions observed in Y orientation. All the results below are for the worst case orientation only.

MEASUREMENTS / RESULTS

Curtis Straus - a Bureau Veritas Company	Work Order - S2579
Radiated Emissions Electric Field 3m Distance	EUT Power Input - 120Vac/60Hz
Top Peaks Horizontal 30-1000MHz	Test Site - CH-2
Operator: AKZ	Conditions - 24°C; 45%RH; 1010mBar
Notes:	
Channel 0	EUT Maximum Frequency - 2488MHz

Data Taken at 02:21:00 PM, Wednesday, September 19, 2018

Frequency (MHz)	Peak Reading (dB μ V)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dB μ V/m)	Lim1: FCC_pt15_209	Lim1 Margin (dB)	Lim1 Test Results (Pass/Fail)	Worst Margin Lim1 (dB)	Lim2: FCC_pt15_109_Class_B	Lim2 Margin (dB)	Lim2 Test Results (Pass/Fail)	Worst Margin Lim2 (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
30.024	32.4	-6.4	26	40	-14	PASS	-14	40	-14	PASS	-14	100	225
122.708	33.5	-14.2	19.3	43.5	-24.2	PASS		43.5	-24.2	PASS		100	135
171.814	35.8	-16	19.7	43.5	-23.8	PASS		43.5	-23.8	PASS		150	0
184.084	39.2	-16.3	23	43.5	-20.5	PASS		43.5	-20.6	PASS		150	225
466.403	37	-9.3	27.7	46	-18.3	PASS		46	-18.3	PASS		150	315
883.649	33.4	-2.7	30.7	46	-15.3	PASS		46	-15.3	PASS		200	225

Curtis Straus - a Bureau Veritas Company	Work Order - S2579
Radiated Emissions Electric Field 3m Distance	EUT Power Input - 120Vac/60Hz
Top Peaks Vertical 30-1000MHz	Test Site - CH-2
Operator: AKZ	Conditions - 24°C; 45%RH; 1010mBar
Notes:	
Channel 0	EUT Maximum Frequency - 2488MHz

Data Taken at 02:21:00 PM, Wednesday, September 19, 2018

Frequency (MHz)	Peak Reading (dB μ V)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dB μ V/m)	Lim1: FCC_pt15_209	Lim1 Margin (dB)	Lim1 Test Results (Pass/Fail)	Worst Margin Lim1 (dB)	Lim2: FCC_pt15_109_Class_B	Lim2 Margin (dB)	Lim2 Test Results (Pass/Fail)	Worst Margin Lim2 (dB)	Antenna Height (cm)	Turntable Azimuth (degrees)
30.897	32.3	-7.1	25.3	40	-14.7	PASS		40	-14.7	PASS		200	180
196.355	35.5	-15	20.5	43.5	-23	PASS		43.5	-23	PASS		100	135
466.33	34.8	-9.3	25.5	46	-20.5	PASS		46	-20.5	PASS		200	0
819.095	36.7	-3.7	33.1	46	-12.9	PASS	-12.9	46	-13	PASS	-13	100	180
914.761	32.1	-2.2	29.9	46	-16.1	PASS		46	-16.1	PASS		200	0
995.926	32.2	-0.5	31.7	54	-22.3	PASS		54	-22.3	PASS		200	45

30-1000MHz Low Channel



Bureau Veritas Consumer Products Services Inc.
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 7 of 32



Curtis Straus - a Bureau Veritas Company Radiated Emissions Electric Field 3m Distance Top Peaks Horizontal 30-1000MHz Operator: AKZ Notes: Channel 19	Work Order - S2579 EUT Power Input - 120Vac/60Hz Test Site - CH-2 Conditions - 24°C; 45%RH; 1010mBar EUT Maximum Frequency - 2488MHz
---	--

Data Taken at 01:47:53 PM, Wednesday, September 19, 2018

Frequency (MHz)	Peak Reading (dB μ V)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dB μ V/m)	Lim1: FCC_pt15_2 09 (dB μ V/m)	Lim1 Margin (dB)	Lim1 Test Results (Pass/Fail)	Worst Margin Lim1 (dB)	Lim2: FCC_pt15_1 09_Class_B (dB μ V/m)	Lim2 Margin (dB)	Lim2 Test Results (Pass/Fail)	Worst Margin Lim2 (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
30.485	32.6	-6.8	25.9	40	-14.1	PASS		40	-14.1	PASS		150	135
466.379	37.6	-9.3	28.3	46	-17.7	PASS		46	-17.7	PASS		150	135
700.1	38.8	-5.3	33.5	46	-12.5	PASS		46	-12.5	PASS		150	315
701.749	37	-5.3	31.7	46	-14.3	PASS		46	-14.3	PASS		150	0
703.326	42.9	-5.3	37.7	46	-8.3	PASS	-8.3	46	-8.4	PASS	-8.4	100	315
883.649	32.9	-2.7	30.2	46	-15.8	PASS		46	-15.8	PASS		200	90

Curtis Straus - a Bureau Veritas Company Radiated Emissions Electric Field 3m Distance Top Peaks Vertical 30-1000MHz Operator: AKZ Notes: Channel 19	Work Order - S2579 EUT Power Input - 120Vac/60Hz Test Site - CH-2 Conditions - 24°C; 45%RH; 1010mBar EUT Maximum Frequency - 2488MHz
---	--

Data Taken at 01:47:53 PM, Wednesday, September 19, 2018

Frequency (MHz)	Peak Reading (dB μ V)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dB μ V/m)	Lim1: FCC_pt15_2 09 (dB μ V/m)	Lim1 Margin (dB)	Lim1 Test Results (Pass/Fail)	Worst Margin Lim1 (dB)	Lim2: FCC_pt15_1 09_Class_B (dB μ V/m)	Lim2 Margin (dB)	Lim2 Test Results (Pass/Fail)	Worst Margin Lim2 (dB)	Antenna Height (cm)	Turntable Azimuth (degrees)
30.558	32.2	-6.8	25.4	40	-14.6	PASS		40	-14.6	PASS		200	45
466.379	34.5	-9.3	25.2	46	-20.8	PASS		46	-20.8	PASS		200	135
490.92	34.4	-8.9	25.5	46	-20.5	PASS		46	-20.5	PASS		200	90
701.095	41.3	-5.3	36	46	-10	PASS	-10	46	-10	PASS	-10	200	315
703.034	38.9	-5.3	33.6	46	-12.4	PASS		46	-12.4	PASS		200	315
936.95	31.7	-1.9	29.8	46	-16.2	PASS		46	-16.2	PASS		150	90

30-1000MHz Mid Channel



Bureau Veritas Consumer Products Services Inc.
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 8 of 32

Testing Cert. No. 1627-01

Curtis Straus - a Bureau Veritas Company Radiated Emissions Electric Field 3m Distance Top Peaks Horizontal 30-1000MHz Operator: AKZ Notes: Channel 39		Work Order - S2579 EUT Power Input - 120Vac/60Hz Test Site - CH-2 Conditions - 24°C; 45%RH; 1010mBar EUT Maximum Frequency - 2488MHz	
---	--	--	--

Data Taken at 03:18:09 PM, Wednesday, September 19, 2018

Frequency (MHz)	Peak Reading (dB μ V)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dB μ V/m)	Lim1: FCC_pt15_209 (dB μ V/m)	Lim1 Margin (dB)	Lim1 Test Results (Pass/Fail)	Worst Margin Lim1 (dB)	Lim2: FCC_pt15_109_Class_B (dB μ V/m)	Lim2 Margin (dB)	Lim2 Test Results (Pass/Fail)	Worst Margin Lim2 (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
30.073	32	-6.5	25.5	40	-14.5	PASS	-14.5	40	-14.5	PASS	-14.5	100	0
122.077	34.1	-14.2	19.9	43.5	-23.6	PASS		43.5	-23.6	PASS		100	225
184.084	39.7	-16.3	23.4	43.5	-20.1	PASS		43.5	-20.1	PASS		150	225
196.379	34.1	-15	19.1	43.5	-24.4	PASS		43.5	-24.4	PASS		150	180
466.354	37.5	-9.3	28.2	46	-17.8	PASS		46	-17.8	PASS		150	90
956.544	31.7	-1.8	29.8	46	-16.2	PASS		46	-16.2	PASS		150	0

Curtis Straus - a Bureau Veritas Company Radiated Emissions Electric Field 3m Distance Top Peaks Vertical 30-1000MHz Operator: AKZ Notes: Channel 39		Work Order - S2579 EUT Power Input - 120Vac/60Hz Test Site - CH-2 Conditions - 24°C; 45%RH; 1010mBar EUT Maximum Frequency - 2488MHz	
---	--	--	--

Data Taken at 03:18:09 PM, Wednesday, September 19, 2018

Frequency (MHz)	Peak Reading (dB μ V)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dB μ V/m)	Lim1: FCC_pt15_209 (dB μ V/m)	Lim1 Margin (dB)	Lim1 Test Results (Pass/Fail)	Worst Margin Lim1 (dB)	Lim2: FCC_pt15_109_Class_B (dB μ V/m)	Lim2 Margin (dB)	Lim2 Test Results (Pass/Fail)	Worst Margin Lim2 (dB)	Antenna Height (cm)	Turntable Azimuth (degrees)
30.461	33.1	-6.8	26.4	40	-13.6	PASS	-13.6	40	-13.6	PASS	-13.6	100	45
130.734	33.6	-14	19.6	43.5	-23.9	PASS		43.5	-24	PASS		150	0
196.379	36.7	-15	21.7	43.5	-21.8	PASS		43.5	-21.9	PASS		100	45
466.354	35.1	-9.3	25.8	46	-20.2	PASS		46	-20.2	PASS		200	180
490.896	34.3	-8.9	25.4	46	-20.6	PASS		46	-20.6	PASS		200	225
946.965	32.3	-1.8	30.5	46	-15.5	PASS		46	-15.5	PASS		150	45

30-1000MHz High Channel

Rev. 9/17/2018

Spectrum Analyzers / Receivers / Preselectors		Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
2093 MXE EMI Receiver		20Hz-26.5GHz	N9038A	Agilent	MY51210181	2093	I	11/16/2018	11/16/2017
Radiated Emissions Sites									
EMI Chamber 2		FCC Code	IC Code	VCCI Code	Range	Asset	Cat	Calibration Due	Calibrated on
EMI Chamber 2		719150	2762A-7	A-0015	30-1000MHz	1686	I	12/21/2018	12/21/2016
		719150	2762A-7	A-0015	1-18GHz	1686	I	12/21/2018	12/21/2016
Preamps / Couplers Attenuators / Filters		Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
2311 PA	1-1000MHz	PAM-103	COM-POWER		441174	2311	II	10/29/2018	10/29/2017
Antennas		Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Red-White BiLog	30-2000MHz	JB1	Sunol		A091604-1	1105	I	8/21/2019	8/21/2017
Meteorological Meters / Chambers		MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
Weather Clock (Pressure Only)		BA928	Oregon Scientific	C3166-1	831	I		5/15/2020	5/15/2018
TH A#2082		HTC-1	HDE		2082	II		3/22/2019	3/22/2018
Cables		Range	Mfr		Cat	Calibration Due	Calibrated on		
Asset #2051	9KHz - 18GHz	Florida RF			II	3/7/2019	3/7/2018		
Asset #2054	9KHz - 18GHz	Florida RF			II	10/31/2018	10/31/2017		
Asset #2466	9KHz-18GHz	MegaPhase			II	10/29/2018	10/29/2017		
2490(6dB)	9KHz-18GHz				II	11/27/2018	11/27/2017		

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.



Bureau Veritas Consumer Products Services Inc.
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 9 of 32

Curtis Straus - a Bureau Veritas Company Radiated Emissions Electric Field 3m Distance Top Peaks Vertical 1-6GHz Operator: ZJ Notes: Low Channel				Work Order - S2579 EUT Power Input - 120V/60Hz Test Site - CH-2 Conditions - 22.8°C; 64%RH; 1003mBar							
---	--	--	--	---	--	--	--	--	--	--	--

Data Taken at 11:02:52 PM, Wednesday, September 19, 2018

Frequency (MHz)	Raw Peak Reading (dB μ V)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dB μ V/m)	Pk Lim: FCC_pt15_109_ClassB_Peak (dB μ V/m)	Margin to Peak Limit (dB)	Peak Limit Test Results (Pass/Fail)	Peak Limit Worst Margin (dB)	Av Lim: FCC_pt15_109_ClassB_AVG (dB μ V/m)	Margin to Average Limit (dB)	Average Limit Test Result (Pass/Fail)	Average Limit Worst Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
1860.25	47.2	-1.4	45.7	74	-28.2	PASS		54	-8.2	PASS		200	23
1941.25	47.8	-0.9	46.9	74	-27.1	PASS		54	-7.1	PASS		200	23
2161.75	45.2	1.8	46.9	74	-27	PASS		54	-7	PASS		200	169
3061.63	46.4	2.2	48.6	74	-25.4	PASS		54	-5.4	PASS		100	42
5819.88	43.1	6.1	49.2	74	-24.7	PASS	-24.7	54	-4.7	PASS	-4.7	200	33

Curtis Straus - a Bureau Veritas Company Radiated Emissions Electric Field 3m Distance Top Peaks Horizontal 1-6GHz Operator: ZJ Notes: Low Channel				Work Order - S2579 EUT Power Input - 120V/60Hz Test Site - CH-2 Conditions - 22.8°C; 64%RH; 1003mBar							
---	--	--	--	---	--	--	--	--	--	--	--

Data Taken at 06:46:35 PM, Wednesday, September 19, 2018

Frequency (MHz)	Peak Reading (dB μ V)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dB μ V/m)	Pk Lim: FCC_pt15_109_ClassB_Peak (dB μ V/m)	Lim1 Margin (dB)	Lim1 Test Results (Pass/Fail)	Worst Margin Lim1 (dB)	Pk Lim: FCC_pt15_109_ClassB_Avg (dB μ V/m)	Lim2 Margin (dB)	Lim2 Test Results (Pass/Fail)	Worst Margin Lim2 (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
2173.63	44.6	1.9	46.5	74	-27.5	PASS		54	-7.5	PASS		200	169
2909.38	45.7	2.6	48.3	74	-25.7	PASS		54	-5.7	PASS		100	126
5963.13	43	6.1	49.1	74	-24.9	PASS	-24.9	54	-4.9	PASS	-4.9	300	298

1-6GHz Low Channel

Curtis Straus - a Bureau Veritas Company Radiated Emissions Electric Field 3m Distance 1-6GHz Vertical Data Operator: ZJ Notes: Mid Channel				Work Order - S2579 EUT Power Input - 120V/60Hz Test Site - CH-2 Conditions - 22.8°C; 64%RH; 1003mBar							
--	--	--	--	---	--	--	--	--	--	--	--

Data Taken at 09:26:55 PM, Wednesday, September 19, 2018

Frequency (MHz)	Raw Peak Reading (dB μ V)	Raw Avg Reading (dB μ V)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dB μ V/m)	Pk Lim: FCC_pt15_109_ClassB_Peak (dB μ V/m)	Peak Margin (dB)	Peak Results (Pass/Fail)	Worst Peak Margin (dB)	Adjusted Avg Amplitude (dB μ V/m)	Av Lim: FCC_pt15_109_ClassB_AVG (dB μ V/m)	Avg Margin (dB)	Avg Results (Pass/Fail)	Worst Avg Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
2166.7	42.4	32.6	1.8	44.2	74	-29.8	PASS		34.4	54	-19.6	PASS		204	91
2939.9	42.1	32.7	2.6	44.7	74	-29.3	PASS		35.2	54	-18.8	PASS		222	92
5932.4	39.5	30.8	6.2	45.6	74	-28.4	PASS	-28.4	37	54	-17	PASS	-17	295	319



Bureau Veritas Consumer Products Services Inc.
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



Curtis Straus - a Bureau Veritas Company Radiated Emissions Electric Field 3m Distance 1-6GHz Horizontal Data Operator: ZJ Notes: Mid Channel	Work Order - S2579 EUT Power Input - 120V/60Hz Test Site - CH-2 Conditions - 22.8°C; 64%RH; 1003mBar
--	---

Data Taken at 09:55:51 PM, Wednesday, September 19, 2018

Frequency (MHz)	Raw Peak Reading (dB μ V)	Raw Avg Reading (dB μ V)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dB μ V/m)	Pk Lim: FCC_pt15_109_ClassB_Peak (dB μ V/m)	Peak Margin (dB)	Peak Results (Pass/Fail)	Worst Peak Margin (dB)	Adjusted Avg Amplitude (dB μ V/m)	Av Lim: FCC_pt15_109_ClassB_AVG (dB μ V/m)	Avg Margin (dB)	Avg Results (Pass/Fail)	Worst Average Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
2132.6	41	32.7	1.5	42.5	74	-31.5	PASS		34.1	54	-19.8	PASS		275	2
3125.6	42.2	33	2.2	44.4	74	-29.5	PASS		35.2	54	-18.8	PASS		215	67
5263.3	39	30.9	4.9	43.9	74	-30.1	PASS		35.8	54	-18.2	PASS		196	202
5276.9	39.9	31	5	44.8	74	-29.1	PASS	-29.1	35.9	54	-18.1	PASS	-18.1	225	70

1-6GHz Mid Channel

Curtis Straus - a Bureau Veritas Company Radiated Emissions Electric Field 3m Distance Top Peaks Vertical 1-6GHz Operator: ZJ Notes: High Channel	Work Order - S2579 EUT Power Input - 120V/60Hz Test Site - CH-2 Conditions - 22.8°C; 64%RH; 1003mBar
--	---

Data Taken at 08:30:55 PM, Wednesday, September 19, 2018

Frequency (MHz)	Raw Peak Reading (dB μ V)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dB μ V/m)	Pk Lim: FCC_pt15_109_ClassB_Peak (dB μ V/m)	Margin to Peak Limit (dB)	Peak Limit Test Results (Pass/Fail)	Peak Limit Worst Margin (dB)	Av Lim: FCC_pt15_109_ClassB_AVG (dB μ V/m)	Margin to Average Limit (dB)	Average Limit Test Result (Pass/Fail)	Average Limit Worst Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
2177	44.5	1.9	46.4	74	-27.5	PASS		54	-7.5	PASS		100	21
3204	45.3	2.5	47.8	74	-26.1	PASS		54	-6.1	PASS		300	167
5919.25	42.6	6.2	48.8	74	-25.2	PASS	-25.2	54	-5.2	PASS	-5.2	100	10

Curtis Straus - a Bureau Veritas Company Radiated Emissions Electric Field 3m Distance Top Peaks Horizontal 1-6GHz Operator: ZJ Notes: High Channel	Work Order - S2579 EUT Power Input - 120V/60Hz Test Site - CH-2 Conditions - 22.8°C; 64%RH; 1003mBar
--	---

Data Taken at 08:30:55 PM, Wednesday, September 19, 2018

Frequency (MHz)	Raw Peak Reading (dB μ V)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dB μ V/m)	Pk Lim: FCC_pt15_109_ClassB_Peak (dB μ V/m)	Margin to Peak Limit (dB)	Peak Limit Test Results (Pass/Fail)	Peak Limit Worst Margin (dB)	Av Lim: FCC_pt15_109_ClassB_AVG (dB μ V/m)	Margin to Average Limit (dB)	Avg Limit Test Result (Pass/Fail)	Avg Limit Worst Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
2168.13	44.4	1.8	46.2	74	-27.8	PASS		54	-7.8	PASS		200	242
2943.5	45.7	2.5	48.2	74	-25.8	PASS		54	-5.8	PASS		200	190
5285.5	45.5	5.1	50.5	74	-23.5	PASS	-23.5	54	-3.5	PASS	-3.5	300	73

1-6GHz High Channel



Bureau Veritas Consumer Products Services Inc.
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 11 of 32



Rev. 9/19/2018

Spectrum Analyzers / Receivers/Preselectors		Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
2093 MXE EMI Receiver		20Hz-26.5GHz	N9038A	Agilent	MY51210181	2093	I	11/16/2018	11/16/2017
Radiated Emissions Sites	FCC Code	IC Code	VCCI Code	Range	Asset	Cat	Calibration Due	Calibrated on	
EMI Chamber 2	719150	2762A-7	A-0015	1-18GHz	1686	I	12/21/2018	12/21/2016	
Preamps /Couplers Attenuators / Filters	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
2311 PA	1-1000MHz	PAM-103	COM-POWER	441174	2311	II	10/29/2018	10/29/2017	
2116 BRF	0.009-18000MHz	BRM50702	Micro-Tronics	G226	2116	II	11/8/2018	11/8/2017	
Antennas	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
Blue Horn	1-18Ghz	3117	ETS	157647	1861	I	2/14/2019	2/14/2017	
Meteorological Meters/Chambers	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on		
Weather Clock (Pressure Only)	BA928	Oregon Scientific	C3166-1	831	I	5/15/2020	5/15/2018		
TH A#2077	HTC-1	HDE	2077	II	II	3/22/2019	3/22/2018		
Cables	Range	Mfr		Cat	Calibration Due	Calibrated on			
Asset #2051	9kHz - 18GHz	Florida RF		II	3/7/2019	3/7/2018			
Asset #2054	9kHz - 18GHz	Florida RF		II	10/31/2018	10/31/2017			
Asset #2466	9KHz-18GHz	MegaPhase		II	10/29/2018	10/29/2017			

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.

Curtis Straus - a Bureau Veritas Company Radiated Emissions Electric Field 1m Distance 6-18GHz Vertical Data Operator: ZJ Notes:	Work Order - S2579 EUT Power Input - 5V DC Test Site - CH-2 Conditions - 22.2°C; 42%RH; 1004mBar EUT Maximum Frequency - 2480MHz
--	--

Data Taken at 04:08:15 PM, Monday, September 24, 2018

Frequency (MHz)	Raw Peak Reading (dB μ V)	Raw Avg Reading (dB μ V)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dB μ V/m)	Pk Lim: FCC_pt15_109_ClassB_Peak (dB μ V/m)	Peak (dB)	Peak Margin (dB)	Peak Results (Pass/Fail)	Worst Peak Margin (dB)	Adjusted Avg Amplitude (dB μ V/m)	Av Lim: FCC_pt15_109_Cl assB_AVG (dB μ V/m)	Avg Margin (dB)	Avg Results (Pass/Fail)	Worst Avg Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
10667.1	39.1	29.8	13	52.1	83.5	-31.4	PASS		42.8	63.5	-20.7	PASS			100	56
16463.6	40.3	31.4	18.1	58.4	83.5	-25.1	PASS		49.5	63.5	-14	PASS			191	164
17976.3	38.8	30.6	21.2	60	83.5	-23.5	PASS	-23.5	51.8	63.5	-11.7	PASS	-11.7		200	340

Curtis Straus - a Bureau Veritas Company Radiated Emissions Electric Field 1m Distance 6-18GHz Horizontal Data Operator: ZJ Notes:	Work Order - S2579 EUT Power Input - 5V DC Test Site - CH-2 Conditions - 22.2°C; 42%RH; 1004mBar EUT Maximum Frequency - 2480MHz
--	--

Data Taken at 04:08:15 PM, Monday, September 24, 2018

Frequency (MHz)	Raw Peak Reading (dB μ V)	Raw Avg Reading (dB μ V)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dB μ V/m)	Pk Lim: FCC_pt15_109_ClassB_Peak (dB μ V/m)	Peak (dB)	Peak Margin (dB)	Peak Test Results (Pass/Fail)	Worst Peak Margin (dB)	Adjusted Avg Amplitude (dB μ V/m)	Av Lim: FCC_pt15_109_Cl assB_AVG (dB μ V/m)	Avg Margin (dB)	Avg Test Results (Pass/Fail)	Worst Avg Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
7206.7	46.2	35	7.9	54.1	83.5	-29.4	PASS		42.9	63.5	-20.6	PASS			147	1
17948.4	39.7	30.8	20.8	60.5	83.5	-23	PASS	-23	51.6	63.5	-11.9	PASS	-11.9		175	242

6-18GHz Low Channel



Bureau Veritas Consumer Products Services Inc.
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



Curtis Straus - a Bureau Veritas Company Radiated Emissions Electric Field 1m Distance 6-18GHz Vertical Data Operator: ZJ Notes: Mid Channel							Work Order - S2579 EUT Power Input - 5V DC Test Site - CH-2 Conditions - 22.2°C; 42%RH; 1004mBar EUT Maximum Frequency - 2480MHz						
---	--	--	--	--	--	--	--	--	--	--	--	--	--

Data Taken at 03:29:02 PM, Monday, September 24, 2018

Frequency (MHz)	Raw Peak Reading (dB μ V)	Raw Avg Reading (dB μ V)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dB μ V/m)	Pk Lim: FCC_pt15_109_ClassB_Peak (dB μ V/m)	Peak Margin (dB)	Peak Results (Pass/Fail)	Worst Peak Margin (dB)	Adjusted Avg Amplitude (dB μ V/m)	Av Lim: FCC_pt15_109_ClassB_AVG (dB μ V/m)	Avg Margin (dB)	Avg Results (Pass/Fail)	Worst Avg Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
7320.8	44	31.6	8	52	83.5	-31.5	PASS		39.6	63.5	-23.9	PASS		100	25
17673.9	39.9	30.7	20.2	60.1	83.5	-23.4	PASS	-23.4	50.8	63.5	-12.7	PASS	-12.7	124	140

Curtis Straus - a Bureau Veritas Company Radiated Emissions Electric Field 1m Distance 6-18GHz Horizontal Data Operator: ZJ Notes: Mid Channel							Work Order - S2579 EUT Power Input - 5V DC Test Site - CH-2 Conditions - 22.2°C; 42%RH; 1004mBar EUT Maximum Frequency - 2480MHz						
---	--	--	--	--	--	--	--	--	--	--	--	--	--

Data Taken at 03:29:02 PM, Monday, September 24, 2018

Frequency (MHz)	Raw Peak Reading (dB μ V)	Raw Avg Reading (dB μ V)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dB μ V/m)	Pk Lim: FCC_pt15_109_Cla_ssB_Peak (dB μ V/m)	Peak Margin (dB)	Peak Test Results (Pass/Fail)	Worst Peak Margin (dB)	Adjusted Avg Amplitude (dB μ V/m)	Av Lim: FCC_pt15_109_Cla_ssB_AVG (dB μ V/m)	Avg Margin (dB)	Avg Test Results (Pass/Fail)	Worst Avg Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
7320.9	45.5	36	8	53.6	83.5	-29.9	PASS		44.1	63.5	-19.4	PASS		162	0
17984.2	40.1	30.3	21.3	61.4	83.5	-22.1	PASS	-22.1	51.6	63.5	-11.9	PASS	-11.9	125	270

6-18GHz Mid Channel

Curtis Straus - a Bureau Veritas Company Radiated Emissions Electric Field 1m Distance 6-18GHz Vertical Data Operator: ZJ Notes: High Channel							Work Order - S2579 EUT Power Input - 5V DC Test Site - CH-2 Conditions - 22.2°C; 42%RH; 1004mBar EUT Maximum Frequency - 2480MHz						
--	--	--	--	--	--	--	--	--	--	--	--	--	--

Data Taken at 04:46:22 PM, Monday, September 24, 2018

Frequency (MHz)	Raw Peak Reading (dB μ V)	Raw Avg Reading (dB μ V)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dB μ V/m)	Pk Lim: FCC_pt15_109_Cla_ssB_Peak (dB μ V/m)	Peak Margin (dB)	Peak Results (Pass/Fail)	Worst Peak Margin (dB)	Adjusted Avg Amplitude (dB μ V/m)	Av Lim: FCC_pt15_109_Cla_ssB_AVG (dB μ V/m)	Avg Margin (dB)	Avg Results (Pass/Fail)	Worst Avg Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
7439.1	45	34.9	8	53	83.5	-30.5	PASS		43	63.5	-20.5	PASS		100	25
16481	40.2	31.4	18.2	58.4	83.5	-25.1	PASS		49.6	63.5	-13.9	PASS		100	73
17072.4	40.4	32	19.1	59.5	83.5	-24	PASS	-24	51.1	63.5	-12.4	PASS	-12.4	100	0

Curtis Straus - a Bureau Veritas Company Radiated Emissions Electric Field 1m Distance 6-18GHz Horizontal Data Operator: ZJ Notes: High Channel							Work Order - S2579 EUT Power Input - 5V DC Test Site - CH-2 Conditions - 22.2°C; 42%RH; 1004mBar EUT Maximum Frequency - 2480MHz						
--	--	--	--	--	--	--	--	--	--	--	--	--	--

Data Taken at 04:46:22 PM, Monday, September 24, 2018

Frequency (MHz)	Raw Peak Reading (dB μ V)	Raw Avg Reading (dB μ V)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dB μ V/m)	Pk Lim: FCC_pt15_109_Cla_ssB_Peak (dB μ V/m)	Peak Margin (dB)	Peak Test Results (Pass/Fail)	Worst Peak Margin (dB)	Adjusted Avg Amplitude (dB μ V/m)	Av Lim: FCC_pt15_109_Cla_ssB_AVG (dB μ V/m)	Avg Margin (dB)	Avg Test Results (Pass/Fail)	Worst Avg Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
7440.6	49.4	39.7	8	57.4	83.5	-26.1	PASS		47.7	63.5	-15.8	PASS		163	174
17947.5	39.7	30.7	20.8	60.5	83.5	-23	PASS	-23	51.5	63.5	-12	PASS	-12	167	190

6-18GHz High Channel



Bureau Veritas Consumer Products Services Inc.
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



Rev. 9/19/2018

Spectrum Analyzers / Receivers/Preselectors		Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
2093 MXE EMI Receiver		20Hz-26.5GHz	N9038A	Agilent	MY51210181	2093	I	11/16/2018	11/16/2017
Radiated Emissions Sites		FCC Code	IC Code	VCCI Code	Range	Asset	Cat	Calibration Due	Calibrated on
EMI Chamber 2		719150	2762A-7	A-0015	1-18GHz	1686	I	12/21/2018	12/21/2016
Preamps /Couplers Attenuators / Filters		Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
2111 HF Preamp	0.5-18GHz	PAM-118A	COM-POWER	551063	2111	II	11/19/2018	11/19/2017	
2116 BRF	0.009-18000MHz	BRM50702	Micro-Tronics	G226	2116	II	11/8/2018	11/8/2017	
Antennas	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
Blue Horn	1-18Ghz	3117	ETS	157647	1861	I	2/14/2019	2/14/2017	
Meteorological Meters/Chambers		MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
Weather Clock (Pressure Only)		BA928	Oregon Scientific	C3166-1	831	I	5/15/2020	5/15/2018	
TH A#2080		HTC-1	HDE		2080	II	3/22/2019	3/22/2018	
Cables	Range		Mfr			Cat	Calibration Due	Calibrated on	
Asset #2051	9kHz - 18GHz		Florida RF			II	3/7/2019	3/7/2018	
Asset #2054	9kHz - 18GHz		Florida RF			II	10/31/2018	10/31/2017	
Asset #2467	9KHz-18GHz		MegaPhase			II	10/29/2018	10/29/2017	

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.

Radiated Emissions Table

Date: 24-Sep-18	Company: Dermal Photonics	Work Order: S2579													
Engineer: Zachary Johnson	EUT Desc: NIRA	EUT Operating Voltage/Frequency: 5V DC													
Temp: 22.2°C	Humidity: 42%	Pressure: 1004mBar													
Frequency Range: 18-26.5GHz		Measurement Distance: 0.1 m													
Notes: Tested high, mid, and low channels		EUT Max Freq: 2480MHz													
Antenna Polarization (H / V)	Frequency (MHz)	Peak Reading (dB μ V)	Average Reading (dB μ V)	Preamp Factor (dB/m)	Antenna Factor (dB)	Cable Factor (dB)	Adjusted Peak Reading (dB μ V/m)	Adjusted Avg Reading (dB μ V/m)	FCC Class B High Frequency - Peak	FCC Class B High Frequency - Average					
H / V	No Emissions Found	---	---	---	---	---	---	---	Limit (dB μ V/m)	Margin (dB)	Result (Pass/Fail)	Limit (dB μ V/m)	Margin (dB)	Result (Pass/Fail)	
Table Result: Pass			by	---		dB			Worst Freq: --- MHz						
Test Site: EMI Chamber 2		Cable 1: Asset #2324		Cable 2: ---		Cable 3: ---		Antenna: 18-26.5GHz Horn		Preselector: ---				Copyright Curtis-Straus LLC 2000	
Analyzer: 1860 SA			Preamp: 18-26.5GHz												
CSsoft Radiated Emissions Calculator v 1.017.207															
Adjusted Reading = Reading - Preamp Factor + Antenna Factor + Cable Factor															

18-26.5GHz All Channels

Rev. 9/19/2018

Spectrum Analyzers / Receivers/Preselectors		Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
SA #2 (1860)		9kHz-26.5 GHz	E7405A	Agilent	MY45104916	1860	I	3/15/2019	3/15/2018
Preamps/Couplers Attenuators / Filters		Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
HF (Yellow)	18-26.5GHz	AFS4-18002650-60-8P-4	CS	467559	1266	II	10/16/2018	10/16/2017	
Antennas	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
HF (White) Horn	18-26.5GHz	801-WLM	Waveline	758	758	III	Verify before Use	date of test	
Meteorological Meters/Chambers		MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
Weather Clock (Pressure Only)		BA928	Oregon Scientific	C3166-1	831	I	5/15/2020	5/15/2018	
TH A#2080		HTC-1	HDE		2080	II	3/22/2019	3/22/2018	
Cables	Range		Mfr			Cat	Calibration Due	Calibrated on	
Asset #2324	1-26.5GHz	TM26-S1S1-120	MEGAPHASE	17139101 001	2324	II	8/9/2019	8/9/2018	

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.



Bureau Veritas Consumer Products Services Inc.
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



Radiated Band Edge

Radiated Emissions Table										Work Order: T0720							
Date: 05-Apr-19 Engineer: Chris Hamel Temp: 22.2					Humidity: 19% Pressure: 1012mBar					EUT Operating Voltage/Frequency: Battery							
Frequency Range: 2310-2500MHz										Measurement Distance: 3 m							
Notes: BLE Band edges										EUT Max Freq:							
Antenna Polarization (H / V)			Frequency (MHz)	Peak Reading (dB _{UV})	Average Reading (dB _{UV})	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Peak Reading (dB _{UV/m})	Adjusted Avg Reading (dB _{UV/m})	FCC Class B High Frequency - Peak		FCC Class B High Frequency - Average				
Low			2390.0	23.7	5.1	0.0	32.2	2.8	58.7	40.1	74.0	-15.3	Pass	54.0	-13.9	Pass	
V			2388.0	22.2	5.0	0.0	32.2	2.8	57.2	40.0	74.0	-16.8	Pass	54.0	-14.0	Pass	
High																	
V			2483.5	32.2	7.8	0.0	32.4	2.7	67.3	42.9	74.0	-6.7	Pass	54.0	-11.1	Pass	
V			2483.8	32.6	7.9	0.0	32.4	2.7	67.7	43.0	74.0	-6.3	Pass	54.0	-11.0	Pass	
V			2484.3	31.5	7.6	0.0	32.4	2.7	66.6	42.7	74.0	-7.4	Pass	54.0	-11.3	Pass	
V			2487.4	27.3	7.2	0.0	32.4	2.7	62.4	42.3	74.0	-11.6	Pass	54.0	-11.7	Pass	
V			2490.1	24.6	6.7	0.0	32.4	2.7	59.7	41.8	74.0	-14.3	Pass	54.0	-12.2	Pass	
Table Result:			Pass by -6.3 dB						Worst Freq: 2483.8 MHz								
Test Site: EMI Chamber 2			Cable 1: Asset #2465			Cable 2: Asset #2480			Cable 3: ...								
Analyzer: Rental SA#2			Preamp: None			Antenna: Blue Horn			Preselector: ...								
CSsoft Radiated Emissions Calculator v1.017.214									Copyright Curtis-Straus LLC 2000								
Adjusted Reading = Reading - Preamp Factor + Antenna Factor + Cable Factor																	

Rev. 4/2/2019									
Spectrum Analyzers / Receivers /Preselectors			Range	MN	Mfr	SN	Asset	Cat	Calibration Due
2093 MXE EMI Receiver			20Hz-26.5GHz	N9038A	Agilent	MY51210181	2093	I	11/21/2019
Radiated Emissions Sites			FCC Code	IC Code	VCCI Code	Range	Asset	Cat	Calibration Due
EMI Chamber 2			719150	2762A-7	A-0015	1-18GHz	1686	I	12/7/2020
Antennas			Range	MN	Mfr	SN	Asset	Cat	Calibration Due
Blue Horn			1-18Ghz	3117	ETS	157647	1861	I	3/9/2021
Meteorological Meters/Chambers			MN	Mfr	SN	Asset	Cat	Calibration Due	
Weather Clock (Pressure Only)			BA928	Oregon Scientific	C3166-1	831	I	5/15/2020	
TH A#2084			HTC-1	HDE		2084	II	4/23/2019	
Cables			Range	Mfr			Cat	Calibration Due	
Asset #2465			9KHz-18GHz	MegaPhase			II	10/31/2019	
Asset #2480			9KHz-18GHz	MegaPhase			II	10/29/2019	

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.



Bureau Veritas Consumer Products Services Inc.
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 15 of 32

Testing Cert. No. 1627-01

AC Line Conducted Emissions

LIMITS

Frequency of emission (MHz)	Quasi-peak limit (dB μ V)	Average limit (dB μ V)
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

[47 CFR 15.207(a)]

MEASUREMENTS / RESULTS

N/A, EUT is battery powered only. EUT cannot transmit during charging; therefore AC line conducted emissions requirements are not applicable.

.



Bureau Veritas Consumer Products Services Inc.
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 16 of 32

Measurement Uncertainty

The listed uncertainties are the worst case uncertainty for the entire range of measurement. Please note that the uncertainty values are provided for informational purposes only and are not used in determining the PASS/FAIL results.

Measurement	Expanded Uncertainty k=2	Maximum allowable uncertainty
Radiated Emissions (30-1000MHz) NIST CISPR	5.6dB 4.6dB	N/A 5.2dB (Ucispr)
Radiated Emissions (1-26.5GHz)	4.6dB	N/A
Radiated Emissions (above 26.5GHz)	4.9dB	N/A
Magnetic Radiated Emissions	5.6dB	N/A
Conducted Emissions NIST CISPR	3.9dB 3.6dB	N/A 3.6dB (Ucispr)
Telco Conducted Emissions (Current)	2.9dB	N/A
Telco Conducted Emissions (Voltage)	4.4dB	N/A
Electrostatic Discharge	11.5%	N/A
Radiated RF Immunity (Uniform Field)	1.6dB	N/A
Electrical Fast Transients	23.1%	N/A
Surge	23.1%	N/A
Conducted RF Immunity	3dB	N/A
Magnetic Immunity	12.8%	N/A
Dips and Interrupts	2.3V	N/A
Harmonics	3.5%	N/A
Flicker	3.5%	N/A
Radio frequency (@ 2.4GHz)	3.23×10^{-8}	1×10^{-7}
RF power, conducted	0.40dB	0.75dB
Maximum frequency deviation:		
• Within 300Hz and 6kHz of audio frequency / Within 6kHz and 25kHz of audio frequency	3.4% 0.3dB	5% 3dB
Adjacent channel power	1.9dB	3dB
Conducted spurious emission of transmitter, valid up to 12.75GHz	2.39dB	3dB
Conducted emission of receivers	1.3dB	3dB
Radiated emission of transmitter, valid up to 26.5GHz	3.9dB	6dB
Radiated emission of transmitter, valid up to 80GHz	3.3dB	6dB
Radiated emission of receiver, valid up to 26.5GHz	3.9dB	6dB
Radiated emission of receiver, valid up to 80GHz	3.3dB	6dB
Humidity	2.37%	5%
Temperature	0.7°C	1.0°C
Time	4.1%	10%
RF Power Density, Conducted	0.4dB	3dB
DC and low frequency voltages	1.3%	3%
Voltage (AC, <10kHz)	1.3%	2%
Voltage (DC)	0.62%	1%
The above reflects a 95% confidence level		



Conditions Of Testing

[Bureau Veritas Consumer Products Services, Inc., a Massachusetts corporation], and/or its affiliates (collectively, the "Company") will conduct, at the request of the Submitter ("Client"), the tests specified on the submitted Test Request Form or equivalent in accordance with, and subject to, the following terms and conditions (collectively, "Conditions"):

1. All orders for tests are subject to acceptance by the Company, and no order will constitute a binding commitment of the Company unless and until such order is accepted by it, as evidenced by the issuance of a written report ("Test Report") by the Company. The Test Report is issued solely by the Company, is intended for the exclusive use of Client and shall not be published, used for advertising purposes, copied or replicated for distribution to any other person or entity or otherwise publicly disclosed without the prior written consent of the Company. By submitting a request for services to the Company, Client consents to the disclosure to accreditation bodies of those records of Client relevant to the accreditation body's assessment of the Company's competence and compliance with relevant accreditation criteria. The Company shall not be liable for any loss or damage whatsoever resulting from the failure of the Company to provide its services within any time period for completion estimated by the Company. If Client anticipates using the Test Report in any legal proceeding, arbitration, dispute resolution forum or other proceeding, it shall so notify the Company prior to submitting the Test Report in such proceeding. The Company has no obligation to provide a fact or expert witness at such proceeding unless the Company agrees in advance to do so for a separate and additional fee.
2. The Test Report will set forth the findings of the Company solely with respect to the test samples identified therein. Unless specifically and expressly indicated in the Test Report, the results set forth in such Test Report are not intended to be indicative or representative of the quality or characteristics of the lot from which a test sample is taken, and Client shall not rely upon the Test Report as being so indicative or representative of the lot or of the tested product in general. The Test Report will reflect the findings of the Company at the time of testing only, and the Company shall have no obligation to update the Test Report after its issuance. The Test Report will set forth the results of the tests performed by the Company based upon the written information provided to the Company. The Test Report will be based solely on the samples and written information submitted to the Company by Client, and the Company shall not be obligated to conduct any independent investigation or inquiry with respect thereto.
3. The Company may, in its sole discretion, destroy samples which have been furnished to the Company for testing and which have not been destroyed in the course of testing. The Company may delegate the performance of all or a portion of the services contemplated hereunder to an affiliate, agent or subcontractor of the Company, and Client consents to such delegation.
4. These Conditions and the Test Report represent the entire understanding of the parties hereto with respect to the subject matter hereof and of the Test Report, and no modification, variance or extrapolation with respect thereto shall be permitted without the prior written consent of the Company.
5. The names, service marks, trademarks and copyrights of the Company and its affiliates, including the names "**BUREAU VERITAS**," "**BUREAU VERITAS CONSUMER PRODUCTS SERVICES**," "**BVCPs**," "**MTL**," "**ACTS**," "**MTL-ACTS**" and **Bureau Veritas Consumer Products Services Inc.** (collectively, the "Marks") are and shall remain the sole property of the Company or its affiliates and shall not be used by Client except solely to the extent that Client obtains the prior written approval of the Company and then only in the manner prescribed by the Company. Client shall not contest the validity of the Marks or take any action that might impair the value or goodwill associated with the Marks or the image or reputation of the Company or its affiliates.
6. Payment in full shall be due 30 days after the date of invoice. Interest shall be due on overdue amounts from the due date until paid at an interest rate of 1.5% per month or, if less, the maximum rate permitted by law. The Company reserves the right, at any time and from time to time, to revoke any credit extended to Client. Client shall reimburse the Company for any costs it incurs in collecting past due amounts, including court costs and fees and expenses of attorneys and collection agencies. The Test Report may not be used or relied upon by Client if and for so long as Client fails to pay when due any invoice issued by the Company or any affiliate of it to Client or any affiliate or subsidiary of Client together with interest and penalties, if any, accrued thereon.
7. The Company disclaims any and all responsibility or liability arising out of or in connection with e-mail transmissions of such information.
8. Client understands and agrees that the Company is neither an insurer nor a guarantor, that the Company does not take the place of Client or any designer, manufacturer, agent, buyer, distributor or transportation or shipping company, and that the Company disclaims all liability in such capacities. Client further understands that if it seeks assurance against loss or damage, it should obtain appropriate insurance.
9. Client agrees that the Company, by providing the services, does not take the place of Client nor any third party, nor does the Company release them from any of their obligations, nor does the Company otherwise assume, abridge, abrogate or undertake to discharge any duty of any third party to Client or any duty of Client or any third party to any other third party, and Client will not release any third party from its obligations and duties with respect to the tested goods.
10. Client shall, on a timely basis, (a) provide adequate instructions to the Company in order to enable the Company to perform properly its services, (b) provide, or cause Client's suppliers and contractors to provide, the Company with all documents necessary to enable the Company to perform its services, (c) furnish the Company with all relevant information regarding Client's intended use and purposes of the tested goods, (d) advise the Company of essential dates and deadlines relevant to the tested goods and (e) fully exercise all rights and remedies available to Client against third parties in respect of the tested goods.
11. The Company shall undertake due care and ordinary skill in the performance of its services to Client, and the Company shall accept responsibility only were such skill has not been exercised and, even in such event, only to the extent of the limitation of liability set forth herein.
12. If Client desires to assert a claim arising from or relating to (i) the performance, purported performance or non-performance of any services by the Company or (ii) the sale, resale, manufacture, distribution or use of any tested goods, it must submit that claim to the Company in a writing that sets forth with particularity the basis for such claim within 60 days from discovery of the potential claim and not more than six months after the date of issuance of the Test Report to Client. Client waives any and all such claims including, without limitation, claims that the Test Report is inaccurate, incomplete or misleading or that additional or different testing is required, unless and then only to the extent that Client submits a written claim to the Company within both such time periods.
13. CLIENT SHALL, EXCEPT TO THE EXTENT OF COMPANY'S LIABILITY TO CLIENT HEREUNDER (WHICH IN NO EVENT SHALL EXCEED THE LIMITATION OF LIABILITY HEREIN), HOLD HARMLESS AND INDEMNIFY THE COMPANY, ITS AFFILIATES AND THEIR RESPECTIVE DIRECTORS, OFFICERS, EMPLOYEES, AGENTS AND SUBCONTRACTORS AGAINST ALL ACTUAL OR ALLEGED THIRD PARTY CLAIMS FOR LOSS, DAMAGE OR EXPENSE OF WHATSOEVER NATURE AND HOWSOEVER ARISING FROM OR RELATING TO (i) THE PERFORMANCE, PURPORTED PERFORMANCE OR NON-PERFORMANCE OF ANY SERVICES BY THE COMPANY OR (ii) THE SALE, RESALE, MANUFACTURE, DISTRIBUTION OR USE OF ANY TESTED GOODS.
14. EXCEPT AS MAY OTHERWISE BE EXPRESSLY AGREED TO IN WRITING BY THE COMPANY AND NOTWITHSTANDING ANY PROVISION TO THE CONTRARY CONTAINED HEREIN OR IN ANY TEST REPORT, NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR USE, IS MADE.



Bureau Veritas Consumer Products Services Inc.
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 18 of 32

Testing Cert. No. 1627-01

15. (A) IN NO EVENT WHATSOEVER SHALL THE COMPANY BE LIABLE FOR ANY CONSEQUENTIAL, SPECIAL, INCIDENTAL, EXEMPLARY OR PUNITIVE DAMAGES IN CONNECTION WITH, RELATING TO OR ARISING OUT OF THE TEST REPORT OR THE SERVICES PROVIDED BY THE COMPANY HEREUNDER, INCLUDING WITHOUT LIMITATION LOSS OF OR DAMAGE TO PROPERTY; LOSS OF INCOME, PROFIT OR USE; OR ANY CLAIMS OR DEMANDS MADE AGAINST CLIENT OR ANY OTHER PERSON BY ANY THIRD PARTY IN CONNECTION WITH, RELATING TO OR ARISING OUT OF THE SERVICES PROVIDED BY THE COMPANY HEREUNDER.

(B) NOTWITHSTANDING ANY PROVISION TO THE CONTRARY CONTAINED HEREIN, AND INrecognition of the relative risks and benefits to Client and the Company associated with the testing services contemplated hereby, the risks have been allocated such that under no circumstances whatsoever shall the liability of the Company to Client or any third party in respect of any claim for loss, damage or expense, of whatsoever nature or magnitude, and howsoever arising, exceed an amount equal to five (5) times the amount of the fees paid to the Company for the specific services which gave rise to such claim or U.S.\$10,000, whichever is the lesser amount.

16. The Company shall not be liable for any loss or damage resulting from any delay or failure in performance of its obligations hereunder resulting directly or indirectly from any event of force majeure or any event outside the control of the Company. If any such event occurs, the Company may immediately cancel or suspend its performance hereunder without incurring any liability whatsoever to Client.

17. Company's services, including these Conditions, shall be governed by, and construed in accordance with, the local laws of the country where the Company performs the tests or, in the case of tests performed in the United States of America, the laws of Massachusetts without regard to conflicts of laws principles. If any aspect(s) of these Conditions is found to be illegal or unenforceable, the validity, legality and enforceability of all remaining aspects of these Conditions shall not in any way be affected or impaired thereby. Any proceeding related to the subject matter hereof shall be brought, if at all, in the courts of the country where the Company performs the tests or, in the case of tests performed in the United States of America, in the courts of Massachusetts. Client waives the right to interpose any counterclaim or setoffs of any nature in any litigation arising hereunder.

The complete list of the Approved Subcontractors Bureau Veritas Consumer Products Services Inc. may use to delegate the performance of work can be provided upon request.

Rev.160009121(2) #684340 v14CS



Bureau Veritas Consumer Products Services Inc.
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 19 of 32

Appendix A**CFR Title 47 FCC Part §15.247 and ISED Canada RSS-247 Issue 2****DUT Information**

Product Name: NIRA Laser
 Model Number: Model: 104-001
 Manufacturer: Dermal Photonics
 Serial Number: 01

40 channels are provided for BLE mode:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

Notes: Channels indicated above in bold were selected as representative test channels.

Modulation	Data Rate
GFSK	1Mbps

Antenna type	PCB Trace
Antenna gain	1.6dBi
Number of transmit chains	1
Equipment type	Digital Transmission System



Test Equipment Used

Rev. 04/10/2019									
Spectrum Analyzers / Receivers / Preselectors	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
FSV40 Signal/Spectrum Analyzer	10Hz-40GHz	FSV40	ROHDE & SCHWARZ	101551	2200	I	10/1/2019	10/1/2018	
Signal Generators/Comparaison Noise Emitter	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
SMBV100A Vector Signal Generator	9kHz-6GHz	SMBV100A	ROHDE & SCHWARZ	261919	2201	I	10/1/2019	10/1/2018	
SMB100A Signal Generator	100kHz-40GHz	SMB100A	ROHDE & SCHWARZ	179884	2557	I	10/1/2019	10/1/2018	
Power/Noise Meters	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on		
OSP - open switch and control platform	30MHz-18GHz	OSP-B157W8	ROHDE & SCHWARZ	1527.1144.02-100955-Ck	2558	I	3/14/2020	3/14/2019	
Cables	Range		Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
DUT1	30MHz-40GHz		Micro-Coax	UFB142A-1-0787-200200	2593	I	3/13/2020	3/13/2019	
DUT2	30MHz-40GHz		Micro-Coax	UFB142A-1-0787-200200	2594	I	3/13/2020	3/13/2019	
DUT3	30MHz-40GHz		Micro-Coax	UFB142A-1-0787-200200	2595	I	3/13/2020	3/13/2019	
DUT4	30MHz-40GHz		Micro-Coax	UFB142A-1-0787-200200	2596	I	3/13/2020	3/13/2019	
Attenuators / Couplers	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
10dB Attenuator-01 Brown	30MHz-18GHz		Mini Circuits	BW-S10W2+		I	3/13/2020	3/13/2019	
10dB Attenuator-02 Yellow	30MHz-18GHz		Mini Circuits	BW-S10W2+		I	3/13/2020	3/13/2019	
10dB Attenuator-03 Red	30MHz-18GHz		Mini Circuits	BW-S10W2+		I	3/13/2020	3/13/2019	
10dB Attenuator-04 orange	30MHz-18GHz		Mini Circuits	BW-S10W2+		I	3/13/2020	3/13/2019	
API - 30dB 20W Attenuator	9kHz-40GHz	89-30-11	API Weinschel	703	2121	II	3/23/2020	3/23/2019	
Directional Coupler	0.5GHz-18GHz	UDC	AA MCS	001040	2434	I	8/8/2019	8/9/2018	
Communication Tester	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
CMW270 Wideband Radio Communication Tester	DC to 6GHz	CMW270	ROHDE & SCHWARZ	1201.0002K75-101066-MV	2559	I	2/14/2020	2/14/2019	
Meteorological Meters/Chambers		MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
Temp/Humidity Chamber #18		EPX-2H	Espec	137664	1645	I	1/2/2020	1/2/2019	
Weather Clock (Pressure only)		BA928	Oregon Scientific	C3166-1	831	I	5/15/2020	5/15/2018	
TH A#2086		HTC-1	HDE		2086	II	3/23/2020	3/23/2019	

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.

Rohde&Schwarz Test System TS8997

Test Equipment	Manufacturer	Model Number	Serial Number	Firmware Version	Software Version
Spectrum Analyzer	Rohde&Schwarz	FSV40	101551	3.40	N/A
Signal Generator	Rohde&Schwarz	SMB100A	179884	3.20.390.24 / Drv:Rev 2.21.0, 07/2016, CVI 2015	N/A
Vector Signal Generator	Rohde&Schwarz	SMBV100A	261919	3.1.19.15 - 3.50.082.47	N/A
Switching Platform	Rohde&Schwarz	OSP-B157W	1527.1144	1.23.0.2	N/A
Wireless Connectivity Tester	Rohde&Schwarz	CMW270	101066	3.7	N/A
Test Software	Rohde&Schwarz	WMS32	N/A	N/A	V10.50.00



Bureau Veritas Consumer Products Services Inc.
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 21 of 32



Summary

Test	Frequency (MHz)	Result
Average Output Power	2402 / 2440 / 2480	PASS
Peak Power Spectral Density	2402 / 2440 / 2480	PASS
DTS Bandwidth (6dB)	2402 / 2440 / 2480	PASS
Occupied Channel Bandwidth 99%	2402 / 2440 / 2480	PASS
Conducted Band Edges	2402 / 2440 / 2480	PASS
Conducted Spurious Emissions	2402 / 2440 / 2480	PASS

Average Output Power

Test procedure in accordance with ANSI C63.10-2013 Section 11.9.2.3.2 Method AVGPM-G.

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.

Expanded Combined Uncertainty of absolute Level Measurement (K=2) < 1 dB


Channel	Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)
0	2402	1.977	30
19	2440	1.732	30
39	2480	1.691	30



Peak Power Spectral Density

Test procedure in accordance with ANSI C63.10-2013 Section 11.10.2 Method PKPSD.

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1. Expanded Uncertainty (K=2) < 1.3 dB.

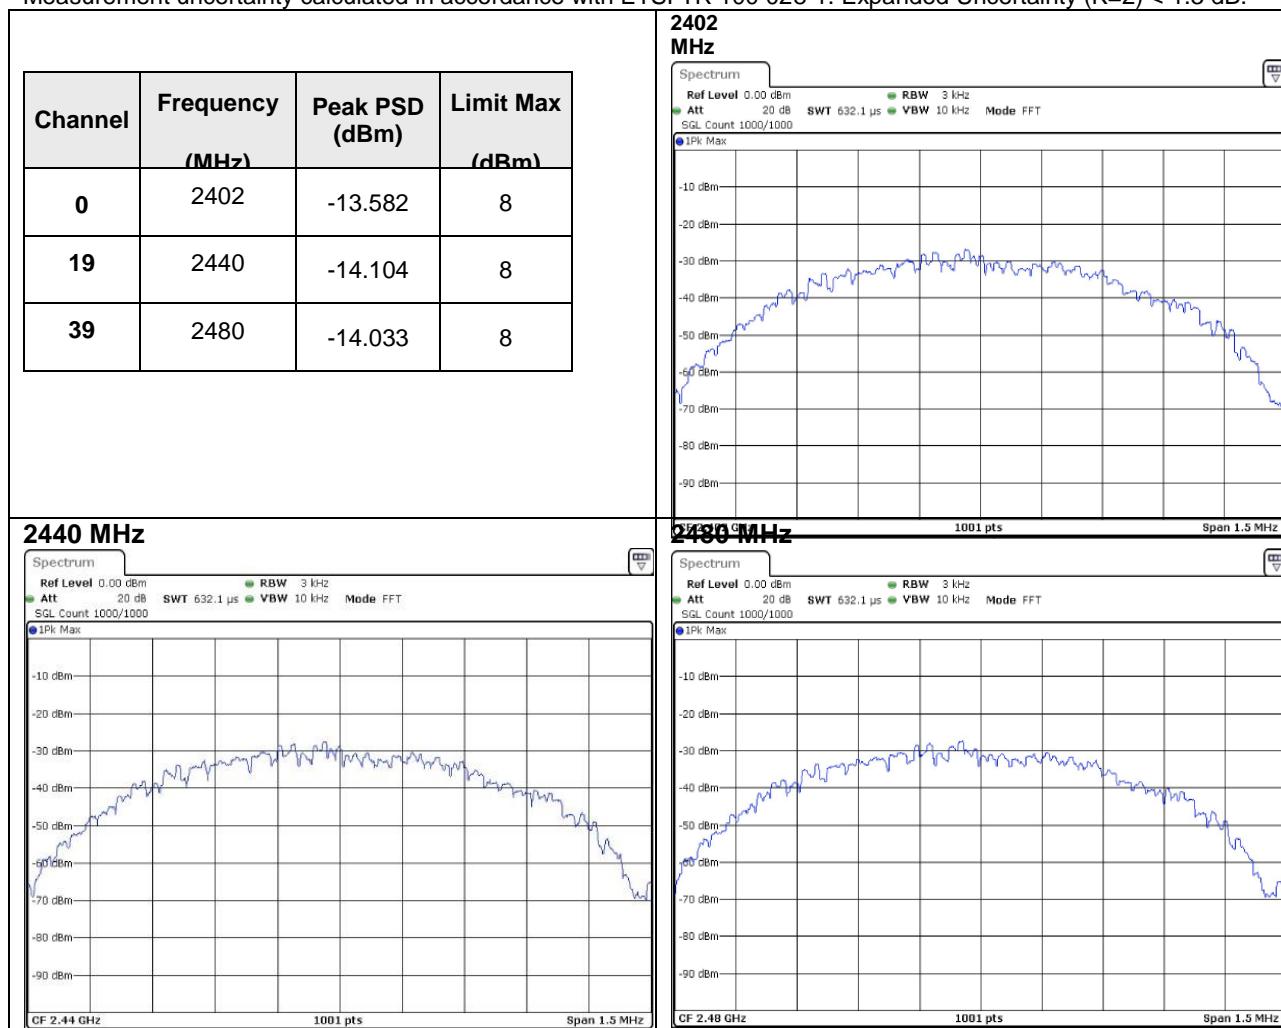



DTS Bandwidth (6dB)

Test procedure in accordance with ANSI C63.10-2013 Section 11.8.

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1. Expanded Uncertainty (K=2) < 2%

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
0	2402	0.752476	> 0.5	Pass
19	2440	0.752476	> 0.5	Pass
39	2480	0.772278	> 0.5	Pass

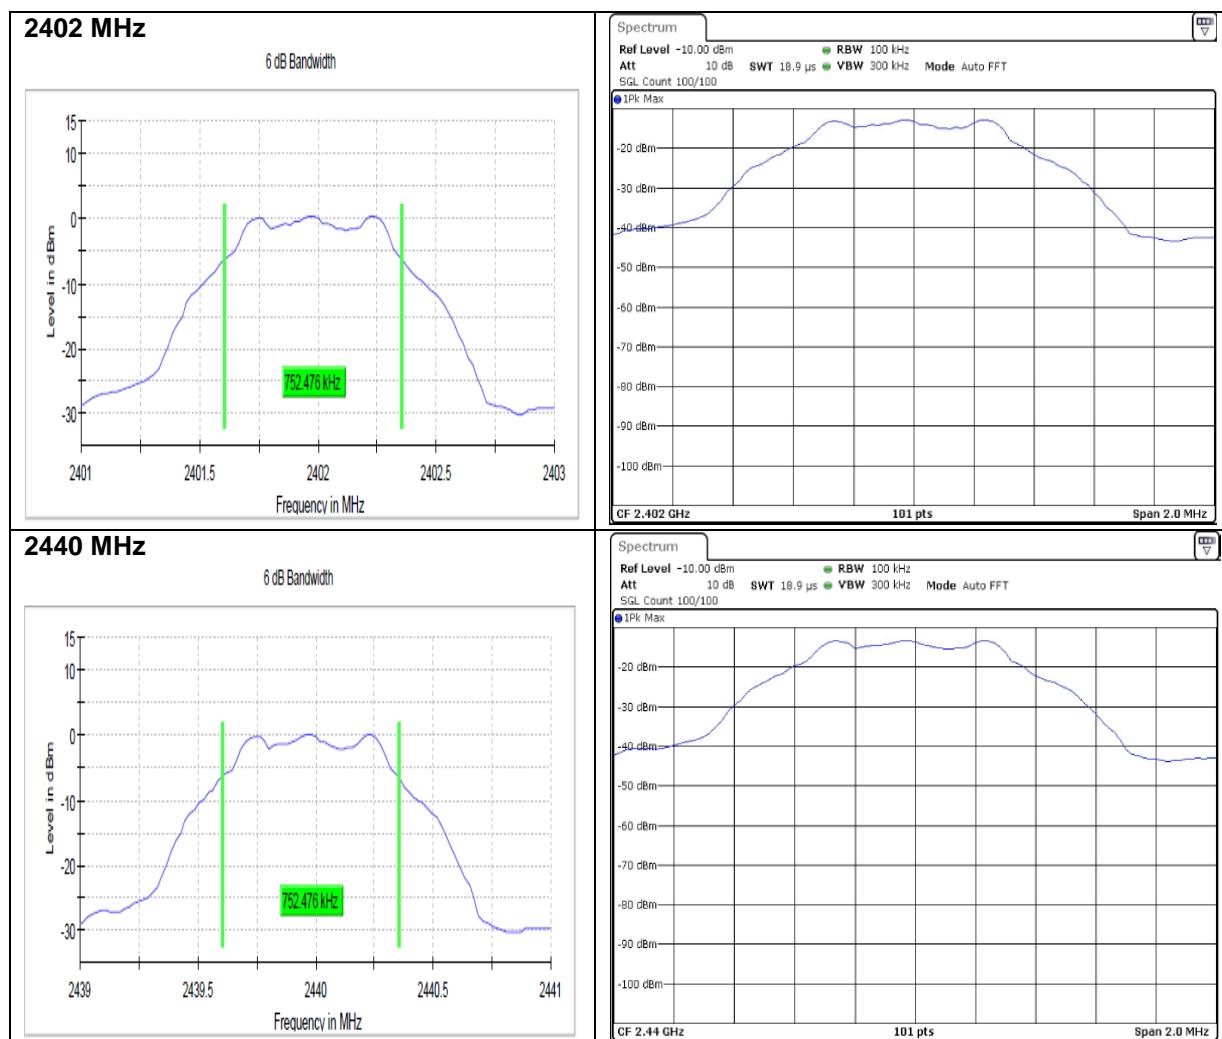

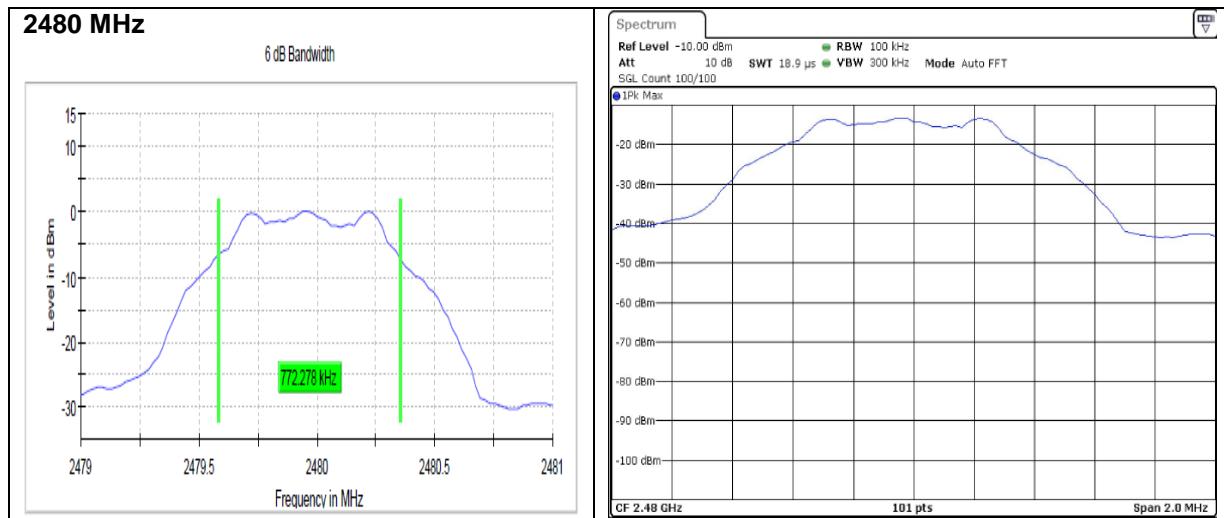

Bureau Veritas Consumer Products Services Inc.
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 25 of 32


Testing Cert. No. 1627-01

Occupied Channel Bandwidth 99%

Test procedure in accordance with RSS-Gen Issue 5 Section 6.7.


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1. Expanded Uncertainty (K=2) < 2%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
0	2402	1.050
19	2440	1.050
39	2480	1.050

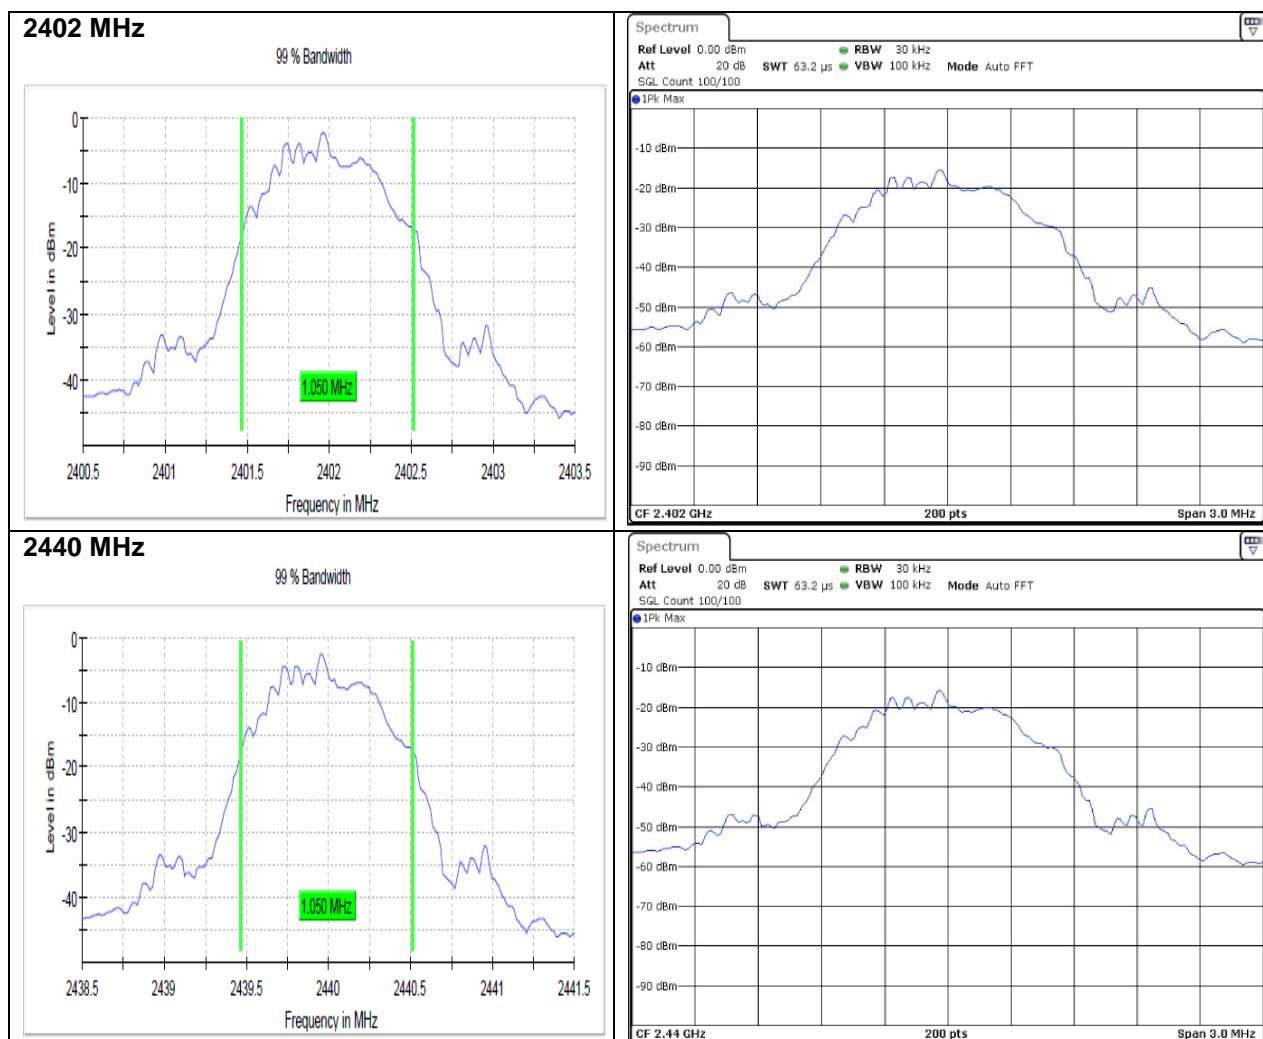

2480 MHz

99 % Bandwidth

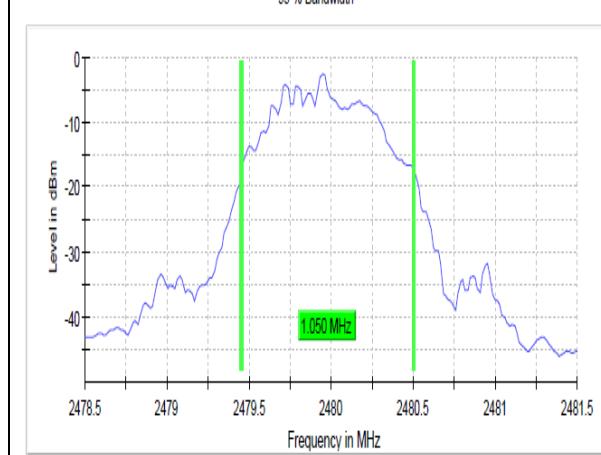

Bureau Veritas Consumer Products Services Inc.
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828




page 27 of 32

Conducted Band Edge Low

Test procedure in accordance with ANSI C63.10-2013 Section 11.11.


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1. Expanded Uncertainty (K=2) < 0.8 dB

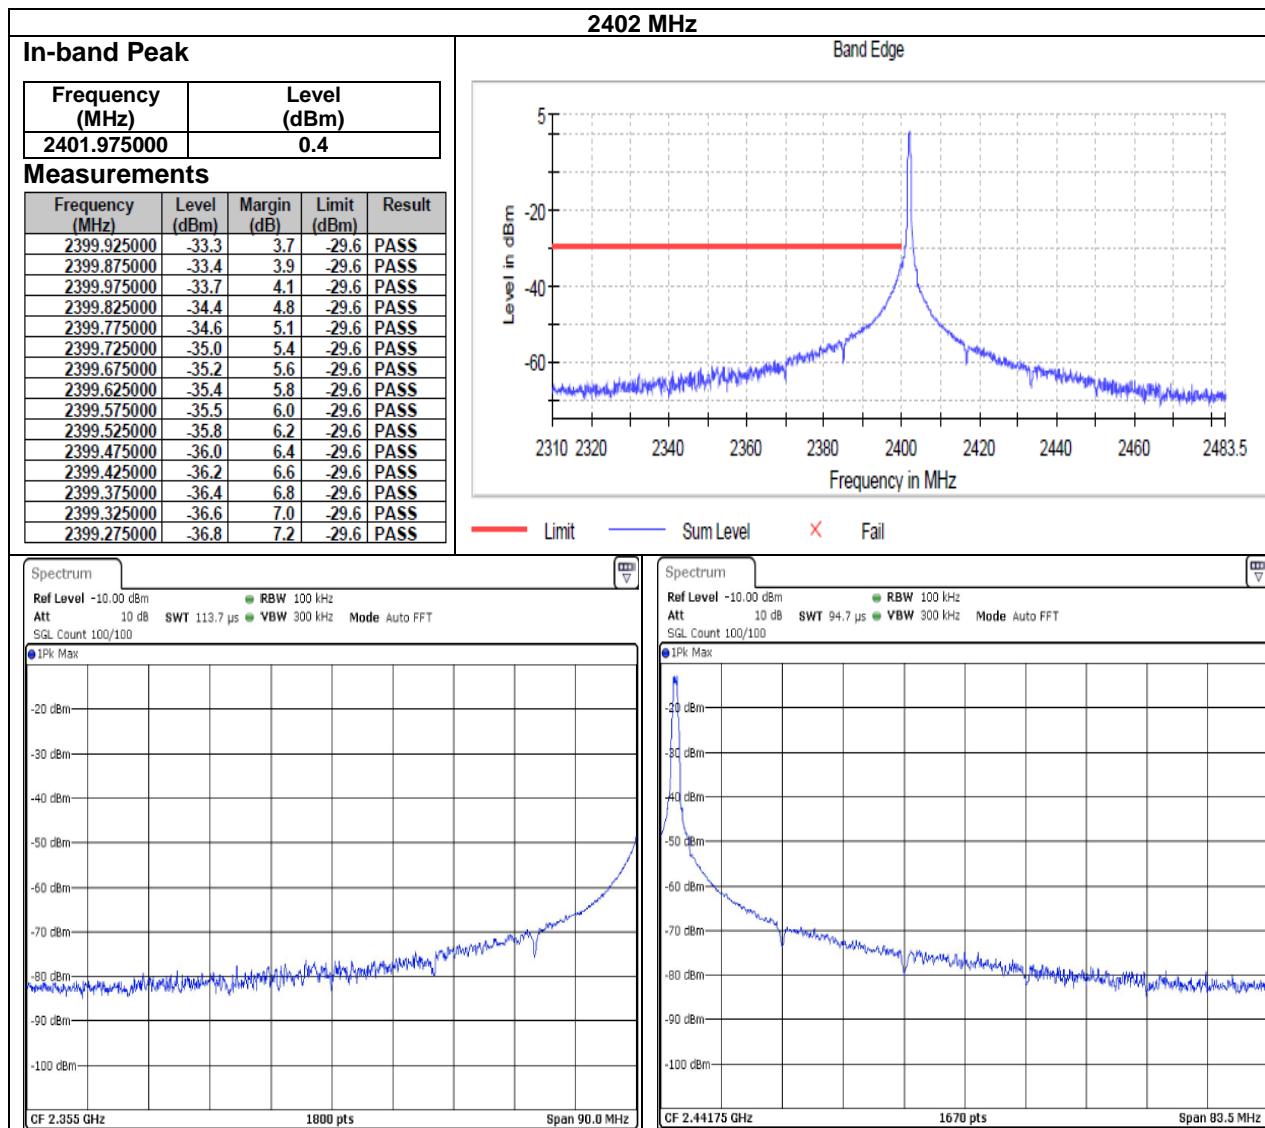

Conducted Band Edge High

Test procedure in accordance with ANSI C63.10-2013 Section 11.11.


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1. Expanded Uncertainty (K=2) < 0.8 dB

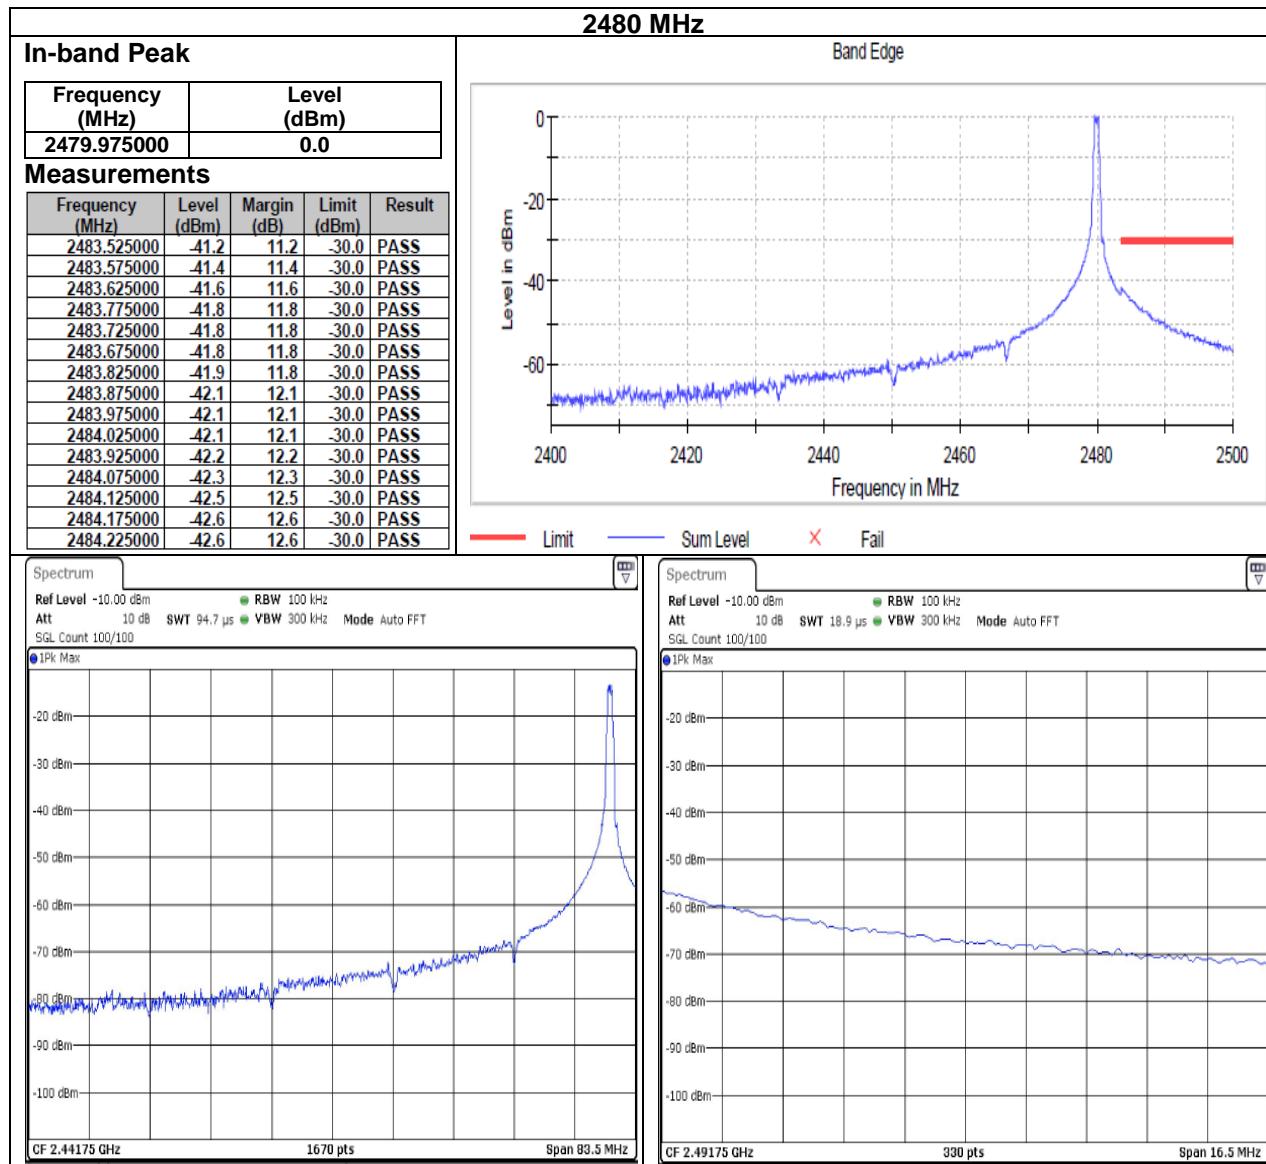

Conducted Spurious Emissions

Test procedure in accordance with ANSI C63.10-2013 Section 11.11.

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1. Expanded Uncertainty (K=2) < 1.8 dB

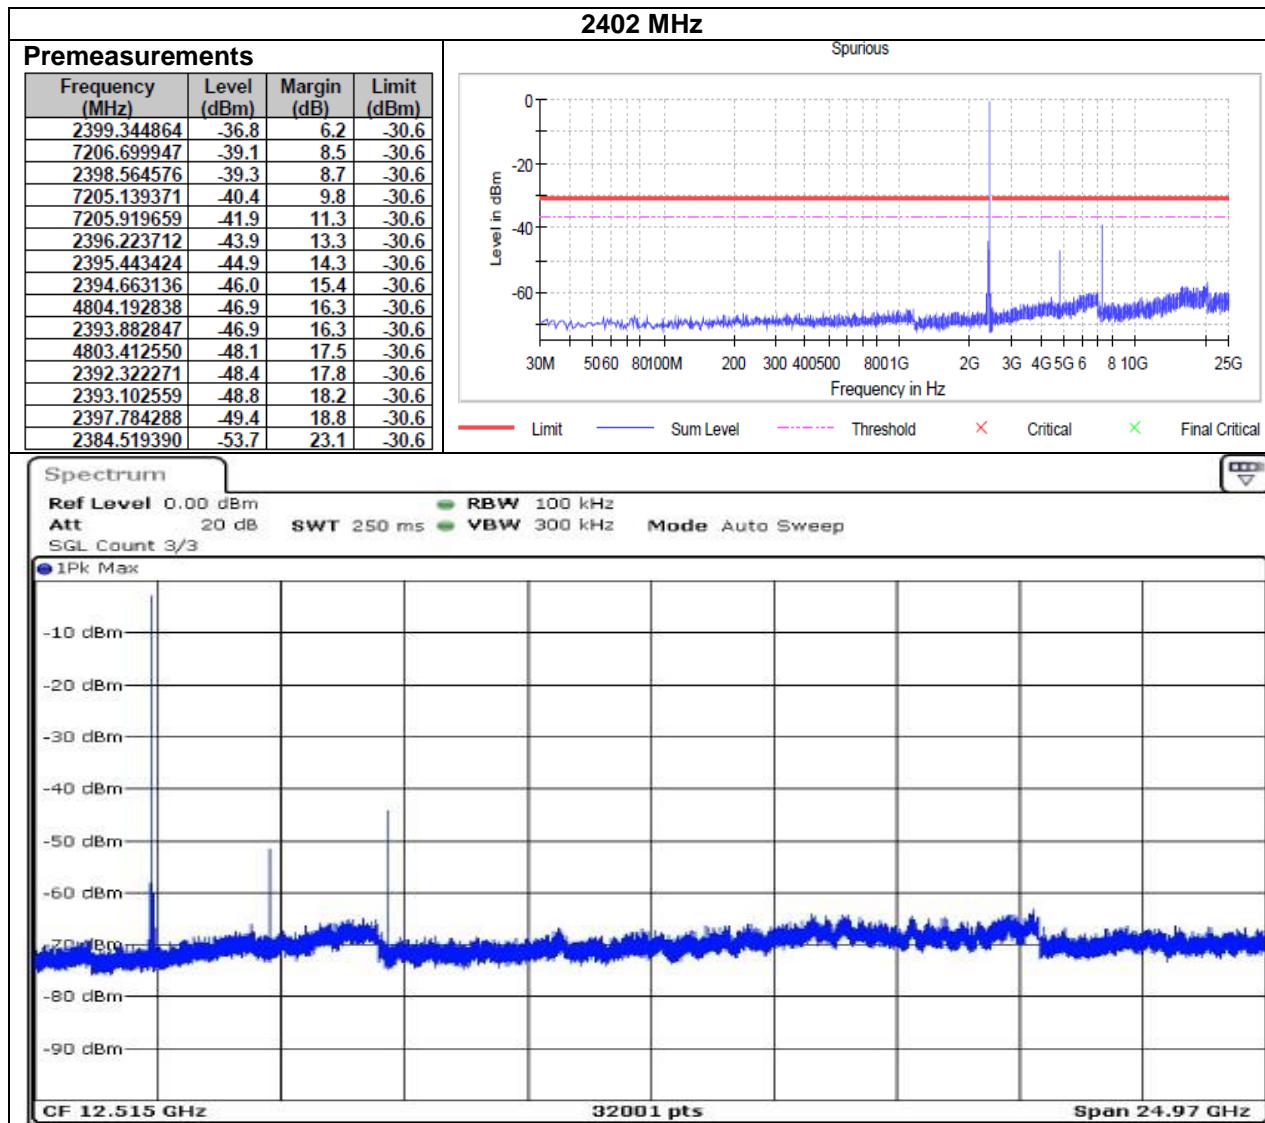

Bureau Veritas Consumer Products Services Inc.
 One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 30 of 32

