



FCC AND ISCED CERTIFICATION TEST REPORT

Applicant	:	Dongguan Siyoto Electronics Co.,Ltd.
Address of Applicant	:	No.10, North 7th Street, Qiaotou Qiaodong Road, Qiaotou Town, Dongguan City, Guangdong Province.
Manufacturer	:	Dongguan Siyoto Electronics Co.,Ltd.
Address of Manufacturer	:	No.10, North 7th Street, Qiaotou Qiaodong Road, Qiaotou Town, Dongguan City, Guangdong Province.
Equipment under Test	:	WIRELESS HEADPHONES
Model No.	:	HA-A23T
FCC ID	:	2ADZH-A23T
IC	:	23340-A23T
Test Standard(s)	:	FCC Rules and Regulations Part 15 Subpart C, RSS-247 Issue 3 August 2023, ANSI C63.10:2013, RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021)
Report No.	:	DDT-RE24121821-1E01
Issue Date	:	2025/03/05
Issue By	:	Guangdong Dongdian Testing Service Co., Ltd. Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808

REPORT

Table of Contents

1.	Summary of Test Results	7
2.	General Test Information.....	8
2.1.	Description of EUT.....	8
2.2.	Accessories of EUT	9
2.3.	Assistant equipment used for test	9
2.4.	Block diagram of EUT configuration for test.....	9
2.5.	Decision of final test mode	10
2.6.	Deviations of test standard	10
2.7.	Test environment conditions.....	10
2.8.	Test laboratory	11
2.9.	Measurement uncertainty	11
3.	Equipment Used During Conductive Test	12
4.	20 dB Bandwidth.....	13
4.1.	Block diagram of test setup	13
4.2.	Limits.....	13
4.3.	Test procedure.....	13
4.4.	Test result	14
4.5.	Test graphs.....	15
5.	99% Bandwidth.....	21
5.1.	Block diagram of test setup	21
5.2.	Limits.....	21
5.3.	Test procedure.....	21
5.4.	Test result	22
5.5.	Test graphs.....	23
6.	Maximum Peak Output Power.....	29
6.1.	Block diagram of test setup	29
6.2.	Limits.....	29
6.3.	Test procedure.....	29
6.4.	Test result	30
6.5.	Test graphs.....	31
7.	Carrier Frequency Separation	37
7.1.	Block diagram of test setup	37
7.2.	Limits.....	37
7.3.	Test procedure.....	37
7.4.	Test result	38
7.5.	Test graphs.....	39

8.	Dwell Time	41
8.1.	Block diagram of test setup	41
8.2.	Limits.....	41
8.3.	Test procedure.....	41
8.4.	Test result	42
8.5.	Test graphs.....	43
9.	Number of Hopping Channel.....	55
9.1.	Block diagram of test setup	55
9.2.	Limits.....	55
9.3.	Test procedure.....	55
9.4.	Test result	56
9.5.	Test graphs.....	57
10.	Band Edge Compliance (Conducted Method).....	59
10.1.	Block diagram of test setup	59
10.2.	Limit.....	59
10.3.	Test procedure.....	59
10.4.	Test result	60
10.5.	Test graphs	61
11.	RF Conducted Spurious Emissions.....	69
11.1.	Block diagram of test setup	69
11.2.	Limits.....	69
11.3.	Test procedure.....	69
11.4.	Test result	70
11.5.	Test graphs	71
12.	Duty cycle	89
12.1.	Block diagram of test setup	89
12.2.	Limit.....	89
12.3.	Test procedure.....	89
12.4.	Test result	90
12.5.	Test graphs	91
13.	Antenna Requirements	97
13.1.	Limit.....	97
13.2.	Result.....	97
14.	Radiated Emission.....	98
14.1.	Test equipment.....	98
14.2.	Block diagram of test setup	99
14.3.	Limits.....	100
14.4.	Assistant equipment used for test	102

14.5.	Test procedure	102
14.6.	Test result	103
14.7.	Test data	104
15.	Band Edge Compliance	120
15.1.	Test equipment	120
15.2.	Block diagram of test setup	121
15.3.	Limits	121
15.4.	Assistant equipment used for test	121
15.5.	Test procedure	121
15.6.	Test result	121
15.7.	Test data	122
16.	Power Line Conducted Emissions	134
16.1.	Test equipment	134
16.2.	Block diagram of test setup	134
16.3.	Limits	134
16.4.	Assistant equipment used for test	134
16.5.	Test procedure	135
16.6.	Test result	135
16.7.	Test data	136
17.	Test Setup Photograph	138
18.	Photos of the EUT	140

Test Report Declare

Applicant	:	Dongguan Siyoto Electronics Co.,Ltd.
Address of Applicant	:	No.10, North 7th Street, Qiaotou Qiaodong Road, Qiaotou Town, Dongguan City, Guangdong Province.
Equipment under Test	:	WIRELESS HEADPHONES
Model No.	:	HA-A23T
Manufacturer	:	Dongguan Siyoto Electronics Co.,Ltd.
Address of Manufacturer	:	No.10, North 7th Street, Qiaotou Qiaodong Road, Qiaotou Town, Dongguan City, Guangdong Province.

Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C,
RSS-247 Issue 3 August 2023,
ANSI C63.10:2013,
RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021)

We Declare:

The equipment described above is tested by Guangdong Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangdong Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

Report No.:	DDT-RE24121821-1E01		
Date of Receipt:	2024/12/20	Date of Test:	2024/12/20 - 2025/01/17

Created: Bobo Chen	Reviewed: Ella Gong	Approved: Damon Hu
		
2025/01/17	2025/03/05	2025/03/05

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Guangdong Dongdian Testing Service Co., Ltd.

Revision History

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	2025/03/05	

1. Summary of Test Results

No.	Test Parameter	Clause No.	Condition	Result
1	Maximum Peak Output Power	FCC Part 15: 15.247(b)(1), RSS-247 Issue 3 clause 5.4(b)	/	Pass
2	20 dB Bandwidth	FCC Part 15: 15.247(a)(1), RSS-247 Issue 3 clause 5.1(a)	/	Pass
3	99% Bandwidth	RSS-Gen Issue 5 clause 6.7	/	Pass
4	Carrier Frequency Separation	FCC Part 15: 15.247(a)(1), RSS-247 Issue 3 clause 5.1(b)	/	Pass
5	Number of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii), RSS-247 Issue 3 clause 5.1(d)	/	Pass
6	Dwell Time	FCC Part 15: 15.247(a)(1)(iii), RSS-247 Issue 3 clause 5.1(d)	/	Pass
7	RF Conducted Spurious Emissions	FCC Part 15: 15.247(d), RSS-247 Issue 3 clause 5.5	/	Pass
8	Radiated Emission	FCC Part 15: 15.205, FCC Part 15: 15.209, FCC Part 15: 15.247(d), RSS-247 Issue 3 clause 5.5, RSS-Gen Issue 5 clause 8.9, RSS-Gen Issue 5 clause 8.10	/	Pass
9	Band Edge Compliance	FCC Part 15: 15.205, FCC Part 15: 15.209, FCC Part 15: 15.247(d), RSS-247 Issue 3 clause 5.5, RSS-Gen Issue 5 clause 8.9, RSS-Gen Issue 5 clause 8.10	/	Pass
10	Power Line Conducted Emissions	FCC Part 15: 15.207(a), RSS-Gen Issue 5 clause 8.8	/	Pass
11	Antenna Requirement	FCC Part 15: 15.203, RSS-Gen Issue 5 clause 6.8	/	Pass
Note: N/A is an abbreviation for Not Applicable, and means this item is not applicable for this device or no need to test according to standard.				

2. General Test Information

2.1. Description of EUT

EUT Name	: WIRELESS HEADPHONES
Model Number	: HA-A23T
EUT Function Description	: Please reference user manual of this device
Power Supply	: CHARGING CASE: DC 5V from USB cable EARBUDS: DC 5V from external charging case CHARGING CASE: DC 3.7V Lithium-ion built-in battery EARBUDS: DC 3.7V Lithium-ion built-in battery

Note 1: This EUT support Bluetooth BR/EDR/LE, this report only for Bluetooth BR/EDR.

Note 2: The headphones are available in multiple color options, with different circuit layouts on the left and right sides, and tests on both sides.

Radio Specification	: Bluetooth BR/EDR
Operation Frequency	: 2402 MHz-2480 MHz
Modulation	: GFSK, $\pi/4$ -DQPSK, 8DPSK

Antenna information	
Antenna Type	: FPC
Left side max antenna Gain(dBi)	: 2.22
Right side max antenna Gain(dBi)	: 0.97

Channel information					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	27	2429	54	2456
1	2403	28	2430	55	2457
2	2404	29	2431	56	2458
3	2405	30	2432	57	2459
4	2406	31	2433	58	2460
5	2407	32	2434	59	2461
6	2408	33	2435	60	2462
7	2409	34	2436	61	2463
8	2410	35	2437	62	2464
9	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473

18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

Note: The above EUT information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications or User's Manual. The above Antenna information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

“☑” means to be chosen or applicable; “☐” means don't to be chosen or not applicable; This note applies to entire report.

2.2. Accessories of EUT

Accessories	Manufacturer	Model number	Description
USB cable	N/A	N/A	Length: 0.2m, unshielded

2.3. Assistant equipment used for test


Assistant equipment	Manufacturer	Model number	Description	other
NoteBook	Lenovo	i7-3520M	N/A	00426-OEM-8992662-00400

2.4. Block diagram of EUT configuration for test

For Conducted Method Testing and Radiated Method Testing:



For Power Line Conducted Emissions Method Testing:



2.5. Decision of final test mode

According pre-test, the worst test modes were reported as below:

Test software: FCC_assist_1.0.4.exe

The test software was used to control EUT work in Continuous Tx mode, and select test channel, wireless mode as below table.

The pathloss of external cable: 0.5 dB (According to the manufacturer's claims)

Tested mode, channel, information			
Mode	Setting Tx Power	Channel	Frequency (MHz)
GFSK hopping on Tx mode	6	CH0 to CH78	2402 to 2480
$\pi/4$ -DQPSK hopping on Tx mode	6	CH0 to CH78	2402 to 2480
8DPSK hopping on Tx mode	6	CH0 to CH78	2402 to 2480
GFSK hopping off Tx mode	6	CH0	2402
	6	CH39	2441
	6	CH78	2480
$\pi/4$ -DQPSK hopping off Tx mode	6	CH0	2402
	6	CH39	2441
	6	CH78	2480
8DPSK hopping off Tx mode	6	CH0	2402
	6	CH39	2441
	6	CH78	2480
Worst-case data rates were: GFSK mode: DH5, $\pi/4$ -DQPSK mode: 2DH5, 8DPSK mode: 3DH5			

2.6. Deviations of test standard

No deviation.

2.7. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	+15°C to +35 °C
Humidity range:	20% to 75%
Pressure range:	86 kPa to 106 kPa

Note: The specific temperature and humidity information of each test item refers to the temperature and humidity record in the corresponding test data.

2.8. Test laboratory

Guangdong Dongdian Testing Service Co., Ltd.

Add.: Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, R-20155, G-20118

2.9. Measurement uncertainty


Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum analyzer)	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$);
	1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$);
	1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Frequencies Stability	6.7×10^{-8} (Antenna couple method)
	5.5×10^{-8} (Conducted method)
Conducted spurious emissions	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$);
	1.40 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
	1.66 dB ($8 \text{ GHz} \leq f < 26.5 \text{ GHz}$)
Uncertainty for radio frequency (RBW < 20 kHz)	3×10^{-8}
Temperature	0.4 °C
Humidity	2 %
Uncertainty for Radiation Emission test (9 kHz – 30 MHz)	3.44 dB
Uncertainty for Radiation Emission test (30 MHz - 1 GHz)	4.70 dB (Antenna Polarize: V)
	4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz - 40 GHz)	4.10 dB (1 - 6 GHz)
	4.40 dB (6 GHz - 18 GHz)
	3.54 dB (18 GHz - 26 GHz)
	4.30 dB (26 GHz - 40 GHz)
Uncertainty for Power line conduction emission test	3.34dB (150KHz-30MHz)
	3.72dB (9KHz-150KHz)
Sweep time accuracy	0.1 % (1 μ s to 16000 s)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3. Equipment Used During Conductive Test

Equipment	Manufacturer	Model No.	Serial Number	Due Date
☑RF Connected Test (RF Measurement System 4#)				
Signal &Spectrum Analyzer	R&S	FSV3044	101173	2025/03/31
Wideband Radio Communication Tester	R&S	CMW500	168801	2025/03/31
MXG Vector Signal Generator	Agilent	N5182A	MY48180737	2025/03/31
PSG Vector Signal Generator	Agilent	E8267D	US49060192	2025/08/25
RF Control Unit	Tonsend	JS0806-2	2118060485	2025/03/31
TEMP&HUMI Programmable Chamber	ZHIXIANG	ZXGDJS-150L	ZX170110-A	2025/04/22
Test Software	Tonscend	JS1120-3	Ver.3.2.22	N/A

4. 20 dB Bandwidth

4.1. Block diagram of test setup

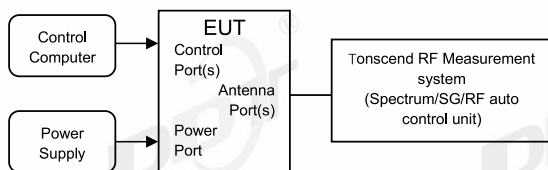

4.2. Limits

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

4.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 6.9.2.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for the 20 dB bandwidth measurement:

RBW:	1% to 5% of the OBW
VBW:	approximately three times RBW
Span:	between 2 times and 5 times the OBW
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold
- (5) Measure and record the results in the report.


4.4. Test result

Test Engineer:	Zoe Peng	Test Site:	RF Measurement System 4#
Ambient Condition:	21.2℃,45.9%RH	Test Date:	2025.01.09
Test Power Supply:	Battery	Sample Number:	S24121821-003


Test Mode	Antenna	Frequency [MHz]	20dB EBW[MHz]
DH5	Left side	2402	1.02
	Right side	2402	1.01
	Left side	2441	1.01
	Right side	2441	0.99
	Left side	2480	0.99
	Right side	2480	1.00
2DH5	Left side	2402	1.30
	Right side	2402	1.30
	Left side	2441	1.33
	Right side	2441	1.29
	Left side	2480	1.33
	Right side	2480	1.35
3DH5	Left side	2402	1.31
	Right side	2402	1.32
	Left side	2441	1.30
	Right side	2441	1.31
	Left side	2480	1.28
	Right side	2480	1.31

4.5. Test graphs




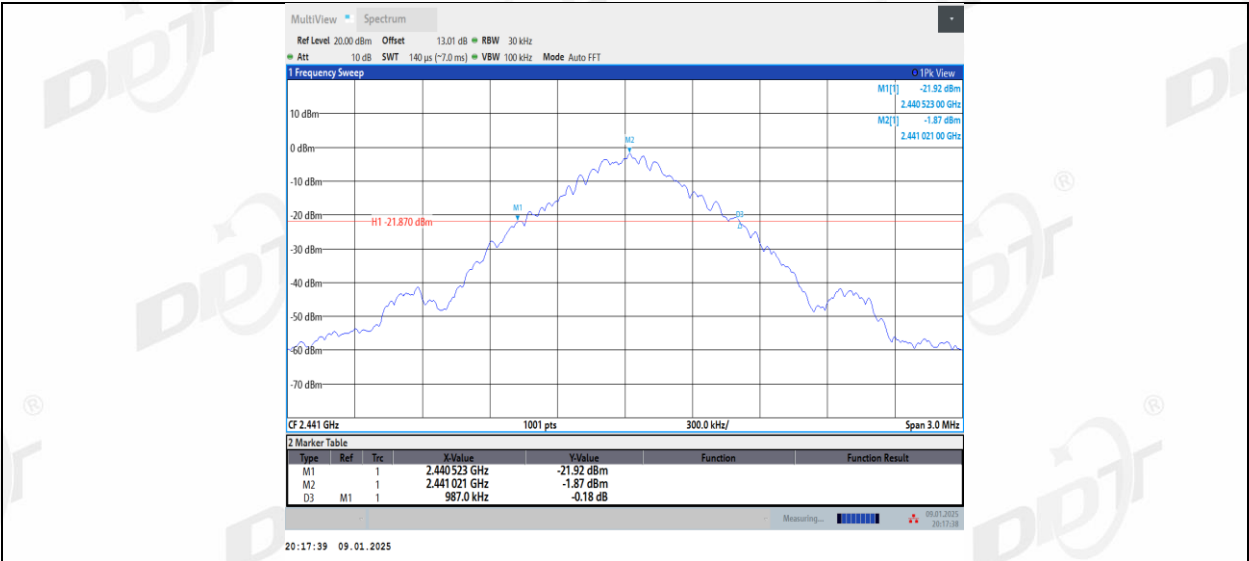


DH5_Left side_2480

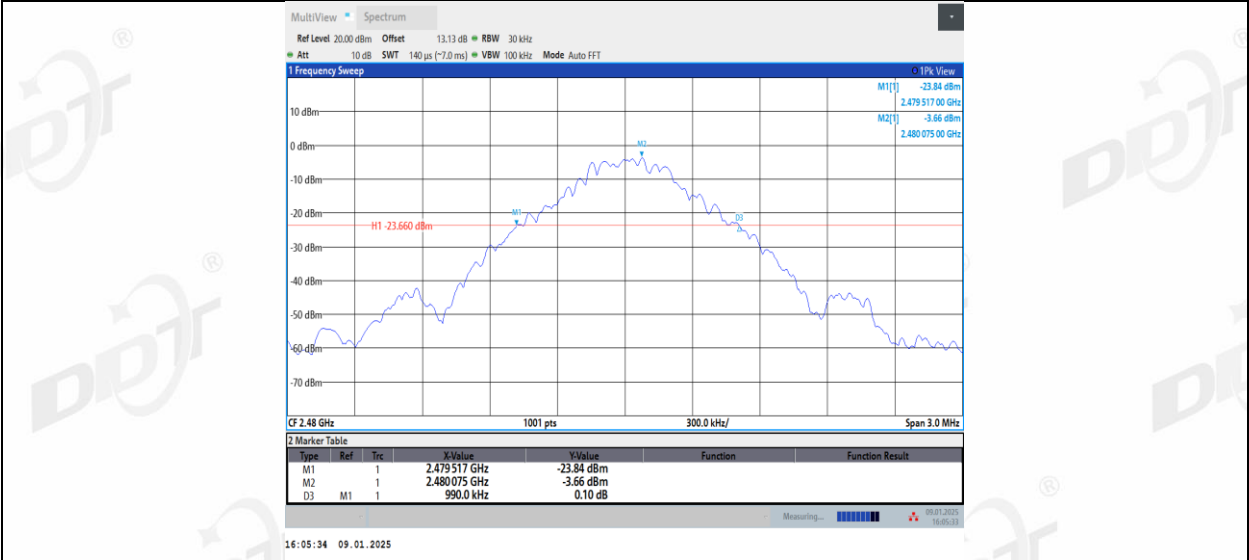


DH5_Right side_2480

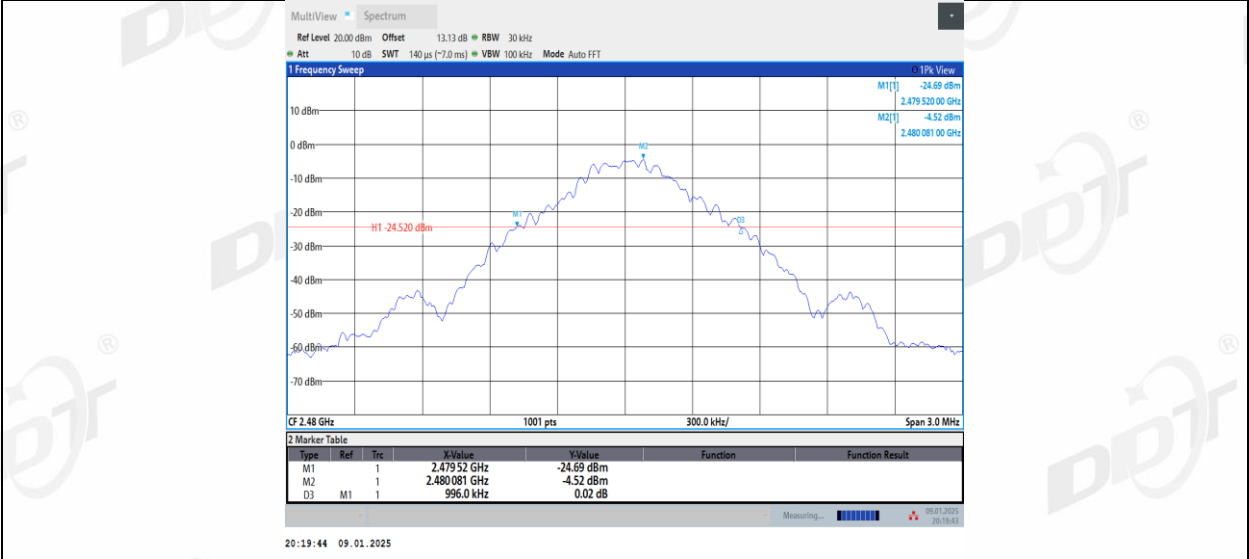


2DH5_Left side_2402

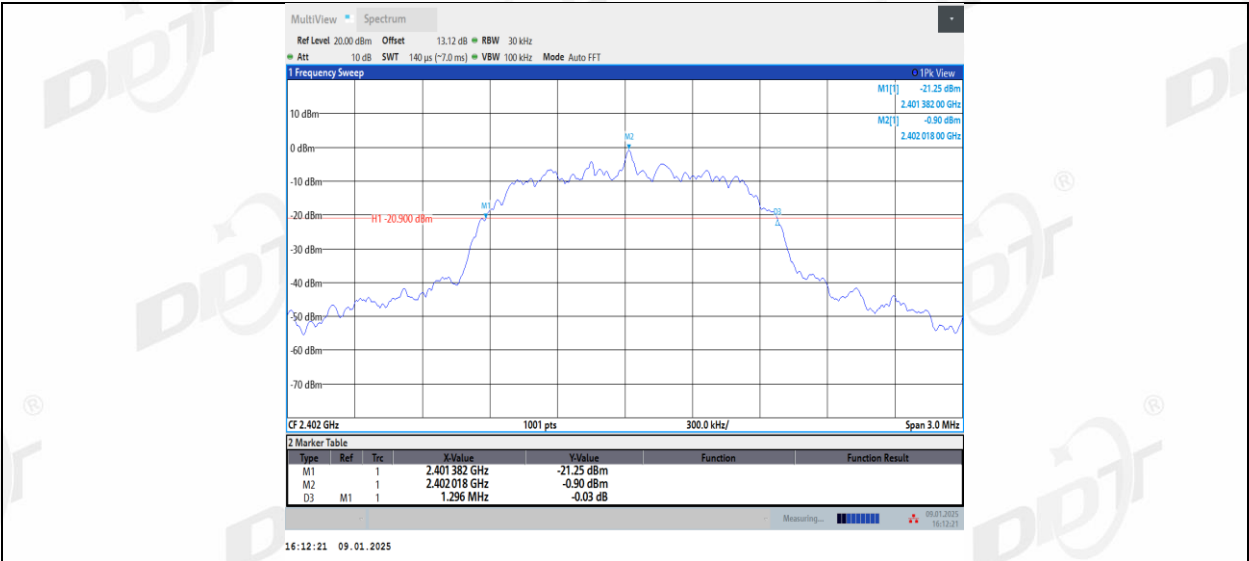


2DH5_Right side_2402

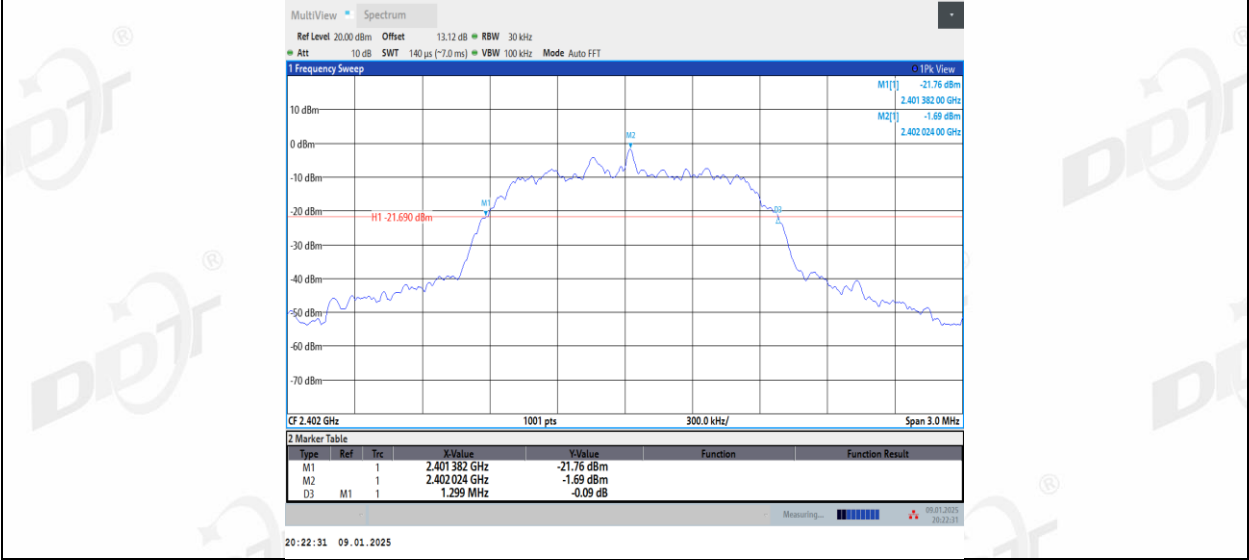

2DH5_Left side_2441

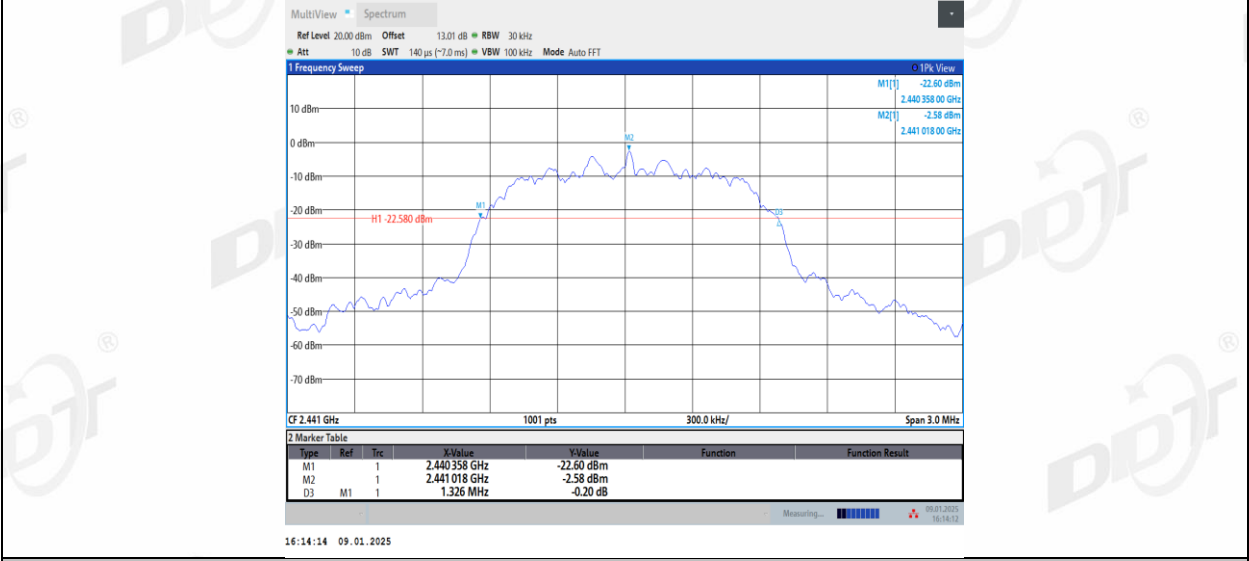

2DH5_Right side_2441

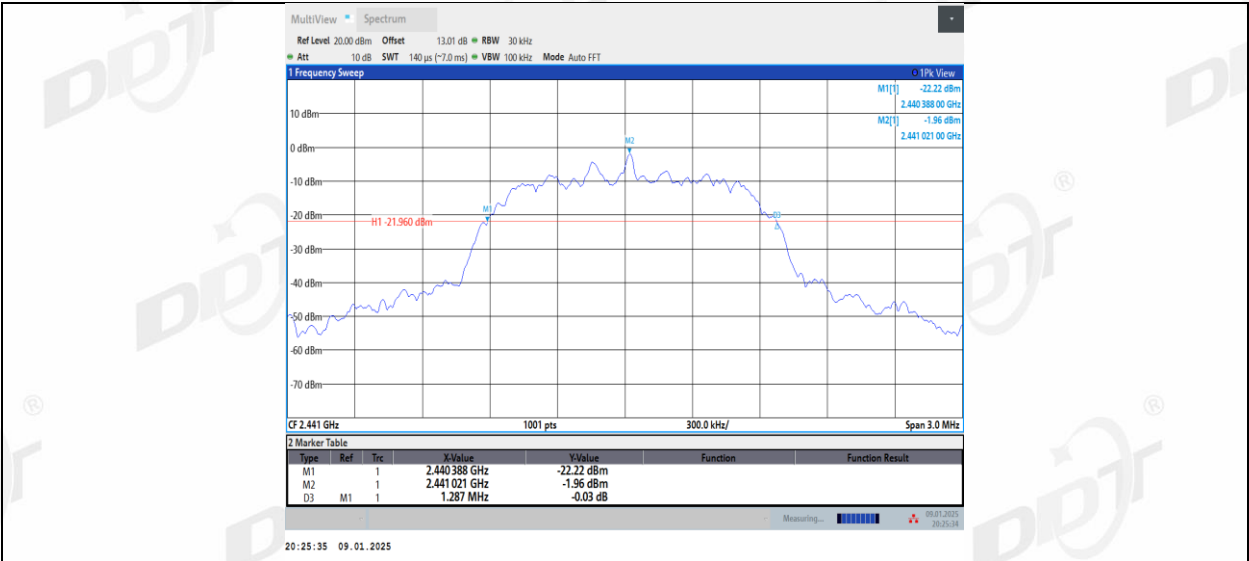


2DH5_Left side_2480




2DH5_Right side_2480




3DH5_Left side_2402

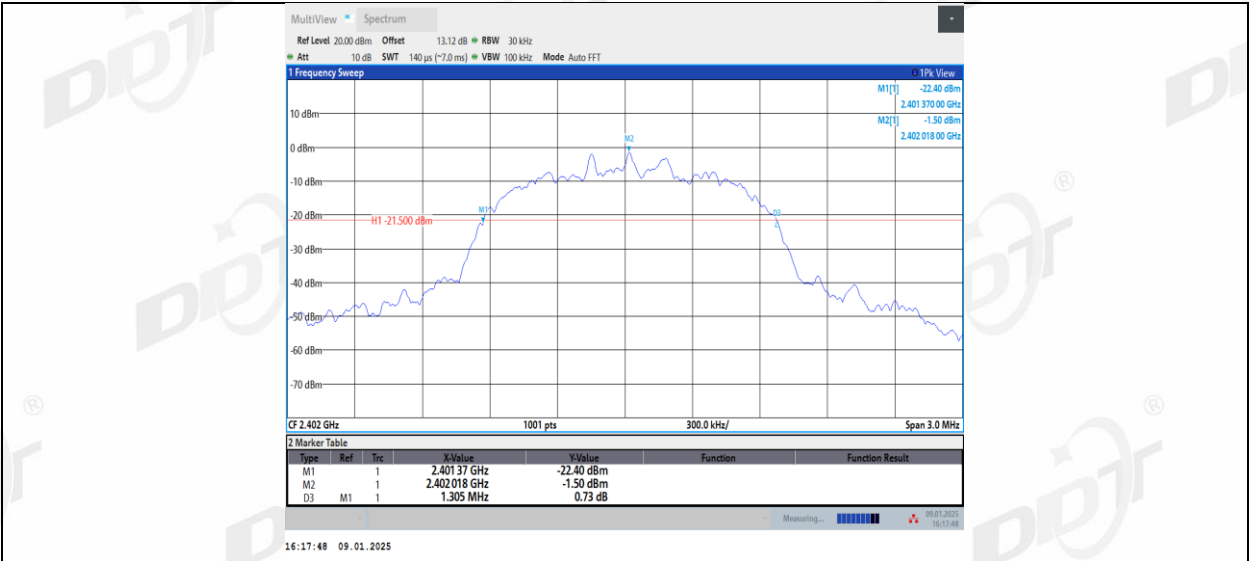


3DH5_Right side_2402

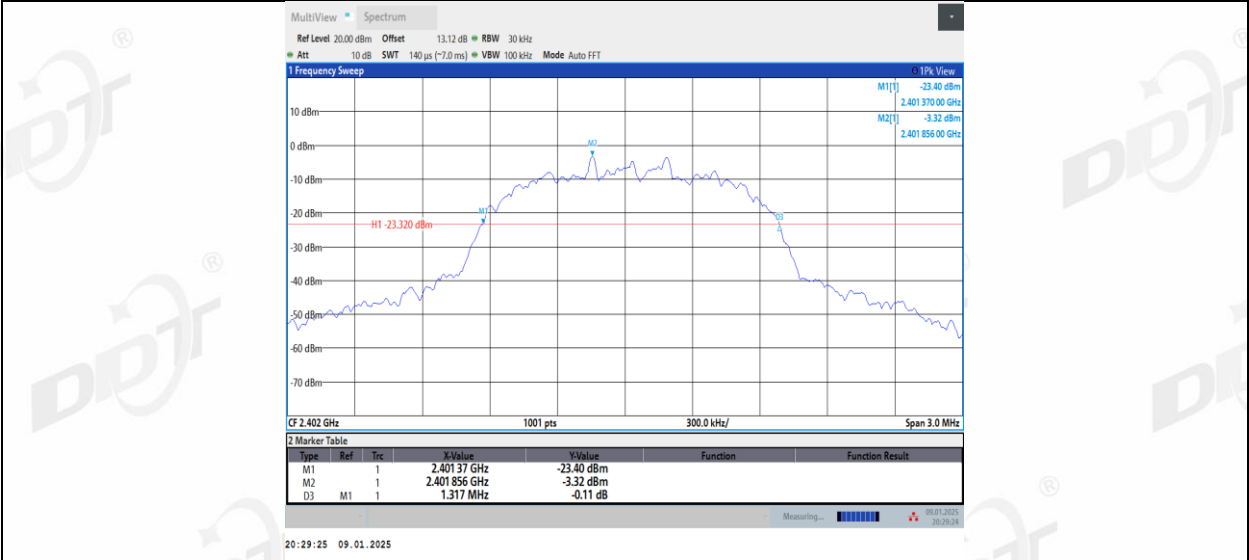

3DH5_Left side_2441

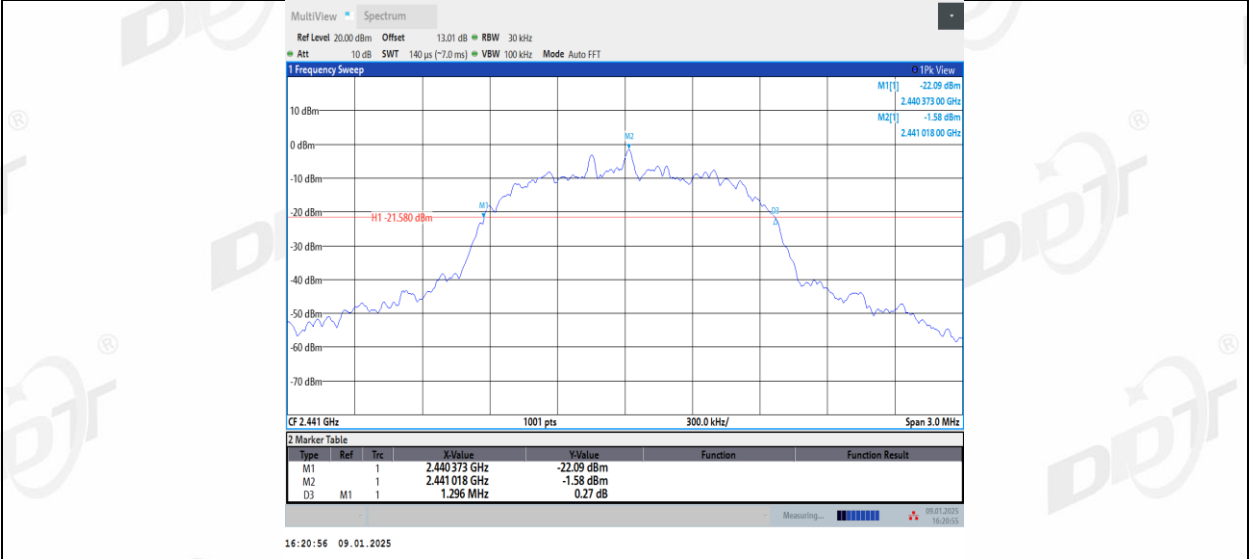


3DH5_Right side_2441

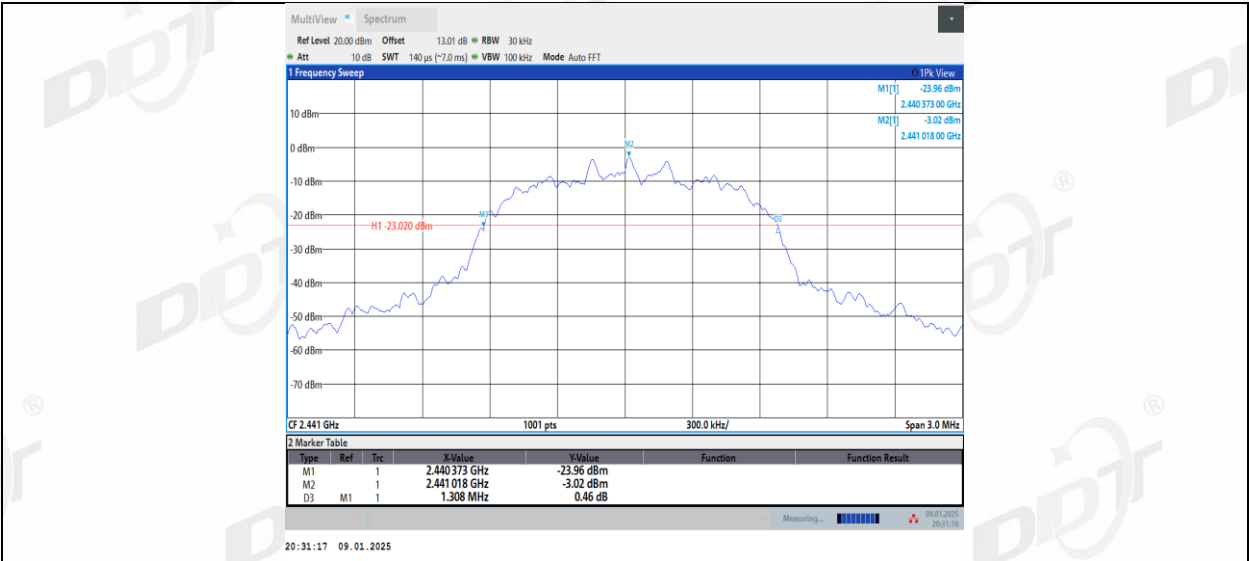

3DH5_Left side_2480




3DH5_Right side_2480

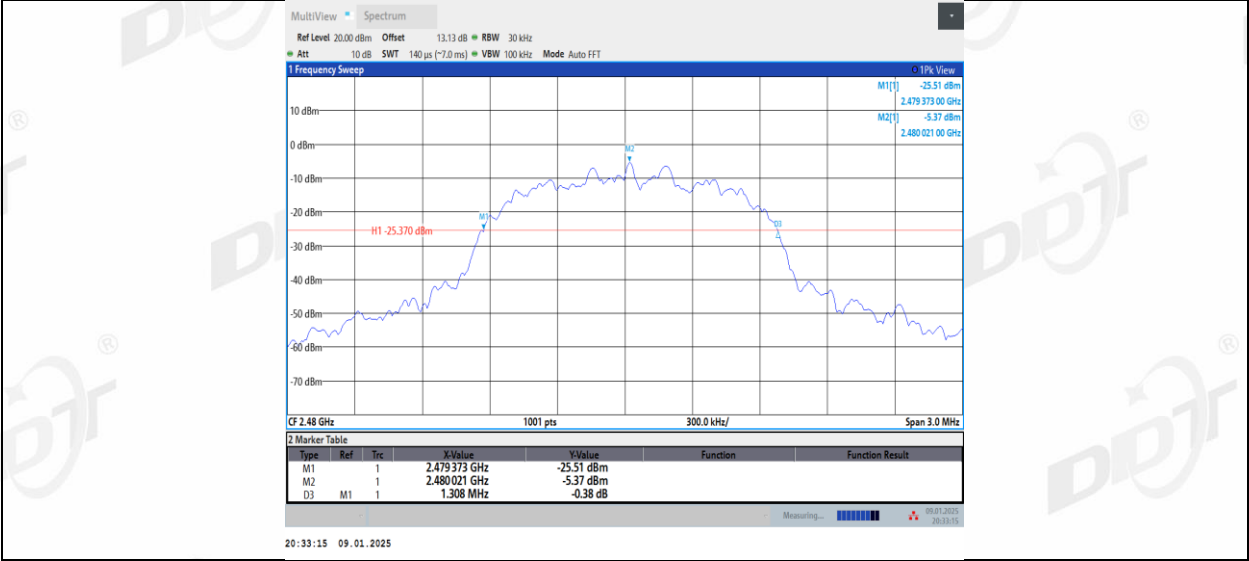

5. 99% Bandwidth

5.1. Block diagram of test setup

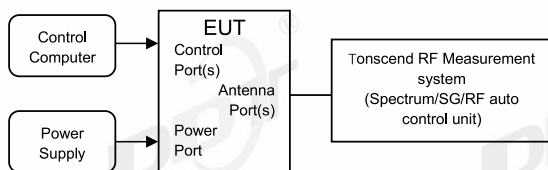

5.2. Limits

Just for Report.

5.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 6.9.3.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for the 99% bandwidth measurement:

RBW:	1% to 5% of the OBW
VBW:	approximately three times RBW
Span:	between 1.5 times and 5.0 times the OBW
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold
- (5) Measure and record the results in the report.


5.4. Test result

Test Engineer:	Zoe Peng	Test Site:	RF Measurement System 4#
Ambient Condition:	21.2℃,45.9%RH	Test Date:	2025.01.09
Test Power Supply:	Battery	Sample Number:	S24121821-003


Test Mode	Antenna	Frequency [MHz]	OCB [MHz]	FL[MHz]	FH[MHz]
DH5	Left side	2402	0.887	2401.5696	2402.4563
	Right side	2402	0.900	2401.5727	2402.4724
	Left side	2441	0.894	2440.5747	2441.4686
	Right side	2441	0.897	2440.5732	2441.4704
	Left side	2480	0.893	2479.5729	2480.4655
	Right side	2480	0.895	2479.5736	2480.4684
2DH5	Left side	2402	1.199	2401.4207	2402.6195
	Right side	2402	1.211	2401.4206	2402.6313
	Left side	2441	1.196	2440.4213	2441.6176
	Right side	2441	1.206	2440.4206	2441.6265
	Left side	2480	1.197	2479.4188	2480.6156
	Right side	2480	1.193	2479.4275	2480.6205
3DH5	Left side	2402	1.205	2401.4134	2402.6185
	Right side	2402	1.201	2401.4192	2402.6204
	Left side	2441	1.192	2440.4225	2441.6149
	Right side	2441	1.193	2440.4244	2441.6176
	Left side	2480	1.203	2479.4138	2480.6173
	Right side	2480	1.192	2479.4222	2480.6143

5.5.Test graphs




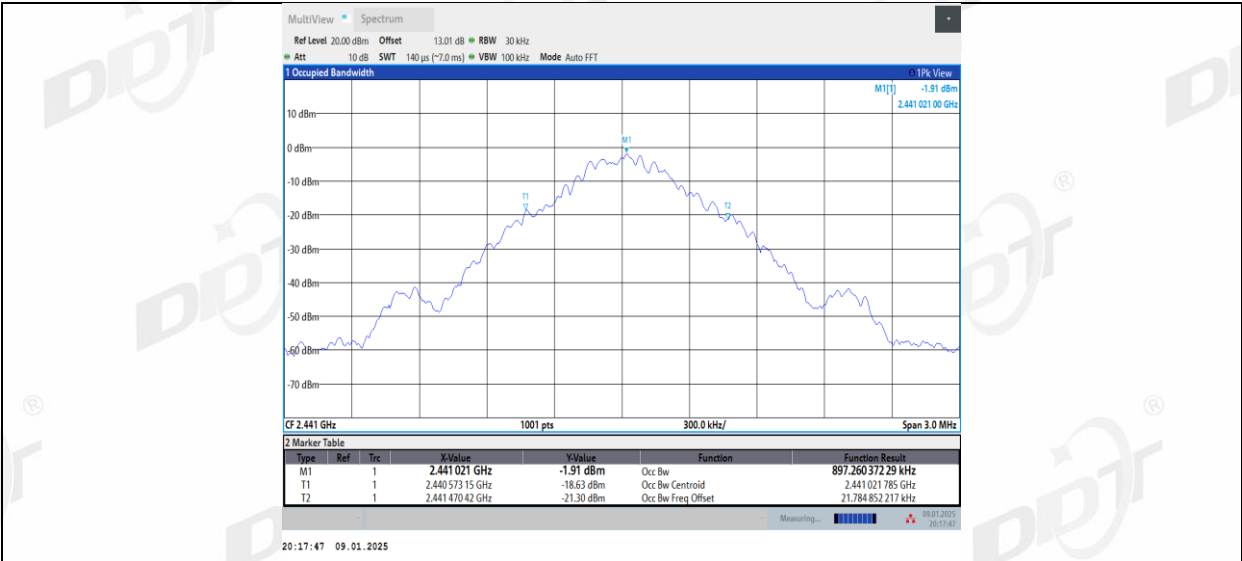


DH5_Left side_2480

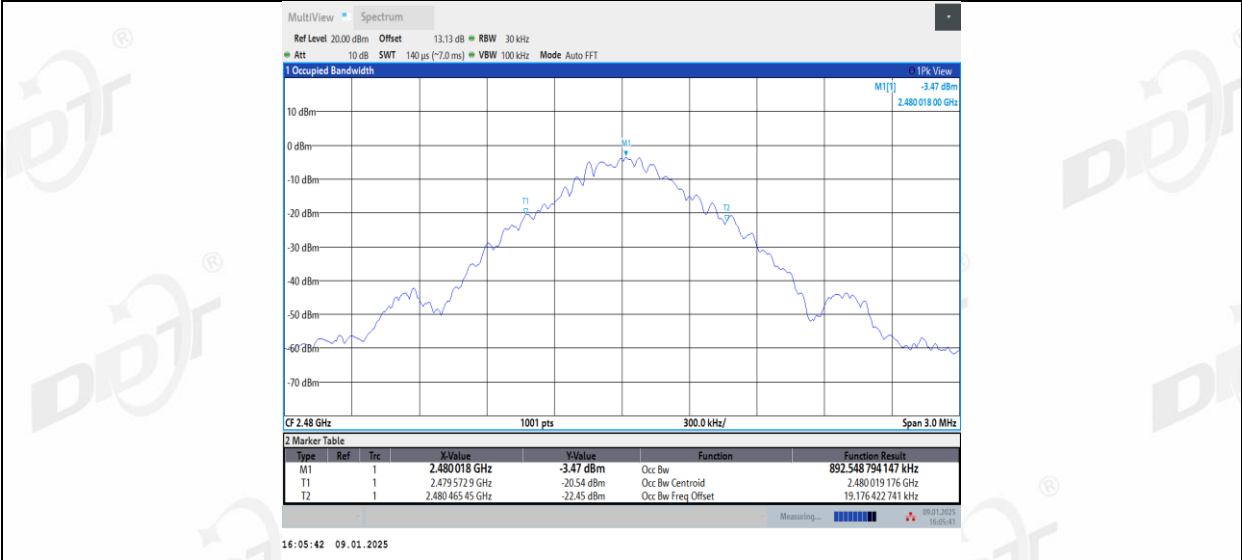


DH5_Right side_2480

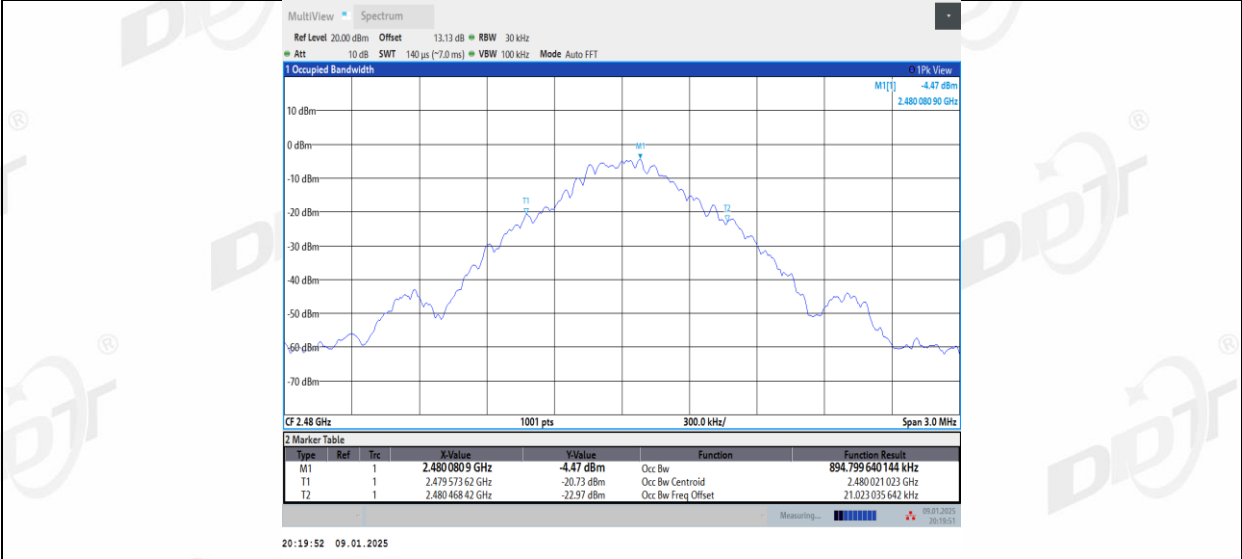


2DH5_Left side_2402

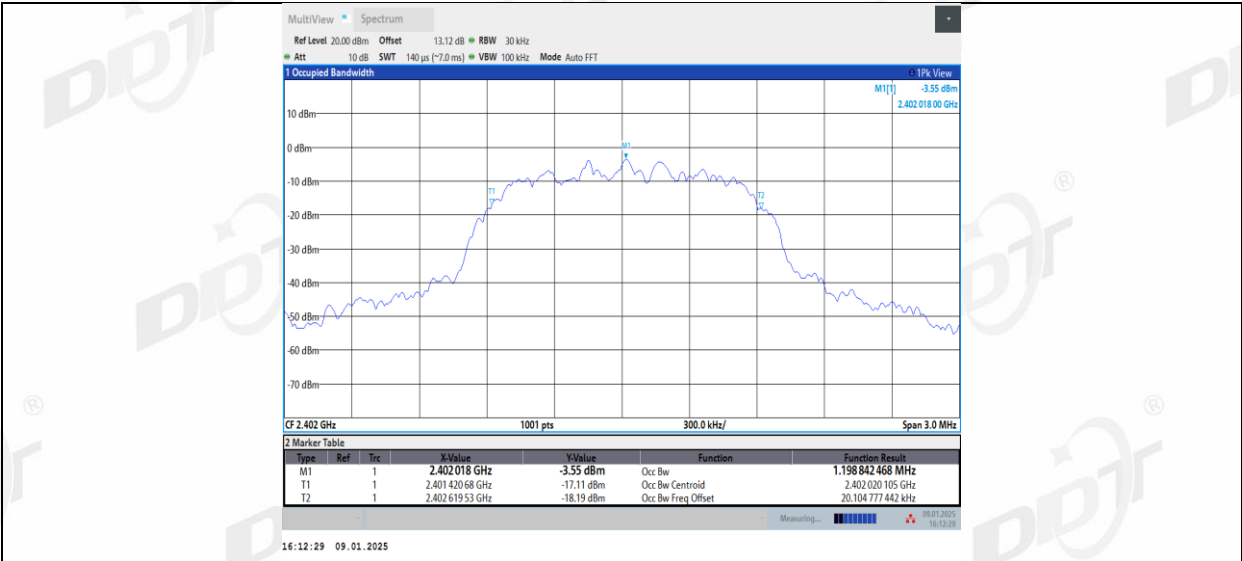


2DH5_Right side_2402

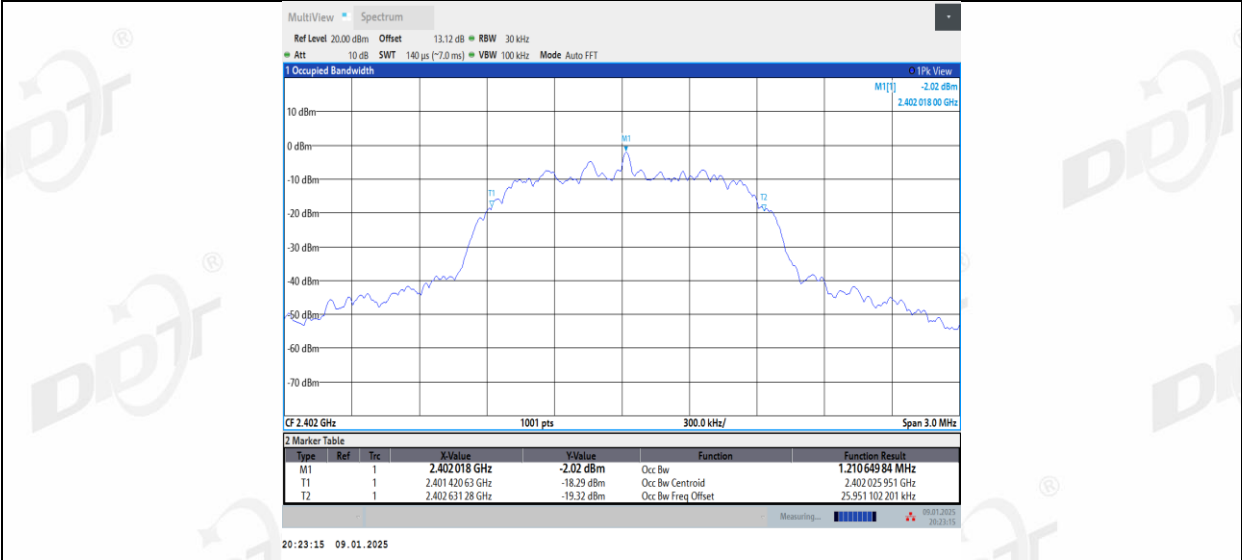


2DH5_Left side_2441

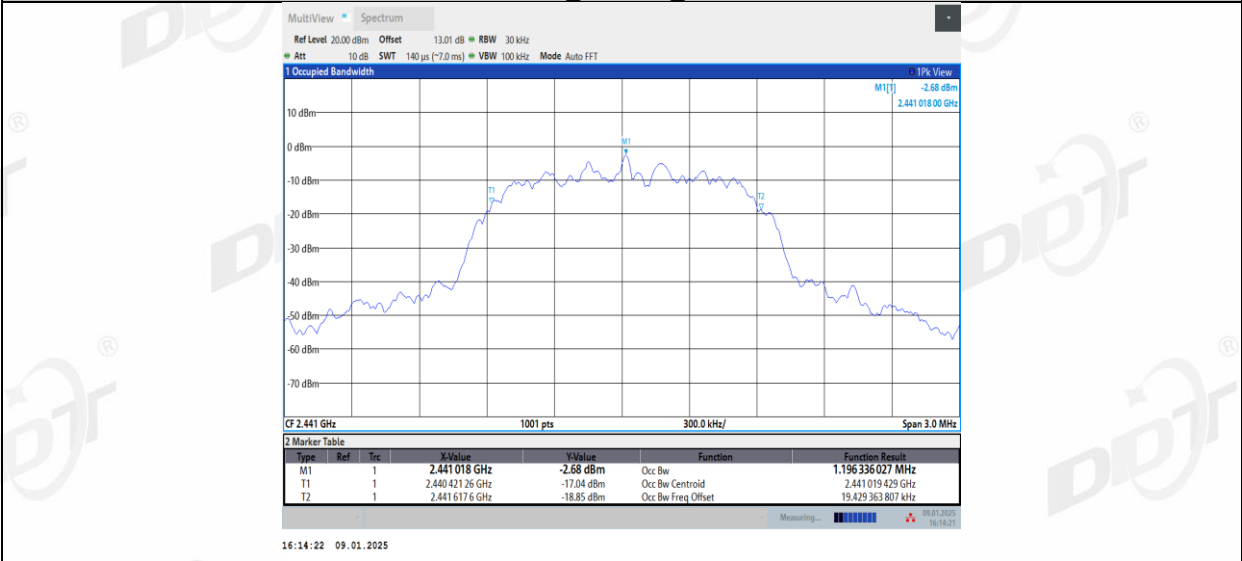


2DH5_Right side_2441

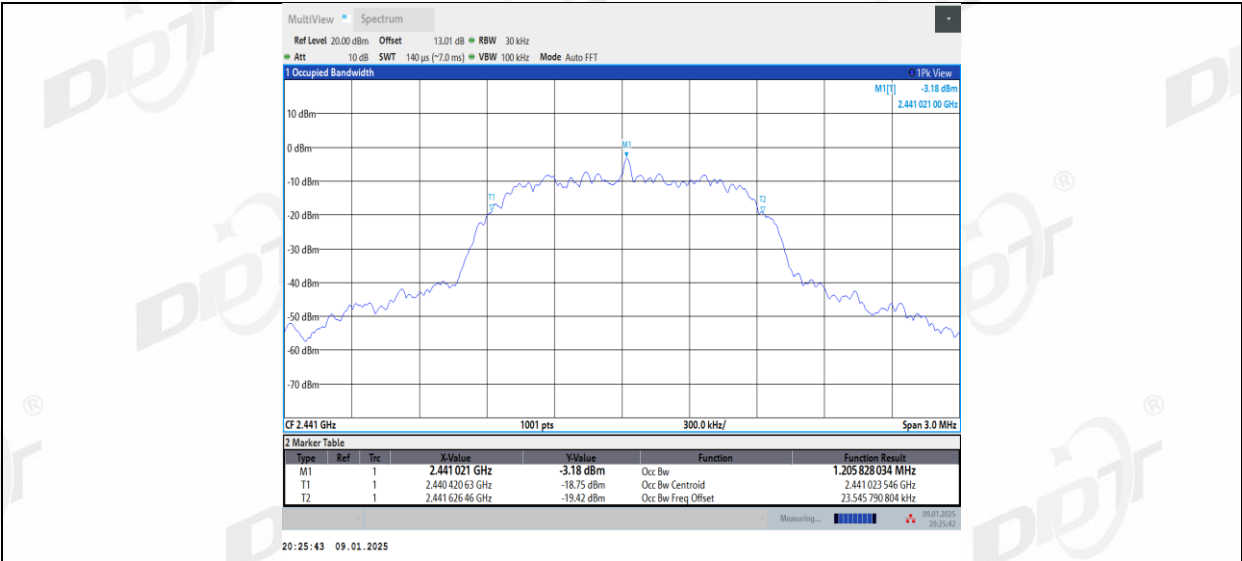


2DH5 Left side 2480

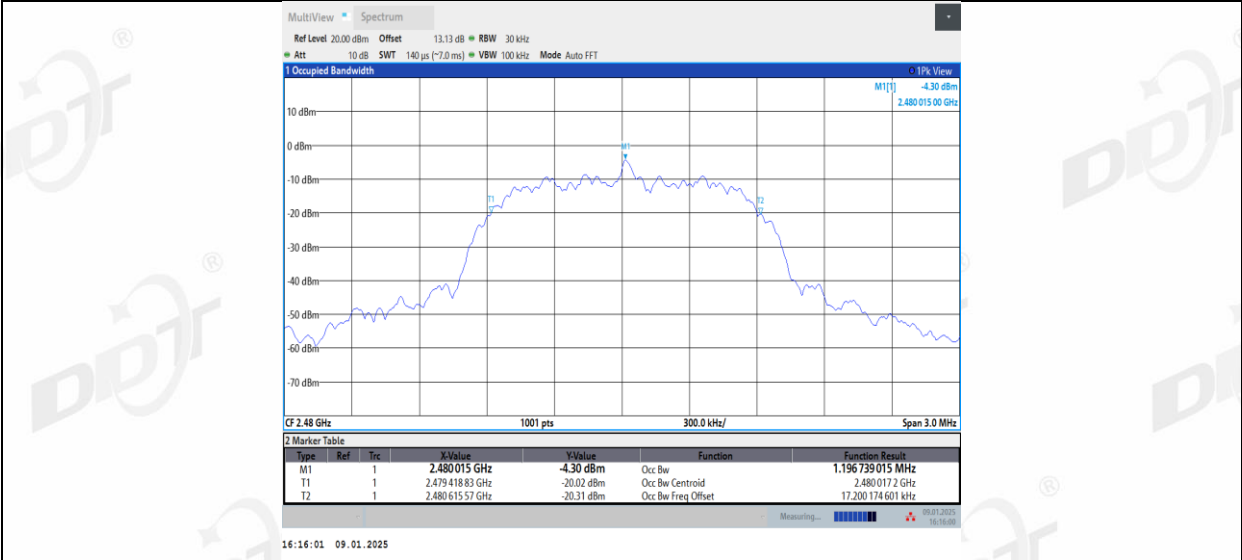


2DH5 Right side 2480

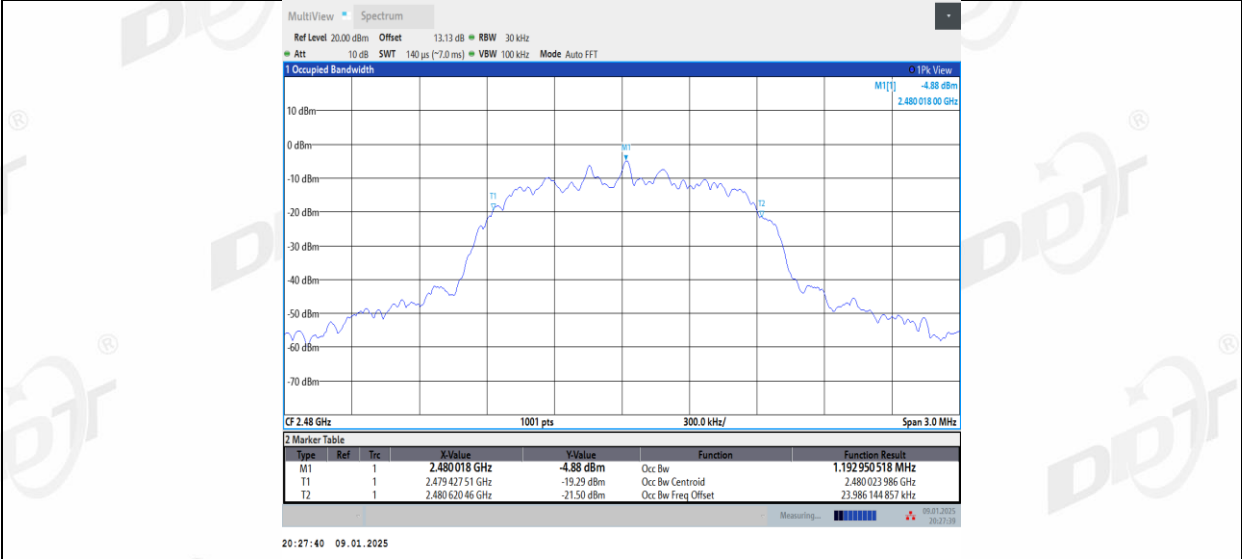


3DH5 Left side 2402

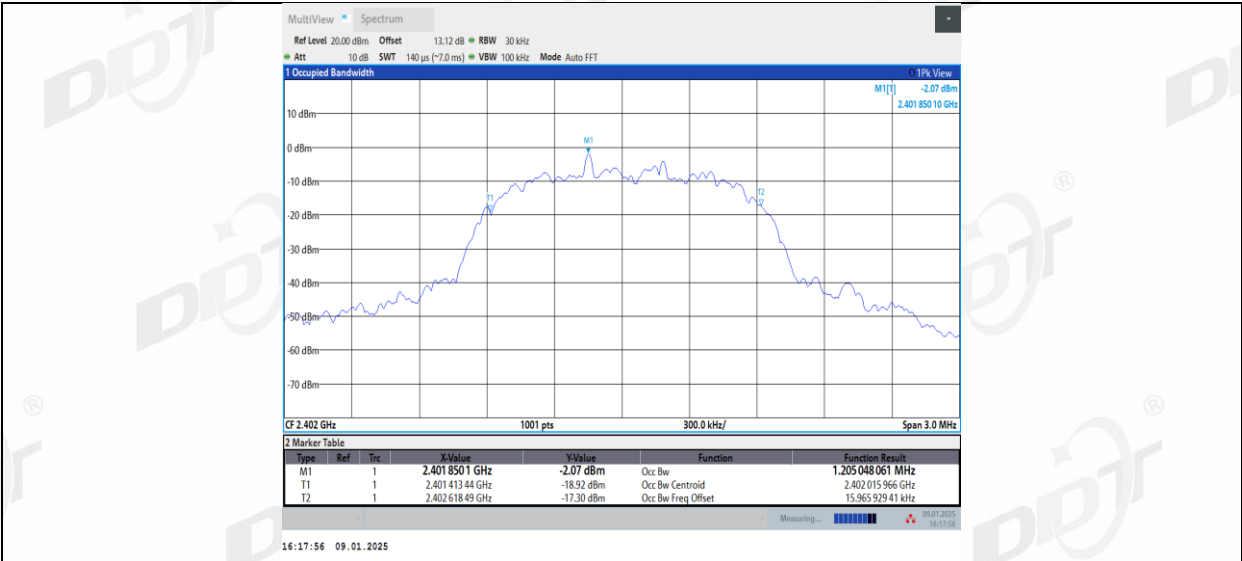


3DH5_Right side_2402

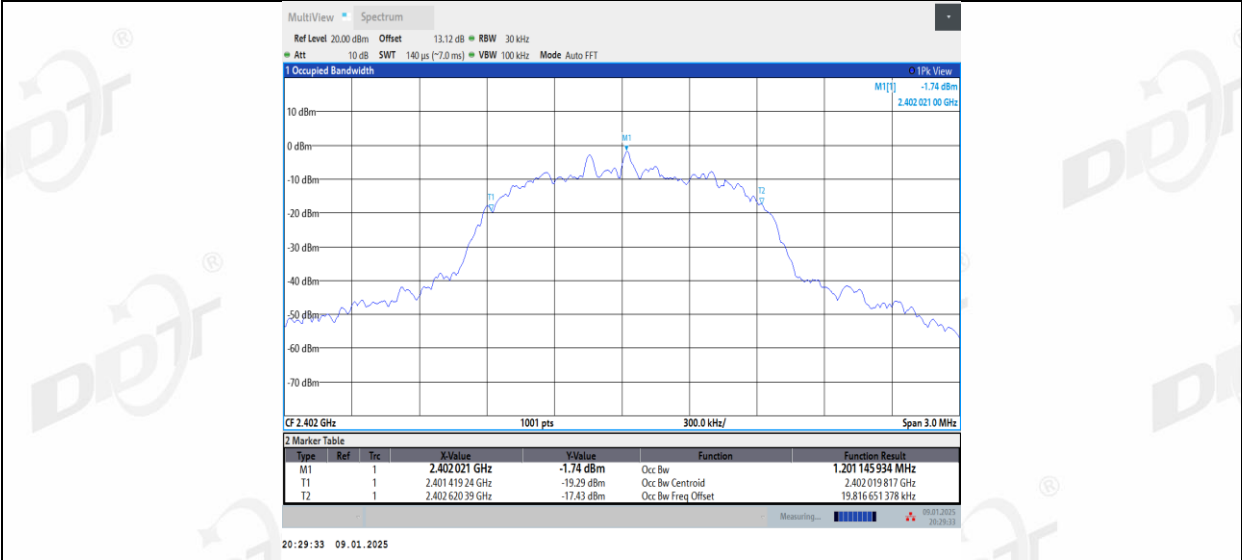


3DH5_Left side_2441

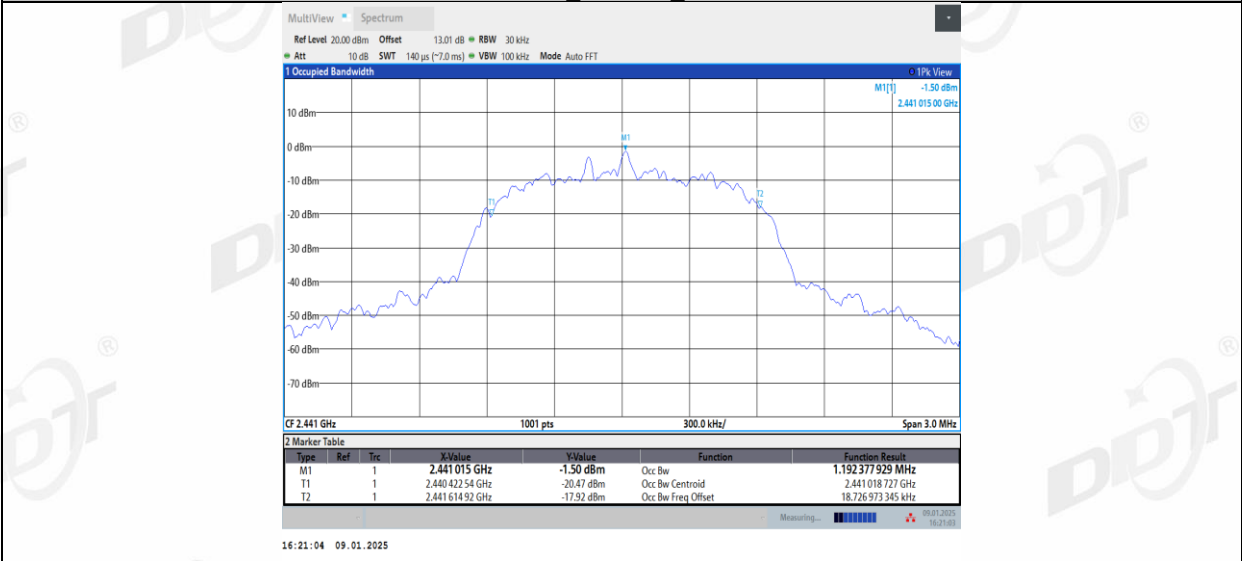


3DH5_Right side_2441

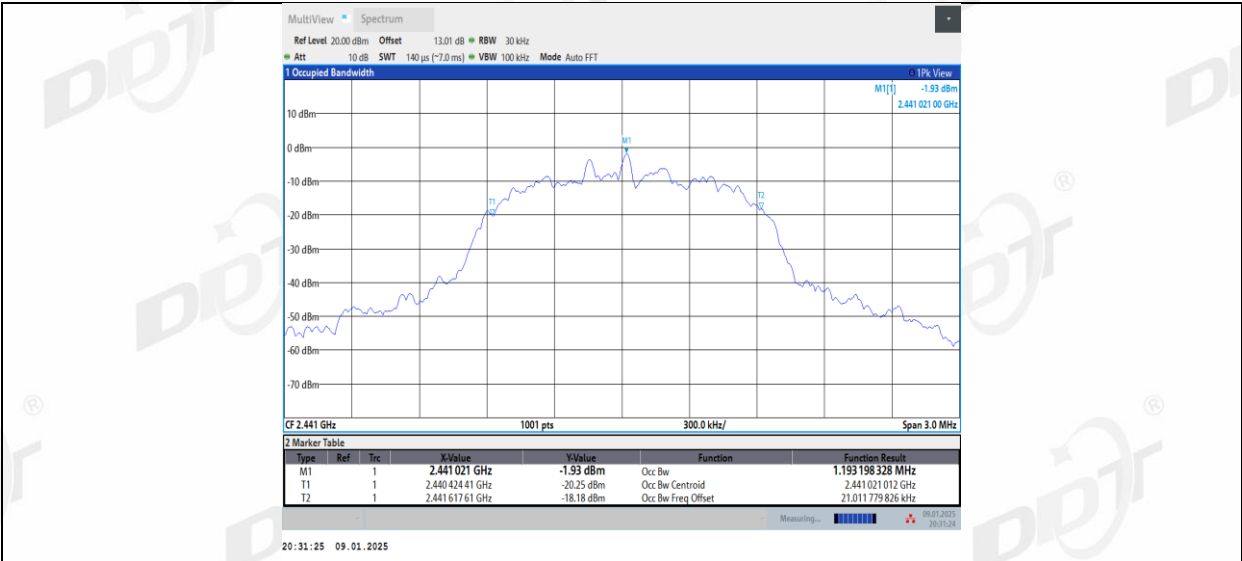

3DH5_Left side_2480

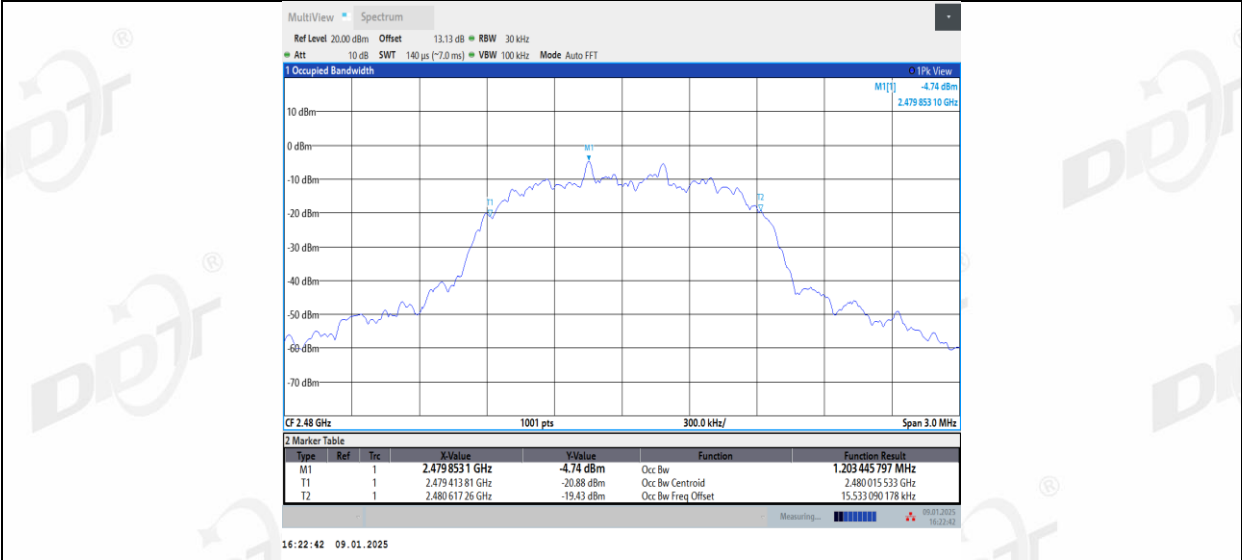


3DH5_Right side_2480

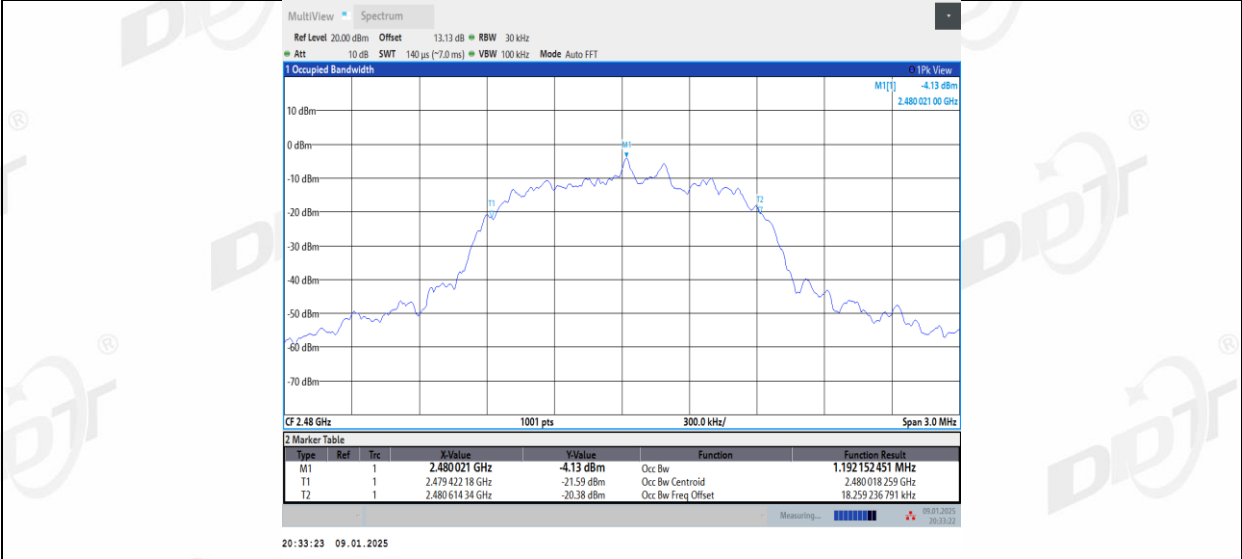

6. Maximum Peak Output Power

6.1. Block diagram of test setup

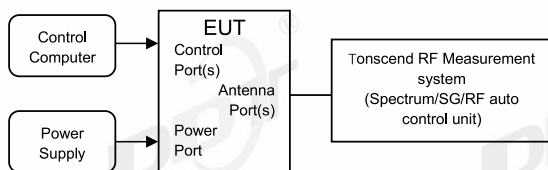

6.2. Limits

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W.

6.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 7.8.5.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:

RBW:	> 20 dB bandwidth of the emission being measured.
VBW:	$VBW \geq RBW$.
Span:	Approximately five times the 20 dB bandwidth, centered on a hopping channel.
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold
- (5) Use the marker-to-peak function to set the marker to the peak of the emission and record the results in the report.


6.4. Test result

Test Engineer:	Zoe Peng	Test Site:	RF Measurement System 4#
Ambient Condition:	21.2℃,45.9%RH	Test Date:	2025.01.09
Test Power Supply:	Battery	Sample Number:	S24121821-003


Test Mode	Antenna	Frequenc y [MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	EIRP[dBm]	EIRP Limit[dBm]	Verdict
DH5	Left side	2402	1.90	≤20.97	4.12	≤36	PASS
	Right side	2402	1.35	≤20.97	2.32	≤36	PASS
	Left side	2441	1.09	≤20.97	3.31	≤36	PASS
	Right side	2441	0.58	≤20.97	1.55	≤36	PASS
	Left side	2480	-0.63	≤20.97	1.59	≤36	PASS
	Right side	2480	-1.24	≤20.97	-0.27	≤36	PASS
2DH5	Left side	2402	2.81	≤20.97	5.03	≤36	PASS
	Right side	2402	2.12	≤20.97	3.09	≤36	PASS
	Left side	2441	2.03	≤20.97	4.25	≤36	PASS
	Right side	2441	1.47	≤20.97	2.44	≤36	PASS
	Left side	2480	0.28	≤20.97	2.50	≤36	PASS
	Right side	2480	-0.35	≤20.97	0.62	≤36	PASS
3DH5	Left side	2402	3.22	≤20.97	5.44	≤36	PASS
	Right side	2402	2.48	≤20.97	3.45	≤36	PASS
	Left side	2441	2.46	≤20.97	4.68	≤36	PASS
	Right side	2441	1.82	≤20.97	2.79	≤36	PASS
	Left side	2480	0.70	≤20.97	2.92	≤36	PASS
	Right side	2480	-0.02	≤20.97	0.95	≤36	PASS

6.5.Test graphs




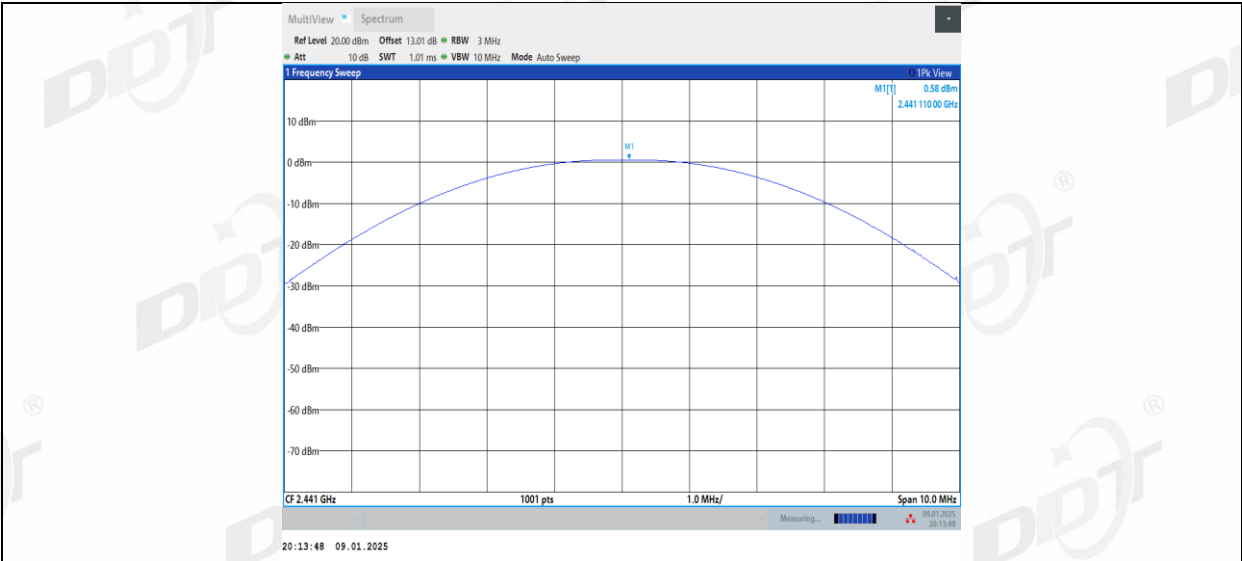


DH5_Left side_2480

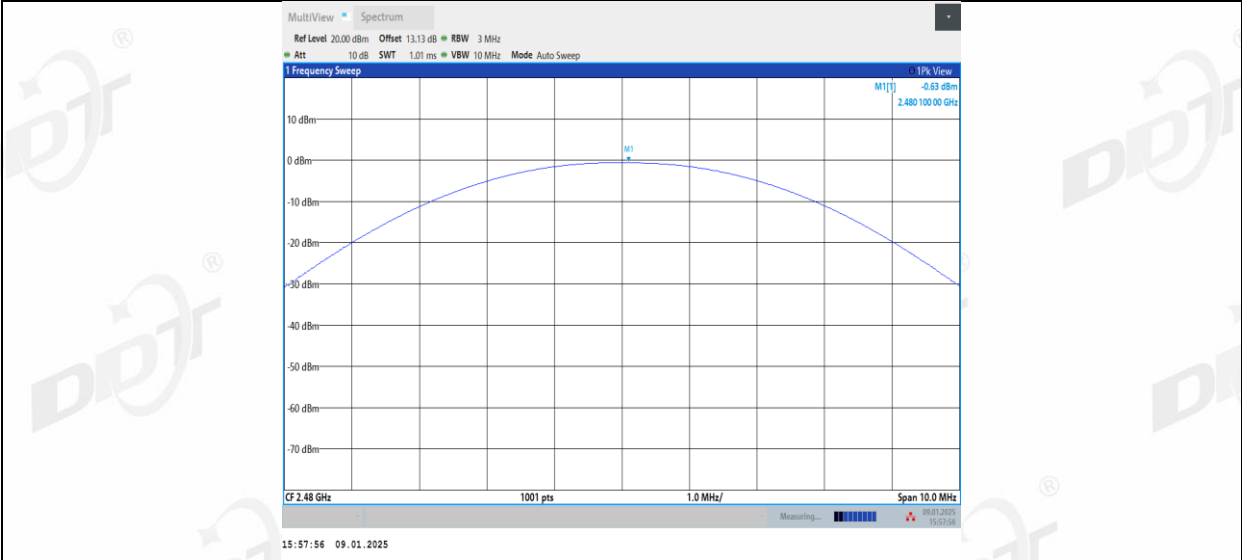


DH5_Right side_2480

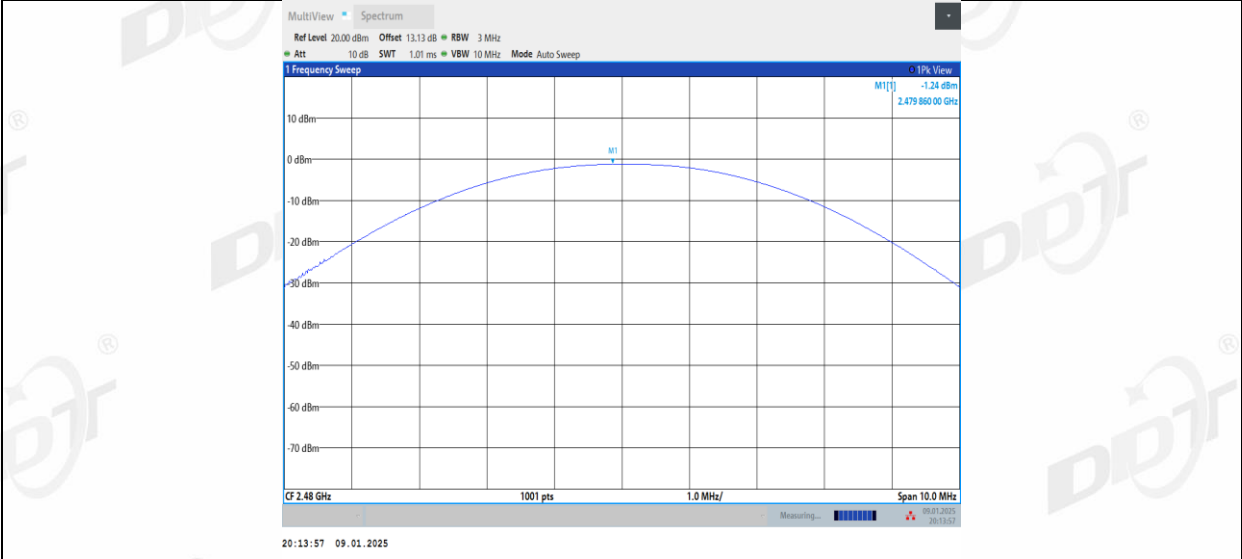


2DH5_Left side_2402

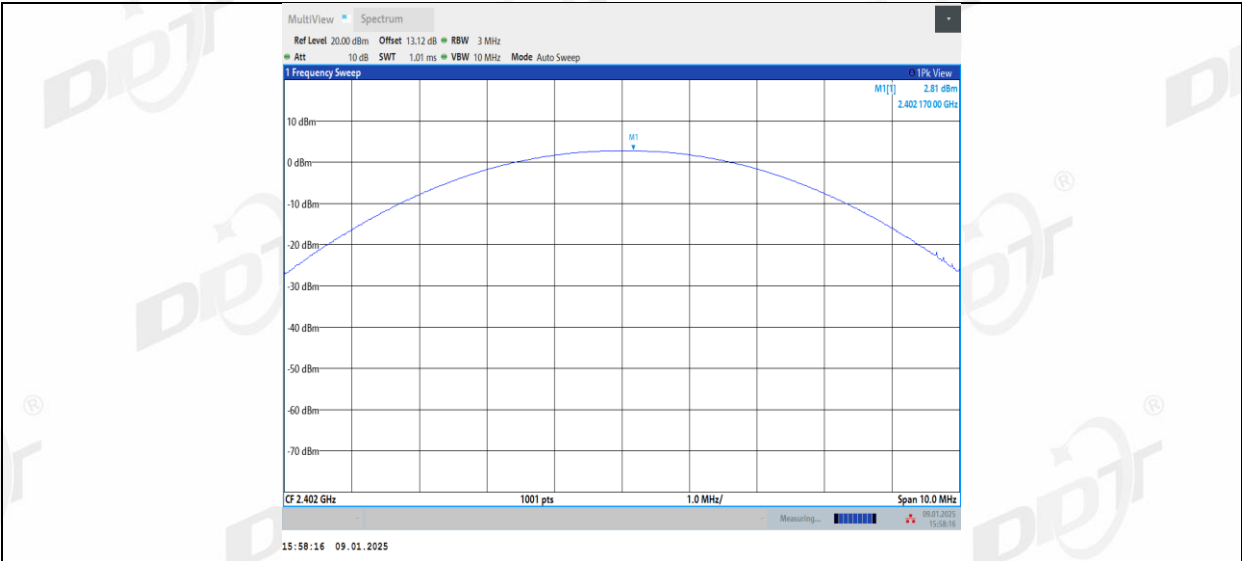


2DH5_Right side_2402

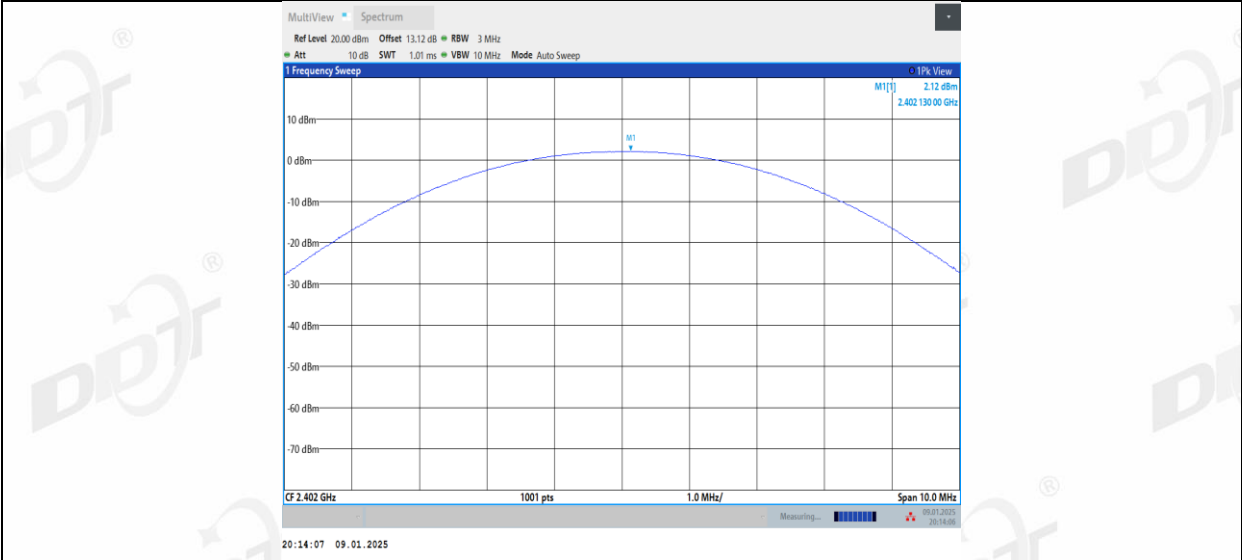


2DH5_Left side_2441

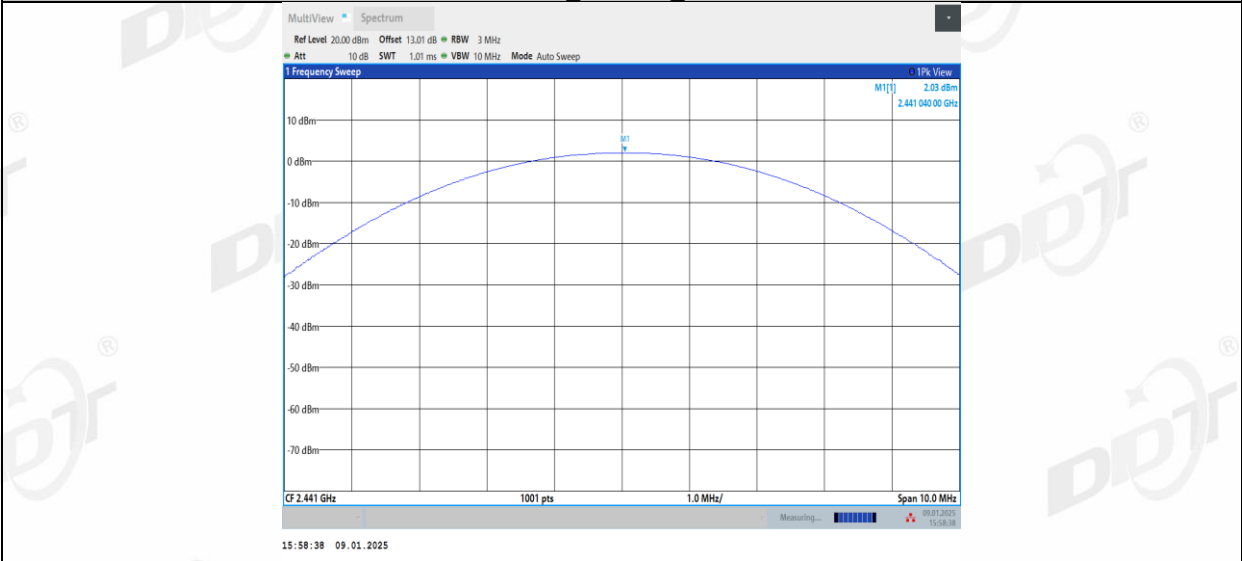


2DH5_Right side_2441

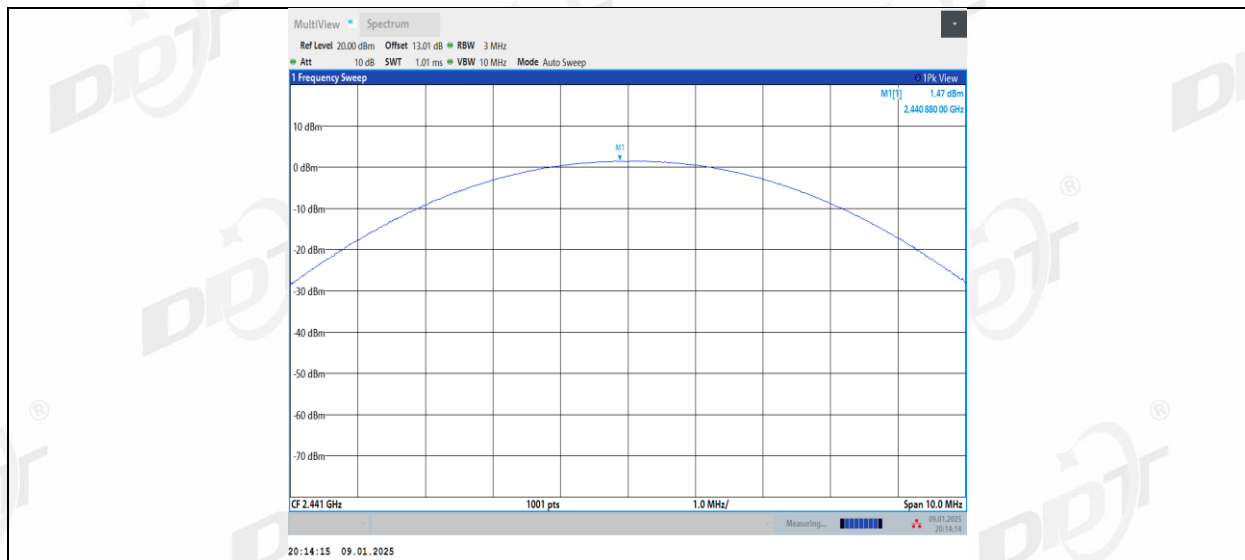


2DH5_Left side_2480

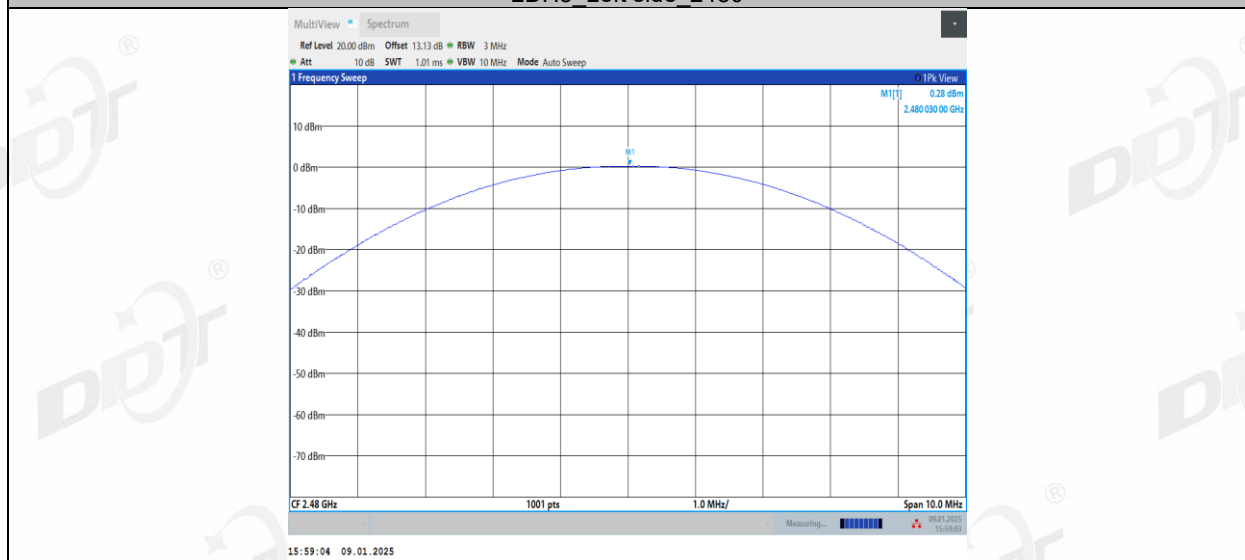


2DH5_Right side_2480

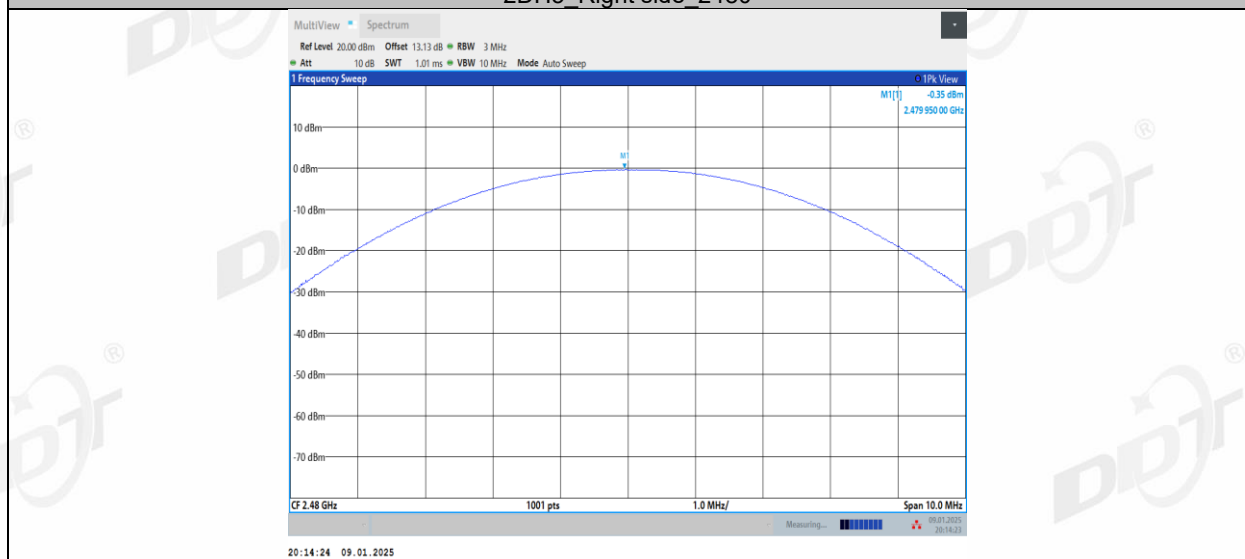


3DH5 Left side 2402

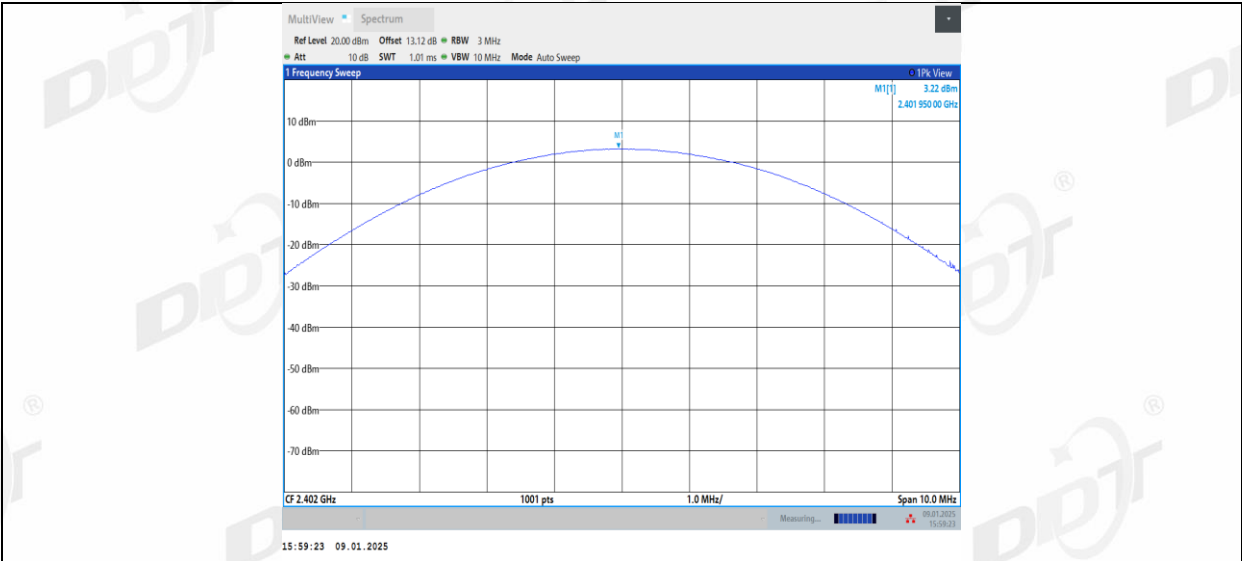


3DH5_Right side_2402

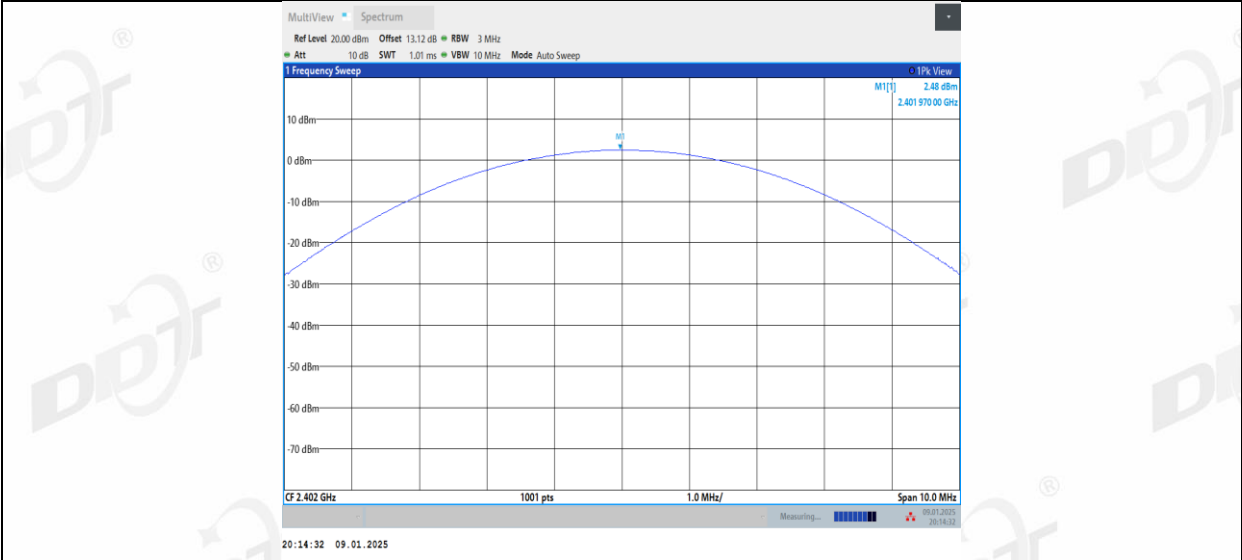


3DH5_Left side_2441

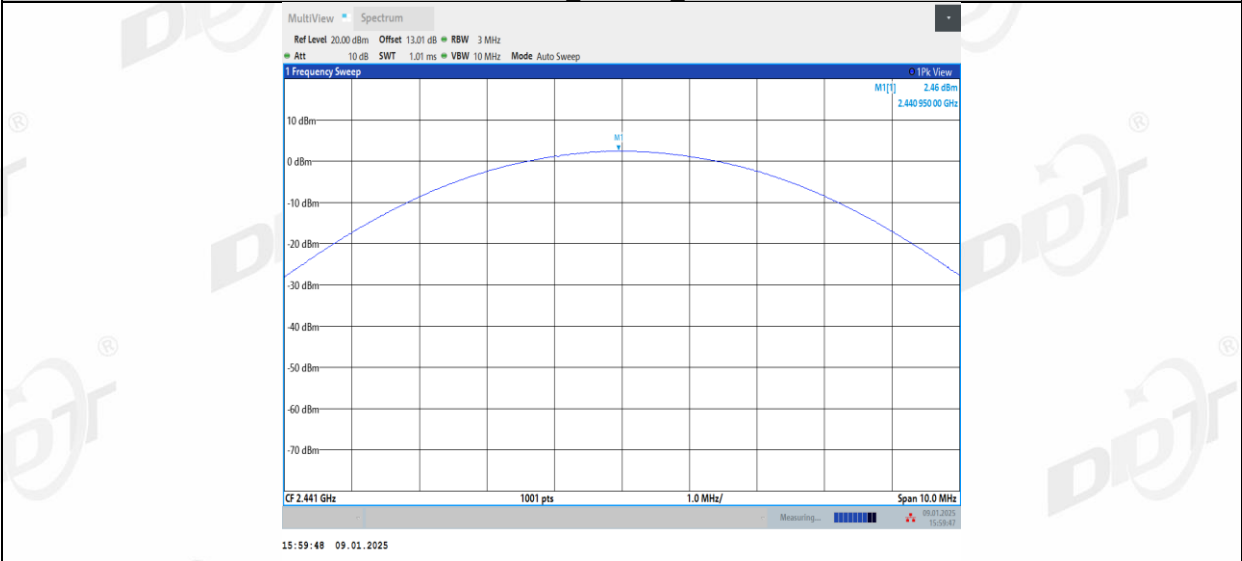


3DH5_Right side_2441

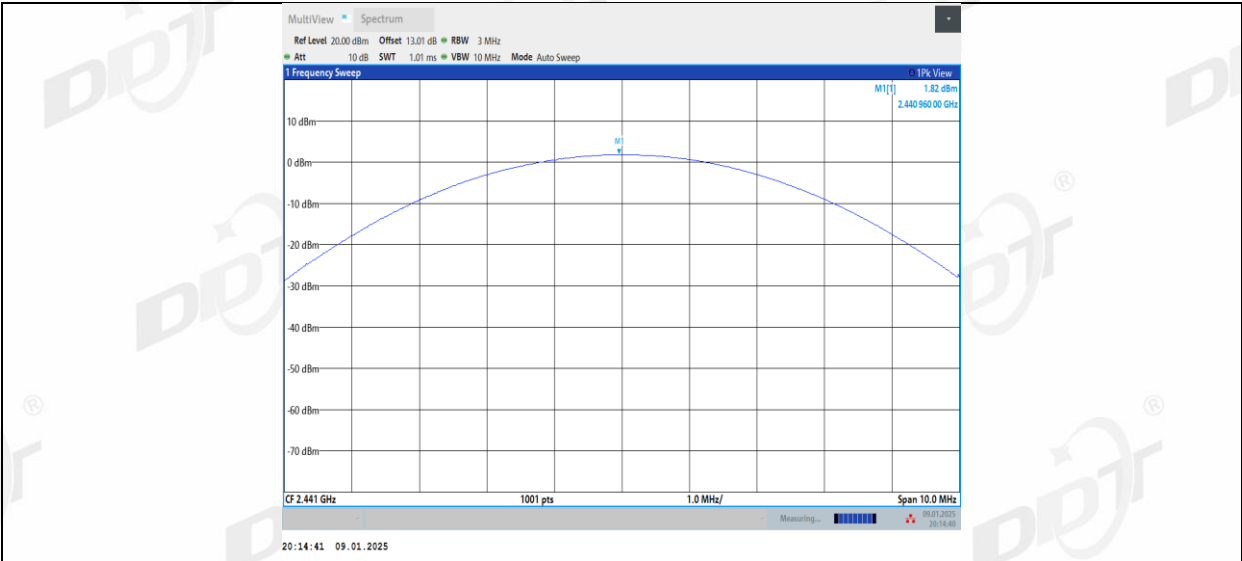

3DH5_Left side_2480

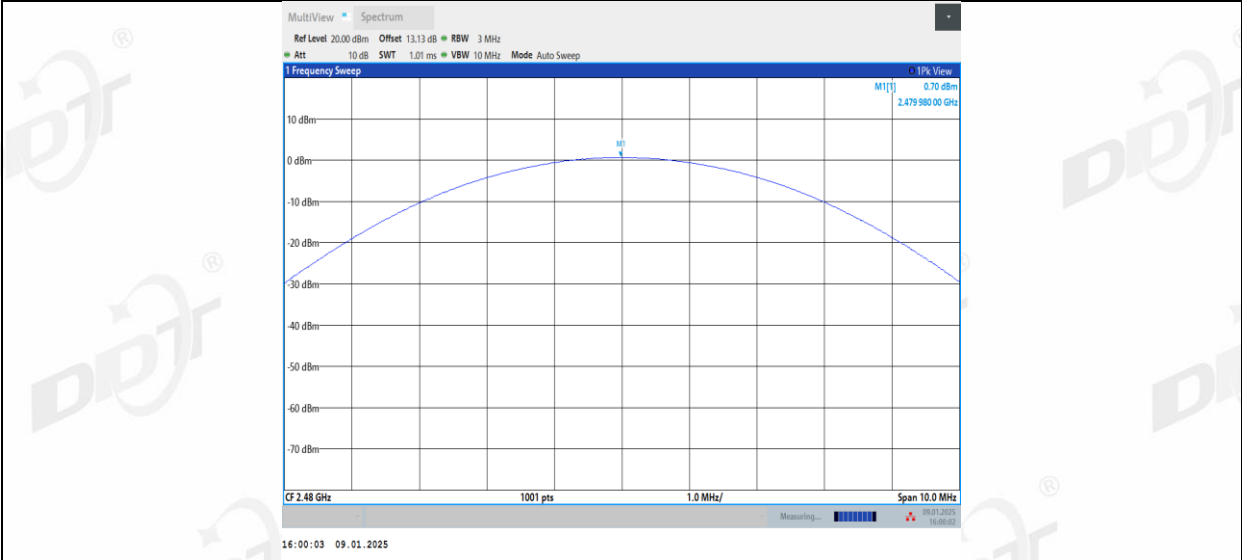


3DH5_Right side_2480

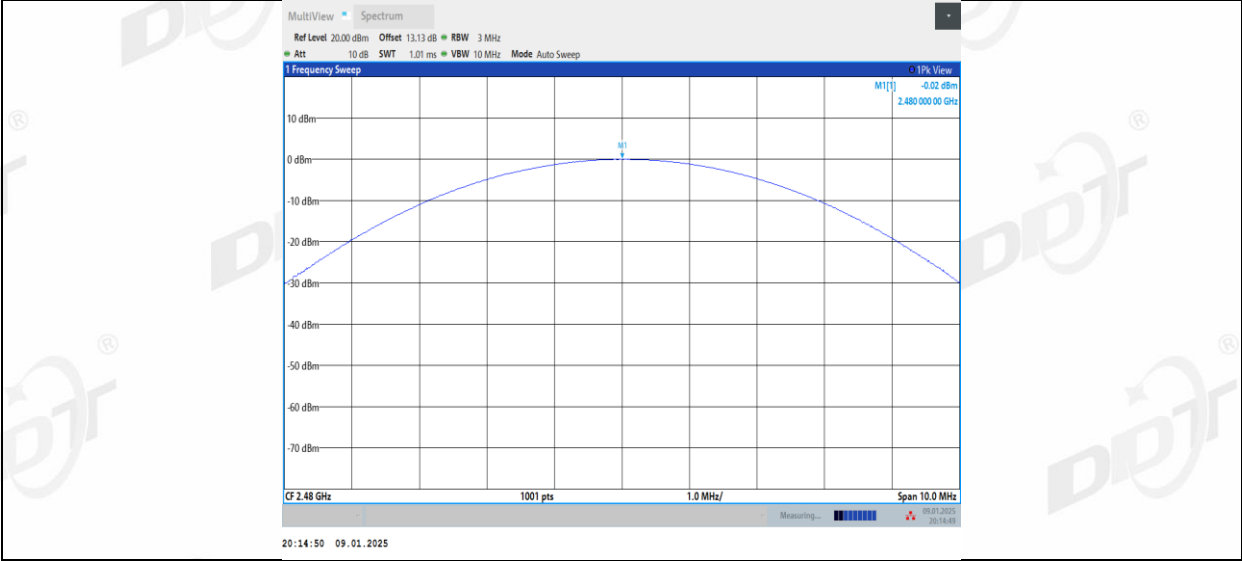

7. Carrier Frequency Separation

7.1. Block diagram of test setup

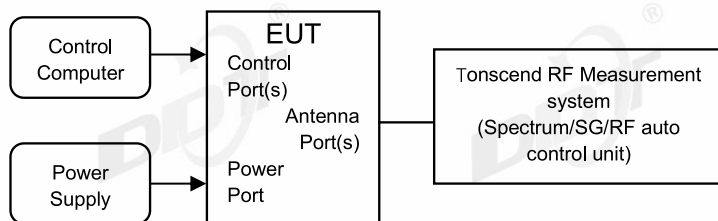

7.2. Limits

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

7.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 7.8.2.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:


RBW:	approximately 30% of the channel spacing
VBW:	VBW $\geq$ RBW.
Span:	Wide enough to capture the peaks of two adjacent channels.
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold
- (5) Use the marker-delta function to determine the separation between the peaks of the adjacent channels and record the results in the report.


7.4. Test result

Test Engineer:	Zoe Peng	Test Site:	RF Measurement System 4#
Ambient Condition:	21.2℃,45.9%RH	Test Date:	2025.01.09
Test Power Supply:	Battery	Sample Number:	S24121821-003


Test Mode	Antenna	Frequency [MHz]	Result [MHz]	Limit [MHz]	Verdict
DH5	Left side	Hop	0.998	≥0.680	PASS
	Right side	Hop	1.002	≥0.673	PASS
2DH5	Left side	Hop	0.998	≥0.887	PASS
	Right side	Hop	0.990	≥0.900	PASS
3DH5	Left side	Hop	1.000	≥0.873	PASS
	Right side	Hop	1.000	≥0.880	PASS

7.5.Test graphs

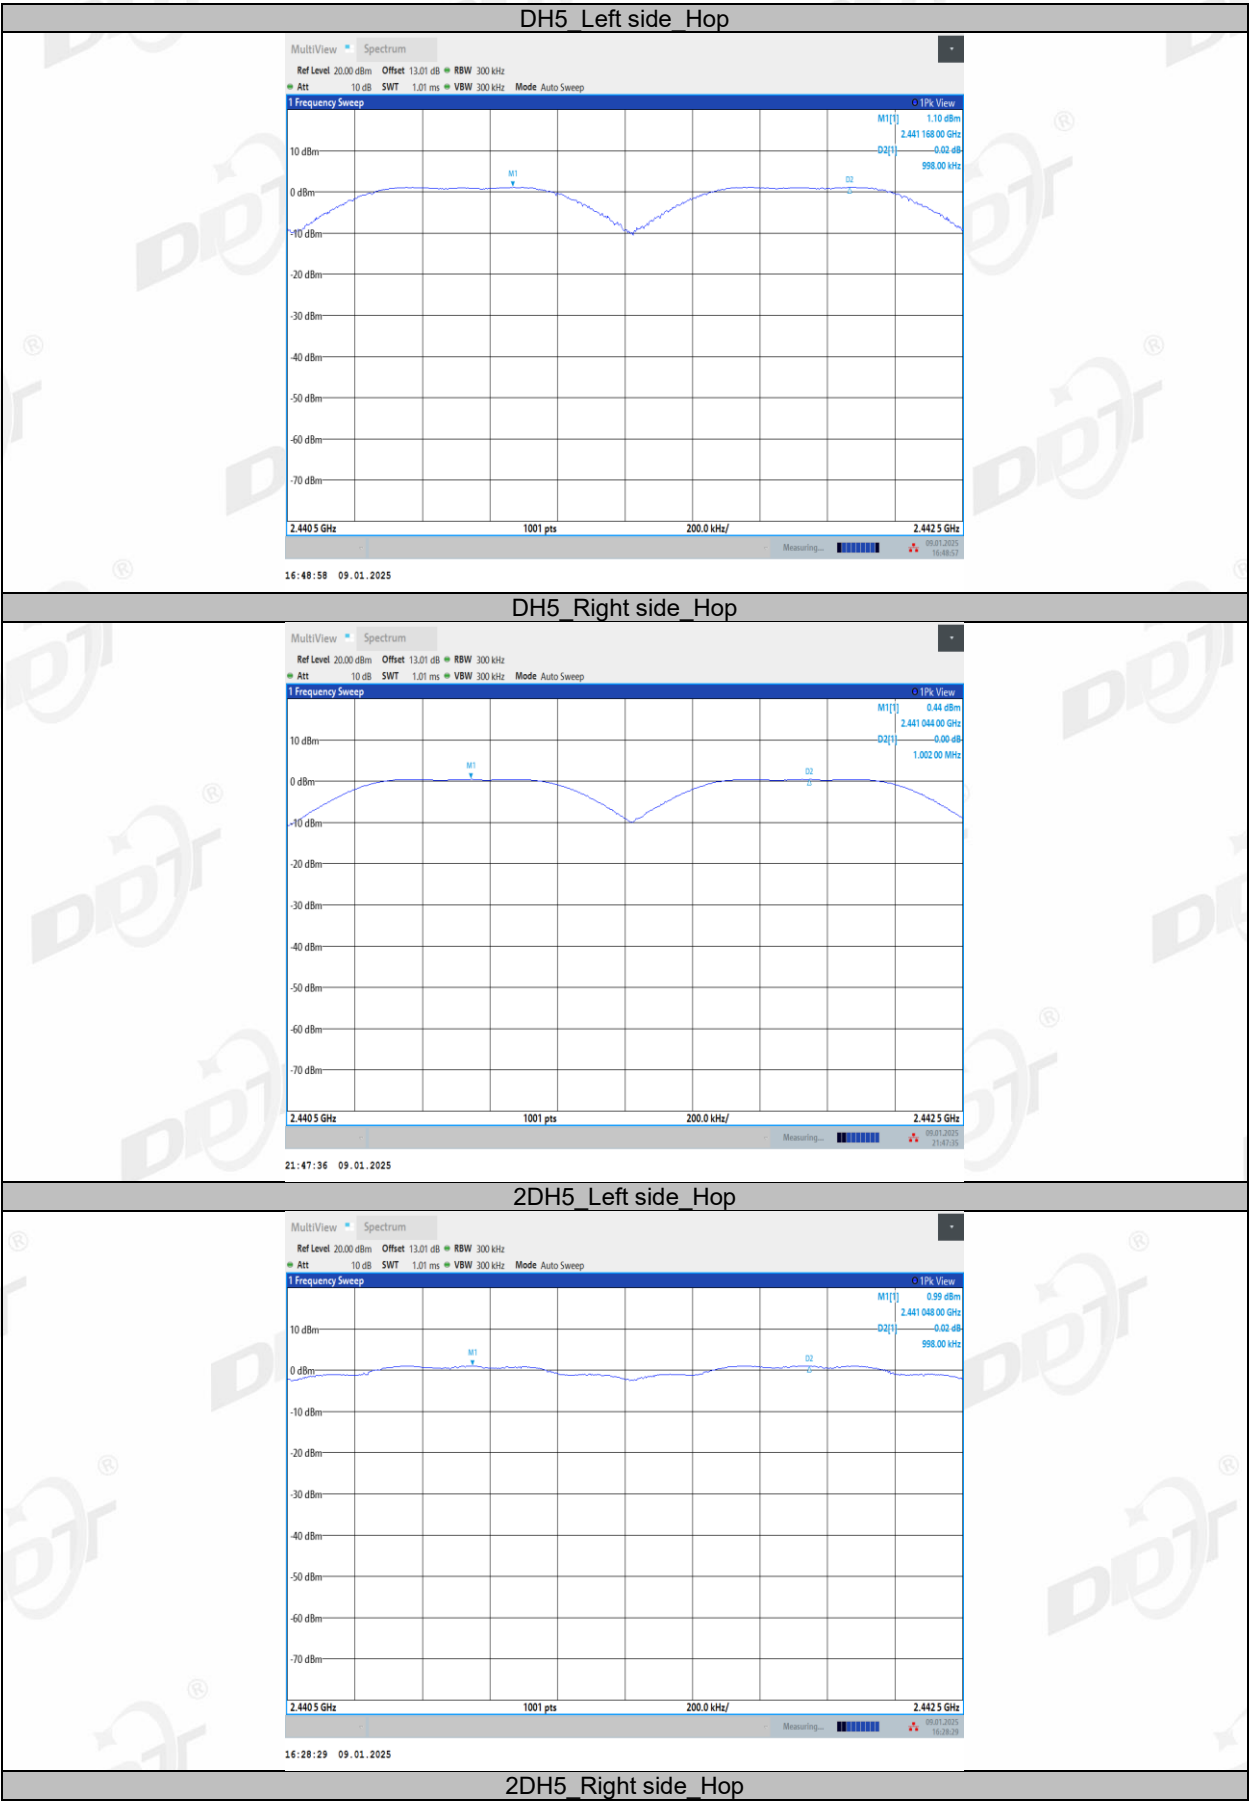


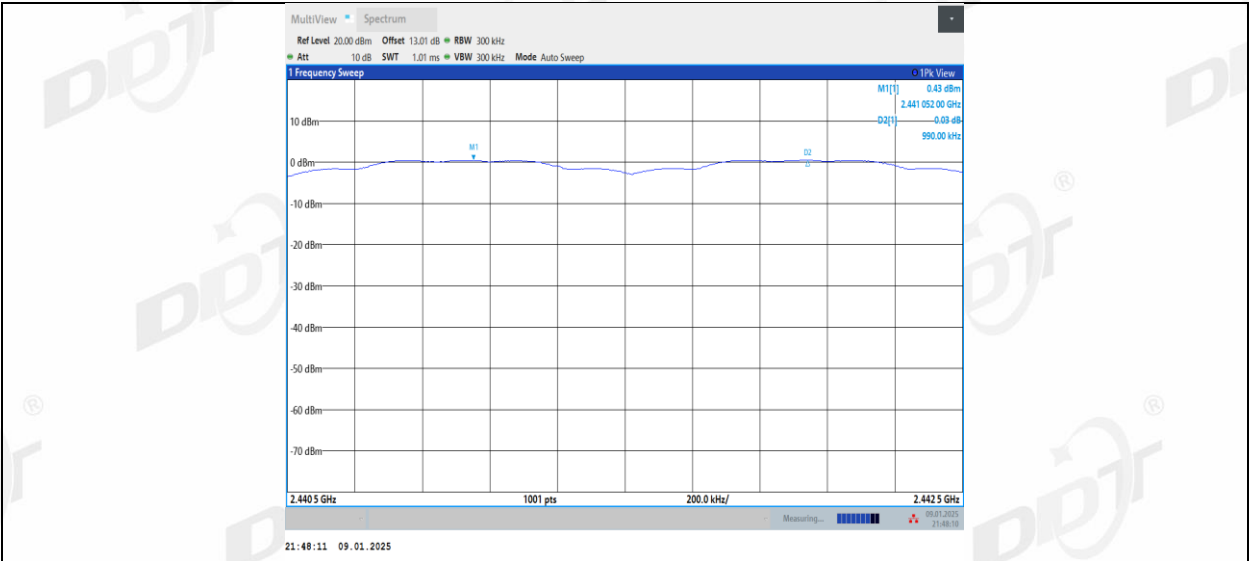

3DH5_Left side_Hop

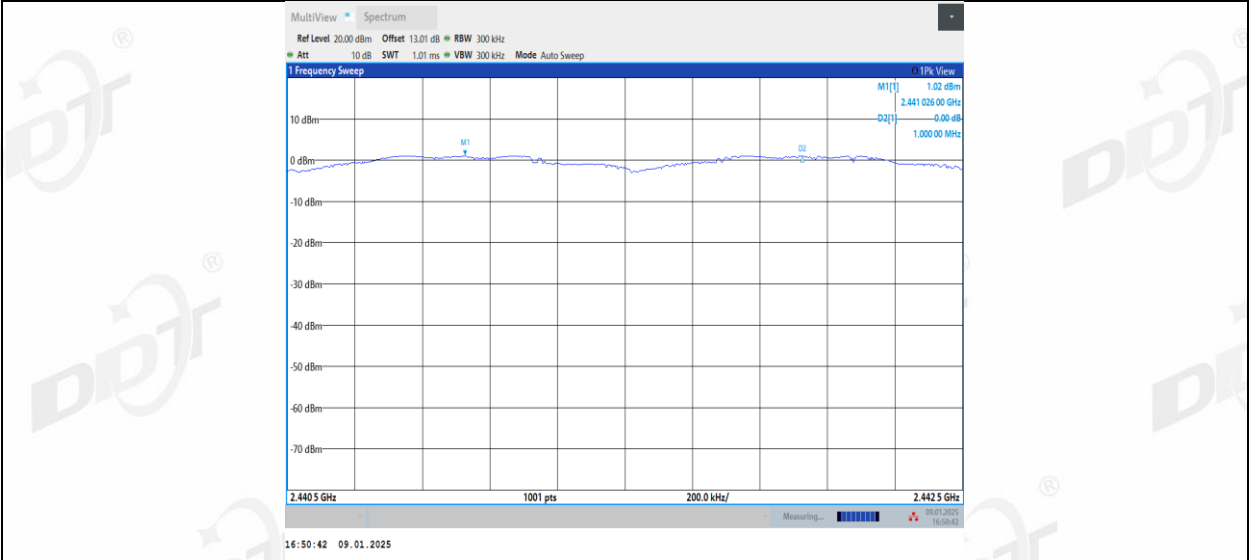


3DH5_Right side_Hop

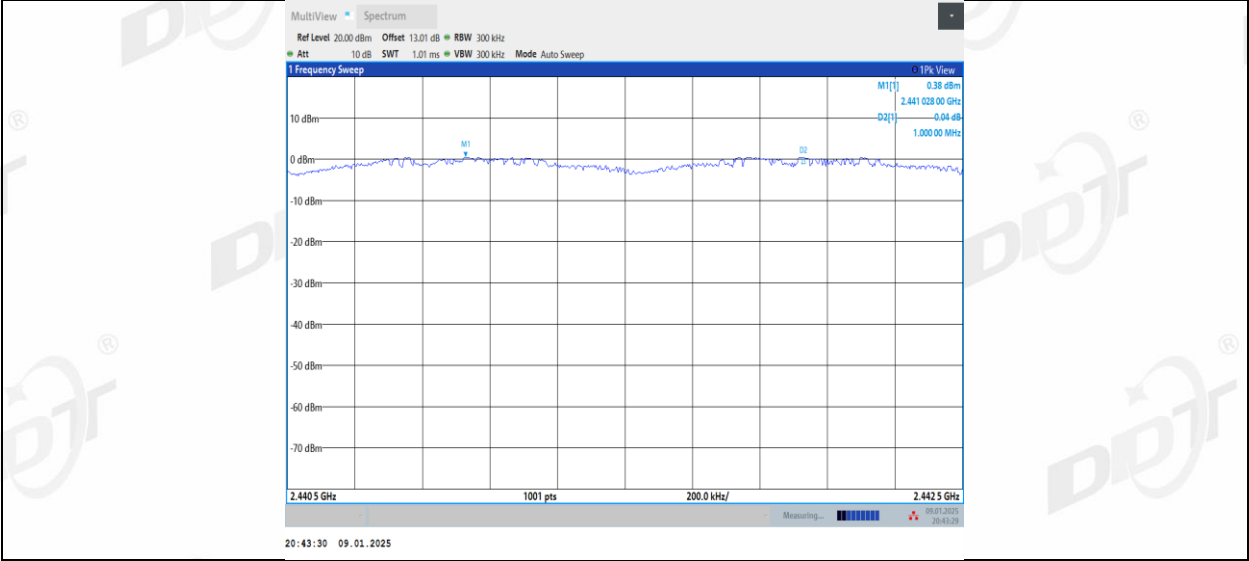

8. Dwell Time

8.1. Block diagram of test setup

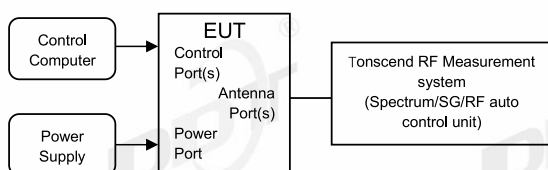

8.2. Limits

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

8.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 7.8.4.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:


RBW:	$\leq$ channel spacing and where possible RBW should be set $\gg 1 / T$
VBW:	$VBW \geq RBW$.
Span:	Zero span, centered on a hopping channel.
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Clear Write.
- (5) The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$
- (6) Measure the hopping number and on time of each pulse with spectrum analyzer in zero span set, and calculate dwell time with formula Dwell time = total hops * pulse's on time.
- (7) Measure and record the results in the report.


8.4. Test result

Test Engineer:	Zoe Peng	Test Site:	RF Measurement System 4#
Ambient Condition:	21.2℃,45.9%RH	Test Date:	2025.01.09
Test Power Supply:	Battery	Sample Number:	S24121821-003



Test Mode	Antenna	Frequency [MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Left side	Hop	0.370	317	0.117	≤0.4	PASS
	Right side	Hop	0.360	319	0.115	≤0.4	PASS
DH3	Left side	Hop	1.620	152	0.246	≤0.4	PASS
	Right side	Hop	1.620	154	0.249	≤0.4	PASS
DH5	Left side	Hop	2.870	102	0.293	≤0.4	PASS
	Right side	Hop	2.880	117	0.337	≤0.4	PASS
2DH1	Left side	Hop	0.370	319	0.118	≤0.4	PASS
	Right side	Hop	0.370	318	0.118	≤0.4	PASS
2DH3	Left side	Hop	1.630	153	0.249	≤0.4	PASS
	Right side	Hop	1.630	159	0.259	≤0.4	PASS
2DH5	Left side	Hop	2.880	118	0.34	≤0.4	PASS
	Right side	Hop	2.880	106	0.305	≤0.4	PASS
3DH1	Left side	Hop	0.370	321	0.119	≤0.4	PASS
	Right side	Hop	0.380	320	0.122	≤0.4	PASS
3DH3	Left side	Hop	1.630	153	0.249	≤0.4	PASS
	Right side	Hop	1.620	157	0.254	≤0.4	PASS
3DH5	Left side	Hop	2.880	99	0.285	≤0.4	PASS
	Right side	Hop	2.880	114	0.328	≤0.4	PASS

8.5.Test graphs

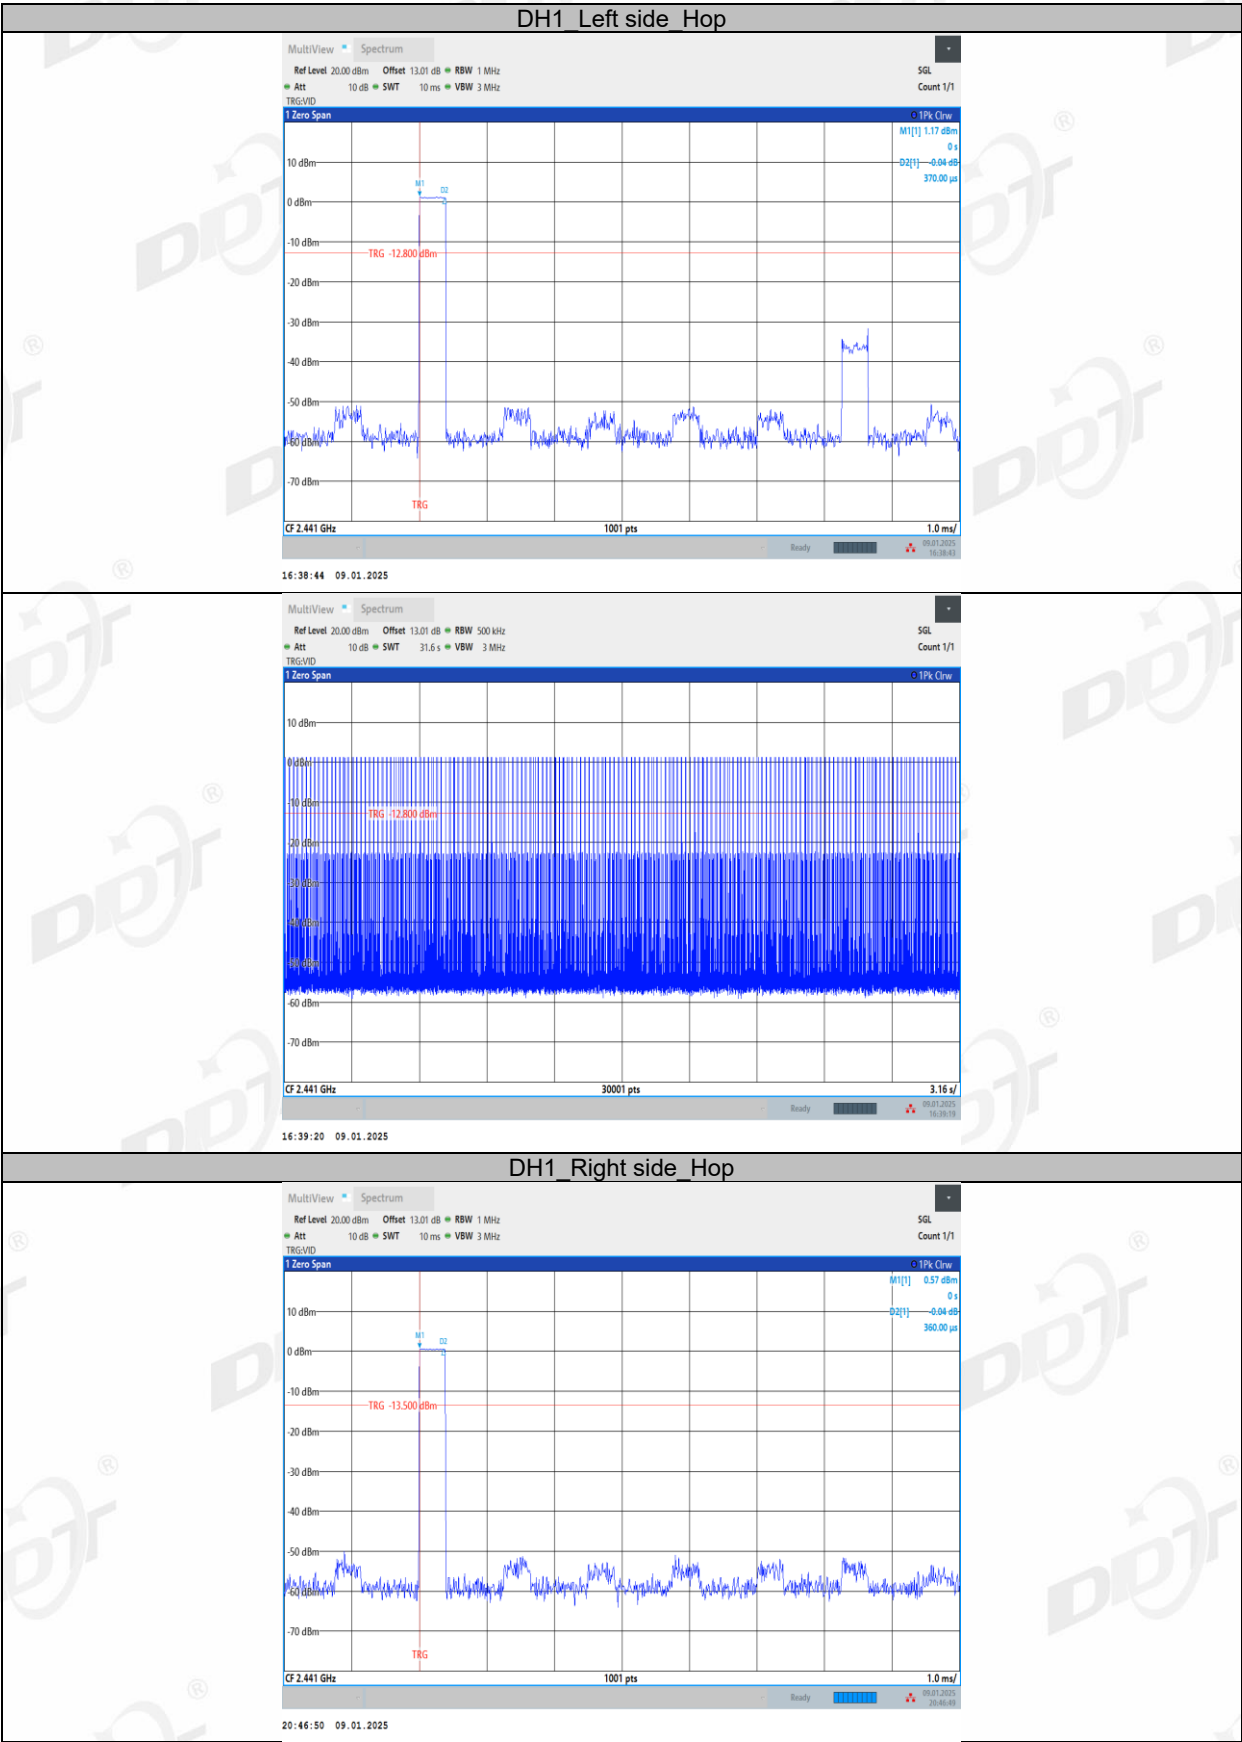

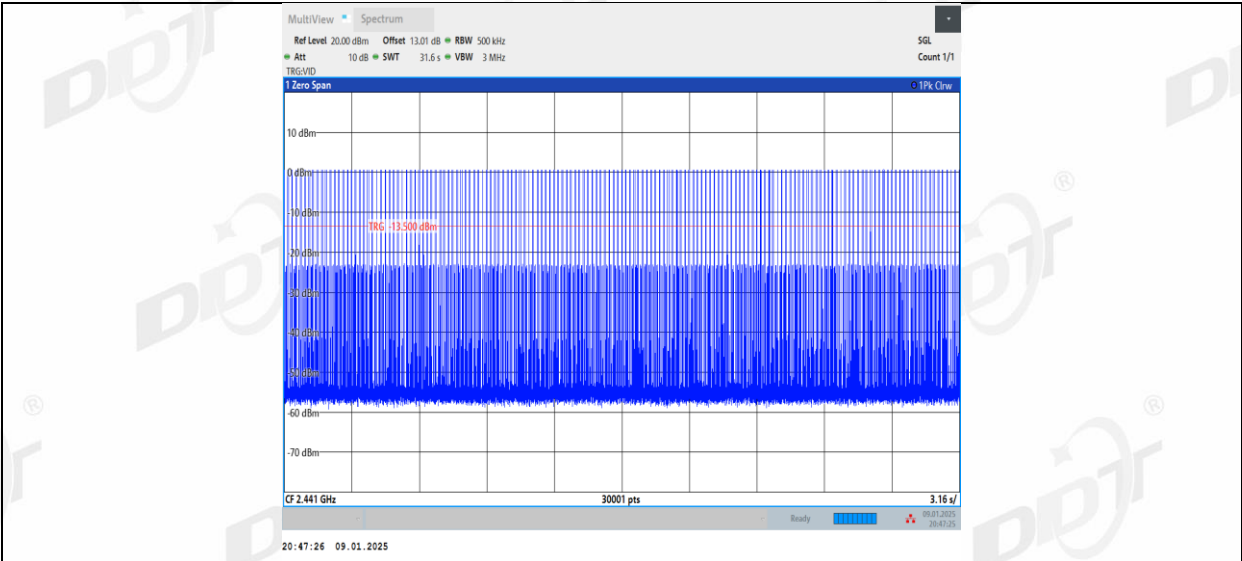

DH3 Left side Hop

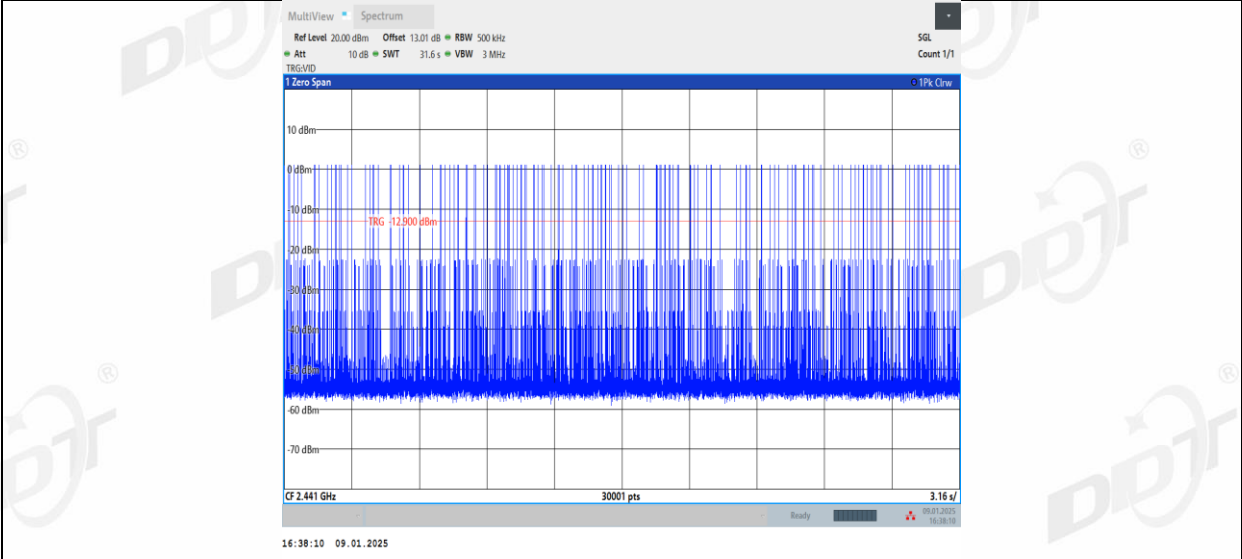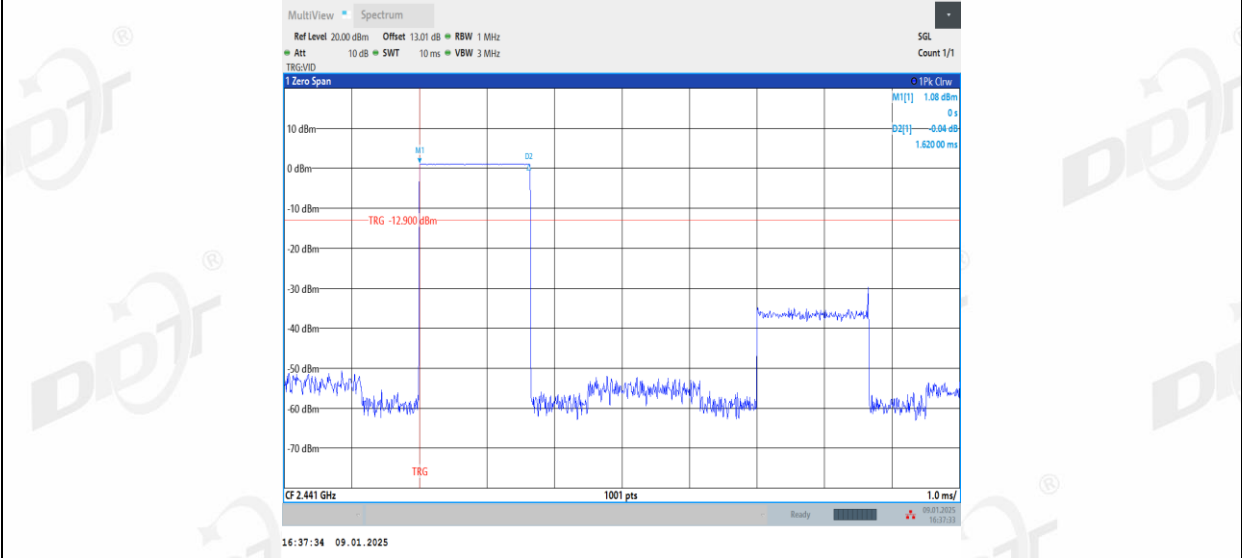

DH3 Right side Hop