


FCC RF Test Report

APPLICANT : Nokia Shanghai Bell Co. Ltd.
EQUIPMENT : Nokia FastMile 5G Gateway 3.2
BRAND NAME : Nokia
MODEL NAME : 5G16-12W-A
FCC ID : 2ADZR5G1612WA
STANDARD : 47 CFR Part 2, 96
CLASSIFICATION : Citizens Band End User Devices (CBE)
EQUIPMENT TYPE : End User Equipment
TEST DATE(S) : Nov. 16, 2021 ~ Jan. 22, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.



Reviewed by: Jason Jia / Supervisor



Approved by: Alex Wang / Manager



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Applicant.....	5
1.2 Manufacturer	5
1.3 Feature of Equipment Under Test.....	5
1.4 Maximum EIRP Power and Emission Designator	6
1.5 Testing Site.....	6
1.6 Test Software	6
1.7 Applied Standards	7
2 Test Configuration of Equipment Under Test	8
2.1 Test Mode.....	8
2.2 Connection Diagram of Test System	9
2.3 Support Unit used in test configuration	9
2.4 Measurement Results Explanation Example	9
2.5 Frequency List of Low/Middle/High Channels.....	10
3 Conducted Test Items.....	12
3.1 Measuring Instruments.....	12
3.2 Conducted Output Power	13
3.3 EIRP	14
3.4 Occupied Bandwidth	15
3.5 Conducted Band Edge	16
3.6 Conducted Spurious Emission	17
3.7 Frequency Stability.....	18
4 Radiated Test Items	19
4.1 Measuring Instruments.....	19
4.2 Test Setup	19
4.3 Test Result of Radiated Test.....	20
4.4 Radiated Spurious Emission	21
5 List of Measuring Equipment.....	22
6 Uncertainty of Evaluation.....	23
Appendix A. Test Results of Conducted Test	
Appendix B. Test Results of EIRP and Radiated Test	
Appendix C. Test Setup Photographs	



History of this test report

Report No.	Version	Description	Issued Date
FG1O2908D	01	Initial issue of report	Jan. 22, 2022

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Reporting only	-
-	§96.41	Peak-to-Average Ratio	Not applicable	Not applicable for End User Devices
3.3	§96.41	Maximum E.I.R.P	Pass	-
		Maximum Power Spectral Density	Not applicable	Not applicable for End User Devices
3.4	§2.1049 §96.41	Occupied Bandwidth	Reporting only	-
3.5	§2.1051 §96.41	Conducted Band Edge Measurement Adjacent Channel Leakage Ratio	Pass	-
3.6	§2.1051 §96.41	Conducted Spurious Emission	Pass	-
3.7	§2.1055	Frequency Stability for Temperature & Voltage	Pass	-
4.4	§2.1051 §96.41	Radiated Spurious Emission	Pass	Under limit 12.17 dB at 7230.000 MHz

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Applicant

Nokia Shanghai Bell Co. Ltd.

No. 388, Ningqiao Rd. Pilot Free Trade Zone, Shanghai 201206, China

1.2 Manufacturer

Nokia Solutions and Networks Oy

Karakaari 7 02610 Espoo Finland

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	Nokia FastMile 5G Gateway 3.2
Brand Name	Nokia
Model Name	5G16-12W-A
FCC ID	2ADZR5G1612WA
Tx Frequency	LTE Band 42 : 3550 MHz ~ 3600 MHz LTE Band 43 : 3600 MHz ~ 3700 MHz LTE Band 48: 3550 MHz ~ 3700 MHz
Rx Frequency	LTE Band 42 : 3550 MHz ~ 3600 MHz LTE Band 43 : 3600 MHz ~ 3700 MHz LTE Band 48: 3550 MHz ~ 3700 MHz
Bandwidth	5MHz / 10MHz / 15MHz / 20MHz
Maximum Output Power to Antenna	LTE Band 48: 16.87 dBm LTE Band 48C_CA : 16.97 dBm
Antenna Type / Gain	Dipole Antenna with gain 6.0 dBi
Type of Modulation	QPSK / 16QAM / 64QAM / 256QAM
HW Version	3TG01797A
SW Version	5GGW3-OMNI-1_D210400Bh3T0301E0156
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two types of EUT: sample 1 with 1st source antenna and sample 2 with 2nd source antenna. According to the difference, we chose sample 1 to perform full test and sample 2 to verify the worst cases of RSE.
3. LTE Band 48 overlaps the entire frequency range of LTE Band 43/42. Therefore, the test results provided in this report covers Band 48 as well as Band 43/42.

1.4 Maximum EIRP Power and Emission Designator

LTE Band 48		QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
20	3560~3690	0.1936	18M2G7D	0.1928	18M3W7D

LTE Band 48 CA		QPSK		16QAM/64QAM/256QAM	
BW (MHz)		Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
20MHz+20MHz		0.1982	37M6G7D	0.1936	37M8W7D

Note: According to engineering evaluation, only the maximum bandwidth and the worst test results of PSK & QAM are shown in the report.

1.5 Testing Site

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-KS TH01-KS	CN1257	314309

1.6 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH04-KS	AUDIX	E3	6.2009-8-24a



1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ 47 CFR Part 2, 96
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 940660 D01 Part 96 CBRS v03
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Test Mode


Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

Test Items	Band	Bandwidth (MHz)						Modulation				RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H
Max. Output Power	48	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v
Adjacent Channel Leakage Ratio	48	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v
26dB and 99% Bandwidth	48	-	-				v	v	v					v		v	
Conducted Band Edge	48	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v
Conducted Spurious Emission	48	-	-	v	v	v	v	v				v			v	v	v
E.R.P / E.I.R.P	48	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v
Frequency Stability	48	-	-				v	v				v				v	
Radiated Spurious Emission	48	Worst Case														v	

Test Items	Band	Bandwidth (MHz)							Modulation				RB #			Test Channel			
		20+20	20+15	15+20	20+10	10+20	20+5	5+20	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H	
Max. Output Power	48C	v	v	v	v	v	v	v	v	v	v	v	v		v	v	v	v	
26dB and 99% Bandwidth	48C	v							v	v					v		v		
Conducted Band Edge	48C	v	v	v	v	v	v	v	v	v	v	v	v		v	v	v	v	
Conducted Spurious Emission	48C	v	v	v	v	v	v	v	v				v			v	v	v	
Adjacent Channel Leakage Ratio	48C	v	v	v	v	v	v	v	v	v	v	v	v		v	v	v	v	
E.R.P / E.I.R.P	48C	v	v	v	v	v	v	v	v	v	v	v	v		v	v	v	v	
Radiated Spurious Emission	48C	Worst Case																v	
Note	1. The mark “v ” means that this configuration is chosen for testing 2. The mark “-” means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. Frequency stability only shows the worst case of LTE Band 48. 5. All test items are based on engineering evaluation. 6. All the radiated test cases were performed with Adapter. 7. The OBW test item assess the worst case of maximum BW, RSE with good margin>6dB thus only test Middle CH.																		

2.2 Connection Diagram of Test System

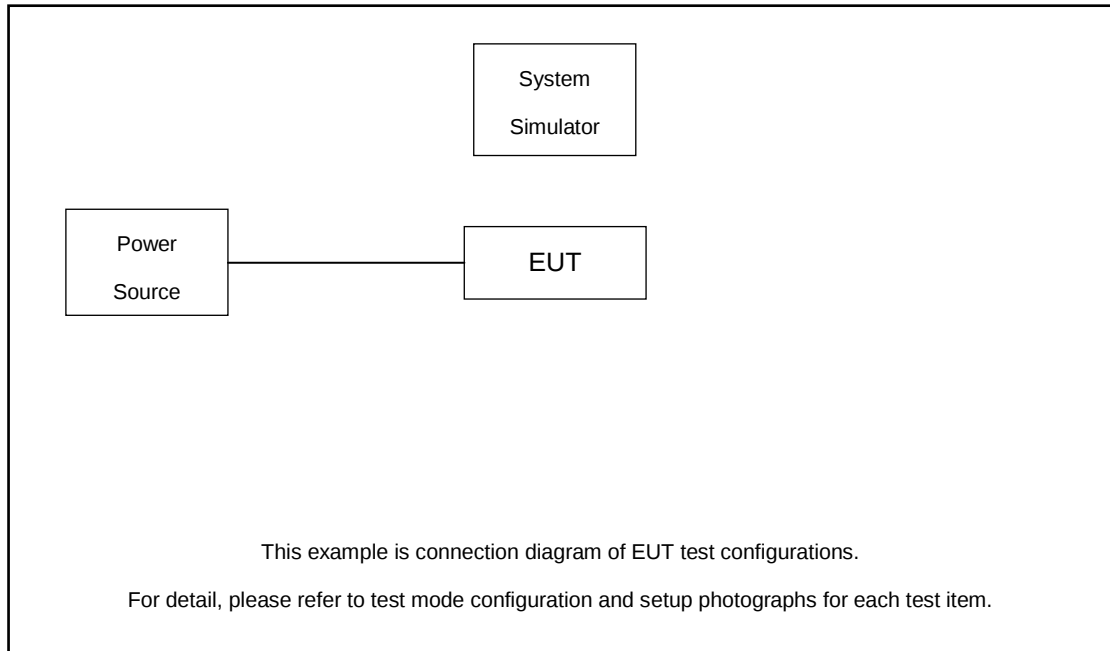

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Power Supply	GWINSTEK	PSS-2002	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 6.0 dB.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 6.0 \text{ (dB)} \end{aligned}$$

2.5 Frequency List of Low/Middle/High Channels

LTE Band 48 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	55340	55990	56640
	Frequency	3560.0	3625.0	3690.0
15	Channel	55315	55990	56665
	Frequency	3557.5	3625.0	3692.5
10	Channel	55290	55990	56690
	Frequency	3555.0	3625.0	3695.0
5	Channel	55265	55990	56715
	Frequency	3552.5	3625.0	3697.5

LTE Band 48C_CA Channel and Frequency List					
BW [MHz]	Channel/Frequency(MHz)		Lowest	Middle	Highest
5 + 20	PCC	Channel	55273	55898	56523
		Frequency	3553.3	3615.8	3678.3
	SCC	Channel	55390	56015	56640
		Frequency	3565	3627.5	3690
20 + 5	PCC	Channel	55340	55965	56590
		Frequency	3560	3622.5	3685
	SCC	Channel	55457	56082	56707
		Frequency	3571.7	3634.2	3696.7
10 + 20	PCC	Channel	55295	55896	56496
		Frequency	3555.5	3615.6	3675.6
	SCC	Channel	55439	56040	56640
		Frequency	3569.9	3630	3690
20 + 10	PCC	Channel	55340	55941	56541
		Frequency	3560	3620.1	3680.1
	SCC	Channel	55484	56085	56685
		Frequency	3574.4	3634.5	3694.5
15 + 20	PCC	Channel	55318	55893	56469
		Frequency	3557.8	3615.3	3672.9
	SCC	Channel	55489	56064	56640
		Frequency	3574.9	3632.4	3690
20 + 15	PCC	Channel	55340	55916	56491
		Frequency	3560	3617.6	3675.1
	SCC	Channel	55511	56087	56662
		Frequency	3577.1	3634.7	3692.2
20 + 20	PCC	Channel	55340	55891	56442
		Frequency	3560	3615.1	3670.2
	SCC	Channel	55538	56089	56640
		Frequency	3579.8	3634.9	3690


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power

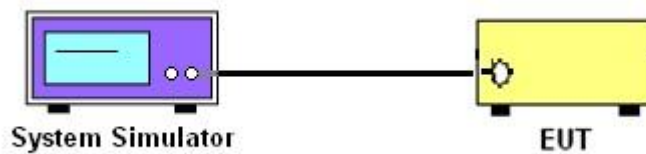

3.1.3 EIRP, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

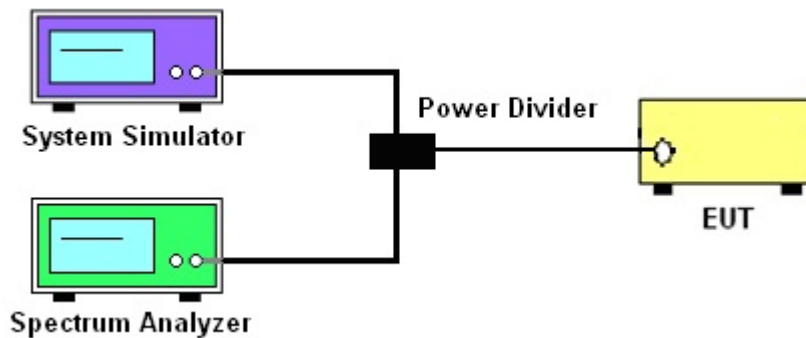

3.1.4 Frequency Stability

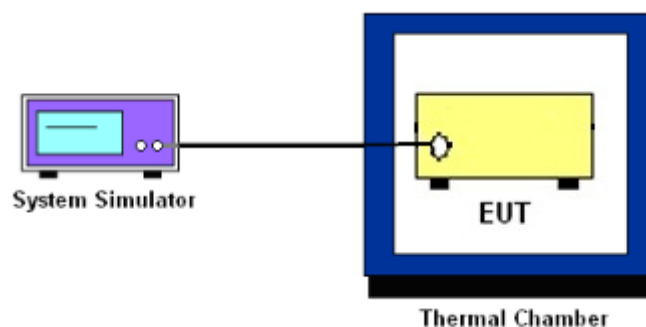

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.

3.2 Conducted Output Power

3.2.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

3.3 EIRP

3.3.1 Description of the EIRP Measurement

EIRP limits for CBRS equipment as below table:

Device		Maximum EIRP (dBm/10 MHz)	Maximum PSD (dBm/MHz)
Applied	End User Device	23	N/A
☐	Category A CBSD	30	20
☐	Category B CBSD	47	37

Remark: The worst case EIRP shown in this section is found with LTE operating only using 1RB. As such, the EIRP/10MHz and full channel EIRP values will be identical since 1RB is fully contained within all available channel bandwidths for LTE Band 48 (i.e. 5, 10, 15, 20MHz)

3.3.2 Test Procedures for EIRP

1. Establishing a communications link with the call box (Base station) to measure the Maximum conducted power, the parameters were set to force the EUT transmitting at maximum output power level. Use the average power measurement function to measure total channel power of each channel bandwidth (per ANSI C63.26-2015 Section 5.2.1)
2. Determining ERP and/or EIRP from conducted RF output power measurements (Per ANSI C63.26-2015 Section 5.2.5.5)
$$\text{EIRP} = P_T + G_T - L_C, \text{ ERP} = \text{EIRP} - 2.15, \text{ where}$$
$$P_T = \text{transmitter output power in dBm}$$
$$G_T = \text{gain of the transmitting antenna in dBi}$$
$$L_C = \text{signal attenuation in the connecting cable between the transmitter and antenna in dB}$$

3.4 Occupied Bandwidth

3.4.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.5 Conducted Band Edge

3.5.1 Description of Conducted Band Edge Measurement

Part 96.41 (e) (1) (ii)

For End User Devices the emission limits outside the fundamental are as follows:

Within 0 MHz to B MHz above and below the assigned channel ≤ -13 dBm/MHz

Greater than B MHz above and below the assigned channel ≤ -25 dBm/MHz

where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device.

Notwithstanding the emission limits in this paragraph, the Adjacent Channel Leakage Ratio for End User Devices shall be at least 30 dB.

Part 96.41 (e) (2)

For CBSDs and End User Devices, the conducted power of emissions below 3540 MHz or above 3710 MHz shall not exceed -25 dBm/MHz, and the conducted power of emissions below 3530 MHz or above 3720 MHz shall not exceed -40 dBm/MHz

3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured.
3. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Beyond the 1 MHz band from the band edge, RBW=1MHz was used
5. Offset has included the duty factor for LTE Band 48. Duty factor $=10 \log (1/x)$, where x is the measured duty cycle.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.6 Conducted Spurious Emission

3.6.1 Description of Conducted Spurious Emission Measurement

96.41 (e)(2)

The conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz.

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
6. Set spectrum analyzer with RMS detector.
7. Taking the record of maximum spurious emission.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. The limit line is -40dBm/MHz.

3.7 Frequency Stability

3.7.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency

3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

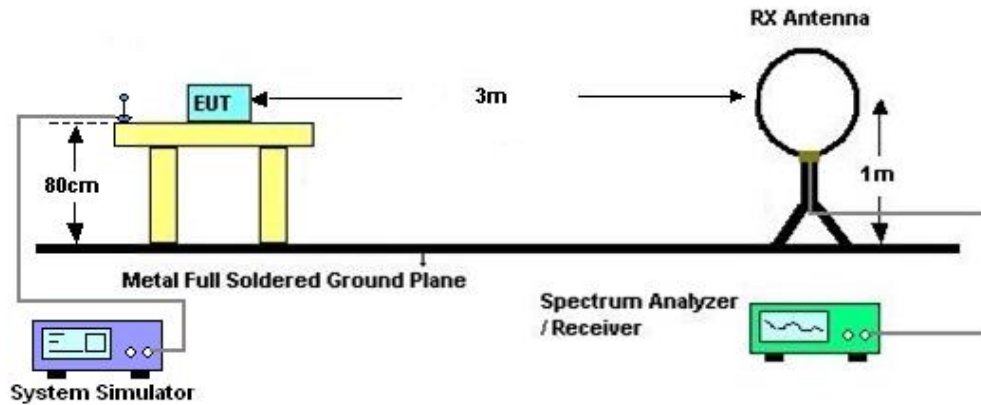

4.2.2 For radiated test from 30MHz to 1GHz

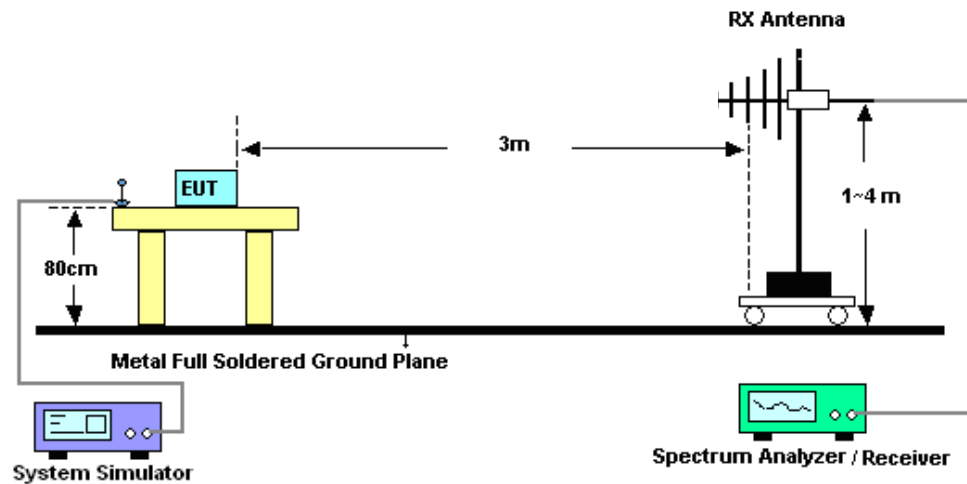

4.2.3 For radiated test above 1GHz

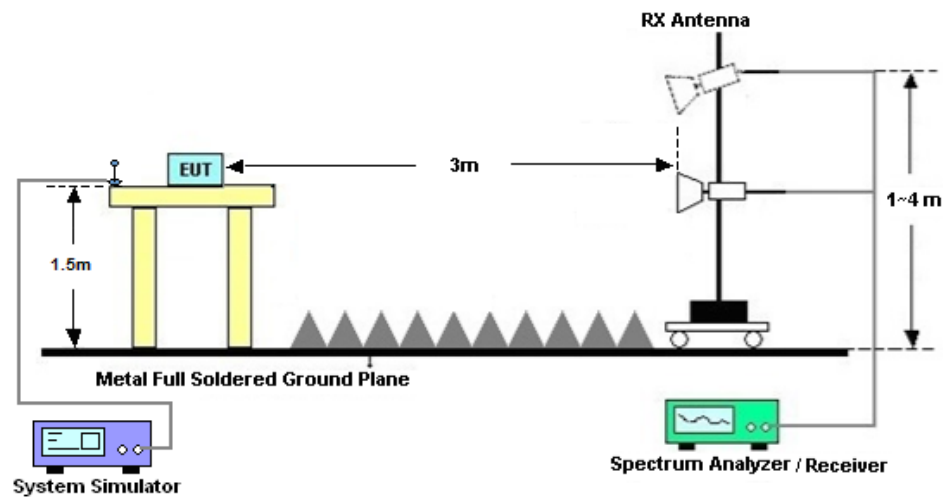

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least -40dBm / MHz.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
5. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
$$\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$$
$$\text{ERP (dBm)} = \text{EIRP} - 2.15$$
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is -40dBm/MHz



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 14, 2021	Nov. 16, 2021~ Jan. 22, 2022	Oct. 13, 2022	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	Aug. 26, 2021	Nov. 16, 2021~ Jan. 22, 2022	Aug. 25, 2022	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011 440	-40~+150°C 20%~95%RH	Jul. 12, 2021	Nov. 16, 2021~ Jan. 22, 2022	Jul. 11, 2022	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY551502 44	10Hz~44G, MAX 30dB	Apr. 13, 2021	Dec. 27, 2021~ Dec. 28, 2021	Apr. 12, 2022	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 30, 2021	Dec. 27, 2021~ Dec. 28, 2021	Oct. 29, 2022	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz~1GHz	May 30, 2021	Dec. 27, 2021~ Dec. 28, 2021	May 29, 2022	Radiation (03CH04-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	1356	1GHz~18GHz	Apr. 18, 2021	Dec. 27, 2021~ Dec. 28, 2021	Apr. 17, 2022	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Jan. 06, 2021	Dec. 27, 2021~ Dec. 28, 2021	Jan. 05, 2022	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	187289	9KHz~1GHz	Jan. 06, 2021	Dec. 27, 2021~ Dec. 28, 2021	Jan. 05, 2022	Radiation (03CH04-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2025788	1Ghz~18Ghz	Jan. 06, 2021	Dec. 27, 2021~ Dec. 28, 2021	Jan. 05, 2022	Radiation (03CH04-KS)
Amplifier	Keysight	83017A	MY572801 06	500MHz~26.5G Hz	Oct. 13, 2021	Dec. 27, 2021~ Dec. 28, 2021	Oct. 12, 2022	Radiation (03CH04-KS)
Amplifier	MITEQ	EM18G40GG A	060728	18~40GHz	Jan. 07, 2021	Dec. 27, 2021~ Dec. 28, 2021	Jan. 06, 2022	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F1040900 04	N/A	NCR	Dec. 27, 2021~ Dec. 28, 2021	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Dec. 27, 2021~ Dec. 28, 2021	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Dec. 27, 2021~ Dec. 28, 2021	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required

6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	3.3dB
---	-------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.8dB
---	-------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.8dB
---	-------

----- THE END -----



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power) and EIRP

Test Engineer :	Simle Wang	Temperature :	22~23°C
		Relative Humidity :	40~42%

LTE Band 48:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	EIRP(W)		
Channel				55340	55990	56640			
Frequency (MHz)				3560	3625	3690	L	M	H
20	QPSK	1	0	16.77	16.56	16.79	0.1892	0.1803	0.1901
20	QPSK	1	99	16.87	16.74	16.68	0.1936	0.1879	0.1854
20	QPSK	100	0	14.03	14.23	14.29	0.1007	0.1054	0.1069
20	16QAM	1	0	16.61	16.85	16.79	0.1824	0.1928	0.1901
20	64QAM	1	0	16.46	16.69	16.48	0.1762	0.1858	0.1770
20	256QAM	1	0	16.76	16.65	16.65	0.1888	0.1841	0.1841
Channel				55315	55990	56665	EIRP(W)		
Frequency (MHz)				3557.5	3625	3692.5	L	M	H
15	QPSK	1	0	16.13	16.36	16.50	0.1633	0.1722	0.1778
15	16QAM	1	0	16.81	16.82	16.18	0.1910	0.1914	0.1652
Channel				55290	55990	56690	EIRP(W)		
Frequency (MHz)				3555	3625	3695	L	M	H
10	QPSK	1	0	16.47	16.73	16.62	0.1766	0.1875	0.1828
10	16QAM	1	0	16.77	16.75	16.59	0.1892	0.1884	0.1816
Channel				55265	55990	56715	EIRP(W)		
Frequency (MHz)				3552.5	3625	3697.5	L	M	H
5	QPSK	1	0	16.61	16.68	16.79	0.1824	0.1854	0.1901
5	16QAM	1	0	16.75	16.67	16.66	0.1884	0.1849	0.1845



LTE Band 48C:

Combination 20MHz+20MHz (100RB+100RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	12.58	0.0721
L	QPSK	100	0	100	0	16.97	0.1982
M	QPSK	1	Max	1	0	12.31	0.0678
M	QPSK	100	0	100	0	16.87	0.1936
H	QPSK	1	Max	1	0	12.09	0.0644
H	QPSK	100	0	100	0	16.85	0.1928
L	16QAM	1	Max	1	0	12.39	0.0690
L	16QAM	100	0	100	0	16.77	0.1892
M	16QAM	1	Max	1	0	12.52	0.0711
M	16QAM	100	0	100	0	16.87	0.1936
H	16QAM	1	Max	1	0	12.13	0.0650
H	16QAM	100	0	100	0	16.64	0.1837
L	64QAM	1	Max	1	0	12.03	0.0635
L	64QAM	100	0	100	0	16.76	0.1888
M	64QAM	1	Max	1	0	12.02	0.0634
M	64QAM	100	0	100	0	16.79	0.1901
H	64QAM	1	Max	1	0	11.91	0.0618
H	64QAM	100	0	100	0	16.78	0.1897
L	256QAM	1	Max	1	0	11.85	0.0610
L	256QAM	100	0	100	0	16.73	0.1875
M	256QAM	1	Max	1	0	12.21	0.0662
M	256QAM	100	0	100	0	16.82	0.1914
H	256QAM	1	Max	1	0	12.01	0.0632
H	256QAM	100	0	100	0	16.77	0.1892
Combination 20MHz+15MHz (100RB+75RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	12.26	0.0670
L	QPSK	100	Max	75	0	16.47	0.1766
M	QPSK	100	Max	75	0	16.65	0.1841
H	QPSK	100	Max	75	0	16.68	0.1854
L	16QAM	1	Max	1	0	12.32	0.0679
Combination 15MHz+20MHz (100RB+75RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	12.25	0.0668
L	QPSK	75	Max	100	0	16.58	0.1811
M	QPSK	75	Max	100	0	16.74	0.1879
H	QPSK	75	Max	100	0	16.85	0.1928
L	16QAM	1	Max	1	0	12.24	0.0667
Combination 20MHz+10MHz (100RB+50RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	12.28	0.0673
L	QPSK	100	Max	50	0	16.61	0.1824
M	QPSK	100	Max	50	0	16.58	0.1811



H	QPSK	100	Max	50	0	16.54	0.1795
L	16QAM	1	Max	1	0	12.19	0.0659
Combination 10MHz+20MHz (50RB+100RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	12.15	0.0653
L	QPSK	50	0	100	0	16.69	0.1858
M	QPSK	50	0	100	0	16.52	0.1786
H	QPSK	50	0	100	0	16.47	0.1766
L	16QAM	1	Max	1	0	12.09	0.0644
Combination 20MHz+5MHz (100RB+25RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	12.33	0.0681
L	QPSK	100	0	25	0	16.68	0.1854
M	QPSK	100	0	25	0	16.78	0.1897
H	QPSK	100	0	25	0	16.63	0.1832
L	16QAM	1	Max	1	0	12.20	0.0661
Combination 5MHz+20MHz (25RB+100RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	12.20	0.0661
L	QPSK	25	0	100	0	16.65	0.1841
M	QPSK	25	0	100	0	16.68	0.1854
H	QPSK	25	0	100	0	16.74	0.1879
L	16QAM	1	Max	1	0	12.13	0.0650




LTE Band 48

ACLR

LTE Band 48 / 5MHz


QPSK

Lowest Channel / 1RB0

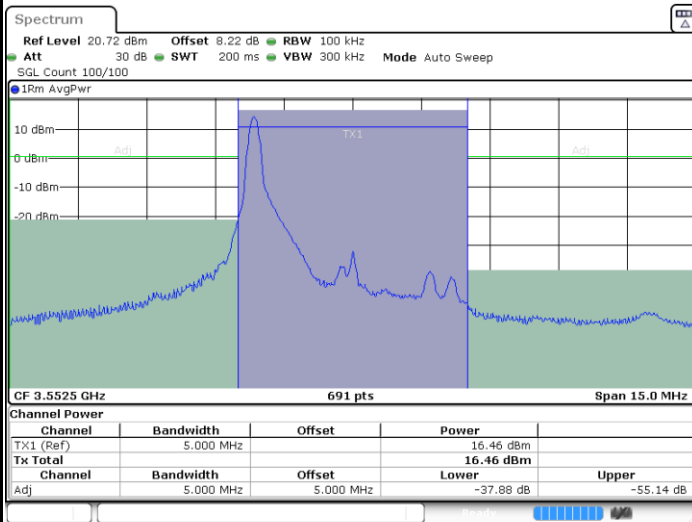


Date: 16 NOV. 2021 23:18:27

Lowest Channel / 1RBmax

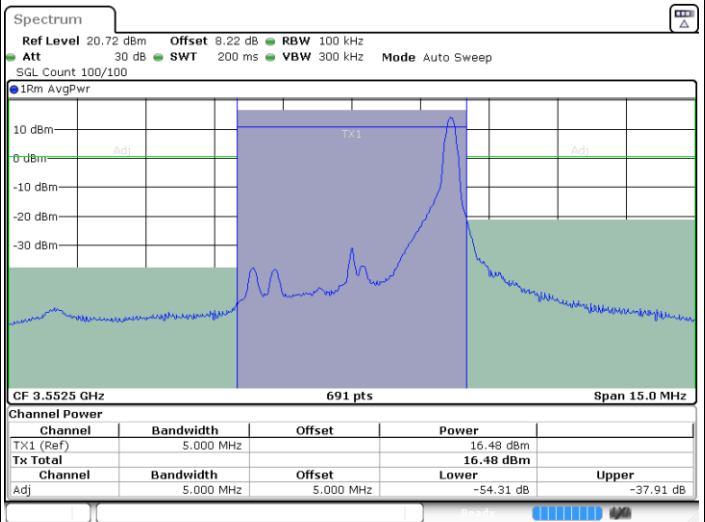

Date: 16 NOV. 2021 23:06:54

Lowest Channel / Full RB

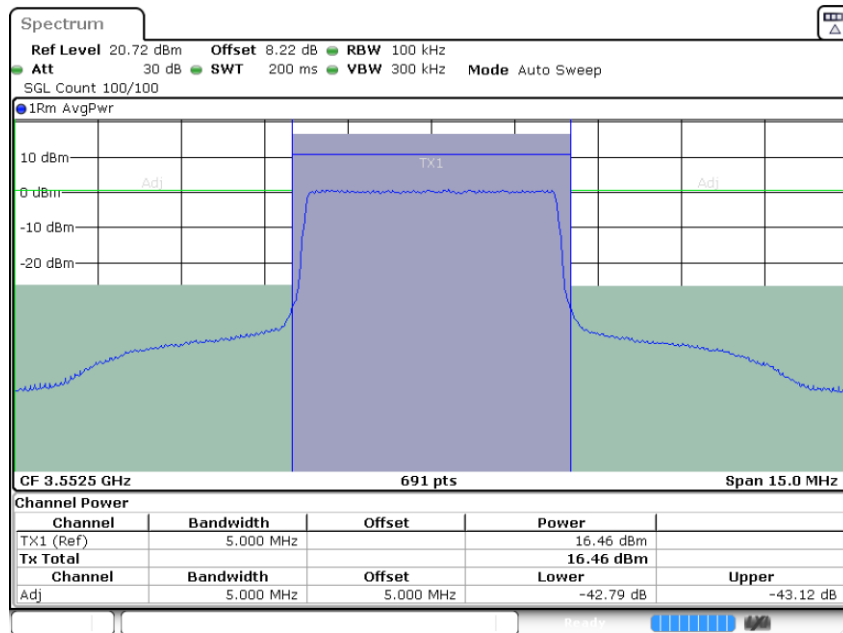


Date: 16 NOV. 2021 23:21:00



LTE Band 48 / 5MHz


QPSK

Middle Channel / 1RB0

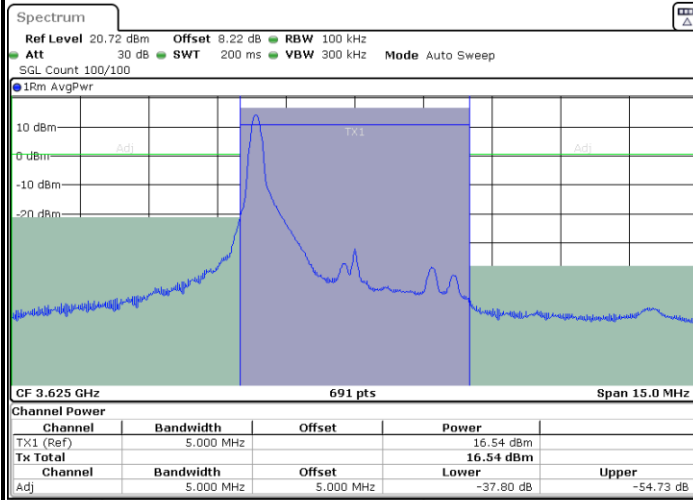


Date: 16 NOV. 2021 22:54:24

Middle Channel / 1RBmax

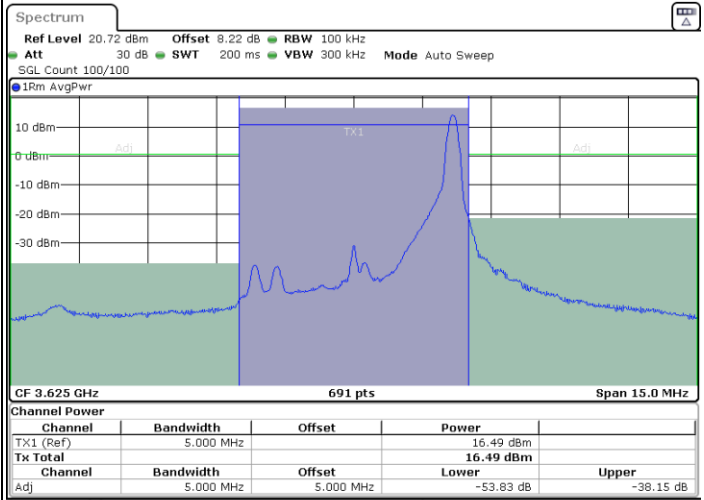

Date: 16 NOV. 2021 23:05:16

Middle Channel / Full RB

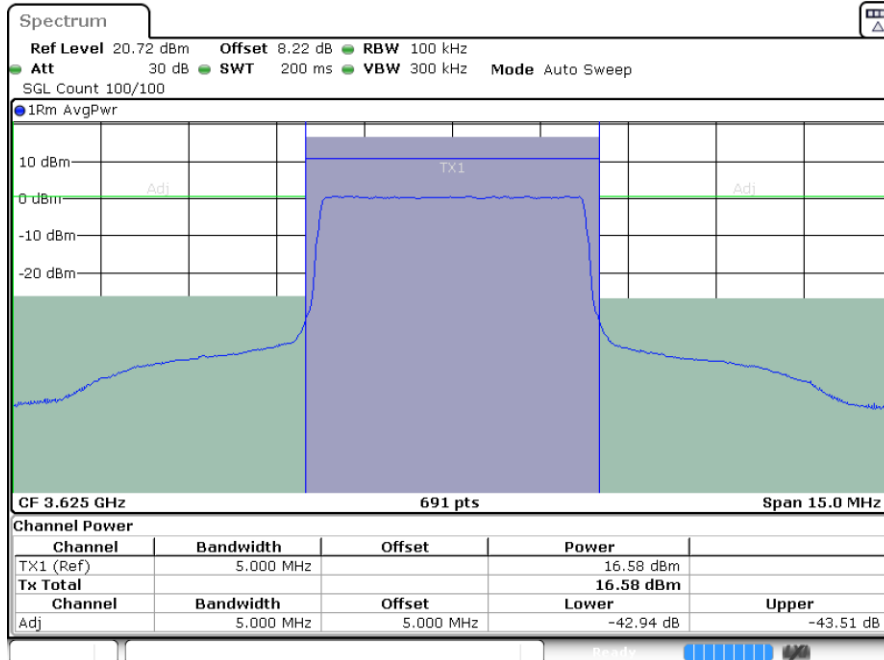


Date: 16 NOV. 2021 22:52:45



LTE Band 48 / 5MHz


QPSK

Highest Channel / 1RB0

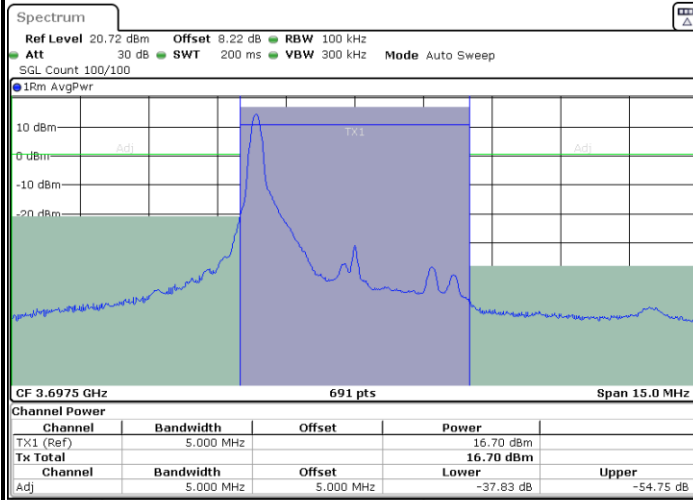


Date: 16 NOV. 2021 22:23:24

Highest Channel / 1RBmax

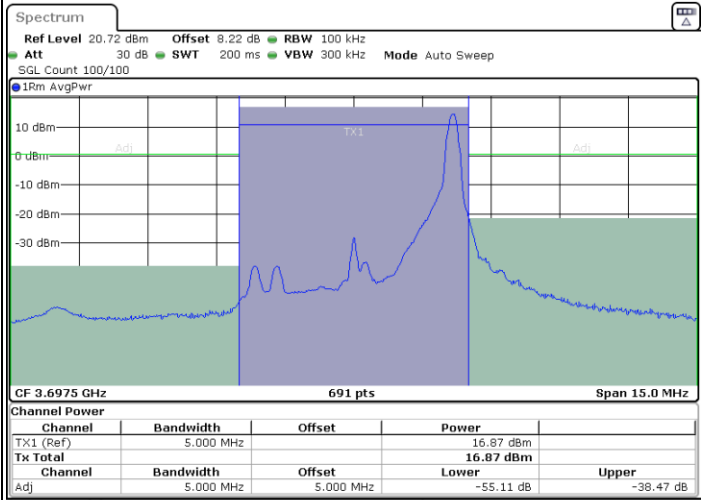

Date: 16 NOV. 2021 22:02:27

Highest Channel / Full RB

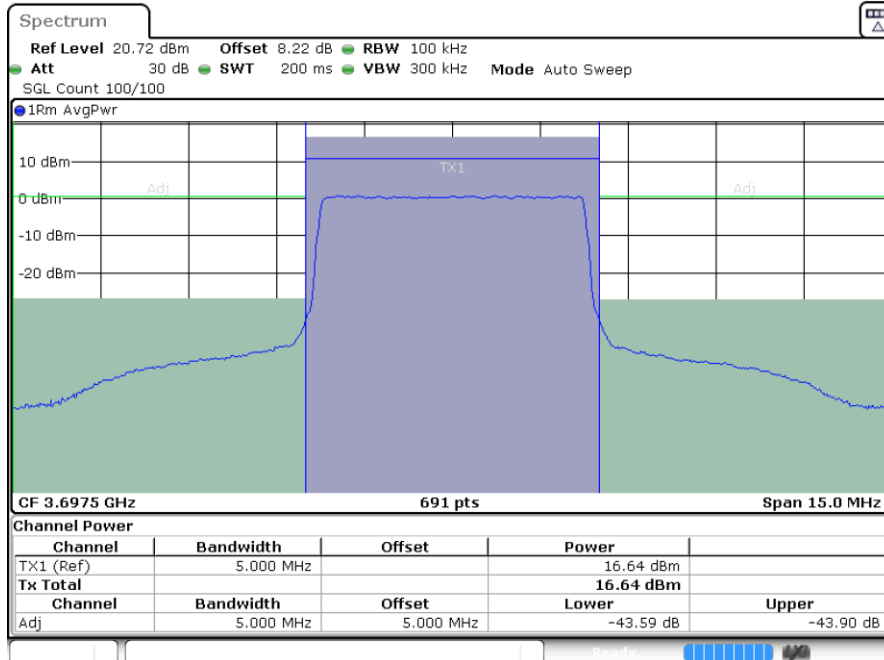


Date: 16 NOV. 2021 22:28:26



LTE Band 48 / 10MHz


QPSK

Lowest Channel / 1RB0

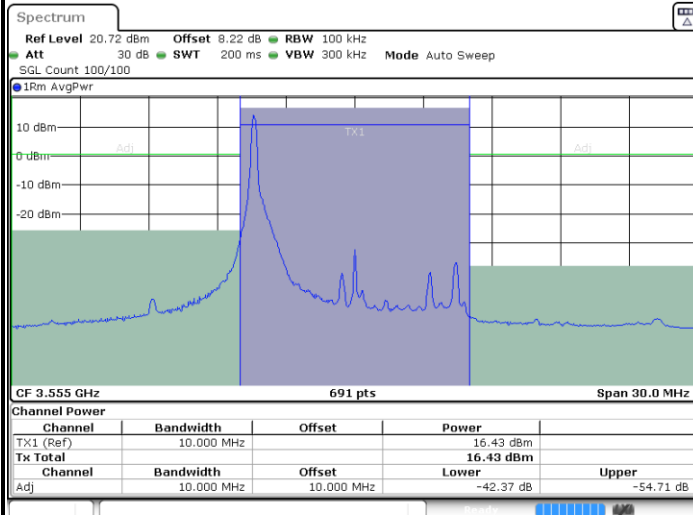


Date: 16 NOV. 2021 23:41:06

Lowest Channel / 1RBmax

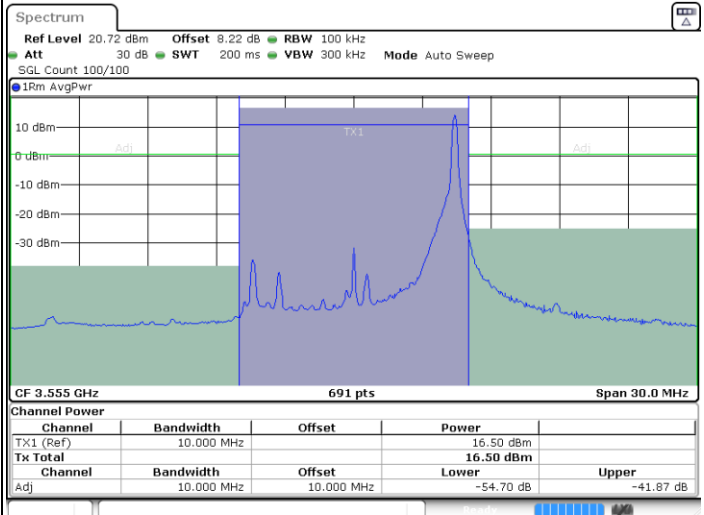

Date: 17 NOV. 2021 00:00:49

Lowest Channel / Full RB

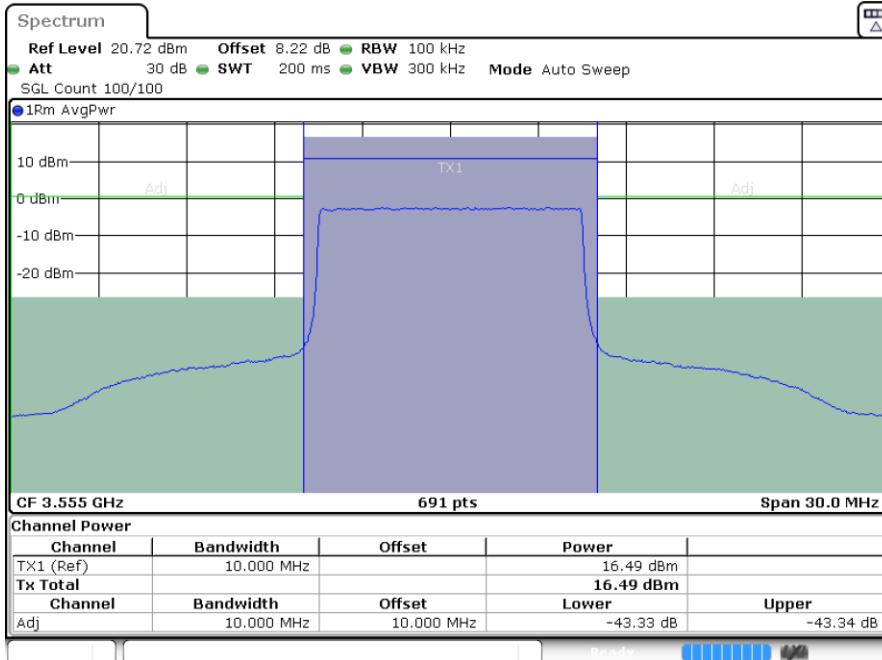


Date: 17 NOV. 2021 00:03:07



LTE Band 48 / 10MHz


QPSK

Middle Channel / 1RB0

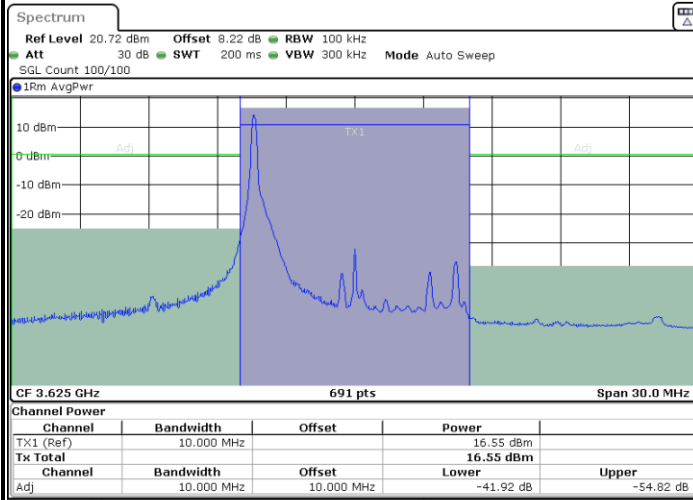


Date: 17.NOV.2021 00:20:51

Middle Channel / 1RBmax

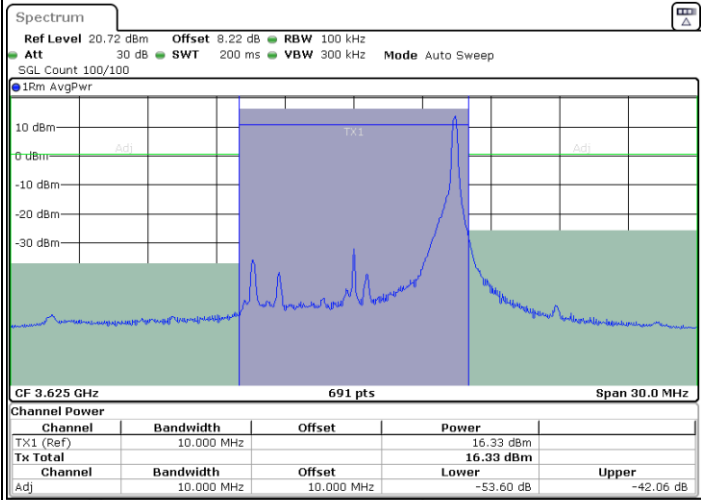

Date: 17.NOV.2021 01:13:12

Middle Channel / Full RB

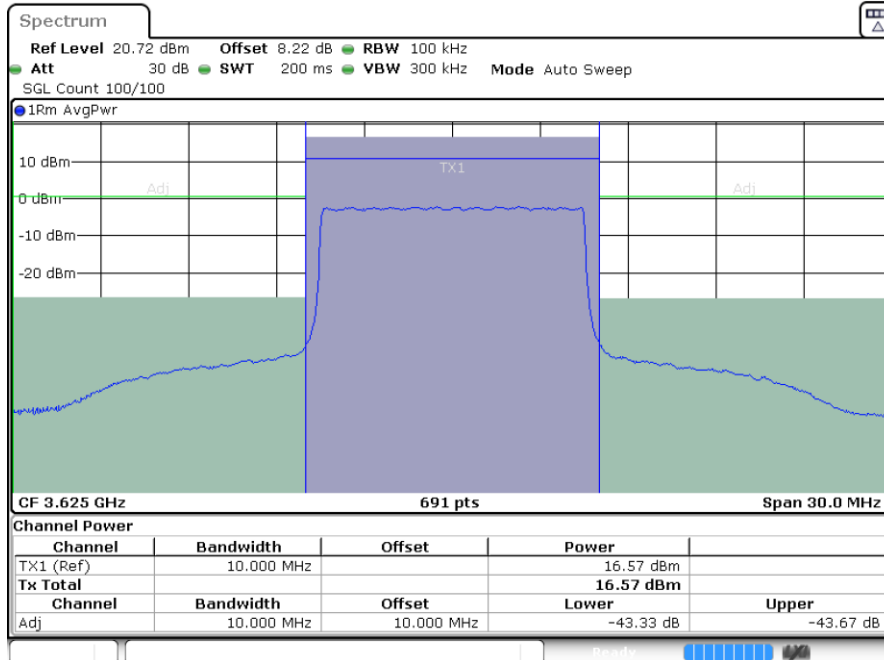


Date: 17.NOV.2021 00:18:22



LTE Band 48 / 10MHz


QPSK

Highest Channel / 1RB0

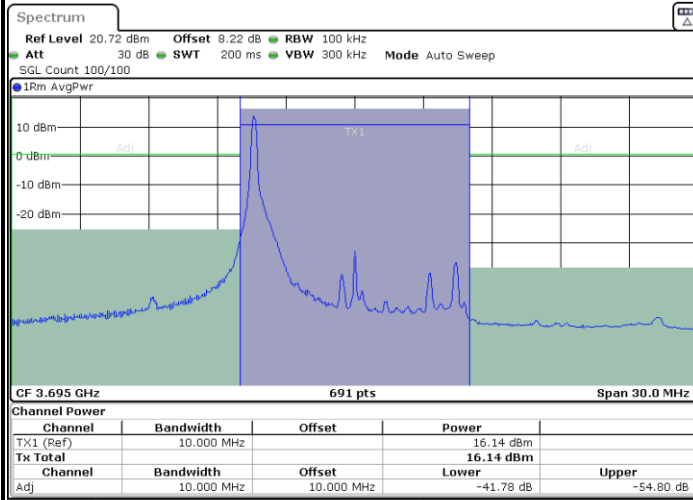


Date: 17.NOV.2021 01:30:44

Highest Channel / 1RBmax

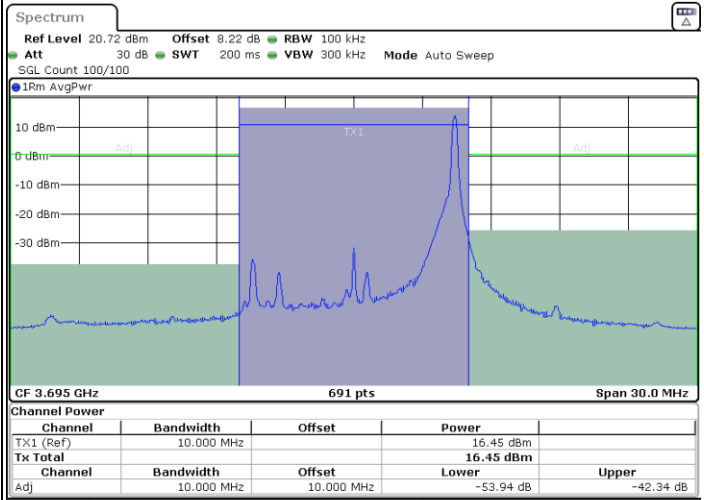

Date: 17.NOV.2021 01:15:45

Highest Channel / Full RB

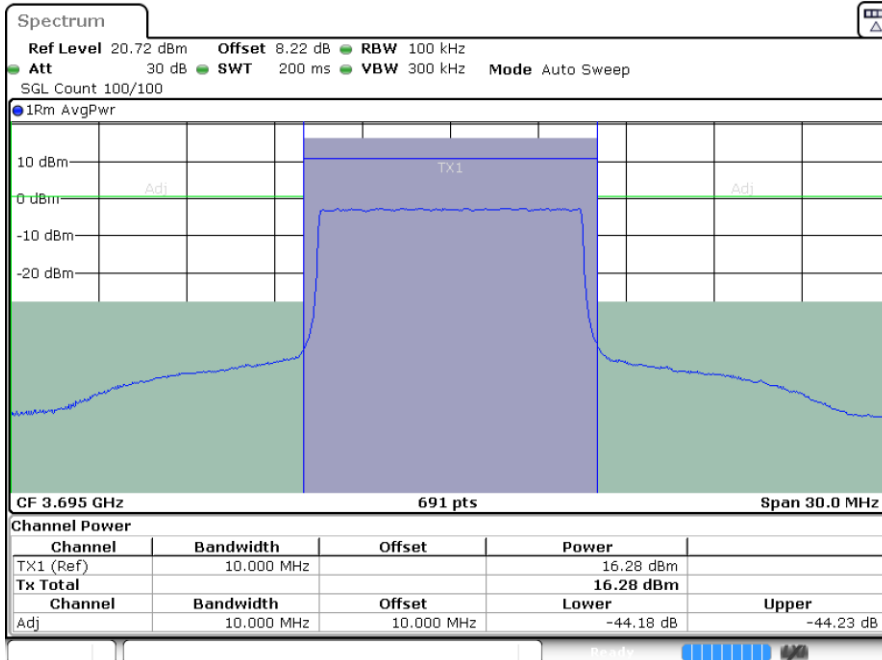


Date: 17.NOV.2021 01:34:38



LTE Band 48 / 15MHz


QPSK

Lowest Channel / 1RB0

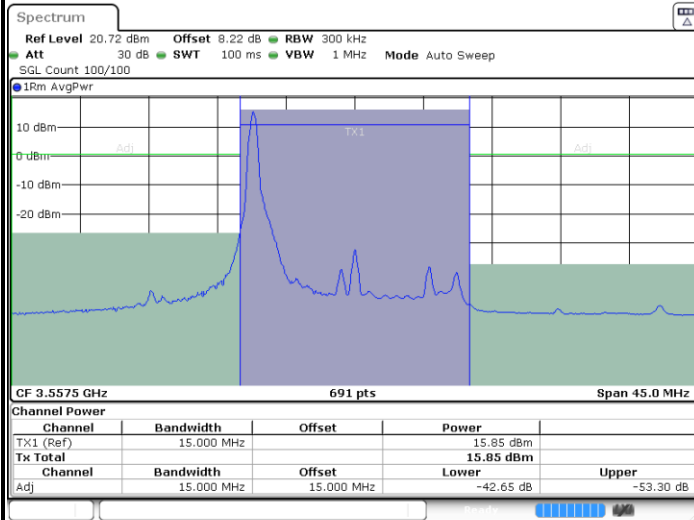


Date: 17.NOV.2021 01:52:12

Lowest Channel / 1RBmax

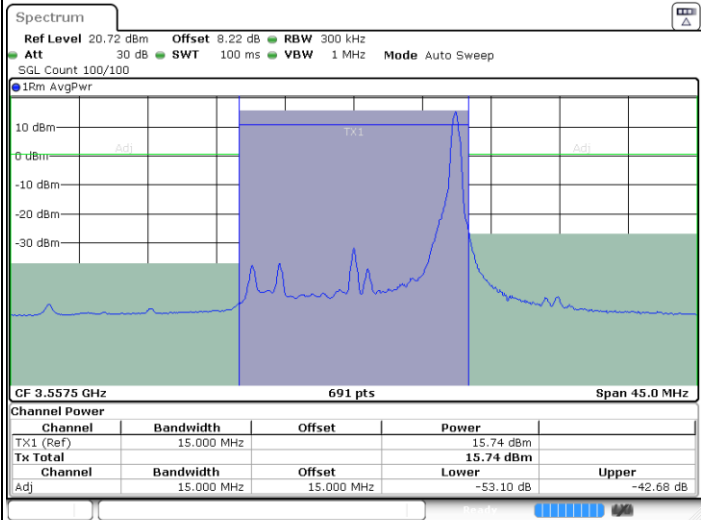

Date: 17.NOV.2021 02:07:18

Lowest Channel / Full RB

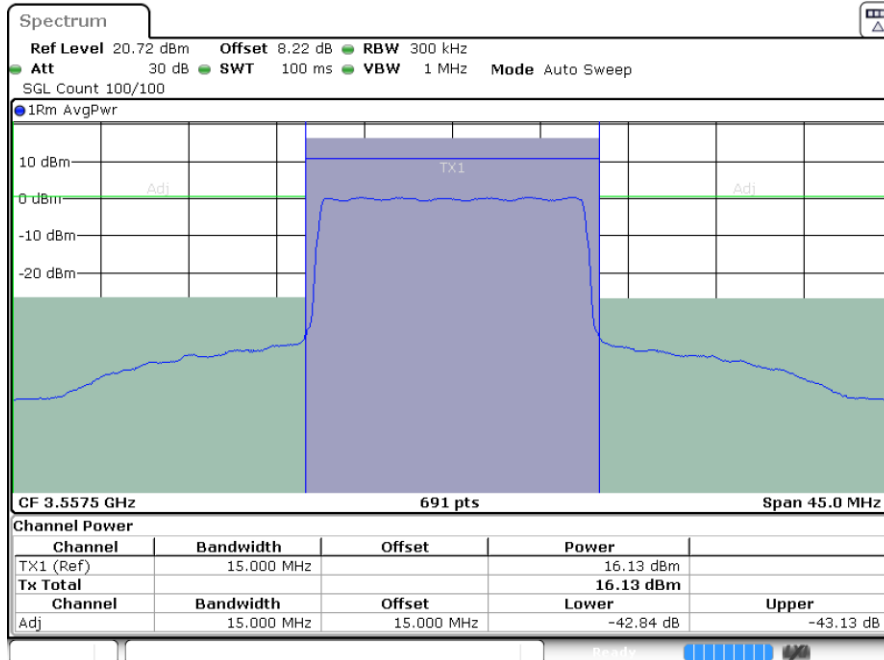


Date: 17.NOV.2021 02:10:16



LTE Band 48 / 15MHz


QPSK

Middle Channel / 1RB0

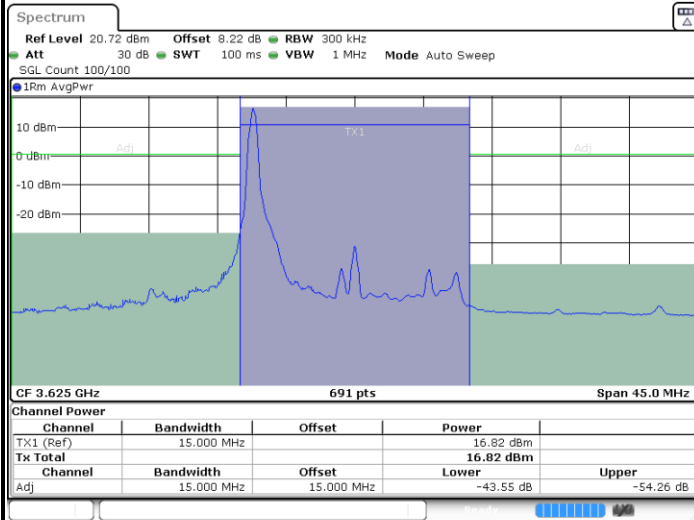


Date: 17.NOV.2021 02:45:51

Middle Channel / 1RBmax

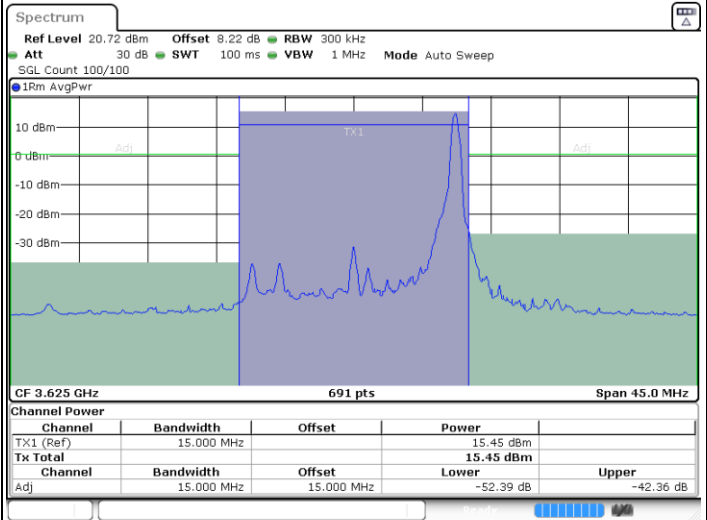

Date: 17.NOV.2021 02:56:32

Middle Channel / Full RB

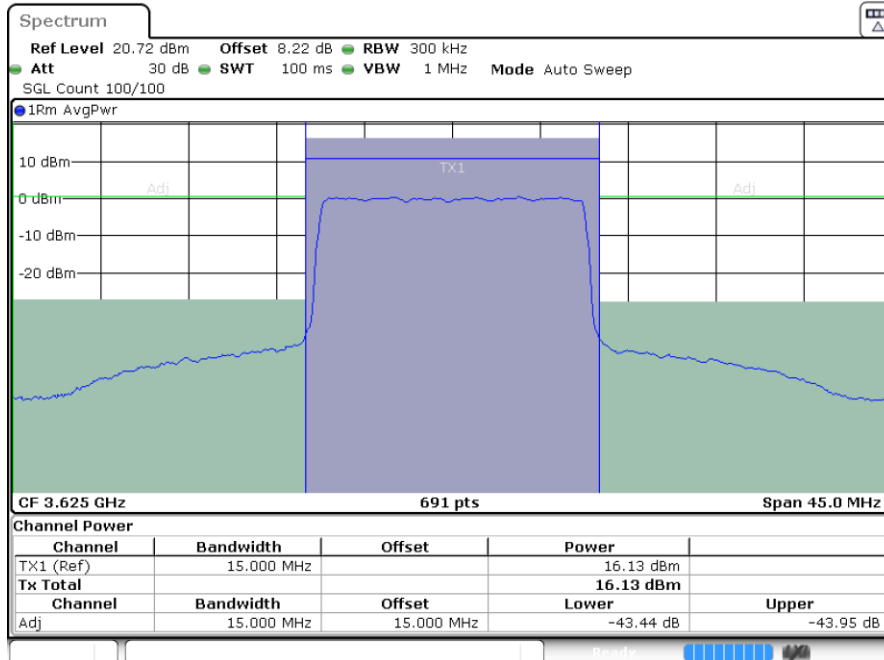


Date: 17.NOV.2021 02:19:34



LTE Band 48 / 15MHz


QPSK

Highest Channel / 1RB0

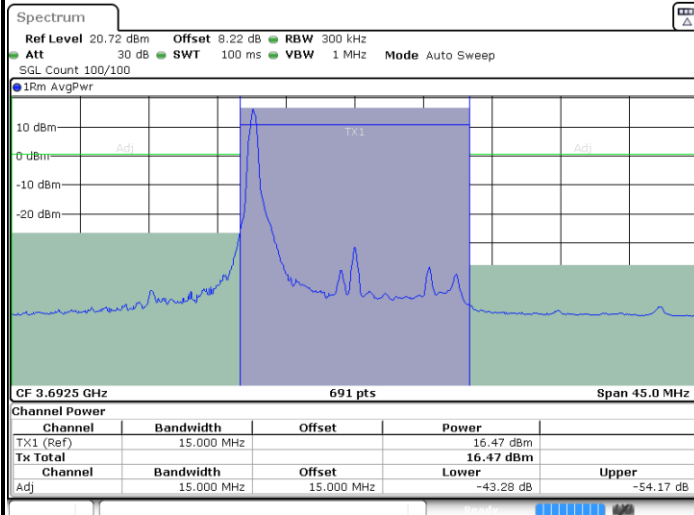


Date: 17.NOV.2021 03:06:17

Highest Channel / 1RBmax

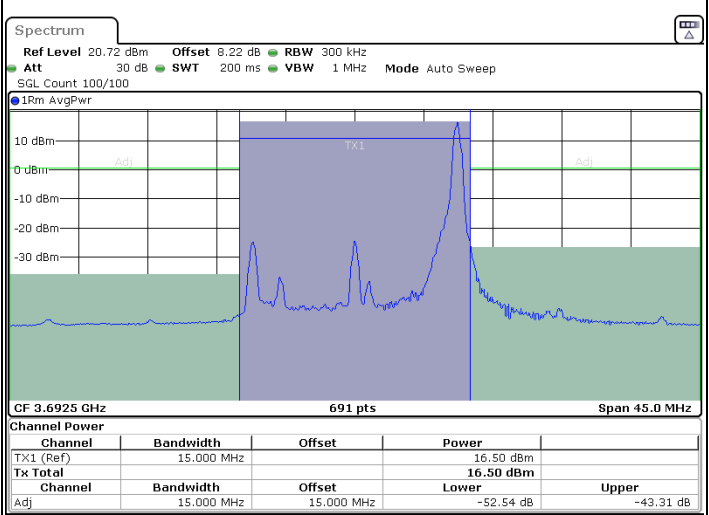

Highest Channel / Full RB

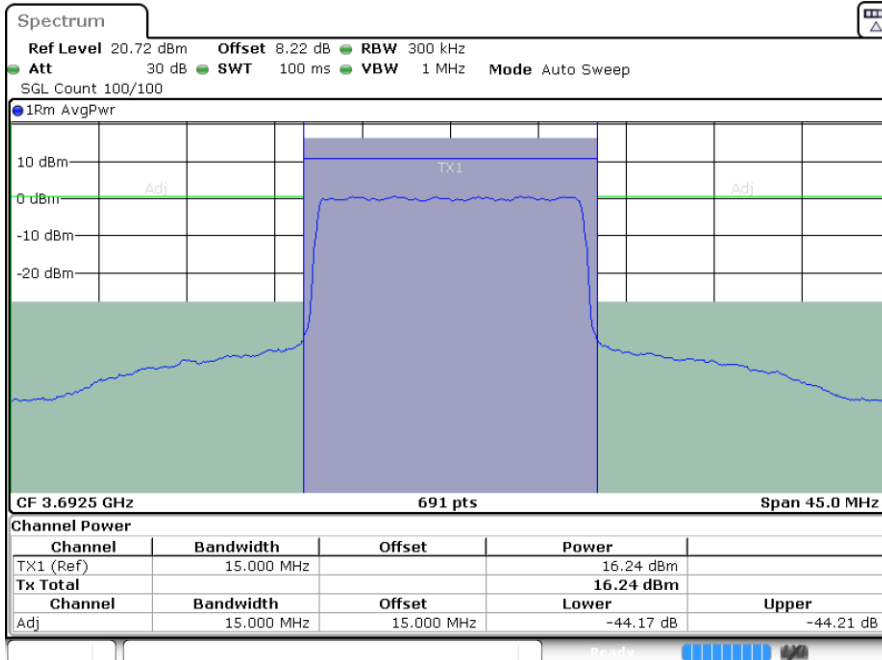


Date: 17.NOV.2021 03:29:19



LTE Band 48 / 20MHz


QPSK

Lowest Channel / 1RB0

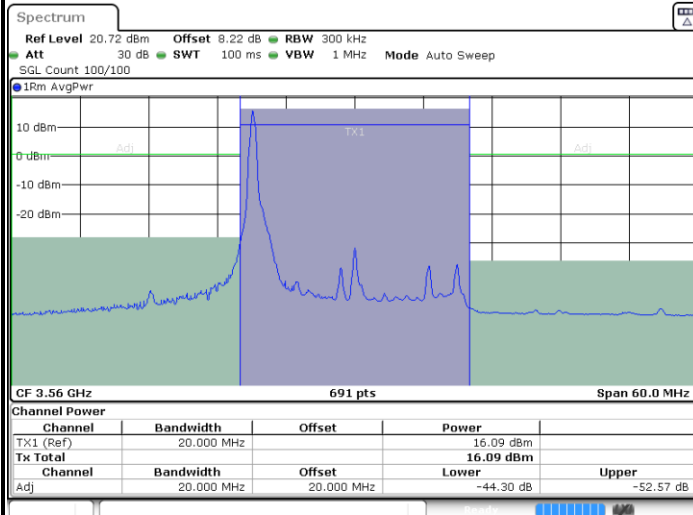


Date: 17.NOV.2021 04:28:10

Lowest Channel / 1RBmax

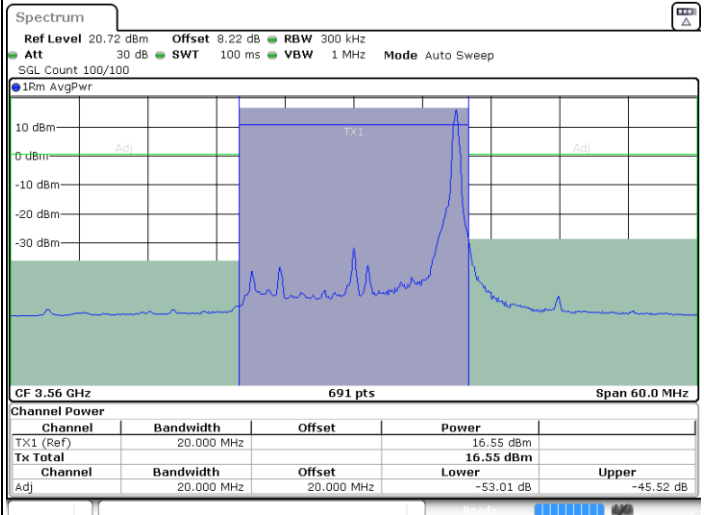

Date: 17.NOV.2021 04:31:38

Lowest Channel / Full RB

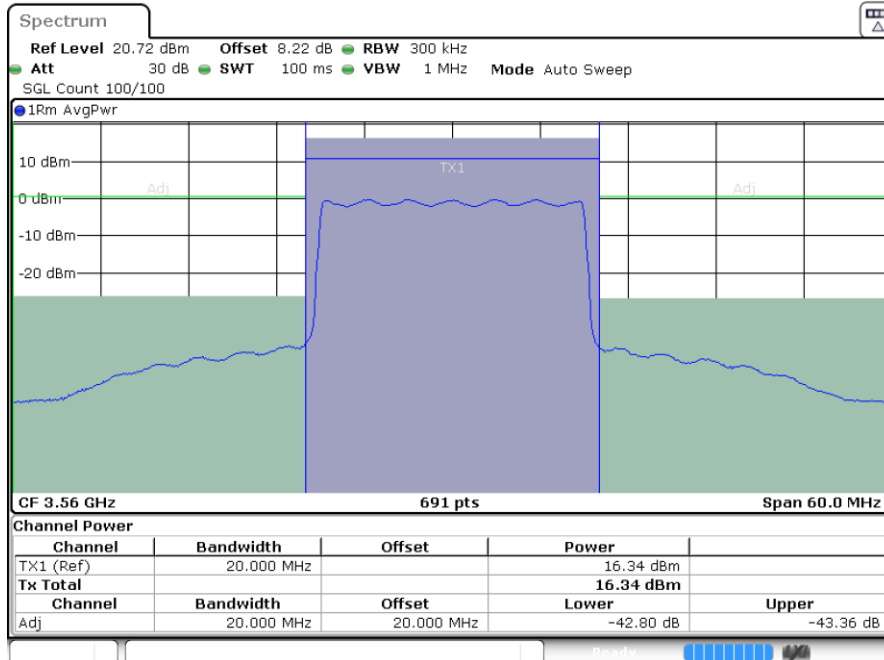


Date: 17.NOV.2021 03:47:08



LTE Band 48 / 20MHz


QPSK

Middle Channel / 1RB0

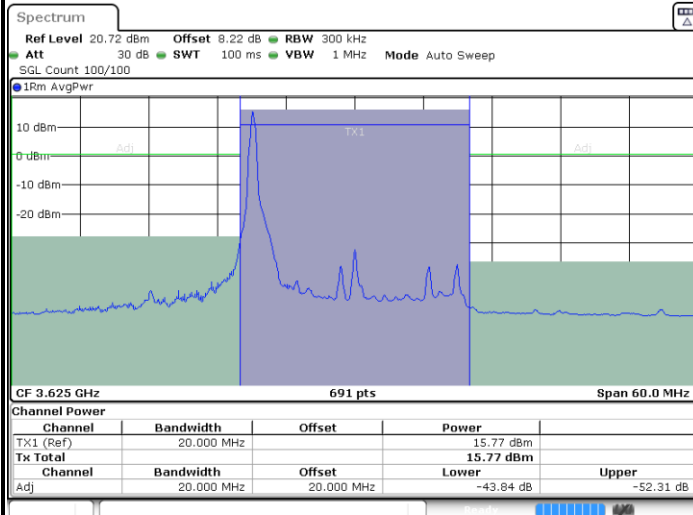


Date: 17.NOV.2021 05:15:34

Middle Channel / 1RBmax

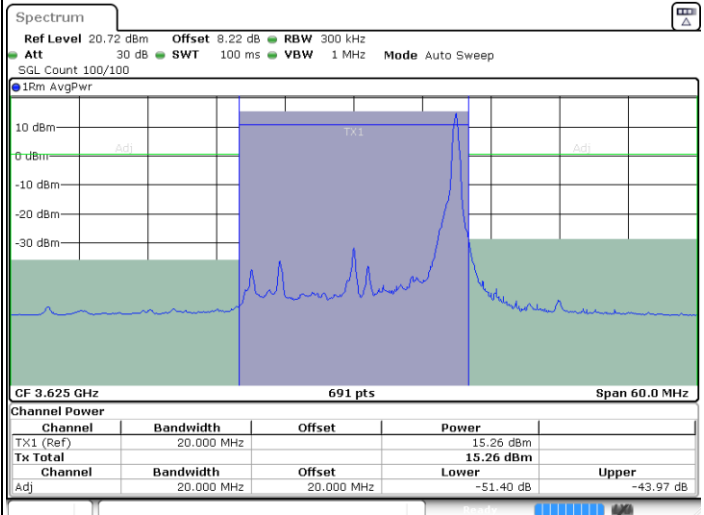

Date: 17.NOV.2021 04:55:16

Middle Channel / Full RB

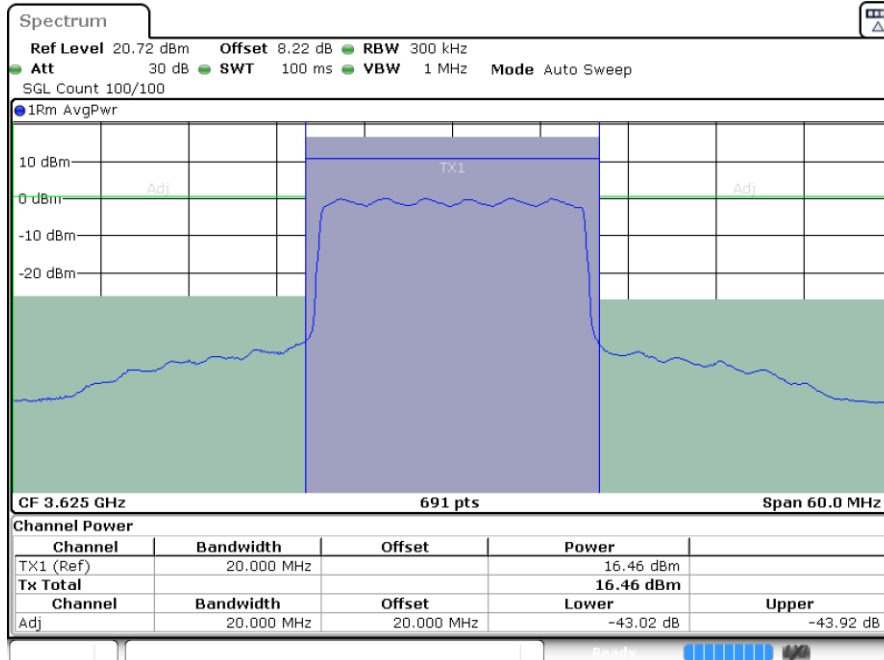


Date: 17.NOV.2021 05:23:01



LTE Band 48 / 20MHz


QPSK

Highest Channel / 1RB0

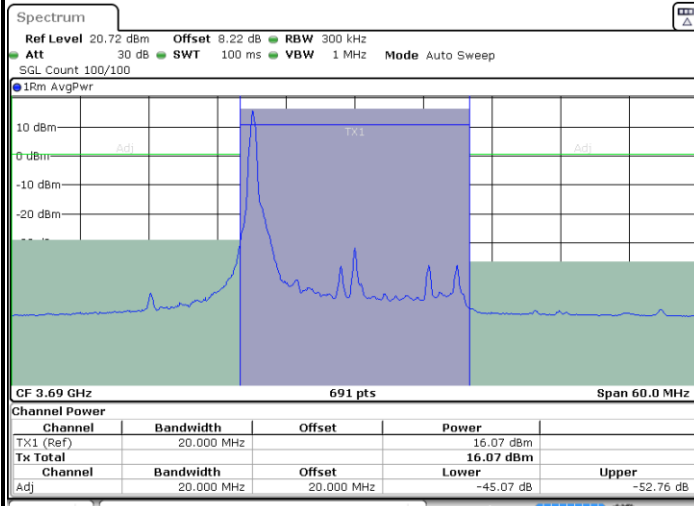


Date: 17.NOV.2021 05:52:45

Highest Channel / 1RBmax

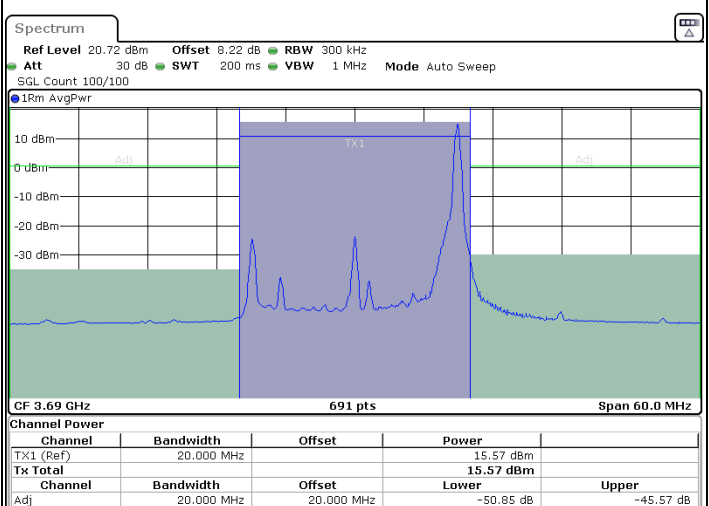

Highest Channel / Full RB

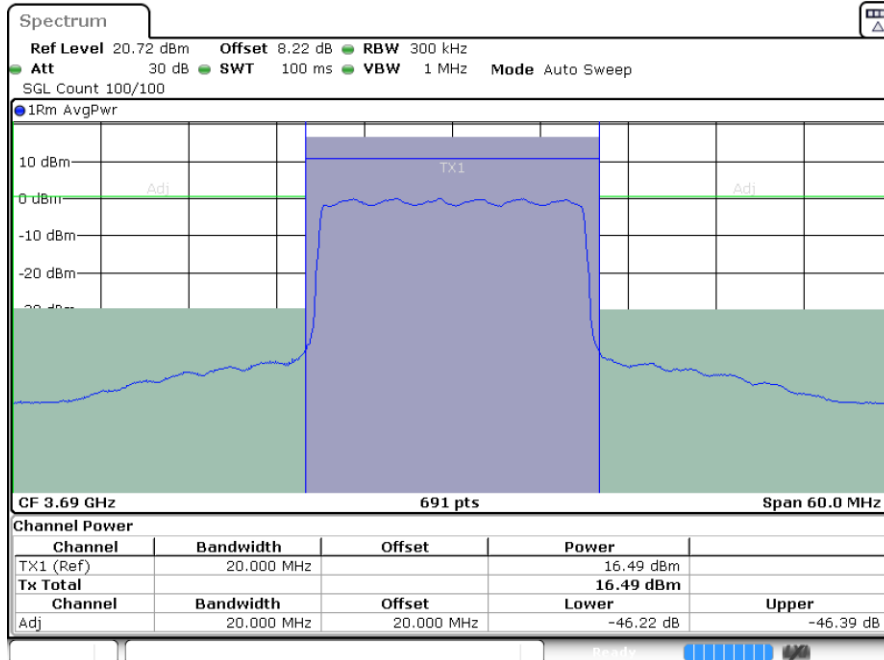


Date: 17.NOV.2021 05:38:38



LTE Band 48 / 5MHz


16QAM

Lowest Channel / 1RB0

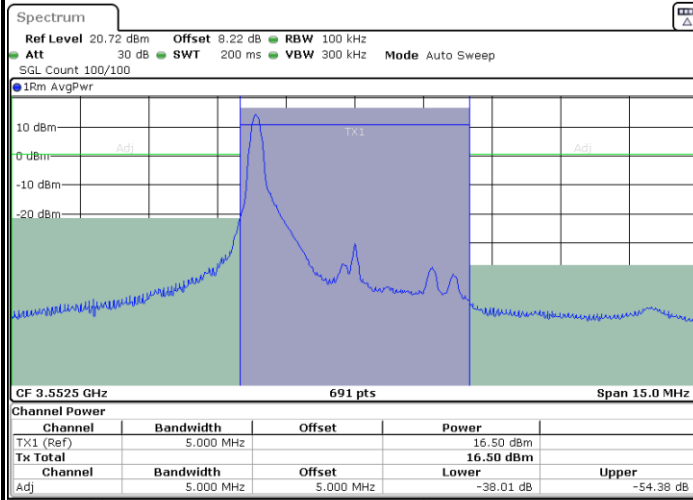


Date: 16 NOV. 2021 23:16:58

Lowest Channel / 1RBmax

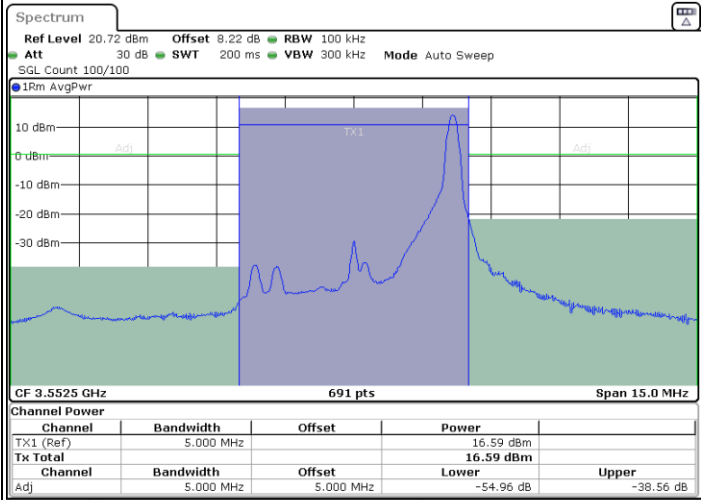

Date: 16 NOV. 2021 23:08:16

Lowest Channel / Full RB

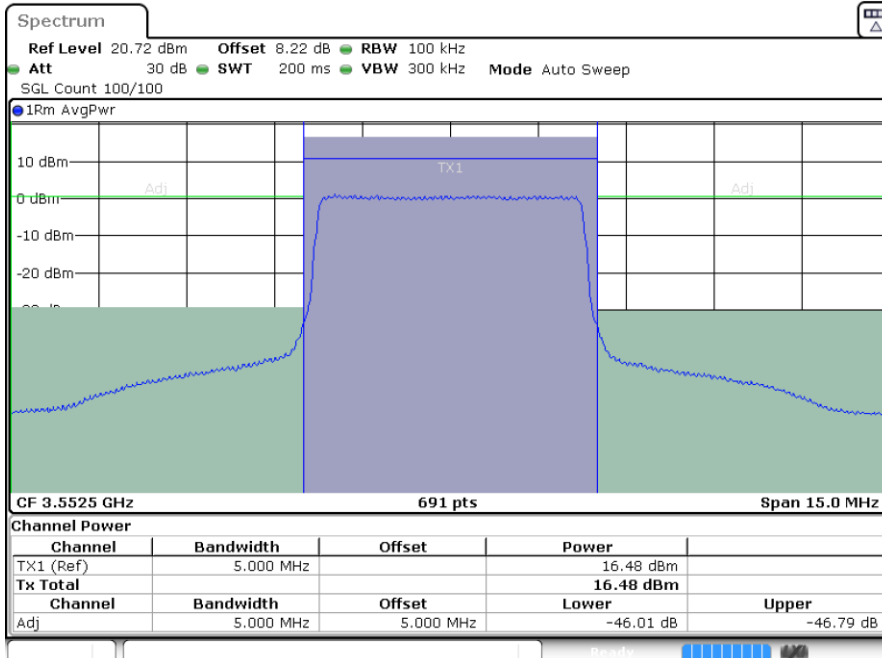


Date: 16 NOV. 2021 23:22:45



LTE Band 48 / 5MHz


16QAM

Middle Channel / 1RB0

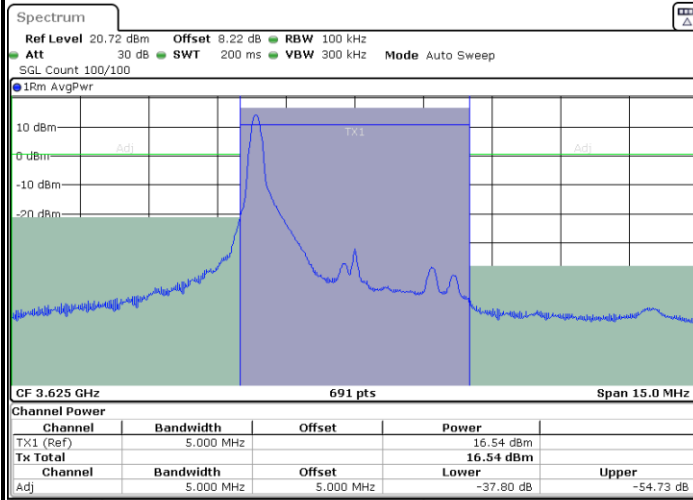


Date: 16 NOV. 2021 22:54:24

Middle Channel / 1RBmax

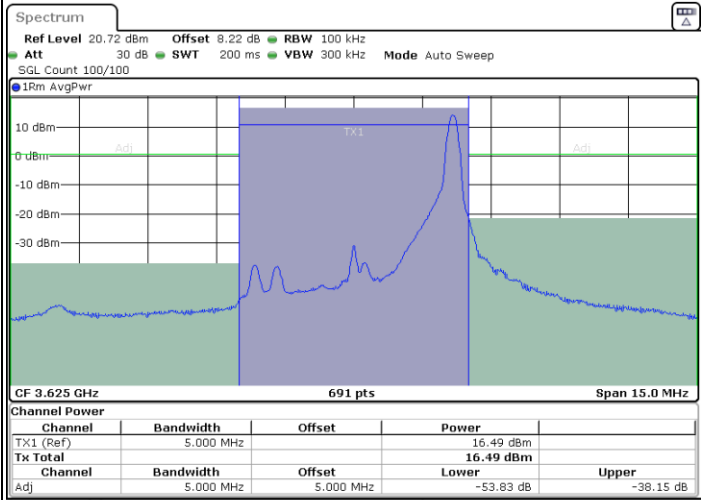

Date: 16 NOV. 2021 23:05:16

Middle Channel / Full RB

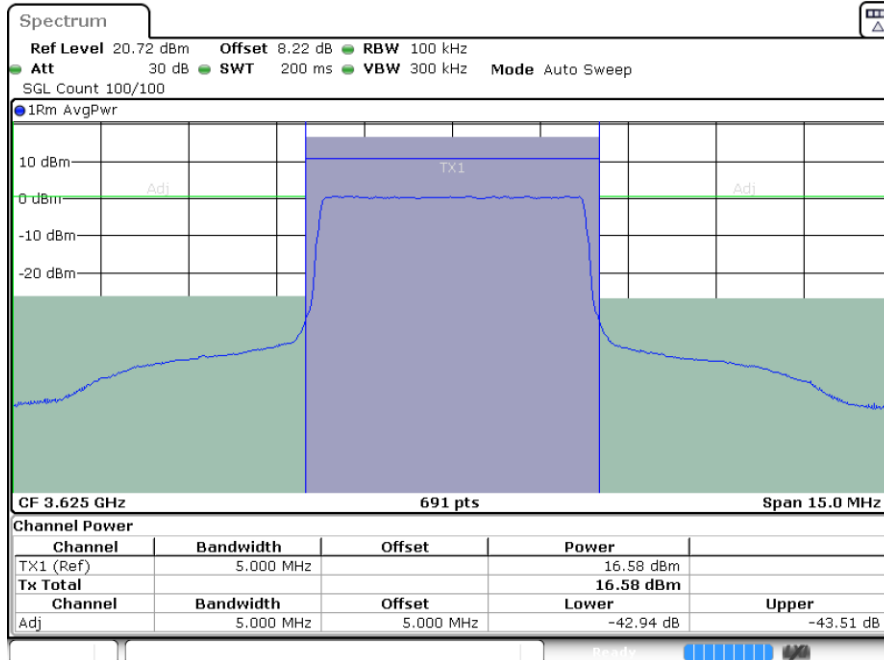


Date: 16 NOV. 2021 22:52:45



LTE Band 48 / 5MHz


16QAM

Highest Channel / 1RB0

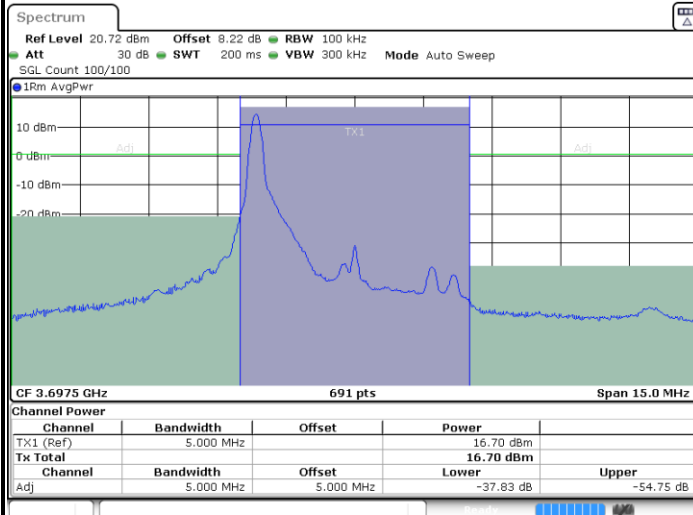


Date: 16 NOV. 2021 22:23:24

Highest Channel / 1RBmax

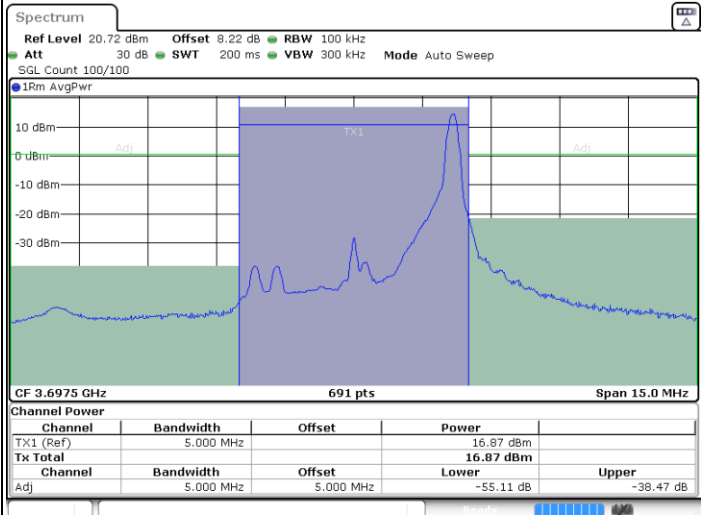

Date: 16 NOV. 2021 22:02:27

Highest Channel / Full RB

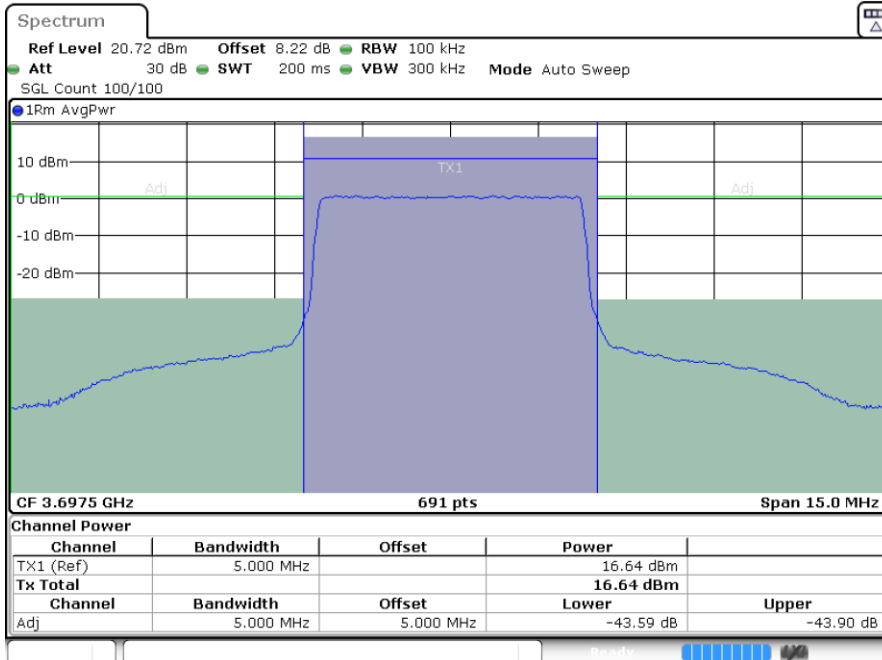


Date: 16 NOV. 2021 22:28:26



LTE Band 48 / 10MHz


16QAM

Lowest Channel / 1RB0

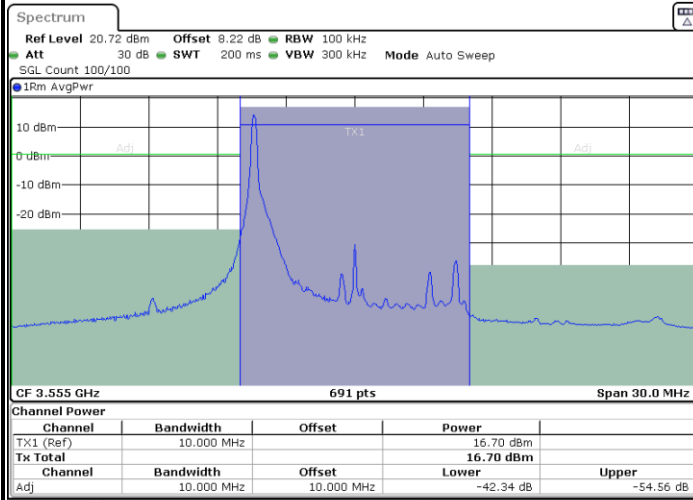


Date: 16 NOV.2021 23:44:13

Lowest Channel / 1RBmax

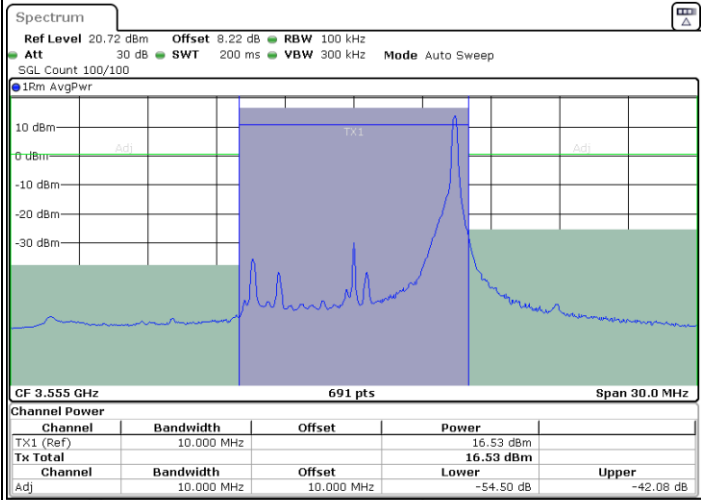

Date: 16 NOV.2021 23:58:45

Lowest Channel / Full RB

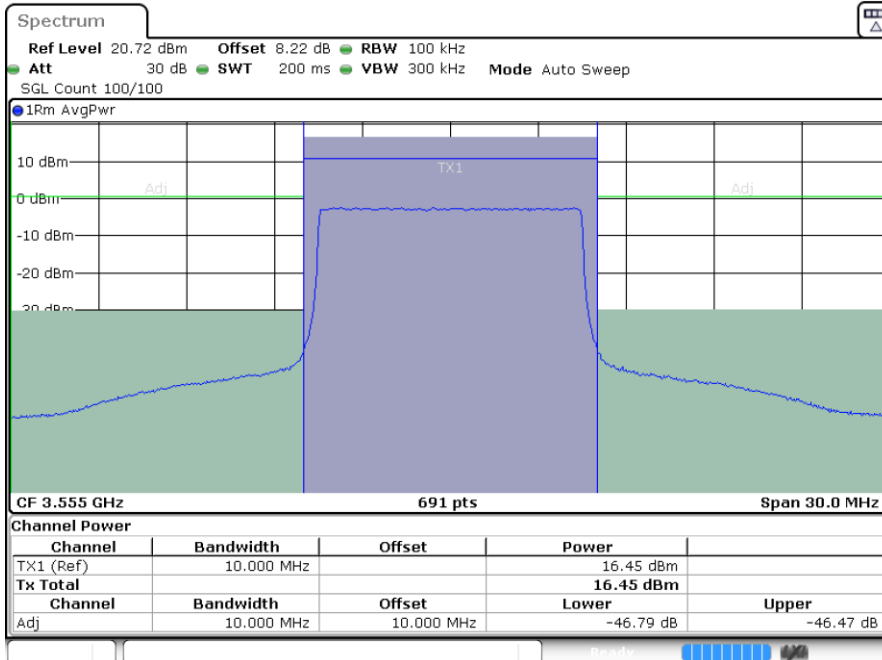


Date: 17 NOV.2021 00:05:21



LTE Band 48 / 10MHz


16QAM

Middle Channel / 1RB0

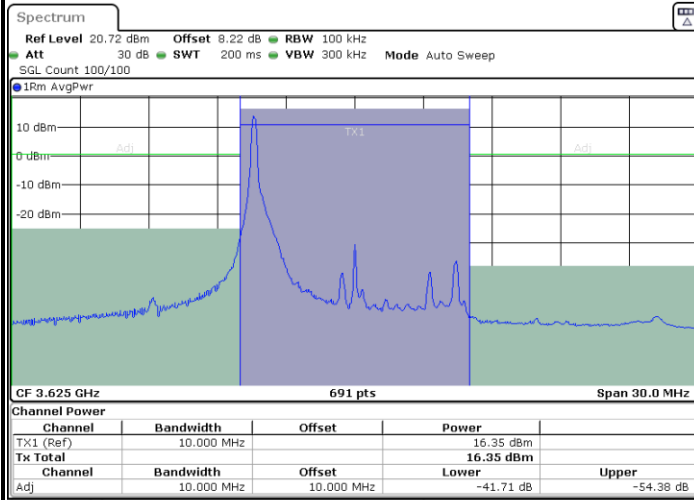


Date: 17.NOV.2021 00:23:55

Middle Channel / 1RBmax

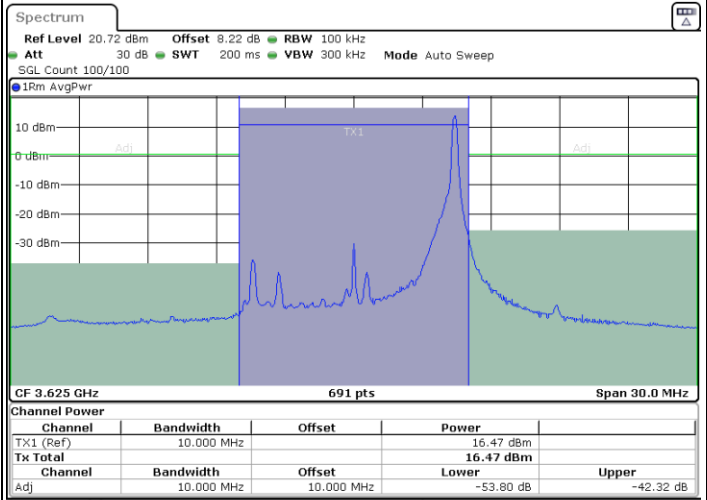

Date: 17.NOV.2021 01:11:19

Middle Channel / Full RB

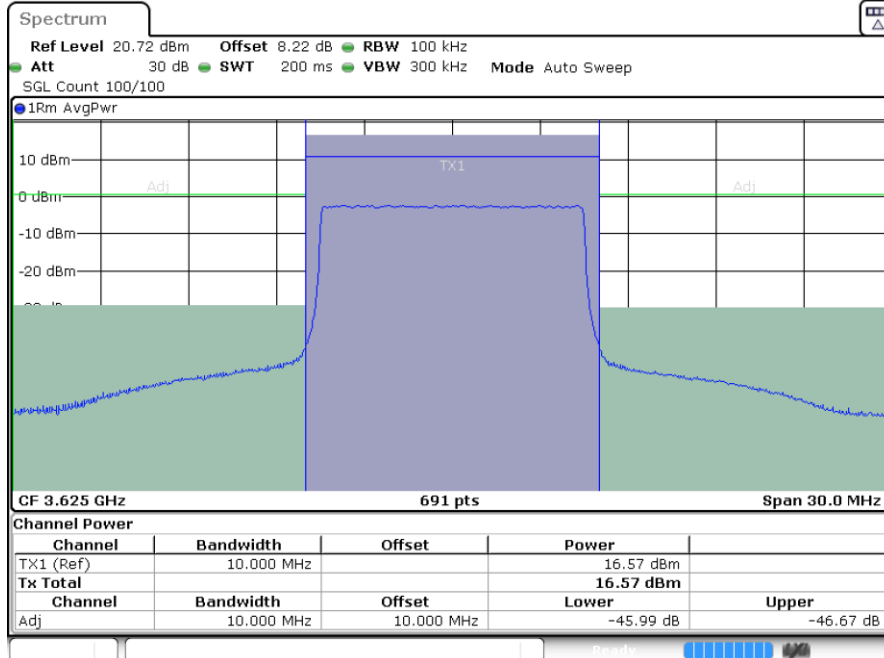


Date: 17.NOV.2021 00:15:44



LTE Band 48 / 10MHz


16QAM

Highest Channel / 1RB0

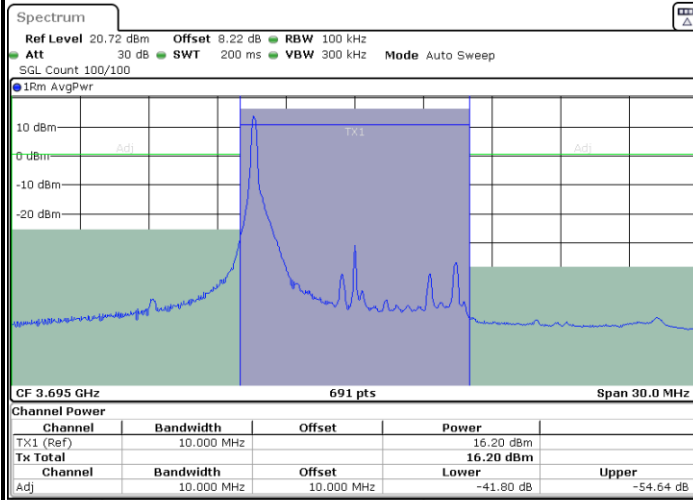


Date: 17.NOV.2021 01:28:52

Highest Channel / 1RBmax

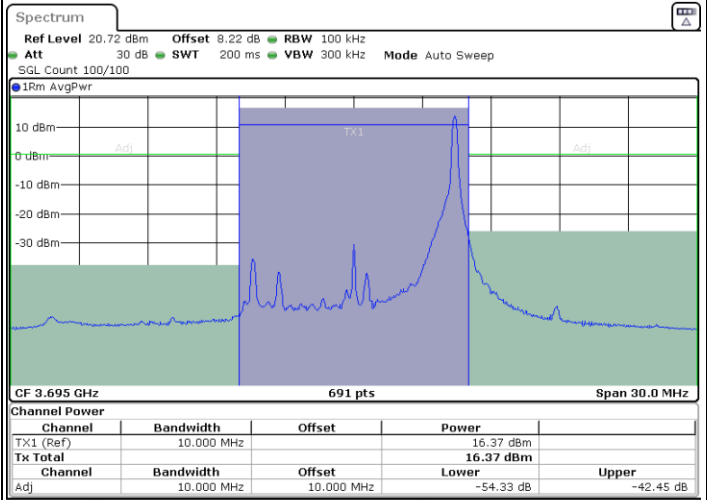

Date: 17.NOV.2021 01:18:10

Highest Channel / Full RB

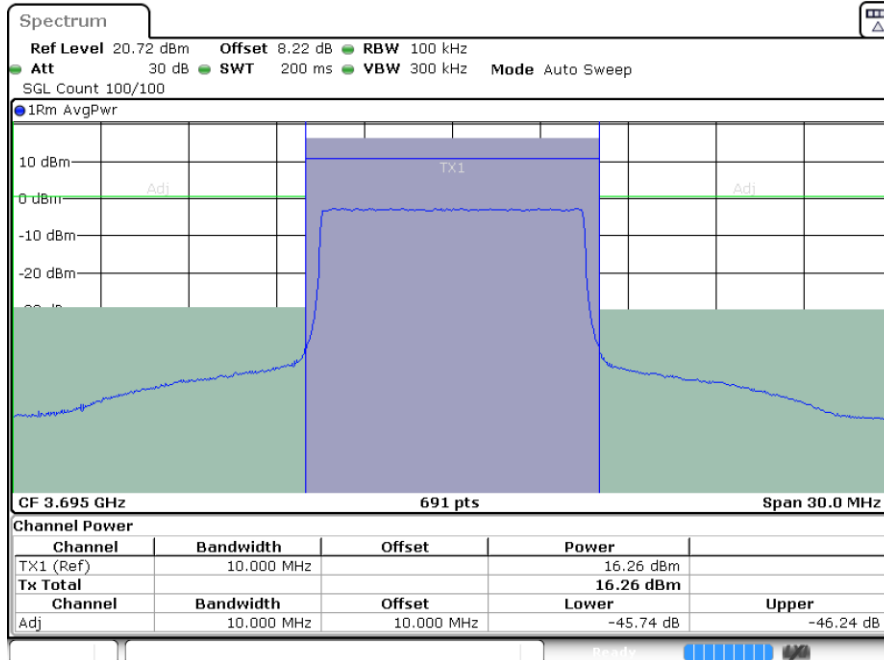


Date: 17.NOV.2021 01:38:33



LTE Band 48 / 15MHz


16QAM

Lowest Channel / 1RB0

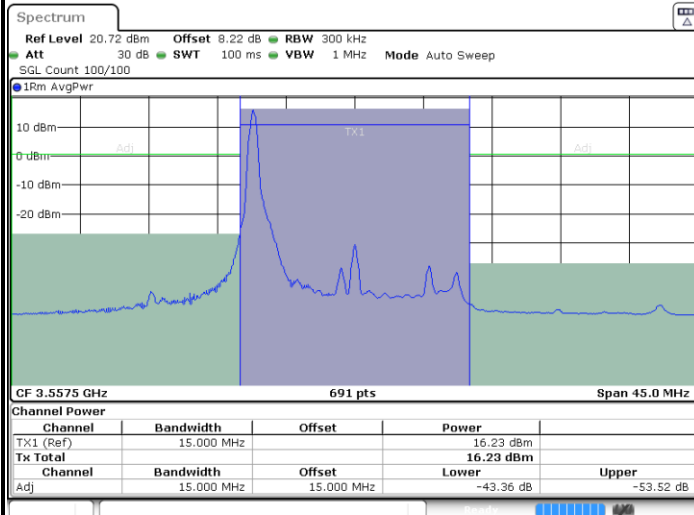


Date: 17.NOV.2021 01:54:05

Lowest Channel / 1RBmax

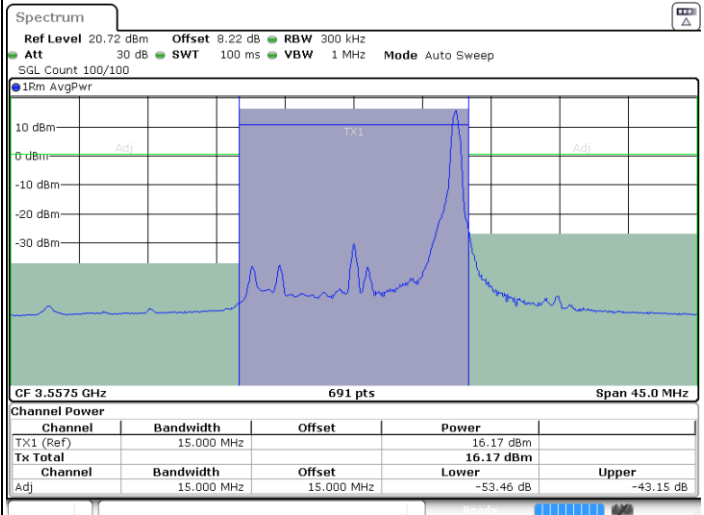

Date: 17.NOV.2021 02:05:20

Lowest Channel / Full RB

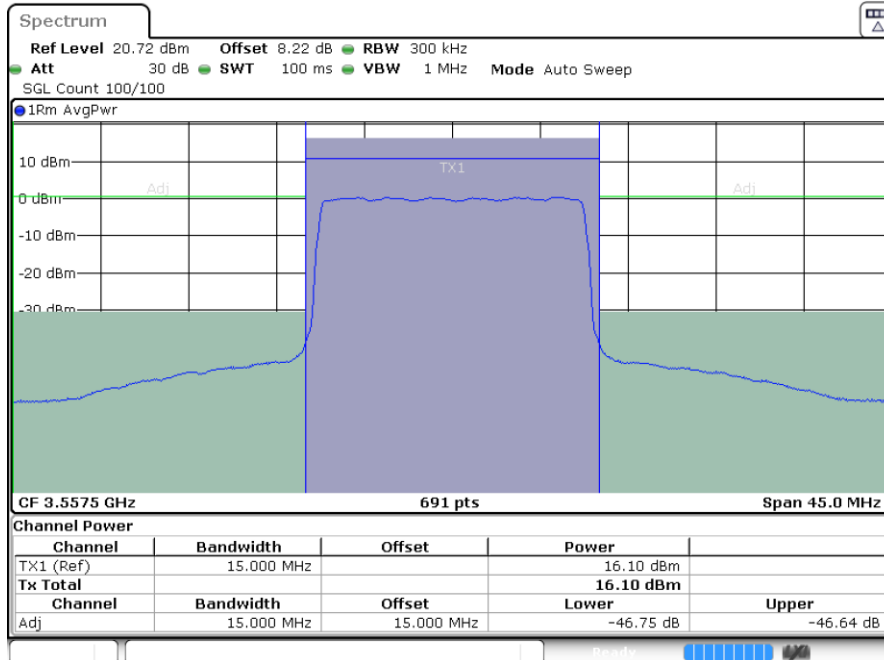


Date: 17.NOV.2021 02:12:23



LTE Band 48 / 15MHz


16QAM

Middle Channel / 1RB0

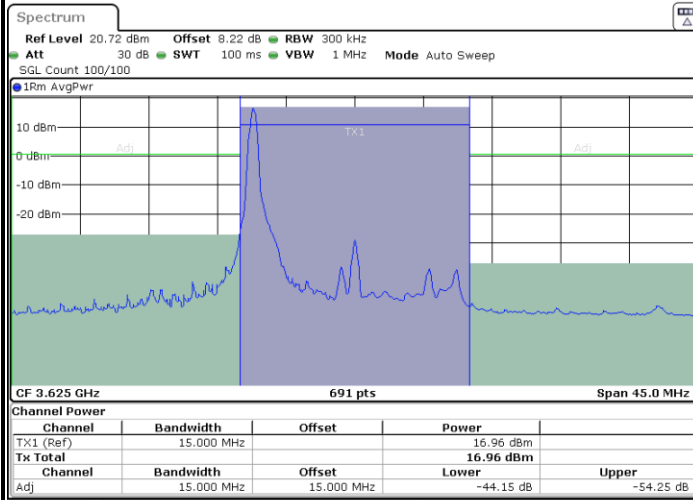


Date: 17.NOV.2021 02:38:29

Middle Channel / 1RBmax

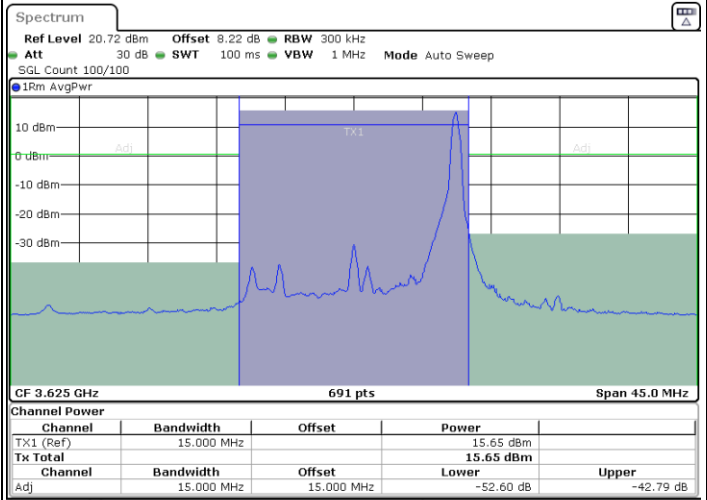

Date: 17.NOV.2021 02:58:42

Middle Channel / Full RB

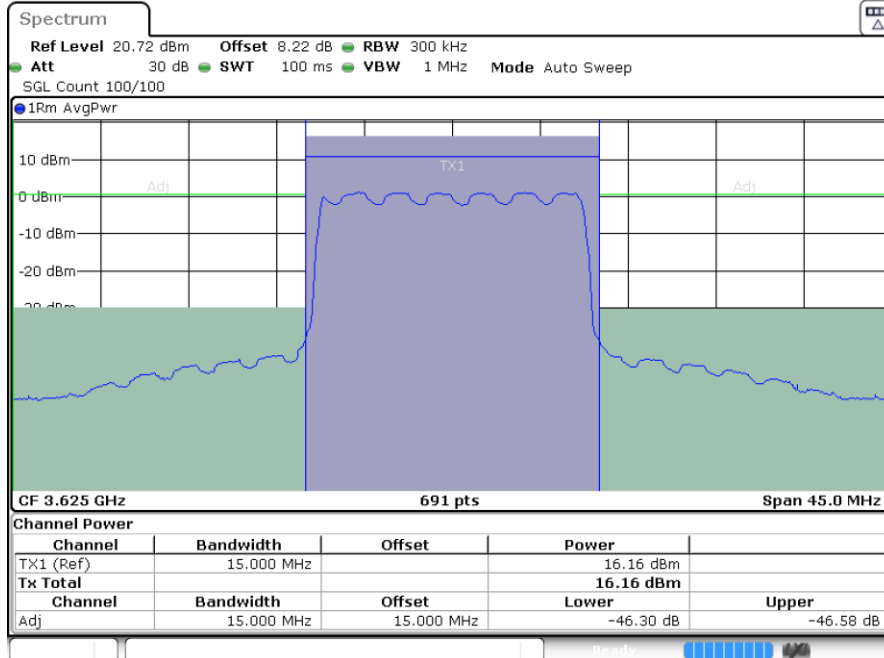


Date: 17.NOV.2021 02:21:55



LTE Band 48 / 15MHz


16QAM

Highest Channel / 1RB0

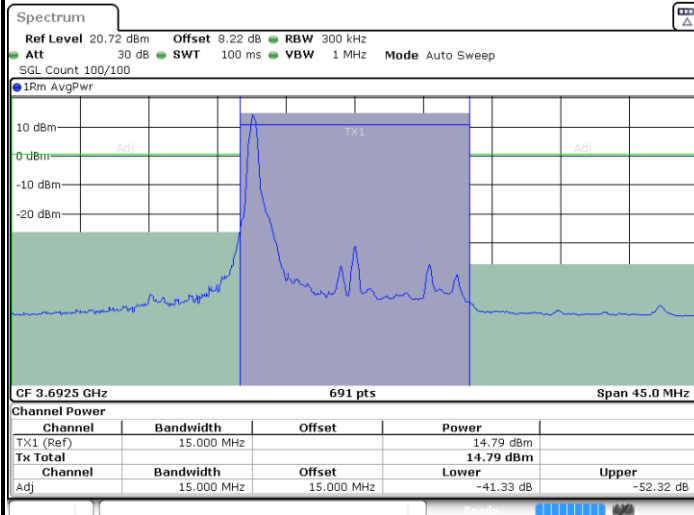


Date: 17.NOV.2021 03:08:39

Highest Channel / 1RBmax

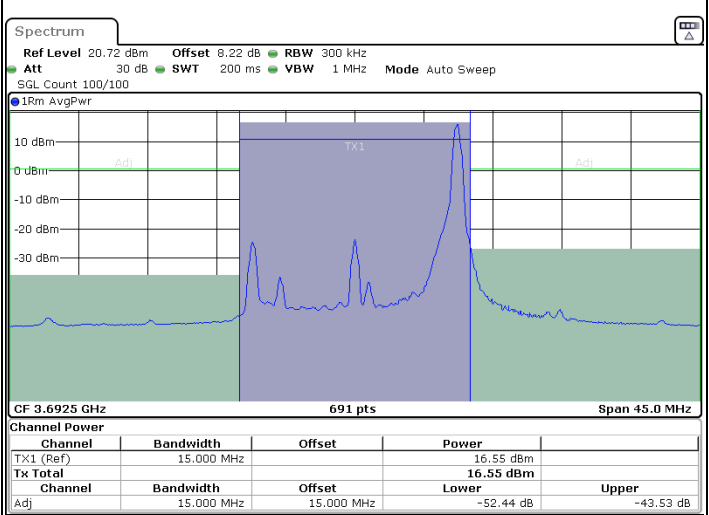

Highest Channel / Full RB

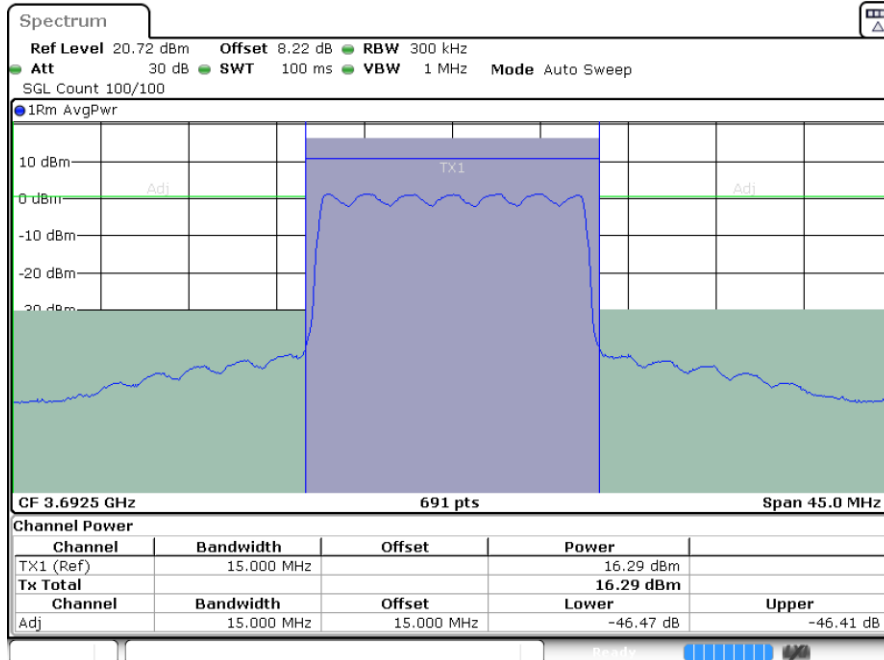


Date: 17.NOV.2021 03:31:35



LTE Band 48 / 20MHz


16QAM

Lowest Channel / 1RB0

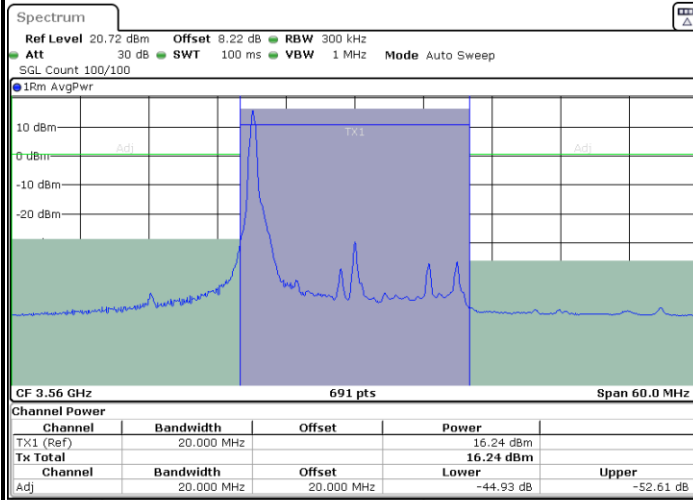


Date: 17.NOV.2021 04:25:07

Lowest Channel / 1RBmax

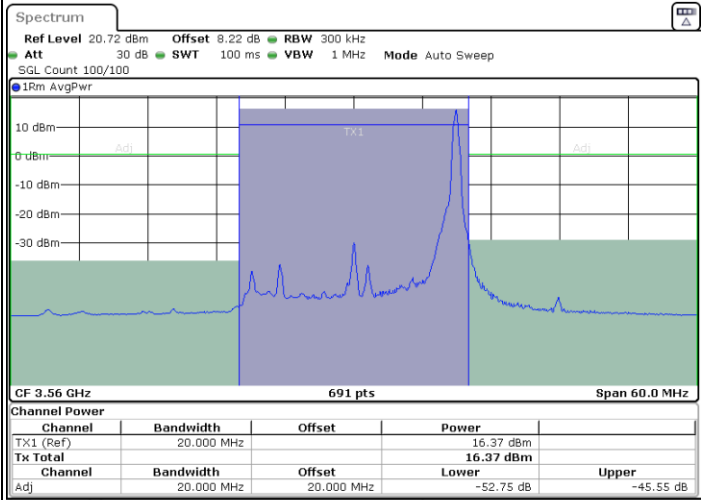

Date: 17.NOV.2021 04:34:07

Lowest Channel / Full RB

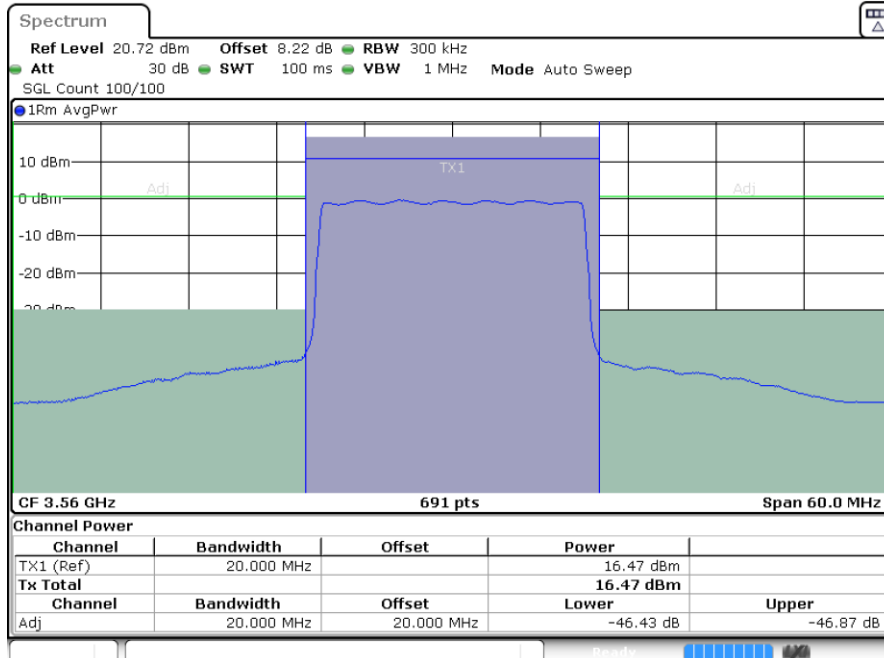


Date: 17.NOV.2021 04:24:20




LTE Band 48 / 20MHz

16QAM

Middle Channel / 1RB0

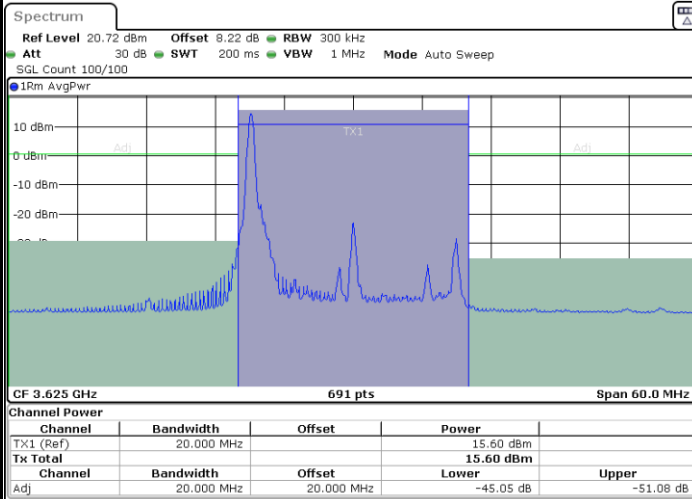


Middle Channel / 1RBmax

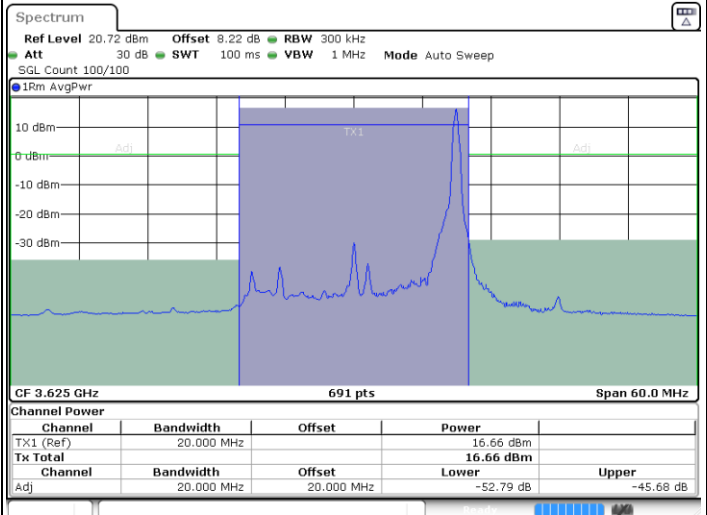

Date: 17.NOV.2021 04:58:34

Middle Channel / Full RB

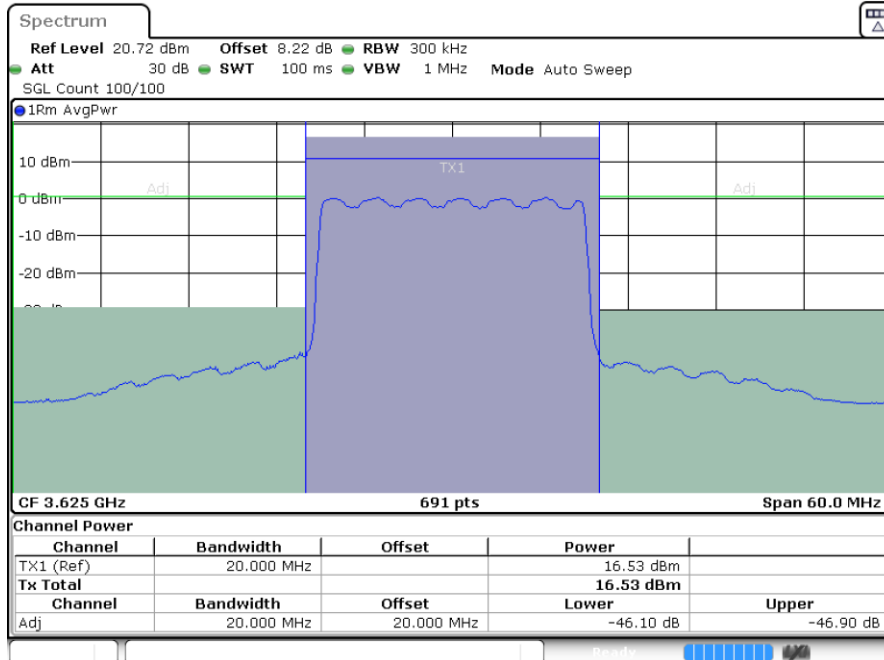


Date: 17.NOV.2021 05:25:27



LTE Band 48 / 20MHz


16QAM

Highest Channel / 1RB0

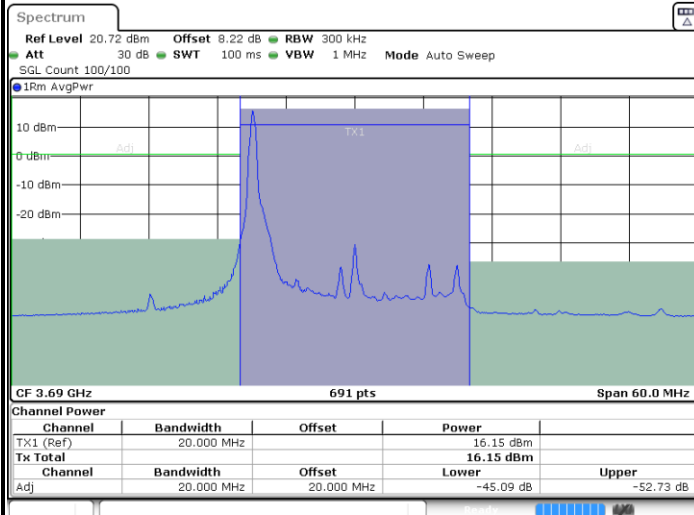


Date: 17.NOV.2021 05:50:05

Highest Channel / 1RBmax

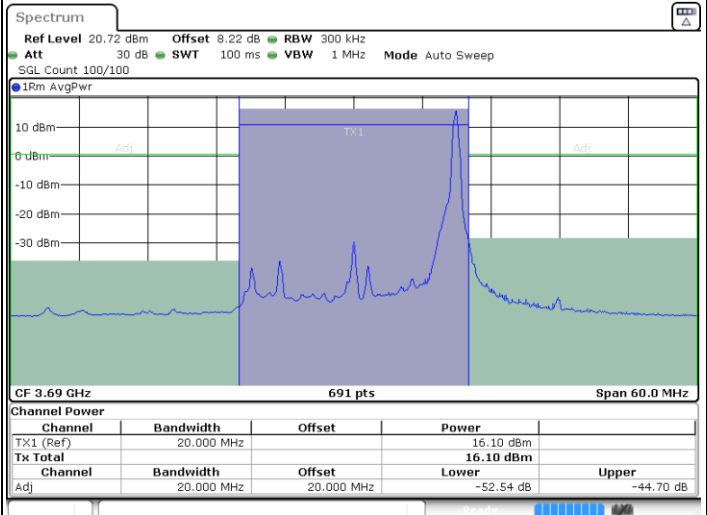

Date: 17.NOV.2021 05:59:40

Highest Channel / Full RB

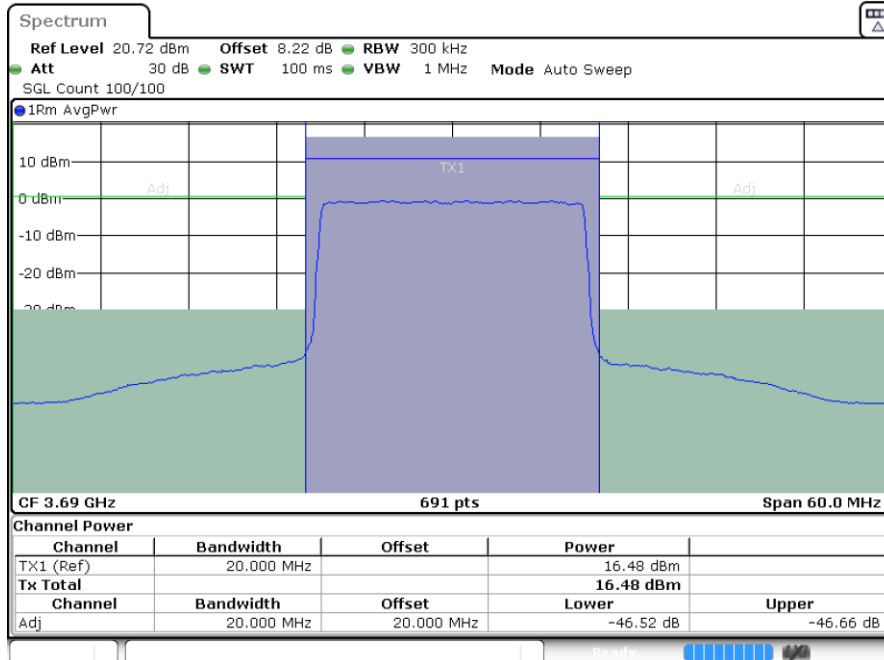


Date: 17.NOV.2021 05:35:04



LTE Band 48 / 5MHz


64QAM

Lowest Channel / 1RB0

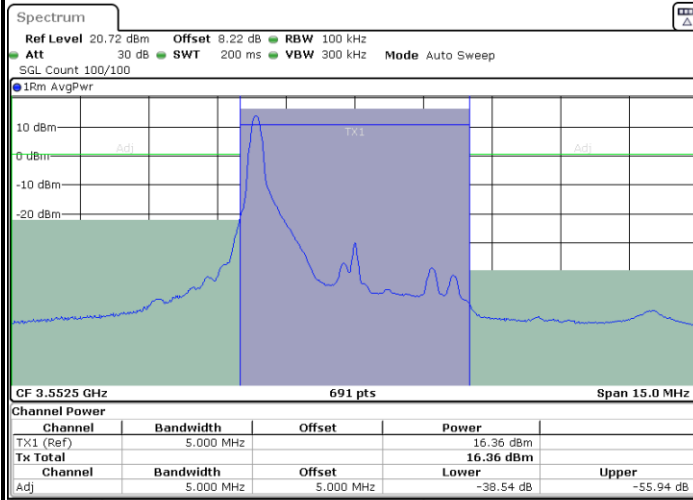


Date: 16 NOV. 2021 23:15:25

Lowest Channel / 1RBmax

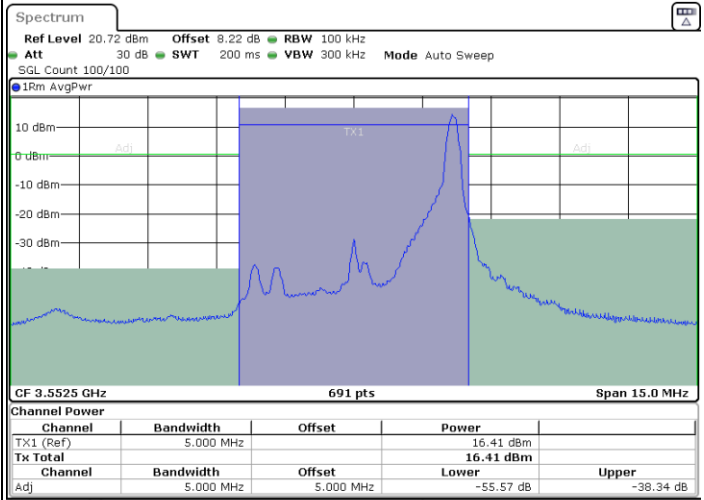

Date: 16 NOV. 2021 23:09:44

Lowest Channel / Full RB

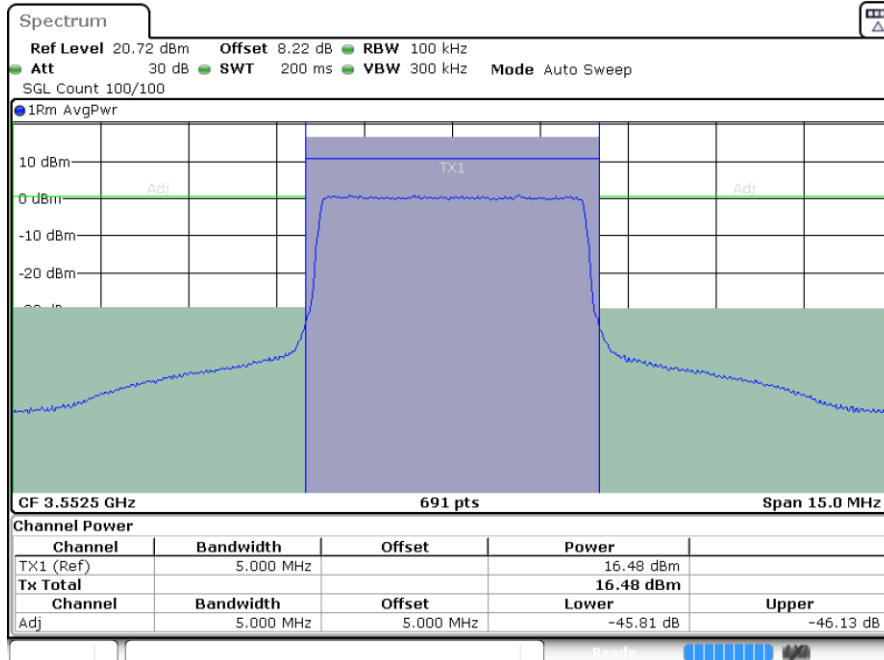


Date: 16 NOV. 2021 23:24:19



LTE Band 48 / 5MHz


64QAM

Middle Channel / 1RB0

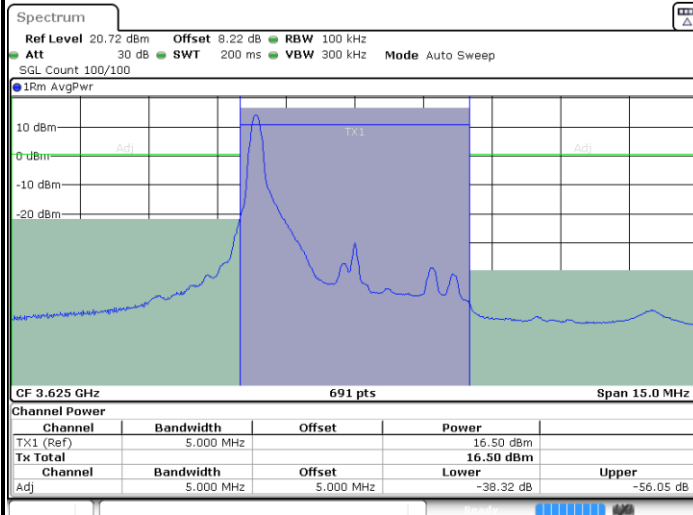


Date: 16 NOV. 2021 22:57:42

Middle Channel / 1RBmax

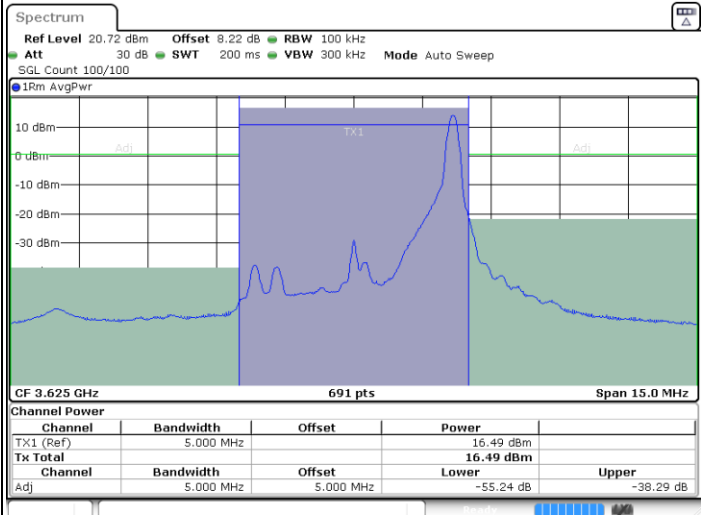

Date: 16 NOV. 2021 23:02:13

Middle Channel / Full RB

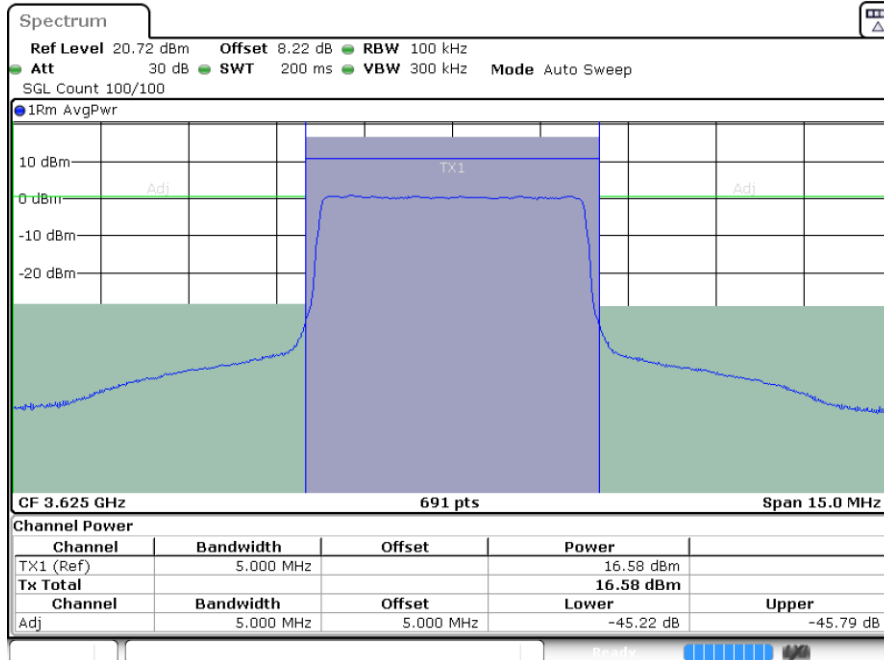


Date: 16 NOV. 2021 22:49:51



LTE Band 48 / 5MHz


64QAM

Highest Channel / 1RB0

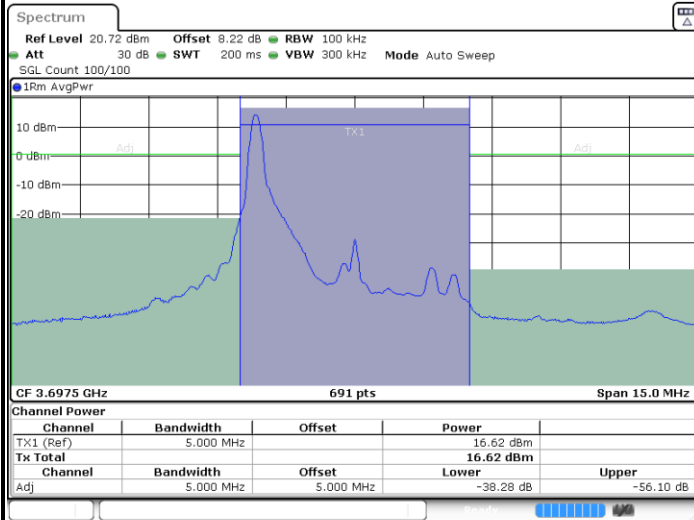


Date: 16 NOV. 2021 22:17:16

Highest Channel / 1RBmax

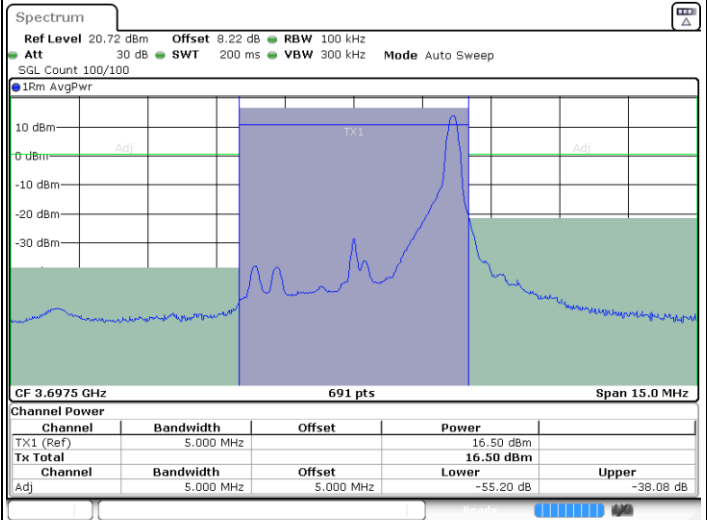

Date: 16 NOV. 2021 22:06:12

Highest Channel / Full RB

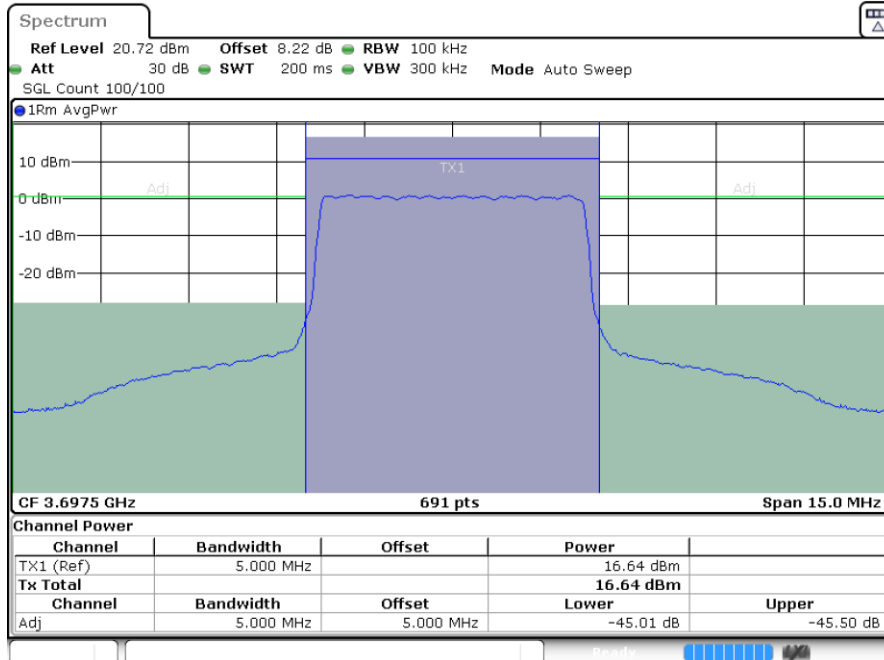


Date: 16 NOV. 2021 22:32:45



LTE Band 48 / 10MHz


64QAM

Lowest Channel / 1RB0

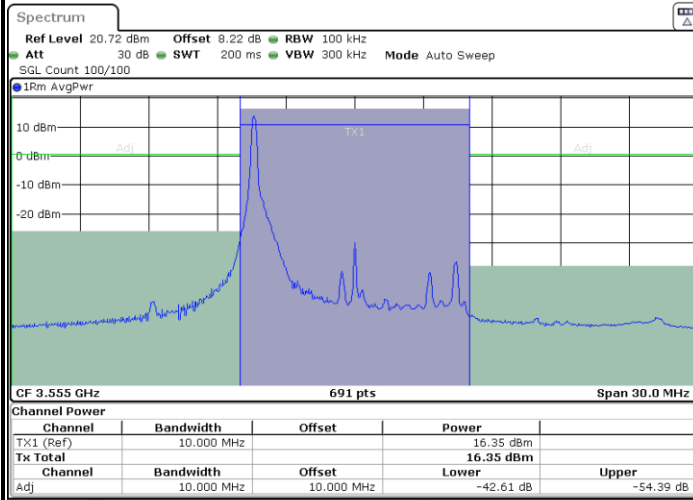


Date: 16 NOV. 2021 23:48:09

Lowest Channel / 1RBmax

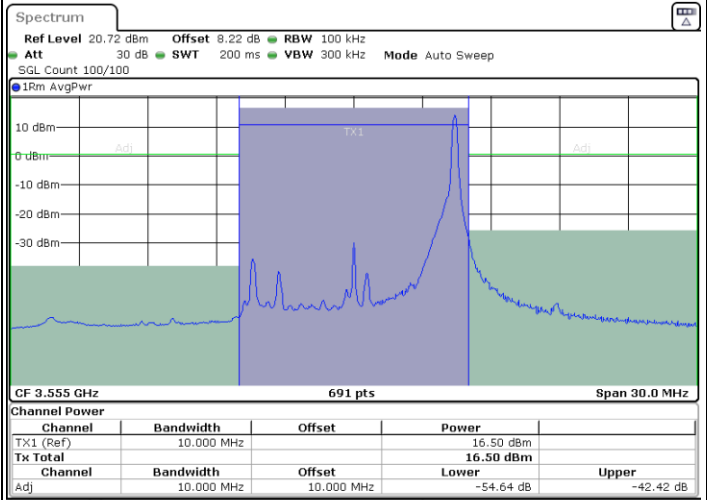

Date: 16 NOV. 2021 23:56:30

Lowest Channel / Full RB

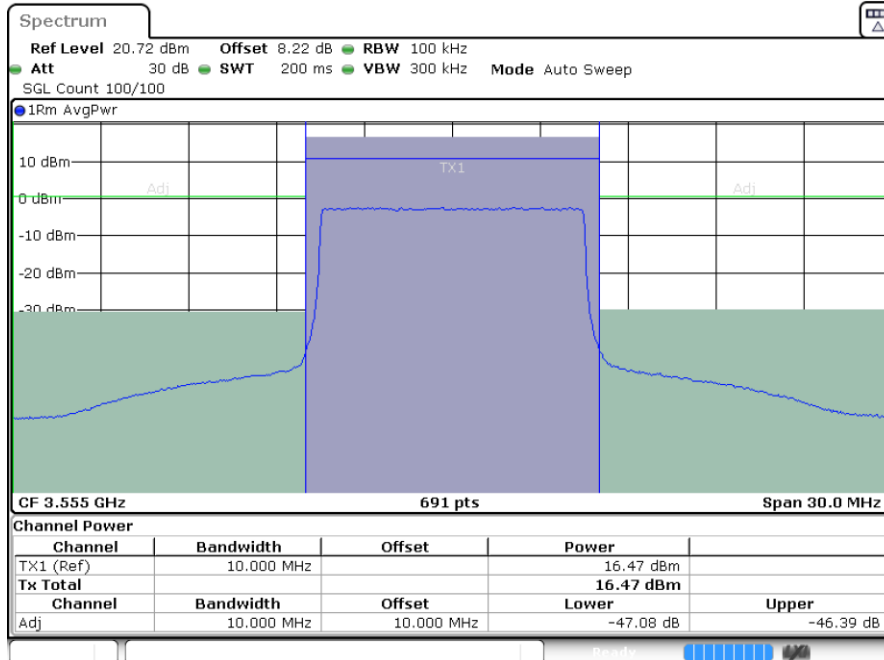


Date: 17 NOV. 2021 00:07:30



LTE Band 48 / 10MHz


64QAM

Middle Channel / 1RB0

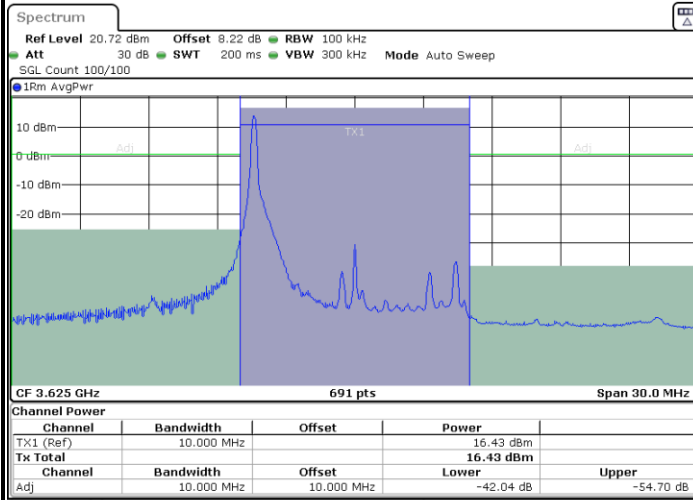


Date: 17.NOV.2021 00:26:03

Middle Channel / 1RBmax

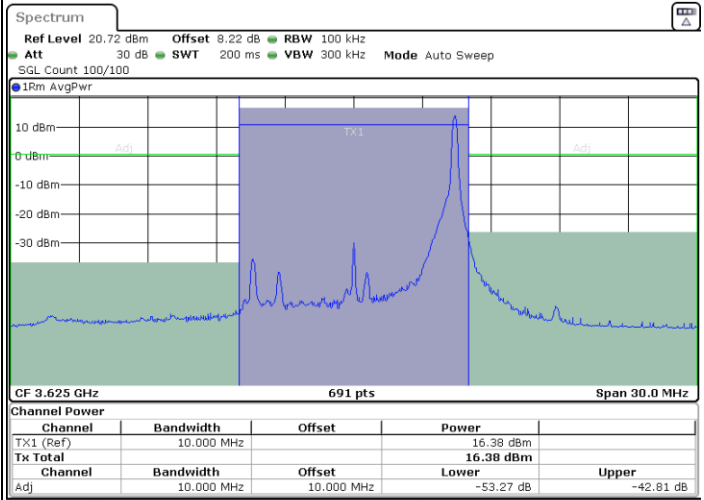

Date: 17.NOV.2021 01:08:57

Middle Channel / Full RB

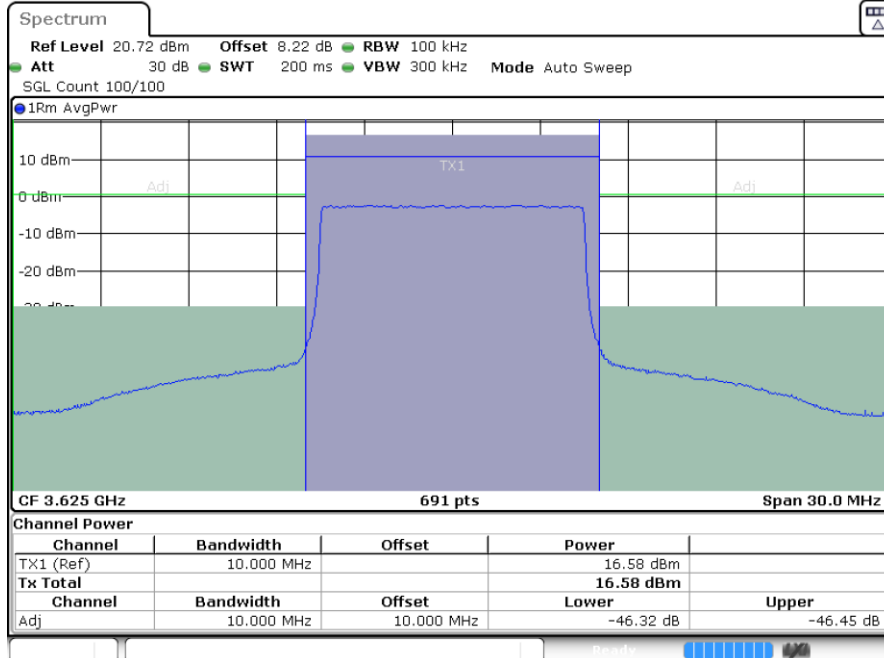


Date: 17.NOV.2021 00:13:27



LTE Band 48 / 10MHz


64QAM

Highest Channel / 1RB0

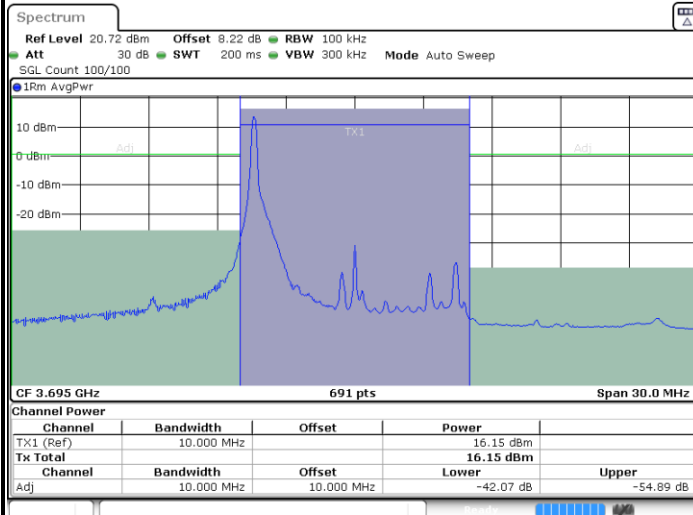


Date: 17.NOV.2021 01:26:43

Highest Channel / 1RBmax

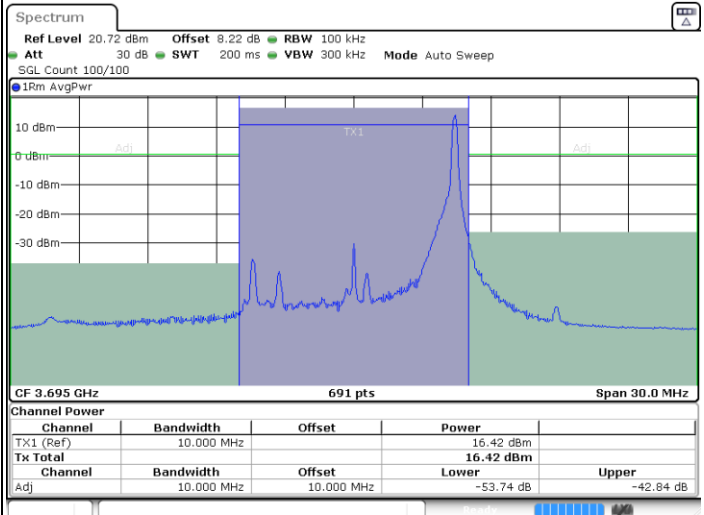

Date: 17.NOV.2021 01:20:23

Highest Channel / Full RB

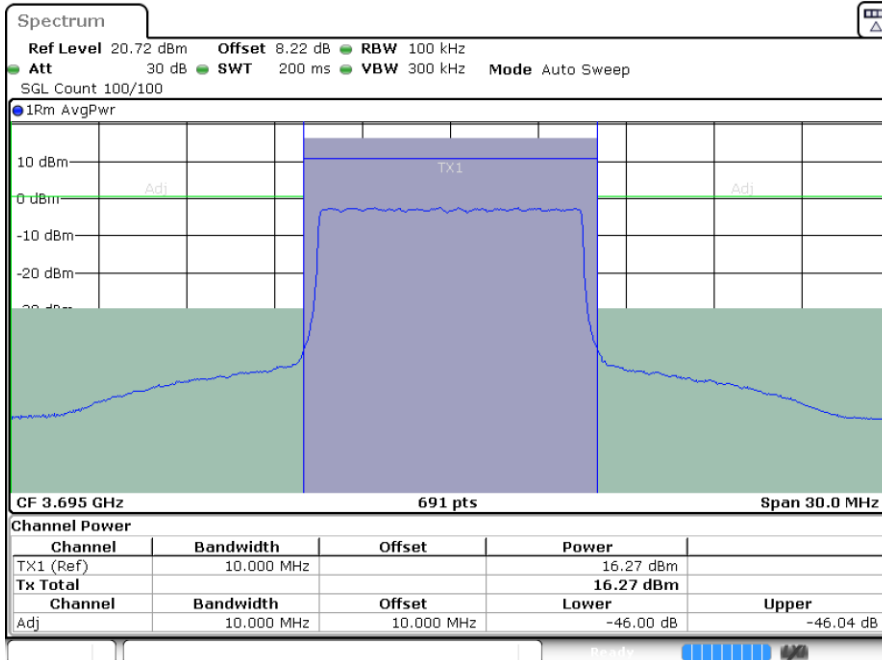


Date: 17.NOV.2021 01:41:07



LTE Band 48 / 15MHz


64QAM

Lowest Channel / 1RB0

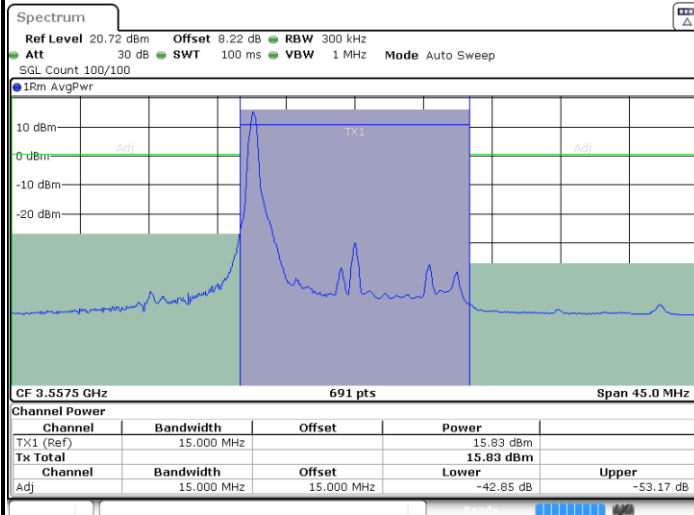


Date: 17.NOV.2021 01:56:32

Lowest Channel / 1RBmax

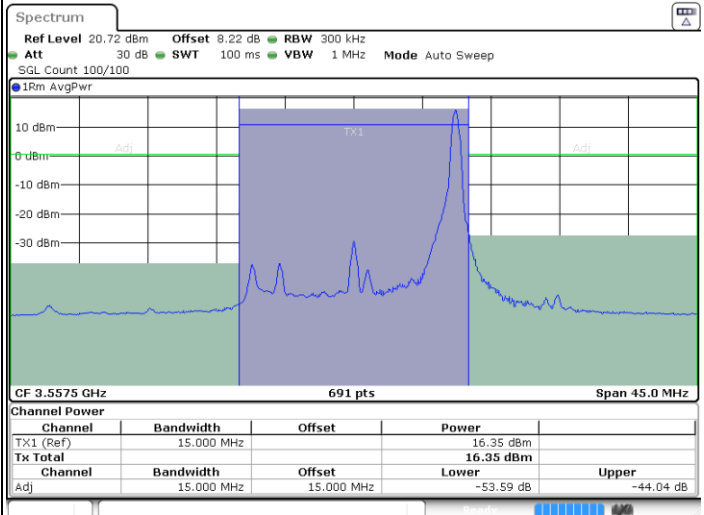

Date: 17.NOV.2021 02:03:14

Lowest Channel / Full RB

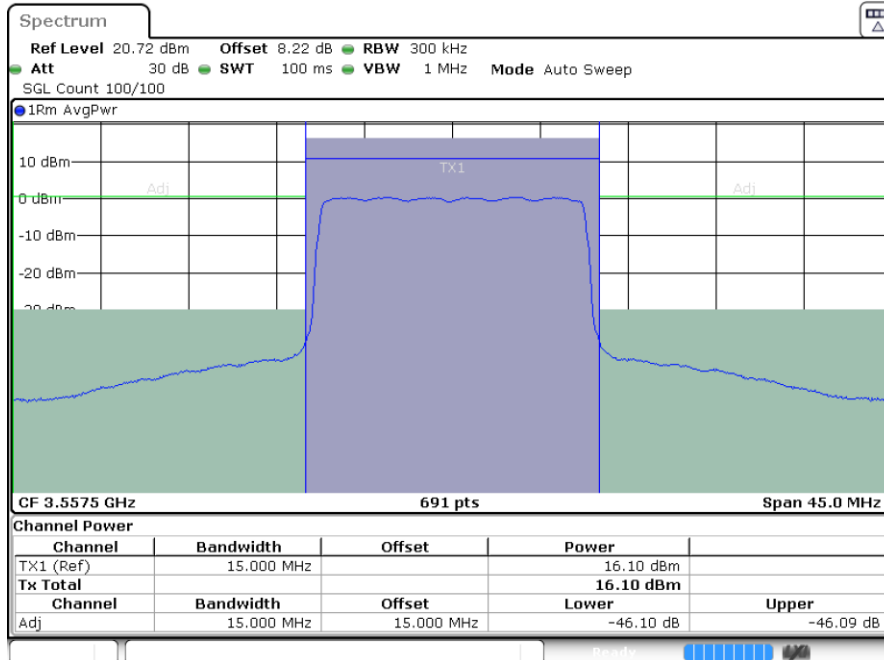


Date: 17.NOV.2021 02:15:02



LTE Band 48 / 15MHz


64QAM

Middle Channel / 1RB0

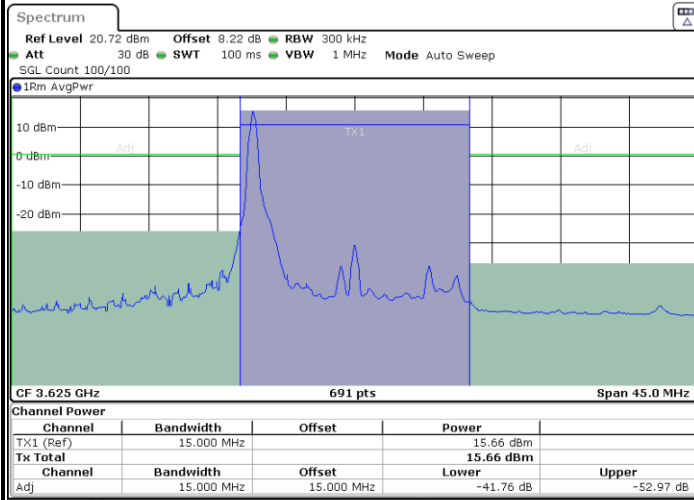


Date: 17.NOV.2021 02:36:24

Middle Channel / 1RBmax

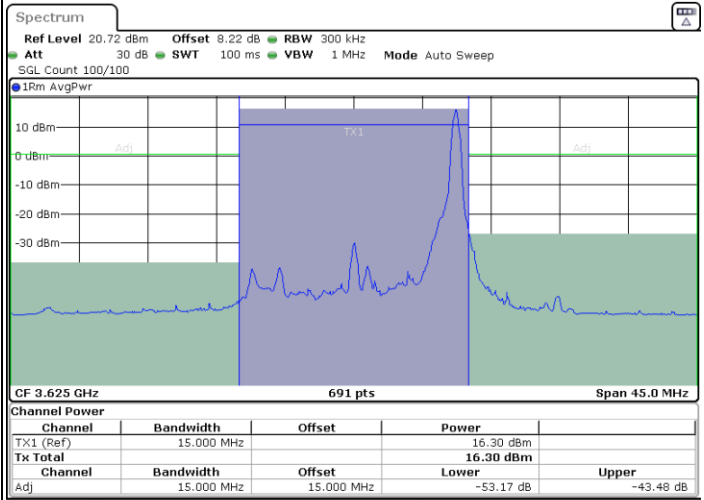

Date: 17.NOV.2021 03:01:10

Middle Channel / Full RB

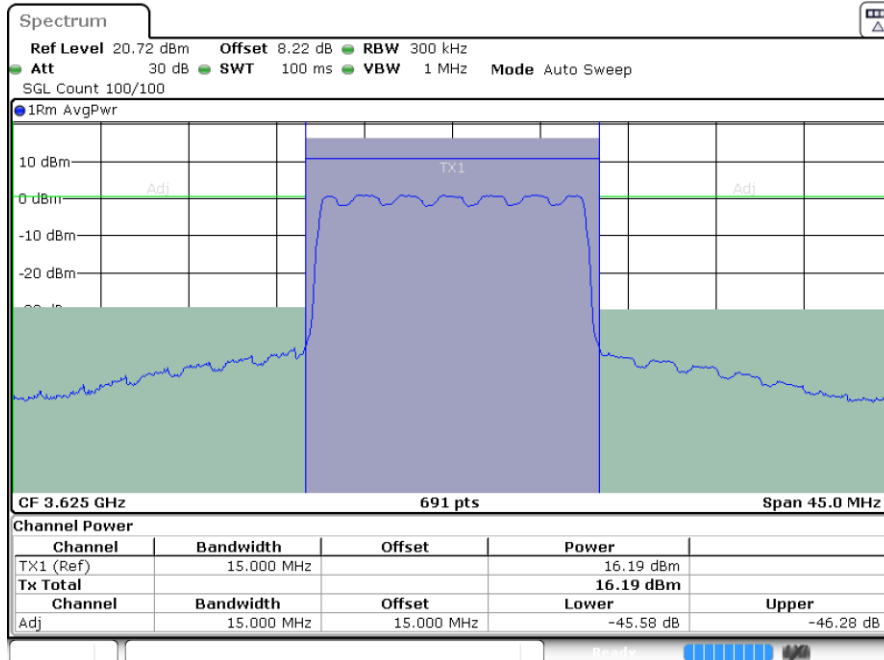

Date: 17.NOV.2021 02:27:41