



FCC RADIO TEST REPORT

FCC ID : 2ADZRBEACON1-1
Equipment : Nokia WiFi Beacon 1.1
Brand Name : Nokia
Model Name : Beacon 1.1
Applicant : Nokia Shanghai Bell Co., Ltd.
No.388, Ningqiao Rd, Pilot Free Trade Zone
Shanghai, 201206 P.R. China
Manufacturer : Nokia Shanghai Bell Co., Ltd.
No.388, Ningqiao Rd, Pilot Free Trade Zone
Shanghai, 201206 P.R. China
Standard : 47 CFR FCC Part 15.247

The product was received on Aug. 31, 2020, and testing was started from Aug. 31, 2020 and completed on Sep. 16, 2020. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Cliff Chang

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....3

Summary of Test Result.....4

1 General Description5

1.1 Information.....5

1.2 Applicable Standards9

1.3 Testing Location Information.....9

1.4 Measurement Uncertainty10

2 Test Configuration of EUT11

2.1 Test Channel Mode11

2.2 The Worst Case Measurement Configuration.....12

2.3 EUT Operation during Test13

2.4 Accessories13

2.5 Support Equipment.....14

2.6 Test Setup Diagram15

3 Transmitter Test Result18

3.1 AC Power-line Conducted Emissions18

3.2 DTS Bandwidth20

3.3 Maximum Conducted Output Power21

3.4 Power Spectral Density24

3.5 Emissions in Non-restricted Frequency Bands26

3.6 Emissions in Restricted Frequency Bands.....27

4 Test Equipment and Calibration Data31

Appendix A. Test Results of AC Power-line Conducted Emissions

Appendix B. Test Results of DTS Bandwidth

Appendix C. Test Results of Maximum Conducted Output Power

Appendix D. Test Results of Power Spectral Density

Appendix E. Test Results of Emissions in Non-restricted Frequency Bands

Appendix F. Test Results of Emissions in Restricted Frequency Bands

Appendix G. Test Results of Radiated Emission Co-location

Appendix H. Test Photos

Photographs of EUT v01



History of this test report

Report No.	Version	Description	Issued Date
FR083105AA	01	Initial issue of report	Oct. 28, 2020
FR083105AA	02	Removing the EUT bridge mode.	Nov. 05, 2020



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
0	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.247(a)	DTS Bandwidth	PASS	-
3.3	15.247(b)	Maximum Conducted Output Power	PASS	-
3.4	15.247(e)	Power Spectral Density	PASS	-
3.5	15.247(d)	Emissions in Non-restricted Frequency Bands	PASS	-
3.6	15.247(d)	Emissions in Restricted Frequency Bands	PASS	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: **Sam Chen**

Report Producer: **Wendy Pan**



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
2400-2483.5	b, g, n (HT20)	2412-2462	1-11 [11]
2400-2483.5	n (HT40)	2422-2452	3-9 [7]

Band	Mode	BWch (MHz)	Nant
2.4-2.4835GHz	802.11b	20	2TX
2.4-2.4835GHz	802.11g	20	2TX
2.4-2.4835GHz	802.11n HT20	20	2TX
2.4-2.4835GHz	802.11n HT40	40	2TX

Note:

- ◆ 11b mode uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.
- ◆ 11g, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- ◆ BWch is the nominal channel bandwidth.



1.1.2 Table for EUT information

The EUT has two set are identical to each other in all aspects except for the following table:

EUT	Description
EUT 1	Antenna set 1
EUT 2	Antenna set 2

1.1.3 Antenna Information

<Antenna set 1>

Ant.	Port	Brand	Model Name	Antenna Type	Connector	Antenna Gain (dBi)	
						2.4GHz	5GHz
1	1	INPAQ TECHNOLOGY (SUZHOU) CO., LTD	RFDPA072506I MLB9C1	Dipole Antenna	I-PEX	Note1	Note1
2	2	INPAQ TECHNOLOGY (SUZHOU) CO., LTD	RFDPA072511I MLB9C2	Dipole Antenna	I-PEX	Note1	Note1

Note1

Ant.	Port	Antenna Peak Gain (dBi)				
		2.4GHz			5GHz	
		2400MHz	2450MHz	2500MHz	5150 MHz	5850MHz
1	1	2.09	3.43	3.04	2.09	3.04
2	2	2.88	3.19	2.66	2.51	2.68

Correlated Antenna Gain (dBi)		
2.4GHz	5GHz	
	Band 1	Band 4
5.67	4.78	5.16



<Antenna set 2>

Ant.	Port	Brand Holder	Model Name	Antenna Type	Connector	Gain (dBi)	
						2.4GHz	5GHz
1	1	Signal Plus Technology Co.,Ltd.	6011F00204	Dipole Antenna	I-PEX	Note1	Note1
2	2	Signal Plus Technology Co.,Ltd.	6011F00205	Dipole Antenna	I-PEX	Note1	Note1

Note1

Ant.	Port	Antenna Gain (dBi)				
		2.4GHz			5GHz	
		2400MHz	2450MHz	2500MHz	5150 MHz	5850MHz
1	1	3.92	4.11	3.82	3.77	3.91
2	2	3.66	3.67	3.61	3.82	3.81

Correlated Antenna Gain (dBi)				
2.4GHz			5GHz	
2400MHz	2450MHz	2500MHz	5150 MHz	5850MHz
5.88	5.97	5.85	6.13	6.09

Note 1: The above information was declared by manufacturer.

Note 2: Because antenna set 1 and antenna set 2 are the same type antennas, only the higher gain antenna “antenna set 2” was tested.

For 2.4GHz function:

For IEEE 802.11b/g/n mode (2TX/2RX):

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

For 5GHz function:

For IEEE 802.11a/n/ac mode (2TX/2RX):

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

1.1.4 Mode Test Duty Cycle

Mode	DC	DCF(dB)	T(s)	VBW(Hz) ≥ 1/T
802.11b	0.989	0.05	n/a (DC>=0.98)	n/a (DC>=0.98)
802.11g	0.903	0.44	1.398m	1k
802.11n HT20	0.906	0.43	1.31m	1k
802.11n HT40	0.806	0.94	650u	3k

Note:

- ◆ DC is Duty Cycle.
- ◆ DCF is Duty Cycle Factor.



1.1.5 EUT Operational Condition

EUT Power Type	From Power Adapter			
Beamforming Function	<input checked="" type="checkbox"/> With beamforming	<input type="checkbox"/> Without beamforming		
	The product has beamforming function for 802.11n/ac in 5GHz.			
Function	<input checked="" type="checkbox"/> Point-to-multipoint	<input type="checkbox"/> Point-to-point		
Test Software Version	Telnet			

Note: The above information was declared by manufacturer.

1.1.6 Table for Multiple Listing

The EUT has two market sale set which are identical to each other in all aspects except for the following table:

Model Name	Unit	Part number	Adapter	RJ-45 cable
Beacon 1.1	KIT_Beacon 1.1	3FE 49234 XX,(XX (where,x, acharacters can be replaced by either alphanumeric character between A and Z) means that different customer markets have no difference in product hardware and have no impact on EMC	√	√
	EMA_Beacon 1.1	3FE 49236 XX,(XX (where,x, acharacters can be replaced by either alphanumeric character between A and Z) means that different customer markets have no difference in product hardware and have no impact on EMC	—	—

Note: 1.From the above table, model: Beacon 1.1 for unit: KIT_Beacon 1.1 was selected as representative model for the test and its data was recorded in this report.

2.The above information was declared by manufacturer.

1.1.7 EUT Supports Function

The EUT supports AP Router mode and mesh mode. Only the AP Router mode was tested and recorded in this test report.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15
- ◆ ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of TAF.

- ◆ FCC KDB 558074 D01 v05r02
- ◆ FCC KDB 662911 D01 v02r01
- ◆ FCC KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location		
<input type="checkbox"/>	HWA YA	ADD : No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL : 886-3-327-3456 FAX : 886-3-327-0973
<input checked="" type="checkbox"/>	JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted	TH02-CB	RJ Huang	24.1-24.8°C / 55-58%	Sep. 02, 2020 ~ Sep. 16, 2020
Radiated<1GHz and Radiated>1GHz Co-location	03CH05-CB	Owen Hsu	23.2-23.9°C / 51-53%	Sep. 09, 2020 ~ Sep. 10, 2020
Radiated>1GHz	03CH01-CB	JN Du	23.2-23.9°C / 51-53%	Aug. 31, 2020 ~ Sep. 14, 2020
AC Conduction	CO01-CB	Peter Wu	22~23°C / 61~62%	Sep. 15, 2020

Test site Designation No. TW0006 with FCC.
Test site registered number IC 4086D with Industry Canada.



1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.0 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	5.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.9 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.6 dB	Confidence levels of 95%
Conducted Emission	2.8 dB	Confidence levels of 95%
Output Power Measurement	1.4 dB	Confidence levels of 95%
Power Density Measurement	2.8 dB	Confidence levels of 95%
Bandwidth Measurement	0.39%	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Mode	Power Setting
802.11b_Nss1,(1Mbps)_2TX	-
2412MHz	11
2417MHz	13
2437MHz	18
2457MHz	13
2462MHz	11
802.11g_Nss1,(6Mbps)_2TX	-
2412MHz	2
2417MHz	4
2437MHz	11
2457MHz	5
2462MHz	2
802.11n HT20_Nss1,(MCS0)_2TX	-
2412MHz	0
2417MHz	3
2437MHz	10
2457MHz	6
2462MHz	2
802.11n HT40_Nss1,(MCS0)_2TX	-
2422MHz	0
2427MHz	1
2437MHz	5
2447MHz	4
2452MHz	2



2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral
Operating Mode	Normal Link
1	EUT 2 + adapter 1 (AP Router Mode)
2	EUT 2 + adapter 2 (AP Router Mode)
For operating mode 1 is the worst case and it was record in this test report.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	DTS Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in Non-restricted Frequency Bands
Test Condition	Conducted measurement at transmit chains
Test Mode	EUT 2

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emissions in Restricted Frequency Bands
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	Normal Link
1	EUT 2 + adapter 1 (AP Router Mode)
2	EUT 2 + adapter 2 (AP Router Mode)
For operating mode 2 is the worst case and it was record in this test report.	
Operating Mode > 1GHz	CTX
1	EUT 2

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Radiated Emission Co-location
Test Condition	Radiated measurement
Operating Mode	Normal Link
1	EUT 2 + WLAN 2.4GHz+WLAN 5GHz
Refer to Appendix G for Radiated Emission Co-location.	



The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	
1	EUT 2 WLAN 2.4GHz+WLAN 5GHz
Refer to Sporton Test Report No.: FA083105 for Co-location RF Exposure Evaluation.	

Note: The EUT can only be used in Y axis position.

2.3 EUT Operation during Test

For CTX Mode:

The EUT was programmed to be in continuously transmitting mode.

For Normal Link:

During the test, the EUT operation to normal function.

2.4 Accessories

Power	Brand	Model	Rating
Adapter 1	RUIDE	RD1201000-C55-35MGD	Input:100-240V ~ 50/60Hz, 0.6A Max Output:12V, 1.0A
Adapter 2	UE	UES12LU-120100SPA	Input:100-240V ~ 50/60Hz, 0.5A Output:12V, 1.0A
Other			
RJ-45 cable*1: Non-shielded, 1m			



2.5 Support Equipment

For AC Conduction:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	LAN NB	DELL	E6430	N/A
B	WAN NB	DELL	E6430	N/A
C	2.4G NB	DELL	E6430	N/A
D	5G NB	DELL	E6430	N/A


For Radiated (below 1GHz):

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	LAN NB	DELL	E4300	N/A
B	WAN NB	DELL	E4300	N/A
C	2.4G NB	DELL	E4300	N/A
D	5G NB	DELL	E4300	N/A


For Radiated (above 1GHz) and RF Conducted:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E4300	N/A

2.6 Test Setup Diagram

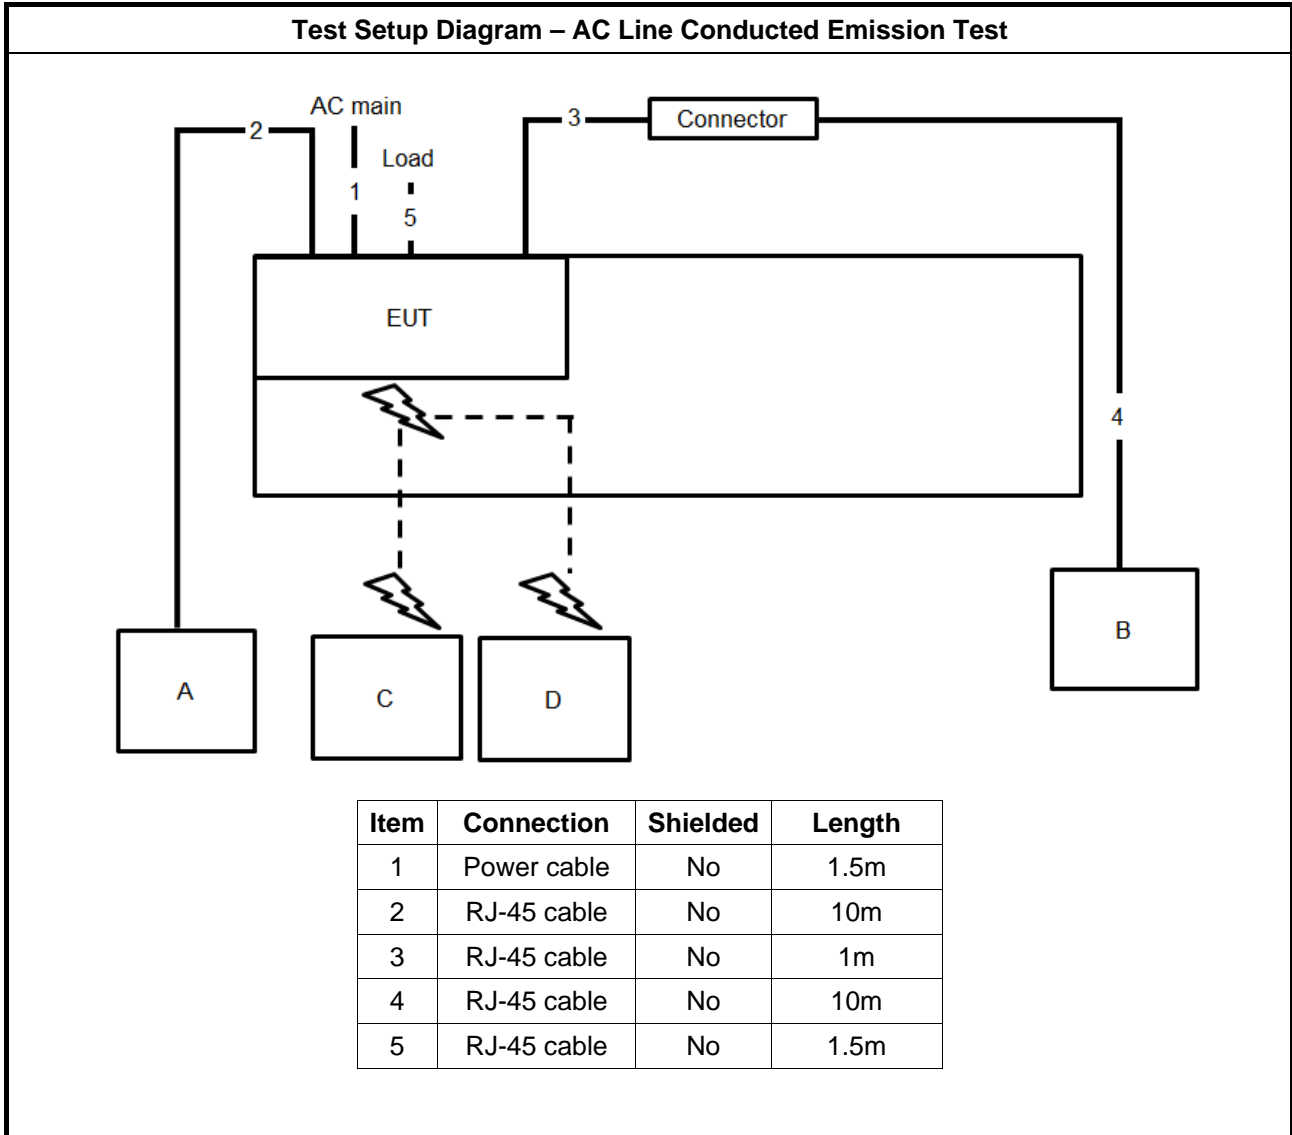


Test Setup Diagram - Radiated Test < 1GHz

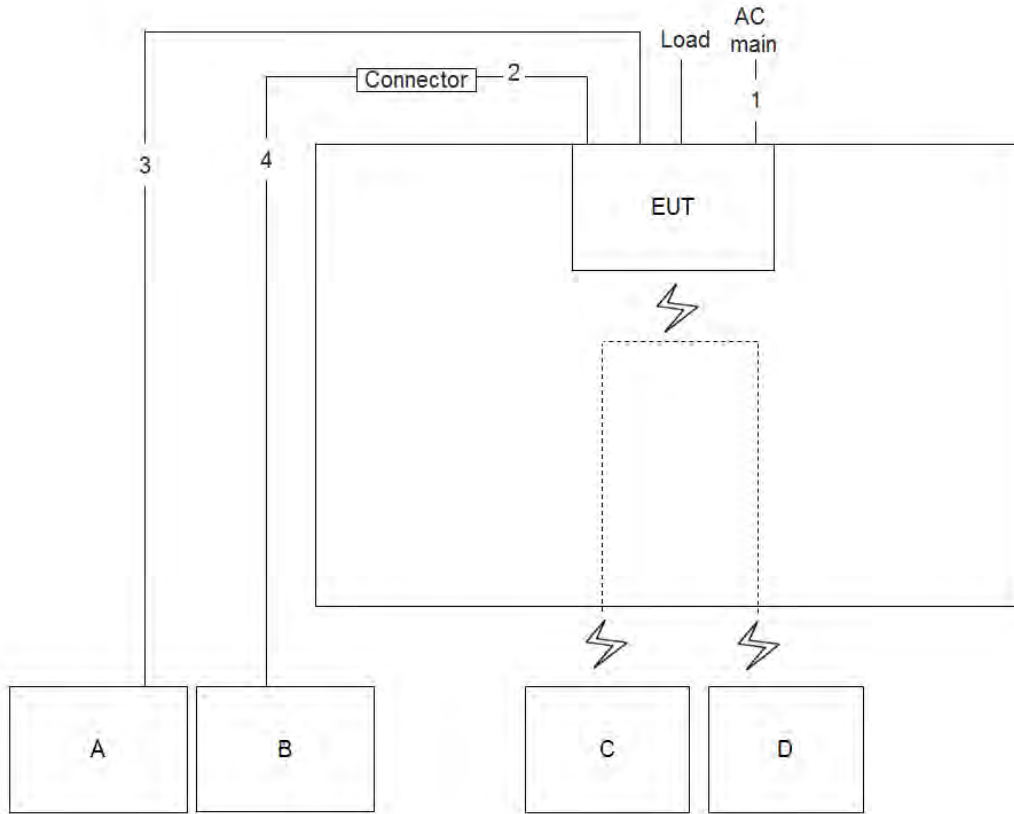

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	1m
3	RJ-45 cable	No	10m
4	RJ-45 cable	No	10m
5	RJ-45 cable	No	1.5m



Test Setup Diagram - Radiated Test > 1GHz

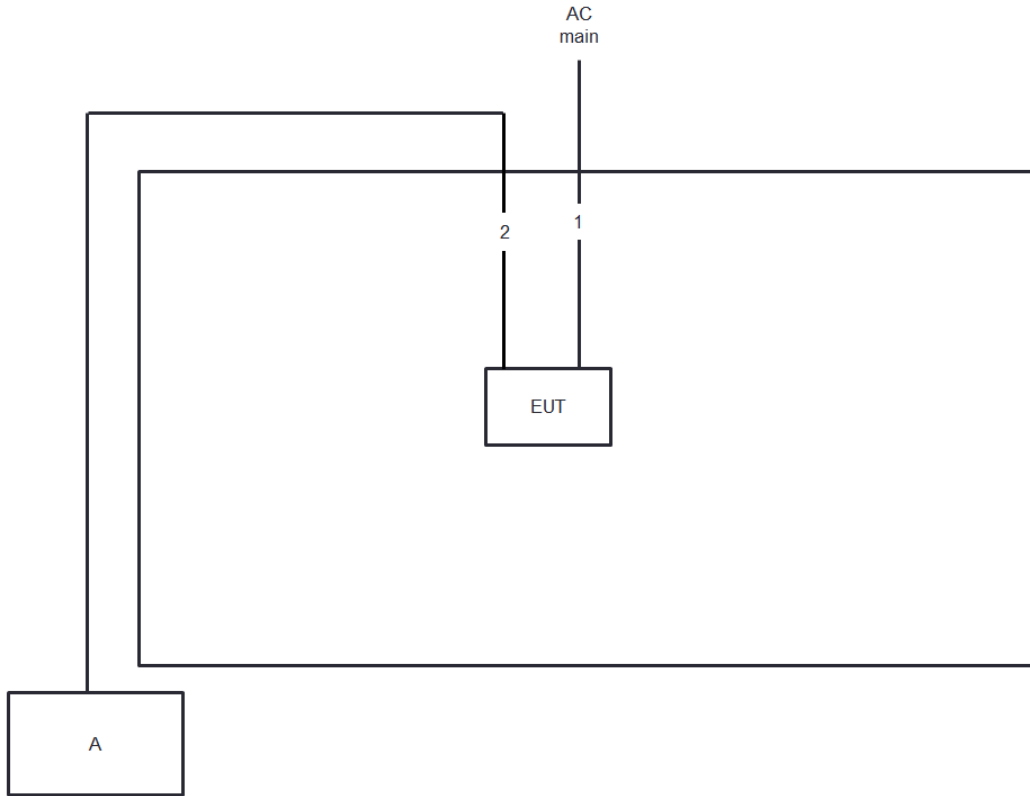

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

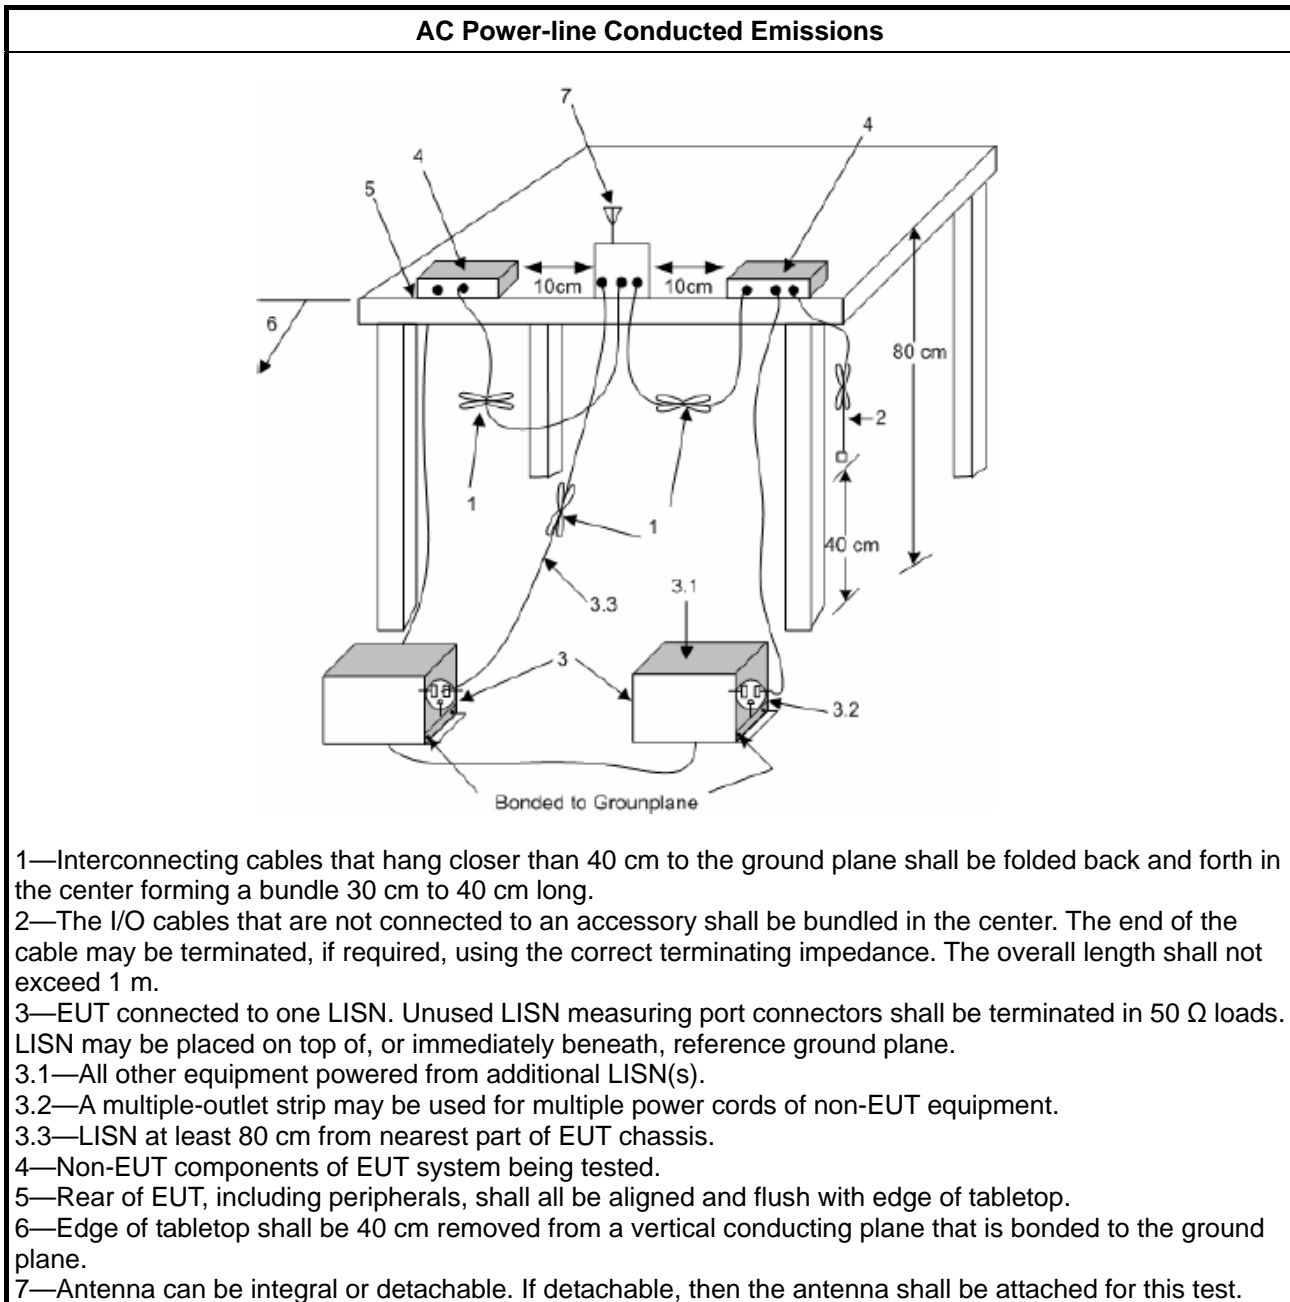

3.1.5 Measurement Results Calculation

The measured Level is calculated using:

- a. Corrected Reading: LISN Factor (LISN) + Attenuator (AT/AUX) + Cable Loss (CL) + Read Level (Raw) = Level
- b. Margin = -Limit + Level

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 DTS Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit
Systems using digital modulation techniques:
<ul style="list-style-type: none"> ▪ 6 dB bandwidth \geq 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method
<ul style="list-style-type: none"> ▪ For the emission bandwidth shall be measured using one of the options below:
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.1 Option 1 for 6 dB bandwidth measurement.
<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.2 Option 2 for 6 dB bandwidth measurement.
<input type="checkbox"/> Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.

3.2.4 Test Setup

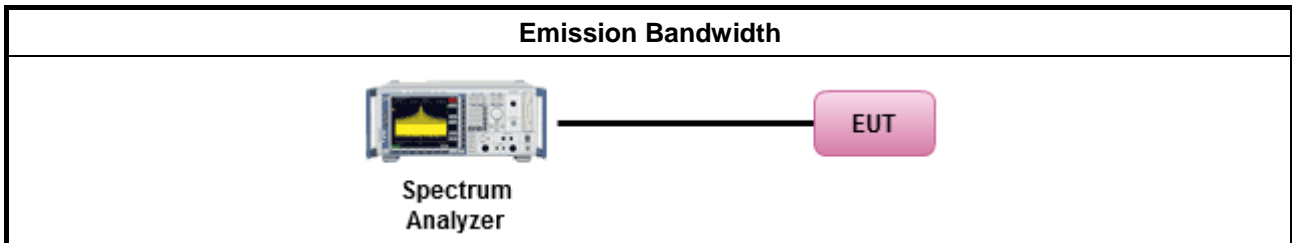

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B



3.3 Maximum Conducted Output Power

3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
	<ul style="list-style-type: none"> ▪ If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
	<ul style="list-style-type: none"> ▪ Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
	<ul style="list-style-type: none"> ▪ Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	<ul style="list-style-type: none"> ▪ Smart antenna system (SAS):
	<ul style="list-style-type: none"> - Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	<ul style="list-style-type: none"> - Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	<ul style="list-style-type: none"> - Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm
<p>P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.</p>	

3.3.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.



3.3.3 Test Procedures

Test Method	
<ul style="list-style-type: none"> ▪ Maximum Peak Conducted Output Power 	
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.1.1 & C63.10 clause 11.9.1.1 (RBW ≥ EBW method).
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.1.3 & C63.10 clause 11.9.1.3 (peak power meter).
<ul style="list-style-type: none"> ▪ Maximum Conducted Output Power 	
[duty cycle ≥ 98% or external video / power trigger]	
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.2 Method AVGSA-1.
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.3 Method AVGSA-1A. (alternative)
duty cycle < 98% and average over on/off periods with duty factor	
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.4 Method AVGSA-2.
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.5 Method AVGSA-2A (alternative)
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.6 Method AVGSA-3
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.7 Method AVGSA-3A (alternative)
Measurement using a power meter (PM)	
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.1 Method AVGPM (using an RF average power meter).
	<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.2 Method AVGPM-G (using an gate RF average power meter).
<ul style="list-style-type: none"> ▪ For conducted measurement. 	
	<ul style="list-style-type: none"> ▪ If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
	<ul style="list-style-type: none"> ▪ If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$

3.3.4 Test Setup

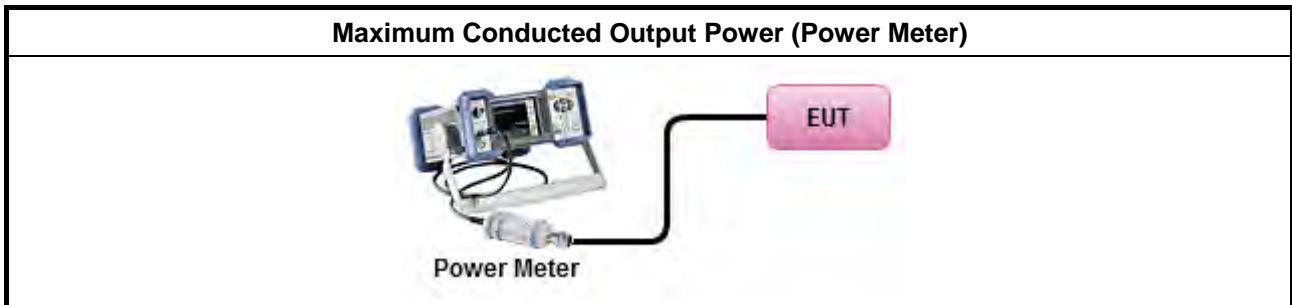

3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C



3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
<ul style="list-style-type: none"> Power Spectral Density (PSD) \leq 8 dBm/3kHz


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method			
<ul style="list-style-type: none"> Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option). 			
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10 Method Max. PSD.			
<ul style="list-style-type: none"> For conducted measurement. <ul style="list-style-type: none"> If The EUT supports multiple transmit chains using options given below: <table border="1"> <tbody> <tr> <td> <input checked="" type="checkbox"/> Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace. </td> </tr> <tr> <td> <input type="checkbox"/> Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits, </td> </tr> <tr> <td> <input type="checkbox"/> Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit. </td> </tr> </tbody> </table> 	<input checked="" type="checkbox"/> Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.	<input type="checkbox"/> Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,	<input type="checkbox"/> Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
<input checked="" type="checkbox"/> Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.			
<input type="checkbox"/> Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,			
<input type="checkbox"/> Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.			

3.4.4 Test Setup

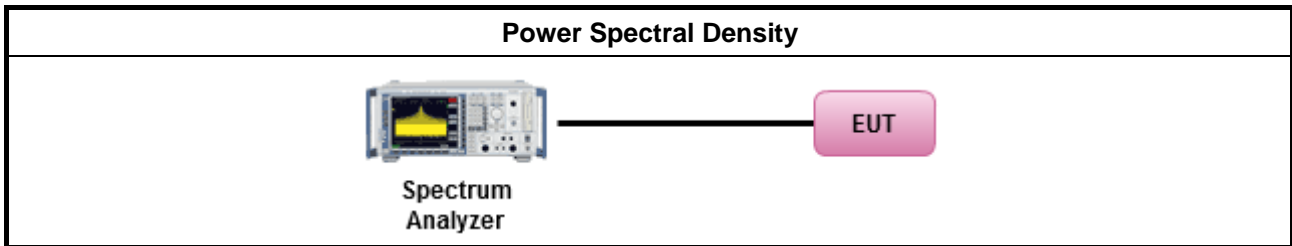

3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

3.5 Emissions in Non-restricted Frequency Bands

3.5.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dBc)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method
<ul style="list-style-type: none"> Refer as FCC KDB 558074, clause 8.5 for unwanted emissions into non-restricted bands.

3.5.4 Test Setup

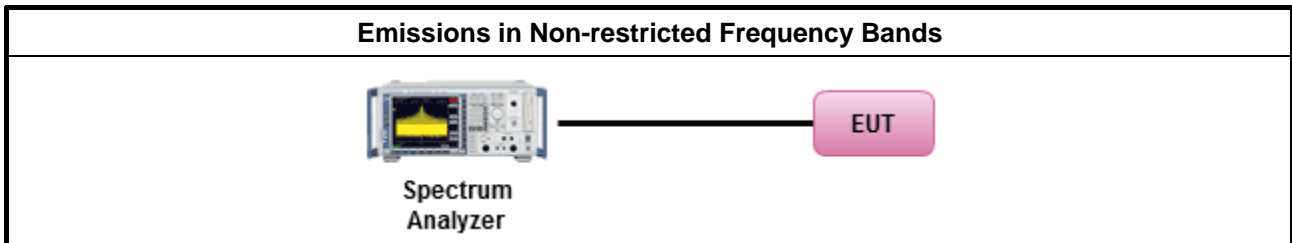

3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E



3.6 Emissions in Restricted Frequency Bands

3.6.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

3.6.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.




3.6.3 Test Procedures

Test Method	
<ul style="list-style-type: none"> ▪ The average emission levels shall be measured in [duty cycle \geq 98 or duty factor]. 	
<ul style="list-style-type: none"> ▪ Refer as ANSI C63.10, clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band. 	
<ul style="list-style-type: none"> ▪ For the transmitter unwanted emissions shall be measured using following options below: 	
	<ul style="list-style-type: none"> ▪ Refer as FCC KDB 558074, clause 8.6 for unwanted emissions into restricted bands.
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.1(trace averaging for duty cycle \geq 98%).
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.2(trace averaging + duty factor).
	<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.3(Reduced VBW \geq 1/T).
	<input type="checkbox"/> Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW \geq 1/T, where T is pulse time.
	<input type="checkbox"/> Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.4 measurement procedure peak limit.
<ul style="list-style-type: none"> ▪ For the transmitter band-edge emissions shall be measured using following options below: 	
	<ul style="list-style-type: none"> ▪ Refer as FCC KDB 558074 clause 8.7 & C63.10 clause 11.13.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below.
	<ul style="list-style-type: none"> ▪ Refer as FCC KDB 558074, clause 8.7 (ANSI C63.10, clause 6.10.6) for marker-delta method for band-edge measurements.
	<ul style="list-style-type: none"> ▪ Refer as FCC KDB 558074, clause 8.7 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).
	<ul style="list-style-type: none"> ▪ For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB
	<ul style="list-style-type: none"> ▪ For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.

3.6.4 Test Setup

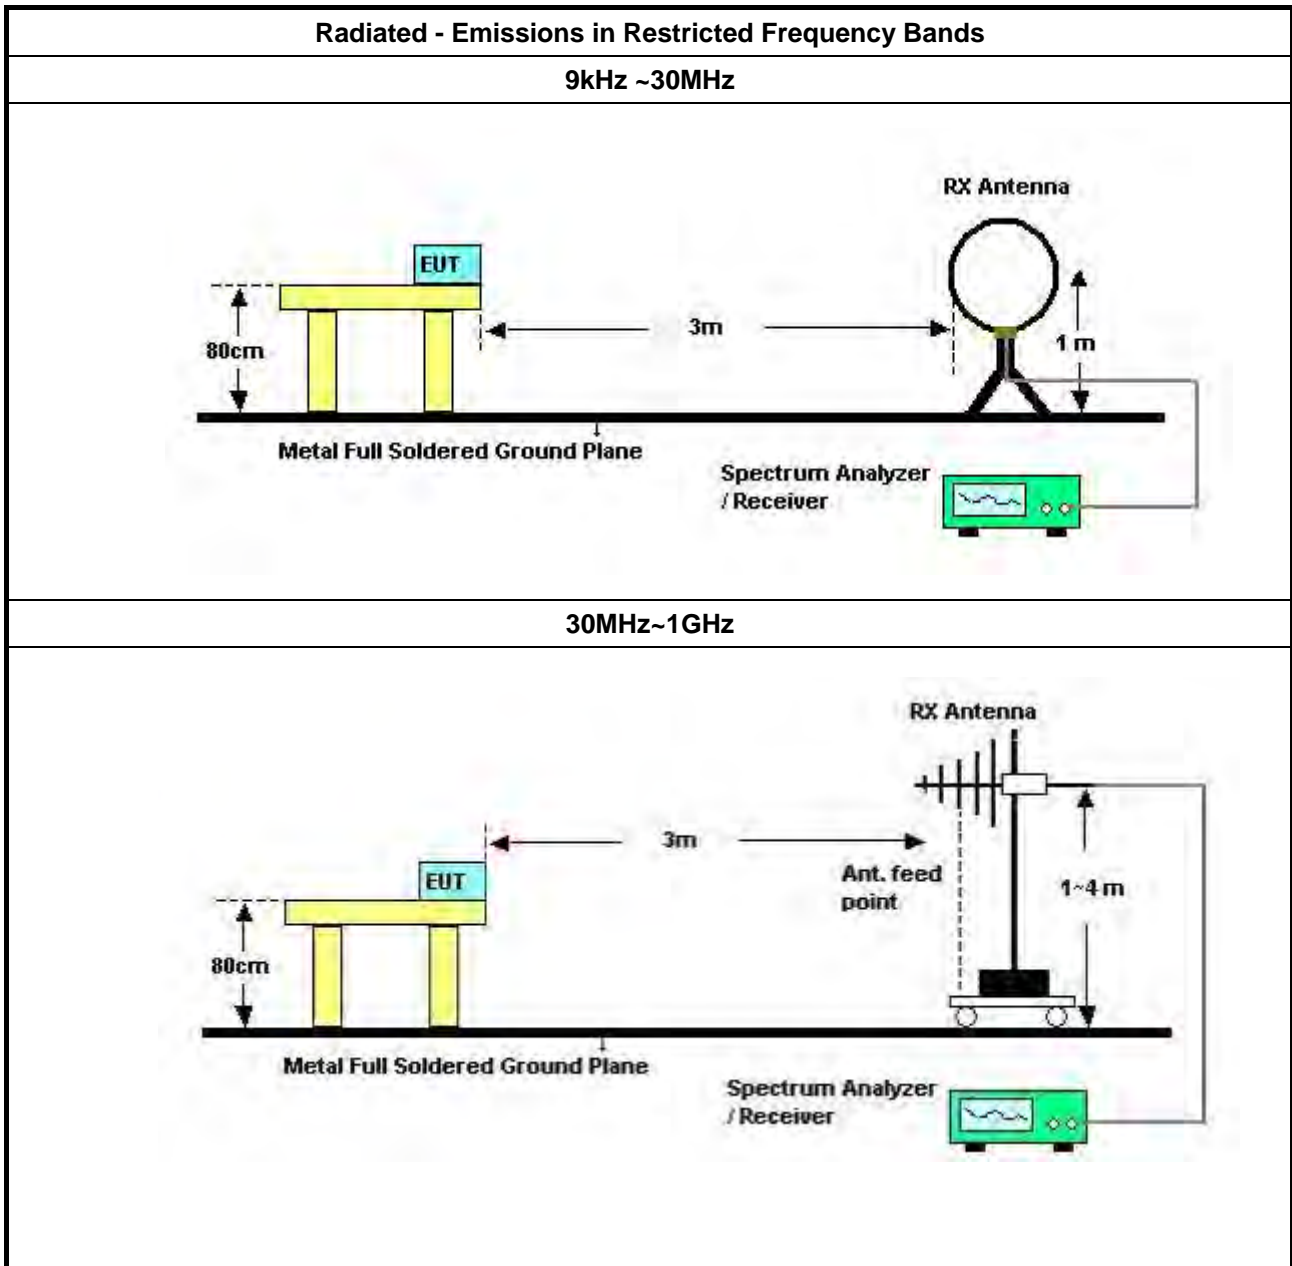

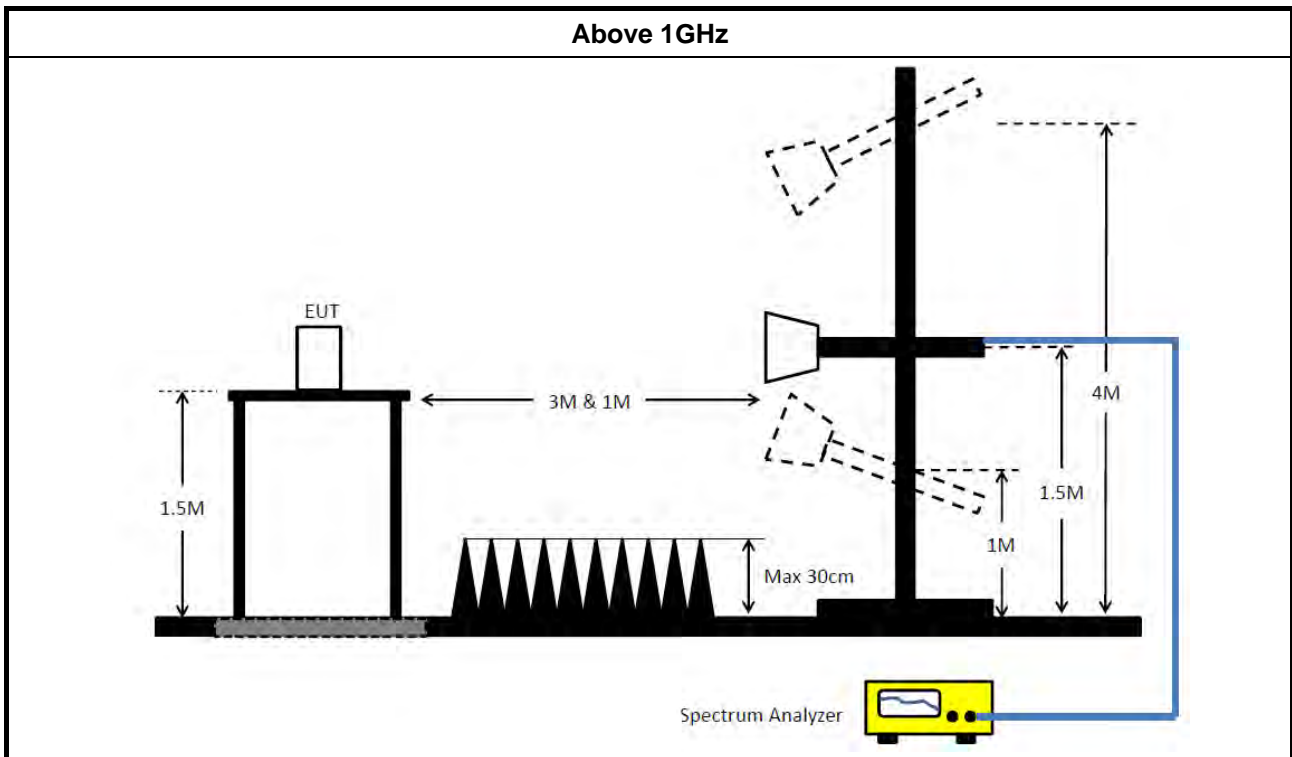

3.6.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable) = Level.

3.6.6 Emissions in Restricted Frequency Bands (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

3.6.7 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix F



4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.4GHz	Feb. 26, 2020	Feb. 25, 2021	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 25, 2019	Dec. 24, 2020	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Feb. 25, 2020	Feb. 24, 2021	Conduction (CO01-CB)
Pulse Limiter	Rohde&Schwarz	ESH3-Z2	100430	9kHz ~ 30MHz	Jan. 31, 2020	Jan. 30, 2021	Conduction (CO01-CB)
COND Cable	Woken	Cable	Low cable-CO01	9kHz ~ 30MHz	May 20, 2020	May 19, 2021	Conduction (CO01-CB)
Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Conduction (CO01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Apr. 13, 2020	Apr. 12, 2021	Radiation (03CH05-CB)
Bilog Antenna with 6dB Attenuator	TESEQ & EMCI	CBL 6112D & N-6-06	35236 & AT-N0610	30MHz ~ 2GHz	Mar. 27, 2020	Mar. 26, 2021	Radiation (03CH05-CB)
Horn Antenna	SCHWARZBECK	BBHA9120D	BBHA 9120D-1291	1GHz~18GHz	Oct. 05, 2019	Oct. 04, 2020	Radiation (03CH05-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 21, 2020	Jul. 20, 2021	Radiation (03CH05-CB)
Pre-Amplifier	EMCI	EMC330N	980331	20MHz ~ 3GHz	Apr. 28, 2020	Apr. 27, 2021	Radiation (03CH05-CB)
Pre-Amplifier	EMCI	EMC12630SE	980287	1GHz ~ 26.5GHz	Jul. 03, 2020	Jul. 02, 2021	Radiation (03CH05-CB)
Pre-Amplifier	MITEQ	TTA1840-35-HG	1864479	18GHz ~ 40GHz	Jul. 08, 2020	Jul. 07, 2021	Radiation (03CH05-CB)
Signal Analyzer	R&S	FSV40	101904	9kHz ~ 40GHz	May 12, 2020	May 11, 2021	Radiation (03CH05-CB)
EMI Test Receiver	R&S	ESCS	826547/017	9kHz ~ 2.75GHz	May 13, 2020	May 12, 2021	Radiation (03CH05-CB)
RF Cable-low	Woken	RG402	LOW Cable-04+23	30MHz~1GHz	Oct. 07, 2019	Oct. 06, 2020	Radiation (03CH05-CB)
RF Cable-high	Woken	RG402	High Cable-28	1GHz~18GHz	Oct. 07, 2019	Oct. 06, 2020	Radiation (03CH05-CB)
RF Cable-high	Woken	RG402	High Cable-04+28	1GHz~18GHz	Feb. 01, 2020	Jan. 31, 2021	Radiation (03CH05-CB)
RF Cable-high	Woken	RG402	High Cable-40G#1	18GHz ~ 40 GHz	Jul. 16, 2020	Jul. 15, 2021	Radiation (03CH05-CB)
RF Cable-high	Woken	RG402	High Cable-40G#2	18GHz ~ 40 GHz	Jul. 16, 2020	Jul. 15, 2021	Radiation (03CH05-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Radiation (03CH05-CB)
Horn Antenna	ETS-LINDGREN	3115	00075790	750MHz ~ 18GHz	Nov. 04, 2019	Nov. 03, 2020	Radiation (03CH01-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 21, 2020	Jul. 20, 2021	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 08, 2020	Jan. 07, 2021	Radiation (03CH01-CB)
Pre-Amplifier	MITEQ	TTA1840-35-HG	1864479	18GHz ~ 40GHz	Jul. 08, 2020	Jul. 07, 2021	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Apr. 16, 2020	Apr. 15, 2021	Radiation (03CH01-CB)
RF Cable-high	Woken	RG402	High Cable-16	1 GHz ~ 18 GHz	Oct. 07, 2019	Oct. 06, 2020	Radiation (03CH01-CB)
RF Cable-high	Woken	RG402	High Cable-16+17	1 GHz ~ 18 GHz	Oct. 07, 2019	Oct. 06, 2020	Radiation (03CH01-CB)
RF Cable-high	Woken	RG402	High Cable-40G#1	18GHz ~ 40 GHz	Jul. 16, 2020	Jul. 15, 2021	Radiation (03CH01-CB)
RF Cable-high	Woken	RG402	High Cable-40G#2	18GHz ~ 40 GHz	Jul. 16, 2020	Jul. 15, 2021	Radiation (03CH01-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV40	101027	9kHz~40GHz	Jul. 27, 2020	Jul. 26, 2021	Conducted (TH02-CB)
Power Sensor	Anritsu	MA2411B	1531343	300MHz~40GHz	Aug. 04, 2020	Aug. 03, 2021	Conducted (TH02-CB)
Power Meter	Anritsu	ML2495A	1728001	300MHz~40GHz	Aug. 04, 2020	Aug. 03, 2021	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-01	1 GHz ~ 26.5 GHz	Oct. 07, 2019	Oct. 06, 2020	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-02	1 GHz ~ 26.5 GHz	Oct. 07, 2019	Oct. 06, 2020	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-3	1 GHz ~ 26.5 GHz	Oct. 07, 2019	Oct. 06, 2020	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-04	1 GHz ~ 26.5 GHz	Oct. 07, 2019	Oct. 06, 2020	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-05	1 GHz ~ 26.5 GHz	Oct. 07, 2019	Oct. 06, 2020	Conducted (TH02-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Conducted (TH02-CB)


Note: Calibration Interval of instruments listed above is one year.


N.C.R. means Non-Calibration required.



Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	AV	546k	42.89	46.00	-3.11	Line

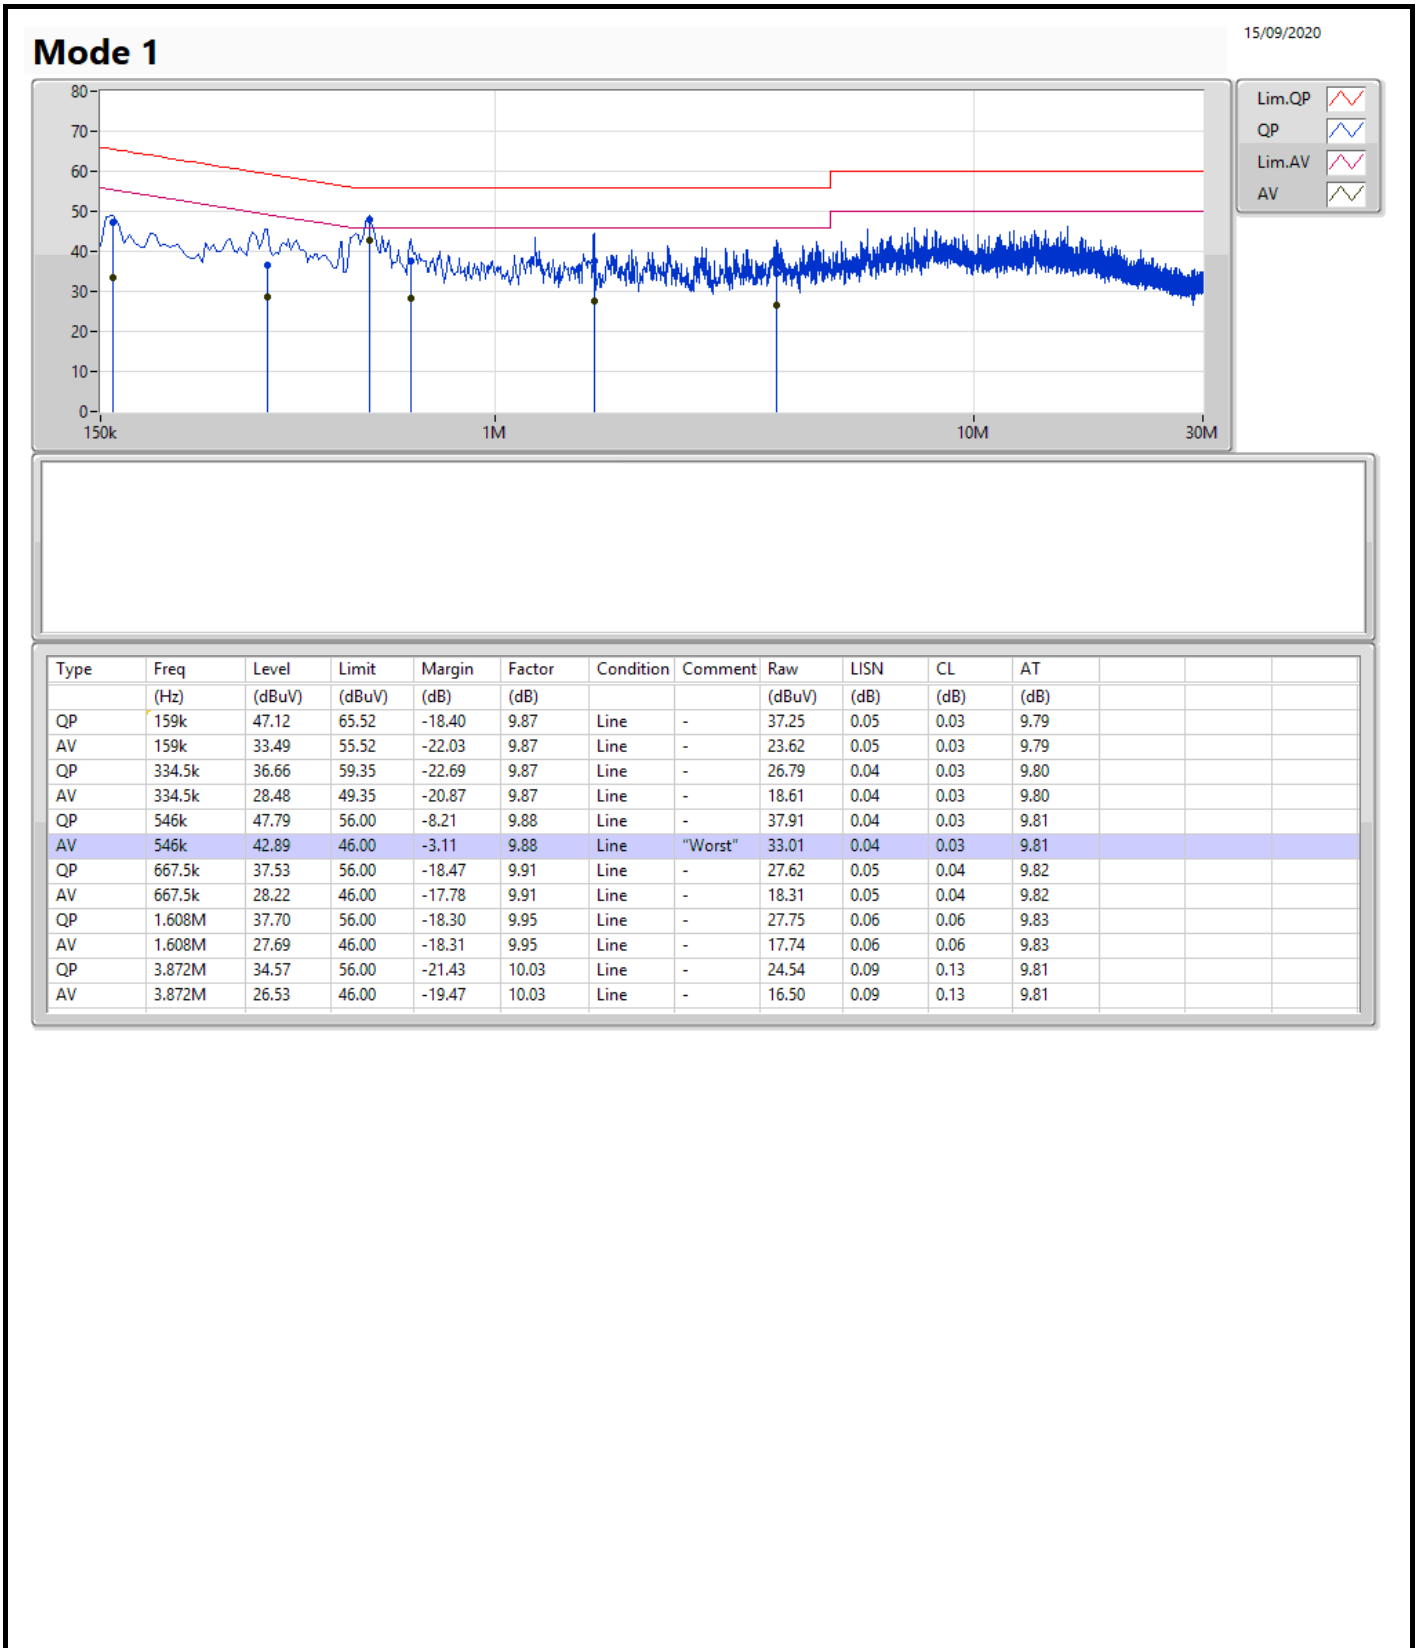

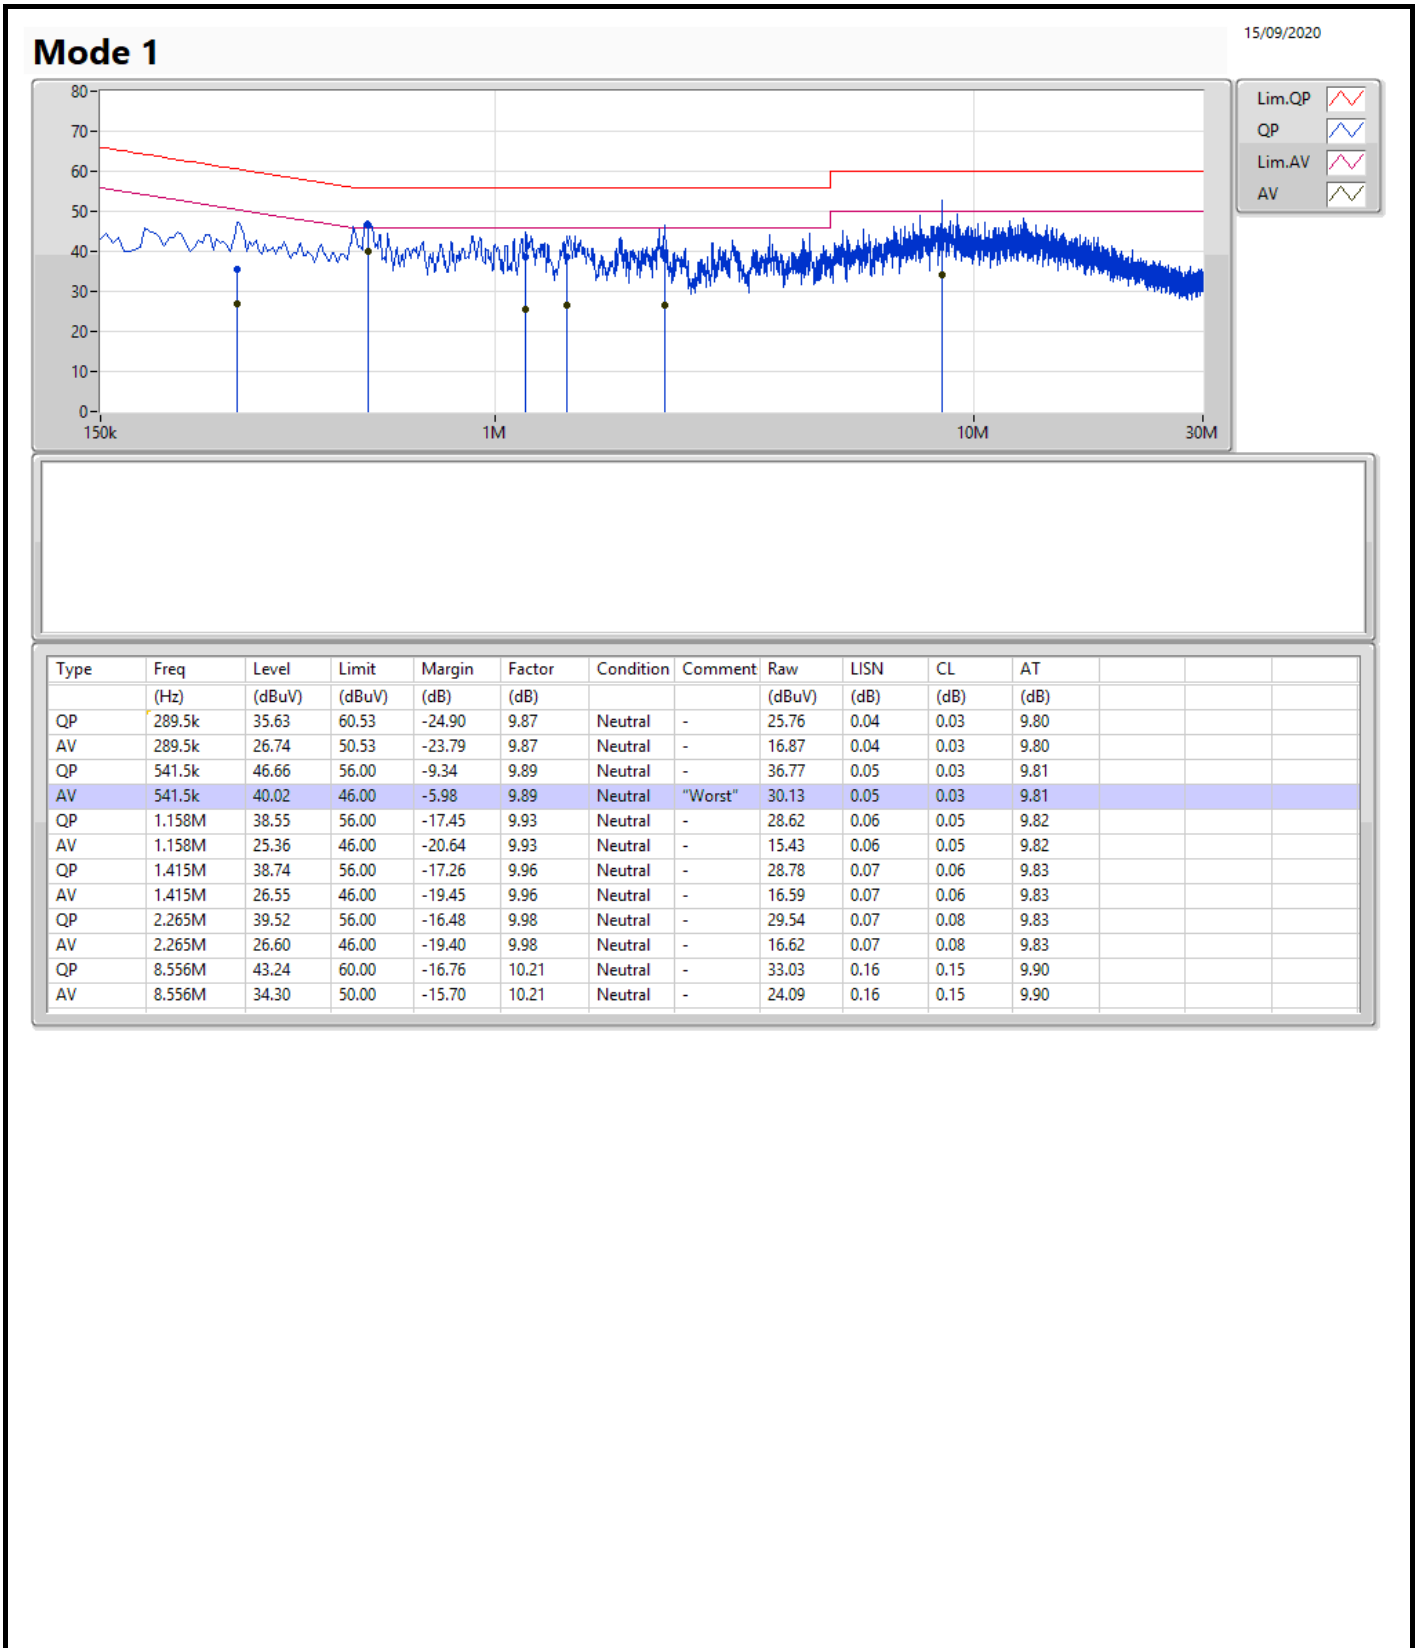



Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
802.11b_Nss1,(1Mbps)_2TX	10.025M	15.117M	15M1G1D	9.025M	14.018M
802.11g_Nss1,(6Mbps)_2TX	15.1M	16.592M	16M6D1D	15.025M	16.317M
802.11n HT20_Nss1,(MCS0)_2TX	15.675M	17.616M	17M6D1D	14.95M	17.441M
802.11n HT40_Nss1,(MCS0)_2TX	35.1M	35.982M	36MOD1D	34.95M	35.932M

Max-N dB = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	9.075M	14.043M	9.1M	14.118M
2437MHz	Pass	500k	10M	14.743M	10.025M	15.117M
2462MHz	Pass	500k	9.05M	14.018M	9.025M	14.093M
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	15.025M	16.492M	15.05M	16.342M
2437MHz	Pass	500k	15.075M	16.592M	15.1M	16.492M
2462MHz	Pass	500k	15.05M	16.467M	15.025M	16.317M
802.11n HT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	14.95M	17.491M	15.675M	17.441M
2437MHz	Pass	500k	14.975M	17.541M	15.075M	17.616M
2462MHz	Pass	500k	15.05M	17.491M	15.65M	17.466M
802.11n HT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	500k	35.05M	35.932M	34.95M	35.932M
2437MHz	Pass	500k	35.1M	35.932M	35.05M	35.982M
2452MHz	Pass	500k	35.05M	35.932M	35M	35.932M


Port X-N dB = Port X 6dB down bandwidth; Port X-OBW = Port X 99% occupied bandwidth;

802.11b_Nss1,(1Mbps)_2TX

EBW

2412MHz

02/09/2020

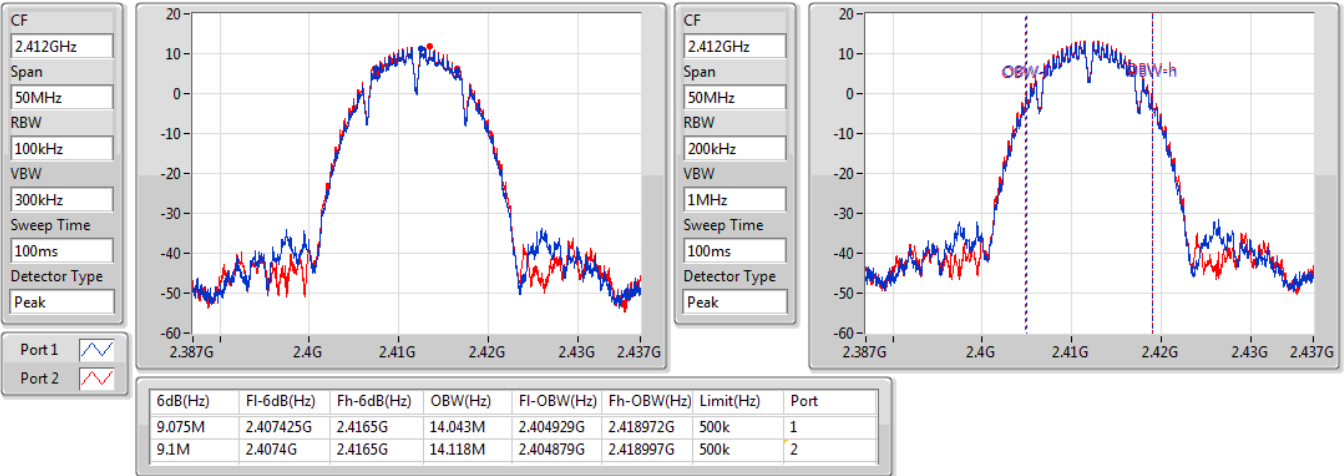


802.11b_Nss1,(1Mbps)_2TX

EBW

2437MHz

02/09/2020

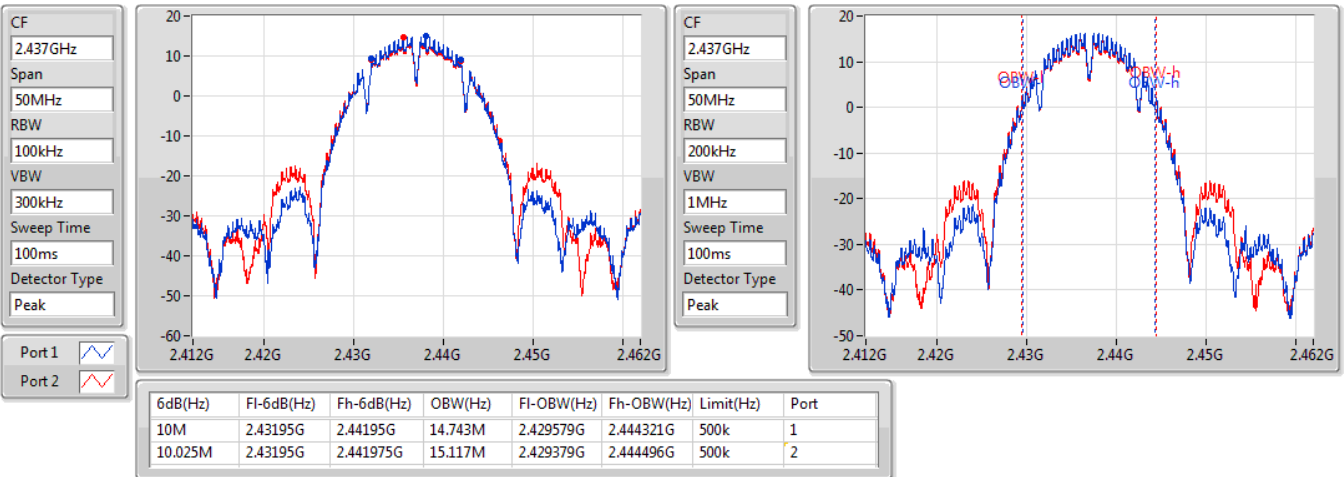


802.11b_Nss1,(1Mbps)_2TX

EBW


2462MHz

02/09/2020

CF
2.462GHz
Span
50MHz
RBW
100kHz
VBW
300kHz
Sweep Time
100ms
Detector Type
Peak

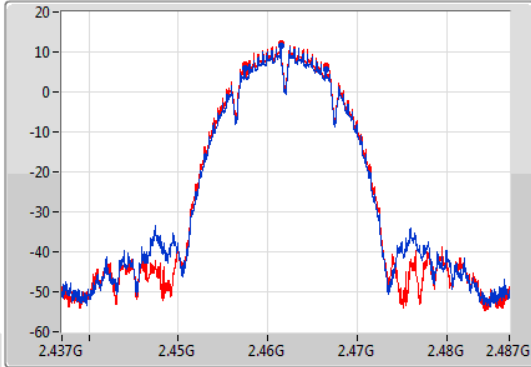

CF
2.462GHz
Span
50MHz
RBW
200kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

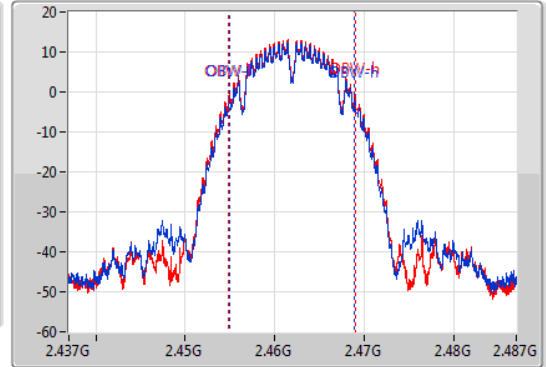

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
9.05M	2.457425G	2.466475G	14.018M	2.454929G	2.468947G	500k	1
9.025M	2.45745G	2.466475G	14.093M	2.454879G	2.468972G	500k	2


802.11g_Nss1,(6Mbps)_2TX

EBW


2412MHz

02/09/2020

CF
2.412GHz
Span
50MHz
RBW
100kHz
VBW
300kHz
Sweep Time
100ms
Detector Type
Peak

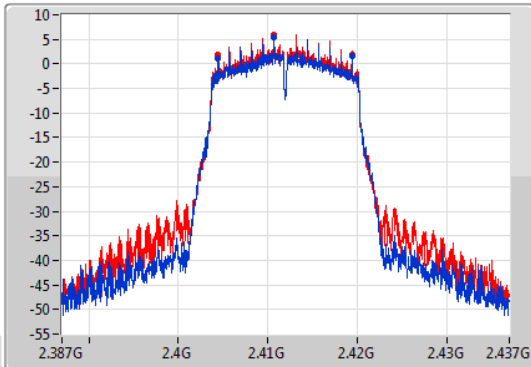

CF
2.412GHz
Span
50MHz
RBW
200kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

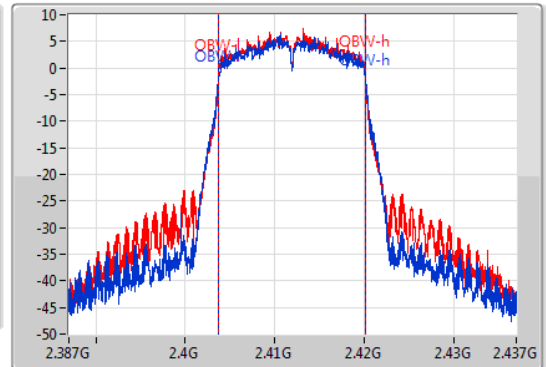

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.025M	2.404425G	2.41945G	16.492M	2.403679G	2.420171G	500k	1
15.05M	2.404425G	2.419475G	16.342M	2.403779G	2.420121G	500k	2


802.11g_Nss1,(6Mbps)_2TX

EBW


2437MHz

02/09/2020

CF
2.437GHz
Span
50MHz
RBW
100kHz
VBW
300kHz
Sweep Time
100ms
Detector Type
Peak

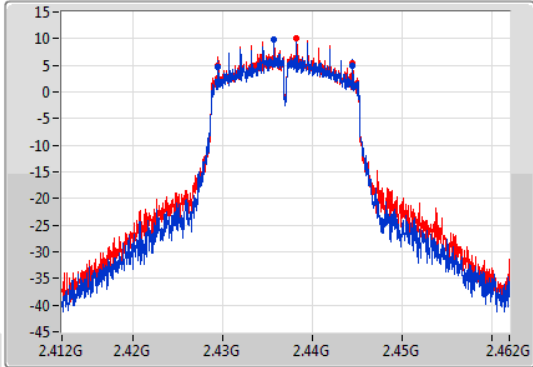

CF
2.437GHz
Span
50MHz
RBW
200kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

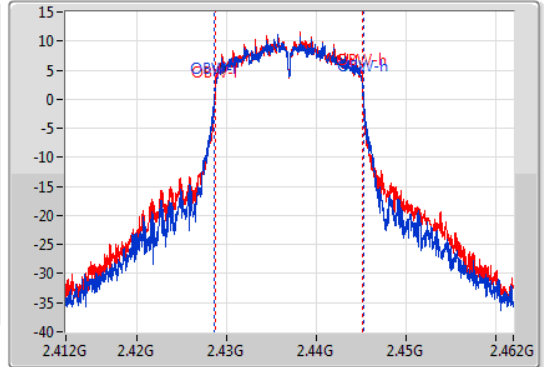

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.075M	2.429425G	2.4445G	16.592M	2.428629G	2.445221G	500k	1
15.1M	2.4294G	2.4445G	16.492M	2.428679G	2.445171G	500k	2


802.11g_Nss1,(6Mbps)_2TX

EBW


2462MHz

02/09/2020

CF
2.462GHz
Span
50MHz
RBW
100kHz
VBW
300kHz
Sweep Time
100ms
Detector Type
Peak

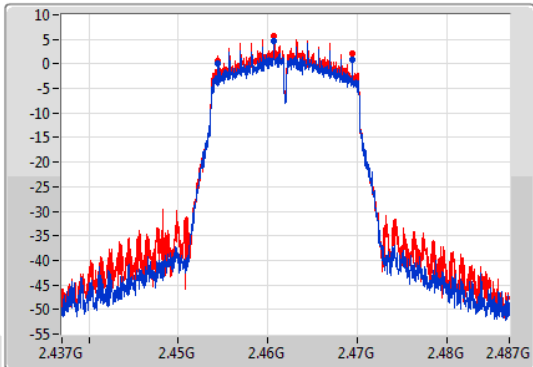

CF
2.462GHz
Span
50MHz
RBW
200kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

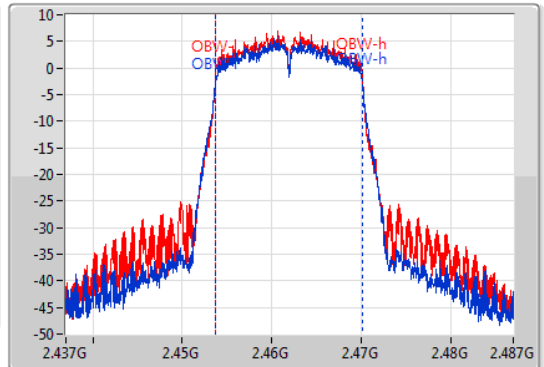


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.05M	2.454425G	2.469475G	16.467M	2.453679G	2.470146G	500k	1
15.025M	2.4544G	2.469425G	16.317M	2.453779G	2.470096G	500k	2

802.11n HT20_Nss1,(MCS0)_2TX

EBW

2412MHz

02/09/2020

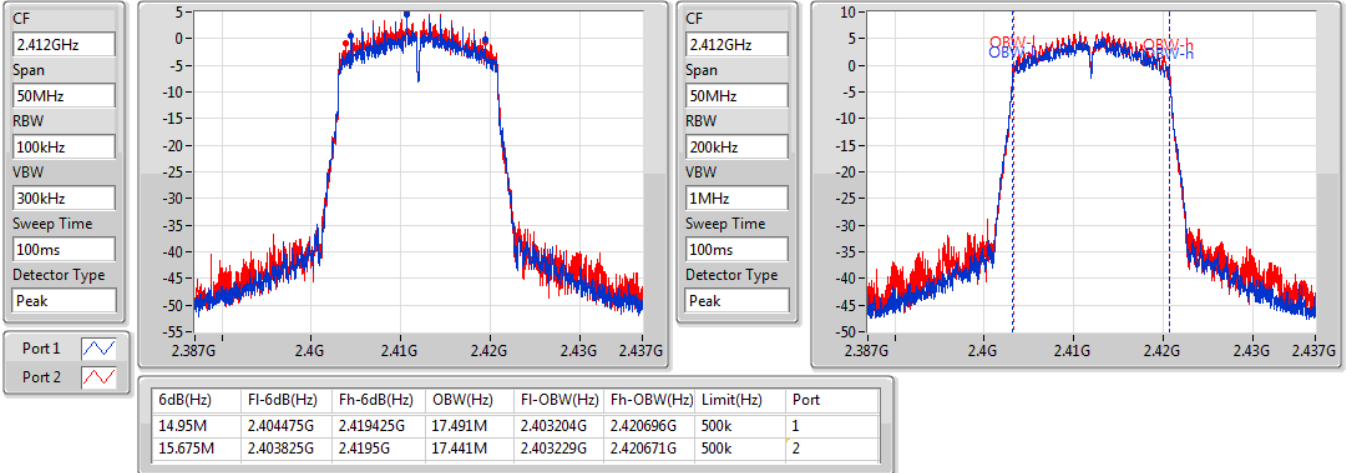


802.11n HT20_Nss1,(MCS0)_2TX

EBW

2437MHz

02/09/2020

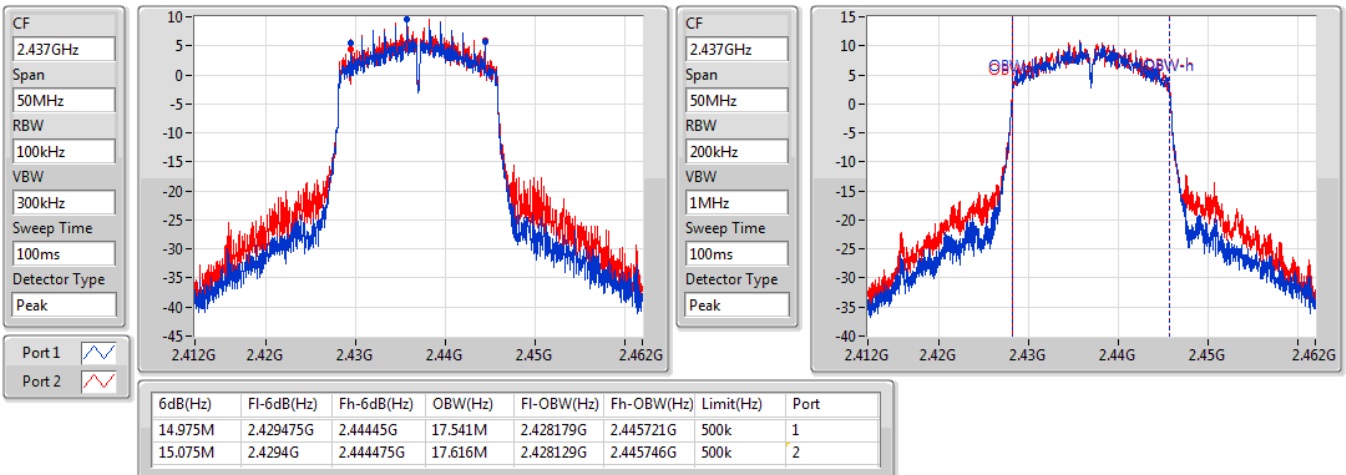


802.11n HT20_Nss1,(MCS0)_2TX

EBW


2462MHz

02/09/2020

CF
2.462GHz
Span
50MHz
RBW
100kHz
VBW
300kHz
Sweep Time
100ms
Detector Type
Peak

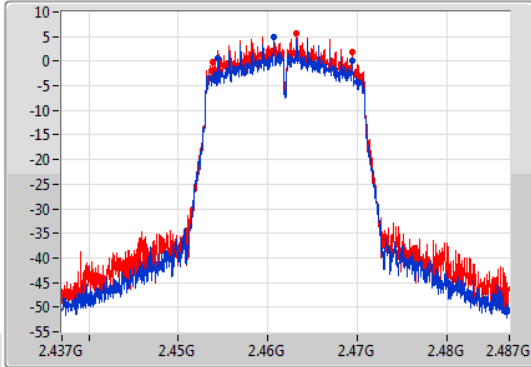

CF
2.462GHz
Span
50MHz
RBW
200kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

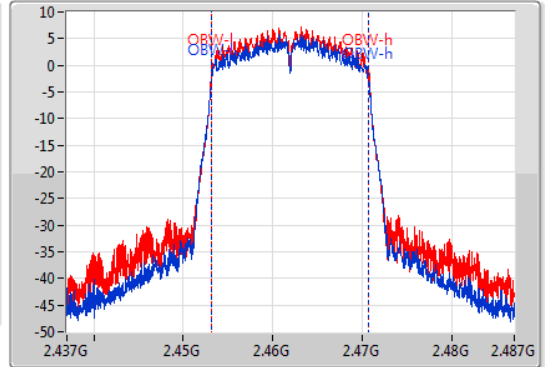

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.05M	2.45445G	2.4695G	17.491M	2.453204G	2.470696G	500k	1
15.65M	2.453825G	2.469475G	17.466M	2.453204G	2.470671G	500k	2


802.11n HT40_Nss1,(MCS0)_2TX

EBW


2422MHz

02/09/2020

CF
2.422GHz
Span
100MHz
RBW
100kHz
VBW
300kHz
Sweep Time
100ms
Detector Type
Peak

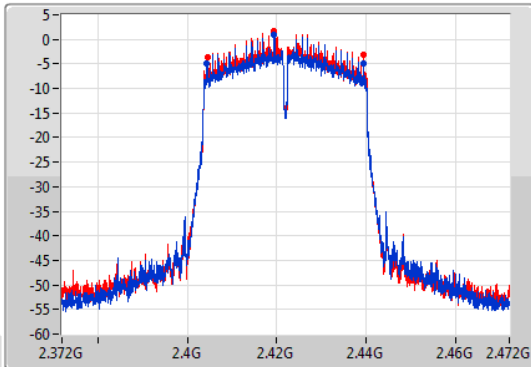

CF
2.422GHz
Span
100MHz
RBW
500kHz
VBW
2MHz
Sweep Time
100ms
Detector Type
Peak

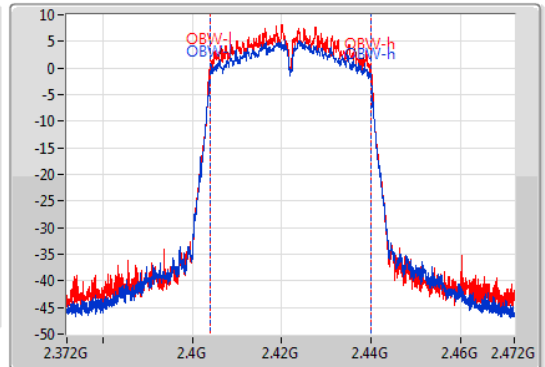


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
35.05M	2.4044G	2.43945G	35.932M	2.403959G	2.439891G	500k	1
34.95M	2.4045G	2.43945G	35.932M	2.403959G	2.439891G	500k	2

802.11n HT40_Nss1,(MCS0)_2TX

EBW

2437MHz

02/09/2020

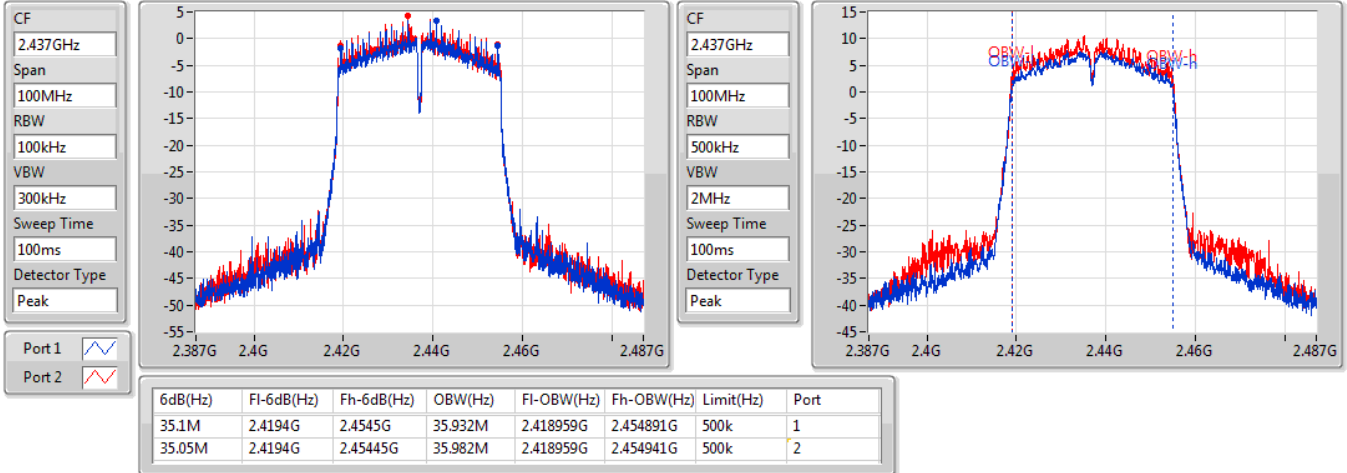


802.11n HT40_Nss1,(MCS0)_2TX

EBW

2452MHz

02/09/2020

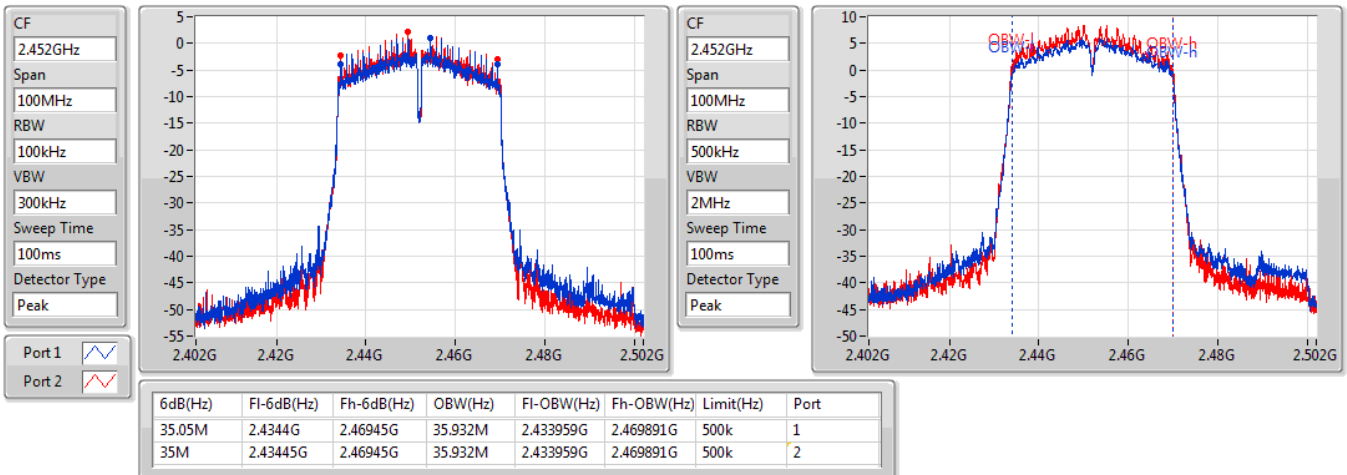



Summary

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
802.11b_Nss1,(1Mbps)_2TX	28.87	0.77090
802.11g_Nss1,(6Mbps)_2TX	24.40	0.27542
802.11n HT20_Nss1,(MCS0)_2TX	23.98	0.25003
802.11n HT40_Nss1,(MCS0)_2TX	20.81	0.12050



Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	3.92	22.42	22.76	25.60	30.00
2417MHz	Pass	3.92	23.31	23.64	26.49	30.00
2437MHz	Pass	4.11	26.07	25.64	28.87	30.00
2457MHz	Pass	3.82	22.82	22.66	25.75	30.00
2462MHz	Pass	3.82	21.75	22.53	25.17	30.00
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	3.92	17.05	17.65	20.37	30.00
2417MHz	Pass	3.92	18.06	18.50	21.30	30.00
2437MHz	Pass	4.11	21.30	21.48	24.40	30.00
2457MHz	Pass	3.82	17.97	18.13	21.06	30.00
2462MHz	Pass	3.82	17.04	17.26	20.16	30.00
802.11n HT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	3.92	16.01	16.77	19.42	30.00
2417MHz	Pass	3.92	17.50	18.37	20.97	30.00
2437MHz	Pass	4.11	20.77	21.17	23.98	30.00
2457MHz	Pass	3.82	18.35	18.75	21.56	30.00
2462MHz	Pass	3.82	16.35	17.10	19.75	30.00
802.11n HT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	3.92	15.07	15.22	18.16	30.00
2427MHz	Pass	3.92	15.64	15.98	18.82	30.00
2437MHz	Pass	4.11	17.63	17.96	20.81	30.00
2447MHz	Pass	3.82	17.30	17.11	20.22	30.00
2452MHz	Pass	3.82	15.72	15.95	18.85	30.00

DG = Directional Gain; Port X = Port X output power



Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11b_Nss1,(1Mbps)_2TX	-3.11
802.11g_Nss1,(6Mbps)_2TX	-4.82
802.11n HT20_Nss1,(MCS0)_2TX	-4.47
802.11n HT40_Nss1,(MCS0)_2TX	-9.74




RBW = 500 kHz for 5.725-5.85GHz band / 1MHz for other band;




Result




Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	5.88	-9.38	-8.21	-6.14	8.00
2437MHz	Pass	5.97	-5.86	-6.39	-3.11	8.00
2462MHz	Pass	5.85	-10.88	-9.93	-7.38	8.00
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	5.88	-10.21	-10.77	-8.89	8.00
2437MHz	Pass	5.97	-7.25	-7.70	-4.82	8.00
2462MHz	Pass	5.85	-12.33	-10.37	-9.06	8.00
802.11n HT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	5.88	-9.22	-10.00	-8.28	8.00
2437MHz	Pass	5.97	-7.98	-5.57	-4.47	8.00
2462MHz	Pass	5.85	-12.59	-9.84	-9.06	8.00
802.11n HT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	5.88	-15.75	-14.16	-12.59	8.00
2437MHz	Pass	5.97	-12.73	-12.29	-9.74	8.00
2452MHz	Pass	5.85	-14.65	-14.66	-12.29	8.00




DG = Directional Gain; RBW = 500 kHz for 5.725-5.85GHz band / 1MHz for other band;

PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X power density;

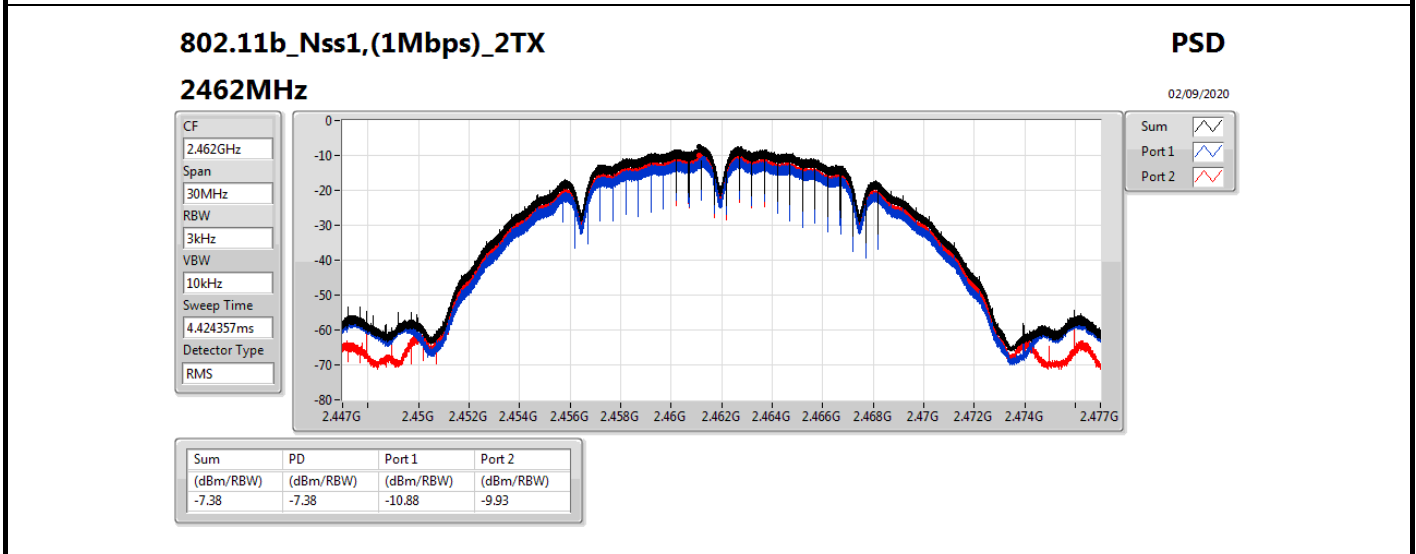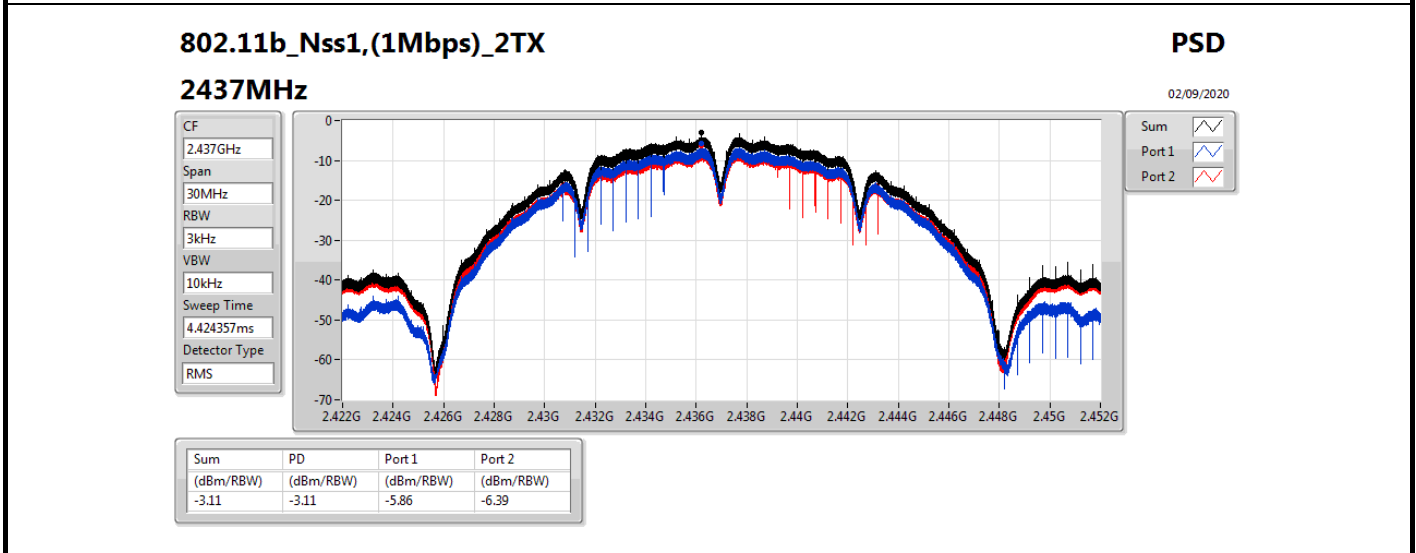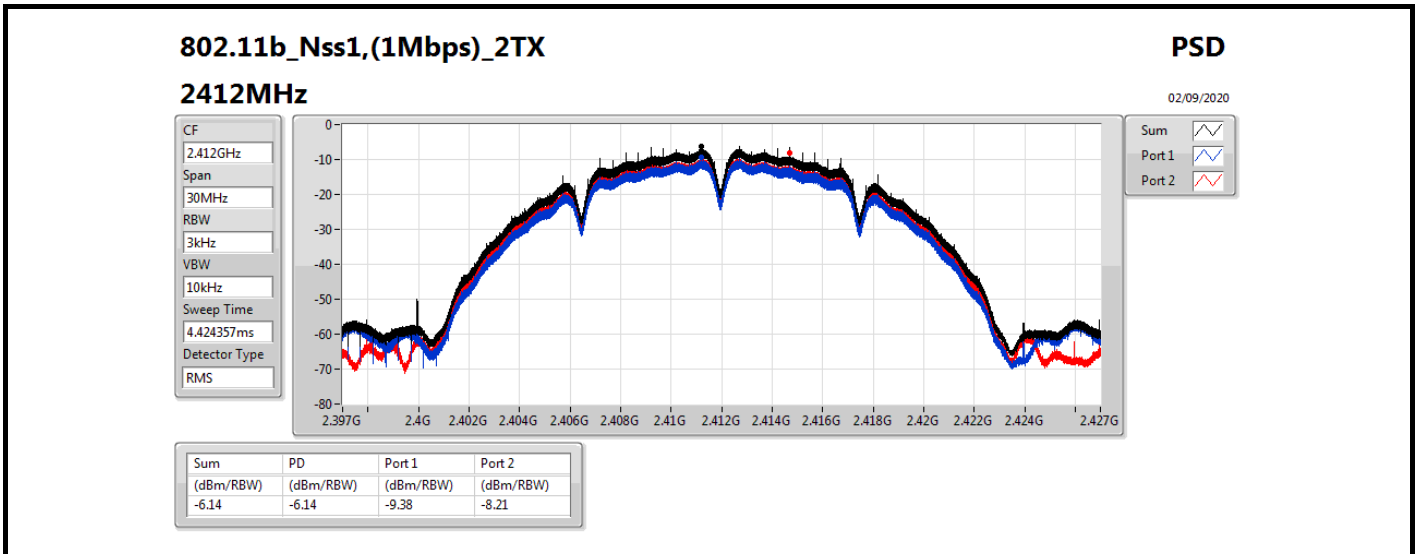

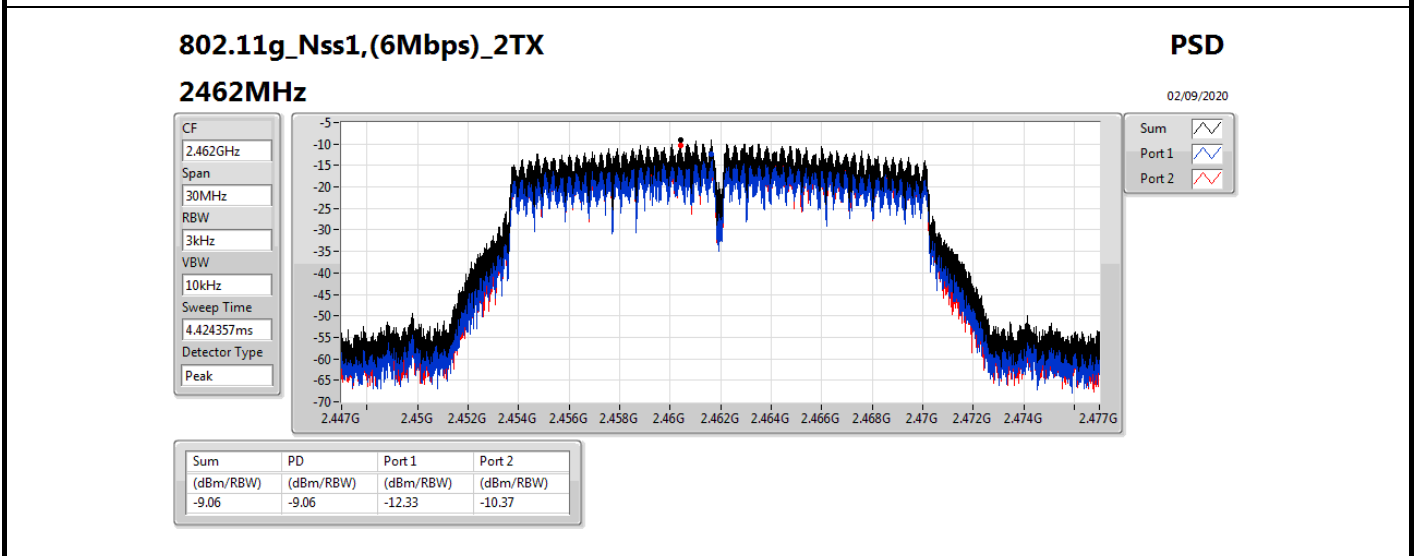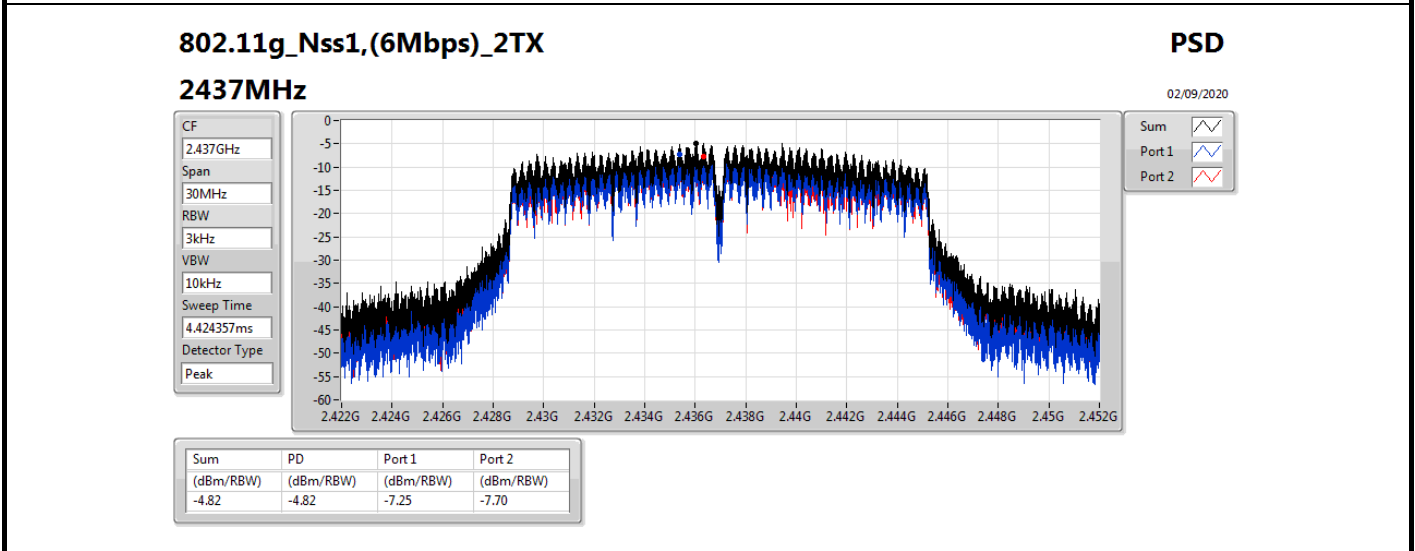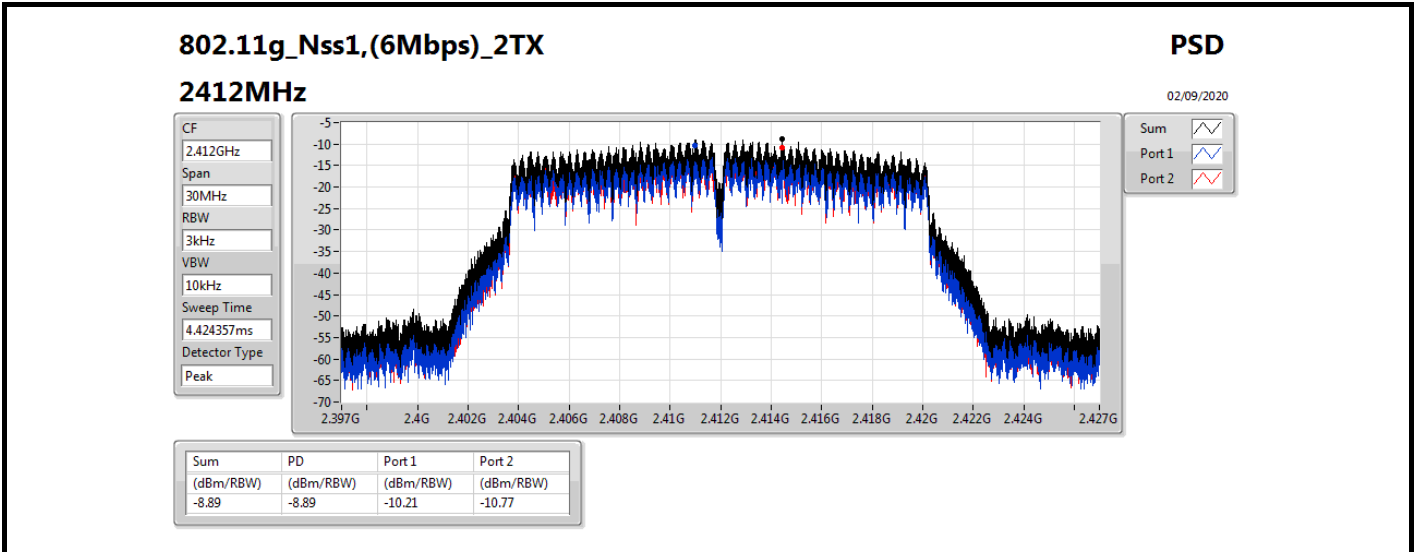

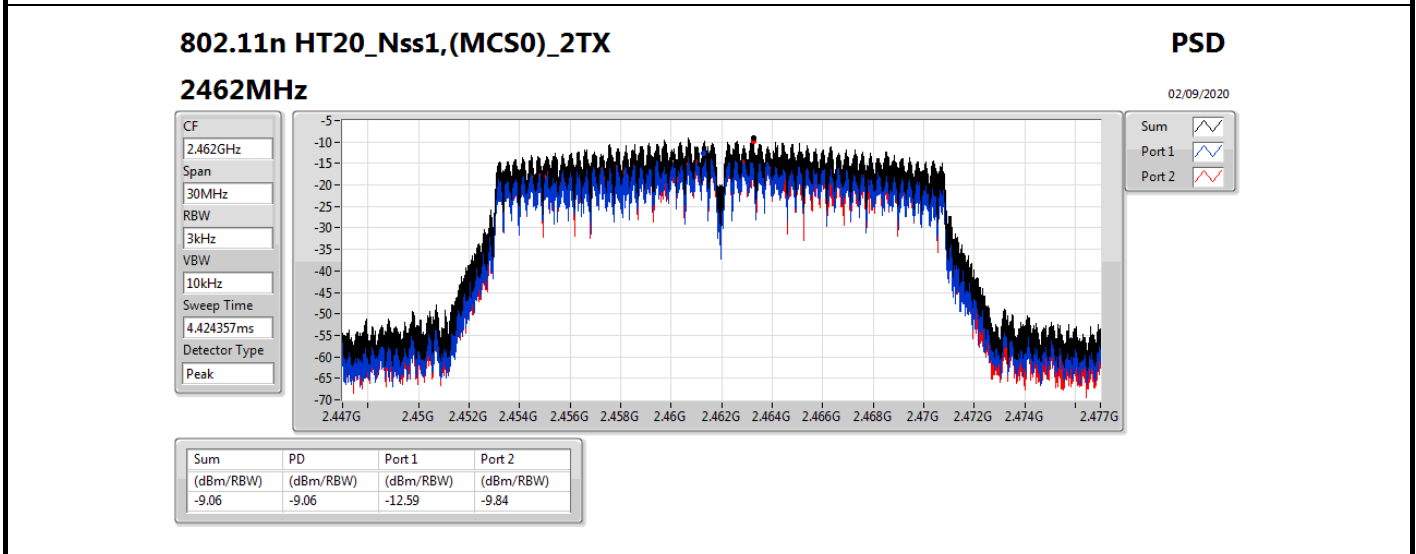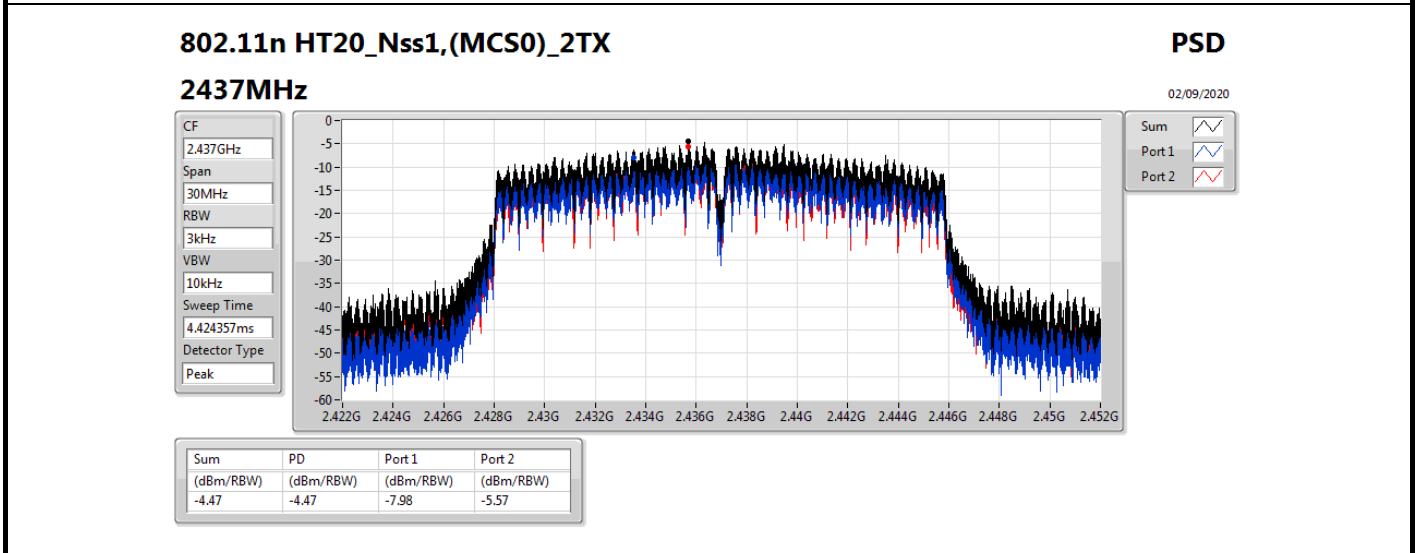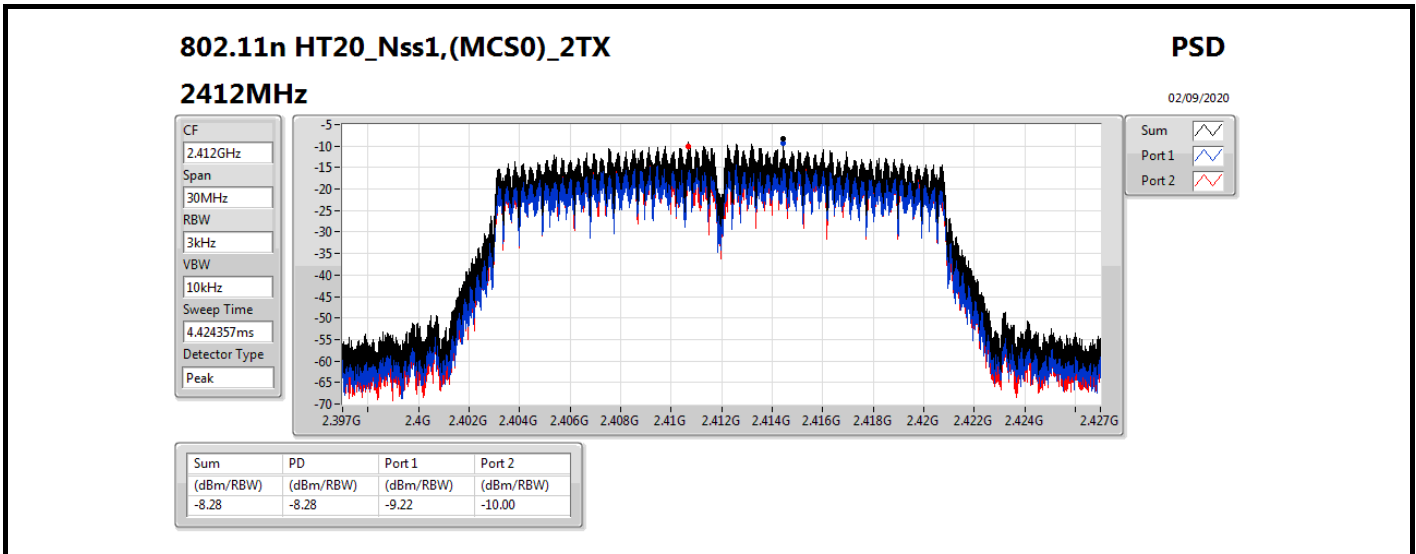

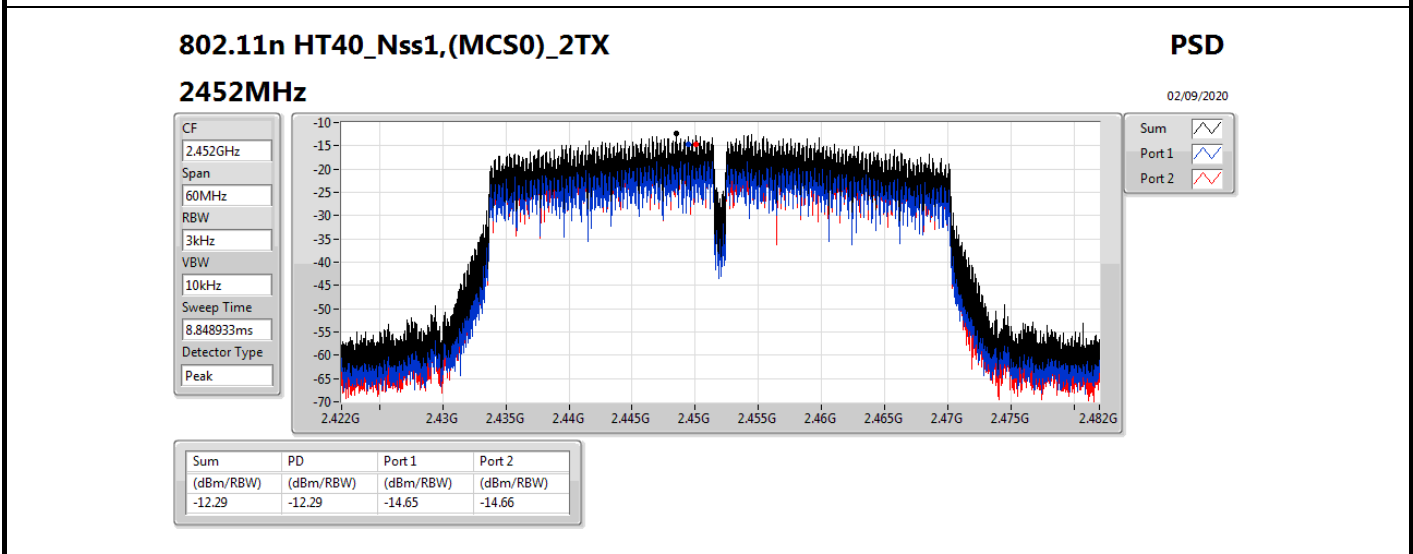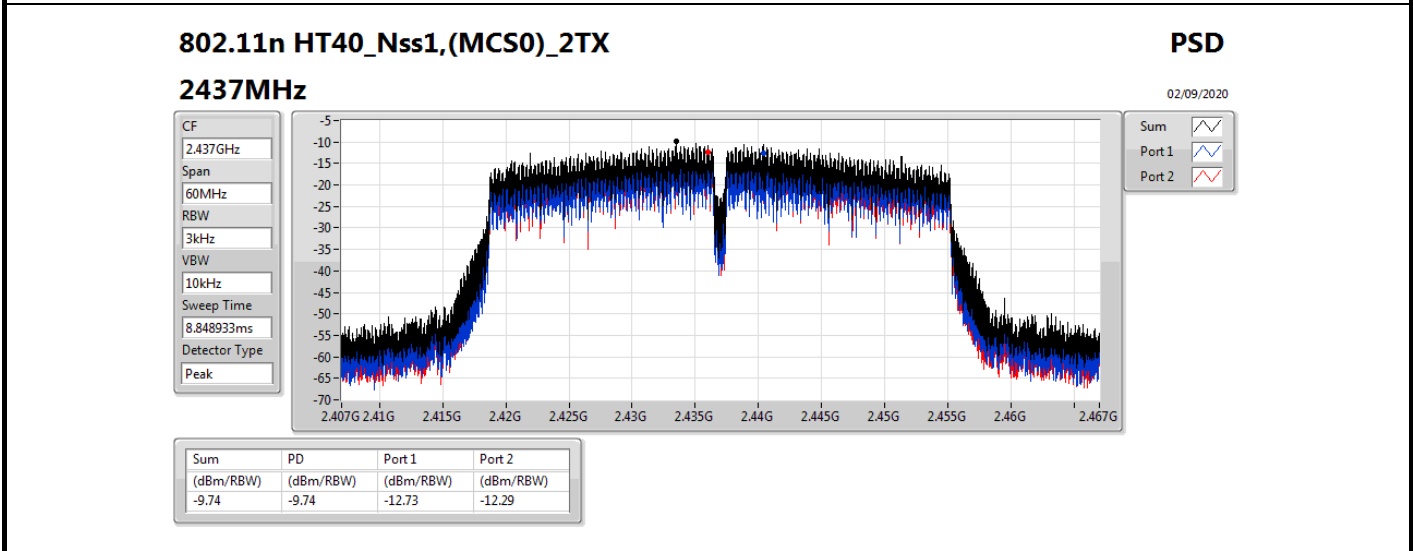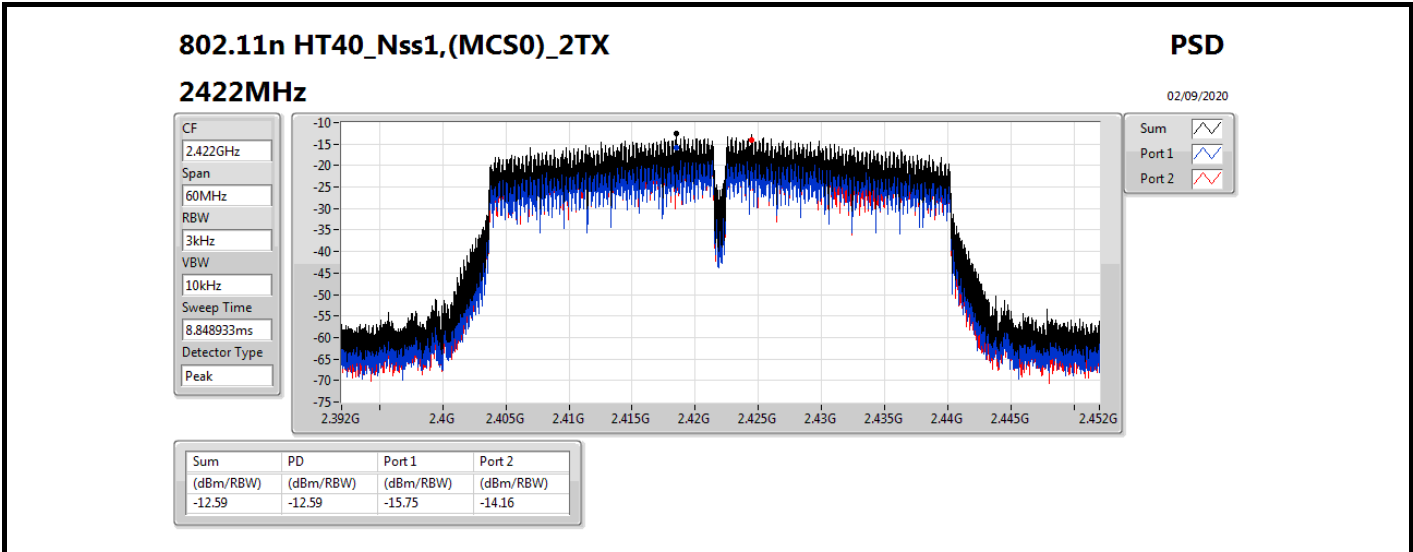





Summary



Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
802.11b_Nss1,(1Mbps)_2TX	Pass	2.43645G	14.20	-15.80	47.77M	-49.66	2.39742G	-33.08	2.4G	-39.43	2.49906G	-46.55	15.23396G	-45.61	1
802.11g_Nss1,(6Mbps)_2TX	Pass	2.4357G	10.10	-19.90	35.83M	-51.72	2.39986G	-28.14	2.4G	-34.01	2.48916G	-49.32	23.46317G	-45.53	2
802.11n HT20_Nss1,(MCS0)_2TX	Pass	2.4357G	9.71	-20.29	47.77M	-50.72	2.39586G	-36.87	2.4G	-40.10	2.49024G	-49.82	15.04853G	-46.13	2
802.11n HT40_Nss1,(MCS0)_2TX	Pass	2.43444G	4.45	-25.55	32.58M	-50.37	2.39944G	-37.26	2.4G	-43.42	2.48994G	-49.72	23.49956G	-45.98	2





Result

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43645G	14.20	-15.80	47.77M	-49.66	2.39742G	-33.08	2.4G	-39.43	2.49906G	-46.55	15.23396G	-45.61	1
2412MHz	Pass	2.43645G	14.20	-15.80	32.33M	-51.08	2.39994G	-37.92	2.4G	-40.02	2.49876G	-50.30	24.92695G	-46.17	2
2437MHz	Pass	2.43645G	14.20	-15.80	47.77M	-49.30	2.39998G	-39.34	2.4G	-42.46	2.48968G	-46.23	15.02886G	-45.66	1
2437MHz	Pass	2.43645G	14.20	-15.80	35.83M	-51.66	2.39598G	-43.64	2.4835G	-46.69	2.4839G	-45.15	17.68952G	-46.18	2
2462MHz	Pass	2.43645G	14.20	-15.80	47.77M	-51.05	2.39996G	-46.31	2.4G	-48.67	2.49904G	-45.67	24.96909G	-45.73	1
2462MHz	Pass	2.43645G	14.20	-15.80	32.33M	-50.10	2.39998G	-46.06	2.4835G	-48.73	2.4835G	-48.51	17.49004G	-46.05	2
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.4357G	10.10	-19.90	1.77255G	-49.85	2.39998G	-35.83	2.4G	-38.39	2.4891G	-45.95	16.91689G	-45.61	1
2412MHz	Pass	2.4357G	10.10	-19.90	35.83M	-51.72	2.39986G	-28.14	2.4G	-34.01	2.48916G	-49.32	23.46317G	-45.53	2
2437MHz	Pass	2.4357G	10.10	-19.90	33.5M	-51.62	2.39938G	-44.05	2.4G	-44.67	2.49896G	-44.08	24.49709G	-45.94	1
2437MHz	Pass	2.4357G	10.10	-19.90	2.30787G	-50.49	2.39666G	-41.62	2.4G	-43.29	2.4919G	-45.94	15.04291G	-44.85	2
2462MHz	Pass	2.4357G	10.10	-19.90	47.77M	-49.54	2.39906G	-46.53	2.4835G	-48.94	2.48384G	-43.70	17.69233G	-46.04	1
2462MHz	Pass	2.4357G	10.10	-19.90	47.77M	-50.61	2.39998G	-49.09	2.4835G	-48.82	2.48378G	-41.28	23.44069G	-46.17	2
802.11n HT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.4357G	9.71	-20.29	47.77M	-50.30	2.39972G	-37.29	2.4G	-41.40	2.4892G	-46.47	23.52217G	-46.25	1
2412MHz	Pass	2.4357G	9.71	-20.29	47.77M	-50.72	2.39586G	-36.87	2.4G	-40.10	2.49024G	-49.82	15.04853G	-46.13	2
2437MHz	Pass	2.4357G	9.71	-20.29	47.77M	-49.39	2.3932G	-41.93	2.4G	-45.31	2.48968G	-44.22	17.69233G	-46.03	1
2437MHz	Pass	2.4357G	9.71	-20.29	2.3067G	-48.37	2.3972G	-41.24	2.4G	-42.79	2.48952G	-45.17	17.68952G	-46.38	2
2462MHz	Pass	2.4357G	9.71	-20.29	48.06M	-48.67	2.39132G	-47.21	2.4835G	-49.40	2.48914G	-45.28	15.01481G	-45.83	1
2462MHz	Pass	2.4357G	9.71	-20.29	35.83M	-51.16	2.39948G	-49.68	2.4835G	-46.05	2.48634G	-41.37	23.49688G	-45.91	2
802.11n HT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2422MHz	Pass	2.43444G	4.45	-25.55	32.29M	-49.64	2.39952G	-37.58	2.4G	-43.12	2.49958G	-47.30	24.94952G	-46.61	1
2422MHz	Pass	2.43444G	4.45	-25.55	32.58M	-50.37	2.39944G	-37.26	2.4G	-43.42	2.48994G	-49.72	23.49956G	-45.98	2
2437MHz	Pass	2.43444G	4.45	-25.55	47.75M	-47.81	2.39952G	-37.96	2.4G	-44.79	2.4905G	-43.35	15.03258G	-46.41	1
2437MHz	Pass	2.43444G	4.45	-25.55	33.15M	-49.85	2.397G	-39.18	2.4G	-43.05	2.48414G	-43.28	15.06344G	-46.19	2
2452MHz	Pass	2.43444G	4.45	-25.55	47.75M	-48.05	2.39828G	-46.29	2.4835G	-45.66	2.48946G	-42.38	24.97756G	-46.21	1
2452MHz	Pass	2.43444G	4.45	-25.55	36.01M	-51.24	2.39076G	-48.10	2.4835G	-48.55	2.48942G	-43.49	24.85416G	-45.88	2

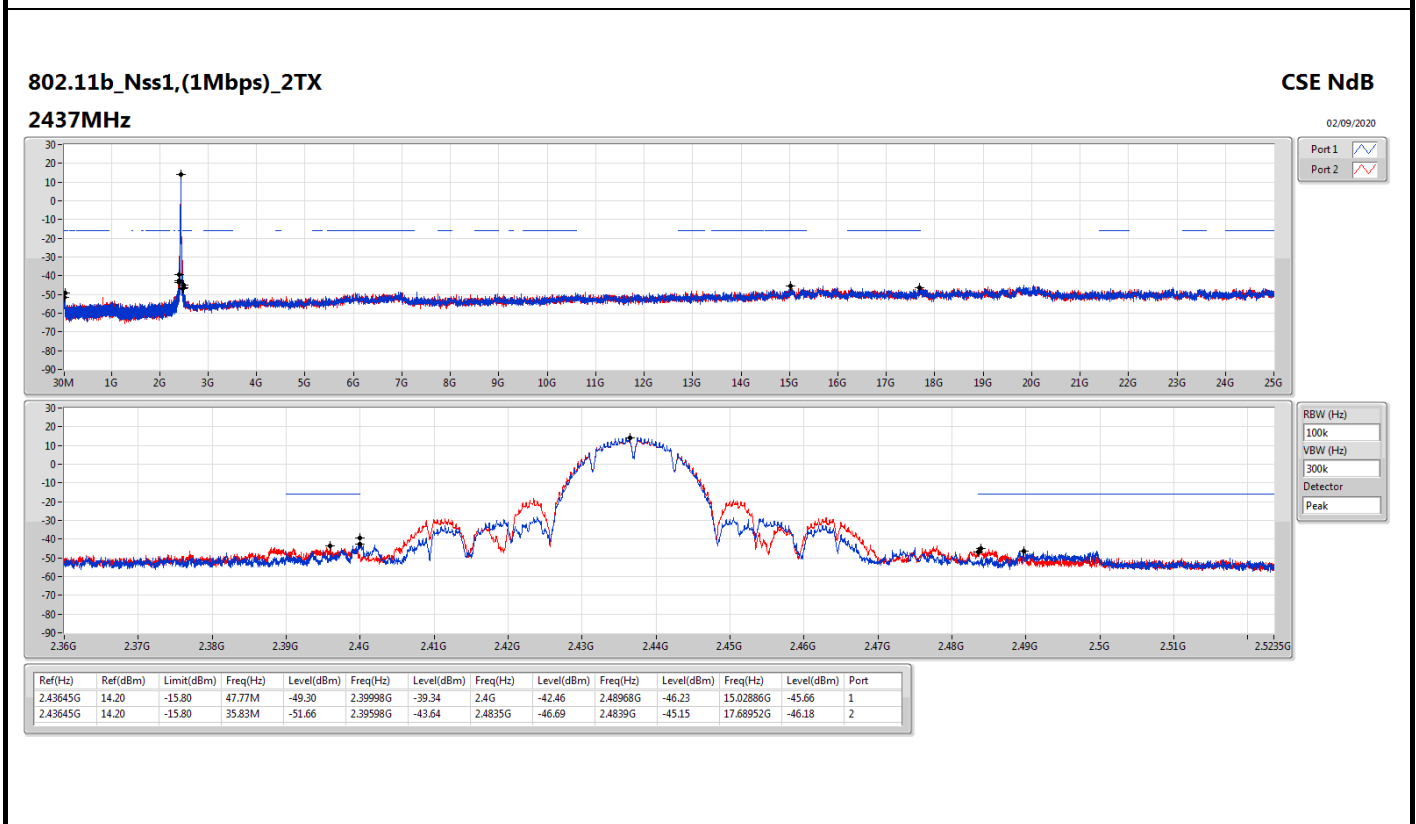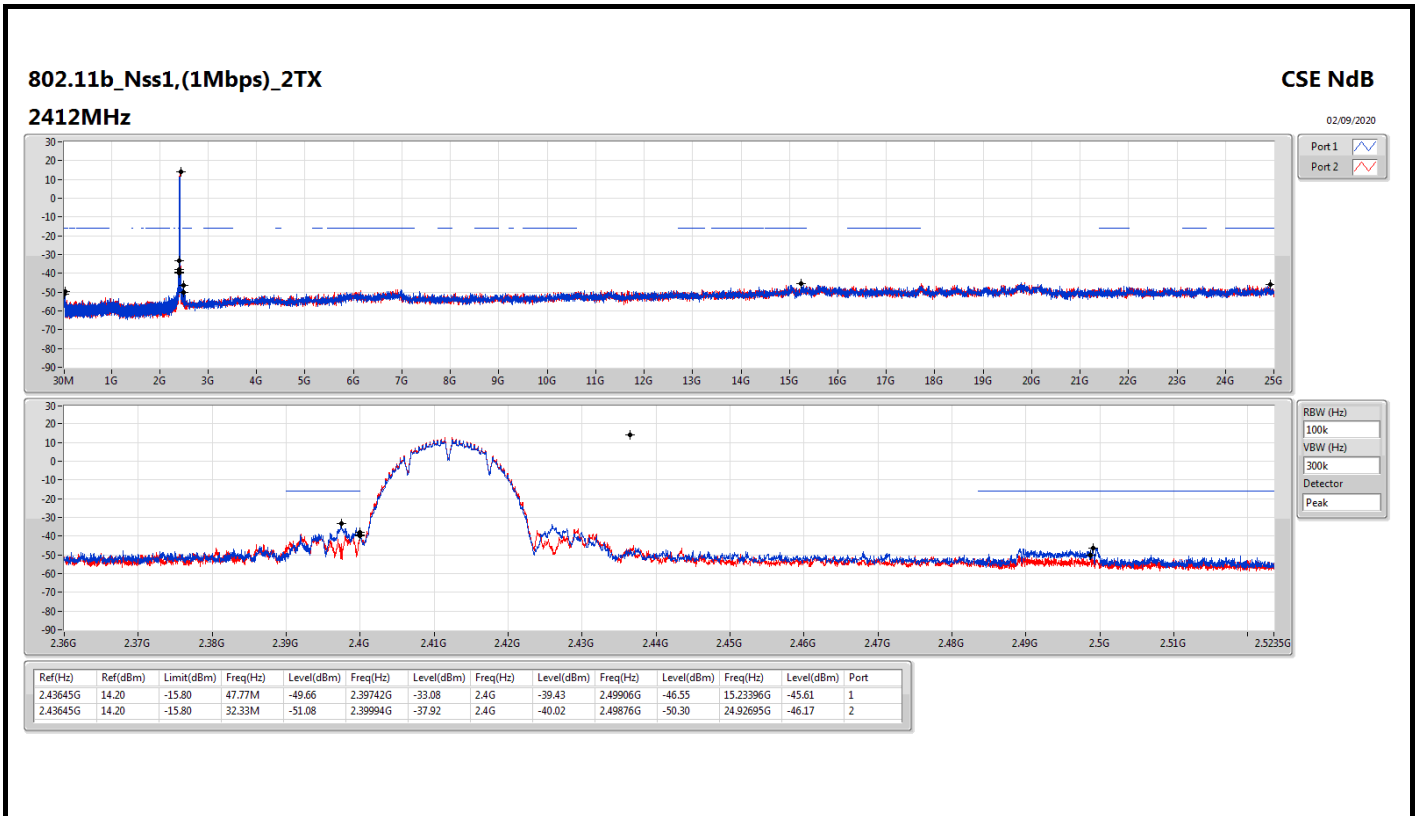


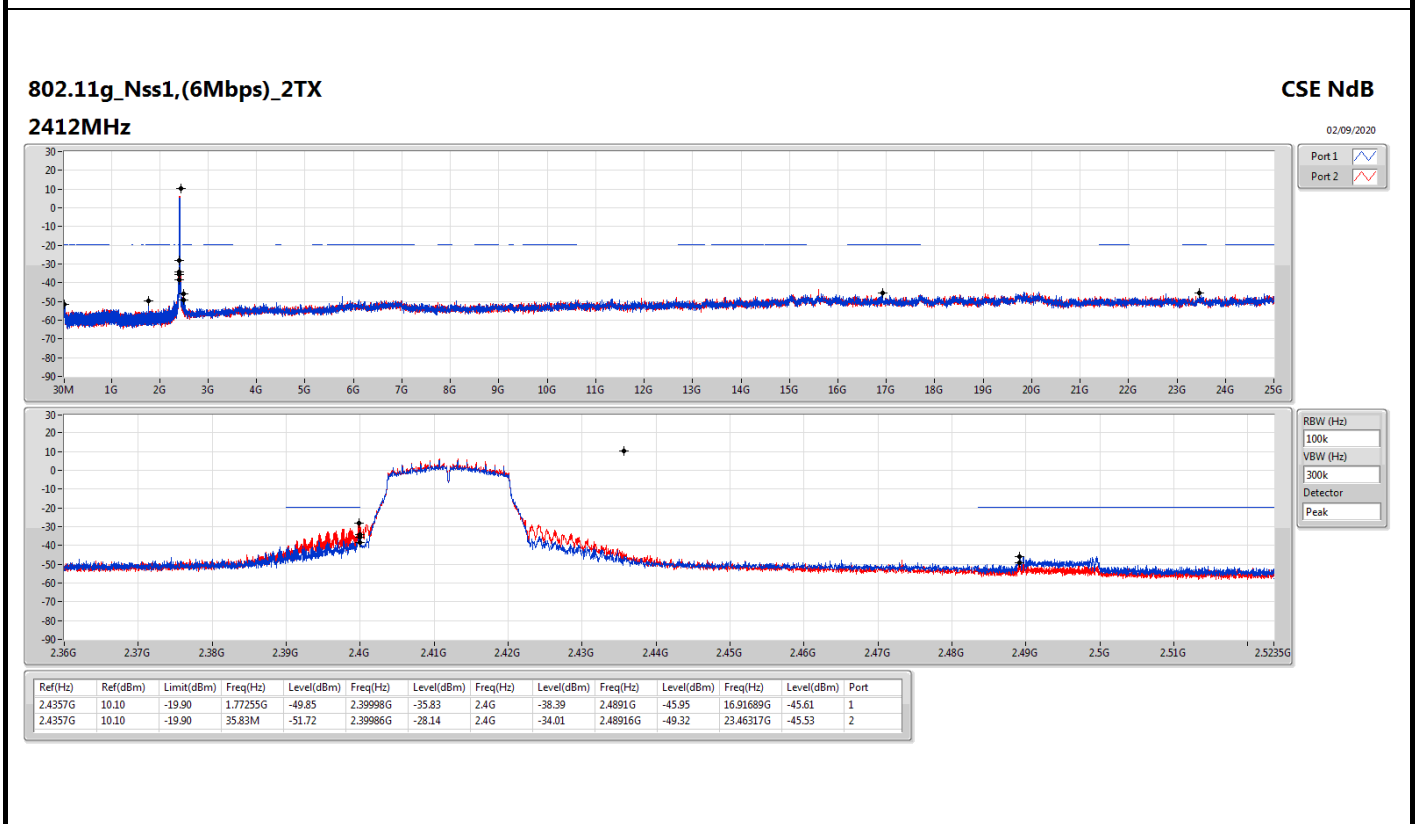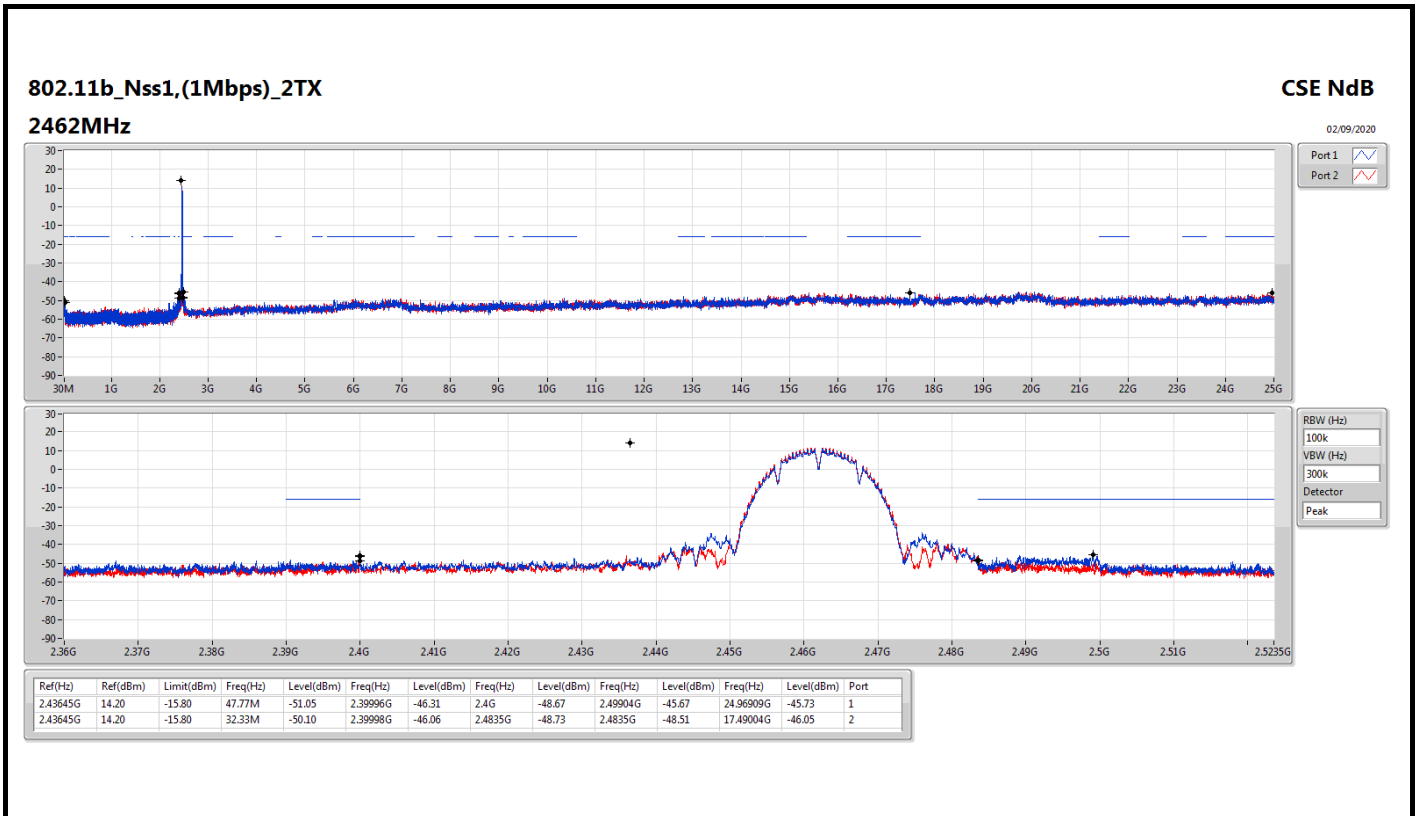

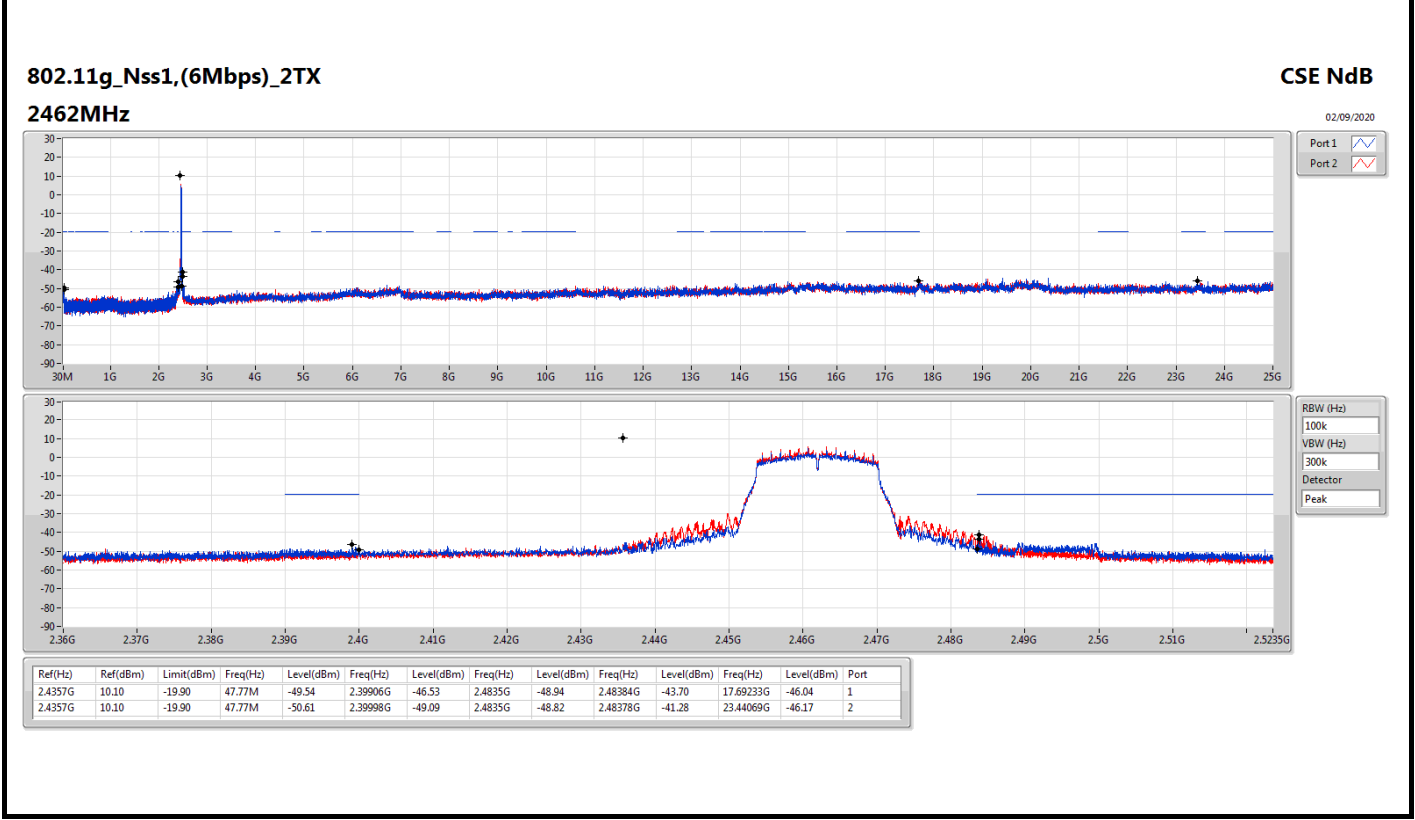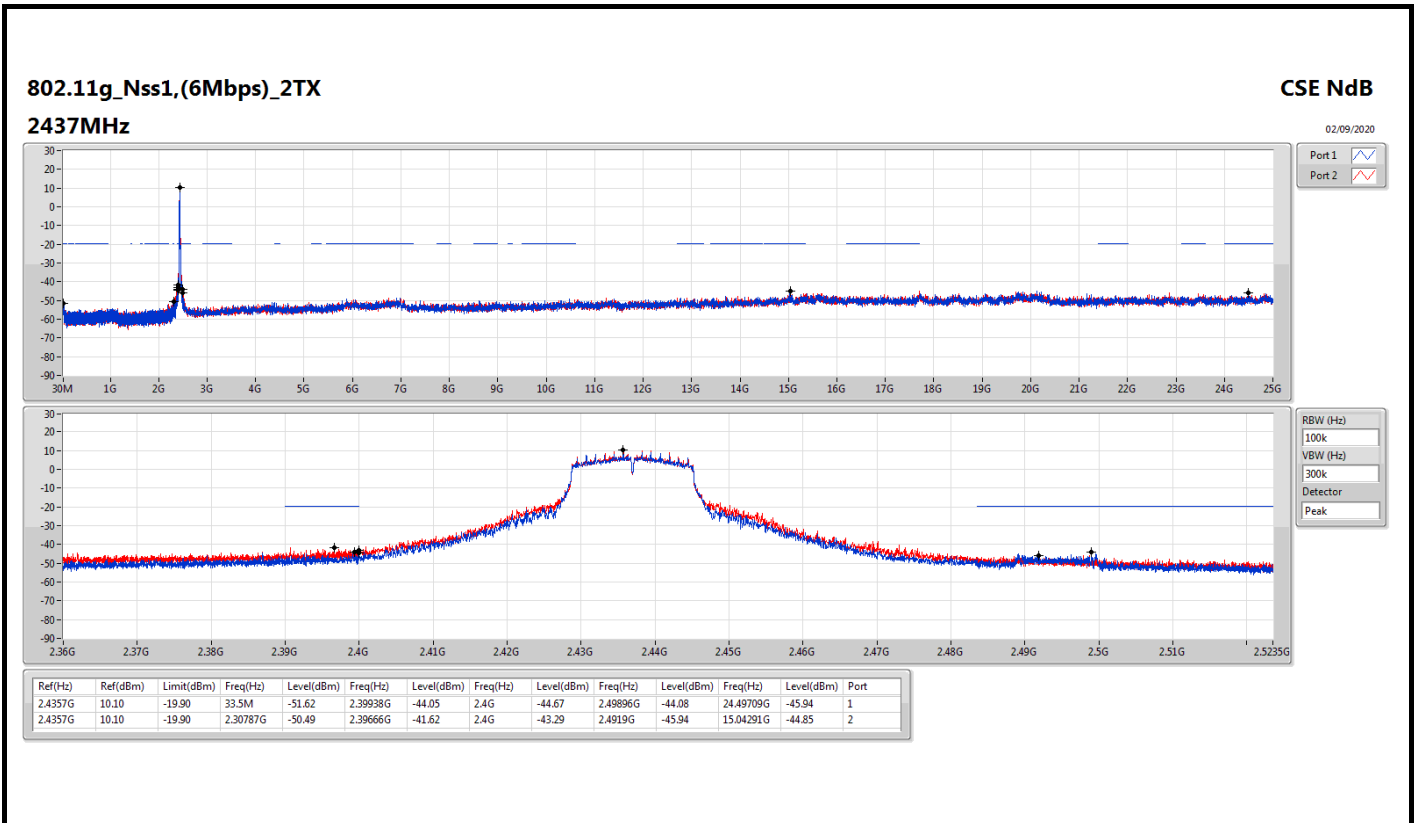

802.11n HT20_Nss1,(MCS0)_2TX
2412MHz


CSE NdB

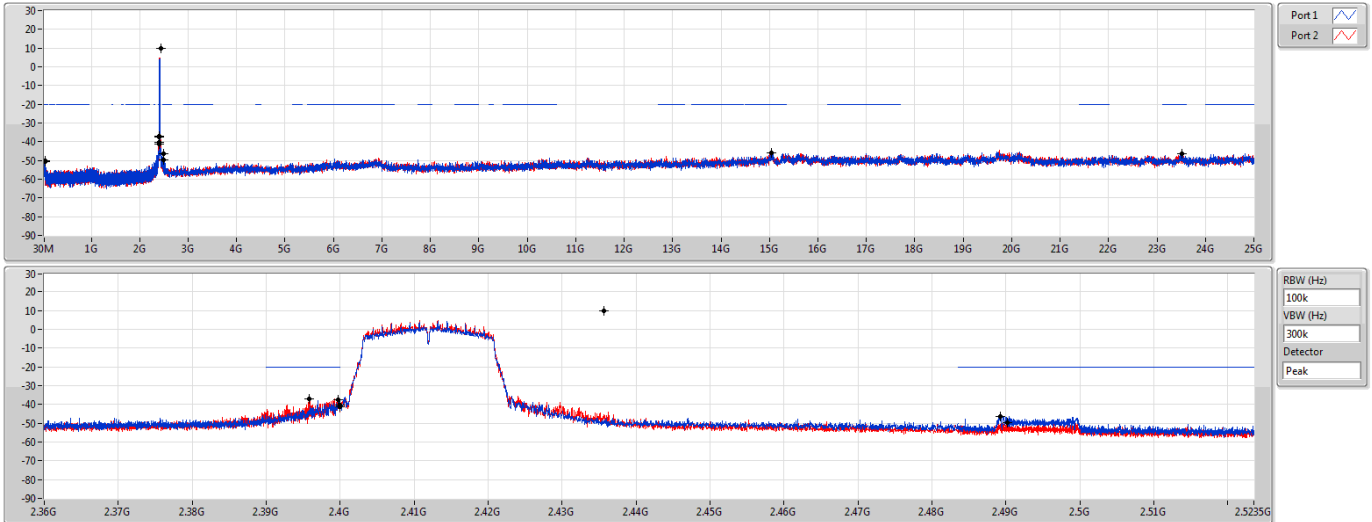

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.4357G	9.71	-20.29	47.77M	-50.30	2.39972G	-37.29	2.4G	-41.40	2.4892G	-46.47	23.52217G	-46.25	1
2.4357G	9.71	-20.29	47.77M	-50.72	2.39586G	-36.87	2.4G	-40.10	2.49024G	-49.82	15.04853G	-46.13	2

802.11n HT20_Nss1,(MCS0)_2TX
2437MHz


CSE NdB

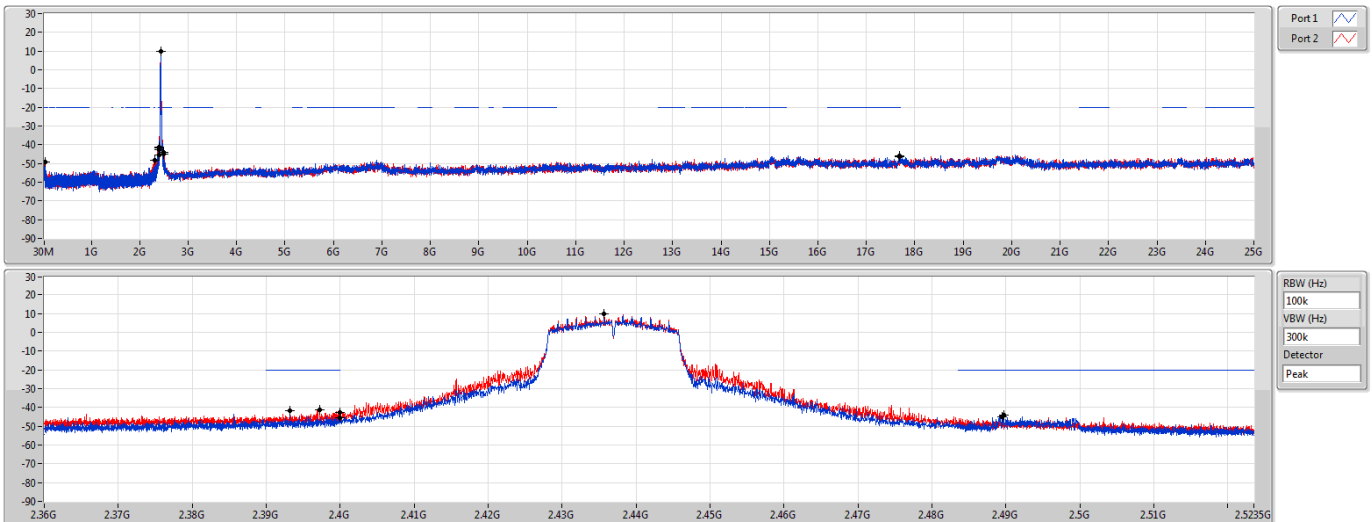

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.4357G	9.71	-20.29	47.77M	-49.39	2.3932G	-41.93	2.4G	-45.31	2.48968G	-44.22	17.69233G	-46.03	1
2.4357G	9.71	-20.29	2.3067G	-48.37	2.3972G	-41.24	2.4G	-42.79	2.48952G	-45.17	17.68952G	-46.38	2

802.11n HT20_Nss1,(MCS0)_2TX
2462MHz


CSE NdB

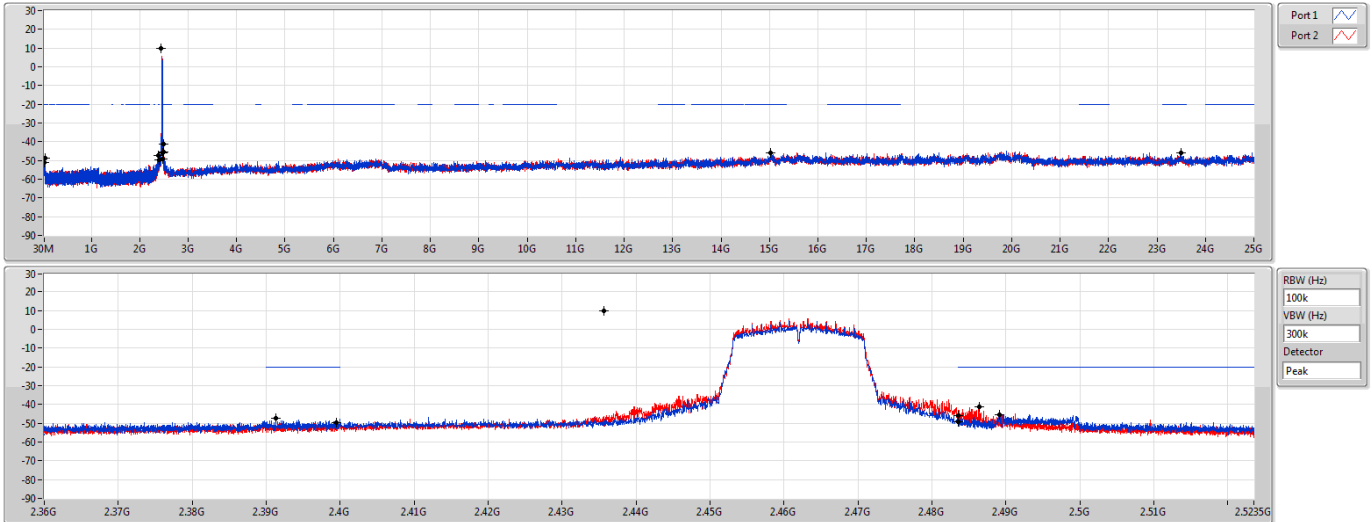



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.4357G	9.71	-20.29	48.06M	-48.67	2.39132G	-47.21	2.4835G	-49.40	2.48914G	-45.28	15.01481G	-45.83	1
2.4357G	9.71	-20.29	35.83M	-51.16	2.39948G	-49.68	2.4835G	-46.05	2.48634G	-41.37	23.49688G	-45.91	2

802.11n HT40_Nss1,(MCS0)_2TX
2422MHz

CSE NdB

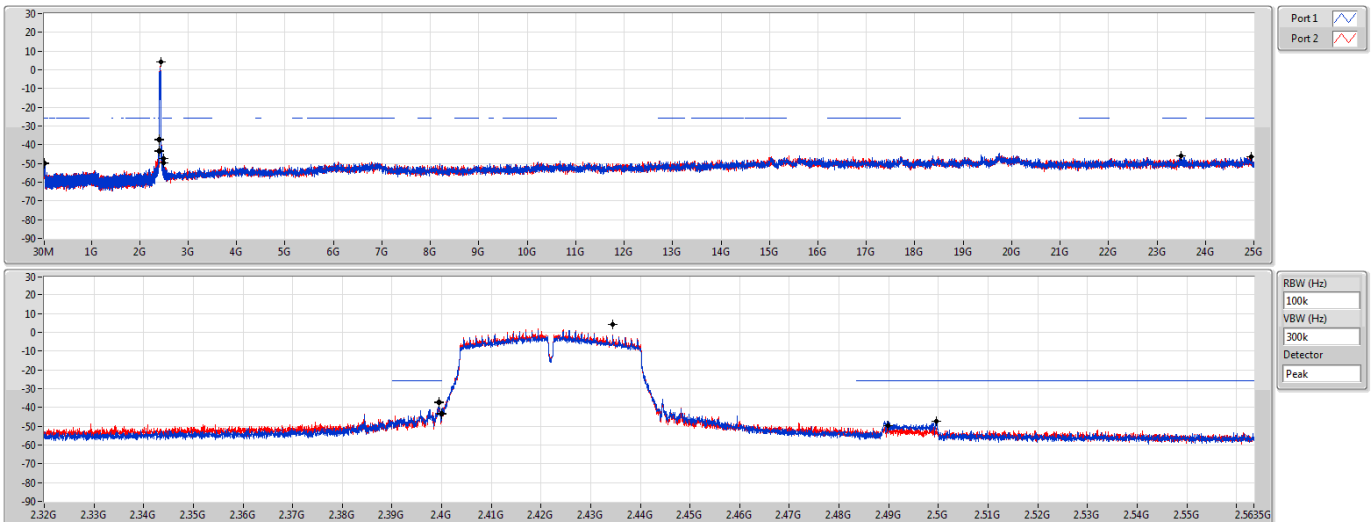


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43444G	4.45	-25.55	32.29M	-49.64	2.39952G	-37.58	2.4G	-43.12	2.49958G	-47.30	24.94952G	-46.61	1
2.43444G	4.45	-25.55	32.58M	-50.37	2.39944G	-37.26	2.4G	-43.42	2.48994G	-49.72	23.49956G	-45.98	2

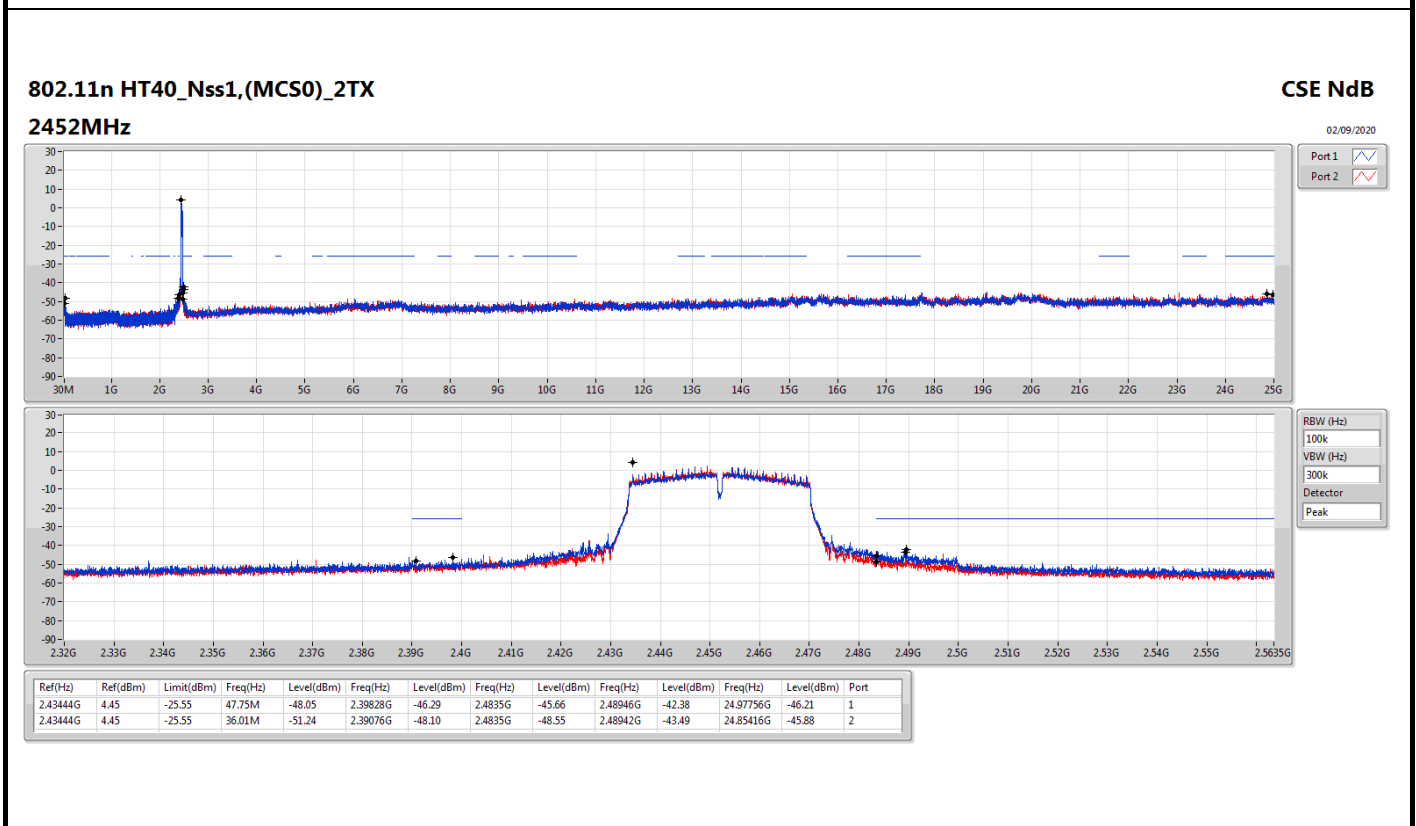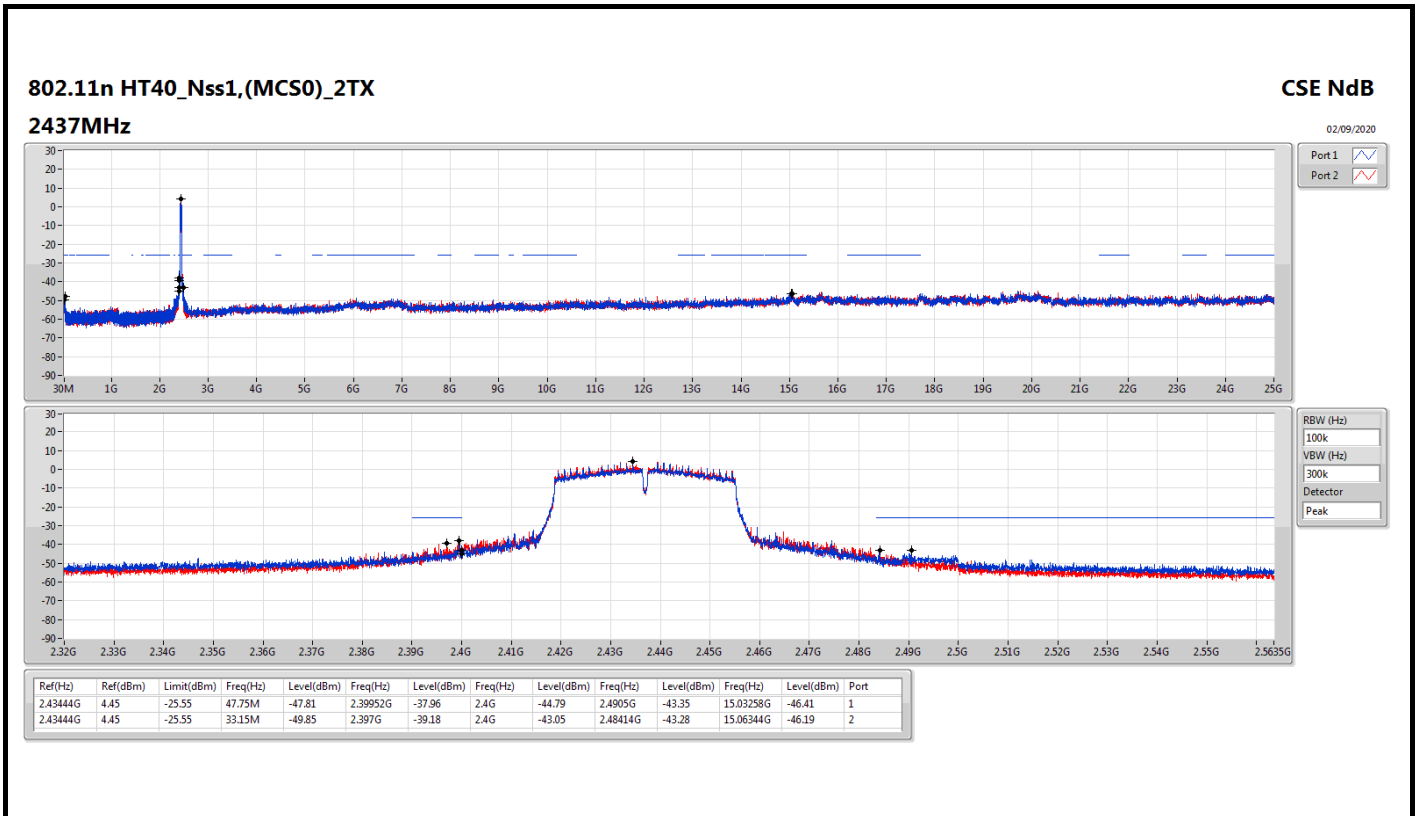




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 2	Pass	PK	50.37M	34.91	40.00	-5.09	Vertical

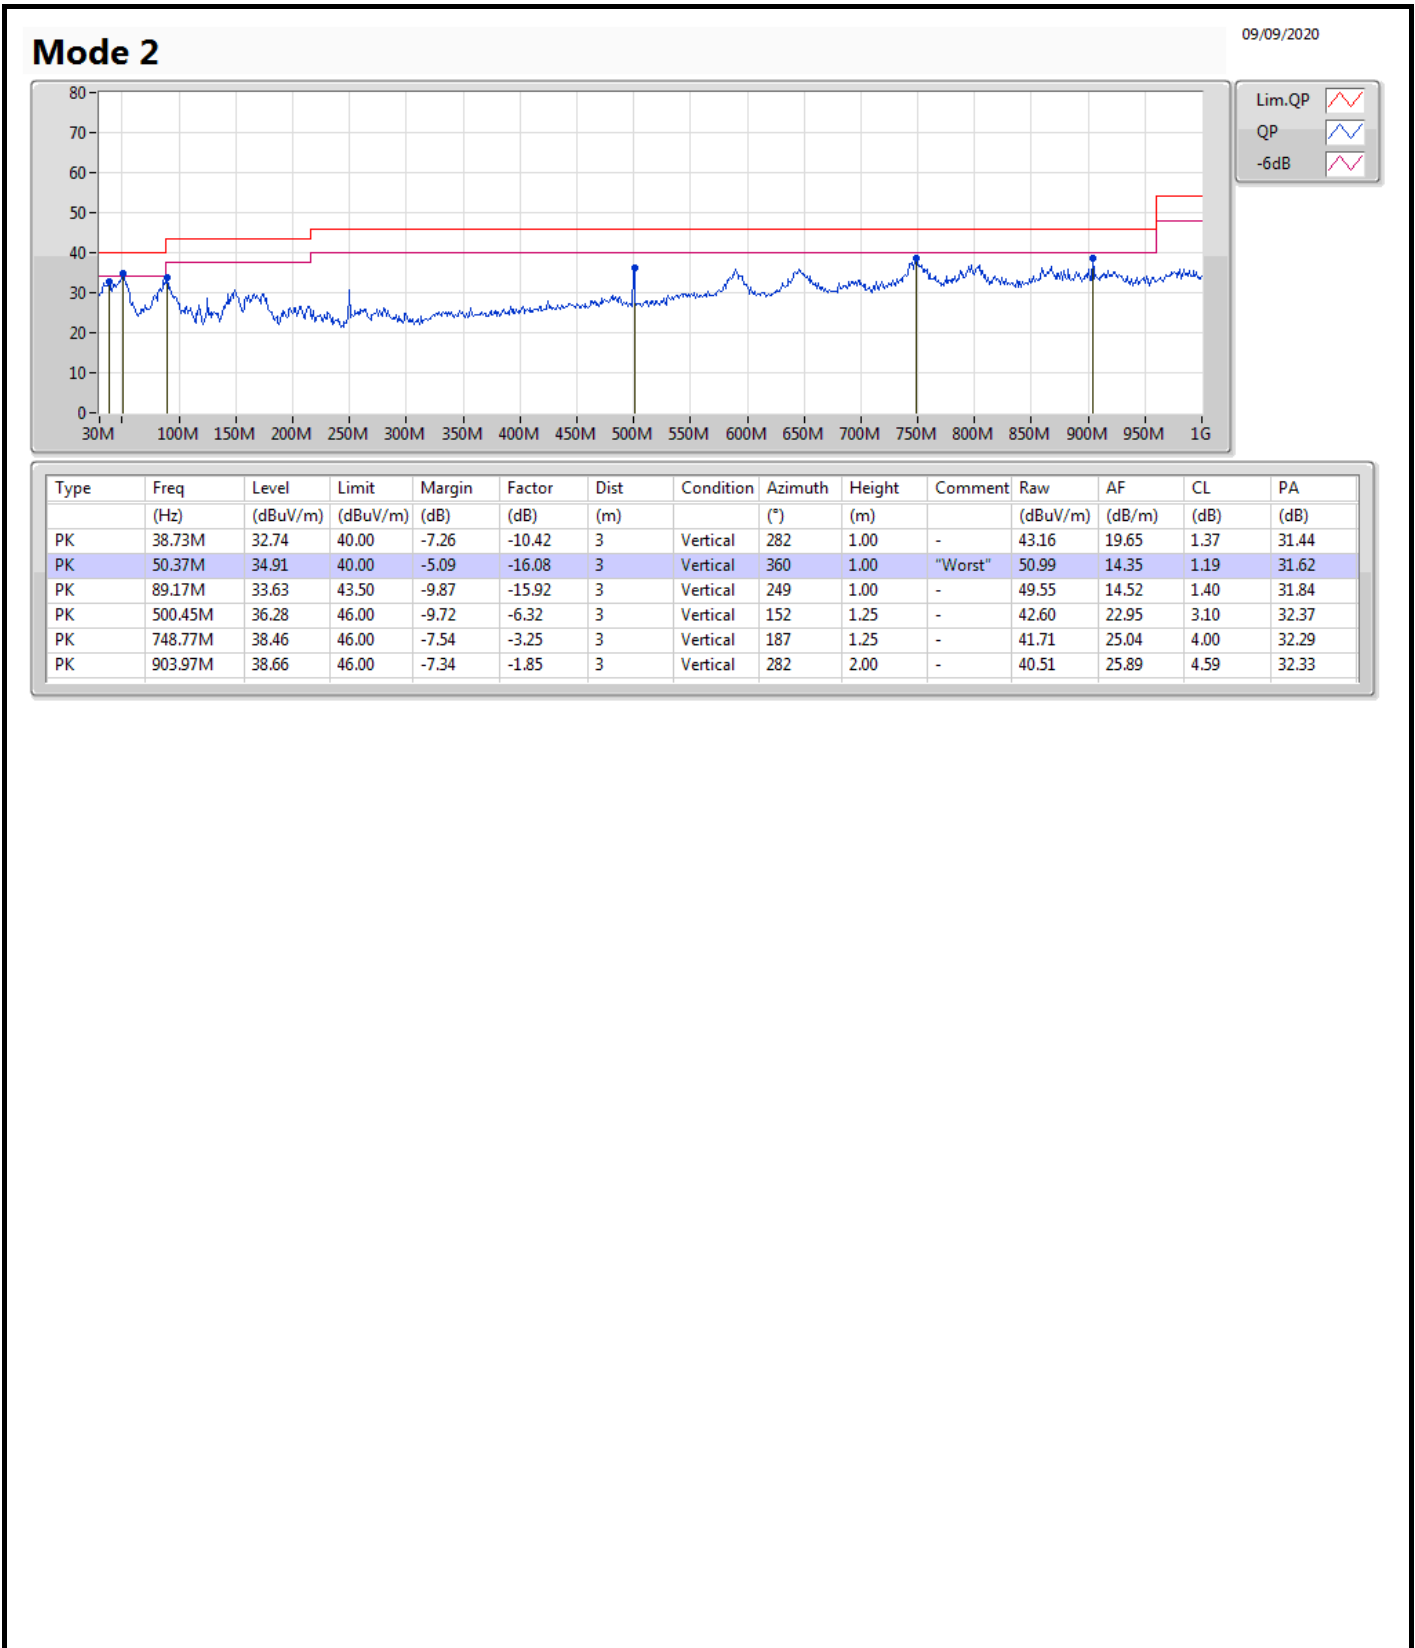

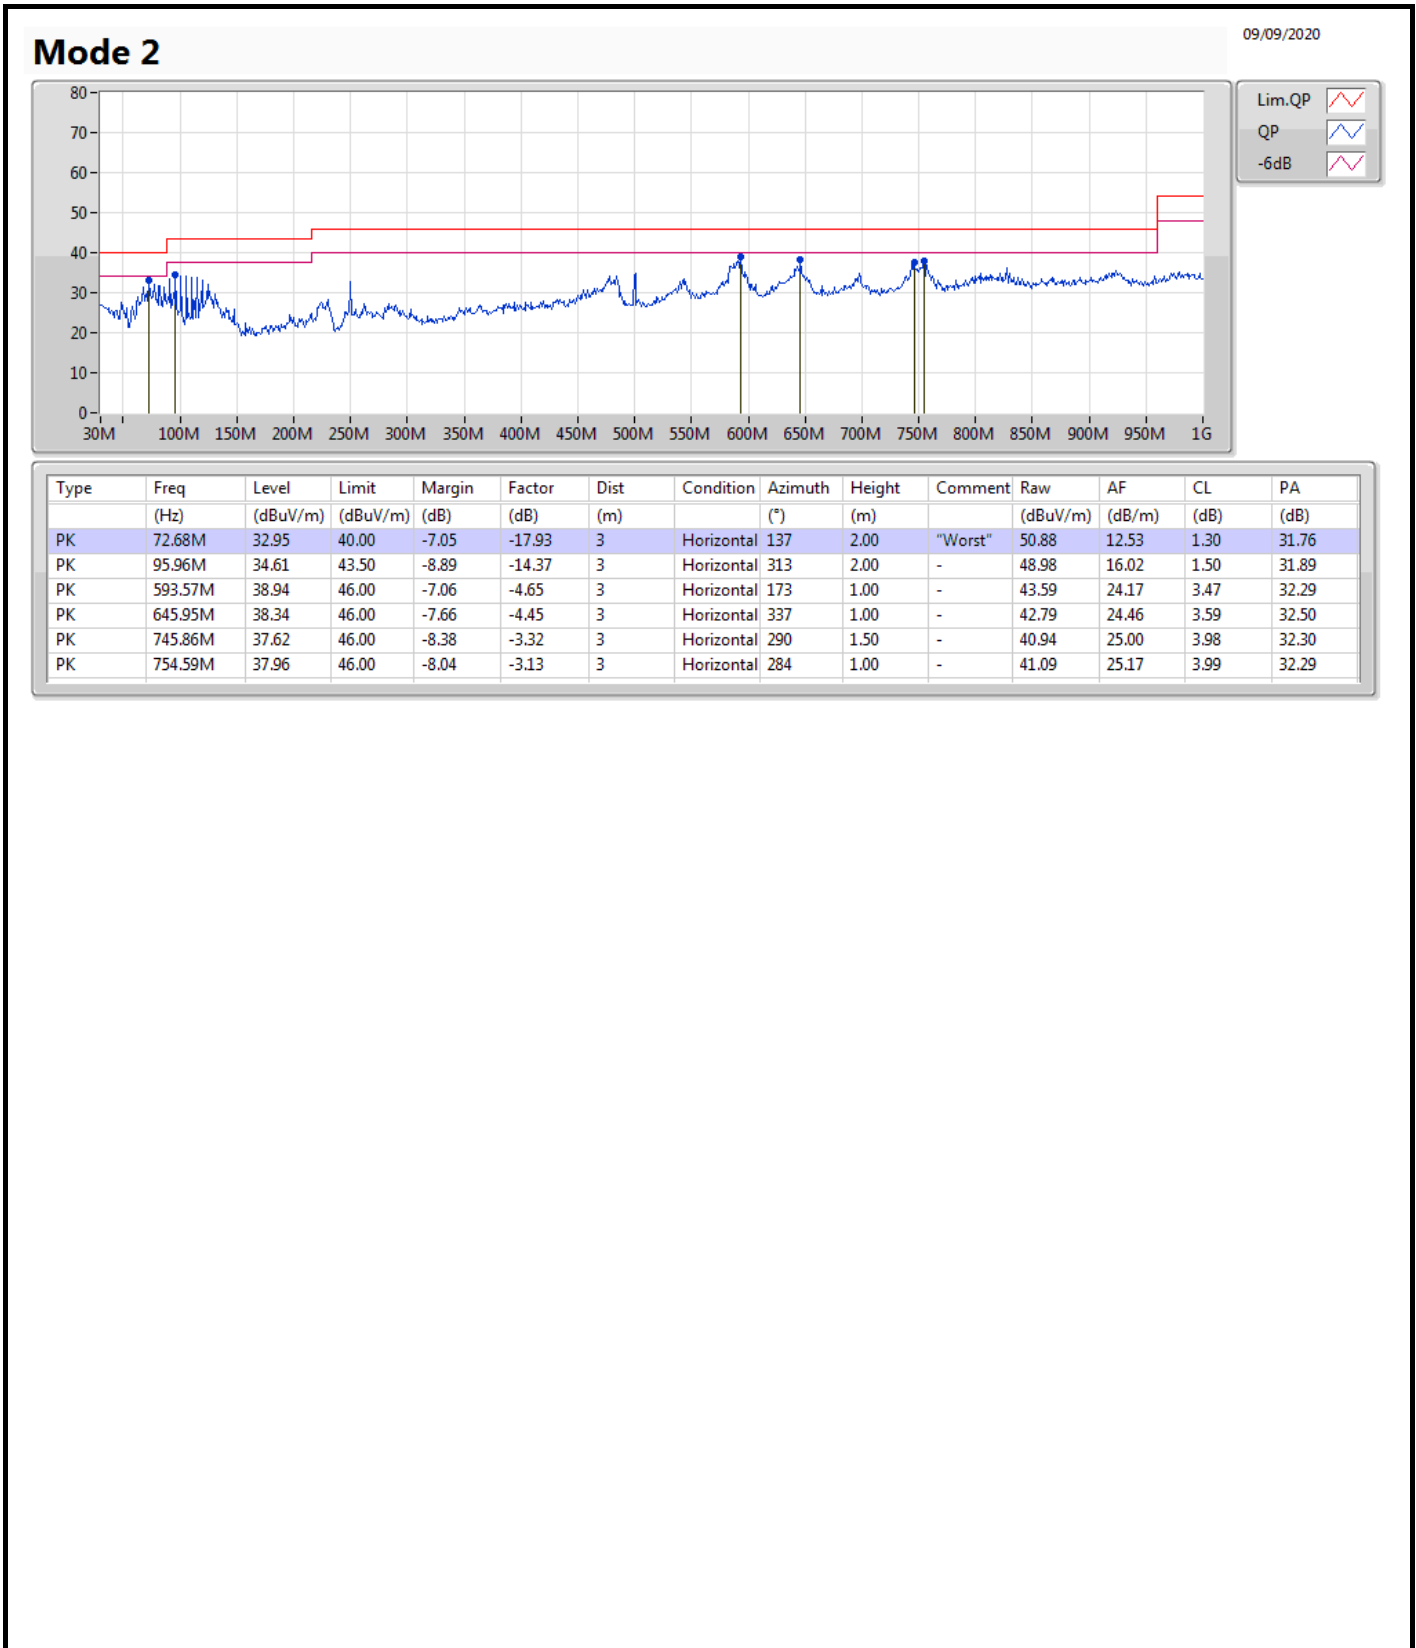




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-
802.11b_Nss1,(1Mbps)_2TX	Pass	AV	2.3898G	53.76	54.00	-0.24	3	Vertical	265	2.19	-
802.11g_Nss1,(6Mbps)_2TX	Pass	AV	2.3888G	53.82	54.00	-0.18	3	Vertical	92	1.80	-
802.11n HT20_Nss1,(MCS0)_2TX	Pass	PK	2.39G	73.96	74.00	-0.04	3	Vertical	95	1.80	-
802.11n HT40_Nss1,(MCS0)_2TX	Pass	AV	2.3894G	53.81	54.00	-0.19	3	Vertical	263	2.23	-

802.11b_Nss1,(1Mbps)_2TX

31/08/2020

2412MHz_TX

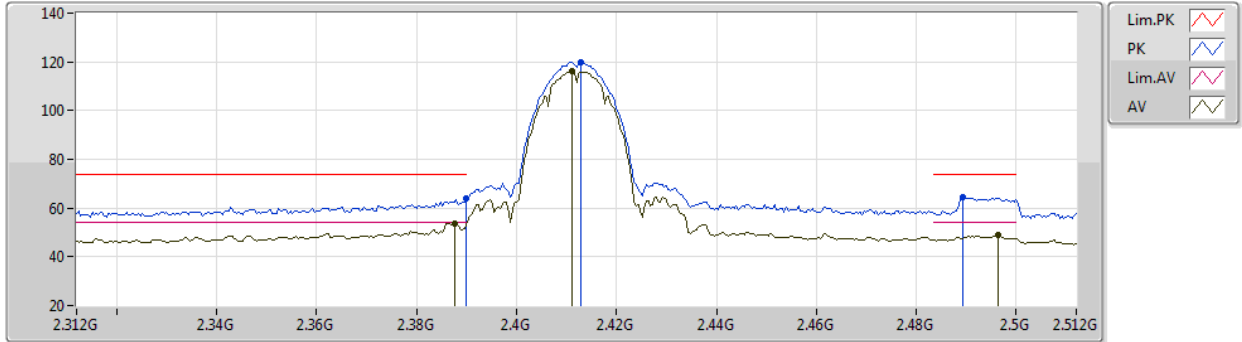


EUT Y_2TX
Setting 11
01-D-M-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.39G	64.18	74.00	-9.82	33.52	3	Vertical	271	1.66	-	27.46	3.20	-
AV	2.3876G	53.73	54.00	-0.27	23.09	3	Vertical	271	1.66	-	27.45	3.19	-
PK	2.4128G	119.90	Inf	-Inf	89.16	3	Vertical	271	1.66	-	27.53	3.21	-
AV	2.4112G	116.06	Inf	-Inf	85.33	3	Vertical	271	1.66	-	27.52	3.21	-
PK	2.4892G	64.57	74.00	-9.43	33.49	3	Vertical	271	1.66	-	27.84	3.24	-
AV	2.4964G	48.98	54.00	-5.02	17.85	3	Vertical	271	1.66	-	27.88	3.25	-

802.11b_Nss1,(1Mbps)_2TX

31/08/2020

2412MHz_TX

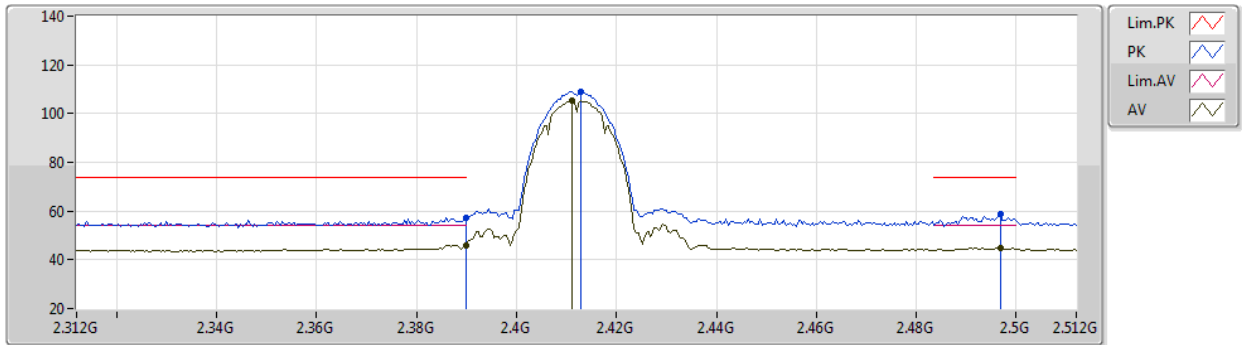

EUT Y_2TX
Setting 11
01-D-M-1


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.39G	57.20	74.00	-16.80	26.54	3	Horizontal	277	1.62	-	27.46	3.20	-
AV	2.39G	46.01	54.00	-7.99	15.35	3	Horizontal	277	1.62	-	27.46	3.20	-
PK	2.4128G	109.07	Inf	-Inf	78.33	3	Horizontal	277	1.62	-	27.53	3.21	-
AV	2.4112G	105.27	Inf	-Inf	74.54	3	Horizontal	277	1.62	-	27.52	3.21	-
PK	2.4968G	59.01	74.00	-14.99	27.88	3	Horizontal	277	1.62	-	27.88	3.25	-
AV	2.4968G	44.77	54.00	-9.23	13.64	3	Horizontal	277	1.62	-	27.88	3.25	-



802.11b_Nss1,(1Mbps)_2TX

31/08/2020

2412MHz_TX

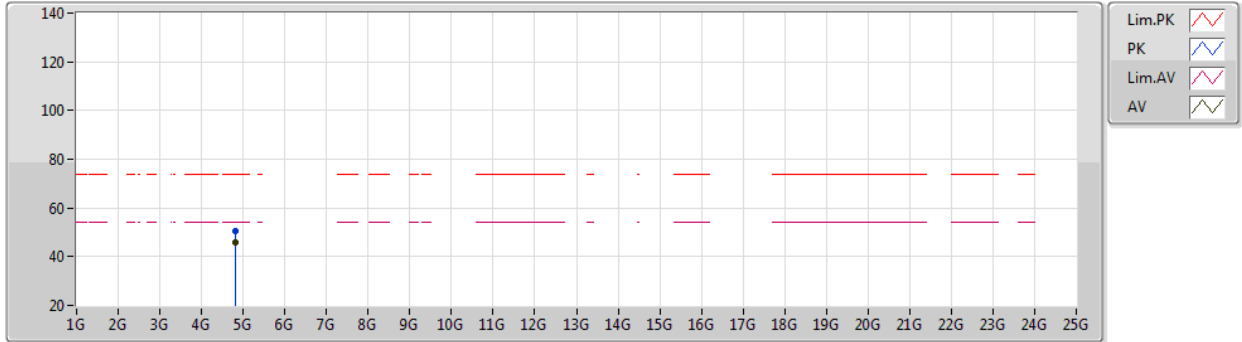

EUT Y_2TX
Setting 11
01-D-M-1


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.824G	50.29	74.00	-23.71	46.85	3	Vertical	174	2.67	-	32.45	5.71	34.72
AV	4.82392G	45.91	54.00	-8.09	42.47	3	Vertical	174	2.67	-	32.45	5.71	34.72



802.11b_Nss1,(1Mbps)_2TX

31/08/2020

2412MHz_TX

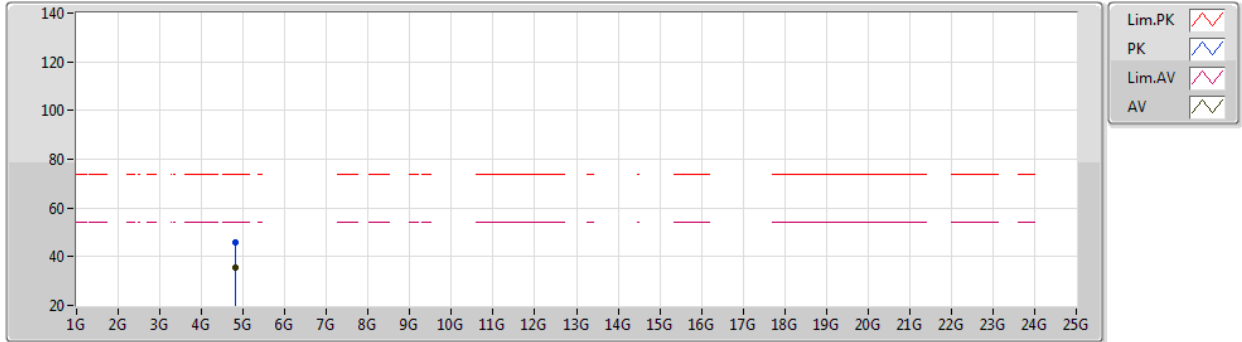


EUT Y_2TX
Setting 11
01-D-M-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.82392G	46.01	74.00	-27.99	42.57	3	Horizontal	310	1.98	-	32.45	5.71	34.72
AV	4.82392G	35.43	54.00	-18.57	31.99	3	Horizontal	310	1.98	-	32.45	5.71	34.72

802.11b_Nss1,(1Mbps)_2TX

31/08/2020

2417MHz_TX

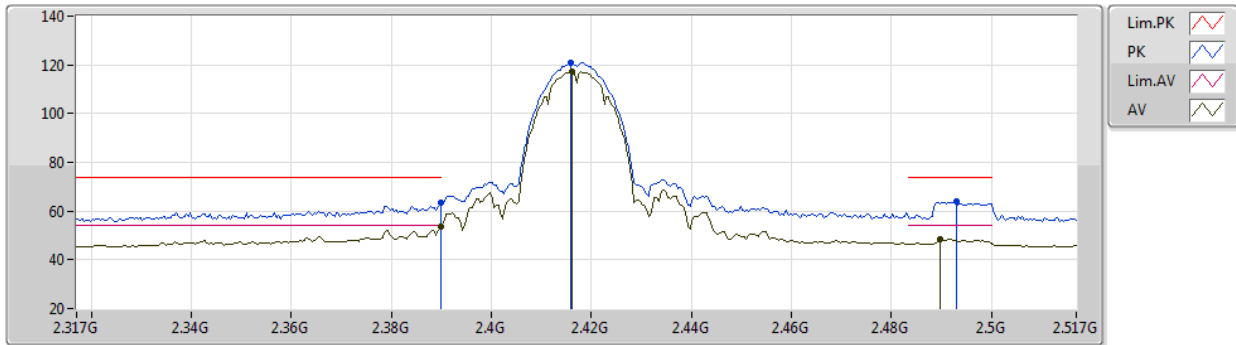


EUT Y_2TX
Setting 13
01-D-M-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3898G	63.57	74.00	-10.43	32.92	3	Vertical	273	1.32	-	27.46	3.19	-
AV	2.3898G	53.51	54.00	-0.49	22.86	3	Vertical	273	1.32	-	27.46	3.19	-
PK	2.4158G	120.94	Inf	-Inf	90.20	3	Vertical	273	1.32	-	27.53	3.21	-
AV	2.4162G	117.19	Inf	-Inf	86.45	3	Vertical	273	1.32	-	27.53	3.21	-
PK	2.493G	64.18	74.00	-9.82	33.07	3	Vertical	273	1.32	-	27.86	3.25	-
AV	2.4898G	48.67	54.00	-5.33	17.59	3	Vertical	273	1.32	-	27.84	3.24	-

802.11b_Nss1,(1Mbps)_2TX

31/08/2020

2417MHz_TX

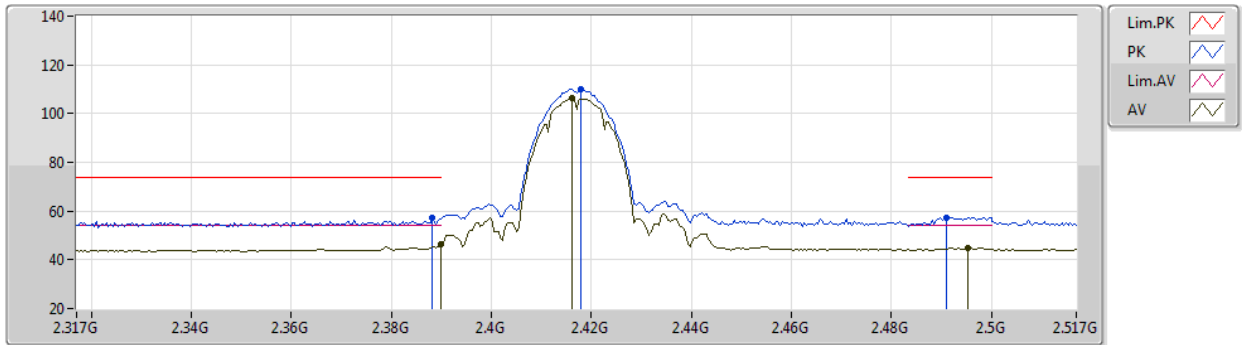


EUT Y_2TX
Setting 13
01-D-M-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3882G	57.05	74.00	-16.95	26.41	3	Horizontal	277	1.50	-	27.45	3.19	-
AV	2.3898G	46.23	54.00	-7.77	15.58	3	Horizontal	277	1.50	-	27.46	3.19	-
PK	2.4178G	110.04	Inf	-Inf	79.29	3	Horizontal	277	1.50	-	27.54	3.21	-
AV	2.4162G	106.15	Inf	-Inf	75.41	3	Horizontal	277	1.50	-	27.53	3.21	-
PK	2.491G	57.45	74.00	-16.55	26.35	3	Horizontal	277	1.50	-	27.85	3.25	-
AV	2.4954G	44.82	54.00	-9.18	13.70	3	Horizontal	277	1.50	-	27.87	3.25	-

802.11b_Nss1,(1Mbps)_2TX

31/08/2020

2437MHz_TX

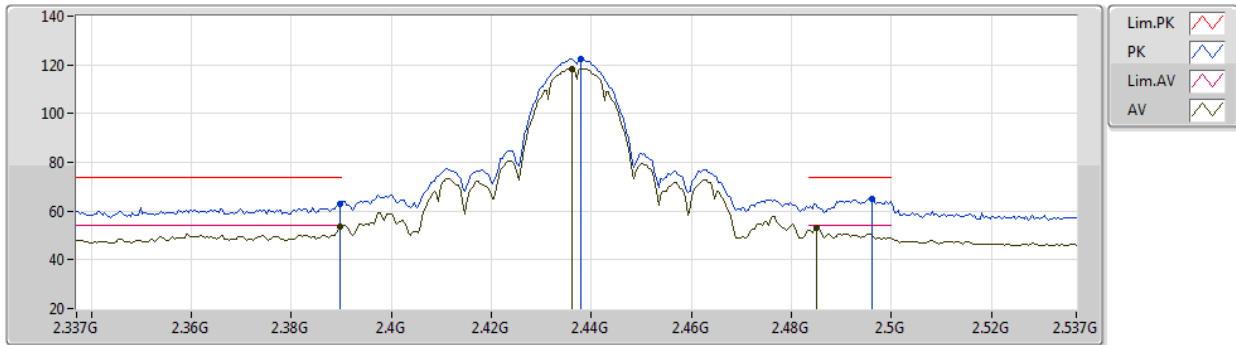


EUT Y_2TX
Setting 18
01-D-M-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3898G	62.74	74.00	-11.26	32.09	3	Vertical	265	2.19	-	27.46	3.19	-
AV	2.3898G	53.76	54.00	-0.24	23.11	3	Vertical	265	2.19	-	27.46	3.19	-
PK	2.4378G	122.36	Inf	-Inf	91.56	3	Vertical	265	2.19	-	27.58	3.22	-
AV	2.4362G	118.52	Inf	-Inf	87.73	3	Vertical	265	2.19	-	27.57	3.22	-
PK	2.4962G	65.00	74.00	-9.00	33.87	3	Vertical	265	2.19	-	27.88	3.25	-
AV	2.485G	52.91	54.00	-1.09	21.86	3	Vertical	265	2.19	-	27.81	3.24	-

802.11b_Nss1,(1Mbps)_2TX

31/08/2020

2437MHz_TX

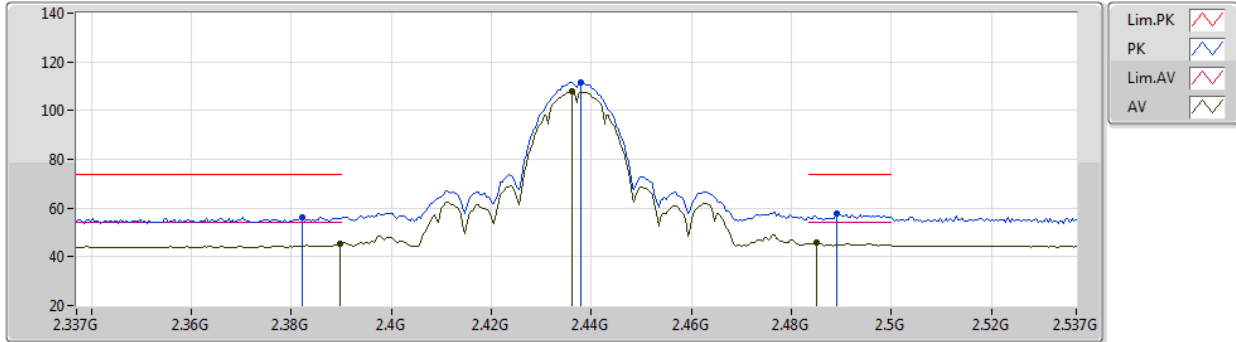

EUT Y_2TX
Setting 18
01-D-M-1


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3822G	56.15	74.00	-17.85	25.53	3	Horizontal	277	1.42	-	27.43	3.19	-
AV	2.3898G	45.47	54.00	-8.53	14.82	3	Horizontal	277	1.42	-	27.46	3.19	-
PK	2.4378G	111.56	Inf	-Inf	80.76	3	Horizontal	277	1.42	-	27.58	3.22	-
AV	2.4362G	107.70	Inf	-Inf	76.91	3	Horizontal	277	1.42	-	27.57	3.22	-
PK	2.489G	57.55	74.00	-16.45	26.48	3	Horizontal	277	1.42	-	27.83	3.24	-
AV	2.485G	46.01	54.00	-7.99	14.96	3	Horizontal	277	1.42	-	27.81	3.24	-



802.11b_Nss1,(1Mbps)_2TX

31/08/2020

2437MHz_TX

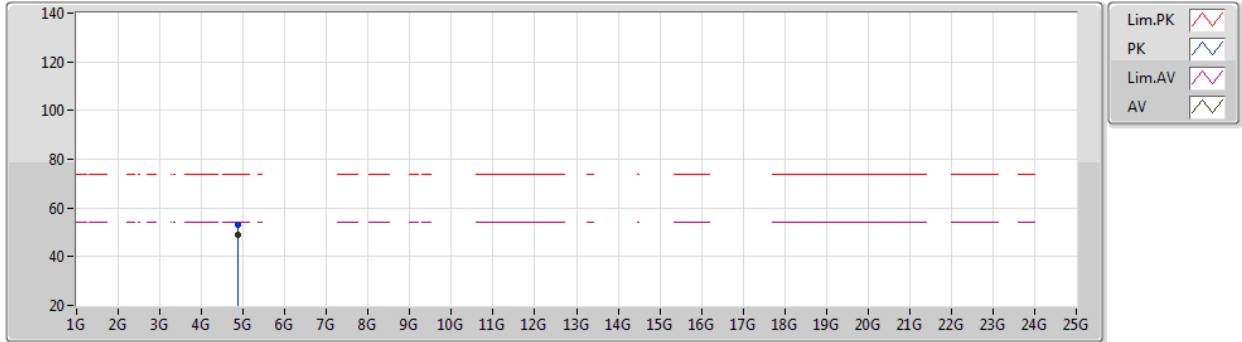

EUT Y_2TX
Setting 18
01-D-M-1


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.87396G	53.29	74.00	-20.71	49.68	3	Vertical	260	1.94	-	32.55	5.74	34.68
AV	4.87392G	49.13	54.00	-4.87	45.52	3	Vertical	260	1.94	-	32.55	5.74	34.68



802.11b_Nss1,(1Mbps)_2TX

31/08/2020

2437MHz_TX

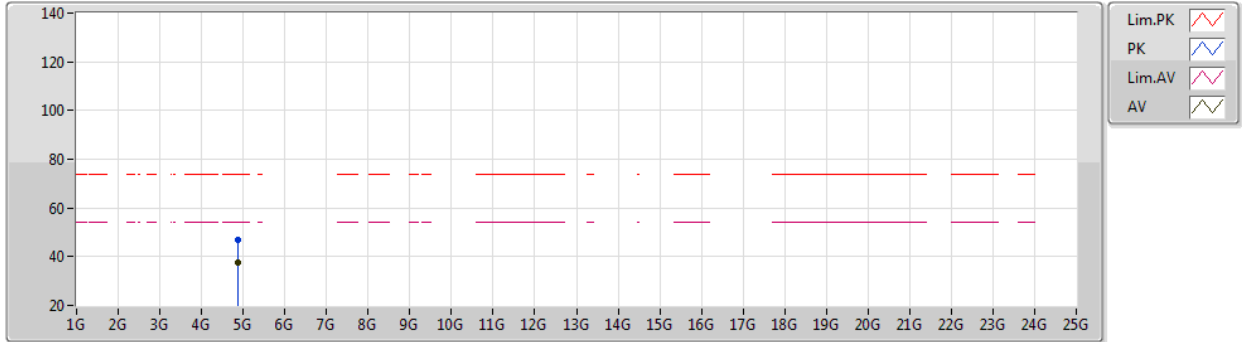


EUT Y_2TX
Setting 18
01-D-M-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.87396G	47.14	74.00	-26.86	43.53	3	Horizontal	317	2.10	-	32.55	5.74	34.68
AV	4.87396G	37.71	54.00	-16.29	34.10	3	Horizontal	317	2.10	-	32.55	5.74	34.68

802.11b_Nss1,(1Mbps)_2TX

31/08/2020

2457MHz_TX

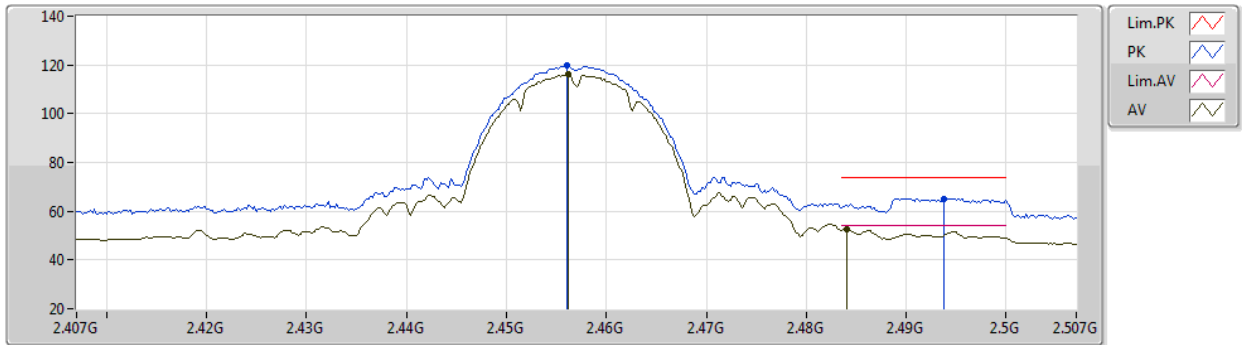

EUT Y_2TX
Setting 13
01-D-M-1


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.456G	119.58	Inf	-Inf	88.71	3	Vertical	271	1.67	-	27.64	3.23	-
AV	2.4562G	115.97	Inf	-Inf	85.10	3	Vertical	271	1.67	-	27.64	3.23	-
PK	2.4938G	65.24	74.00	-8.76	34.13	3	Vertical	271	1.67	-	27.86	3.25	-
AV	2.484G	52.73	54.00	-1.27	21.69	3	Vertical	271	1.67	-	27.80	3.24	-



802.11b_Nss1,(1Mbps)_2TX

31/08/2020

2457MHz_TX

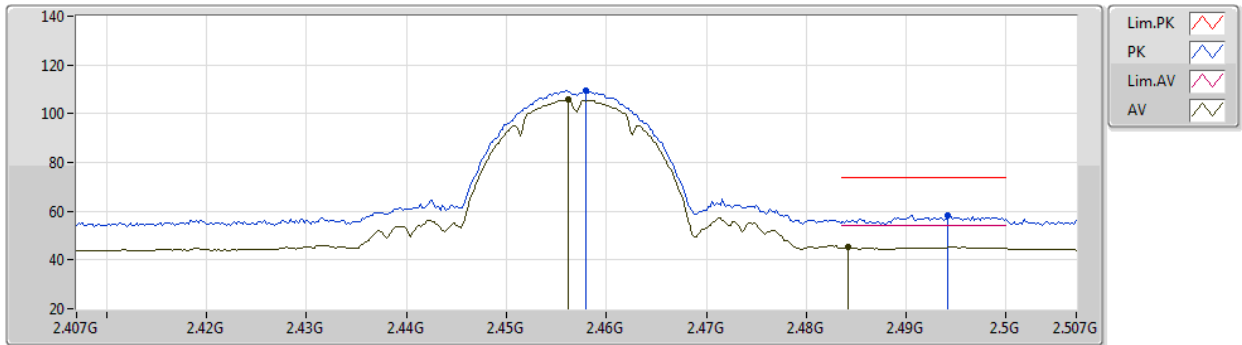


EUT Y_2TX
Setting 13
01-D-M-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.458G	109.42	Inf	-Inf	78.54	3	Horizontal	274	1.92	-	27.65	3.23	-
AV	2.4562G	105.62	Inf	-Inf	74.75	3	Horizontal	274	1.92	-	27.64	3.23	-
PK	2.4942G	58.36	74.00	-15.64	27.24	3	Horizontal	274	1.92	-	27.87	3.25	-
AV	2.4842G	45.29	54.00	-8.71	14.24	3	Horizontal	274	1.92	-	27.81	3.24	-

802.11b_Nss1,(1Mbps)_2TX

31/08/2020

2462MHz_TX

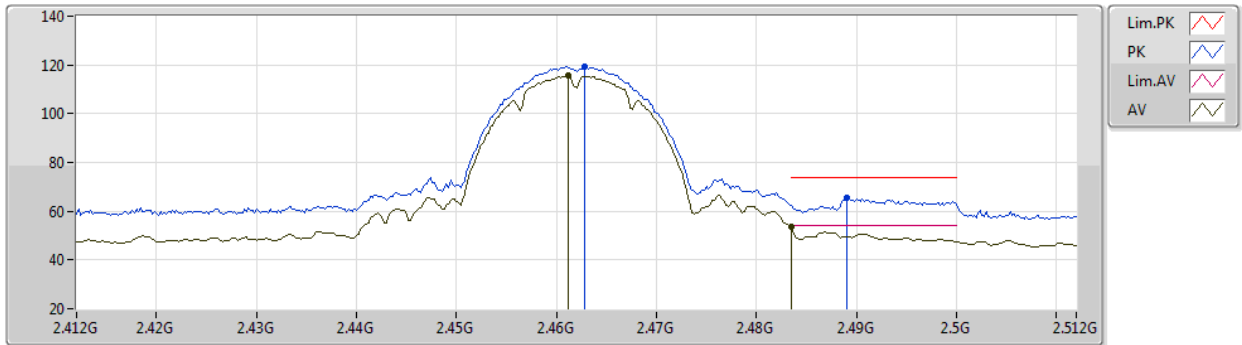

EUT Y_2TX
Setting 11
01-D-M-1


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.4628G	119.42	Inf	-Inf	88.51	3	Vertical	178	2.68	-	27.68	3.23	-
AV	2.4612G	115.45	Inf	-Inf	84.55	3	Vertical	178	2.68	-	27.67	3.23	-
PK	2.489G	65.41	74.00	-8.59	34.34	3	Vertical	178	2.68	-	27.83	3.24	-
AV	2.4835G	53.49	54.00	-0.51	22.45	3	Vertical	178	2.68	-	27.80	3.24	-



802.11b_Nss1,(1Mbps)_2TX

31/08/2020

2462MHz_TX

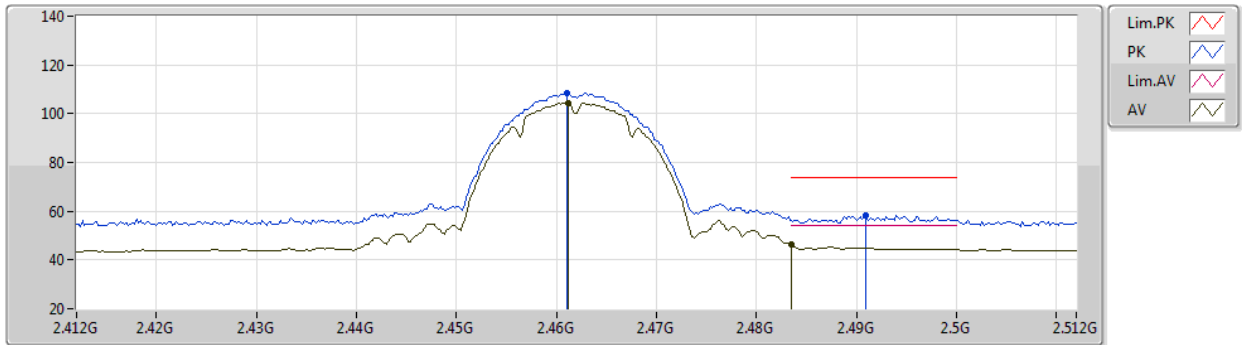

EUT Y_2TX
Setting 11
01-D-M-1


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.461G	108.26	Inf	-Inf	77.36	3	Horizontal	279	1.01	-	27.67	3.23	-
AV	2.4612G	104.43	Inf	-Inf	73.53	3	Horizontal	279	1.01	-	27.67	3.23	-
PK	2.491G	58.15	74.00	-15.85	27.05	3	Horizontal	279	1.01	-	27.85	3.25	-
AV	2.4835G	46.27	54.00	-7.73	15.23	3	Horizontal	279	1.01	-	27.80	3.24	-



802.11b_Nss1,(1Mbps)_2TX

31/08/2020

2462MHz_TX

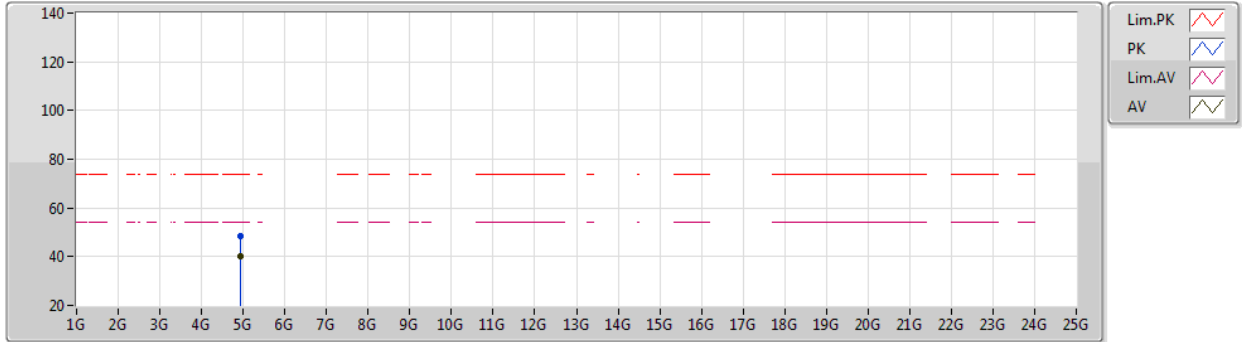

EUT Y_2TX
Setting 11
01-D-M-1


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.92372G	48.41	74.00	-25.59	44.60	3	Vertical	11	1.80	-	32.69	5.76	34.64
AV	4.92388G	40.23	54.00	-13.77	36.41	3	Vertical	11	1.80	-	32.70	5.76	34.64



802.11b_Nss1,(1Mbps)_2TX

31/08/2020

2462MHz_TX

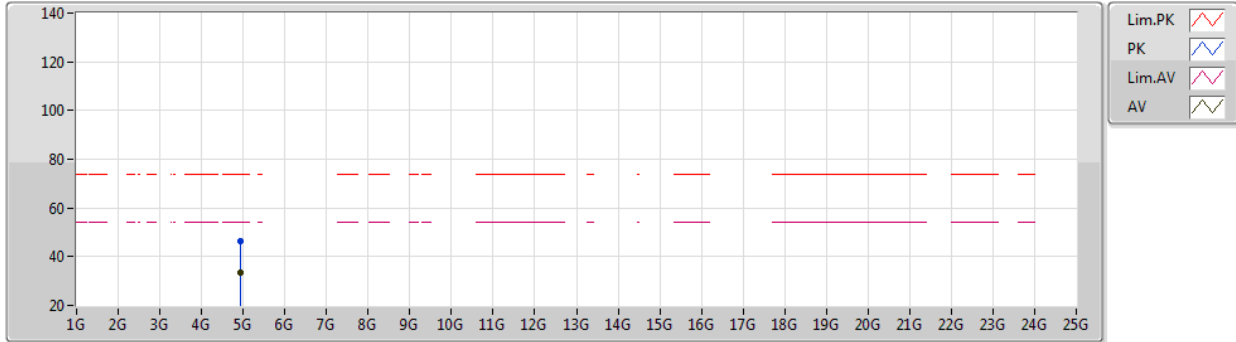


EUT Y_2TX
Setting 11
01-D-M-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.92465G	46.59	74.00	-27.41	42.77	3	Horizontal	231	1.80	-	32.70	5.76	34.64
AV	4.92397G	33.26	54.00	-20.74	29.44	3	Horizontal	231	1.80	-	32.70	5.76	34.64

802.11g_Nss1,(6Mbps)_2TX

31/08/2020

2412MHz_TX

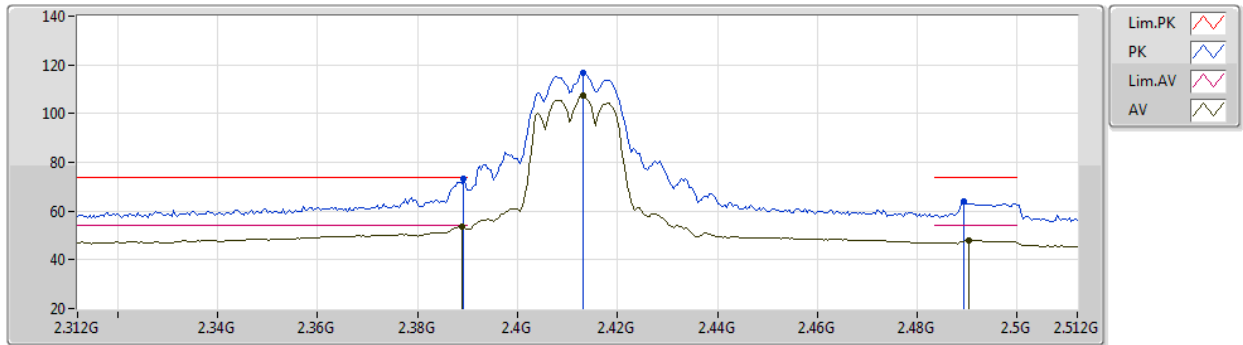


EUT Y_2TX
Setting 2
01-D-M-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3892G	73.38	74.00	-0.62	42.73	3	Vertical	92	1.80	-	27.46	3.19	-
AV	2.3888G	53.82	54.00	-0.18	23.17	3	Vertical	92	1.80	-	27.46	3.19	-
PK	2.4132G	116.91	Inf	-Inf	86.17	3	Vertical	92	1.80	-	27.53	3.21	-
AV	2.4132G	107.52	Inf	-Inf	76.78	3	Vertical	92	1.80	-	27.53	3.21	-
PK	2.4892G	63.98	74.00	-10.02	32.90	3	Vertical	92	1.80	-	27.84	3.24	-
AV	2.4904G	47.87	54.00	-6.13	16.78	3	Vertical	92	1.80	-	27.84	3.25	-

802.11g_Nss1,(6Mbps)_2TX

31/08/2020

2412MHz_TX

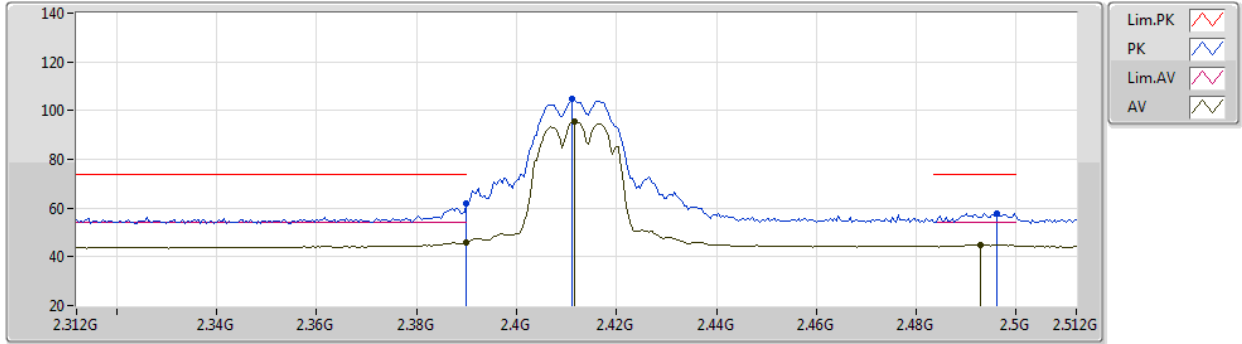


EUT Y_2TX
Setting 2
01-D-M-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.39G	61.96	74.00	-12.04	31.30	3	Horizontal	279	1.45	-	27.46	3.20	-
AV	2.39G	46.04	54.00	-7.96	15.38	3	Horizontal	279	1.45	-	27.46	3.20	-
PK	2.4112G	104.94	Inf	-Inf	74.21	3	Horizontal	279	1.45	-	27.52	3.21	-
AV	2.4116G	95.68	Inf	-Inf	64.95	3	Horizontal	279	1.45	-	27.52	3.21	-
PK	2.496G	57.79	74.00	-16.21	26.66	3	Horizontal	279	1.45	-	27.88	3.25	-
AV	2.4928G	44.82	54.00	-9.18	13.71	3	Horizontal	279	1.45	-	27.86	3.25	-

802.11g_Nss1,(6Mbps)_2TX

31/08/2020

2412MHz_TX

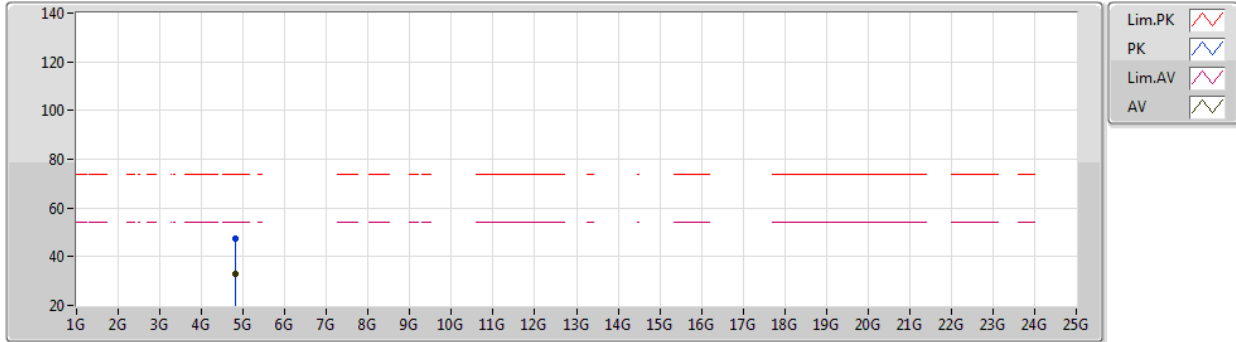

EUT Y_2TX
Setting 2
01-D-L-2


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.8282G	47.40	74.00	-26.60	43.95	3	Vertical	35	1.80	-	32.46	5.71	34.72
AV	4.82112G	33.16	54.00	-20.84	29.74	3	Vertical	35	1.80	-	32.44	5.71	34.73



802.11g_Nss1,(6Mbps)_2TX

31/08/2020

2412MHz_TX

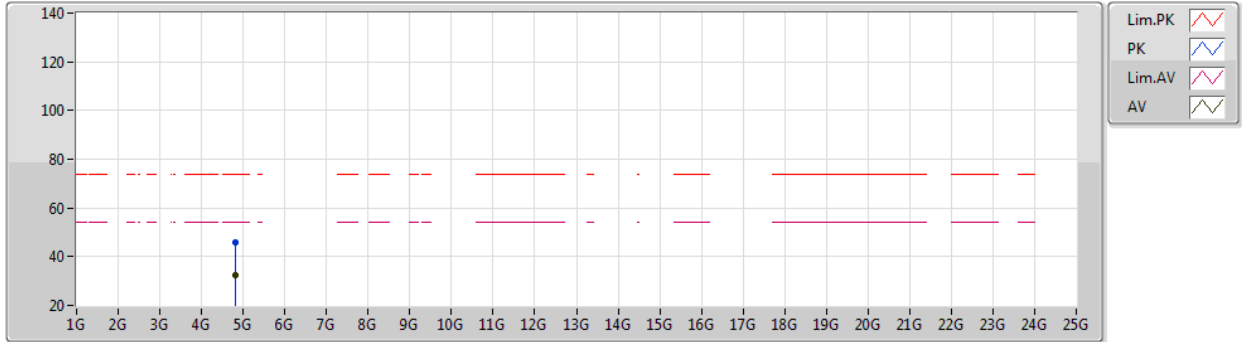


EUT Y_2TX
Setting 2
01-D-L-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.81912G	46.05	74.00	-27.95	42.63	3	Horizontal	182	1.15	-	32.44	5.71	34.73
AV	4.823G	32.65	54.00	-21.35	29.22	3	Horizontal	182	1.15	-	32.45	5.71	34.73

802.11g_Nss1,(6Mbps)_2TX

31/08/2020

2417MHz_TX

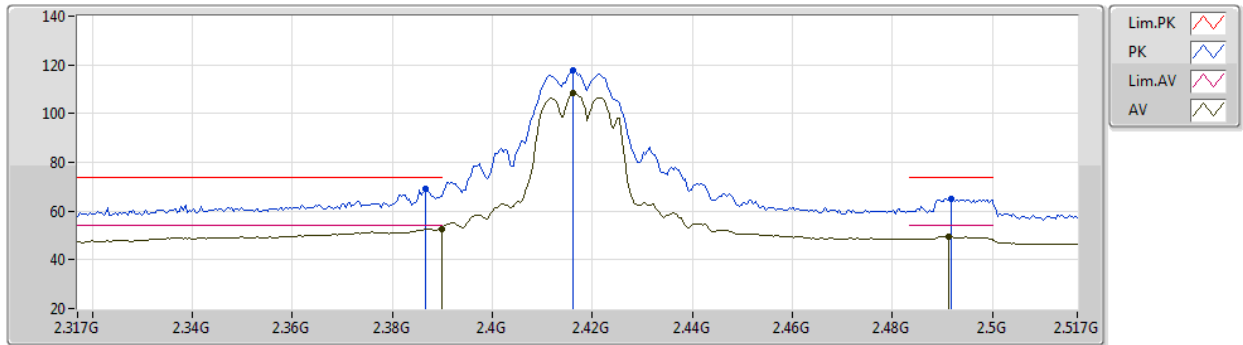


EUT Y_2TX
Setting 4
01-D-M-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3866G	68.98	74.00	-5.02	38.34	3	Vertical	274	1.80	-	27.45	3.19	-
AV	2.3898G	52.81	54.00	-1.19	22.16	3	Vertical	274	1.80	-	27.46	3.19	-
PK	2.4162G	117.71	Inf	-Inf	86.97	3	Vertical	274	1.80	-	27.53	3.21	-
AV	2.4162G	108.46	Inf	-Inf	77.72	3	Vertical	274	1.80	-	27.53	3.21	-
PK	2.4918G	65.14	74.00	-8.86	34.04	3	Vertical	274	1.80	-	27.85	3.25	-
AV	2.4914G	49.66	54.00	-4.34	18.56	3	Vertical	274	1.80	-	27.85	3.25	-

802.11g_Nss1,(6Mbps)_2TX

31/08/2020

2417MHz_TX

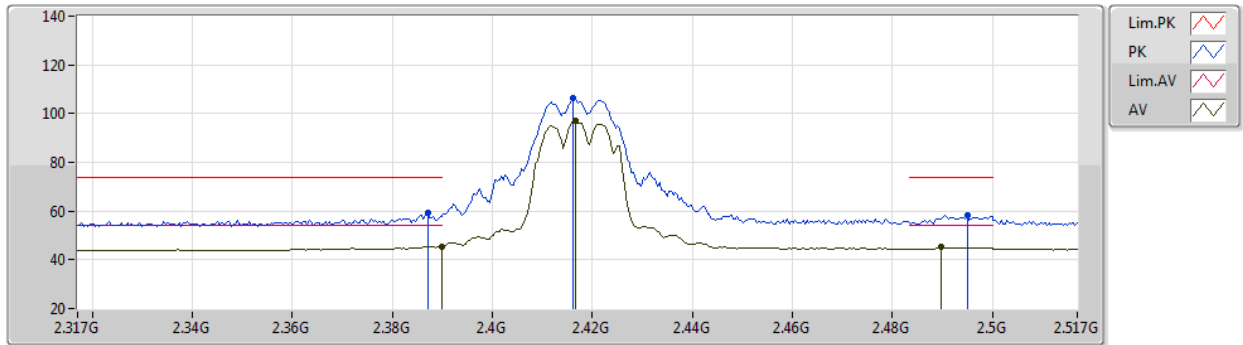

EUT Y_2TX
Setting 4
01-D-M-1


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.387G	59.16	74.00	-14.84	28.52	3	Horizontal	277	1.49	-	27.45	3.19	-
AV	2.3898G	45.46	54.00	-8.54	14.81	3	Horizontal	277	1.49	-	27.46	3.19	-
PK	2.4162G	106.21	Inf	-Inf	75.47	3	Horizontal	277	1.49	-	27.53	3.21	-
AV	2.4166G	96.94	Inf	-Inf	66.20	3	Horizontal	277	1.49	-	27.53	3.21	-
PK	2.495G	58.15	74.00	-15.85	27.03	3	Horizontal	277	1.49	-	27.87	3.25	-
AV	2.4898G	45.27	54.00	-8.73	14.19	3	Horizontal	277	1.49	-	27.84	3.24	-



802.11g_Nss1,(6Mbps)_2TX

31/08/2020

2437MHz_TX

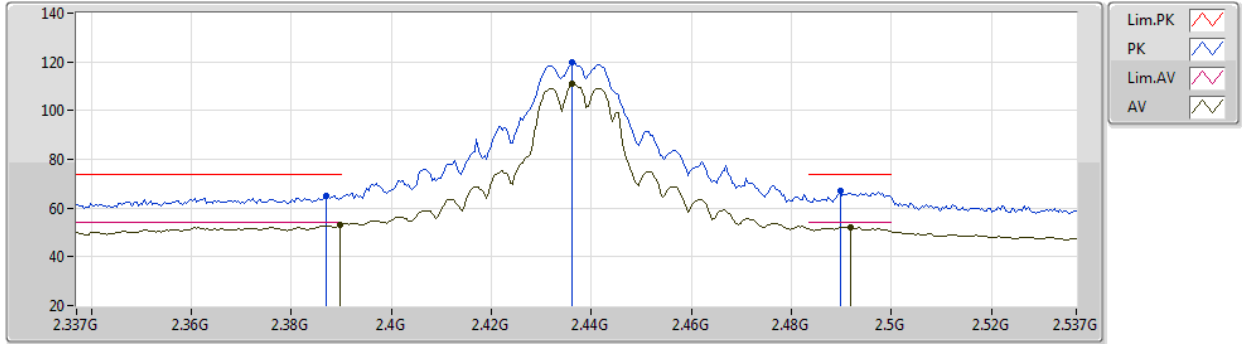


EUT Y_2TX
Setting 11
01-D-M-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.387G	64.80	74.00	-9.20	34.16	3	Vertical	263	2.18	-	27.45	3.19	-
AV	2.3898G	53.08	54.00	-0.92	22.43	3	Vertical	263	2.18	-	27.46	3.19	-
PK	2.4362G	120.05	Inf	-Inf	89.26	3	Vertical	263	2.18	-	27.57	3.22	-
AV	2.4362G	110.84	Inf	-Inf	80.05	3	Vertical	263	2.18	-	27.57	3.22	-
PK	2.4898G	66.87	74.00	-7.13	35.79	3	Vertical	263	2.18	-	27.84	3.24	-
AV	2.4918G	52.08	54.00	-1.92	20.98	3	Vertical	263	2.18	-	27.85	3.25	-

802.11g_Nss1,(6Mbps)_2TX

31/08/2020

2437MHz_TX

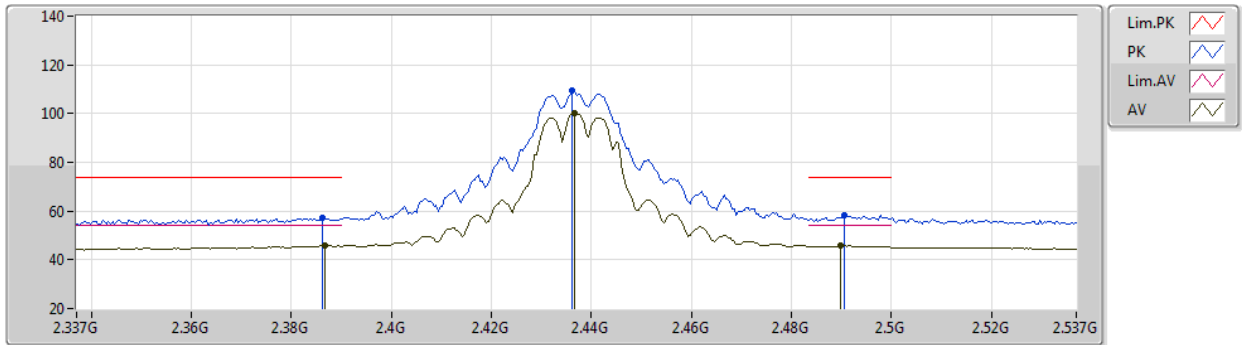

EUT Y_2TX
Setting 11
01-D-M-1


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3862G	57.49	74.00	-16.51	26.86	3	Horizontal	278	1.39	-	27.44	3.19	-
AV	2.3866G	45.79	54.00	-8.21	15.15	3	Horizontal	278	1.39	-	27.45	3.19	-
PK	2.4362G	109.44	Inf	-Inf	78.65	3	Horizontal	278	1.39	-	27.57	3.22	-
AV	2.4366G	100.15	Inf	-Inf	69.36	3	Horizontal	278	1.39	-	27.57	3.22	-
PK	2.4906G	58.47	74.00	-15.53	27.38	3	Horizontal	278	1.39	-	27.84	3.25	-
AV	2.4898G	45.82	54.00	-8.18	14.74	3	Horizontal	278	1.39	-	27.84	3.24	-



802.11g_Nss1,(6Mbps)_2TX

31/08/2020

2437MHz_TX

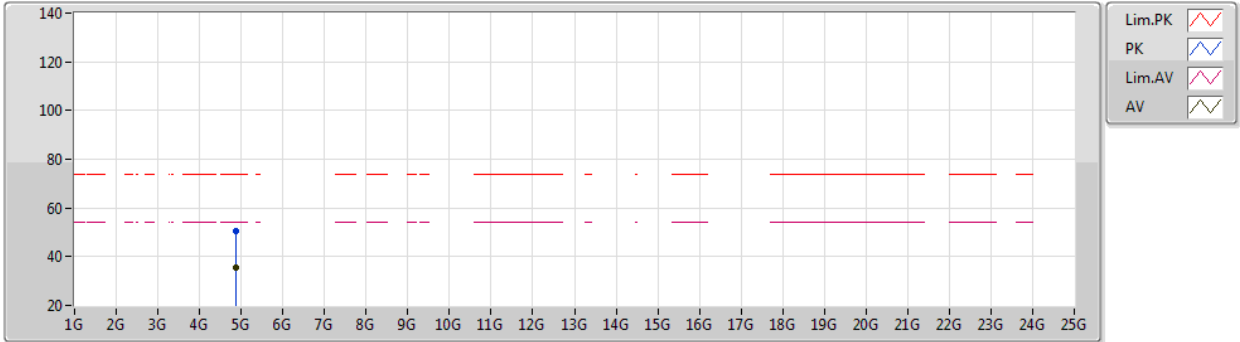

EUT Y_2TX
Setting 11
01-D-L-2


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.87252G	50.35	74.00	-23.65	46.74	3	Vertical	163	1.80	-	32.55	5.74	34.68
AV	4.87252G	35.65	54.00	-18.35	32.04	3	Vertical	163	1.80	-	32.55	5.74	34.68



802.11g_Nss1,(6Mbps)_2TX

31/08/2020

2437MHz_TX

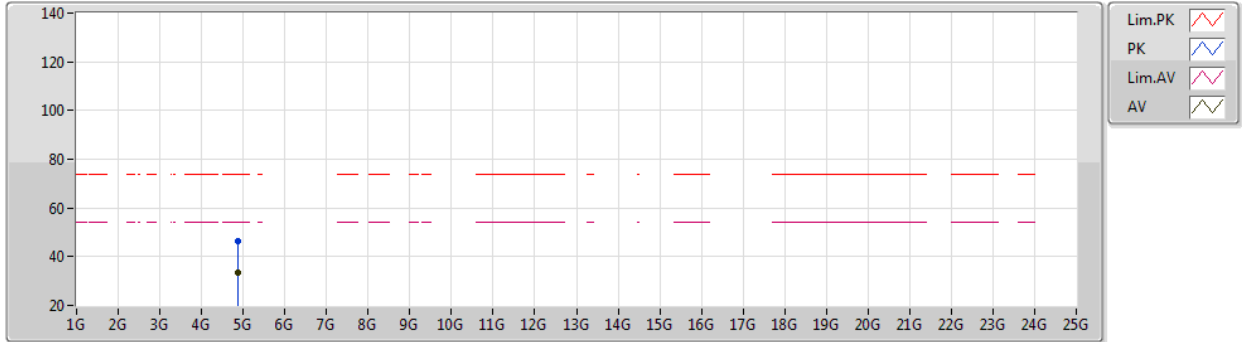


EUT Y_2TX
Setting 11
01-D-L-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.87024G	46.41	74.00	-27.59	42.82	3	Horizontal	61	1.80	-	32.54	5.74	34.69
AV	4.87288G	33.29	54.00	-20.71	29.68	3	Horizontal	61	1.80	-	32.55	5.74	34.68

802.11g_Nss1,(6Mbps)_2TX

31/08/2020

2457MHz_TX

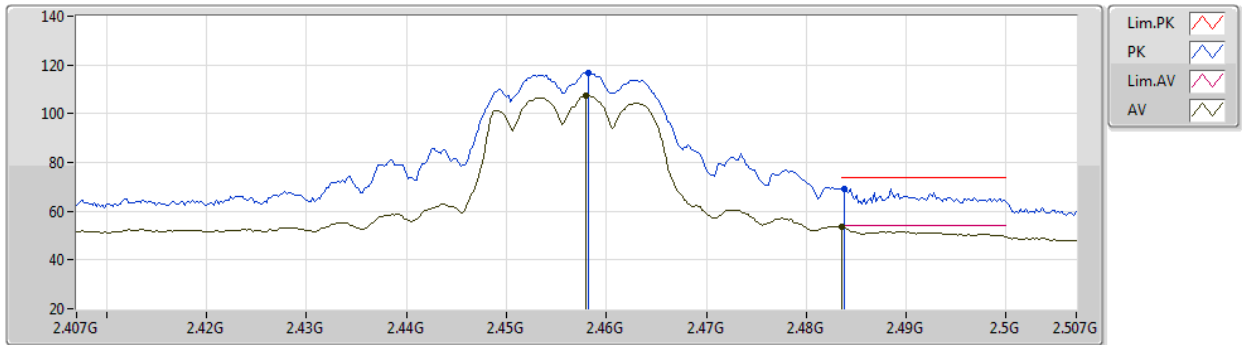

EUT Y_2TX
Setting 5
01-D-M-1


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.4582G	116.92	Inf	-Inf	86.04	3	Vertical	96	1.68	-	27.65	3.23	-
AV	2.458G	107.52	Inf	-Inf	76.64	3	Vertical	96	1.68	-	27.65	3.23	-
PK	2.4838G	69.29	74.00	-4.71	38.25	3	Vertical	96	1.68	-	27.80	3.24	-
AV	2.4835G	53.46	54.00	-0.54	22.42	3	Vertical	96	1.68	-	27.80	3.24	-



802.11g_Nss1,(6Mbps)_2TX

31/08/2020

2457MHz_TX

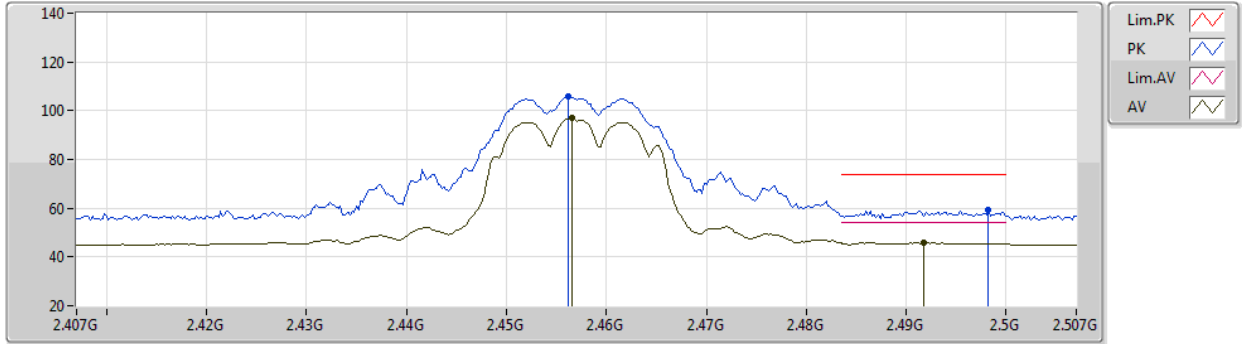


EUT Y_2TX
Setting 5
01-D-M-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.4562G	105.98	Inf	-Inf	75.11	3	Horizontal	278	1.30	-	27.64	3.23	-
AV	2.4566G	96.95	Inf	-Inf	66.08	3	Horizontal	278	1.30	-	27.64	3.23	-
PK	2.4982G	59.36	74.00	-14.64	28.22	3	Horizontal	278	1.30	-	27.89	3.25	-
AV	2.4918G	45.90	54.00	-8.10	14.80	3	Horizontal	278	1.30	-	27.85	3.25	-

802.11g_Nss1,(6Mbps)_2TX

31/08/2020

2462MHz_TX

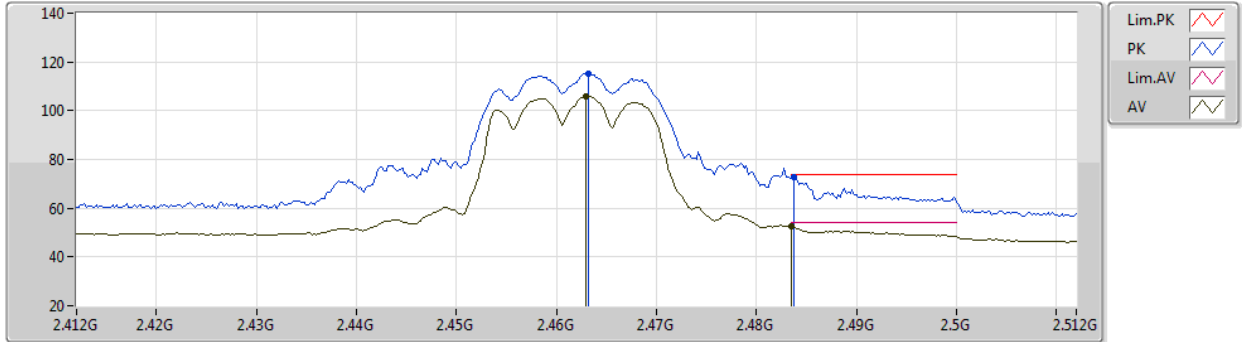


EUT Y_2TX
Setting 2
01-D-M-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.4632G	115.43	Inf	-Inf	84.52	3	Vertical	97	1.92	-	27.68	3.23	-
AV	2.463G	106.09	Inf	-Inf	75.18	3	Vertical	97	1.92	-	27.68	3.23	-
PK	2.4838G	72.77	74.00	-1.23	41.73	3	Vertical	97	1.92	-	27.80	3.24	-
AV	2.4835G	52.37	54.00	-1.63	21.33	3	Vertical	97	1.92	-	27.80	3.24	-

802.11g_Nss1,(6Mbps)_2TX

31/08/2020

2462MHz_TX

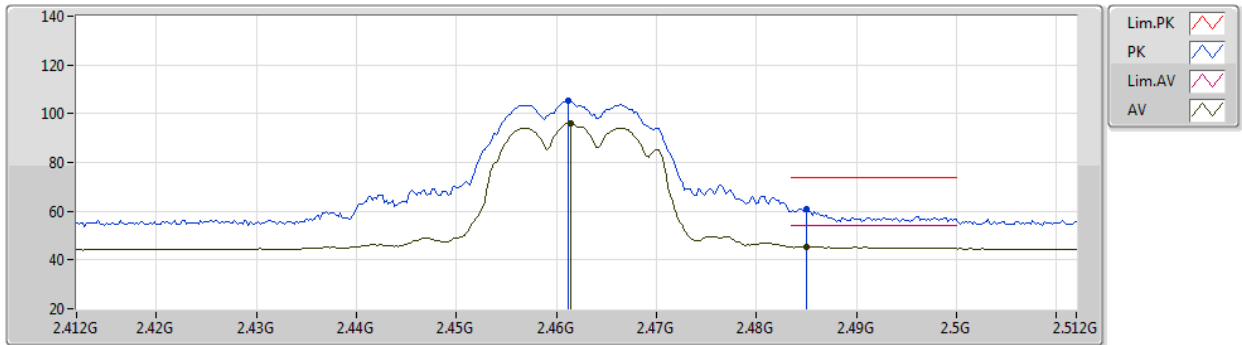

EUT Y_2TX
Setting 2
01-D-M-1


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.4612G	105.42	Inf	-Inf	74.52	3	Horizontal	278	1.91	-	27.67	3.23	-
AV	2.4614G	96.01	Inf	-Inf	65.11	3	Horizontal	278	1.91	-	27.67	3.23	-
PK	2.485G	60.94	74.00	-13.06	29.89	3	Horizontal	278	1.91	-	27.81	3.24	-
AV	2.485G	45.27	54.00	-8.73	14.22	3	Horizontal	278	1.91	-	27.81	3.24	-



802.11g_Nss1,(6Mbps)_2TX

31/08/2020

2462MHz_TX

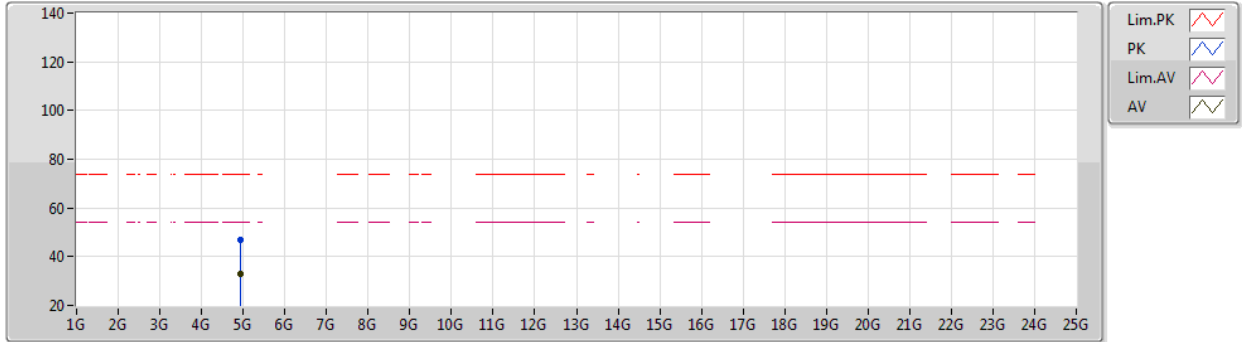

EUT Y_2TX
Setting 2
01-D-L-2


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.92944G	46.90	74.00	-27.10	43.06	3	Vertical	253	1.86	-	32.72	5.76	34.64
AV	4.93092G	33.15	54.00	-20.85	29.30	3	Vertical	253	1.86	-	32.72	5.77	34.64



802.11g_Nss1,(6Mbps)_2TX

31/08/2020

2462MHz_TX

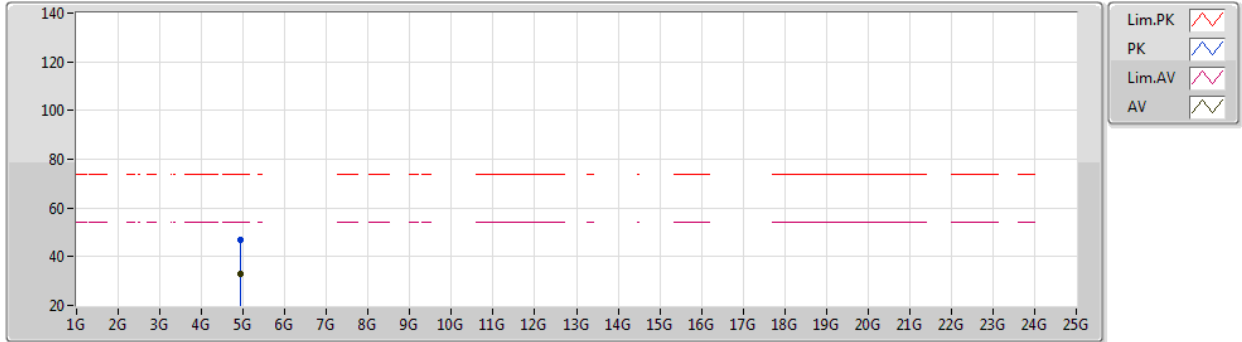


EUT Y_2TX
Setting 2
01-D-L-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.932G	46.93	74.00	-27.07	43.07	3	Horizontal	290	1.80	-	32.73	5.77	34.64
AV	4.93004G	33.14	54.00	-20.86	29.29	3	Horizontal	290	1.80	-	32.72	5.77	34.64

802.11n HT20_Nss1,(MCS0)_2TX

31/08/2020

2412MHz_TX

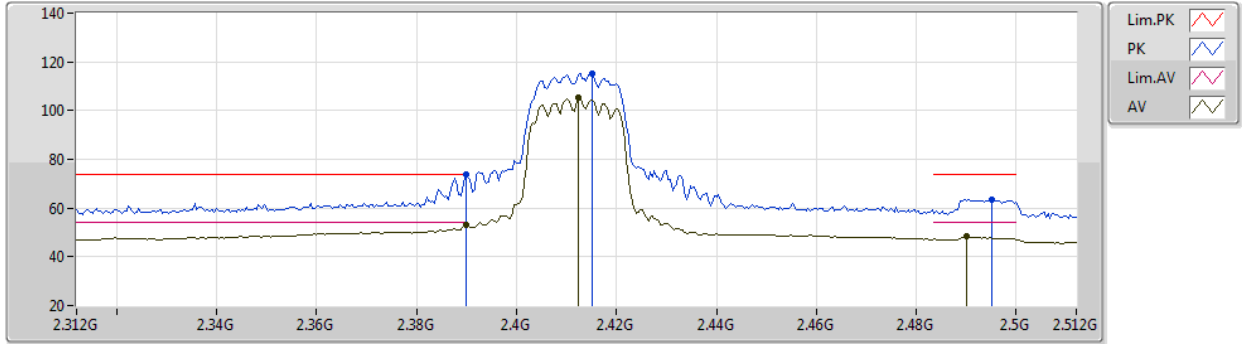


EUT Y_2TX
Setting 0
01-D-M-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.39G	73.96	74.00	-0.04	43.30	3	Vertical	95	1.80	-	27.46	3.20	-
AV	2.39G	52.97	54.00	-1.03	22.31	3	Vertical	95	1.80	-	27.46	3.20	-
PK	2.4152G	115.40	Inf	-Inf	84.66	3	Vertical	95	1.80	-	27.53	3.21	-
AV	2.4124G	105.50	Inf	-Inf	74.77	3	Vertical	95	1.80	-	27.52	3.21	-
PK	2.4952G	63.64	74.00	-10.36	32.52	3	Vertical	95	1.80	-	27.87	3.25	-
AV	2.49G	48.28	54.00	-5.72	17.19	3	Vertical	95	1.80	-	27.84	3.25	-

802.11n HT20_Nss1,(MCS0)_2TX

31/08/2020

2412MHz_TX

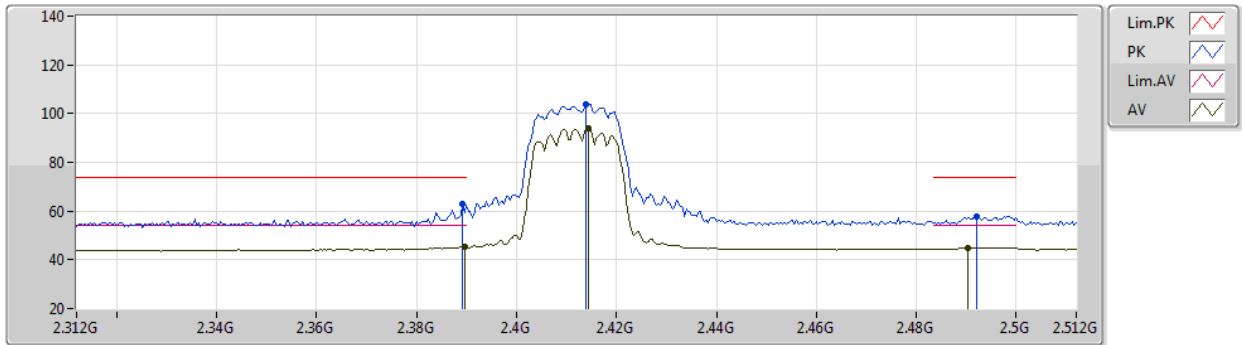


EUT Y_2TX
Setting 0
01-D-M-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3892G	62.68	74.00	-11.32	32.03	3	Horizontal	279	1.45	-	27.46	3.19	-
AV	2.3896G	45.27	54.00	-8.73	14.62	3	Horizontal	279	1.45	-	27.46	3.19	-
PK	2.414G	103.63	Inf	-Inf	72.89	3	Horizontal	279	1.45	-	27.53	3.21	-
AV	2.4144G	93.76	Inf	-Inf	63.02	3	Horizontal	279	1.45	-	27.53	3.21	-
PK	2.492G	57.77	74.00	-16.23	26.67	3	Horizontal	279	1.45	-	27.85	3.25	-
AV	2.4904G	44.88	54.00	-9.12	13.79	3	Horizontal	279	1.45	-	27.84	3.25	-

802.11n HT20_Nss1,(MCS0)_2TX

31/08/2020

2412MHz_TX

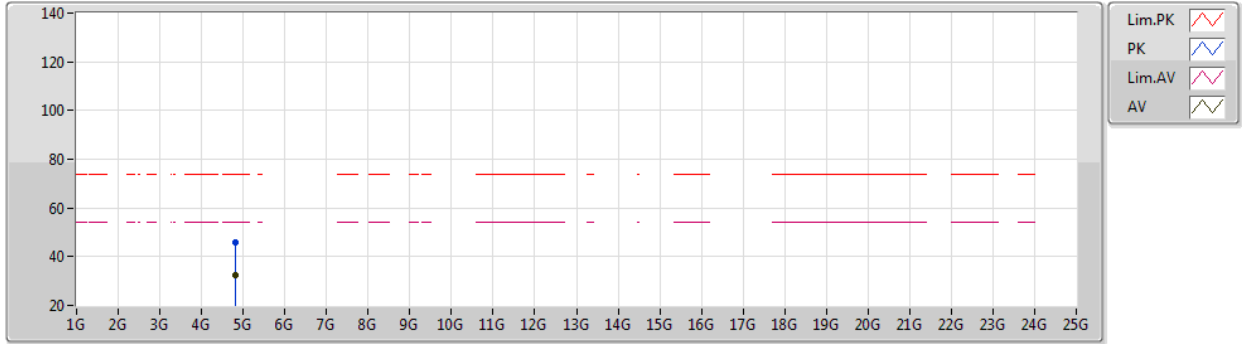

EUT Y_2TX
Setting 0
01-D-L-2


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.82165G	45.86	74.00	-28.14	42.44	3	Vertical	184	1.68	-	32.44	5.71	34.73
AV	4.82486G	32.29	54.00	-21.71	28.85	3	Vertical	184	1.68	-	32.45	5.71	34.72



802.11n HT20_Nss1,(MCS0)_2TX

31/08/2020

2412MHz_TX

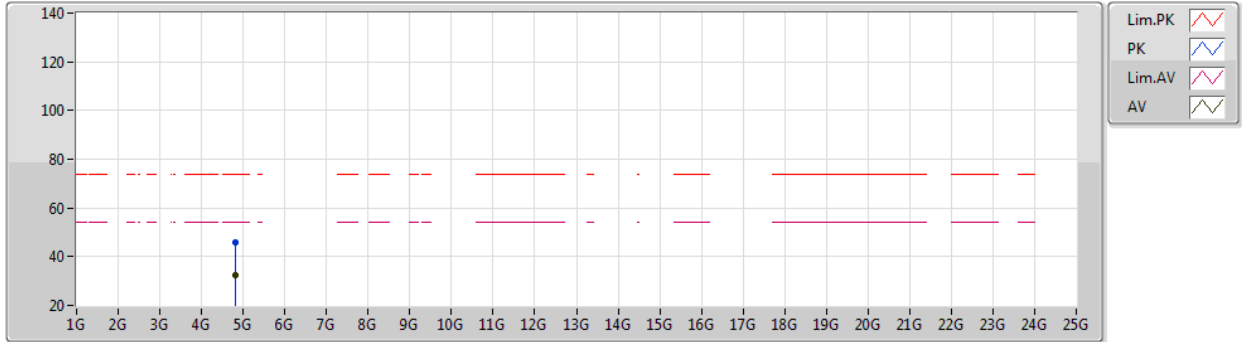


EUT Y_2TX
Setting 0
01-D-L-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.82407G	45.94	74.00	-28.06	42.50	3	Horizontal	173	2.34	-	32.45	5.71	34.72
AV	4.82262G	32.34	54.00	-21.66	28.91	3	Horizontal	173	2.34	-	32.45	5.71	34.73

802.11n HT20_Nss1,(MCS0)_2TX

31/08/2020

2417MHz_TX

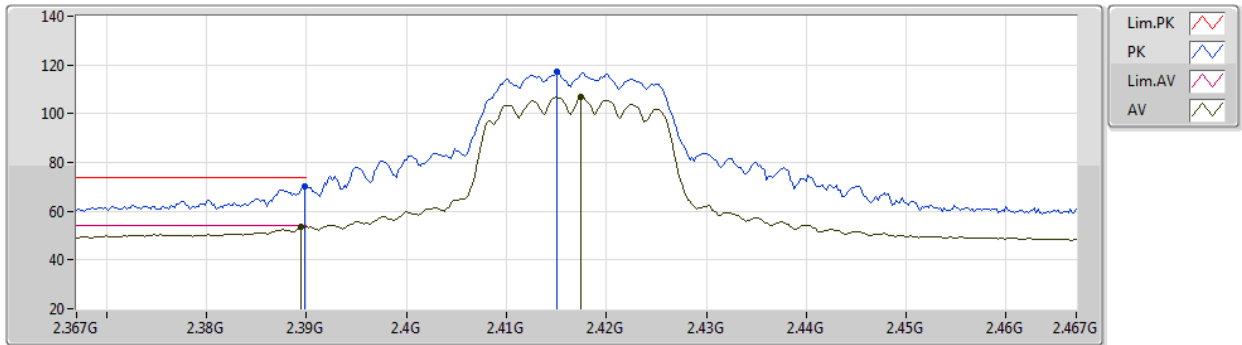


EUT Y_2TX
Setting 3
01-D-M-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3898G	70.08	74.00	-3.92	39.43	3	Vertical	95	1.78	-	27.46	3.19	-
AV	2.3894G	53.48	54.00	-0.52	22.83	3	Vertical	95	1.78	-	27.46	3.19	-
PK	2.415G	116.99	Inf	-Inf	86.25	3	Vertical	95	1.78	-	27.53	3.21	-
AV	2.4174G	107.01	Inf	-Inf	76.27	3	Vertical	95	1.78	-	27.53	3.21	-

802.11n HT20_Nss1,(MCS0)_2TX

31/08/2020

2417MHz_TX

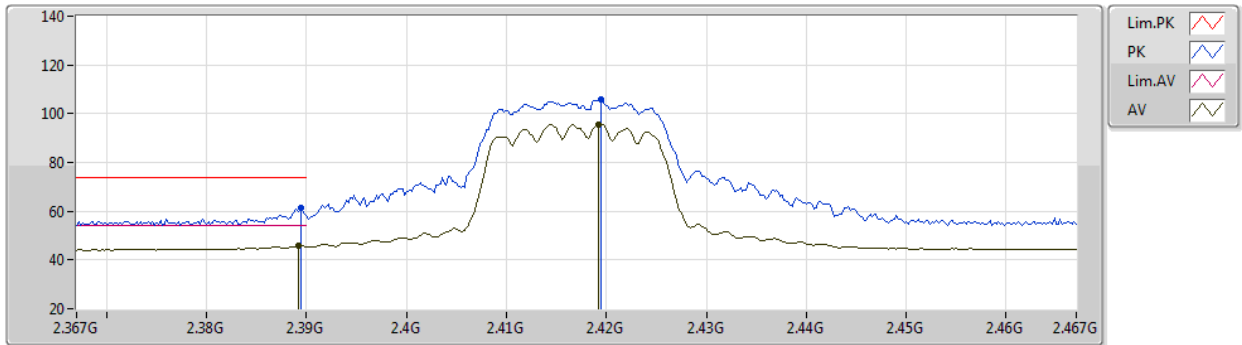


EUT Y_2TX
Setting 3
01-D-M-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3894G	61.42	74.00	-12.58	30.77	3	Horizontal	278	1.48	-	27.46	3.19	-
AV	2.3892G	45.78	54.00	-8.22	15.13	3	Horizontal	278	1.48	-	27.46	3.19	-
PK	2.4194G	105.84	Inf	-Inf	75.09	3	Horizontal	278	1.48	-	27.54	3.21	-
AV	2.4192G	95.65	Inf	-Inf	64.90	3	Horizontal	278	1.48	-	27.54	3.21	-

802.11n HT20_Nss1,(MCS0)_2TX

31/08/2020

2437MHz_TX

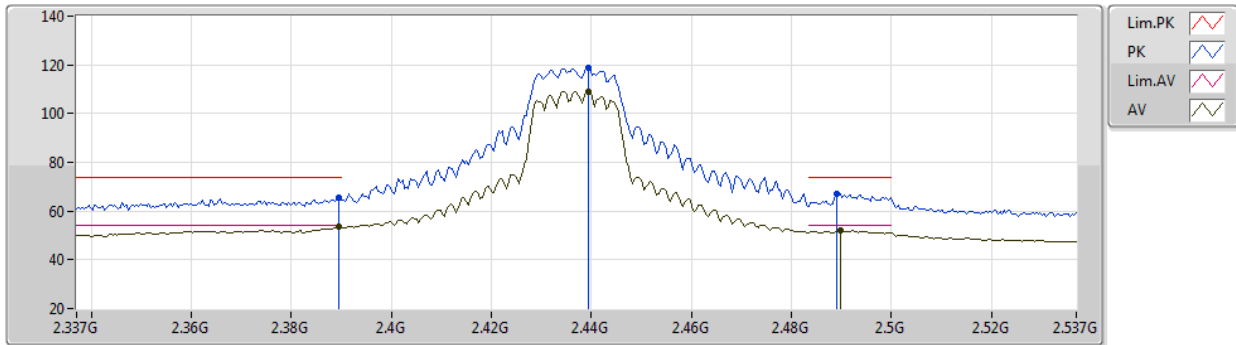


EUT Y_2TX
Setting 10
01-D-M-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3894G	65.31	74.00	-8.69	34.66	3	Vertical	270	2.18	-	27.46	3.19	-
AV	2.3894G	53.52	54.00	-0.48	22.87	3	Vertical	270	2.18	-	27.46	3.19	-
PK	2.4394G	119.02	Inf	-Inf	88.22	3	Vertical	270	2.18	-	27.58	3.22	-
AV	2.4394G	109.21	Inf	-Inf	78.41	3	Vertical	270	2.18	-	27.58	3.22	-
PK	2.489G	67.01	74.00	-6.99	35.94	3	Vertical	270	2.18	-	27.83	3.24	-
AV	2.4898G	52.07	54.00	-1.93	20.99	3	Vertical	270	2.18	-	27.84	3.24	-

802.11n HT20_Nss1,(MCS0)_2TX

31/08/2020

2437MHz_TX

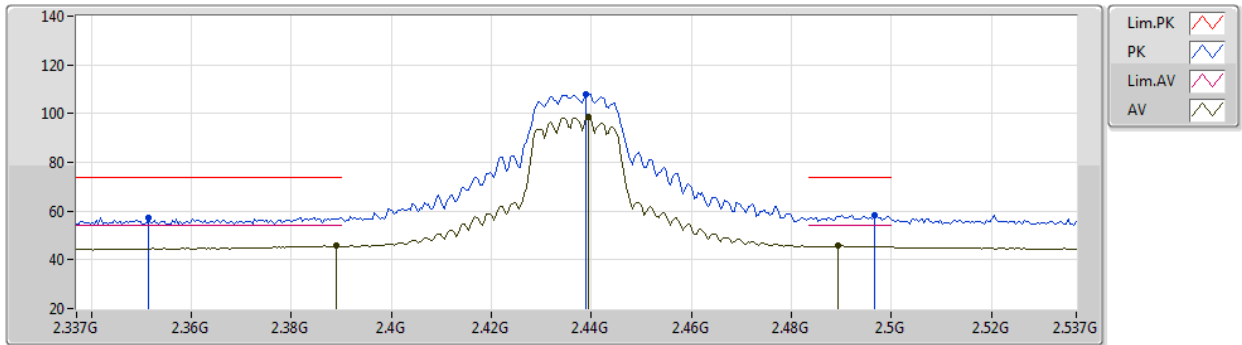


EUT Y_2TX
Setting 10
01-D-M-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3514G	57.30	74.00	-16.70	26.81	3	Horizontal	277	1.39	-	27.31	3.18	-
AV	2.389G	45.83	54.00	-8.17	15.18	3	Horizontal	277	1.39	-	27.46	3.19	-
PK	2.439G	108.18	Inf	-Inf	77.38	3	Horizontal	277	1.39	-	27.58	3.22	-
AV	2.4394G	98.54	Inf	-Inf	67.74	3	Horizontal	277	1.39	-	27.58	3.22	-
PK	2.4966G	58.51	74.00	-15.49	27.38	3	Horizontal	277	1.39	-	27.88	3.25	-
AV	2.4894G	45.81	54.00	-8.19	14.73	3	Horizontal	277	1.39	-	27.84	3.24	-

802.11n HT20_Nss1,(MCS0)_2TX

31/08/2020

2437MHz_TX

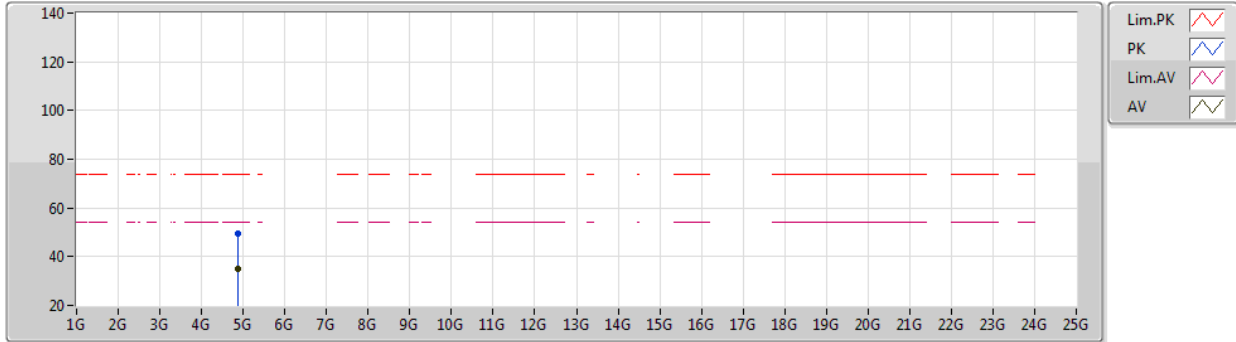


EUT Y_2TX
Setting 10
01-D-L-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.86924G	49.54	74.00	-24.46	45.96	3	Vertical	259	1.79	-	32.54	5.73	34.69
AV	4.87124G	34.81	54.00	-19.19	31.22	3	Vertical	259	1.79	-	32.54	5.74	34.69

802.11n HT20_Nss1,(MCS0)_2TX

31/08/2020

2437MHz_TX

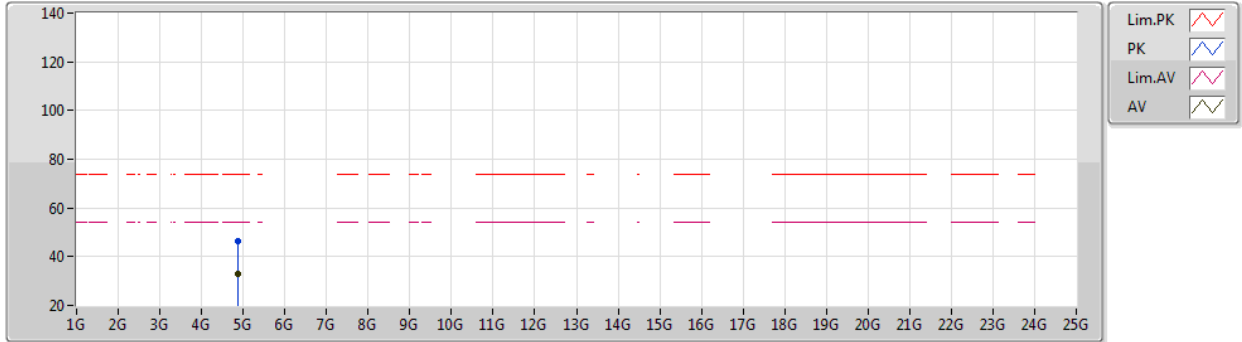


EUT Y_2TX
Setting 10
01-D-L-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.88228G	46.54	74.00	-27.46	42.92	3	Horizontal	198	1.00	-	32.56	5.74	34.68
AV	4.87412G	33.09	54.00	-20.91	29.48	3	Horizontal	198	1.00	-	32.55	5.74	34.68

802.11n HT20_Nss1,(MCS0)_2TX

31/08/2020

2457MHz_TX

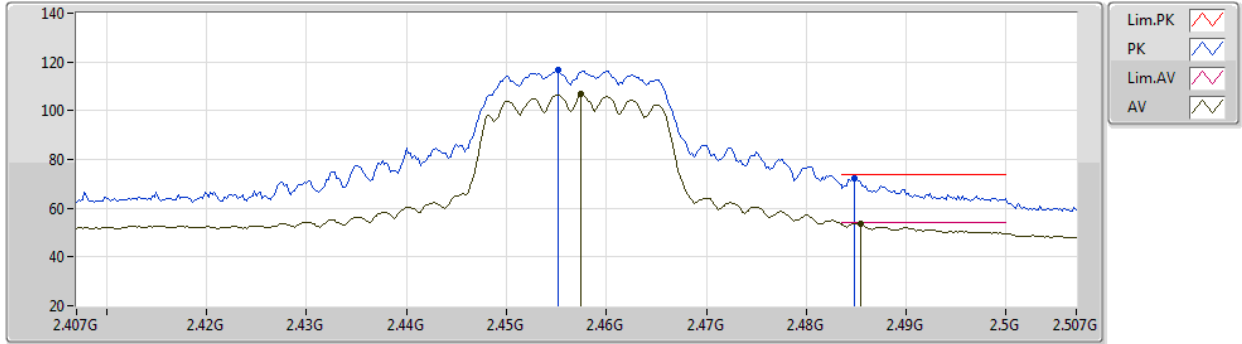


EUT Y_2TX
Setting 6
01-D-M-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.4552G	116.66	Inf	-Inf	85.80	3	Vertical	85	1.79	-	27.63	3.23	-
AV	2.4574G	106.82	Inf	-Inf	75.95	3	Vertical	85	1.79	-	27.64	3.23	-
PK	2.4848G	72.12	74.00	-1.88	41.07	3	Vertical	85	1.79	-	27.81	3.24	-
AV	2.4854G	53.75	54.00	-0.25	22.70	3	Vertical	85	1.79	-	27.81	3.24	-

802.11n HT20_Nss1,(MCS0)_2TX

31/08/2020

2457MHz_TX

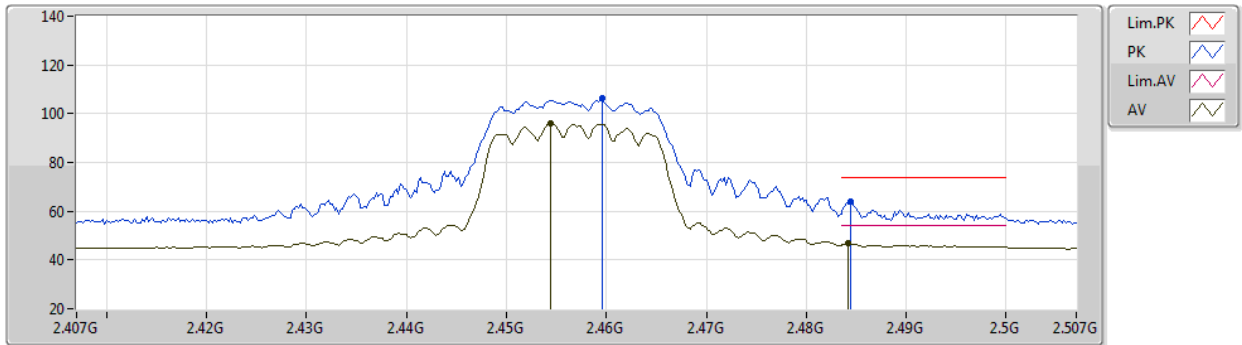


EUT Y_2TX
Setting 6
01-D-M-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.4596G	106.16	Inf	-Inf	75.27	3	Horizontal	276	1.33	-	27.66	3.23	-
AV	2.4544G	95.89	Inf	-Inf	65.03	3	Horizontal	276	1.33	-	27.63	3.23	-
PK	2.4844G	64.20	74.00	-9.80	33.15	3	Horizontal	276	1.33	-	27.81	3.24	-
AV	2.4842G	46.95	54.00	-7.05	15.90	3	Horizontal	276	1.33	-	27.81	3.24	-

802.11n HT20_Nss1,(MCS0)_2TX

31/08/2020

2462MHz_TX

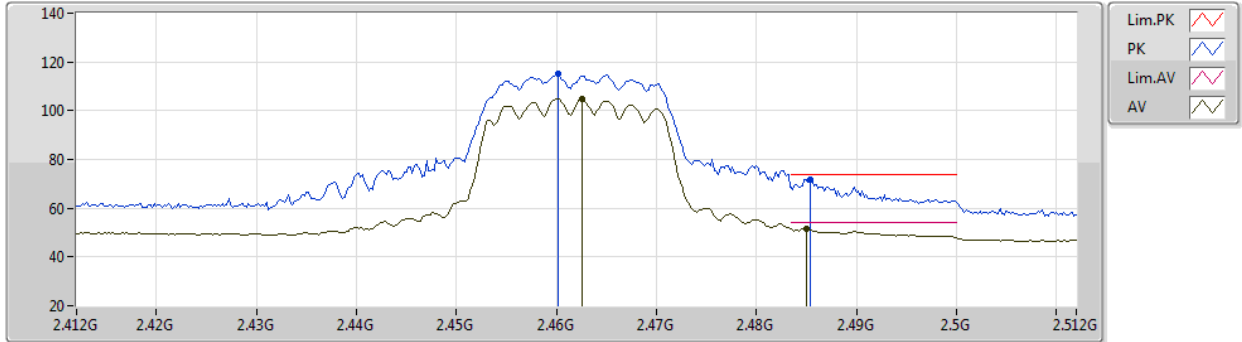


EUT Y_2TX
Setting 2
01-D-M-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.4602G	114.92	Inf	-Inf	84.03	3	Vertical	83	1.80	-	27.66	3.23	-
AV	2.4626G	104.88	Inf	-Inf	73.97	3	Vertical	83	1.80	-	27.68	3.23	-
PK	2.4854G	71.71	74.00	-2.29	40.66	3	Vertical	83	1.80	-	27.81	3.24	-
AV	2.485G	51.50	54.00	-2.50	20.45	3	Vertical	83	1.80	-	27.81	3.24	-

802.11n HT20_Nss1,(MCS0)_2TX

31/08/2020

2462MHz_TX

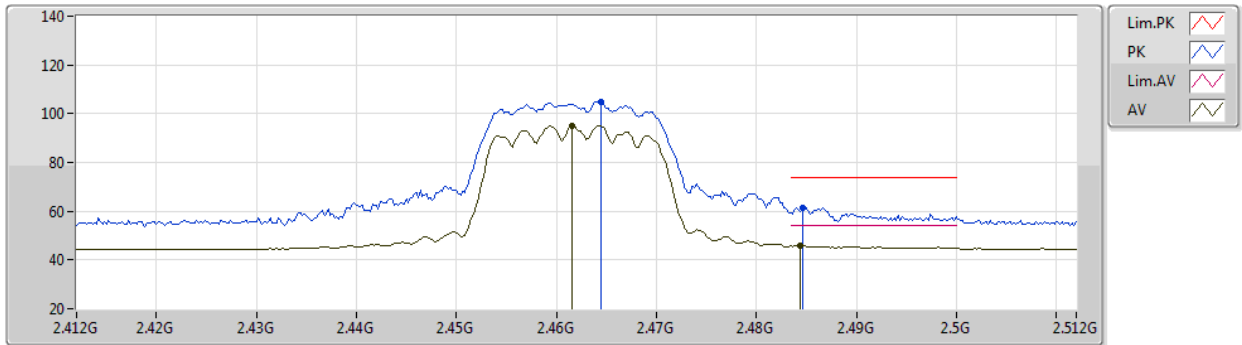


EUT Y_2TX
Setting 2
01-D-M-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.4644G	105.03	Inf	-Inf	74.11	3	Horizontal	277	1.91	-	27.69	3.23	-
AV	2.4616G	94.95	Inf	-Inf	64.05	3	Horizontal	277	1.91	-	27.67	3.23	-
PK	2.4846G	61.54	74.00	-12.46	30.49	3	Horizontal	277	1.91	-	27.81	3.24	-
AV	2.4844G	45.94	54.00	-8.06	14.89	3	Horizontal	277	1.91	-	27.81	3.24	-

802.11n HT20_Nss1,(MCS0)_2TX

31/08/2020

2462MHz_TX

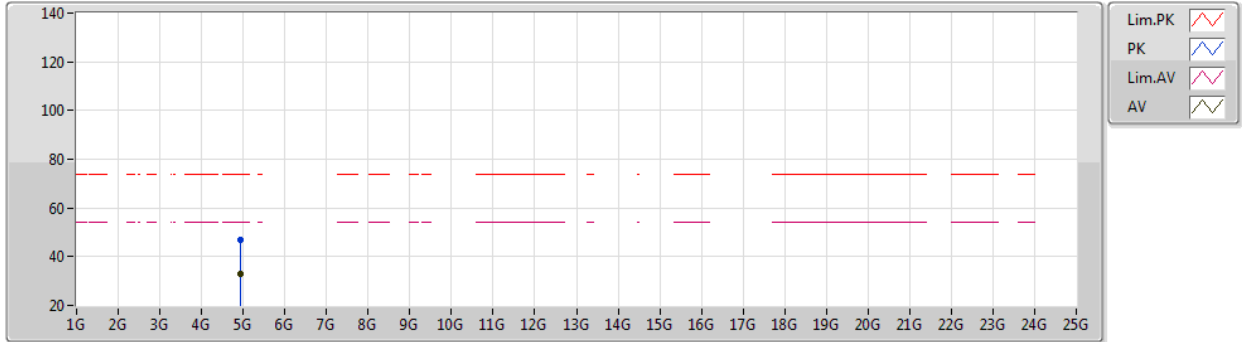

EUT Y_2TX
Setting 2
01-D-L-2


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.92366G	47.01	74.00	-26.99	43.20	3	Vertical	327	2.27	-	32.69	5.76	34.64
AV	4.92508G	33.01	54.00	-20.99	29.19	3	Vertical	327	2.27	-	32.70	5.76	34.64



802.11n HT20_Nss1,(MCS0)_2TX

31/08/2020

2462MHz_TX

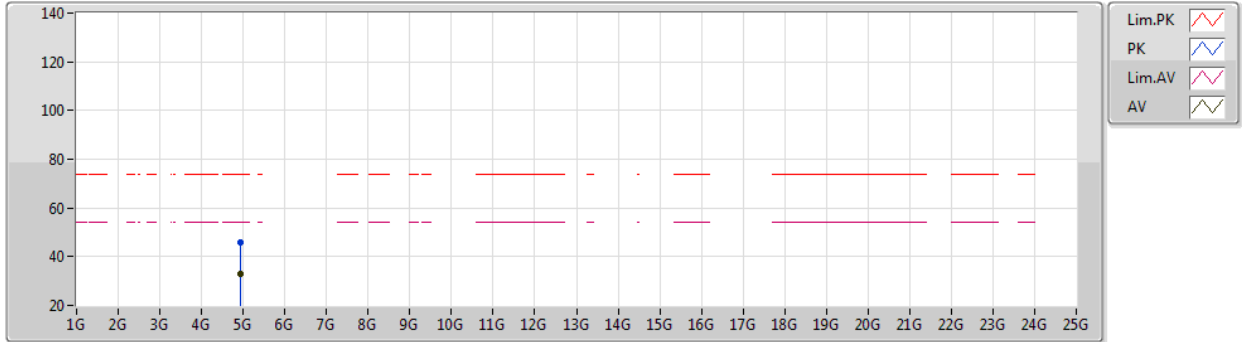


EUT Y_2TX
Setting 2
01-D-L-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.92366G	46.12	74.00	-27.88	42.31	3	Horizontal	180	2.23	-	32.69	5.76	34.64
AV	4.92494G	32.92	54.00	-21.08	29.10	3	Horizontal	180	2.23	-	32.70	5.76	34.64

802.11n HT40_Nss1,(MCS0)_2TX

31/08/2020

2422MHz_TX

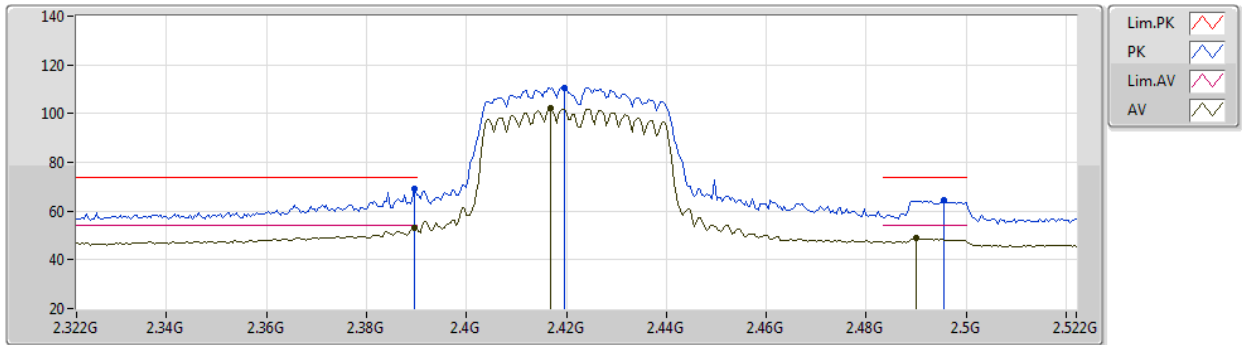


EUT Y_2TX
Setting 0
01-D-M-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3896G	69.03	74.00	-4.97	38.38	3	Vertical	275	1.80	-	27.46	3.19	-
AV	2.3896G	53.34	54.00	-0.66	22.69	3	Vertical	275	1.80	-	27.46	3.19	-
PK	2.4196G	110.76	Inf	-Inf	80.01	3	Vertical	275	1.80	-	27.54	3.21	-
AV	2.4168G	102.12	Inf	-Inf	71.38	3	Vertical	275	1.80	-	27.53	3.21	-
PK	2.4956G	64.31	74.00	-9.69	33.19	3	Vertical	275	1.80	-	27.87	3.25	-
AV	2.49G	48.82	54.00	-5.18	17.73	3	Vertical	275	1.80	-	27.84	3.25	-

802.11n HT40_Nss1,(MCS0)_2TX

31/08/2020

2422MHz_TX

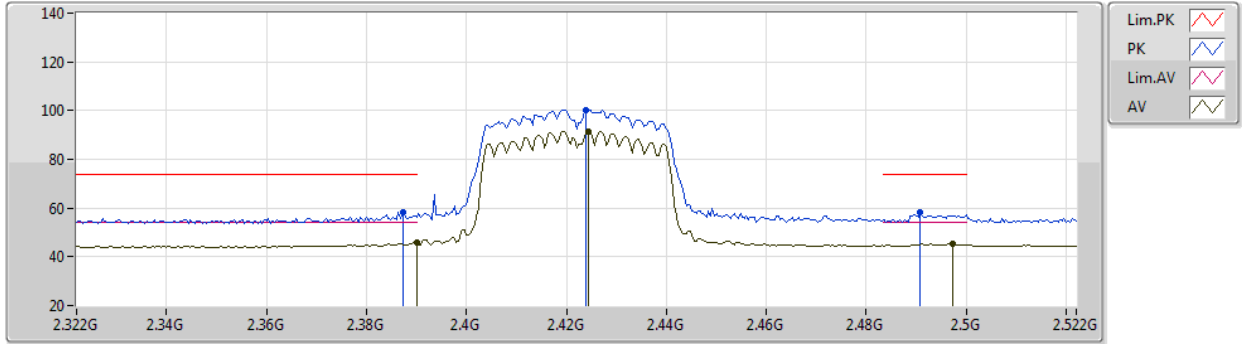

EUT Y_2TX
Setting 0
01-D-M-1


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3872G	58.46	74.00	-15.54	27.82	3	Horizontal	278	1.51	-	27.45	3.19	-
AV	2.39G	45.82	54.00	-8.18	15.16	3	Horizontal	278	1.51	-	27.46	3.20	-
PK	2.424G	100.39	Inf	-Inf	69.63	3	Horizontal	278	1.51	-	27.55	3.21	-
AV	2.4244G	91.51	Inf	-Inf	60.75	3	Horizontal	278	1.51	-	27.55	3.21	-
PK	2.4908G	58.02	74.00	-15.98	26.93	3	Horizontal	278	1.51	-	27.84	3.25	-
AV	2.4972G	45.16	54.00	-8.84	14.03	3	Horizontal	278	1.51	-	27.88	3.25	-



802.11n HT40_Nss1,(MCS0)_2TX

31/08/2020

2422MHz_TX

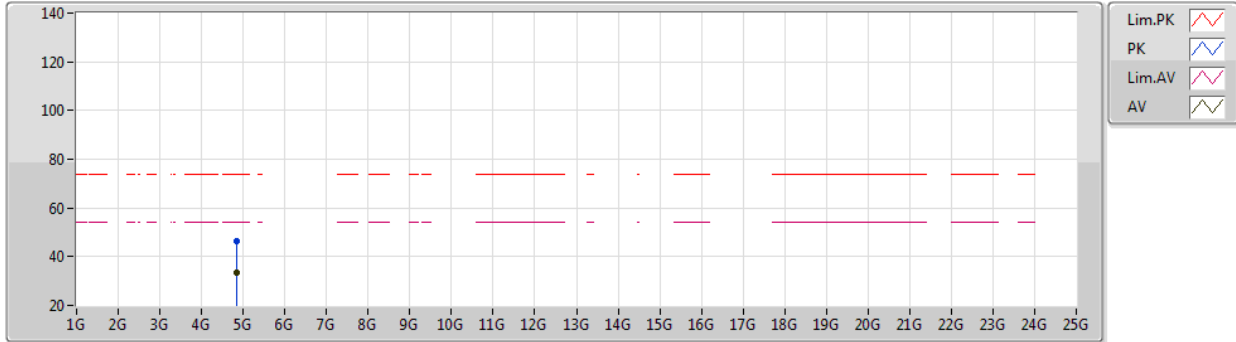

EUT Y_2TX
Setting 0
01-D-L-2


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.84534G	46.26	74.00	-27.74	42.76	3	Vertical	23	1.71	-	32.49	5.72	34.71
AV	4.84499G	33.54	54.00	-20.46	30.04	3	Vertical	23	1.71	-	32.49	5.72	34.71



802.11n HT40_Nss1,(MCS0)_2TX

31/08/2020

2422MHz_TX

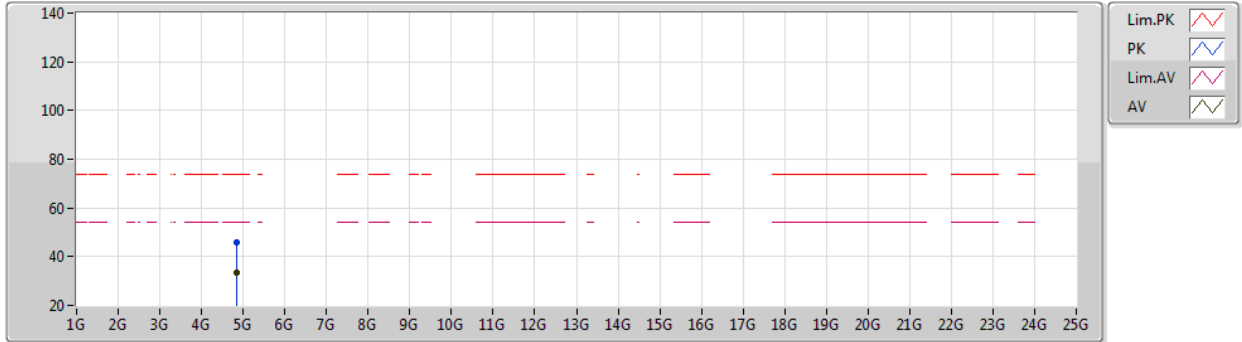


EUT Y_2TX
Setting 0
01-D-L-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.84332G	46.12	74.00	-27.88	42.62	3	Horizontal	246	1.59	-	32.49	5.72	34.71
AV	4.84576G	33.68	54.00	-20.32	30.18	3	Horizontal	246	1.59	-	32.49	5.72	34.71

802.11n HT40_Nss1,(MCS0)_2TX

31/08/2020

2427MHz_TX

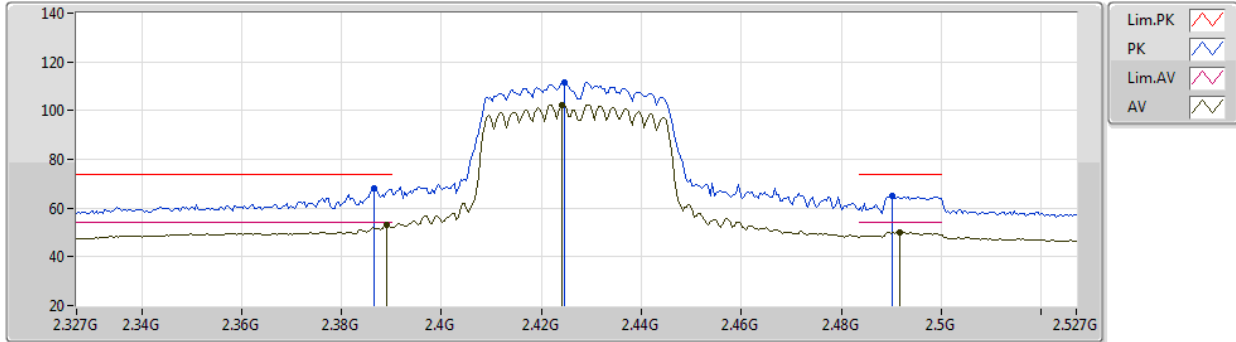


EUT Y_2TX
Setting 1
01-D-L-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3866G	67.87	74.00	-6.13	37.23	3	Vertical	269	2.15	-	27.45	3.19	-
AV	2.389G	53.33	54.00	-0.67	22.68	3	Vertical	269	2.15	-	27.46	3.19	-
PK	2.4246G	111.45	Inf	-Inf	80.69	3	Vertical	269	2.15	-	27.55	3.21	-
AV	2.4242G	102.50	Inf	-Inf	71.74	3	Vertical	269	2.15	-	27.55	3.21	-
PK	2.4902G	64.77	74.00	-9.23	33.68	3	Vertical	269	2.15	-	27.84	3.25	-
AV	2.4918G	49.96	54.00	-4.04	18.86	3	Vertical	269	2.15	-	27.85	3.25	-

802.11n HT40_Nss1,(MCS0)_2TX

31/08/2020

2427MHz_TX

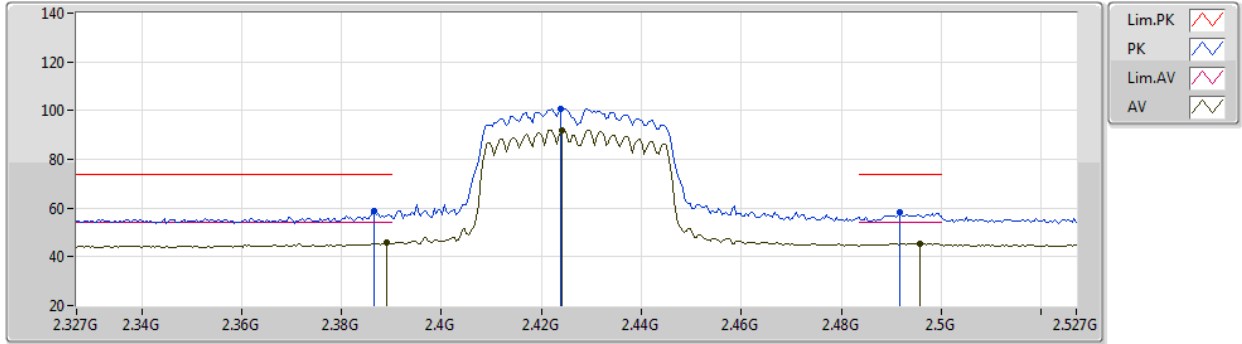


EUT Y_2TX
Setting 1
01-D-L-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3866G	58.95	74.00	-15.05	28.31	3	Horizontal	278	1.49	-	27.45	3.19	-
AV	2.389G	45.82	54.00	-8.18	15.17	3	Horizontal	278	1.49	-	27.46	3.19	-
PK	2.4238G	100.90	Inf	-Inf	70.14	3	Horizontal	278	1.49	-	27.55	3.21	-
AV	2.4242G	92.13	Inf	-Inf	61.37	3	Horizontal	278	1.49	-	27.55	3.21	-
PK	2.4918G	58.06	74.00	-15.94	26.96	3	Horizontal	278	1.49	-	27.85	3.25	-
AV	2.4958G	45.46	54.00	-8.54	14.34	3	Horizontal	278	1.49	-	27.87	3.25	-

802.11n HT40_Nss1,(MCS0)_2TX

31/08/2020

2437MHz_TX

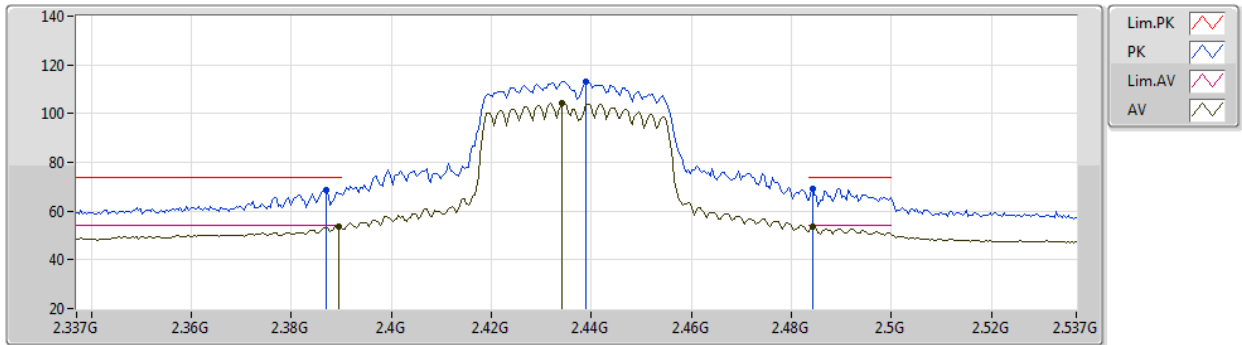


EUT Y_2TX
Setting 5
01-D-M-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.387G	68.40	74.00	-5.60	37.76	3	Vertical	263	2.23	-	27.45	3.19	-
AV	2.3894G	53.81	54.00	-0.19	23.16	3	Vertical	263	2.23	-	27.46	3.19	-
PK	2.439G	113.04	Inf	-Inf	82.24	3	Vertical	263	2.23	-	27.58	3.22	-
AV	2.4342G	104.09	Inf	-Inf	73.30	3	Vertical	263	2.23	-	27.57	3.22	-
PK	2.4842G	69.20	74.00	-4.80	38.15	3	Vertical	263	2.23	-	27.81	3.24	-
AV	2.4842G	53.37	54.00	-0.63	22.32	3	Vertical	263	2.23	-	27.81	3.24	-

802.11n HT40_Nss1,(MCS0)_2TX

31/08/2020

2437MHz_TX

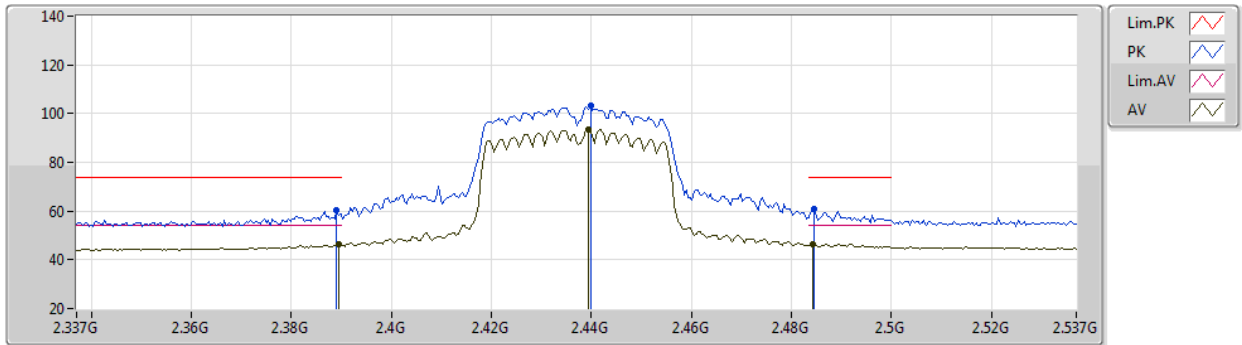


EUT Y_2TX
Setting 5
01-D-M-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.389G	60.11	74.00	-13.89	29.46	3	Horizontal	282	1.38	-	27.46	3.19	-
AV	2.3894G	46.46	54.00	-7.54	15.81	3	Horizontal	282	1.38	-	27.46	3.19	-
PK	2.4398G	103.15	Inf	-Inf	72.35	3	Horizontal	282	1.38	-	27.58	3.22	-
AV	2.4394G	93.59	Inf	-Inf	62.79	3	Horizontal	282	1.38	-	27.58	3.22	-
PK	2.4846G	60.93	74.00	-13.07	29.88	3	Horizontal	282	1.38	-	27.81	3.24	-
AV	2.4842G	46.52	54.00	-7.48	15.47	3	Horizontal	282	1.38	-	27.81	3.24	-

802.11n HT40_Nss1,(MCS0)_2TX

31/08/2020

2437MHz_TX

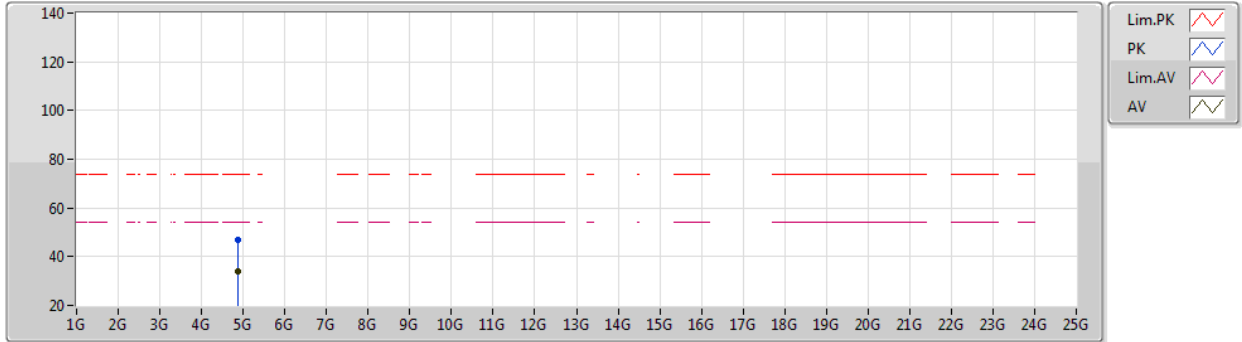


EUT Y_2TX
Setting 5
01-D-L-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.87501G	46.68	74.00	-27.32	43.07	3	Vertical	333	1.89	-	32.55	5.74	34.68
AV	4.8718G	33.90	54.00	-20.10	30.31	3	Vertical	333	1.89	-	32.54	5.74	34.69

802.11n HT40_Nss1,(MCS0)_2TX

31/08/2020

2437MHz_TX

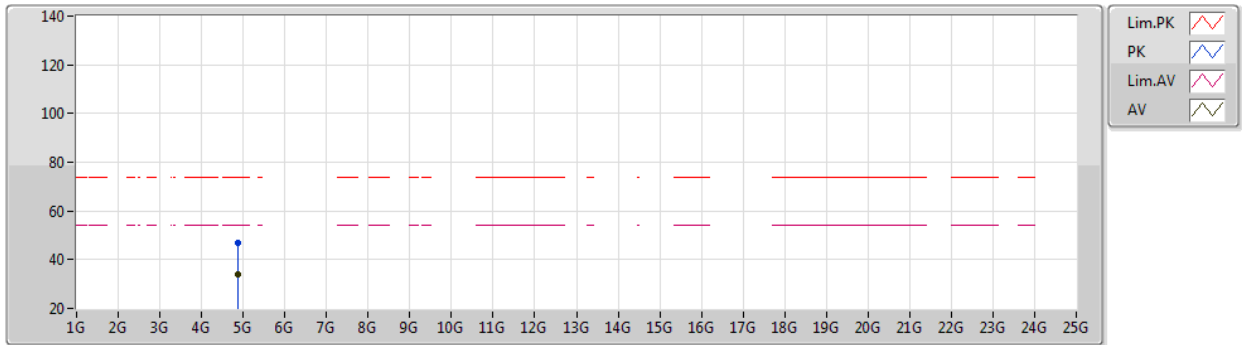


EUT Y_2TX
Setting 5
01-D-L-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.87355G	46.65	74.00	-27.35	43.04	3	Horizontal	257	1.87	-	32.55	5.74	34.68
AV	4.87395G	34.04	54.00	-19.96	30.43	3	Horizontal	257	1.87	-	32.55	5.74	34.68

802.11n HT40_Nss1,(MCS0)_2TX

31/08/2020

2447MHz_TX

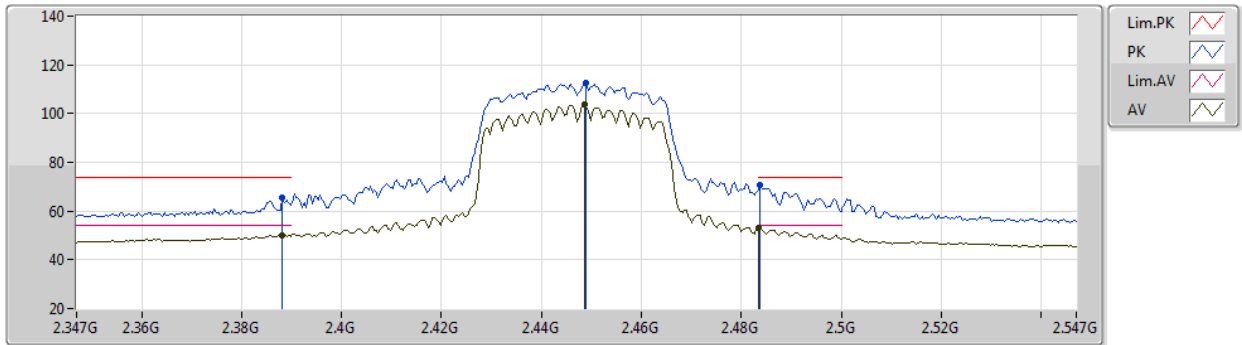


EUT Y_2TX
Setting 4
01-D-L-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3882G	65.37	74.00	-8.63	34.73	3	Vertical	146	1.79	-	27.45	3.19	-
AV	2.3882G	50.16	54.00	-3.84	19.52	3	Vertical	146	1.79	-	27.45	3.19	-
PK	2.449G	112.55	Inf	-Inf	81.73	3	Vertical	146	1.79	-	27.60	3.22	-
AV	2.4486G	103.76	Inf	-Inf	72.94	3	Vertical	146	1.79	-	27.60	3.22	-
PK	2.4838G	70.44	74.00	-3.56	39.40	3	Vertical	146	1.79	-	27.80	3.24	-
AV	2.4835G	53.14	54.00	-0.86	22.10	3	Vertical	146	1.79	-	27.80	3.24	-

802.11n HT40_Nss1,(MCS0)_2TX

31/08/2020

2447MHz_TX

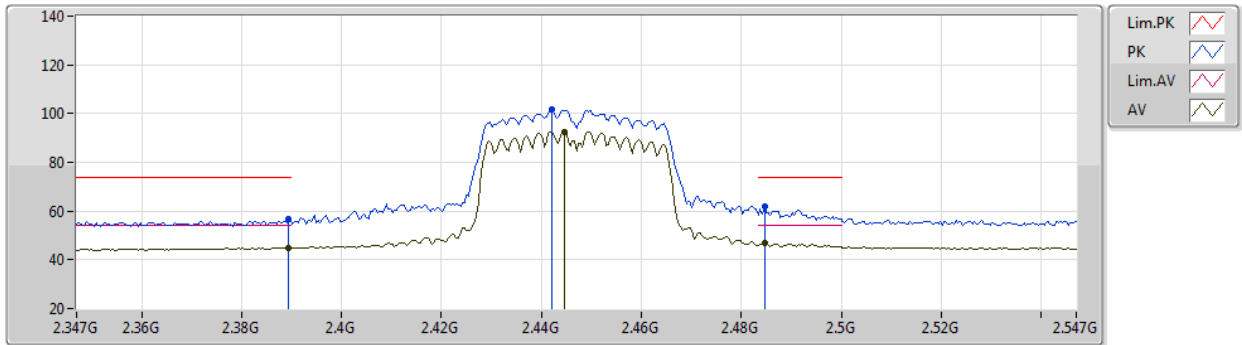


EUT Y_2TX
Setting 4
01-D-L-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3894G	56.77	74.00	-17.23	26.12	3	Horizontal	276	1.80	-	27.46	3.19	-
AV	2.3894G	45.06	54.00	-8.94	14.41	3	Horizontal	276	1.80	-	27.46	3.19	-
PK	2.4422G	101.48	Inf	-Inf	70.68	3	Horizontal	276	1.80	-	27.58	3.22	-
AV	2.4446G	92.54	Inf	-Inf	61.73	3	Horizontal	276	1.80	-	27.59	3.22	-
PK	2.4846G	61.70	74.00	-12.30	30.65	3	Horizontal	276	1.80	-	27.81	3.24	-
AV	2.4846G	46.69	54.00	-7.31	15.64	3	Horizontal	276	1.80	-	27.81	3.24	-

802.11n HT40_Nss1,(MCS0)_2TX

31/08/2020

2452MHz_TX

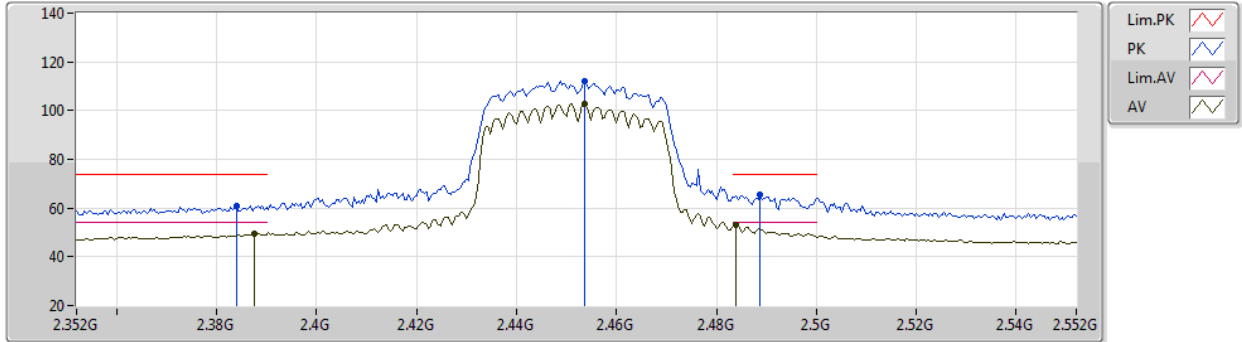


EUT Y_2TX
Setting 2
01-D-L-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.384G	60.98	74.00	-13.02	30.35	3	Vertical	148	1.80	-	27.44	3.19	-
AV	2.3876G	49.55	54.00	-4.45	18.91	3	Vertical	148	1.80	-	27.45	3.19	-
PK	2.4536G	112.25	Inf	-Inf	81.40	3	Vertical	148	1.80	-	27.62	3.23	-
AV	2.4536G	102.87	Inf	-Inf	72.02	3	Vertical	148	1.80	-	27.62	3.23	-
PK	2.4888G	65.47	74.00	-8.53	34.40	3	Vertical	148	1.80	-	27.83	3.24	-
AV	2.484G	53.29	54.00	-0.71	22.25	3	Vertical	148	1.80	-	27.80	3.24	-

802.11n HT40_Nss1,(MCS0)_2TX

31/08/2020

2452MHz_TX

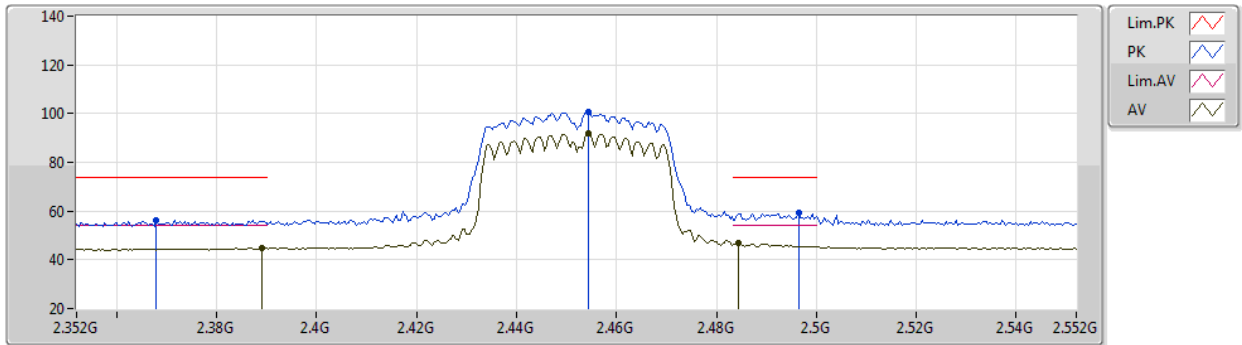

EUT Y_2TX
Setting 2
01-D-L-2


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.368G	56.11	74.00	-17.89	25.56	3	Horizontal	277	1.31	-	27.37	3.18	-
AV	2.3892G	44.77	54.00	-9.23	14.12	3	Horizontal	277	1.31	-	27.46	3.19	-
PK	2.4544G	100.88	Inf	-Inf	70.02	3	Horizontal	277	1.31	-	27.63	3.23	-
AV	2.4544G	91.72	Inf	-Inf	60.86	3	Horizontal	277	1.31	-	27.63	3.23	-
PK	2.4964G	59.28	74.00	-14.72	28.15	3	Horizontal	277	1.31	-	27.88	3.25	-
AV	2.4844G	46.97	54.00	-7.03	15.92	3	Horizontal	277	1.31	-	27.81	3.24	-



802.11n HT40_Nss1,(MCS0)_2TX

31/08/2020

2452MHz_TX

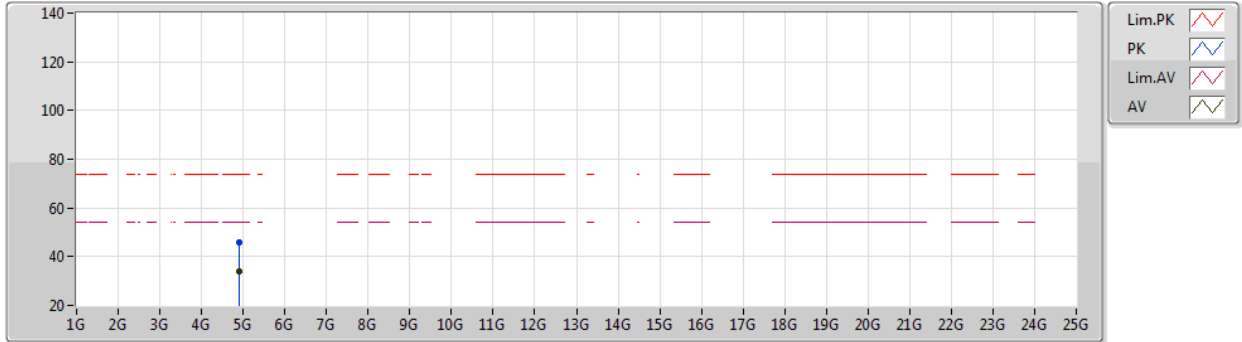

EUT Y_2TX
Setting 2
01-D-L-2


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.90318G	46.03	74.00	-27.97	42.33	3	Vertical	146	2.14	-	32.61	5.75	34.66
AV	4.90376G	33.94	54.00	-20.06	30.23	3	Vertical	146	2.14	-	32.62	5.75	34.66



802.11n HT40_Nss1,(MCS0)_2TX

31/08/2020

2452MHz_TX

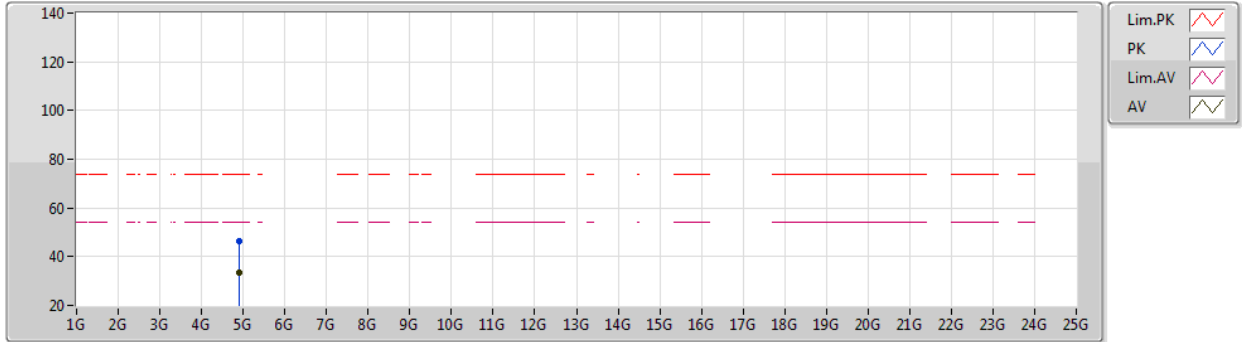

EUT Y_2TX
Setting 2
01-D-L-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.90279G	46.47	74.00	-27.53	42.77	3	Horizontal	343	2.18	-	32.61	5.75	34.66
AV	4.90211G	33.69	54.00	-20.31	29.99	3	Horizontal	343	2.18	-	32.61	5.75	34.66




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	AV	2.89116G	39.65	54.00	-14.35	Vertical



10/09/2020

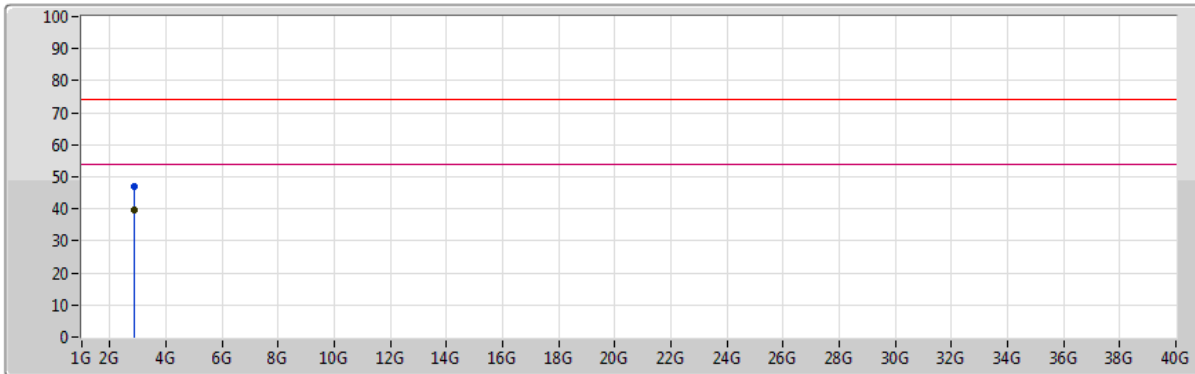


Legend for the graph:

- Lim.PK (Red line)
- PK (Blue line)
- Lim.AV (Magenta line)
- AV (Green line)

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	2.89128G	47.10	74.00	-26.90	-3.36	3	Vertical	213	1.00	-	50.46	28.37	4.59	36.32
AV	2.89116G	39.65	54.00	-14.35	-3.37	3	Vertical	213	1.00	"Worst"	43.02	28.36	4.59	36.32



10/09/2020

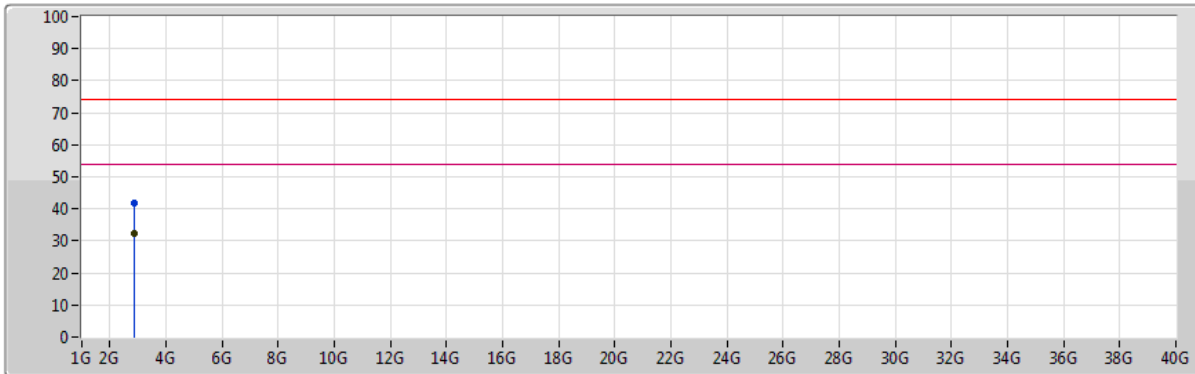

Legend:

- Lim.PK
- PK
- Lim.AV
- AV

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	2.89088G	41.94	74.00	-32.06	-3.37	3	Horizontal	138	1.00	-	45.31	28.36	4.59	36.32
AV	2.88942G	32.36	54.00	-21.64	-3.37	3	Horizontal	138	1.00	"Worst"	35.73	28.36	4.59	36.32