




PSD 802.11n(HT20) 2422MHz Ant1

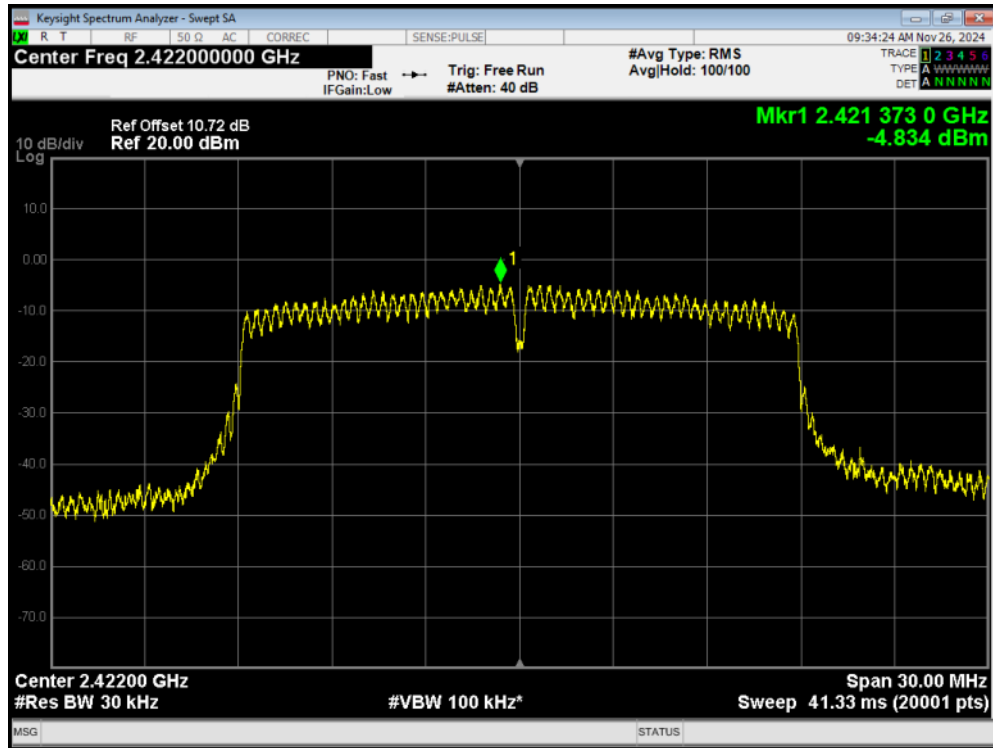


PSD 802.11n(HT20) 2422MHz Ant2

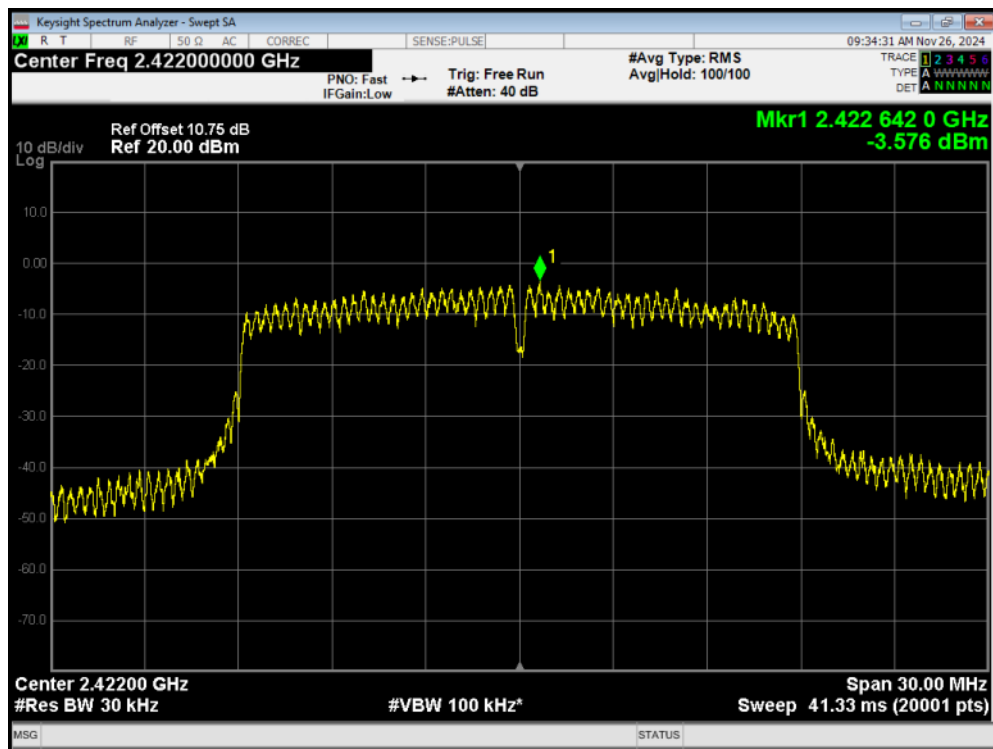


PSD 802.11n(HT20) 2427MHz Ant1

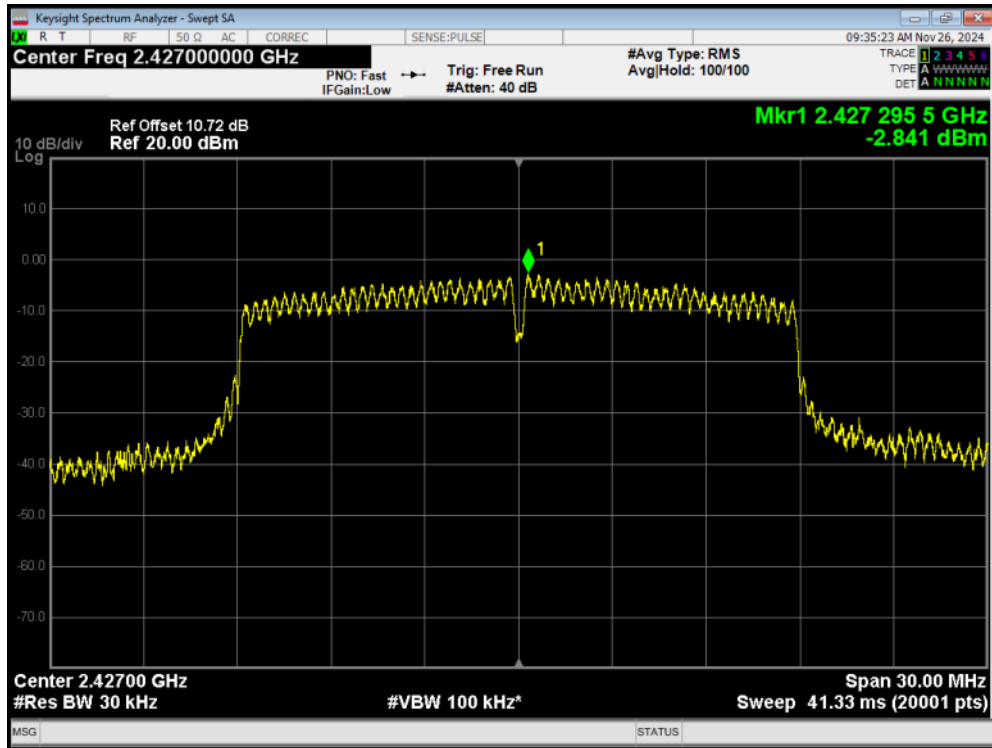


PSD 802.11n(HT20) 2427MHz Ant2

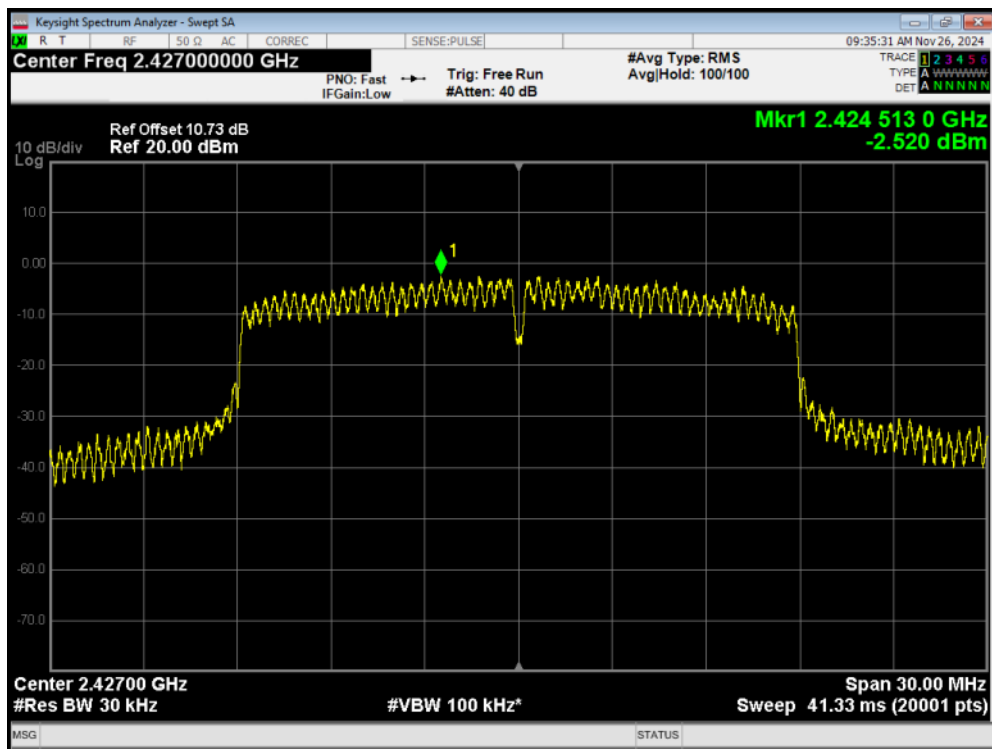


PSD 802.11n(HT20) 2432MHz Ant1

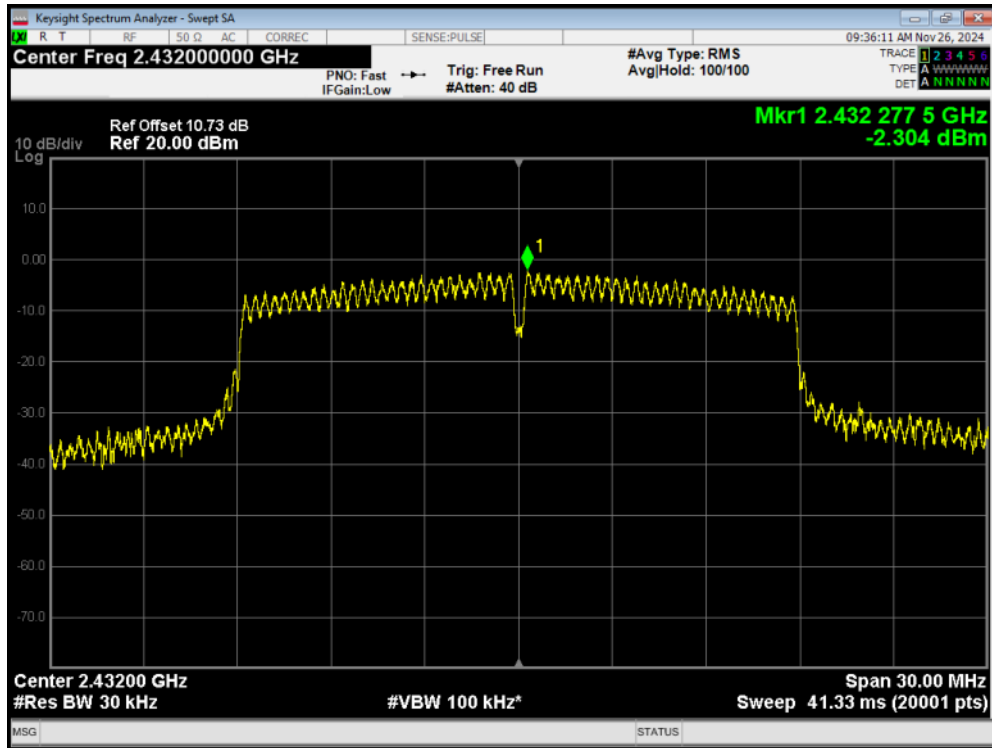


PSD 802.11n(HT20) 2432MHz Ant2

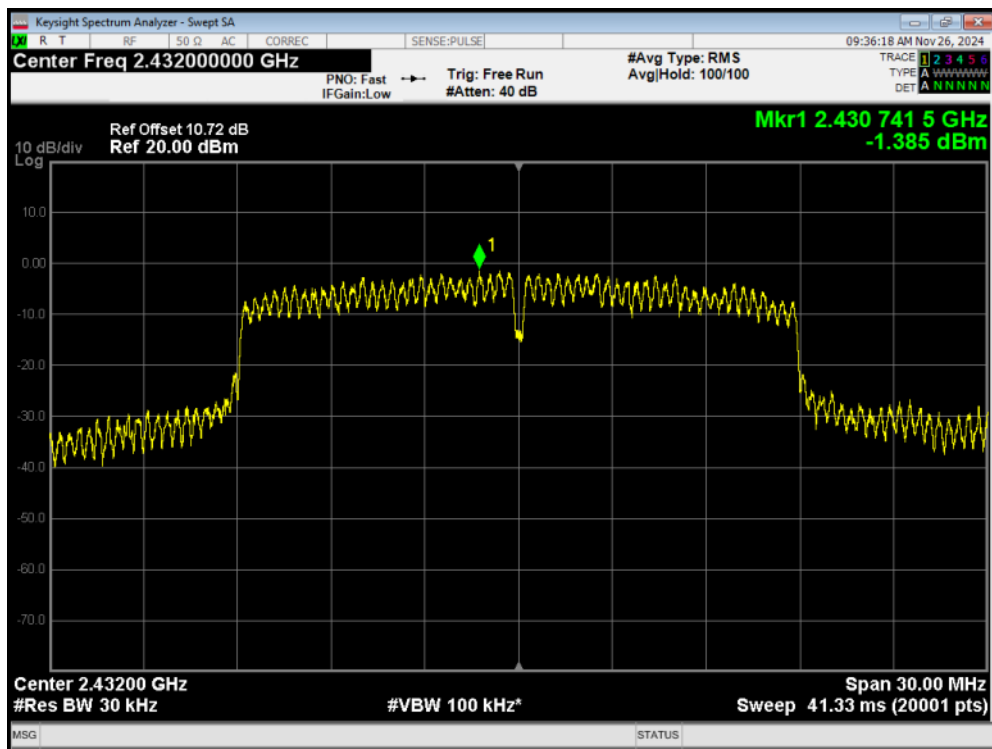


PSD 802.11n(HT20) 2437MHz Ant1

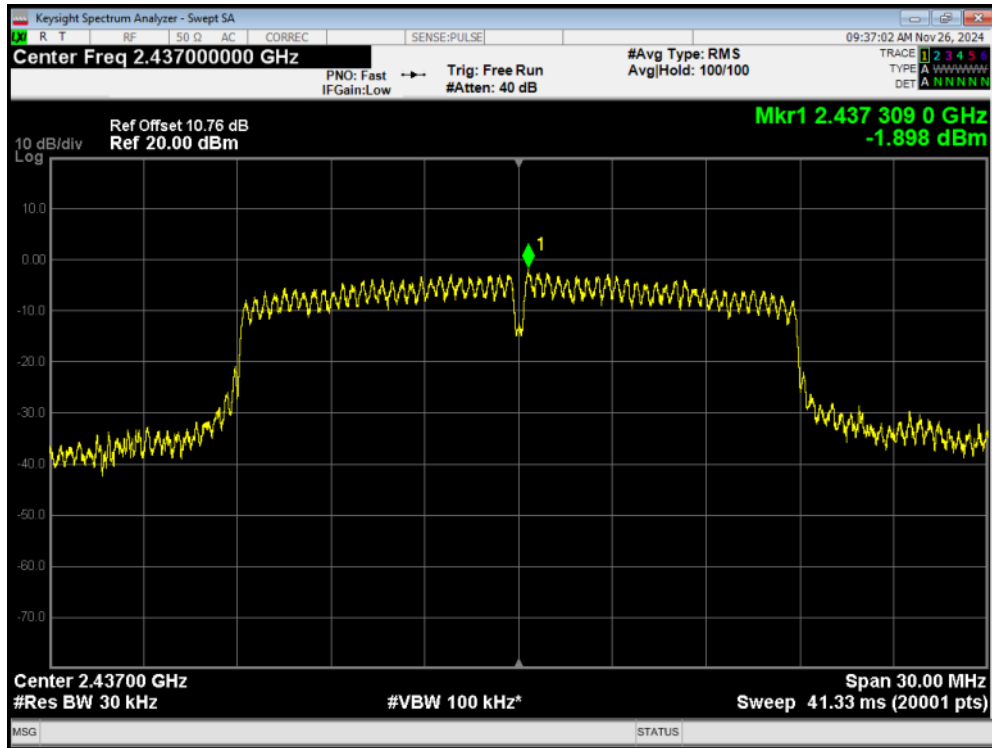


PSD 802.11n(HT20) 2437MHz Ant2

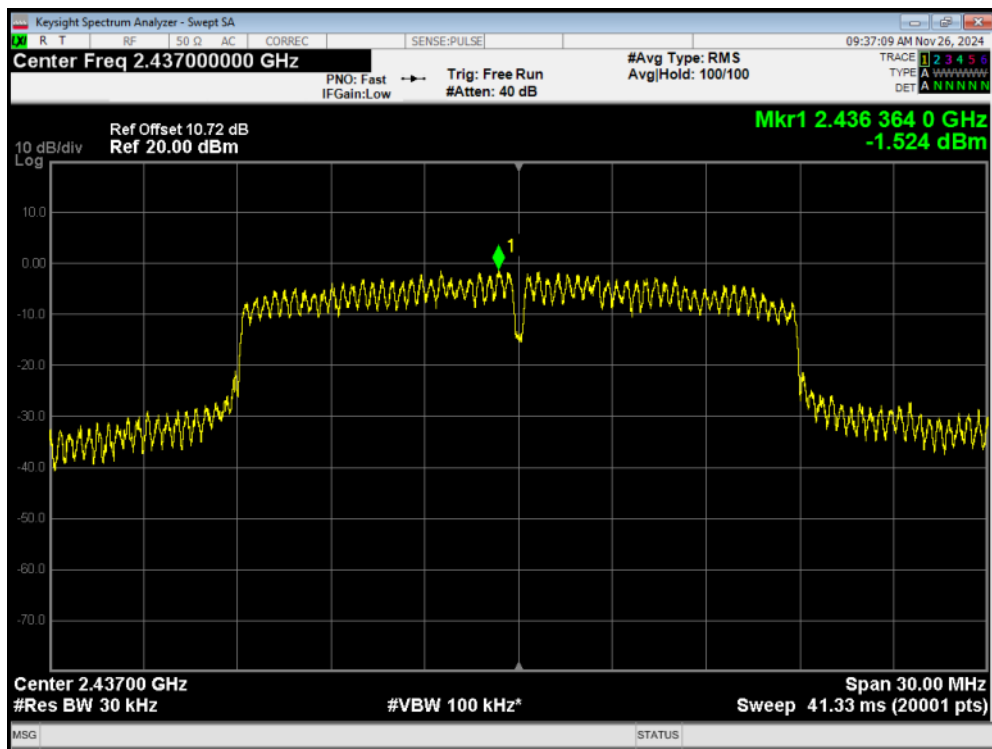


PSD 802.11n(HT20) 2442MHz Ant1

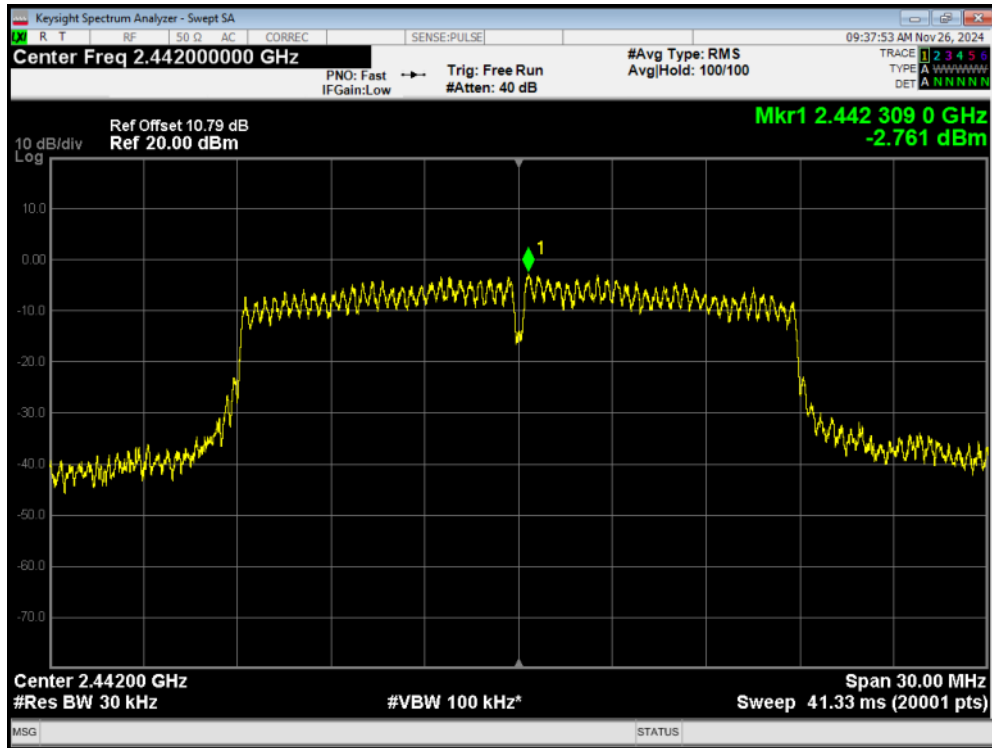


PSD 802.11n(HT20) 2442MHz Ant2

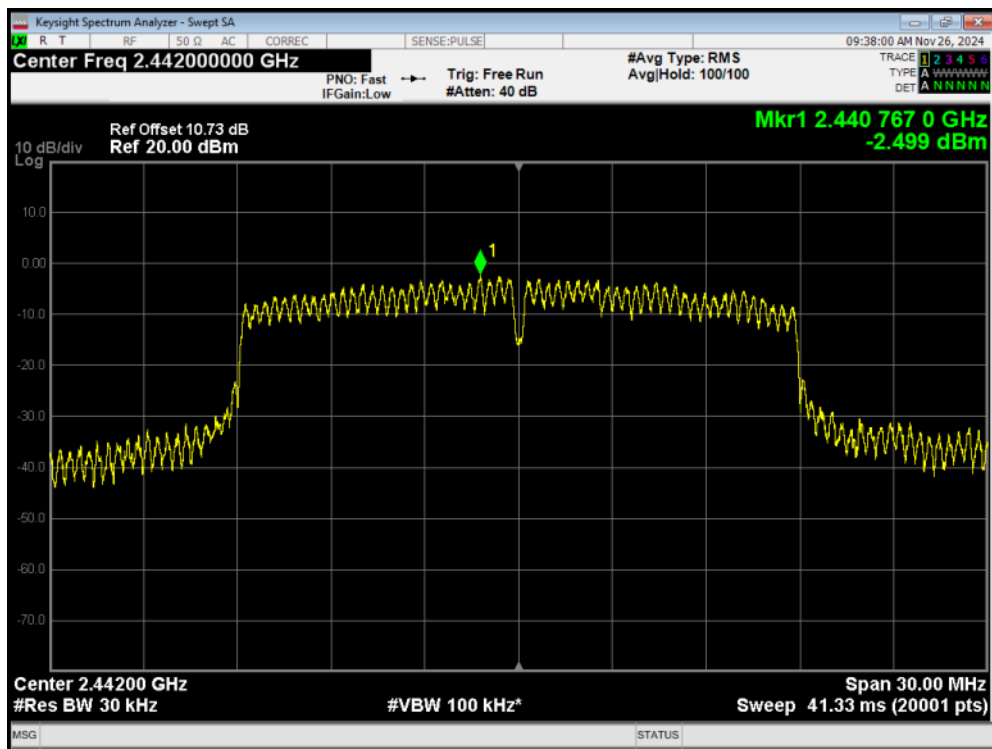


PSD 802.11n(HT20) 2447MHz Ant1

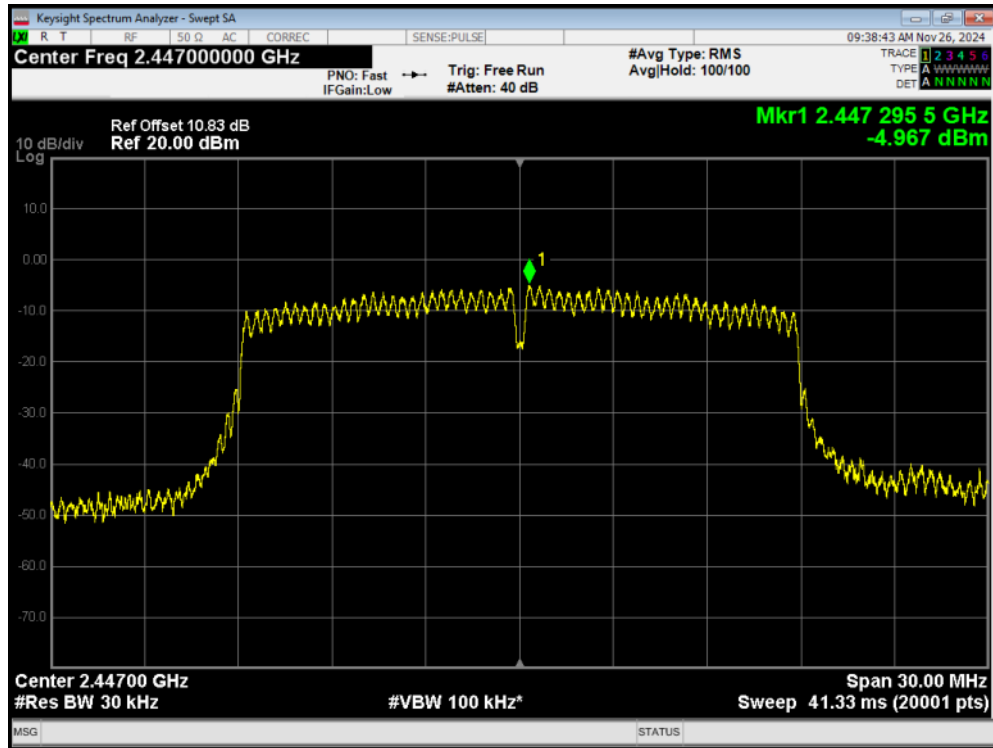


PSD 802.11n(HT20) 2447MHz Ant2

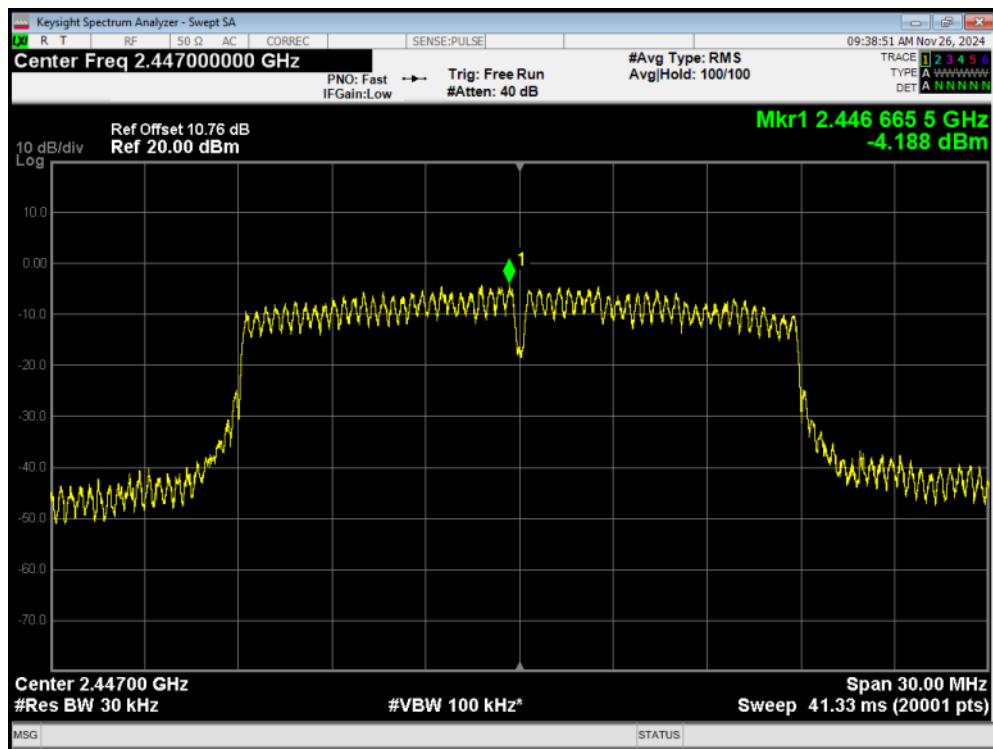


PSD 802.11n(HT20) 2452MHz Ant1

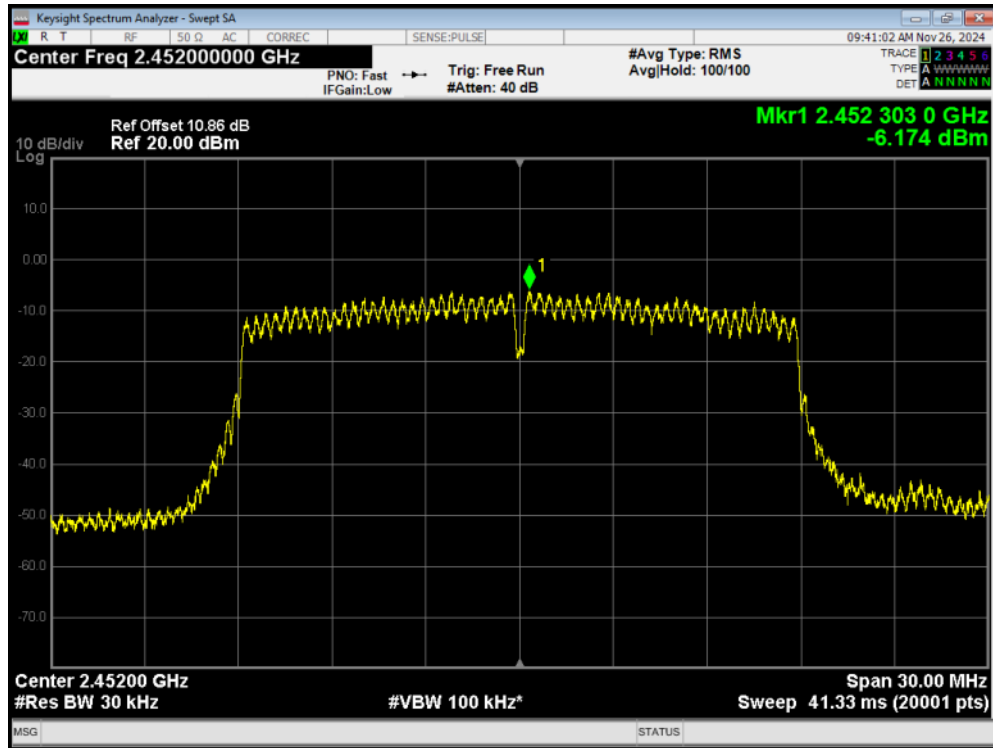


PSD 802.11n(HT20) 2452MHz Ant2

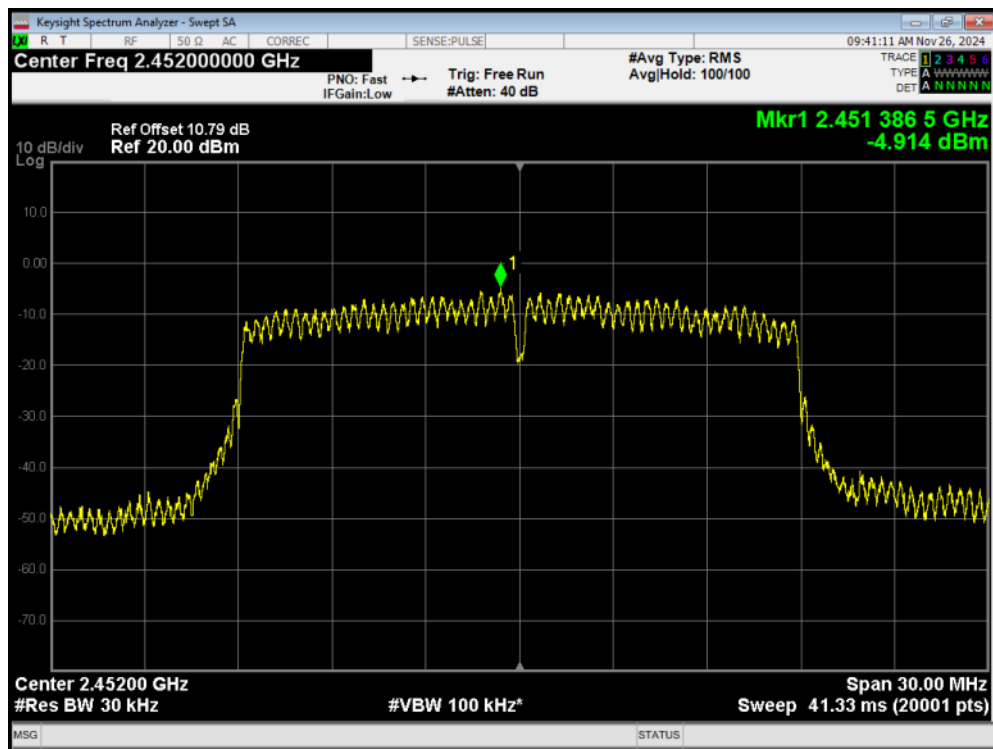


PSD 802.11n(HT20) 2457MHz Ant1

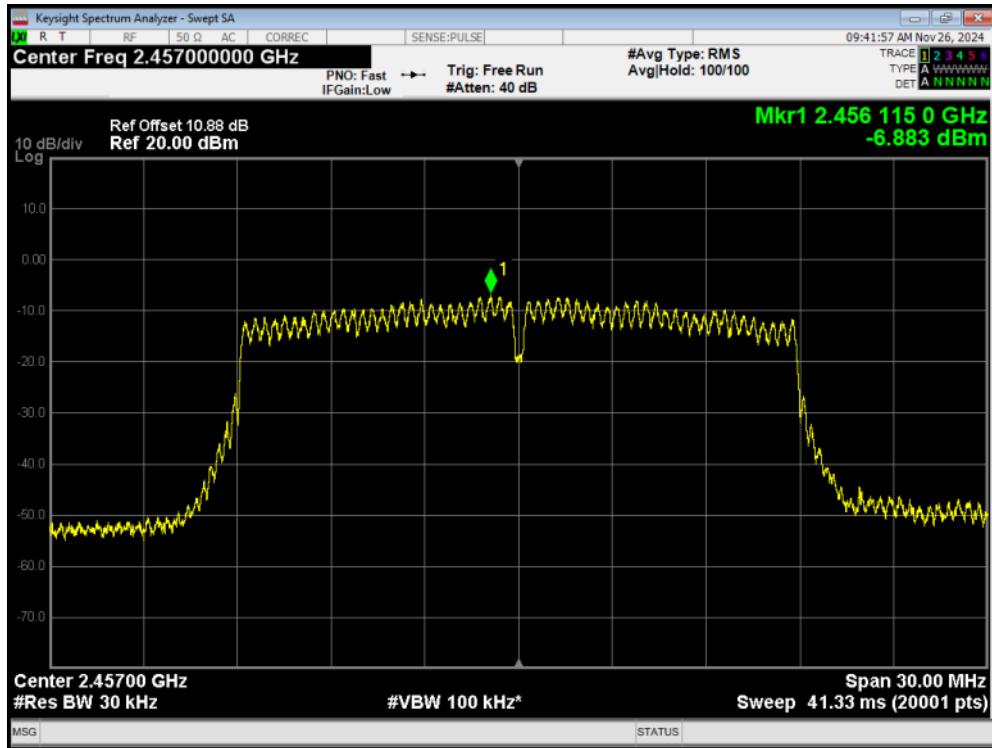


PSD 802.11n(HT20) 2457MHz Ant2

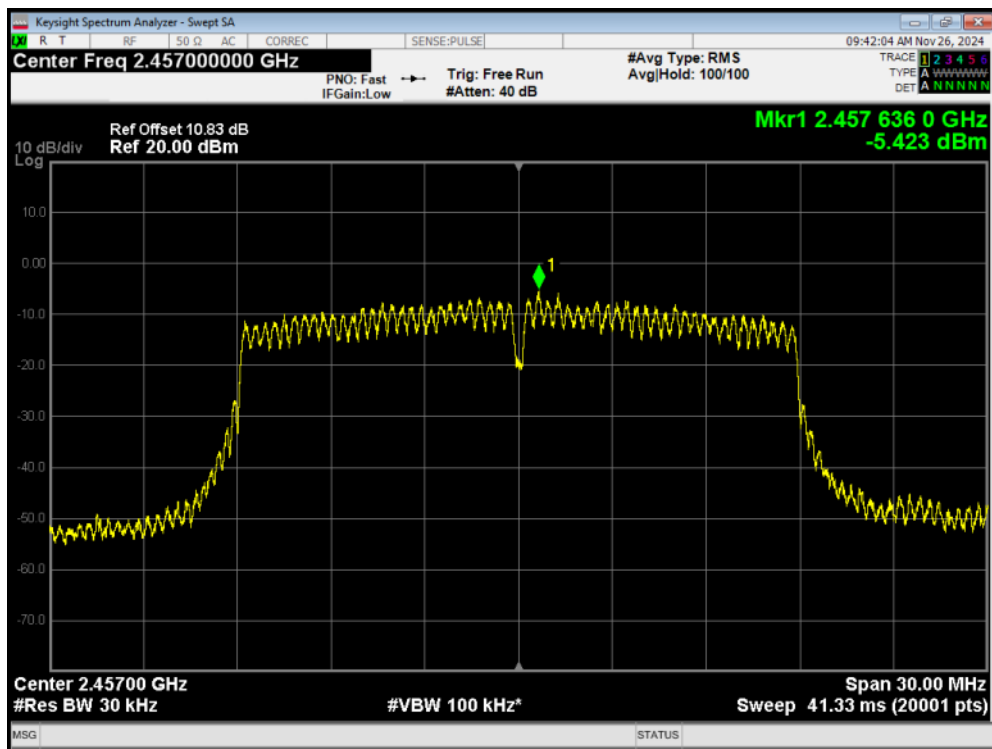


PSD 802.11n(HT20) 2462MHz Ant1

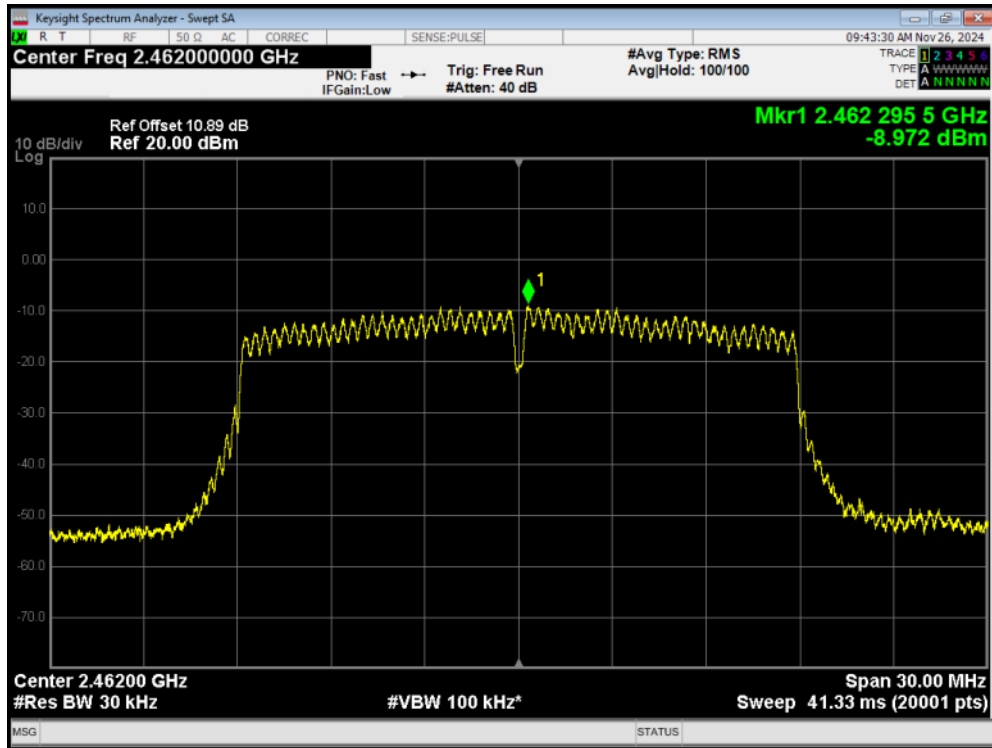


PSD 802.11n(HT20) 2462MHz Ant2

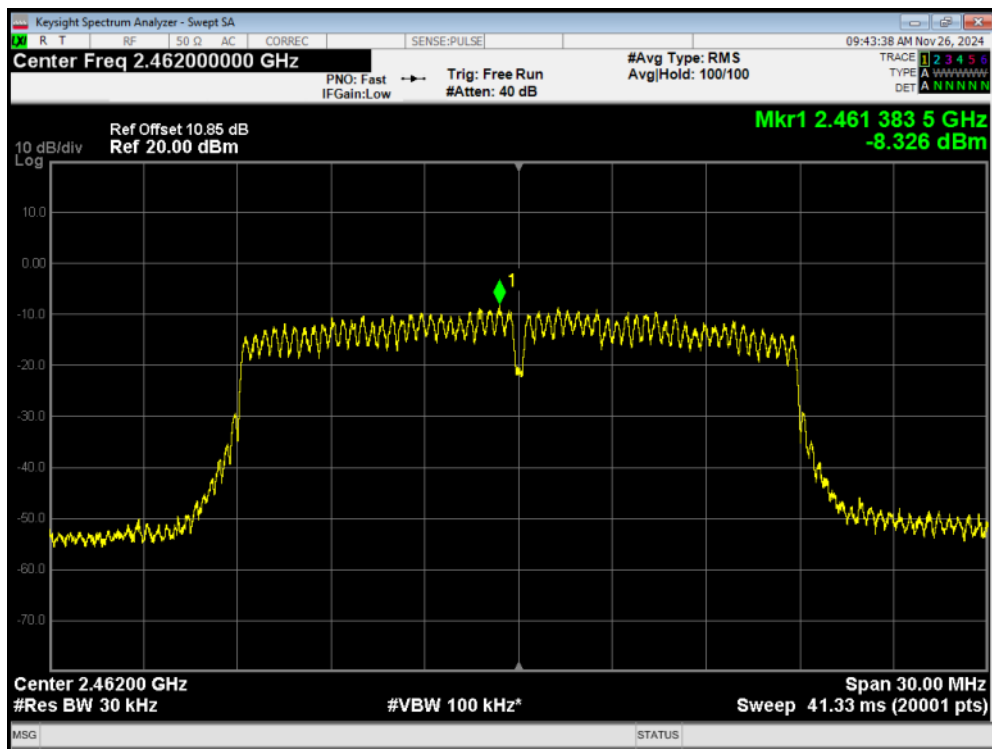


PSD 802.11n(HT40) 2422MHz Ant1

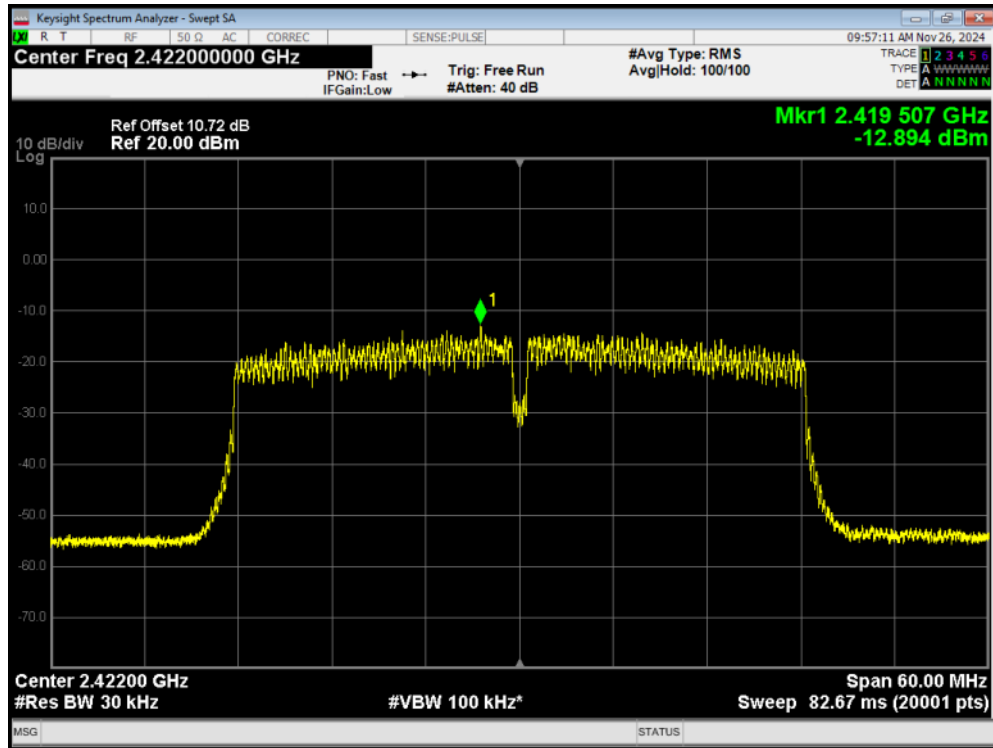


PSD 802.11n(HT40) 2422MHz Ant2

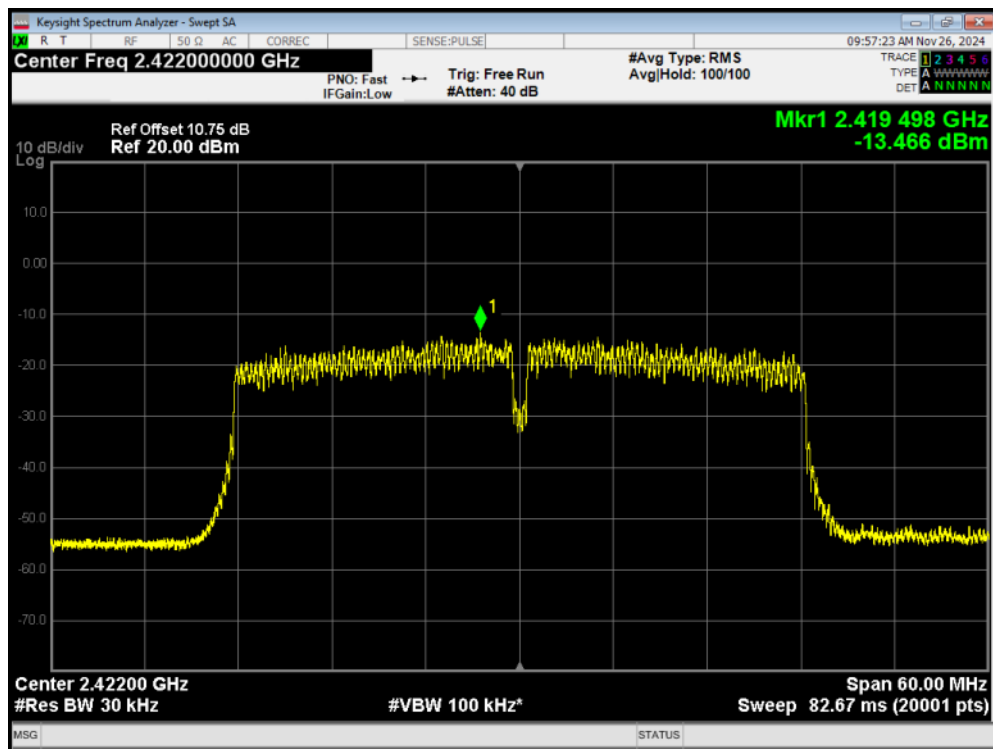


PSD 802.11n(HT40) 2427MHz Ant1

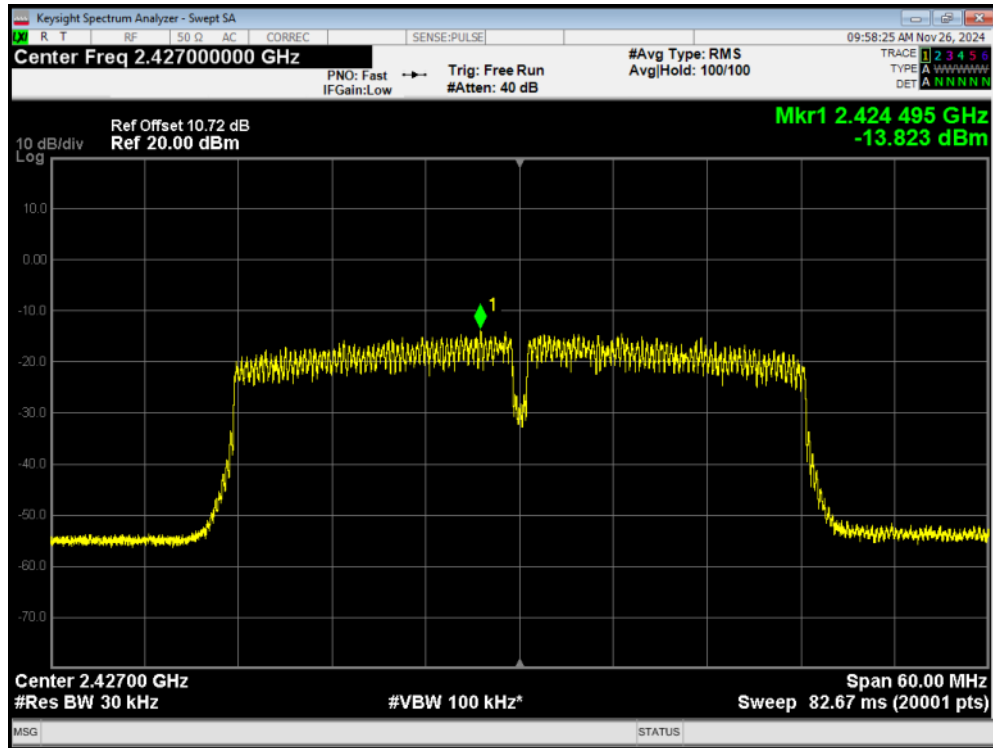


PSD 802.11n(HT40) 2427MHz Ant2

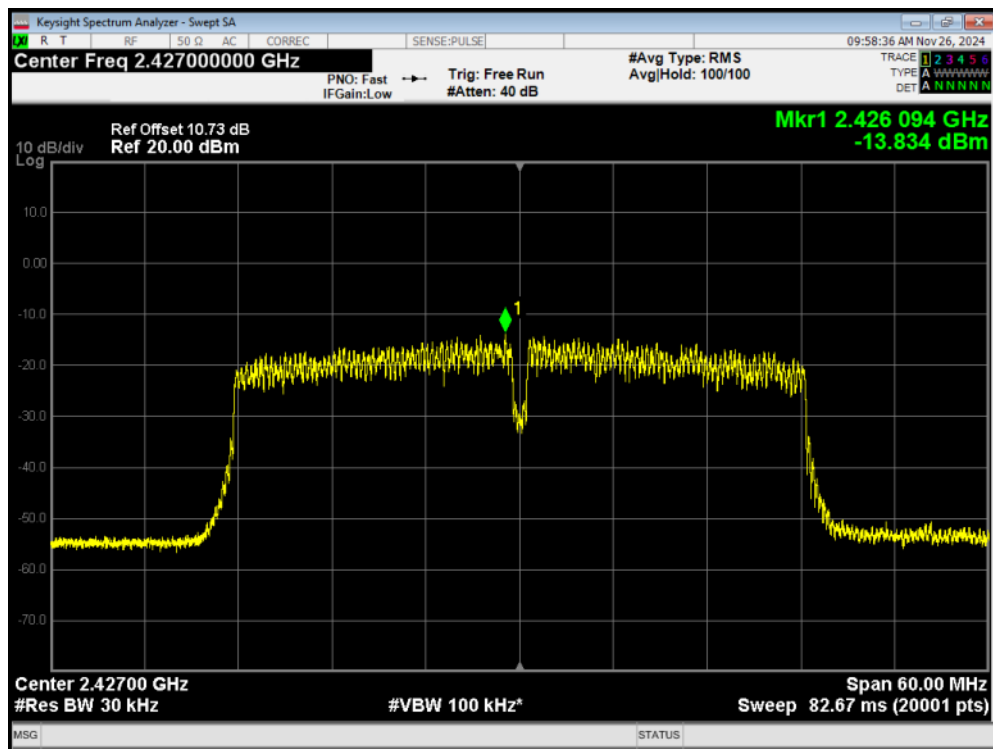


PSD 802.11n(HT40) 2432MHz Ant1

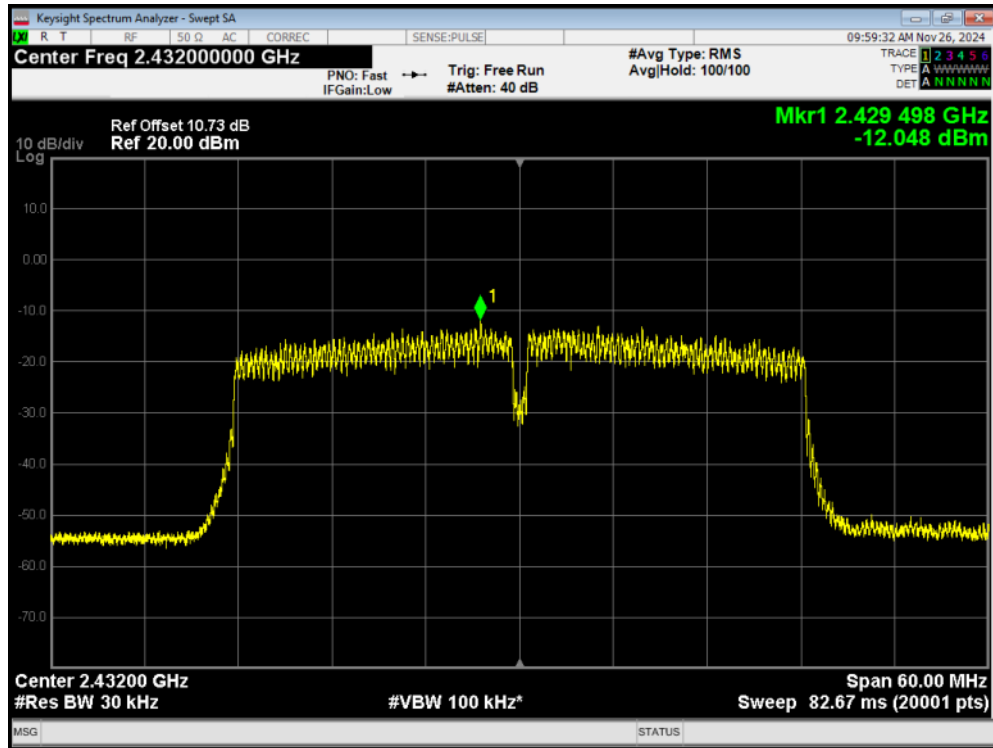


PSD 802.11n(HT40) 2432MHz Ant2

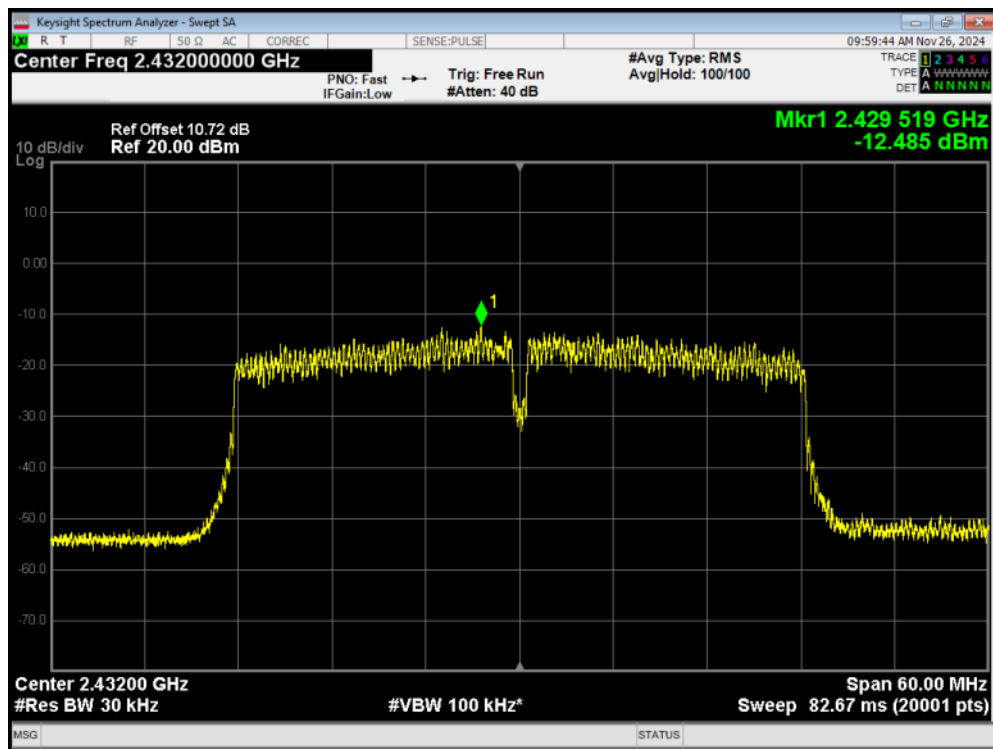


PSD 802.11n(HT40) 2437MHz Ant1

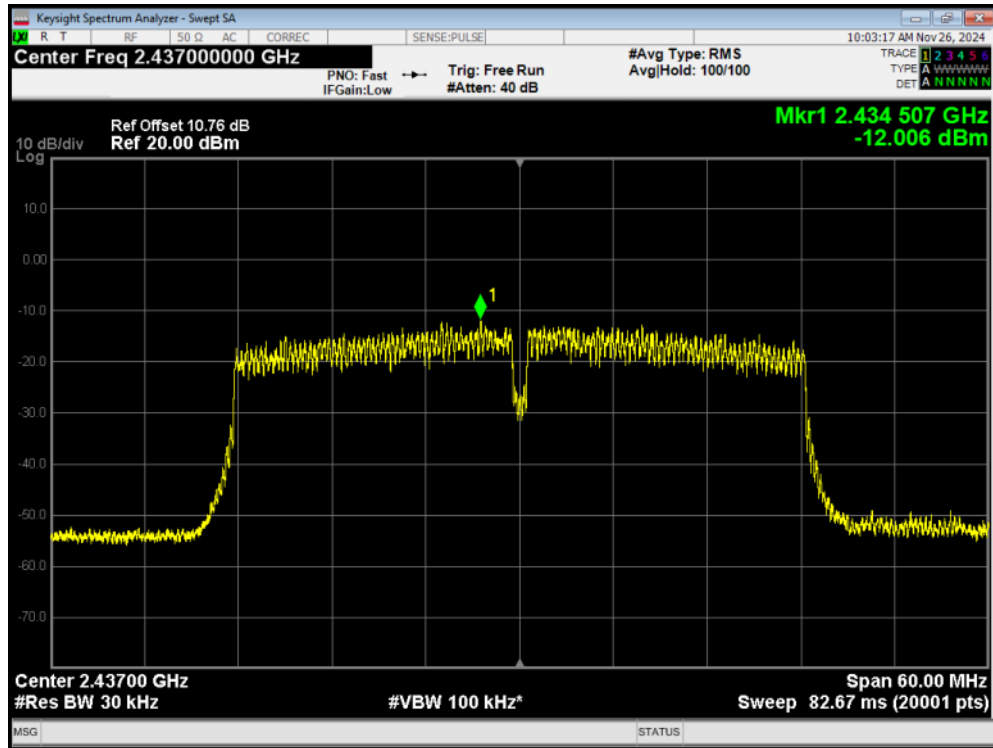


PSD 802.11n(HT40) 2437MHz Ant2

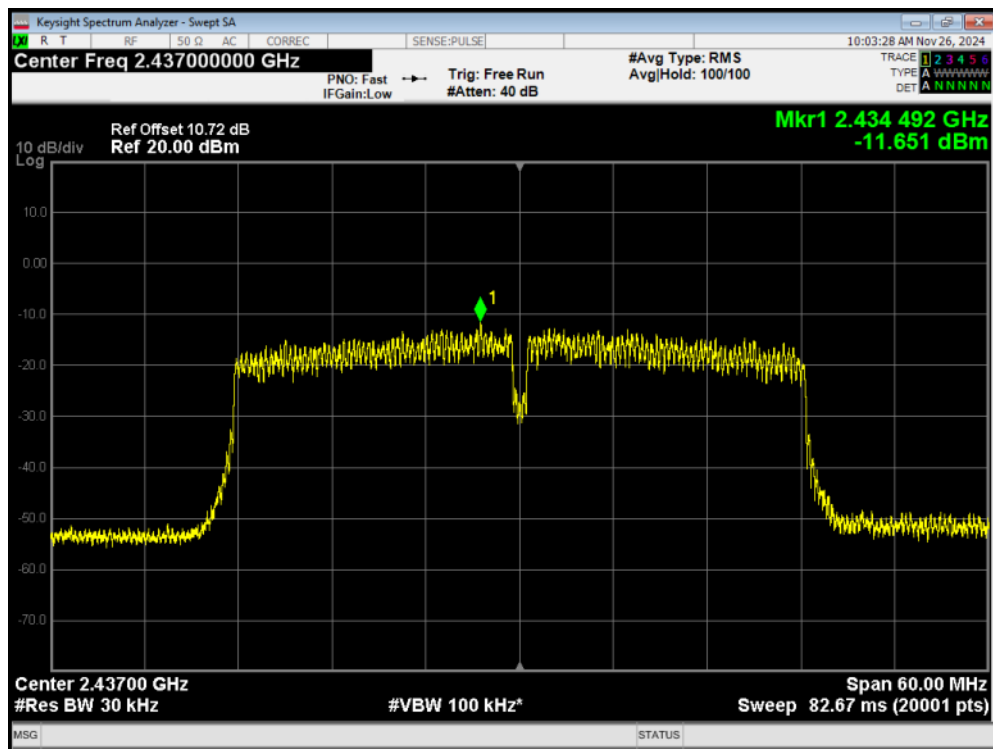


PSD 802.11n(HT40) 2442MHz Ant1

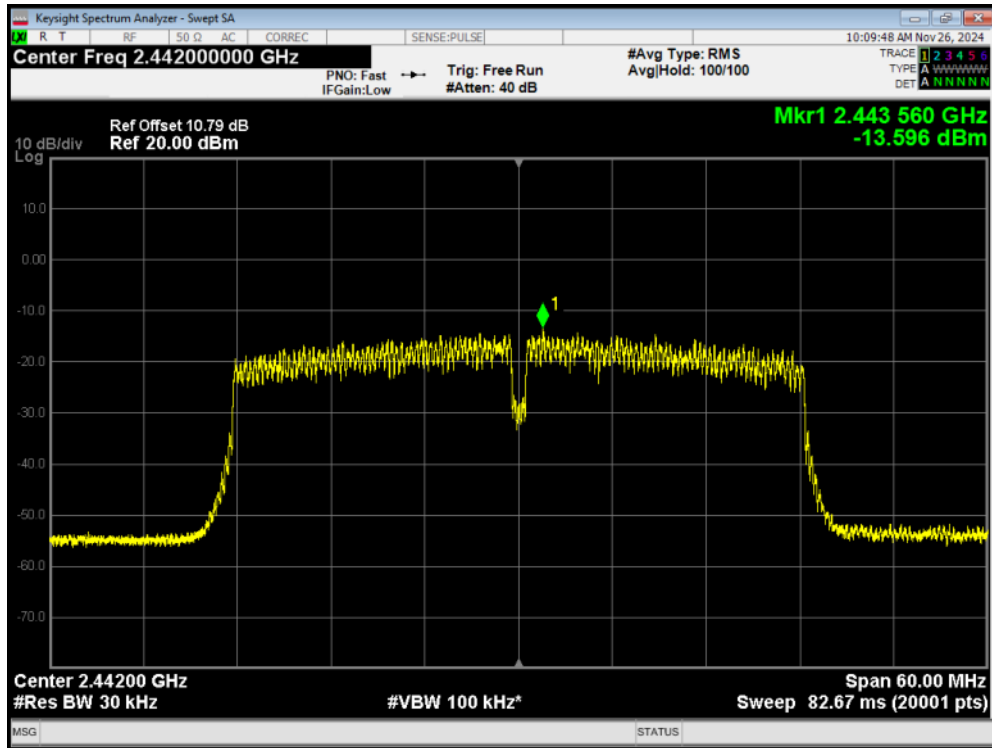


PSD 802.11n(HT40) 2442MHz Ant2

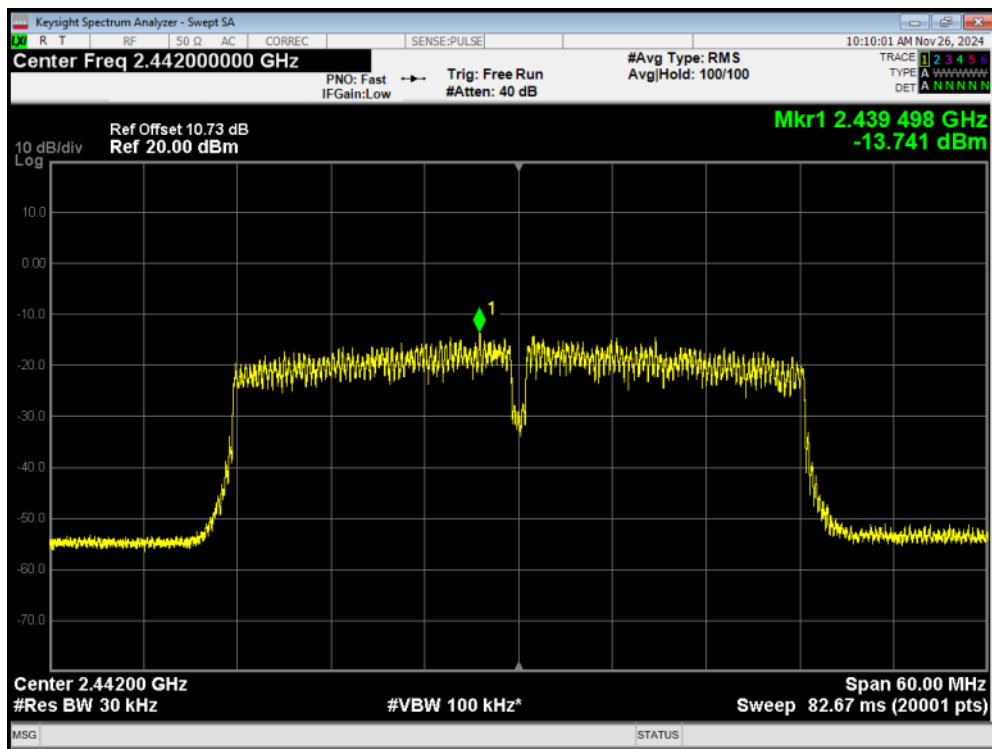


PSD 802.11n(HT40) 2447MHz Ant1

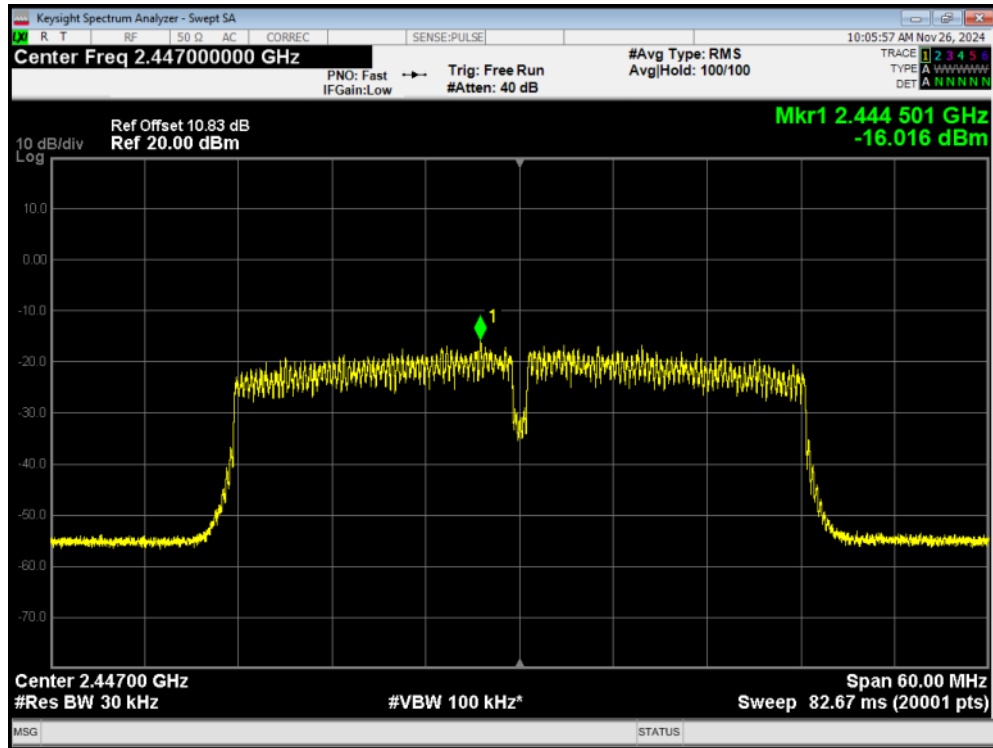


PSD 802.11n(HT40) 2447MHz Ant2

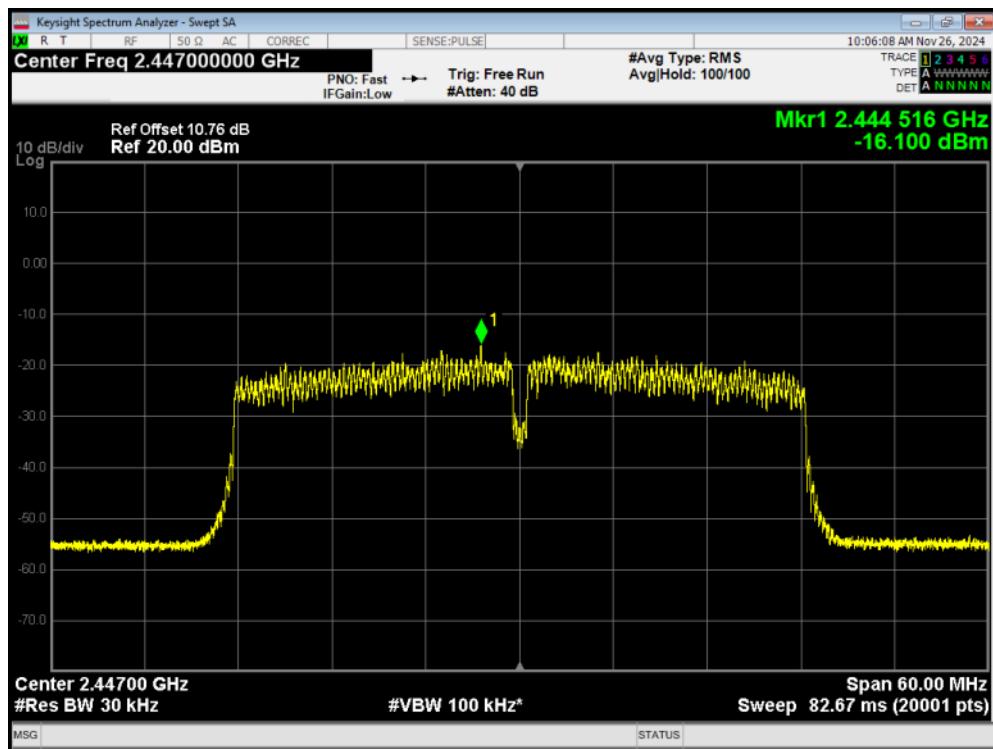

PSD 802.11n(HT40) 2452MHz Ant1

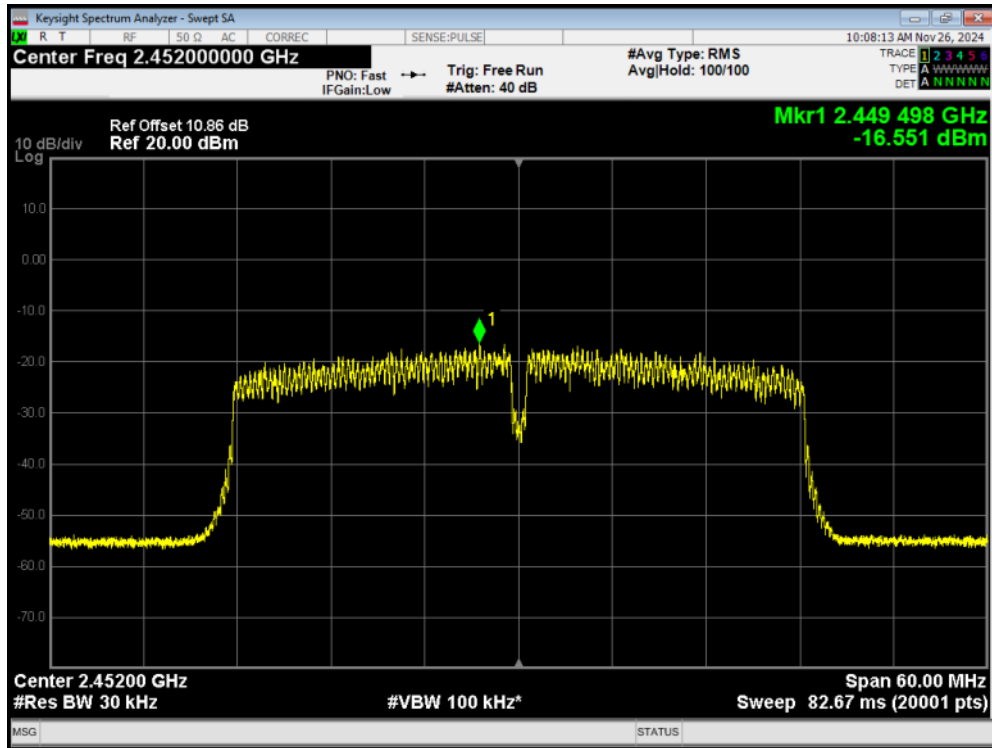

PSD 802.11n(HT40) 2452MHz Ant2

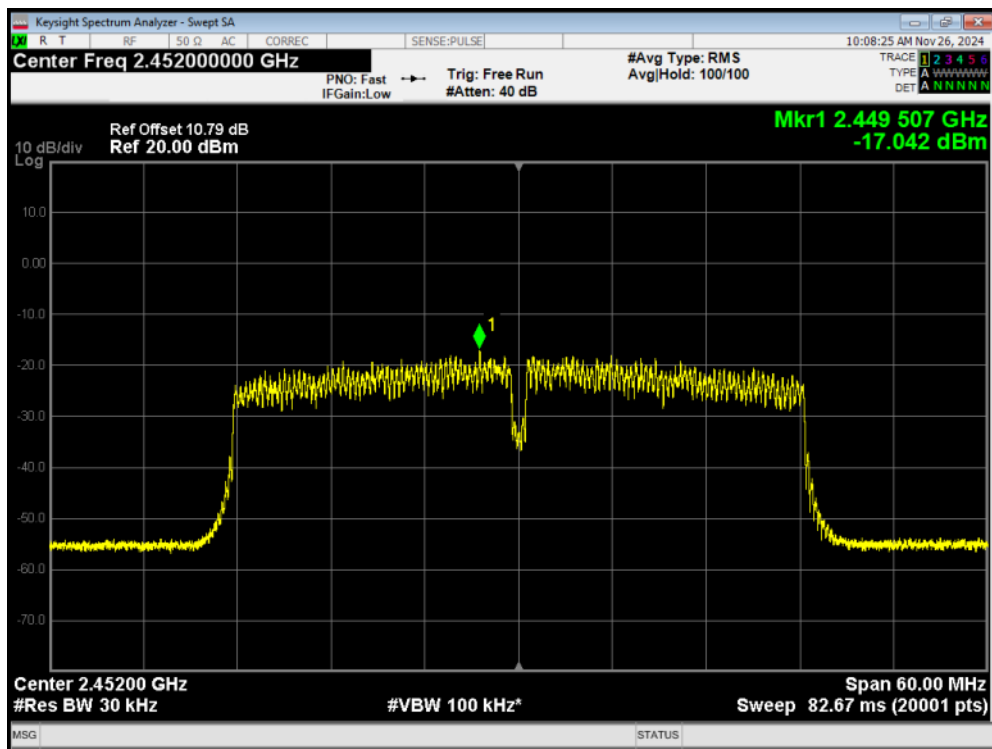

5.5. Spurious RF Conducted Emissions

Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%

Method of Measurement

The EUT was connected to the spectrum analyzer with a known loss. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. Set RBW to 100 kHz and VBW to 300 kHz, Sweep is set to AUTO.

The test is in transmitting mode.

Test Setup



Limits

Rule Part 15.247(d) pacifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.”

Test Mode	Carrier frequency (MHz)/ Channel	Reference value (dBm)	Limit
802.11b	2412/CH 1	12.22	-17.78
	2417/CH 2	8.95	-21.05
	2422/CH 3	11.67	-18.33
	2427/CH 4	12.66	-17.34
	2432/CH 5	13.20	-16.80
	2437/CH 6	13.42	-16.58
	2442/CH 7	9.94	-20.06
	2447/CH 8	8.93	-21.07
	2452/CH 9	9.53	-20.47
	2457/CH 10	8.32	-21.68
	2462/CH 11	7.23	-22.77
802.11g	2412/CH 1	7.88	-22.12
	2417/CH 2	6.31	-23.69

	2422/CH 3	9.14	-20.86
	2427/CH 4	11.24	-18.76
	2432/CH 5	9.15	-20.85
	2437/CH 6	10.12	-19.88
	2442/CH 7	10.28	-19.72
	2447/CH 8	8.95	-21.05
	2452/CH 9	9.18	-20.82
	2457/CH 10	7.11	-22.89
	2462/CH 11	3.22	-26.78
802.11n HT20	2412/CH 1	6.12	-23.88
	2417/CH 2	7.19	-22.81
	2422/CH 3	8.94	-21.06
	2427/CH 4	10.86	-19.14
	2432/CH 5	11.56	-18.44
	2437/CH 6	10.55	-19.45
	2442/CH 7	10.76	-19.24
	2447/CH 8	9.47	-20.53
	2452/CH 9	7.56	-22.44
	2457/CH 10	6.71	-23.29
	2462/CH 11	4.06	-25.94
802.11n HT40	2422/CH 3	-0.87	-30.87
	2427/CH 4	-0.53	-30.53
	2432/CH 5	0.24	-29.76
	2437/CH 6	1.18	-28.82
	2442/CH 7	-0.60	-30.60
	2447/CH 8	-4.00	-34.00
	2452/CH 9	-4.08	-34.08
802.11ax HE20	2412/CH 1	5.94	-24.06
	2417/CH 2	8.00	-22.00
	2422/CH 3	10.14	-19.86
	2427/CH 4	10.94	-19.06
	2432/CH 5	11.78	-18.22
	2437/CH 6	12.46	-17.54
	2442/CH 7	10.72	-19.28
	2447/CH 8	8.46	-21.54
	2452/CH 9	7.88	-22.12
	2457/CH 10	5.20	-24.80
	2462/CH 11	2.11	-27.89
802.11ax HE40	2422/CH 3	-1.21	-31.21
	2427/CH 4	-1.45	-31.45
	2432/CH 5	0.80	-29.20
	2437/CH 6	0.32	-29.68
	2442/CH 7	-2.33	-32.33

	2447/CH 8	-3.63	-33.63
	2452/CH 9	-3.80	-33.80


Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.


Frequency	Uncertainty
100kHz-2GHz	0.684 dB
2GHz-26GHz	1.407 dB

Test Results:


Tx. Spurious 802.11ax(HE20) 2412MHzRef

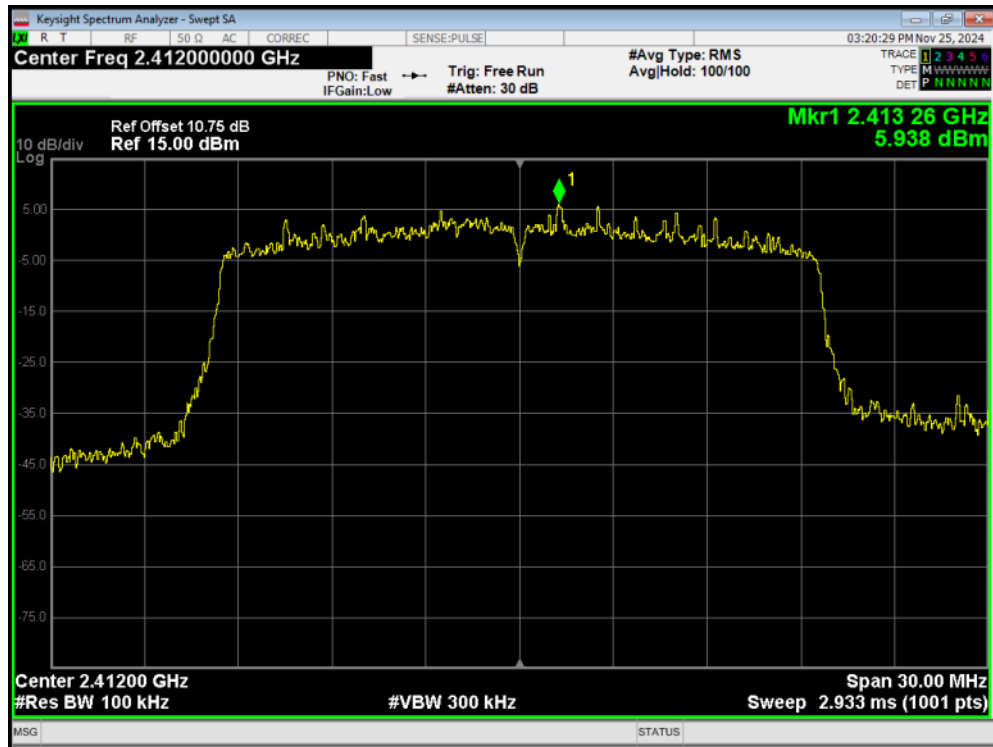


Tx. Spurious 802.11ax(HE20) 2412MHzEmission

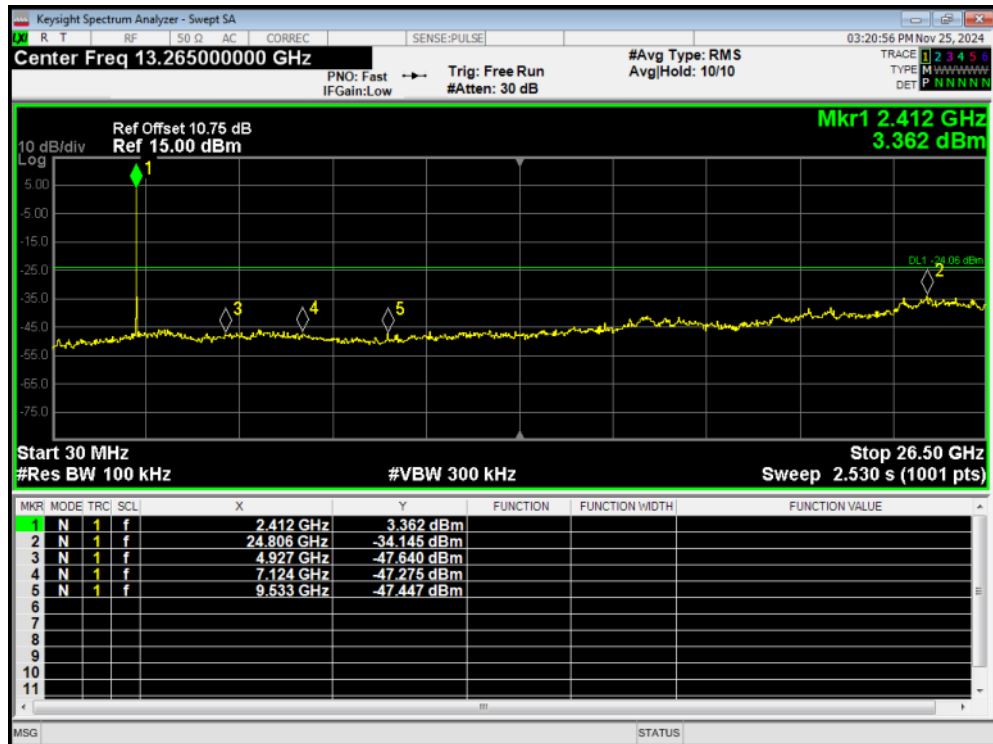


Tx. Spurious 802.11ax(HE20) 2417MHzRef

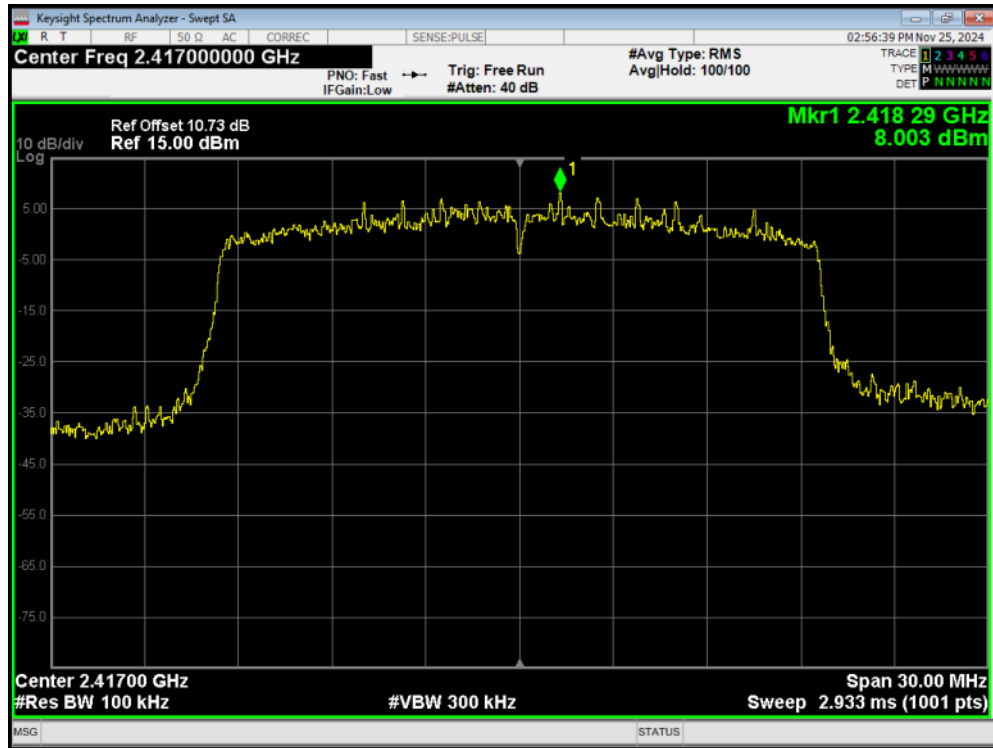


Tx. Spurious 802.11ax(HE20) 2417MHzEmission

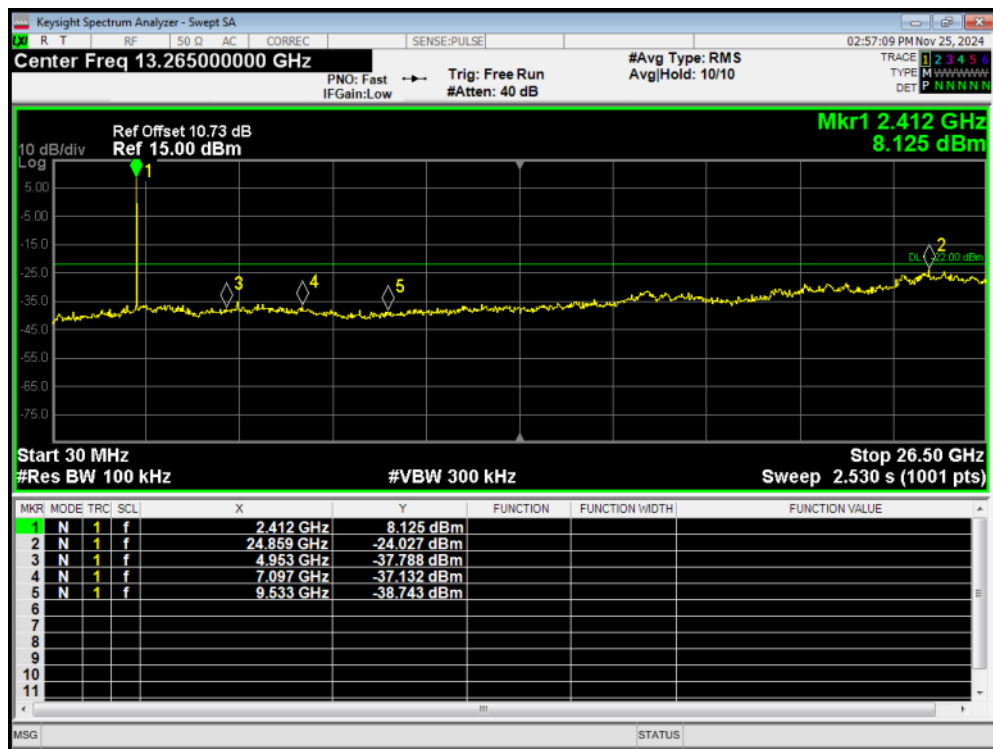


Tx. Spurious 802.11ax(HE20) 2422MHzRef

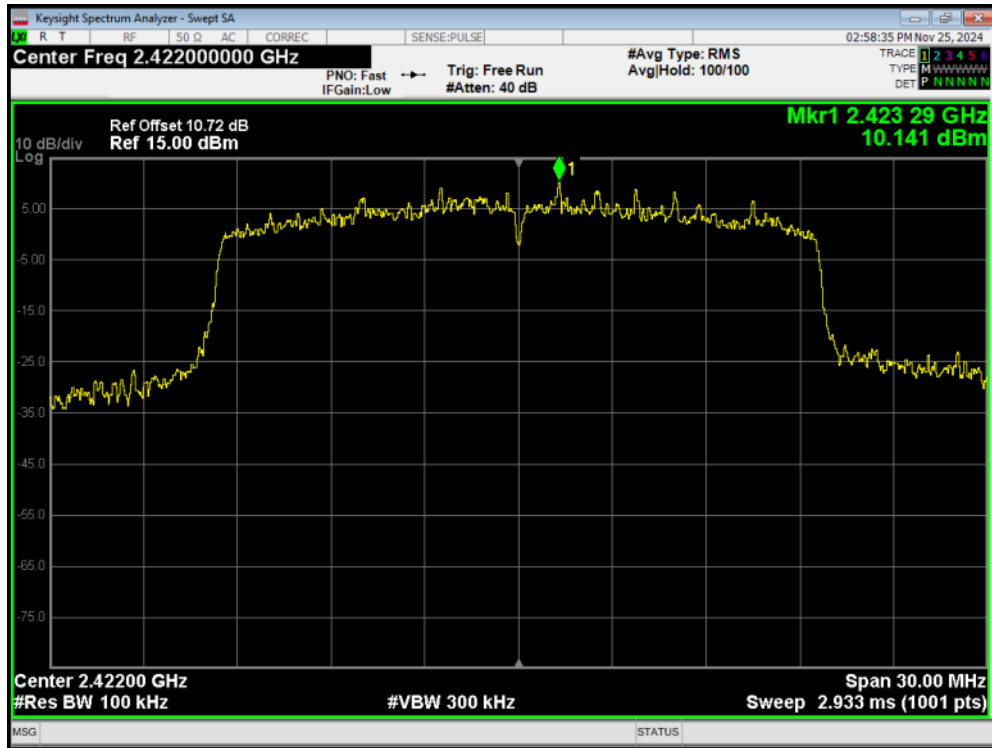


Tx. Spurious 802.11ax(HE20) 2422MHzEmission

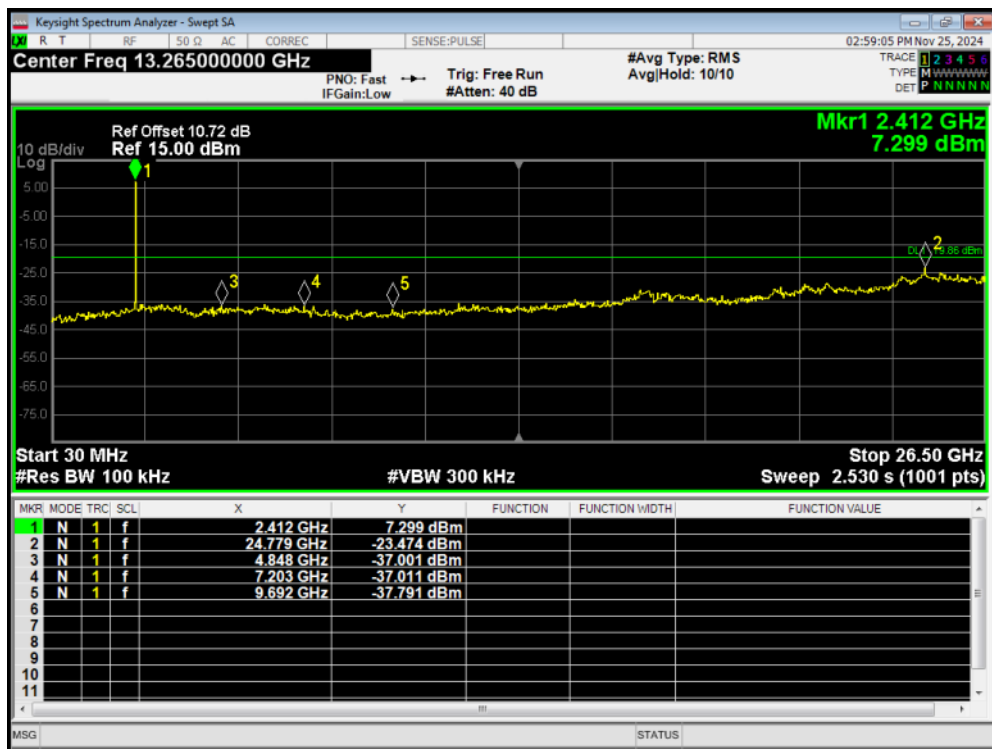


Tx. Spurious 802.11ax(HE20) 2427MHzRef

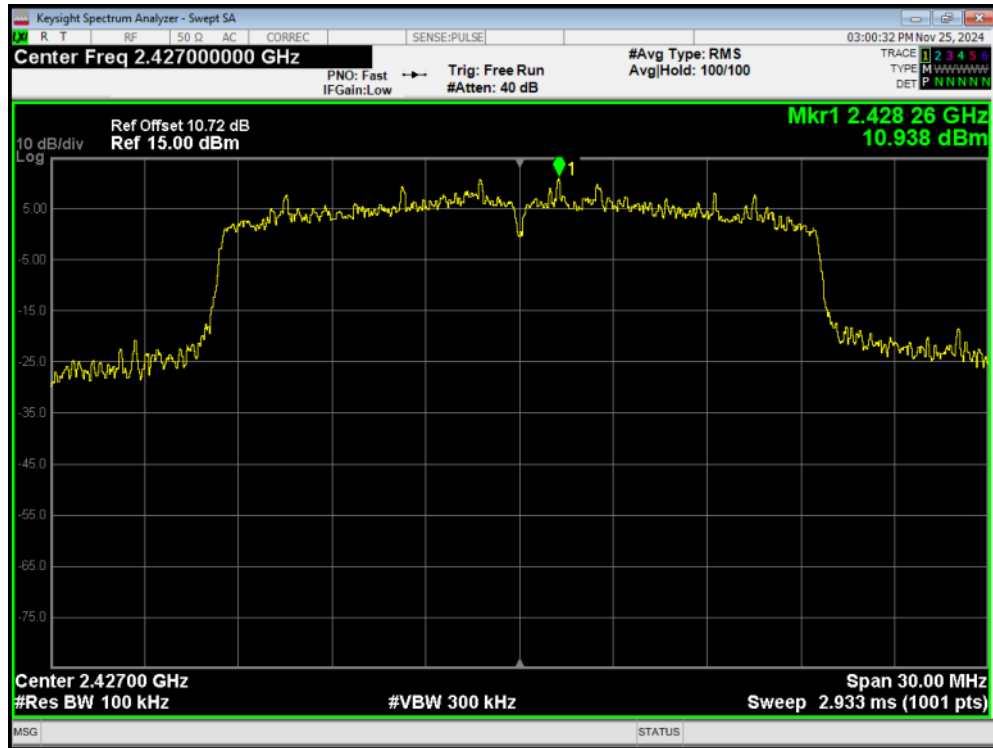


Tx. Spurious 802.11ax(HE20) 2427MHzEmission

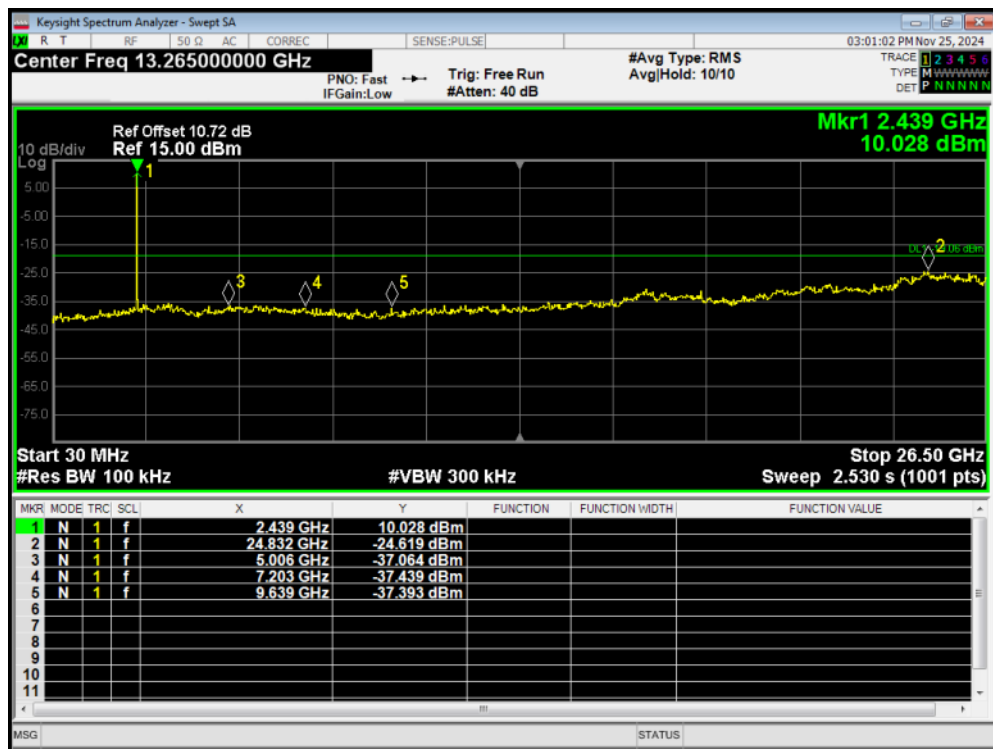

Tx. Spurious 802.11ax(HE20) 2432MHzRef

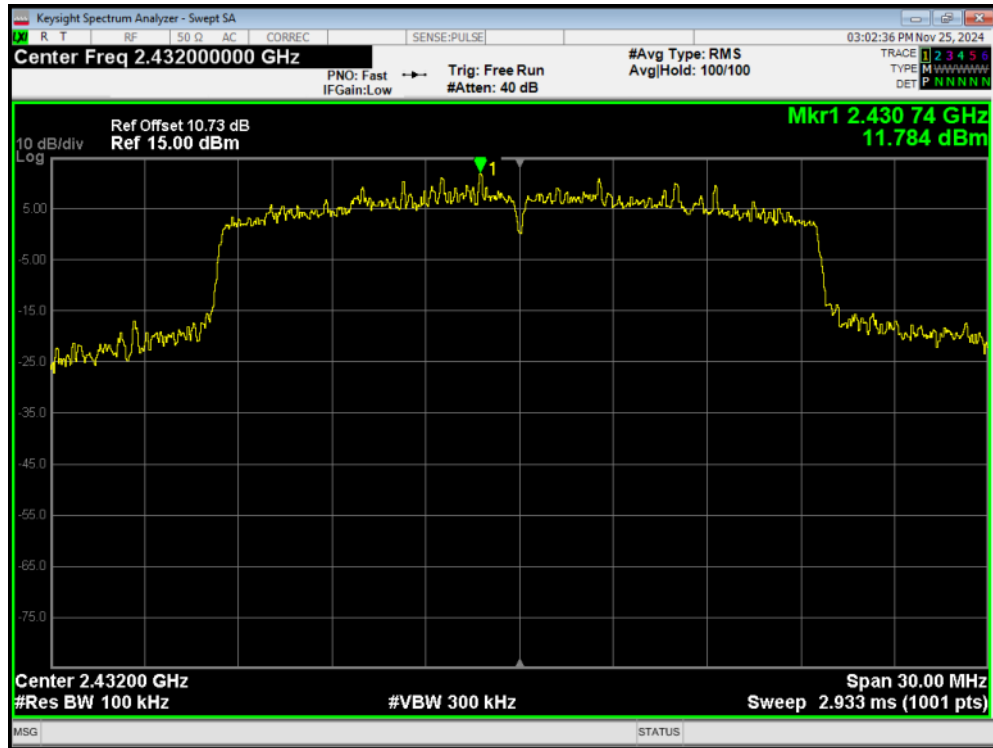


Tx. Spurious 802.11ax(HE20) 2432MHzEmission

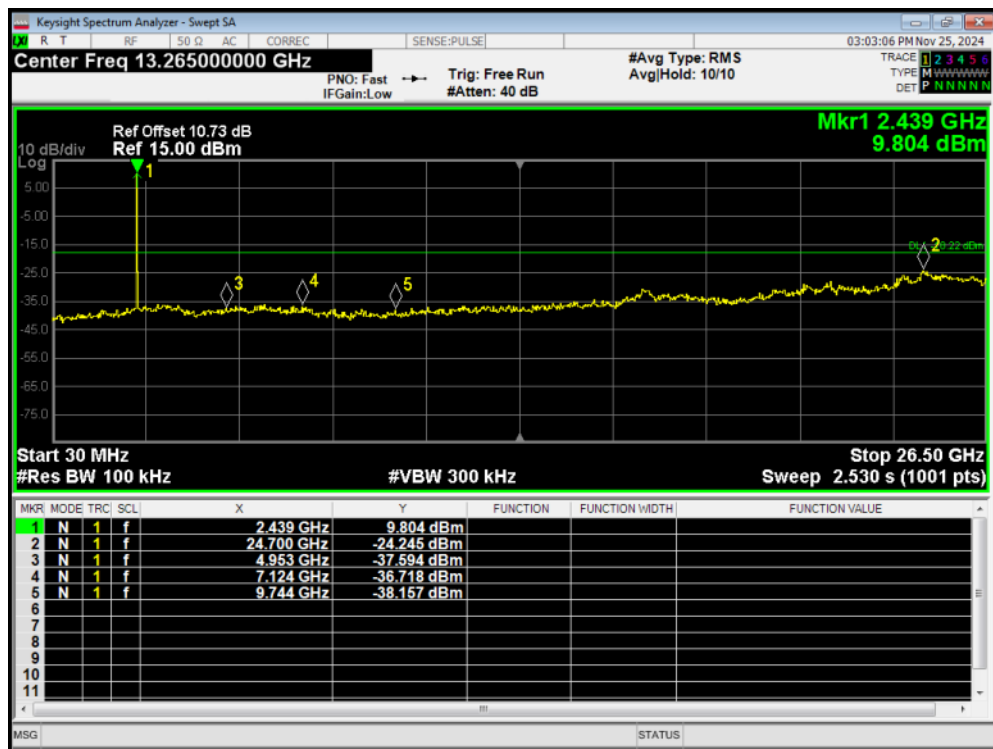


Tx. Spurious 802.11ax(HE20) 2437MHzRef




Tx. Spurious 802.11ax(HE20) 2437MHzEmission

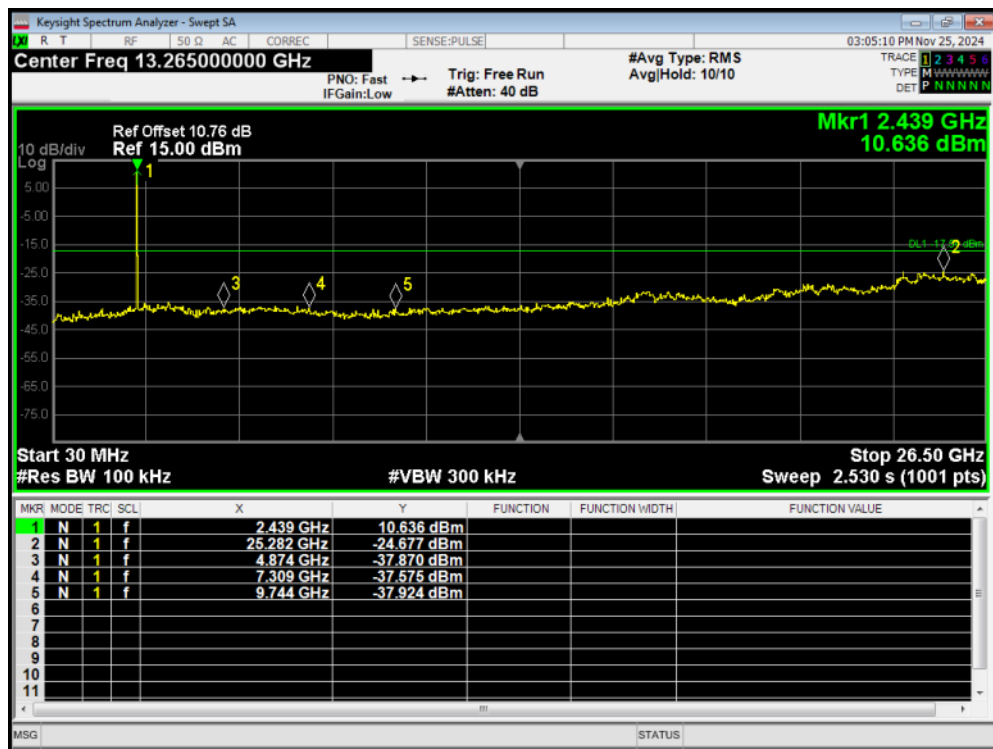


Tx. Spurious 802.11ax(HE20) 2442MHzRef

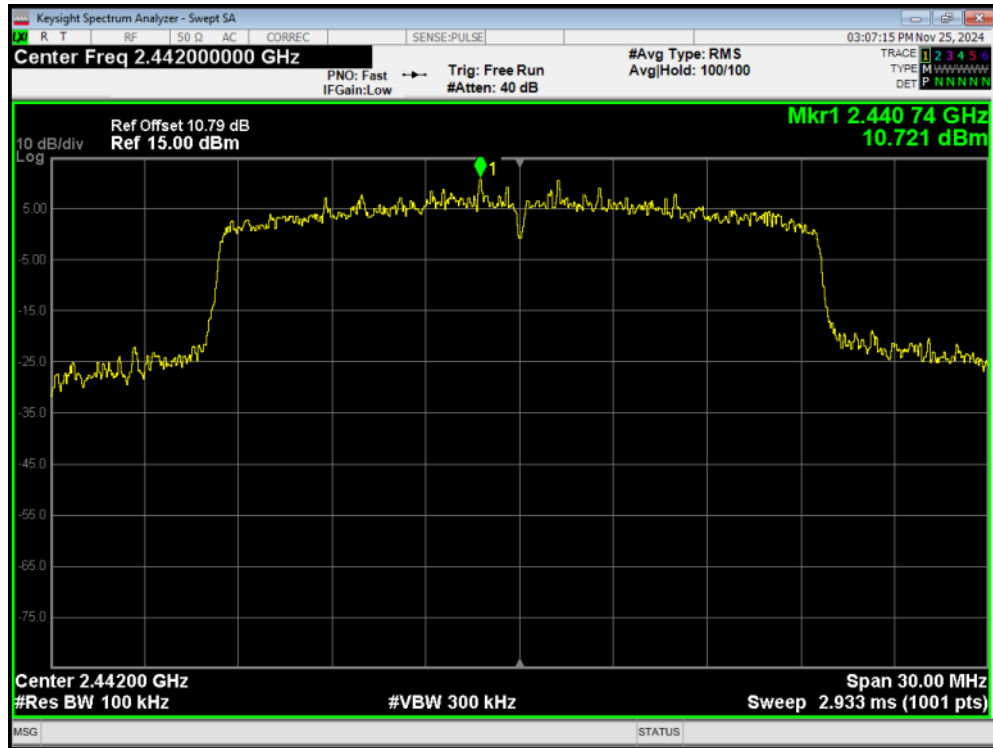


Tx. Spurious 802.11ax(HE20) 2442MHzEmission

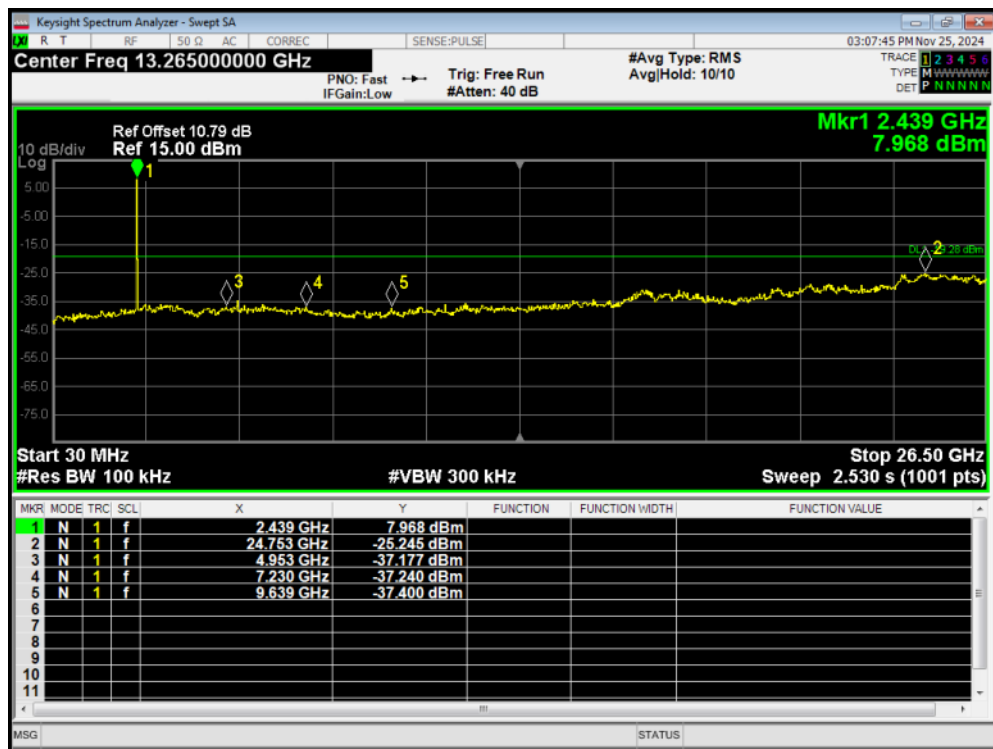


Tx. Spurious 802.11ax(HE20) 2447MHzRef

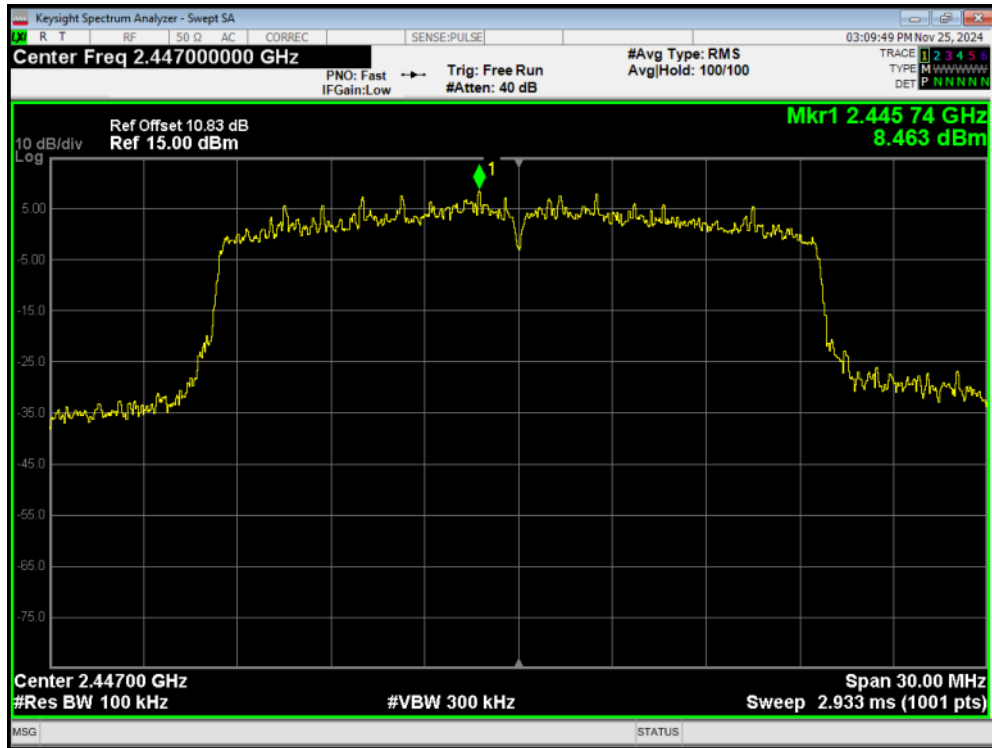


Tx. Spurious 802.11ax(HE20) 2447MHzEmission

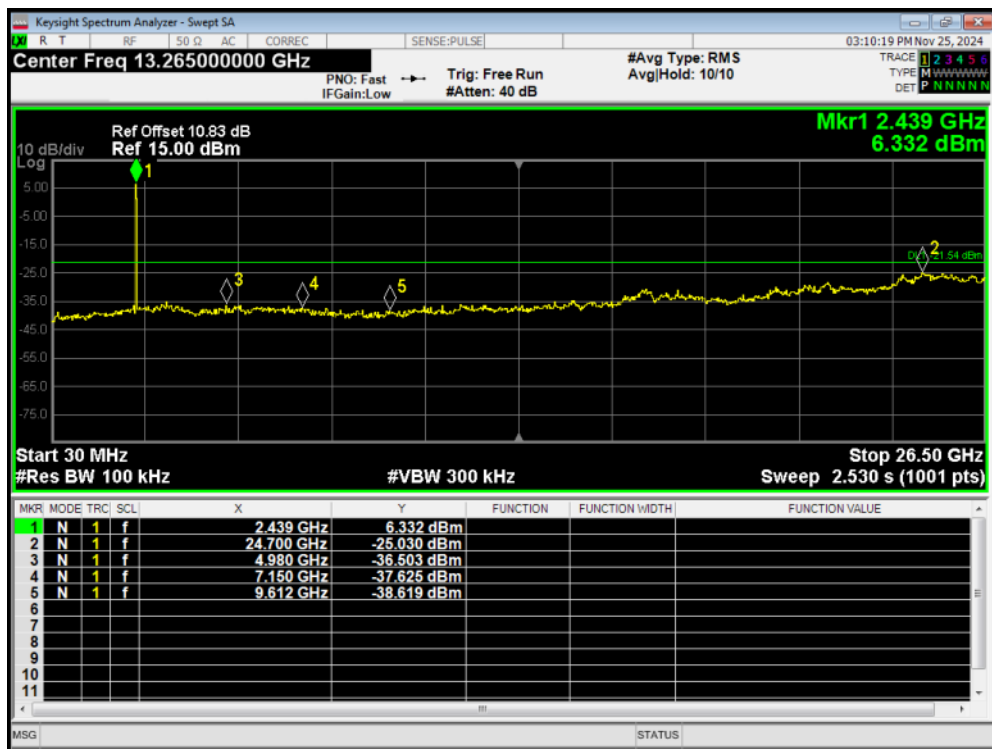


Tx. Spurious 802.11ax(HE20) 2452MHzRef

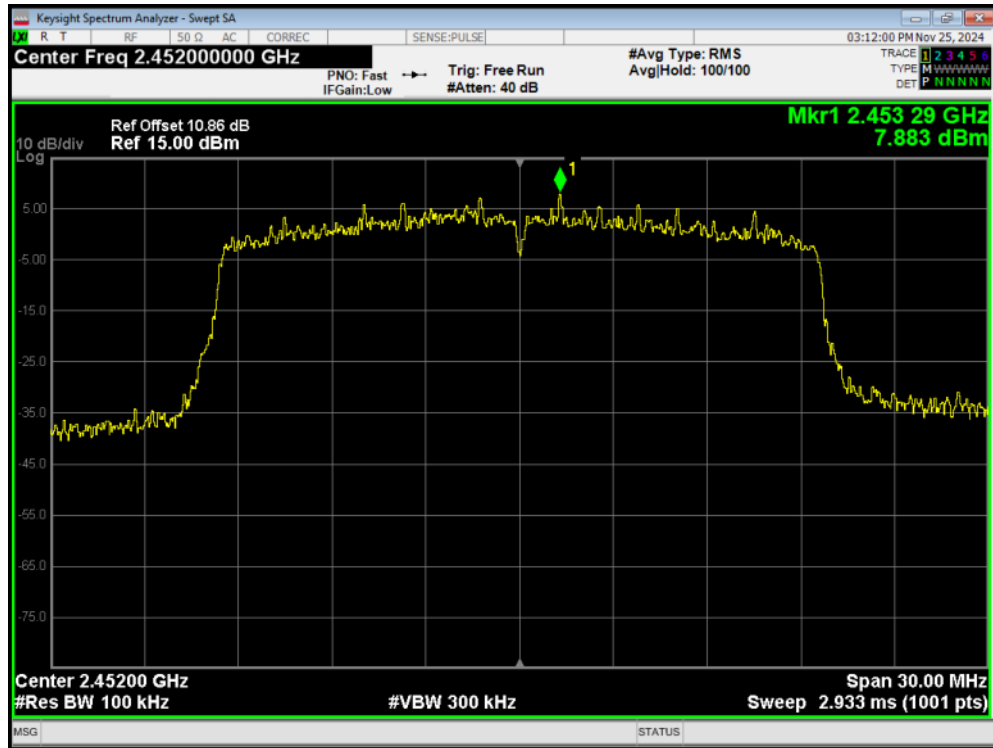


Tx. Spurious 802.11ax(HE20) 2452MHzEmission

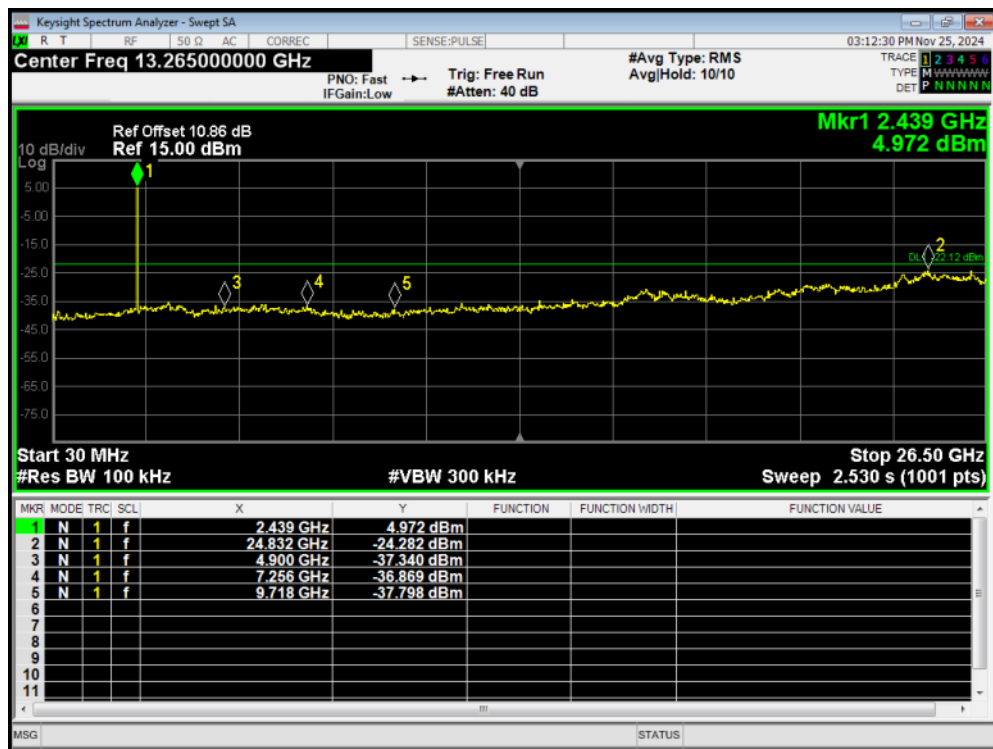


Tx. Spurious 802.11ax(HE20) 2457MHzRef

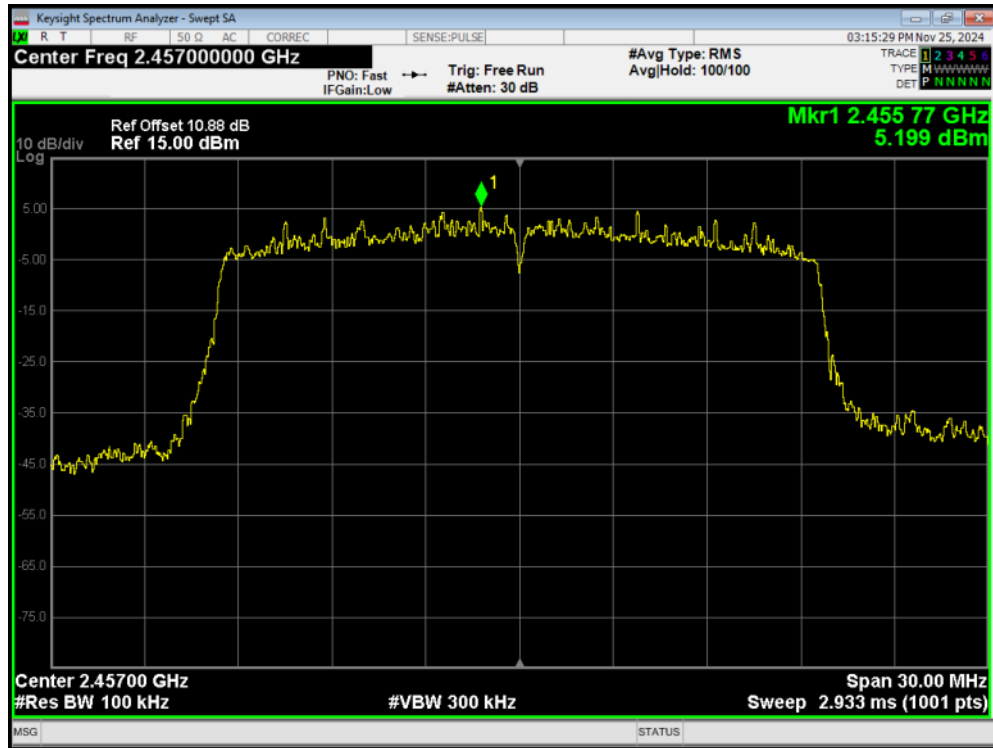


Tx. Spurious 802.11ax(HE20) 2457MHzEmission

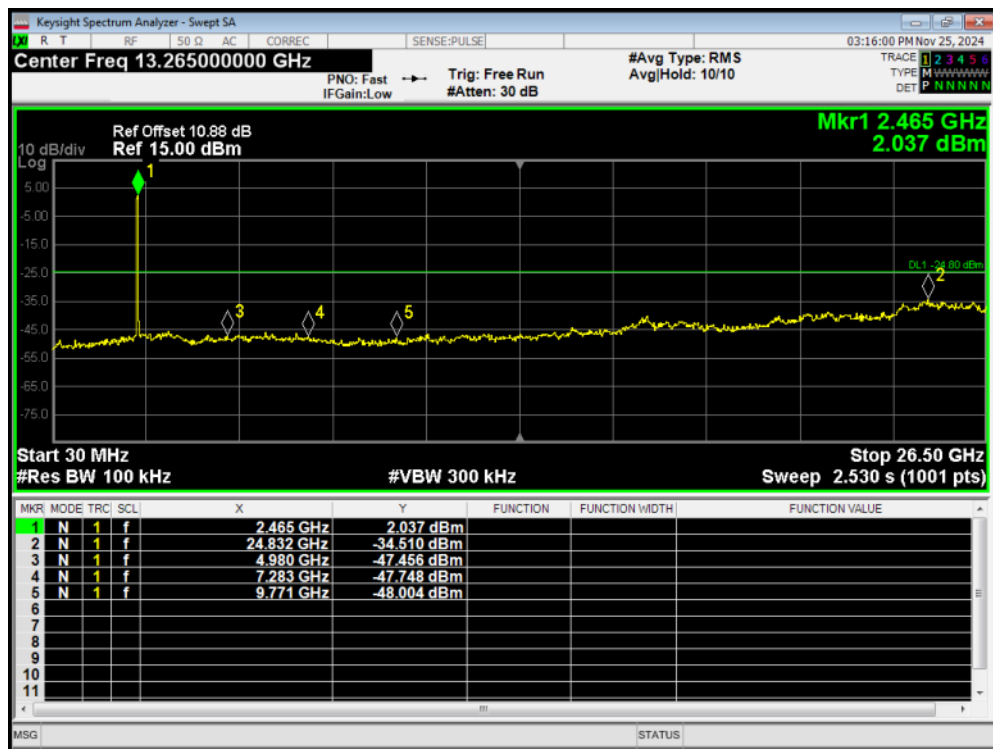


Tx. Spurious 802.11ax(HE20) 2462MHzRef

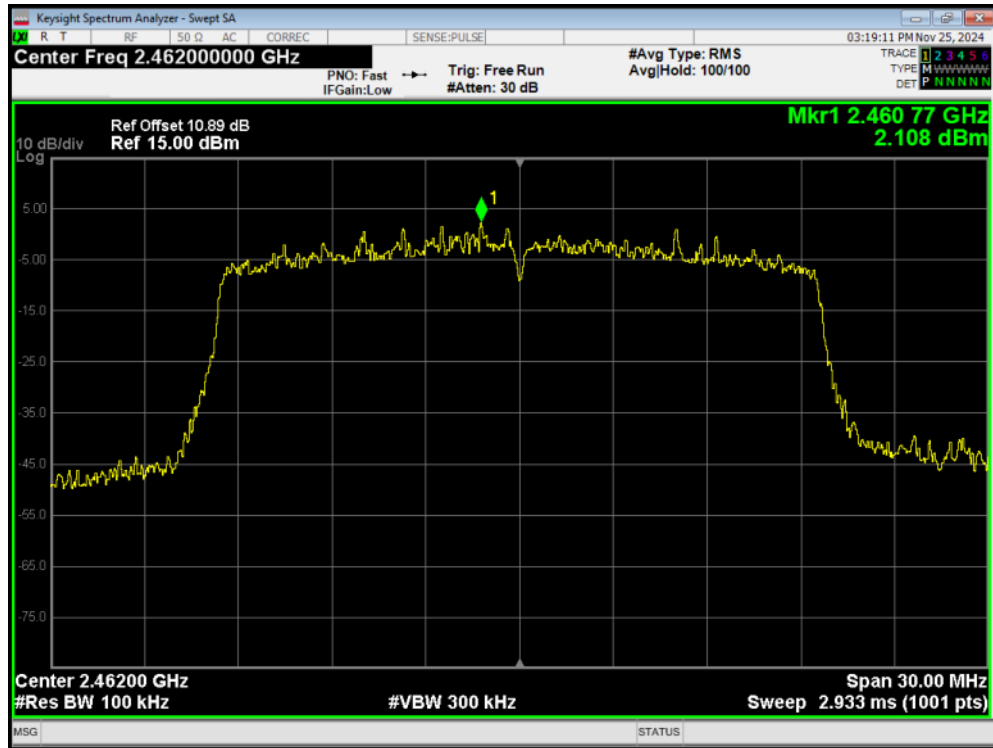


Tx. Spurious 802.11ax(HE20) 2462MHzEmission

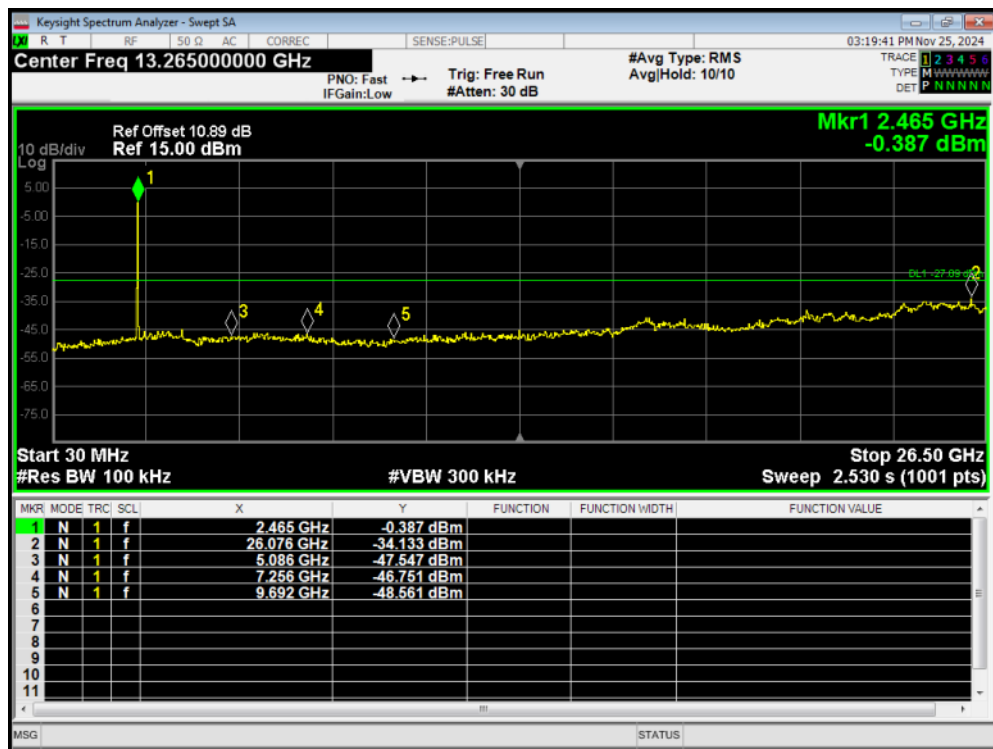


Tx. Spurious 802.11ax(HE40) 2422MHzRef

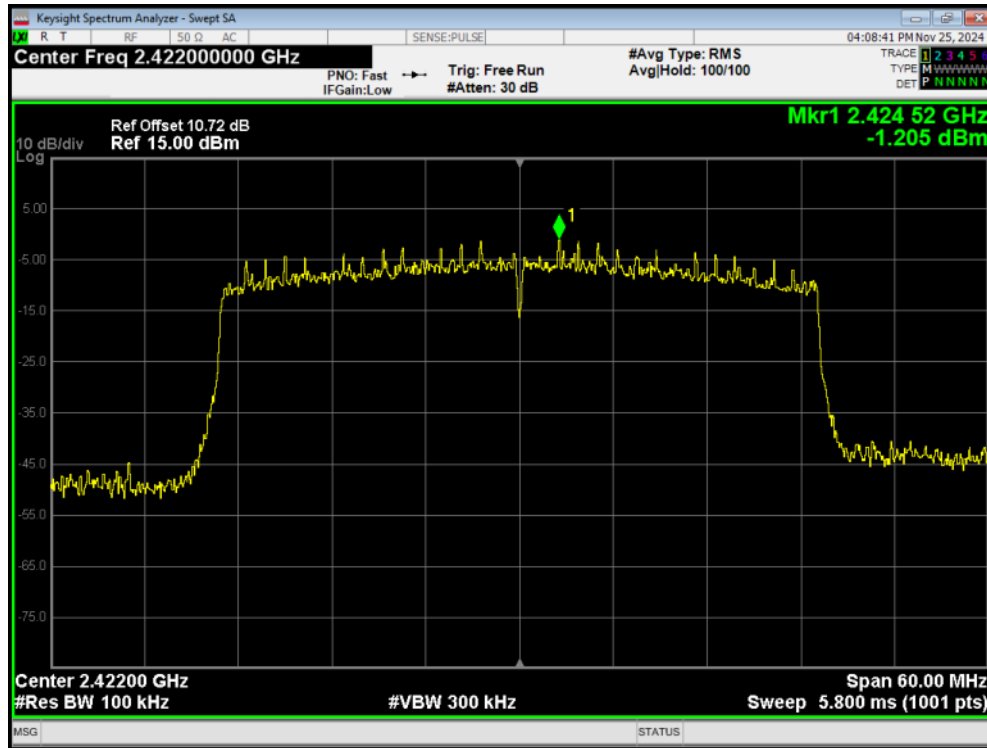


Tx. Spurious 802.11ax(HE40) 2422MHzEmission

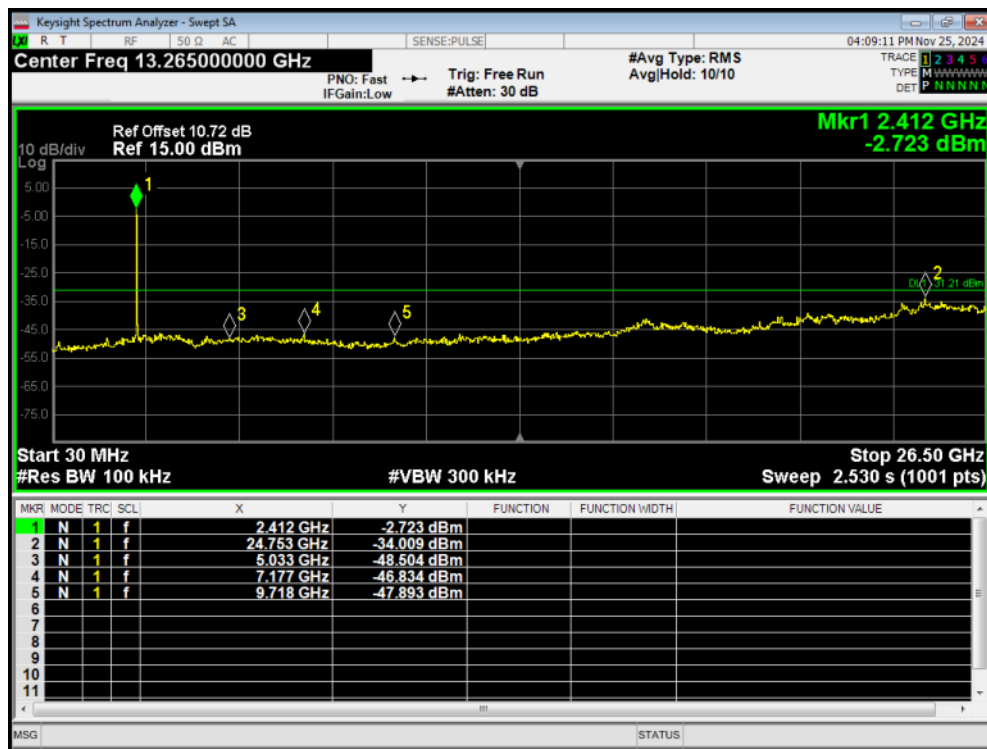


Tx. Spurious 802.11ax(HE40) 2427MHzRef

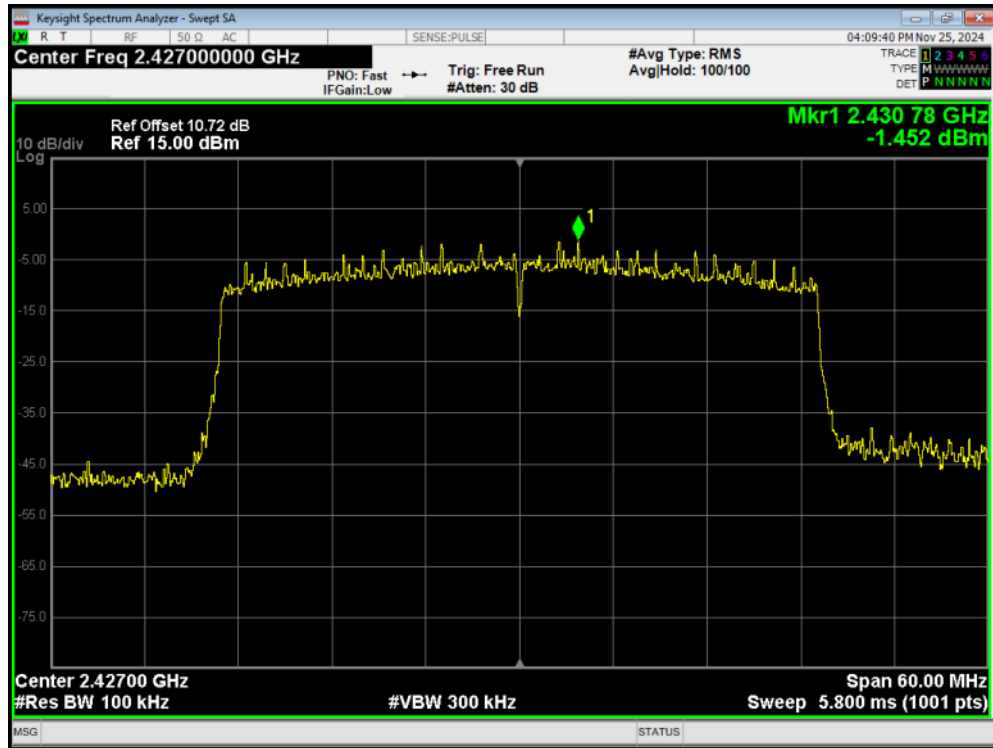


Tx. Spurious 802.11ax(HE40) 2427MHzEmission

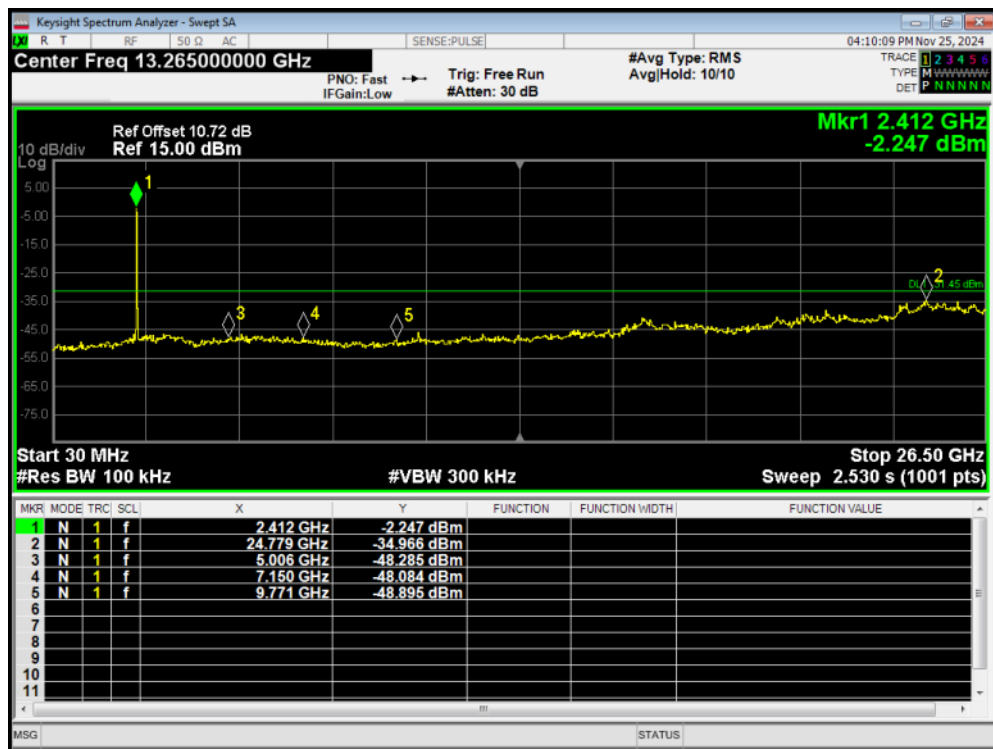


Tx. Spurious 802.11ax(HE40) 2432MHzRef

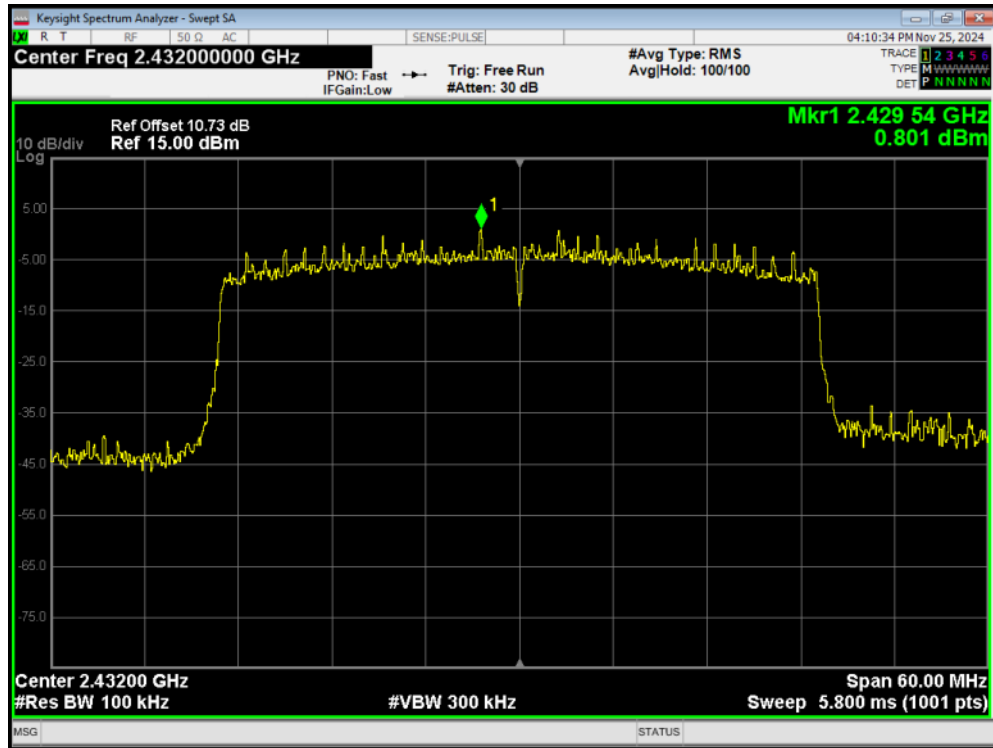


Tx. Spurious 802.11ax(HE40) 2432MHzEmission

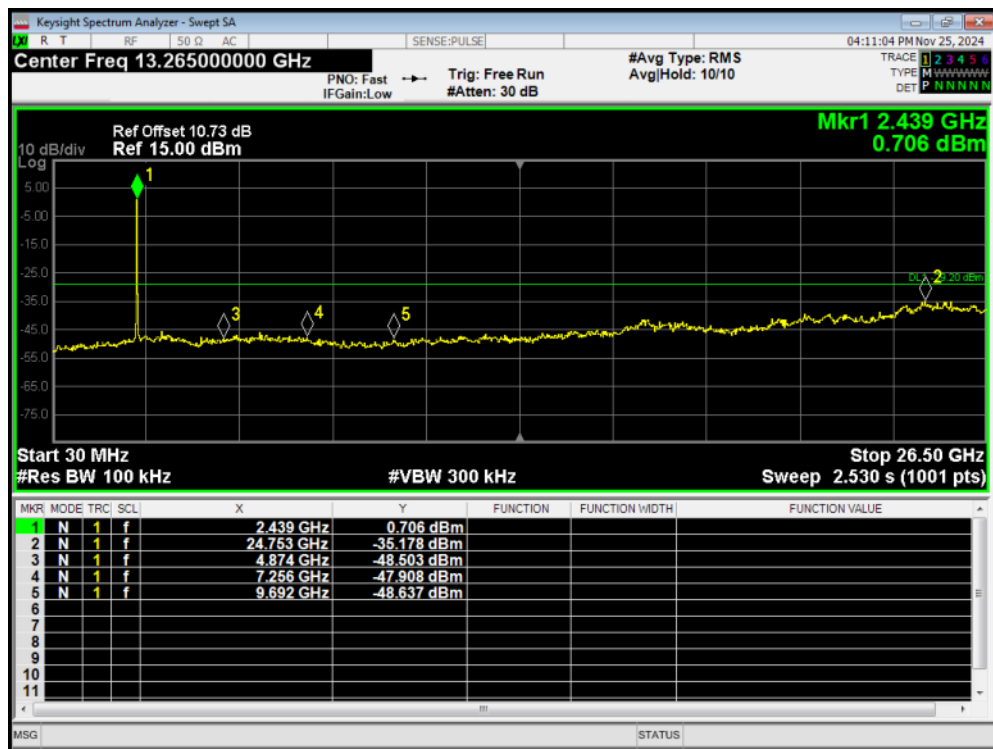


Tx. Spurious 802.11ax(HE40) 2437MHzRef

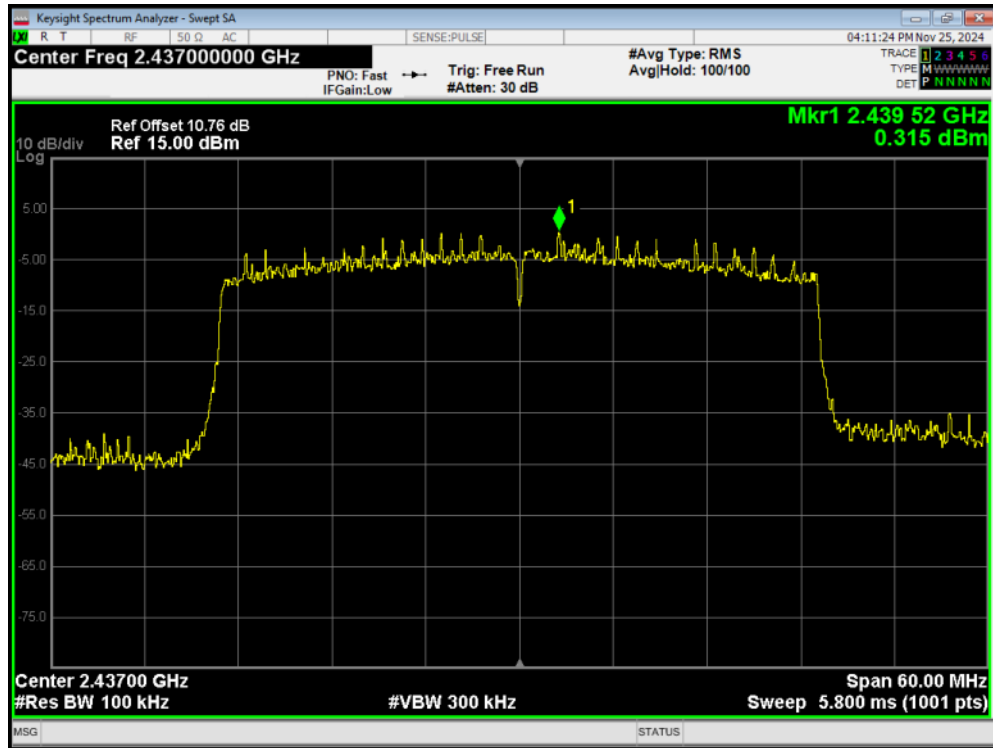

Tx. Spurious 802.11ax(HE40) 2437MHzEmission

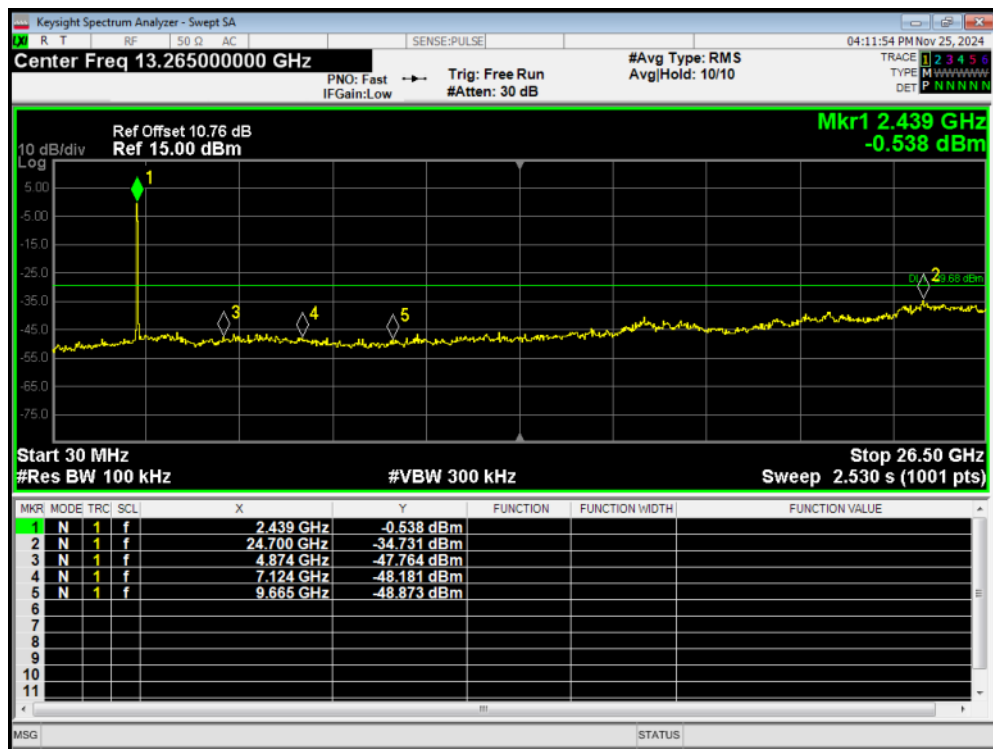

Tx. Spurious 802.11ax(HE40) 2442MHzRef

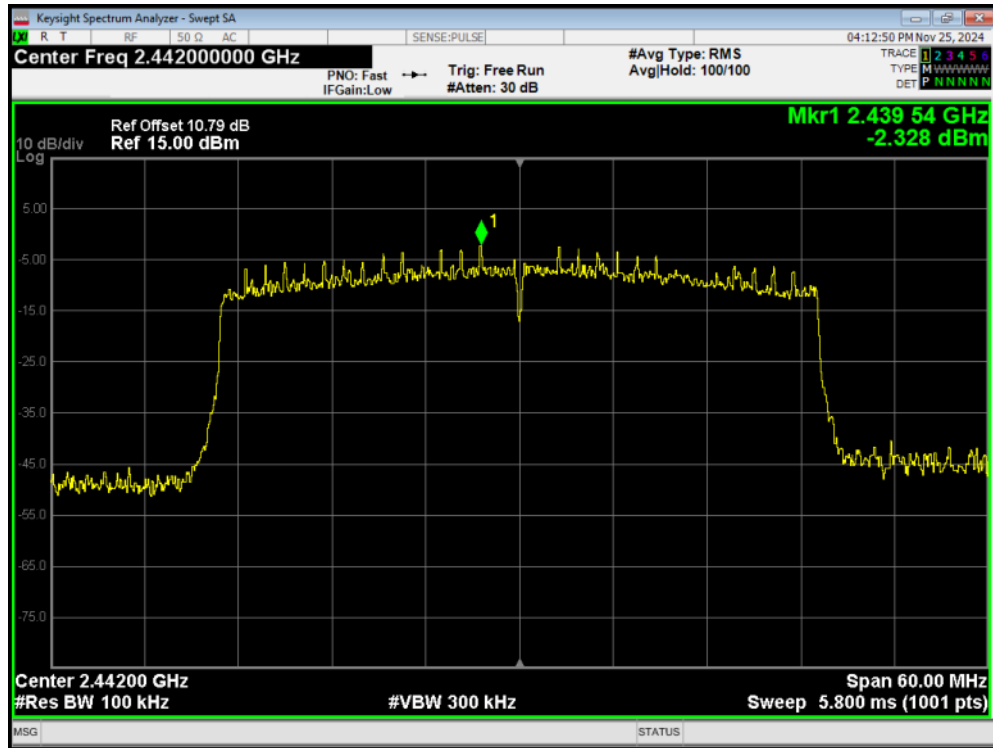

Tx. Spurious 802.11ax(HE40) 2442MHzEmission

