




PSD 802.11n(HT20) 5825MHz Ant1

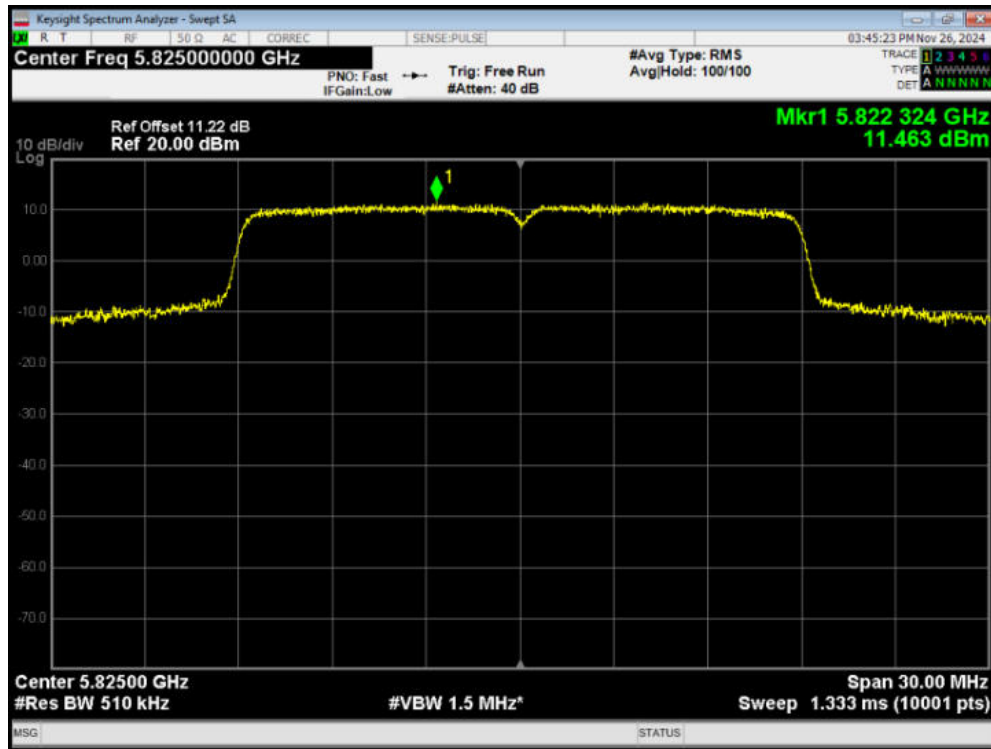


PSD 802.11n(HT20) 5825MHz Ant2

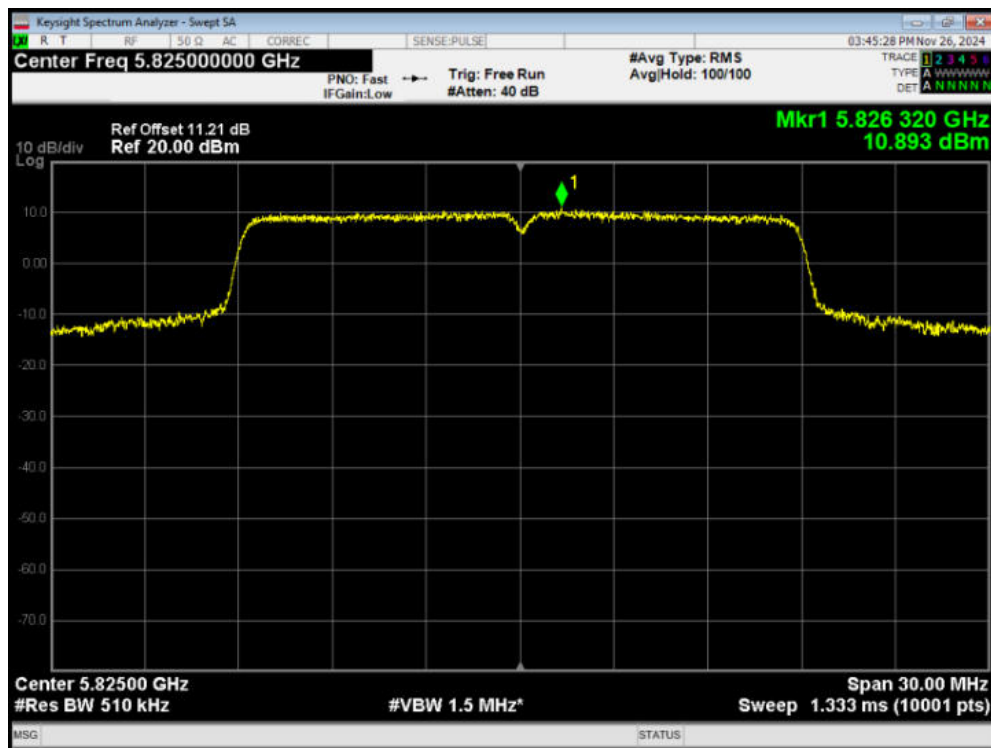


PSD 802.11n(HT40) 5755MHz Ant1

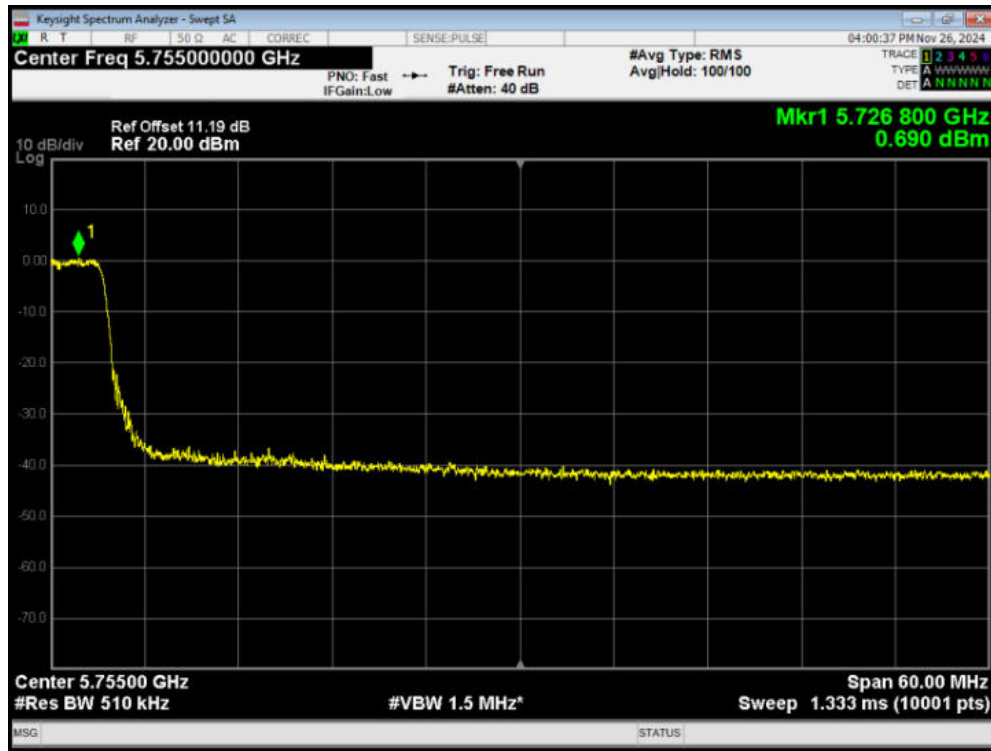


PSD 802.11n(HT40) 5755MHz Ant2

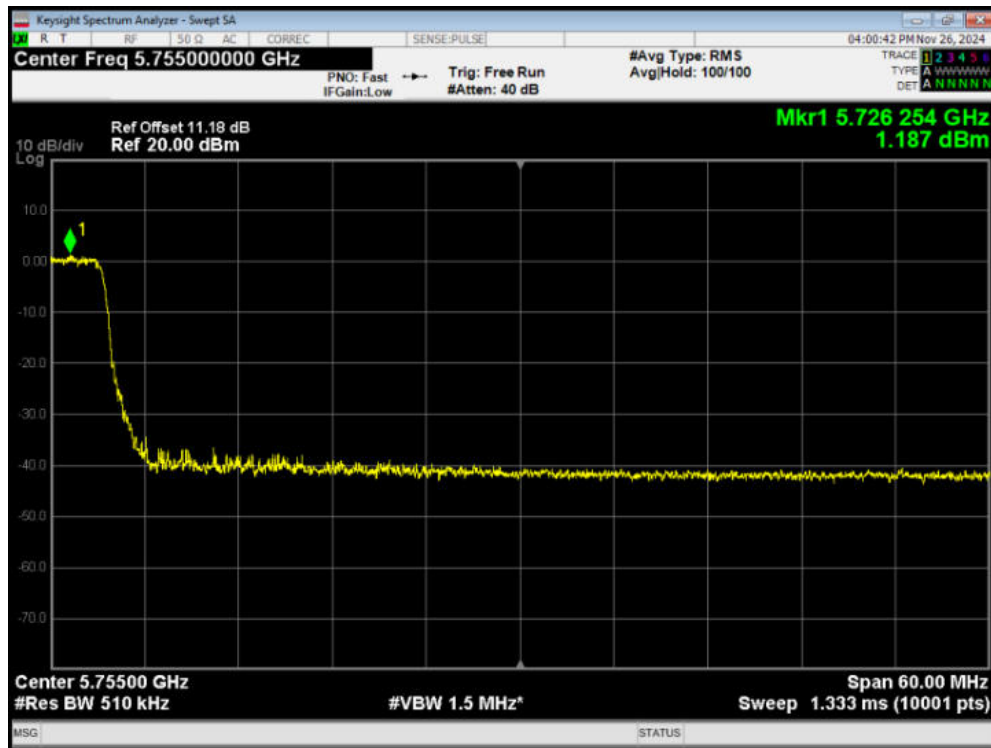


PSD 802.11n(HT40) 5755MHz Ant1

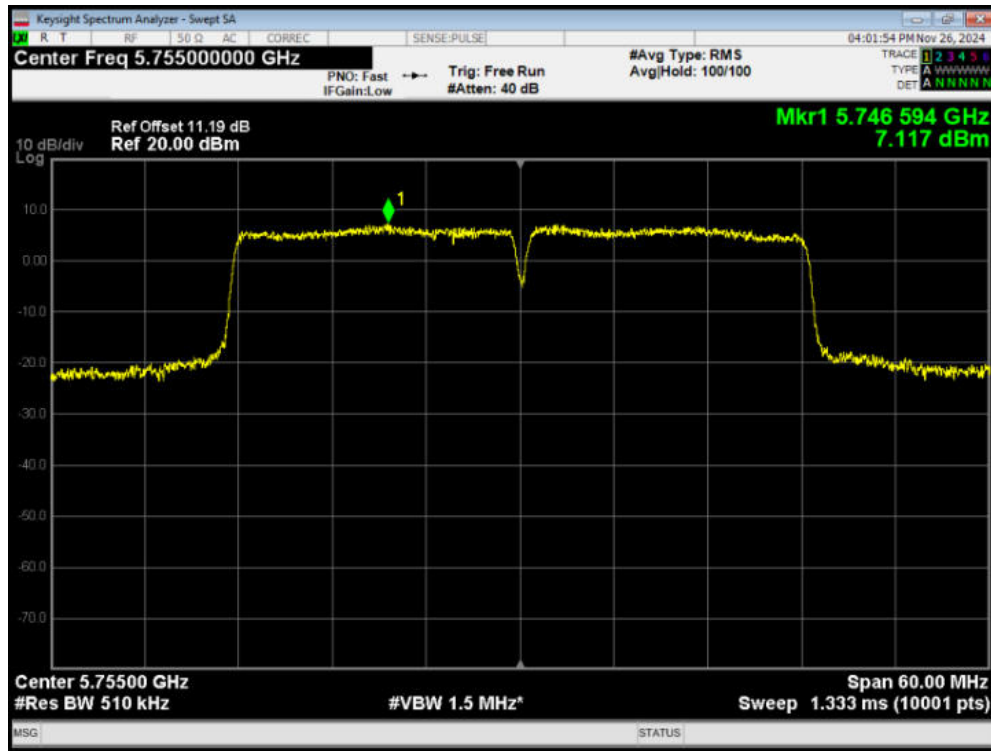


PSD 802.11n(HT40) 5755MHz Ant2

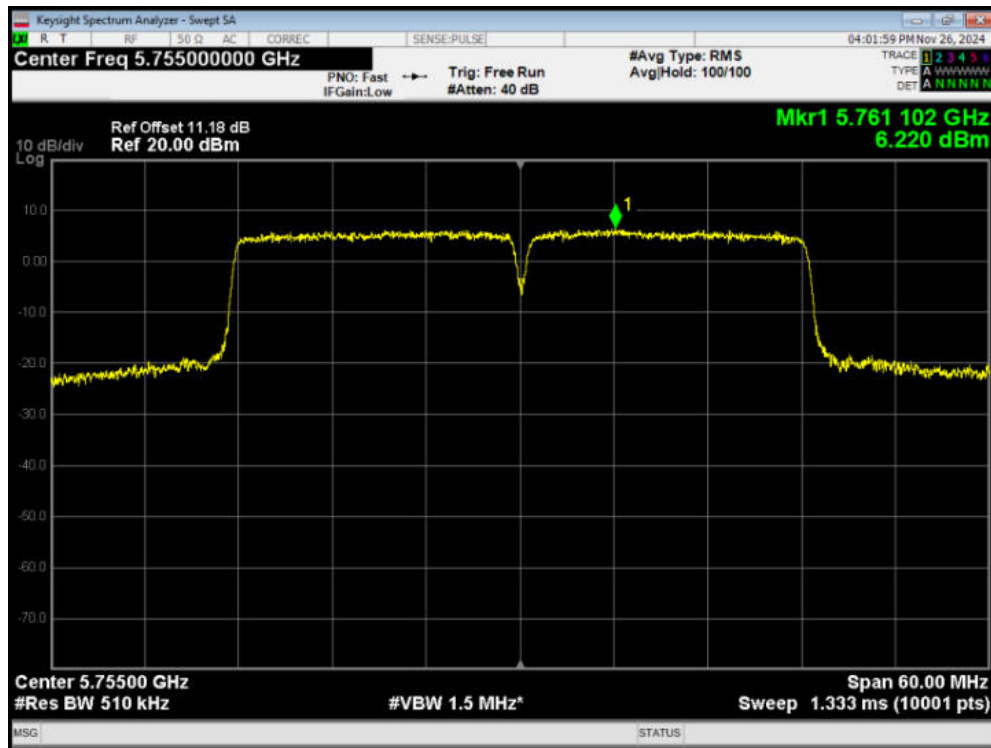

PSD 802.11n(HT40) 5795MHz Ant1

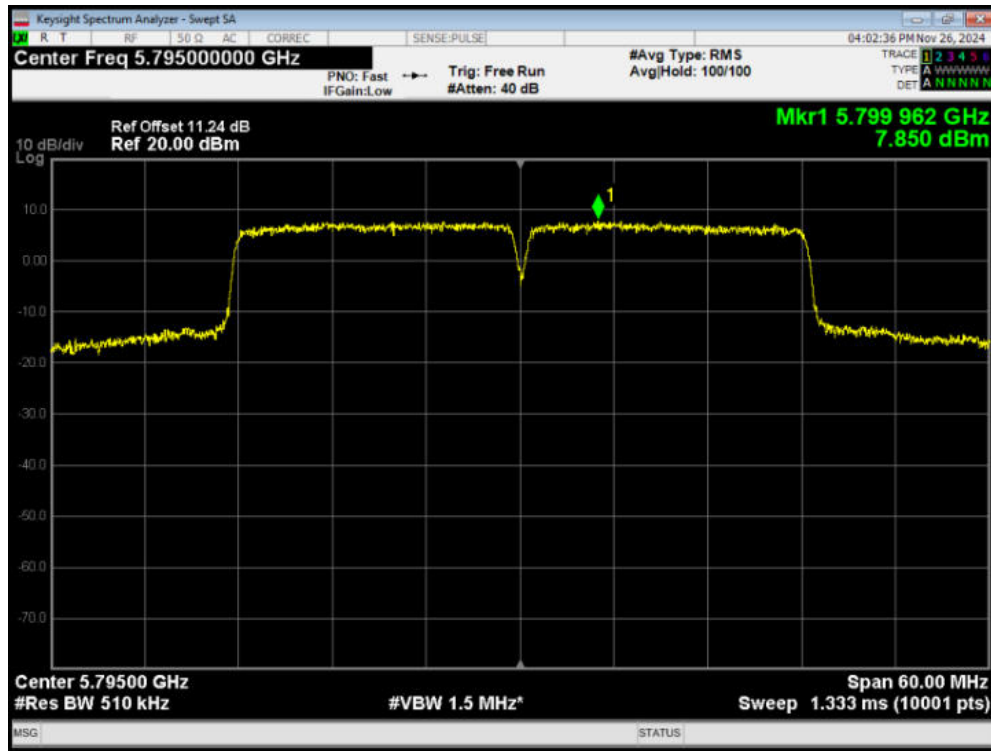

PSD 802.11n(HT40) 5795MHz Ant2

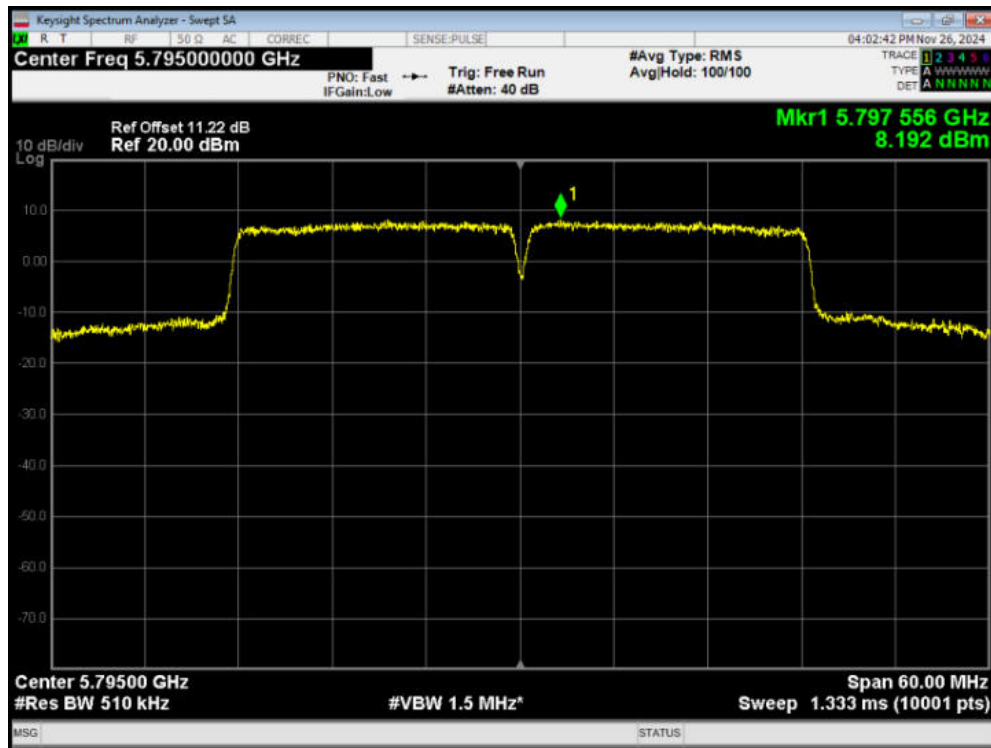

5.5. Unwanted Emission

Ambient condition

Temperature	Relative humidity	Pressure
15°C ~ 35°C	20% ~ 80%	86 kPa ~ 106 kPa

Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10. The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The radiated emissions measurements were made in a typical installation configuration.

Sweep the whole frequency band range from 9kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

Set the spectrum analyzer in the following:

9kHz~150 kHz

RBW=200Hz, VBW=1kHz/ Sweep=AUTO

150 kHz~30MHz

RBW=9kHz, VBW=30kHz,/ Sweep=AUTO

Below 1GHz

RBW=100kHz / VBW=300kHz / Sweep=AUTO

a) Peak emission levels are measured by setting the instrument as follows:

Above 1GHz

PEAK: RBW=1MHz VBW=3MHz/ Sweep=AUTO

b) Average emission levels are measured by setting the instrument as follows:

Above 1GHz

AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO

c) Detector: The measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)

e) Sweep time = auto.

f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of 1 / D, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and

OFF with the transmit cycle, at least 100 traces shall be averaged.)

g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.

2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.

3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.


Reduce the video bandwidth until no significant variations in the displayed signal are observed in subsequent traces, provided the video bandwidth is no less than 1 Hz. For regulatory requirements that specify averaging only over the transmit duration (e.g., digital transmission system [DTS] and Unlicensed National Information Infrastructure [U-NII]), the video bandwidth shall be greater than $[1 / (\text{minimum transmitter on time})]$ and no less than 1 Hz.

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the loop antenna is vertical, others antenna are vertical and horizontal.


The test is in transmitting mode.

Test setup


9kHz~ 30MHz

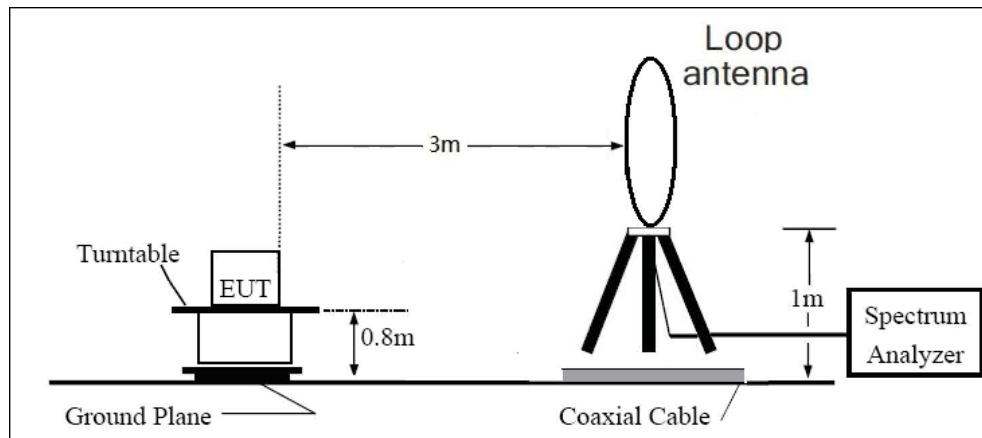

30MHz~ 1GHz

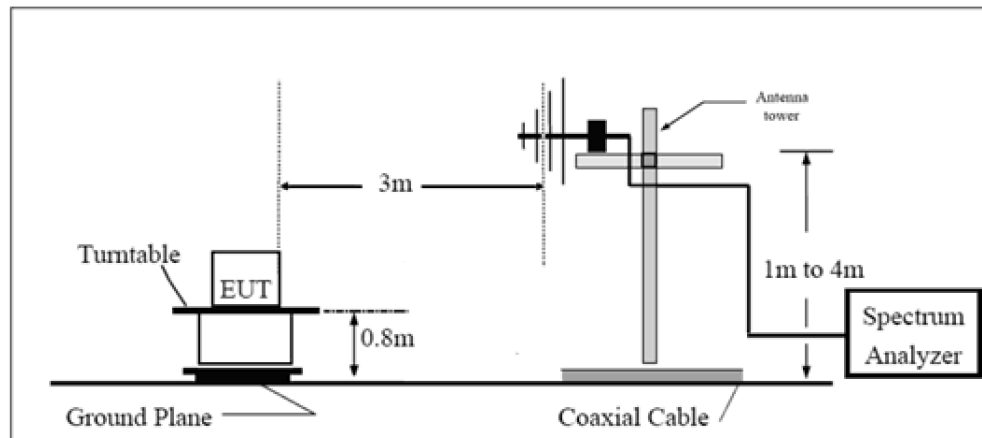

Above 1GHz

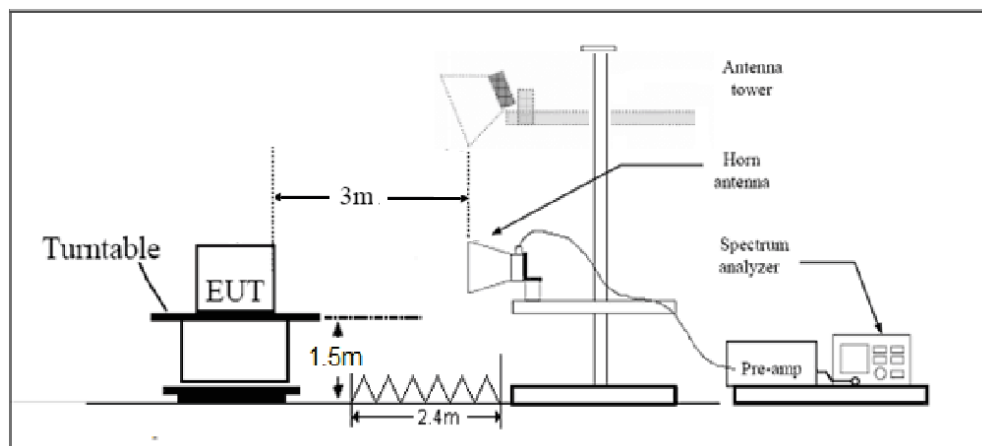

Note: Area side:2.4mX3.6m

Limits

- (1) For transmitters operating in the 5725-5850 MHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (2) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz(68.2dBμV/m).
- (3) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz(68.2dBμV/m).
- (4) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz(68.2dBμV/m).

Note: the following formula is used to convert the EIRP to field strength

§1、 $E[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] - 20 \log(d[\text{meters}]) + 104.77$, where E = field strength and

d = distance at which field strength limit is specified in the rules;

§2、 $E[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] + 95.2$, for d = 3 meters

- (5) Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table.

Frequency of emission (MHz)	Field strength(μV/m)	Field strength(dBμV/m)
0.009–0.490	2400/F(kHz)	/
0.490–1.705	24000/F(kHz)	/
1.705–30.0	30	/
30-88	100	40
88-216	150	43.5
216-960	200	46
Above960	500	54

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
9kHz-30MHz	3.55 dB
30MHz-200MHz	4.17 dB
200MHz-1GHz	4.84 dB
1-18GHz	4.35 dB
18-26.5GHz	5.90 dB
26.5GHz~40GHz	5.92 dB

Test Results:


The following graphs display the maximum values of horizontal and vertical by software.
Blue trace uses the peak detection, Green trace uses the average detection.

The modulation and bandwidth are similar for 802.11n mode for 20MHz/40MHz and 802.11ac mode for V20MHz/V40MHz, therefore investigated worst case to representative mode in test report.


A symbol (dBμV/m) in the test plot below means (dBpV/m)

The signal beyond the limit is carrier.

U-NII-1

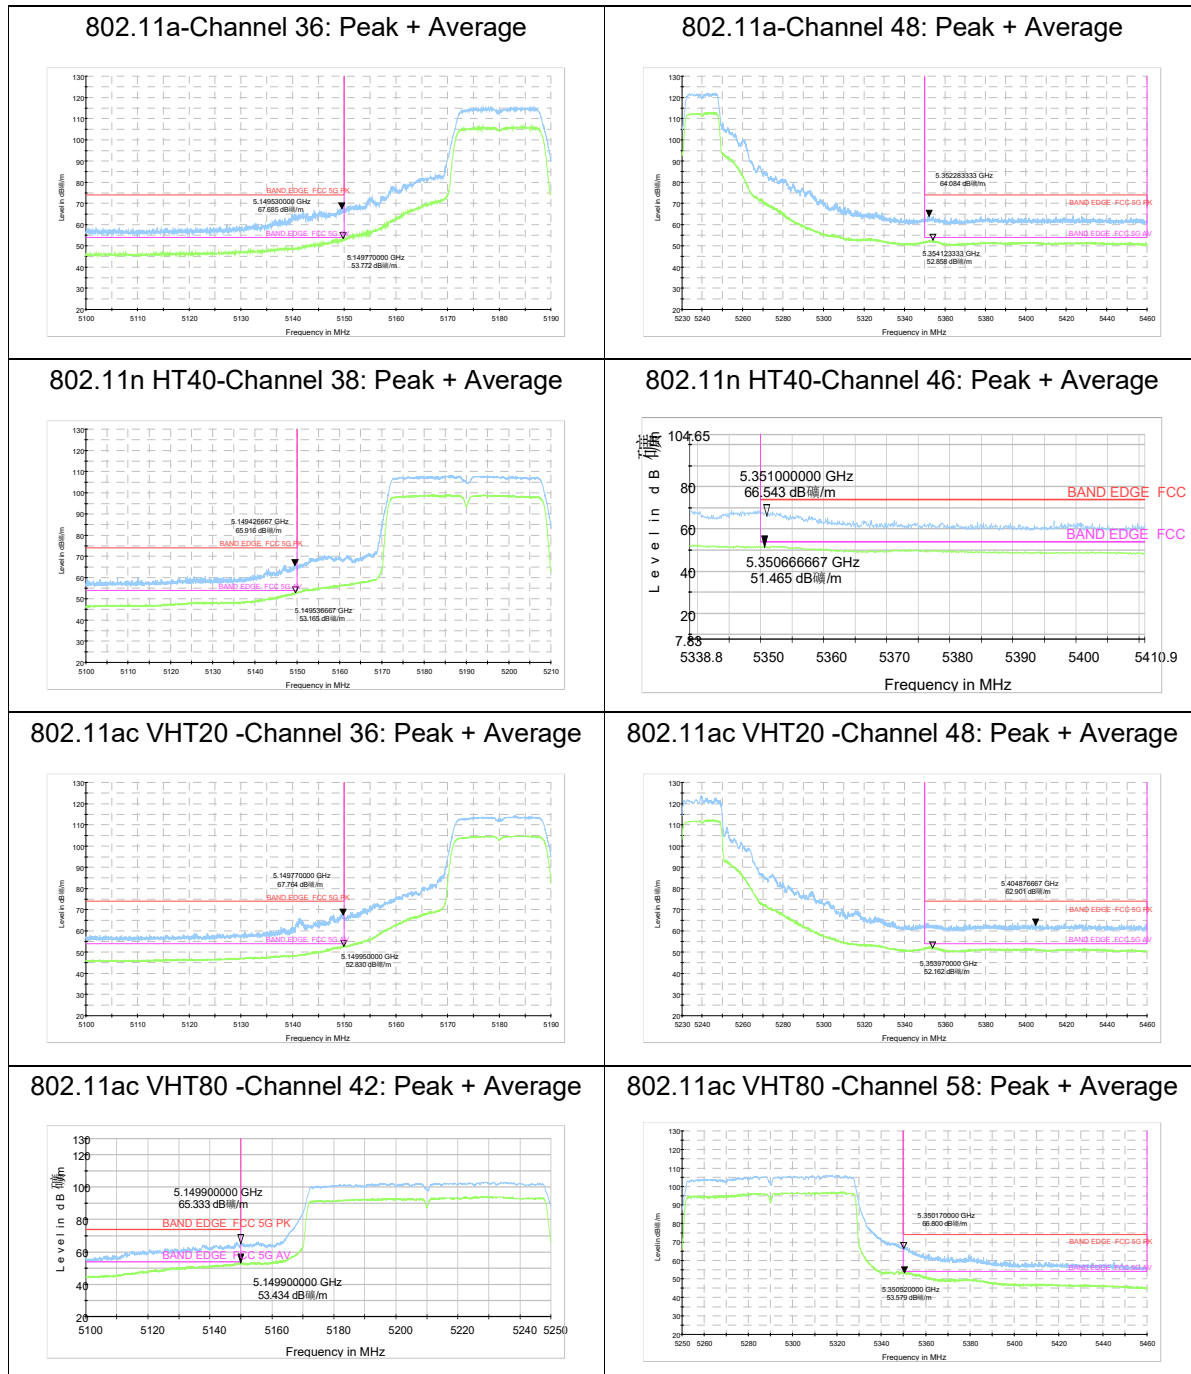


802.11ac VHT160-Channel 50: Peak + Average

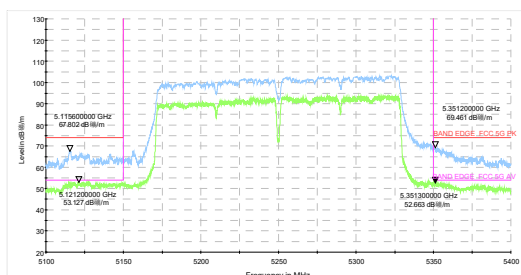


/


802.11ax HE20 -Channel 36: Peak + Average

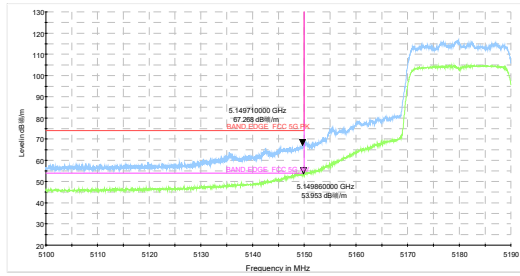


802.11ax HE20 -Channel 48: Peak + Average

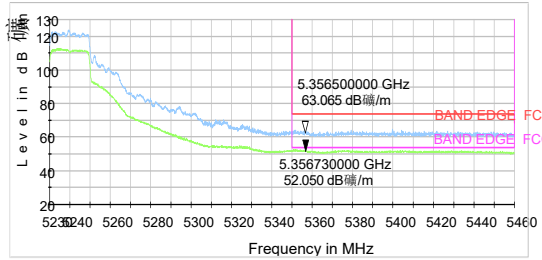


802.11ax HE40 -Channel 38: Peak + Average




802.11ax HE40 -Channel 46: Peak + Average




802.11ax HE80 -Channel 42: Peak + Average

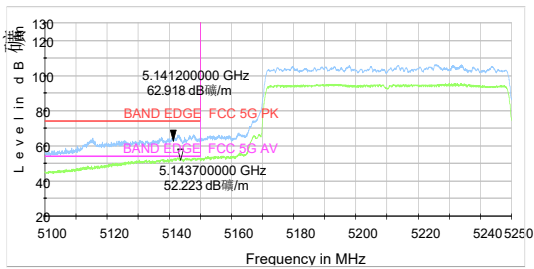

802.11ax HE80 -Channel 58: Peak + Average

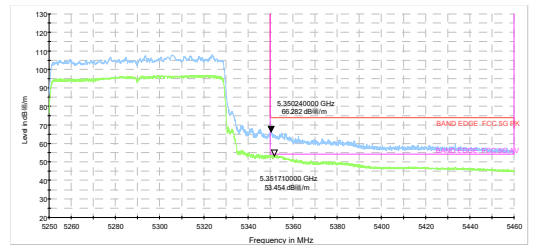


802.11ax HE160 -Channel 50: Peak + Average

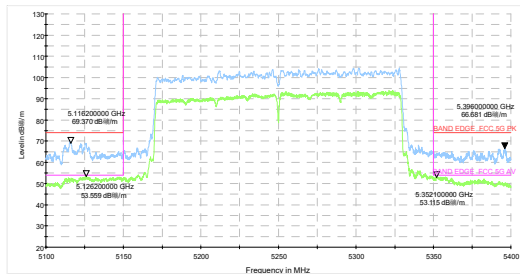


/

U-NII-2A


802.11a-Channel 52: Peak + Average

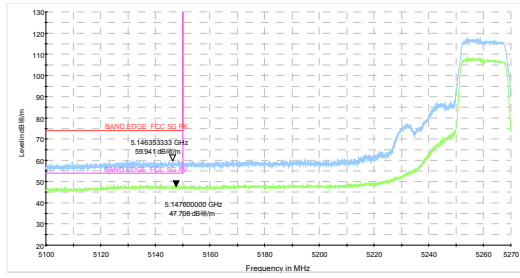


802.11a-Channel 64: Peak + Average

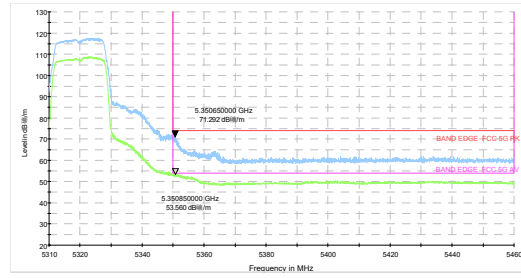


802.11n HT40-Channel 54: Peak + Average

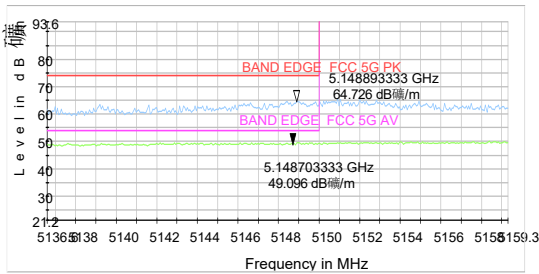


802.11n HT40-Channel 62: Peak + Average

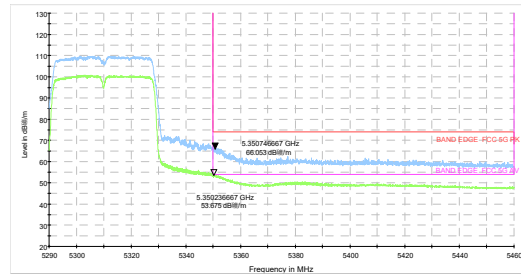


802.11ac VHT20 -Channel 52: Peak + Average

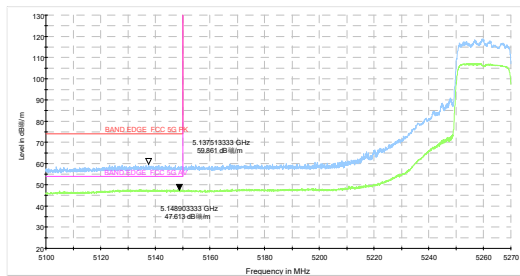


802.11ac VHT20 -Channel 64: Peak + Average

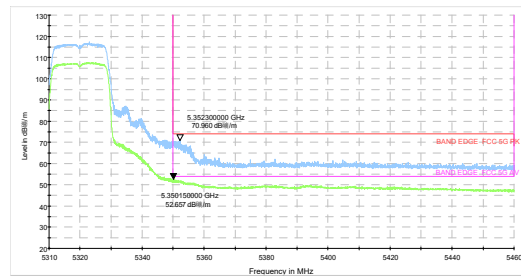


802.11ax HE20 -Channel 52: Peak + Average

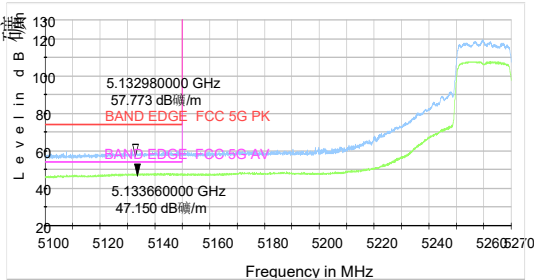


802.11ax HE20 -Channel 64: Peak + Average

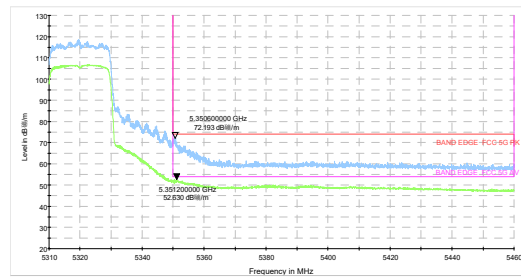

802.11ax HE40 -Channel 54: Peak + Average

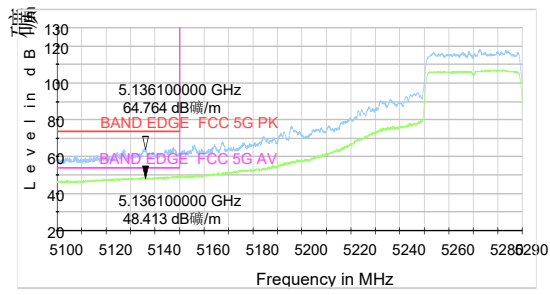


802.11ax HE40 -Channel 62: Peak + Average

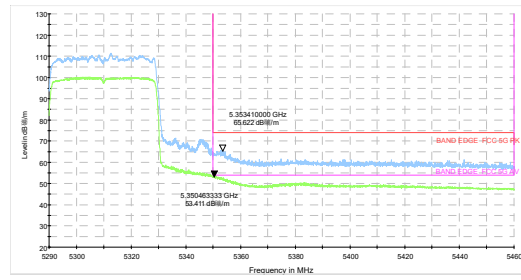


U-NII-2C


802.11a-Channel 100: Peak + Average

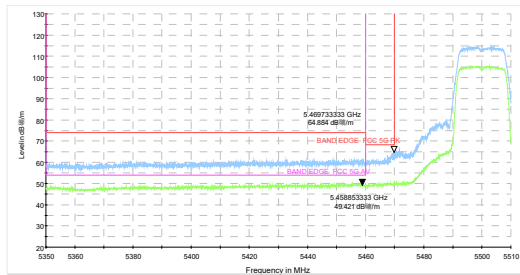

802.11a-Channel 140: Peak

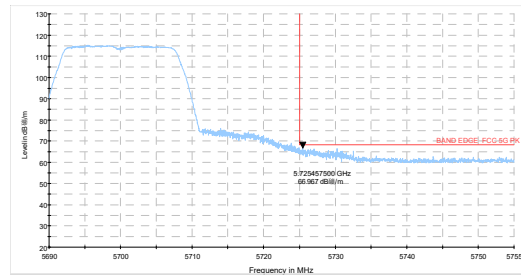


802.11n HT20-Channel 100: Peak

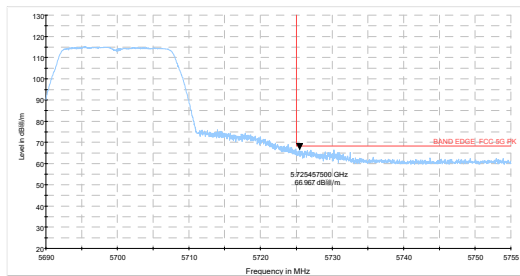


/


802.11n HT40-Channel 134: Peak

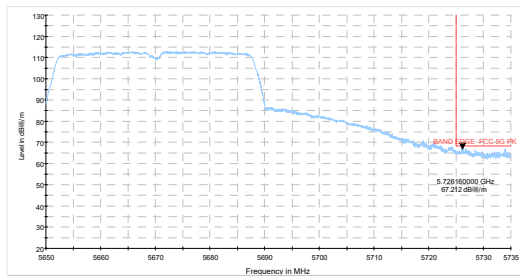


802.11n HT40-Channel 102: Peak + Average

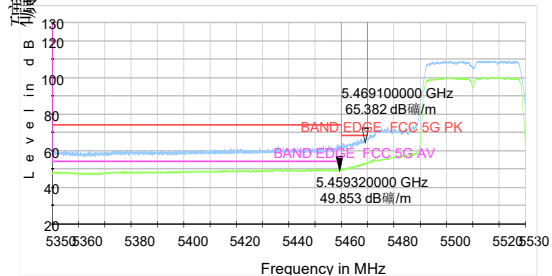


802.11ac VHT20 -Channel 100: Peak + Average

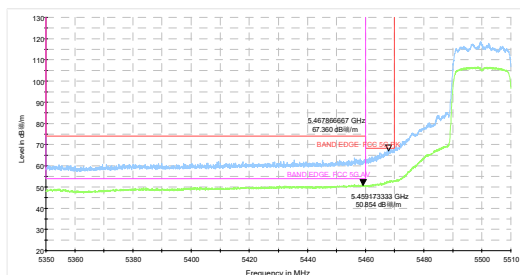

802.11ac VHT20-Channel 140: Peak

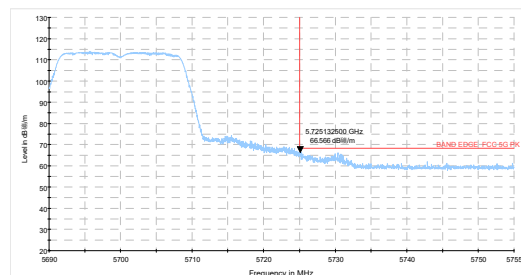


802.11ac VHT80-Channel 122: Peak




/

802.11ac VHT160-Channel 102: Peak + Average

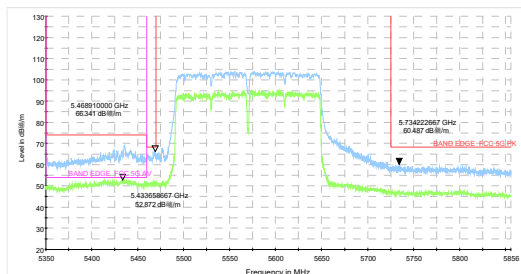


/


802.11ax HE20 -Channel 100: Peak + Average

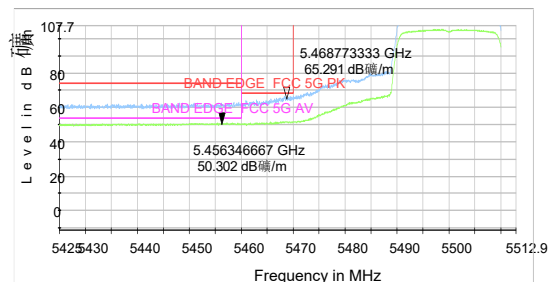


802.11ax HE20 -Channel 140: Peak

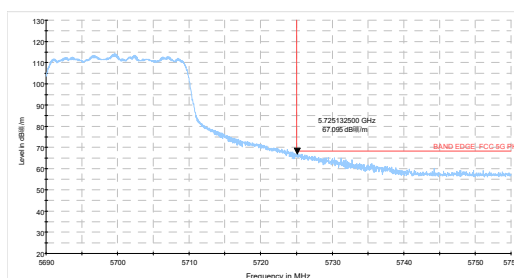


802.11ax HE40 -Channel 102: Peak + Average

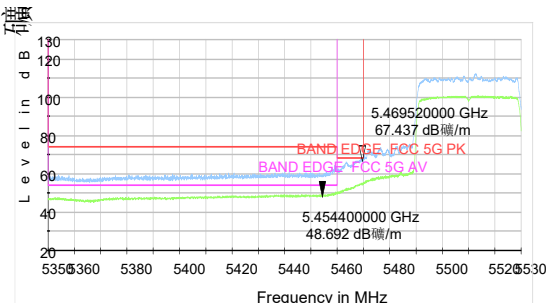


802.11ax HE40 -Channel 134: Peak

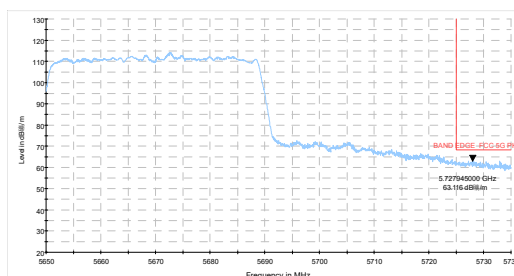

802.11ax HE80 -Channel 122: Peak

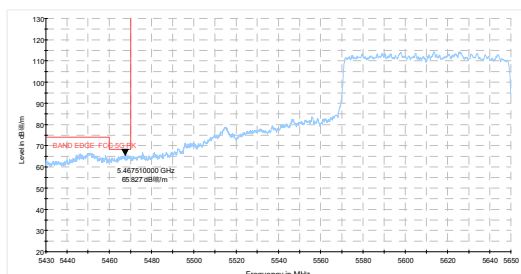


802.11ax HE160 -Channel 114: Peak + Average

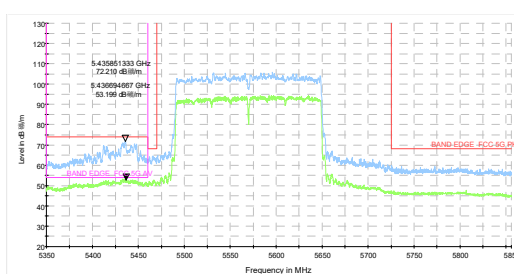


U-NII-3


802.11a-Channel 149: Peak

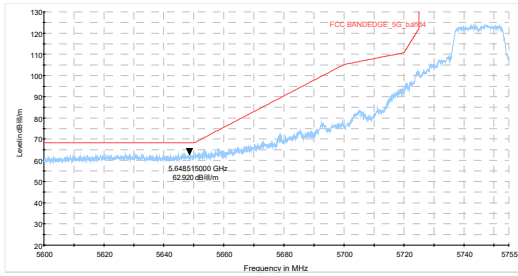


802.11a-Channel 165: Peak

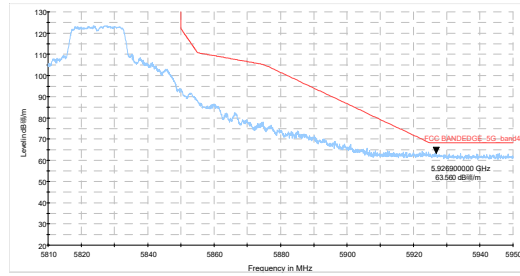


802.11n HT40-Channel 151: Peak




802.11n HT40-Channel 159: Peak




802.11ac VHT20-Channel 149: Peak

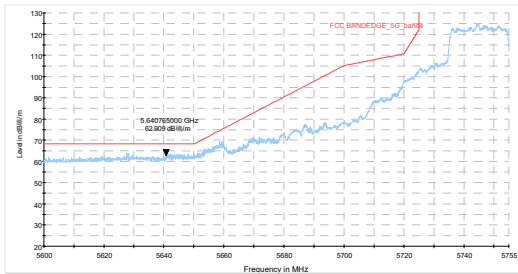

802.11ac VHT20-Channel 165: Peak

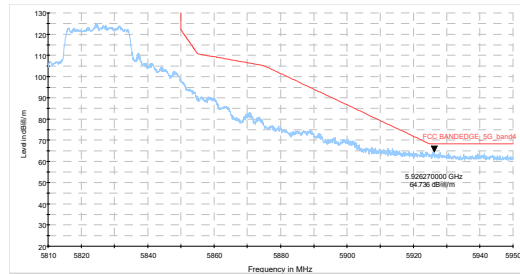


802.11ac VHT80- Channel 155: Peak




/


802.11ax HE20 -Channel 149: Peak

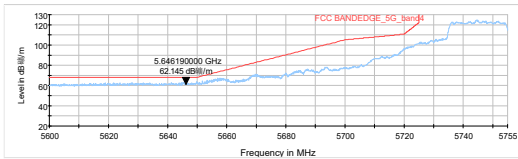


802.11ax HE20 -Channel 165: Peak

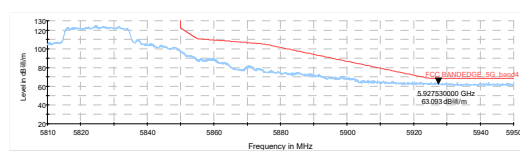

802.11ax HE40 -Channel 151: Peak



802.11ax HE40 -Channel 159: Peak



/

Result of RE

Test result

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier.

Continuous TX mode:

Remark:

1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)
2. Margin = Limit – Quasi-Peak/ MAX Peak/ Average
3. A symbol () in the test plot below means (dBμV/m)
4. For below 1GHz

QP Level @Spectrum Overview H

QP Level @Spectrum Overview V

QP Level @Final Results

QP Limit

For above 1GHz

PK Level @Spectrum Overview H

PK Level @Spectrum Overview V

PK Level @Final Results

PK Limit

AVG Level @Spectrum Overview H

AVG Level @Spectrum Overview V


AVG Level @Final Results

AVG Limit

During the test, the Radiates Emission from 9kHz to 1GHz was performed in all modes with all channels. The test data of the worst-case condition was recorded in this report.


A symbol () in the test plot below means (dBμV/m)

Continuous TX mode:

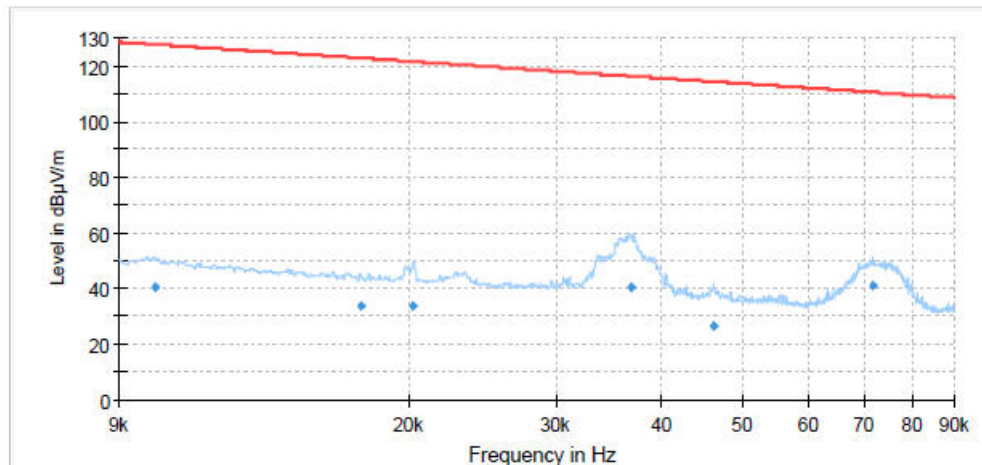


Final Result

Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Azimuth (deg)	Corr. (dB/m)
0.01	40.76	127.67	86.91	100.00	0.200	124.00	18
0.02	33.61	122.75	89.14	100.00	0.200	350.00	17
0.02	33.65	121.48	87.83	100.00	0.200	268.00	17
0.04	40.75	116.25	75.50	100.00	0.200	278.00	17
0.05	26.39	114.30	87.90	100.00	0.200	23.00	17
0.07	40.93	110.48	69.55	100.00	0.200	268.00	17

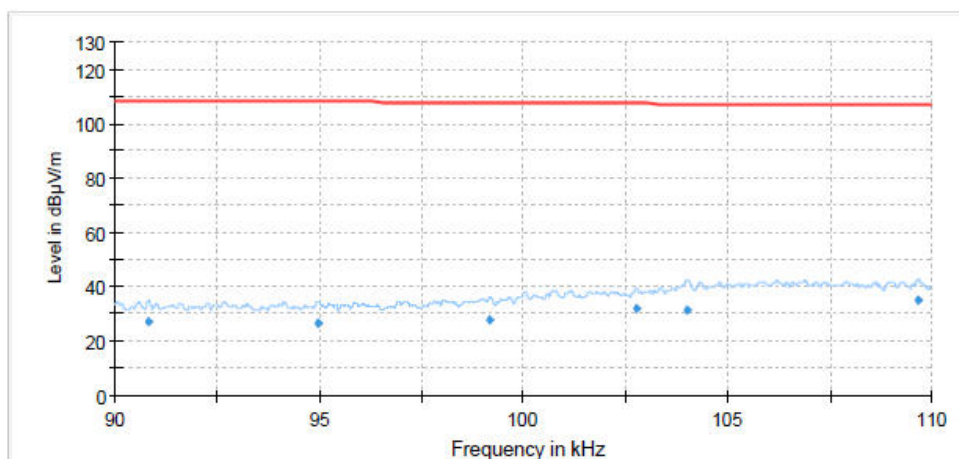


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Azimuth (deg)	Corr. (dB/m)
0.09	27.16	108.44	81.28	100.00	0.200	263.00	17
0.09	26.36	108.05	81.69	100.00	0.200	282.00	17
0.10	28.09	107.68	79.58	100.00	0.200	247.00	17
0.10	32.22	107.37	75.15	100.00	0.200	286.00	17
0.10	31.55	107.26	75.72	100.00	0.200	278.00	17
0.11	34.81	106.80	71.99	100.00	0.200	255.00	17

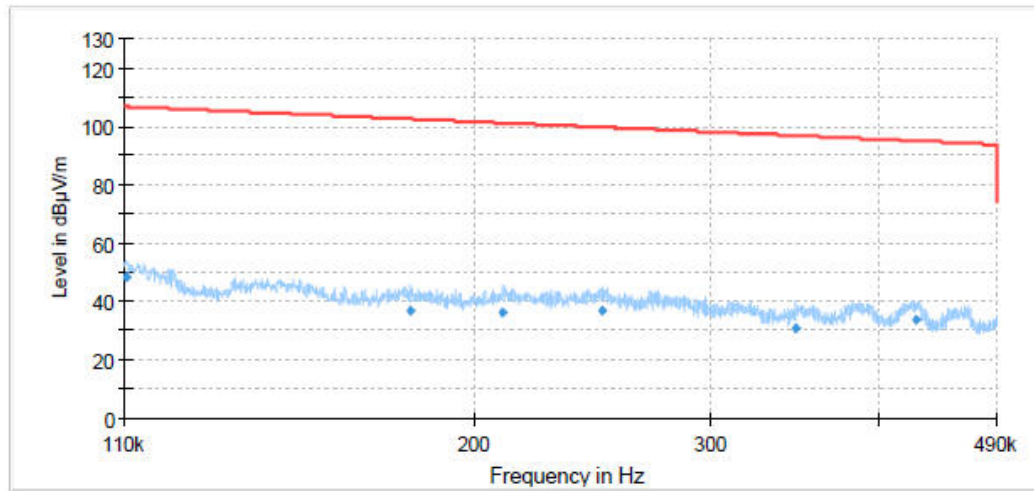


Final Result

Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Azimuth (deg)	Corr. (dB/m)
0.11	48.53	106.75	58.22	100.00	9.000	272.00	17
0.18	36.90	102.52	65.62	100.00	9.000	262.00	17
0.21	36.01	101.14	65.13	100.00	9.000	287.00	17
0.25	36.79	99.68	62.89	100.00	9.000	266.00	17
0.35	30.55	96.79	66.24	100.00	9.000	262.00	17
0.43	34.04	95.00	60.97	100.00	9.000	272.00	17

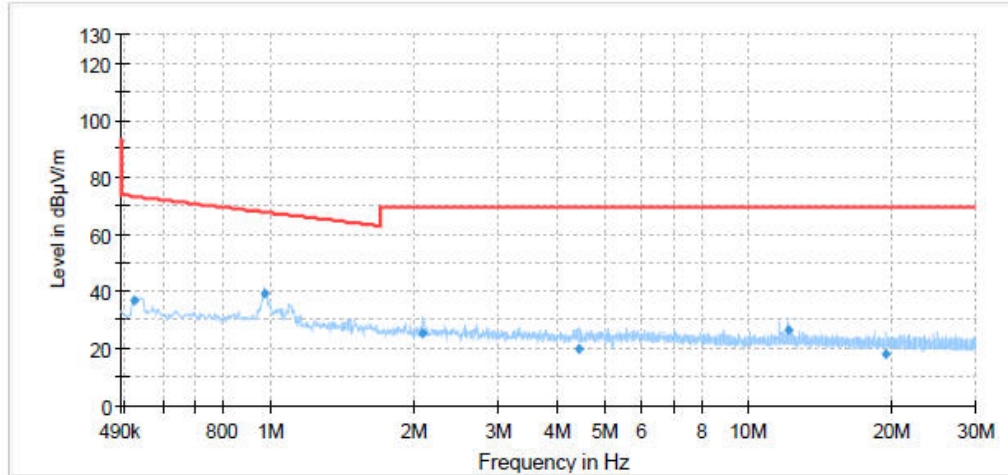

Final Result


Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Azimuth (deg)	Corr. (dB/m)
0.52	36.72	73.23	36.51	100.00	9.000	281.00	17
0.98	39.38	67.77	28.39	100.00	9.000	179.00	17
2.10	25.15	69.50	44.35	100.00	9.000	0.00	17
4.42	20.21	69.50	49.29	100.00	9.000	92.00	17
12.12	26.32	69.50	43.18	100.00	9.000	66.00	17
19.38	18.05	69.50	51.45	100.00	9.000	0.00	17

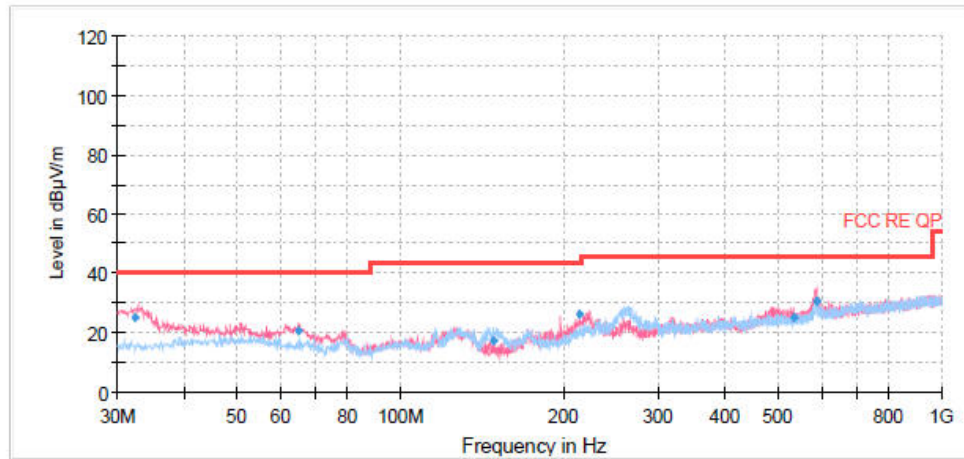

Final Result


Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
32.35	25.25	40.00	14.75	1000.00	100.0	V	320.00	17
64.88	20.53	40.00	19.47	1000.00	107.0	V	278.00	18
148.90	17.18	43.50	26.32	1000.00	180.0	H	115.00	15
214.50	25.96	43.50	17.54	1000.00	204.0	V	212.00	18
533.51	25.29	46.00	20.71	1000.00	100.0	V	156.00	26
588.72	30.77	46.00	15.23	1000.00	100.0	V	96.00	27

802.11a CH36

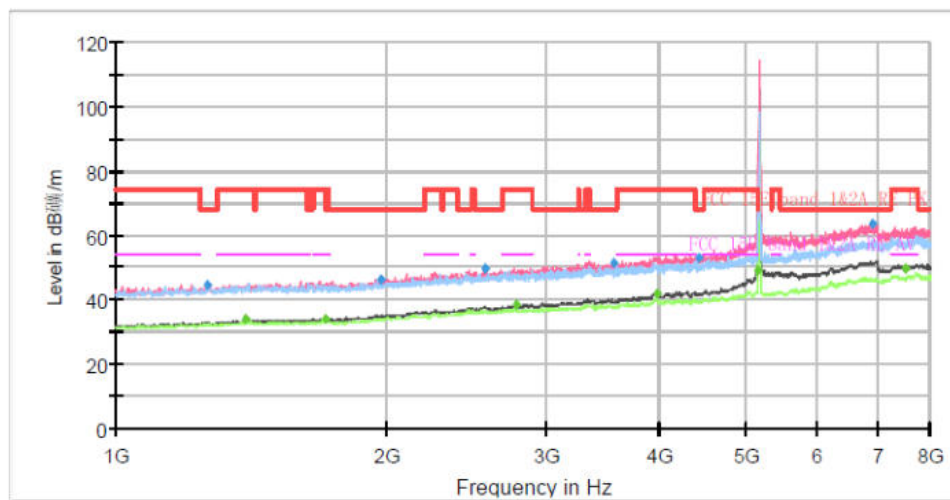

Final Result


Frequency (MHz)	MaxPeak (dBV/m)	Average (dBV/m)	Limit (dBV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1264.25	44.51	---	68.20	23.69	500.00	200.0	H	117.00	-4
1395.50	---	33.77	54.00	20.23	500.00	200.0	V	68.00	-3
1707.00	---	33.95	54.00	20.05	500.00	200.0	V	24.00	-2
1969.50	46.35	---	68.20	21.85	500.00	200.0	V	5.00	0
2566.25	49.78	---	68.20	18.42	500.00	200.0	V	78.00	3
2786.75	---	38.31	54.00	15.69	500.00	200.0	V	0.00	3
3570.75	51.46	---	68.20	16.74	500.00	200.0	V	1.00	4
3980.25	---	42.11	54.00	11.89	500.00	200.0	V	12.00	7
4444.00	52.88	---	68.20	15.32	500.00	200.0	V	3.00	7
5147.50	---	49.17	54.00	4.83	500.00	200.0	V	78.00	10
6897.50	63.41	---	68.20	4.79	500.00	200.0	V	48.00	14
7506.50	---	49.58	54.00	4.42	500.00	200.0	V	5.00	16

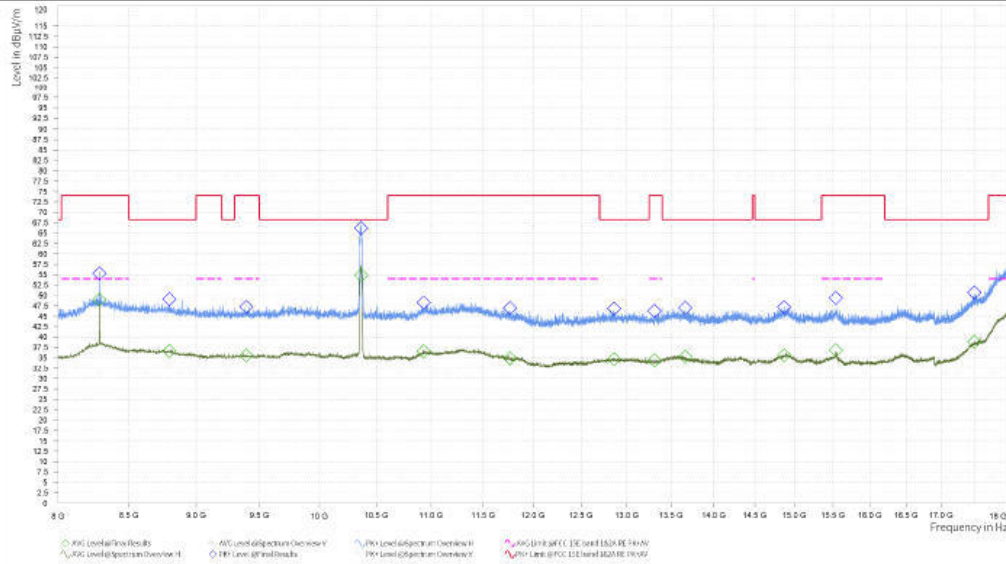

EMI Final Results


Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. Time [s]
1	8,287.500	55.25	74.00	18.75	48.95	54.00	5.05	8.80	H	158.8	2.00	1.000
1	8,797.500	49.05	68.20	19.15	36.59			5.41	H	282.5	2.00	1.000
1	9,393.750	47.19	74.00	26.81	35.54	54.00	18.46	5.40	H	289.9	2.00	1.000
1	10,361.250	66.19	68.20	2.01	54.84			5.74	H	333.7	2.00	1.000
1	10,930.000	48.27	74.00	25.73	36.55	54.00	17.45	6.39	H	311.7	2.00	1.000
1	11,763.750	46.92	74.00	27.08	34.84	54.00	19.16	6.19	H	340.8	2.00	1.000
1	12,858.750	46.80	68.20	21.40	34.66			5.60	H	326.2	2.00	1.000
1	13,307.500	46.27	74.00	27.73	34.39	54.00	19.61	5.49	H	360	2.00	1.000
1	13,662.500	47.02	68.20	21.18	35.21			6.22	V	2.5	2.00	1.000
1	14,865.000	47.13	68.20	21.07	35.59			6.32	V	121.7	2.00	1.000
1	15,535.000	49.41	74.00	24.59	36.81	54.00	17.19	5.82	H	304.5	2.00	1.000
1	17,487.500	50.67	68.20	17.53	38.81			10.76	H	282.5	2.00	1.000

802.11a CH40

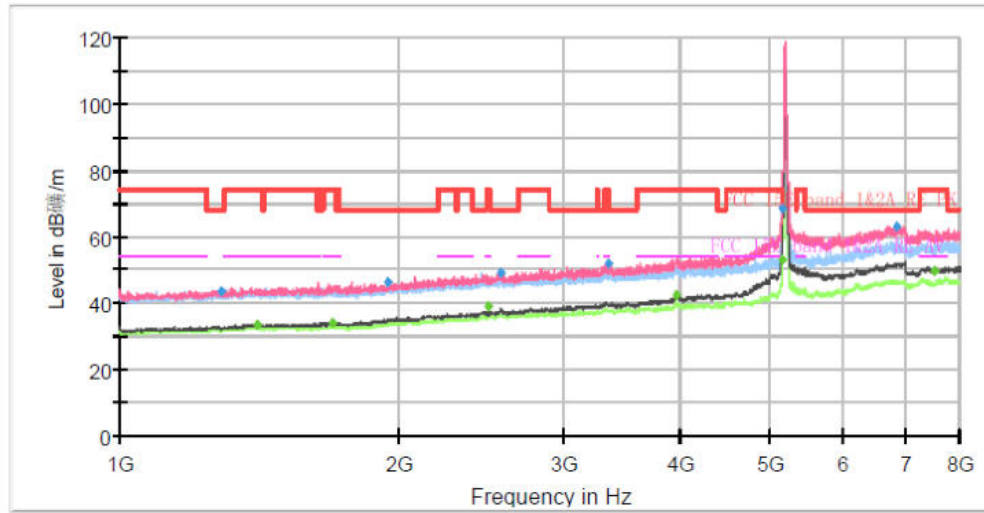

Final Result


Frequency (MHz)	MaxPeak (dBV/m)	Average (dBV/m)	Limit (dBV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1286.13	43.75	---	68.20	24.45	500.00	200.0	V	3.00	-4
1406.88	---	33.65	54.00	20.35	500.00	200.0	V	150.00	-3
1693.00	---	34.29	54.00	19.71	500.00	200.0	V	194.00	-2
1945.00	46.09	---	68.20	22.11	500.00	200.0	V	264.00	0
2488.38	---	38.80	54.00	15.20	500.00	200.0	V	142.00	2
2568.88	49.18	---	68.20	19.02	500.00	200.0	V	275.00	3
3359.88	51.68	---	68.20	16.52	500.00	200.0	V	185.00	4
3970.63	---	42.41	54.00	11.59	500.00	200.0	V	0.00	7
5147.50	---	52.80	54.00	1.20	500.00	200.0	V	89.00	10
5149.25	68.89	---	74.00	5.11	500.00	200.0	V	347.00	10
6848.50	63.13	---	68.20	5.07	500.00	200.0	V	22.00	14
7523.13	---	49.41	54.00	4.59	500.00	200.0	V	0.00	16

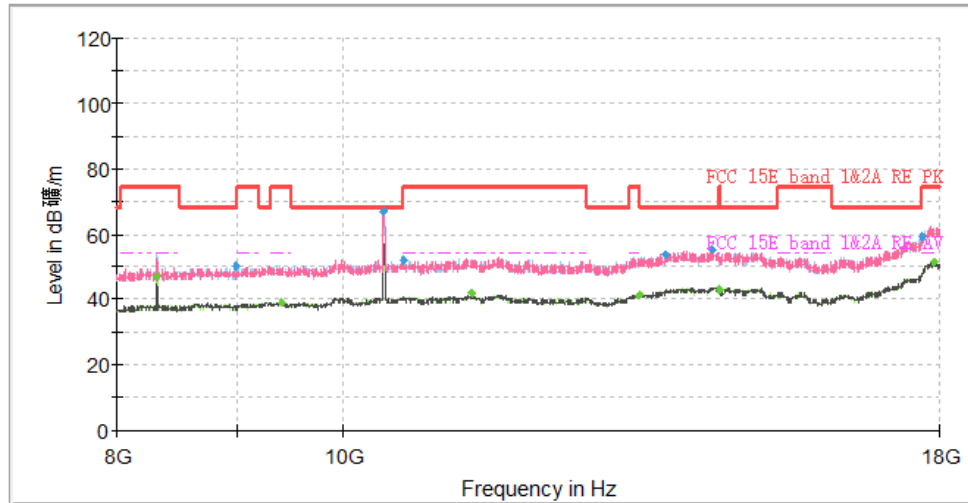

Final Result


Frequency (MHz)	MaxPeak (dBV/m)	Average (dBV/m)	Limit (dBVA/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)
8318.75	---	46.61	54.00	7.39	500.00	1000.000	H	355.00
8987.50	50.34	---	68.20	17.86	500.00	1000.000	H	217.00
9398.75	---	39.15	54.00	14.85	500.00	1000.000	H	140.00
10403.75	67.03	---	68.20	1.17	500.00	1000.000	V	127.00
10596.25	51.74	---	68.20	16.46	500.00	1000.000	H	75.00
11347.50	---	41.67	54.00	12.33	500.00	1000.000	V	63.00
13380.00	---	41.48	54.00	12.52	500.00	1000.000	H	350.00
13736.25	53.82	---	68.20	14.38	500.00	1000.000	H	317.00
14392.50	55.05	---	68.20	13.15	500.00	1000.000	V	52.00
14486.25	---	42.81	54.00	11.19	500.00	1000.000	H	317.00
17700.00	59.42	---	68.20	8.78	500.00	1000.000	V	258.00
17908.75	---	51.22	54.00	2.78	500.00	1000.000	H	75.00

802.11a CH48

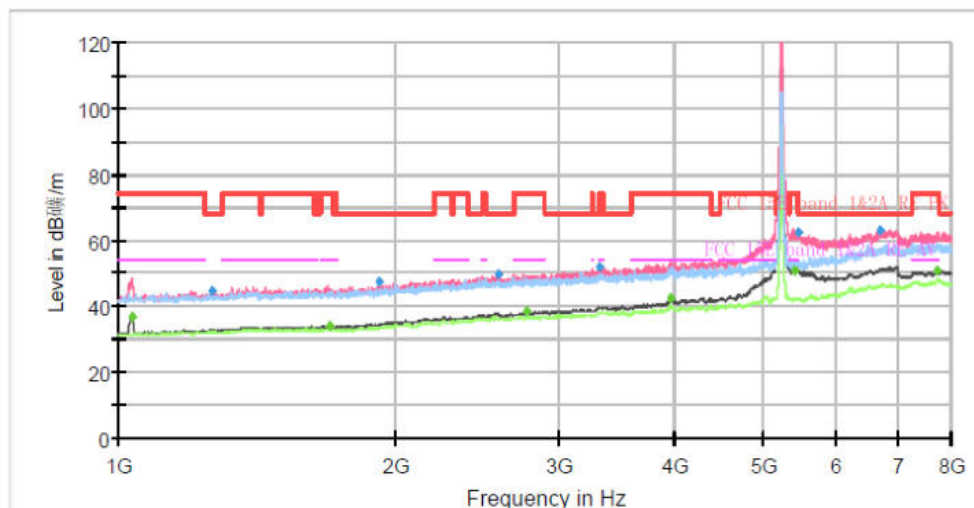

Final Result


Frequency (MHz)	MaxPeak (dBV/m)	Average (dBV/m)	Limit (dBV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1035.00	---	37.01	54.00	16.99	500.00	200.0	V	58.00	-5
1264.25	44.64	---	68.20	23.56	500.00	200.0	V	2.00	-4
1693.00	---	34.16	54.00	19.84	500.00	200.0	V	0.00	-2
1922.25	47.38	---	68.20	20.82	500.00	200.0	V	0.00	-1
2587.25	49.45	---	68.20	18.75	500.00	200.0	V	41.00	2
2774.50	---	38.26	54.00	15.74	500.00	200.0	V	50.00	3
3318.75	51.96	---	68.20	16.24	500.00	200.0	V	0.00	4
3975.00	---	42.26	54.00	11.74	500.00	200.0	V	15.00	7
5420.50	---	50.80	54.00	3.20	500.00	200.0	V	41.00	10
5469.50	62.38	---	68.20	5.82	500.00	200.0	V	15.00	10
6708.50	63.28	---	68.20	4.92	500.00	200.0	V	58.00	14
7734.00	---	50.76	54.00	3.24	500.00	200.0	V	149.00	17

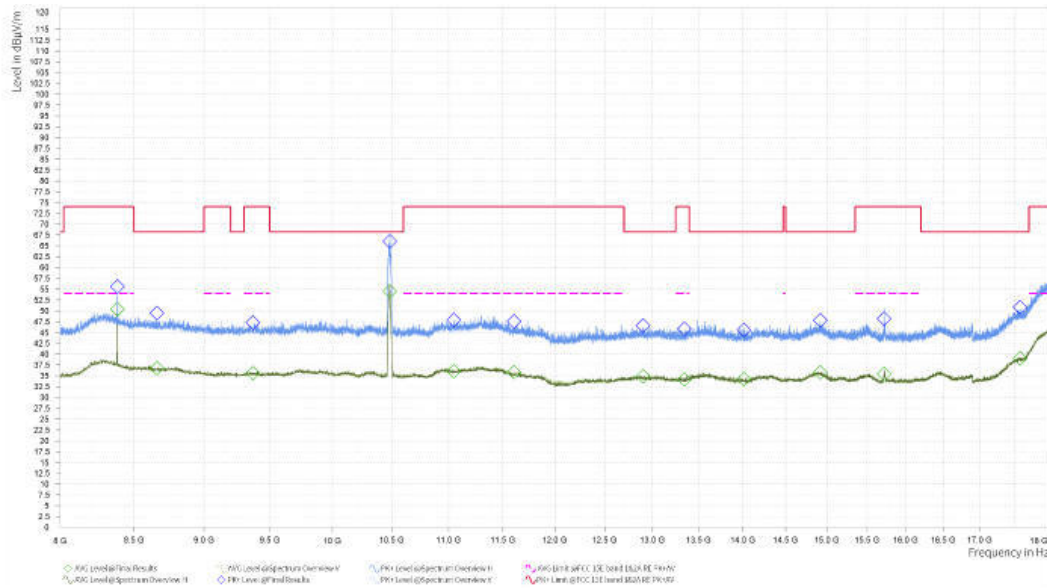

EMI Final Results

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. Time [s]
1	8,383.750	55.56	74.00	18.44	50.36	54.00	3.64	7.41	H	163	2.00	1.000
1	8,660.000	49.45	68.20	18.75	36.70			5.45	H	278.6	2.00	1.000
1	9,368.750	47.27	74.00	26.73	35.60	54.00	18.40	5.38	H	235.4	2.00	1.000
1	10,481.250	66.02	68.20	2.18	54.50			5.60	H	307.5	2.00	1.000
1	11,045.000	47.86	74.00	26.14	36.00	54.00	18.00	6.46	H	235.4	2.00	1.000
1	11,603.750	47.54	74.00	26.46	35.78	54.00	18.22	6.80	V	2.8	2.00	1.000
1	12,898.750	46.58	68.20	21.62	34.85			5.67	H	360	2.00	1.000
1	13,345.000	45.82	74.00	28.18	34.16	54.00	19.84	5.46	H	89.3	2.00	1.000
1	14,010.000	45.55	68.20	22.65	34.21			5.39	H	250	2.00	1.000
1	14,916.250	47.79	68.20	20.41	35.77			6.65	H	336.5	2.00	1.000
1	15,717.500	48.14	74.00	25.86	35.40	54.00	18.60	4.95	H	307.5	2.00	1.000
1	17,568.750	50.77	68.20	17.43	39.01			11.04	V	0	2.00	1.000

802.11a CH52

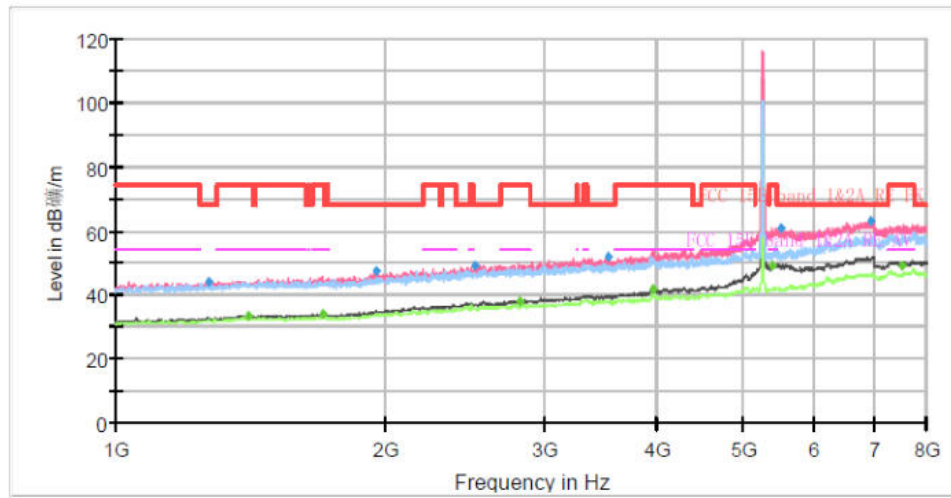

Final Result


Frequency (MHz)	MaxPeak (dBV/m)	Average (dBV/m)	Limit (dBV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1267.75	44.23	---	68.20	23.97	500.00	200.0	V	112.00	-4
1407.75	---	33.46	54.00	20.54	500.00	200.0	V	9.00	-3
1700.00	---	33.90	54.00	20.10	500.00	200.0	V	142.00	-2
1950.25	47.17	---	68.20	21.03	500.00	200.0	V	6.00	0
2515.50	49.30	---	68.20	18.90	500.00	200.0	V	35.00	2
2827.00	---	38.22	54.00	15.78	500.00	200.0	V	0.00	3
3541.00	52.07	---	68.20	16.13	500.00	200.0	V	92.00	4
3968.00	---	42.02	54.00	11.98	500.00	200.0	V	44.00	7
5399.50	---	49.35	54.00	4.65	500.00	200.0	V	44.00	10
5516.75	60.96	---	68.20	7.24	500.00	200.0	V	63.00	10
6930.75	63.20	---	68.20	5.00	500.00	200.0	V	6.00	14
7520.50	---	49.10	54.00	4.90	500.00	200.0	V	92.00	16

Spectrum Overview H/V



Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. Time [s]
1	8,415.000	50.66	74.00	23.34	39.35	54.00	14.65	7.06	H	308.2	2.00	1.000
1	8,725.000	49.05	68.20	19.15	36.70			5.27	H	210.1	2.00	1.000
1	9,082.500	47.08	74.00	26.92	35.51	54.00	18.49	5.46	H	104.5	2.00	1.000
1	9,465.000	46.92	74.00	27.08	35.54	54.00	18.46	5.45	H	346.2	2.00	1.000
1	10,518.750	66.19	68.20	2.01				5.58	V	298.9	2.00	1.000
1	10,932.500	48.10	74.00	25.90	36.43	54.00	17.57	6.41	H	37.4	2.00	1.000
1	11,618.750	47.66	74.00	26.34	35.61	54.00	18.39	6.80	V	73.5	2.00	1.000
1	13,001.250	47.26	68.20	20.94	34.78			5.82	H	149.6	2.00	1.000
1	13,655.000	46.72	68.20	21.48	34.93			6.23	V	200.9	2.00	1.000
1	14,882.500	47.26	68.20	20.94	35.26			6.50	H	357.9	2.00	1.000
1	15,518.750	46.94	74.00	27.06	34.85	54.00	19.15	5.93	H	353.7	2.00	1.000
1	17,538.750	50.96	68.20	17.24	38.98			10.94	V	13.1	2.00	1.000


802.11a CH60

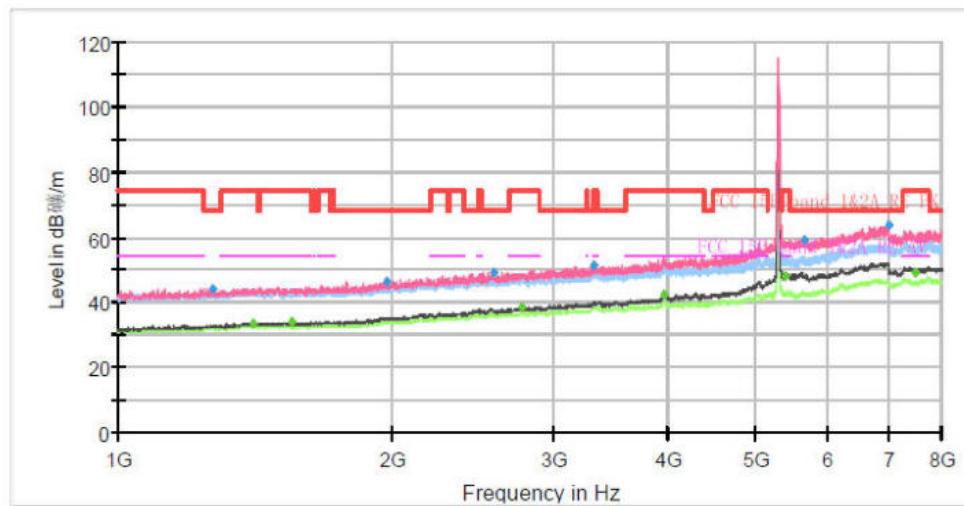

Final Result


Frequency (MHz)	MaxPeak (dBV/m)	Average (dBV/m)	Limit (dBV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1270.38	43.88	---	68.20	24.32	500.00	200.0	V	9.00	-4
1405.13	---	33.68	54.00	20.32	500.00	200.0	V	0.00	-3
1549.50	---	34.05	54.00	19.95	500.00	200.0	V	229.00	-3
1972.13	46.28	---	68.20	21.92	500.00	200.0	V	169.00	0
2578.50	49.38	---	68.20	18.82	500.00	200.0	V	38.00	3
2777.13	---	38.47	54.00	15.53	500.00	200.0	V	337.00	3
3325.75	51.49	---	68.20	16.71	500.00	200.0	V	91.00	4
3965.38	---	42.29	54.00	11.71	500.00	200.0	V	116.00	7
5395.13	---	48.05	54.00	5.95	500.00	200.0	V	310.00	10
5653.25	59.42	---	68.20	8.78	500.00	200.0	V	133.00	11
6994.63	63.55	---	68.20	4.65	500.00	200.0	V	178.00	15
7487.25	---	49.34	54.00	4.66	500.00	200.0	V	0.00	16

Spectrum Overview H/V

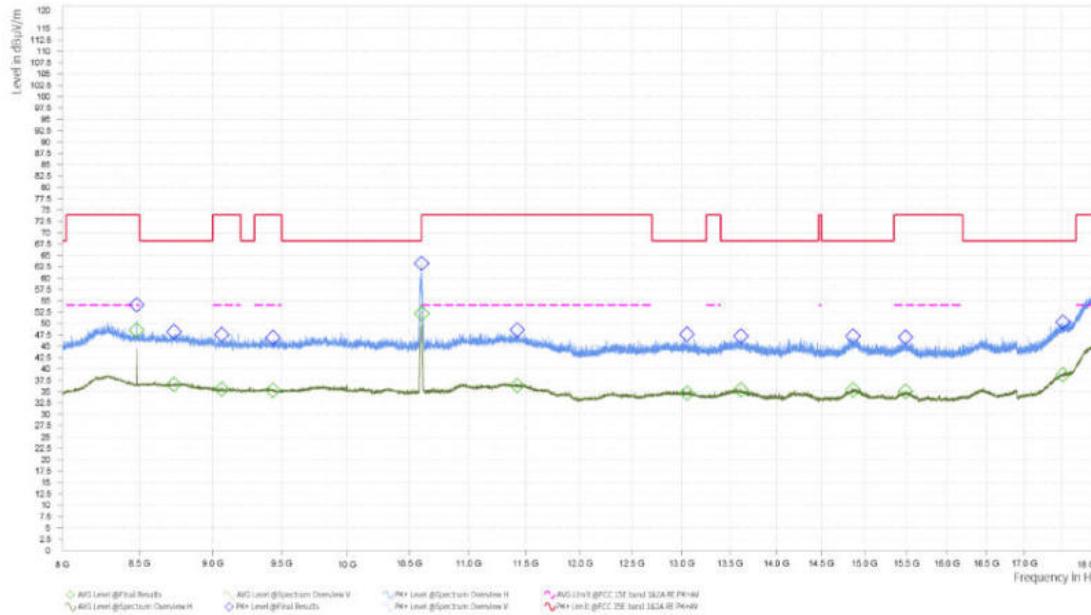

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. Time [s]
1	8,480.000	54.10	74.00	19.90	48.53	54.00	5.47	6.40	H	312	2.00	1.000
1	8,732.500	48.17	68.20	20.03	36.56			5.28	H	243.8	2.00	1.000
1	9,065.000	47.54	74.00	26.46	35.53	54.00	18.47	5.45	H	304.3	2.00	1.000
1	9,435.000	46.91	74.00	27.09	35.28	54.00	18.72	5.42	H	356.3	2.00	1.000
1	10,600.000	63.26	68.20	4.94				5.80	V	313.4	2.00	1.000
1	10,602.500				52.20	54.00	1.80	5.81	V	313.4	2.00	1.000
1	11,427.500	48.59	74.00	25.41	36.34	54.00	17.66	7.31	H	84.7	2.00	1.000
1	13,050.000	47.66	68.20	20.54	34.70			5.84	H	335.1	2.00	1.000
1	13,615.000	47.21	68.20	20.99	35.38			6.23	H	228.6	2.00	1.000
1	14,863.750	47.23	68.20	20.97	35.37			6.31	H	289.5	2.00	1.000
1	15,487.500	46.95	74.00	27.05	35.06	54.00	18.94	5.83	V	44	2.00	1.000
1	17,520.000	50.38	68.20	17.82	38.73			10.87	V	118.7	2.00	1.000


802.11a CH64

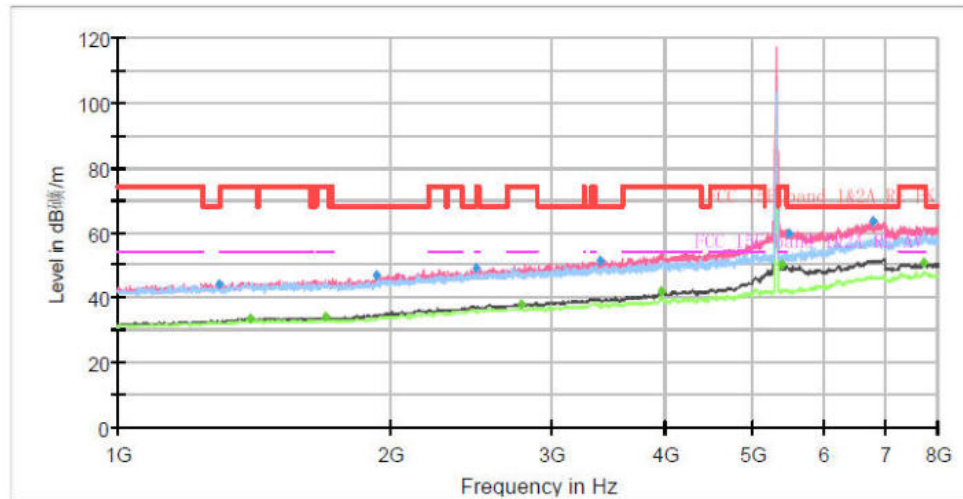

Final Result


Frequency (MHz)	MaxPeak (dBV/m)	Average (dBV/m)	Limit (dBV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1290.50	44.28	---	68.20	23.92	500.00	200.0	V	131.00	-4
1402.50	---	33.63	54.00	20.37	500.00	200.0	V	121.00	-3
1694.75	---	33.92	54.00	20.08	500.00	200.0	V	2.00	-2
1931.00	46.93	---	68.20	21.27	500.00	200.0	V	6.00	0
2478.75	48.92	---	68.20	19.28	500.00	200.0	V	111.00	2
2779.75	---	38.06	54.00	15.94	500.00	200.0	V	3.00	3
3402.75	51.58	---	68.20	16.62	500.00	200.0	V	12.00	4
3969.75	---	42.13	54.00	11.87	500.00	200.0	V	0.00	7
5403.00	---	50.11	54.00	3.89	500.00	200.0	V	62.00	10
5485.25	59.46	---	68.20	8.74	500.00	200.0	V	72.00	10
6783.75	63.49	---	68.20	4.71	500.00	200.0	V	3.00	15
7728.75	---	50.65	54.00	3.35	500.00	200.0	V	4.00	17

Spectrum Overview H/V

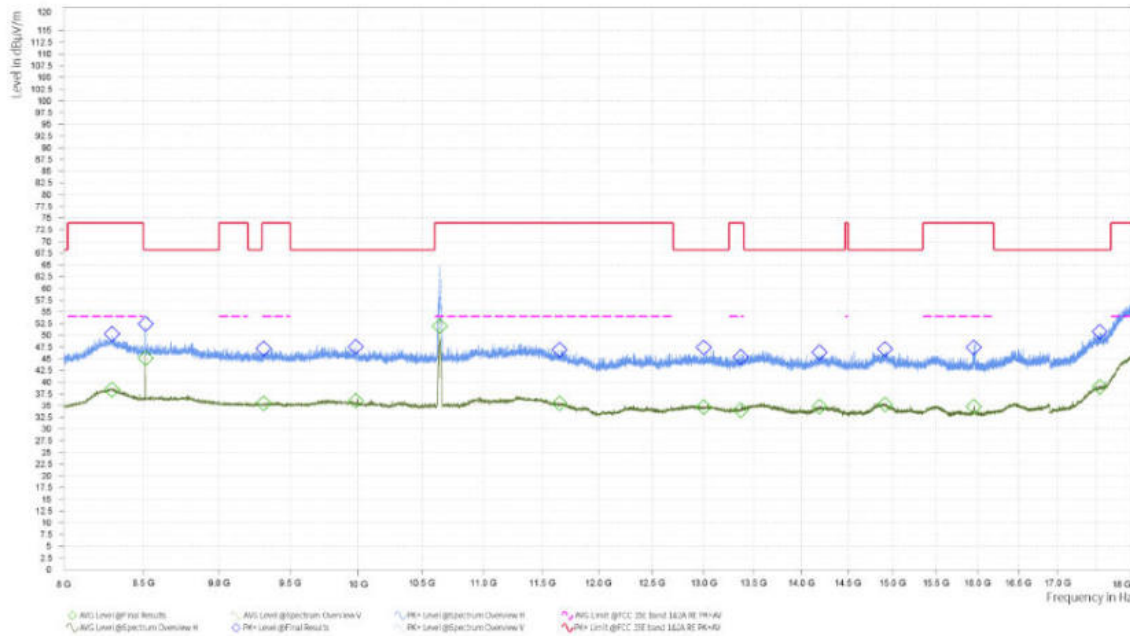

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. Time [s]
1	8,297.500	50.29	74.00	23.71	38.42	54.00	15.58	8.83	H	190.3	2.00	1.000
1	8,512.500	52.42	68.20	15.78	45.15			6.15	H	304.2	2.00	1.000
1	9,311.250	47.16	74.00	26.84	35.46	54.00	18.54	5.44	V	9.5	2.00	1.000
1	9,983.750	47.57	68.20	20.63	36.03			5.36	V	9.5	2.00	1.000
1	10,641.250				51.99	54.00	2.01	5.89	V	299.4	2.00	1.000
1	11,652.500	46.89	74.00	27.11	35.45	54.00	18.55	6.68	V	0	2.00	1.000
1	13,000.000	47.43	68.20	20.77	34.70			5.82	V	223.4	2.00	1.000
1	13,368.750	45.42	74.00	28.58	34.02	54.00	19.98	5.49	H	228.5	2.00	1.000
1	14,190.000	46.38	68.20	21.82	34.75			5.82	H	190.3	2.00	1.000
1	14,915.000	47.07	68.20	21.13	35.19			6.66	V	0	2.00	1.000
1	15,953.750	47.39	74.00	26.61	34.70	54.00	19.30	4.48	H	349.9	2.00	1.000
1	17,552.500	50.72	68.20	17.48	39.00			10.99	H	360	2.00	1.000

802.11a CH100

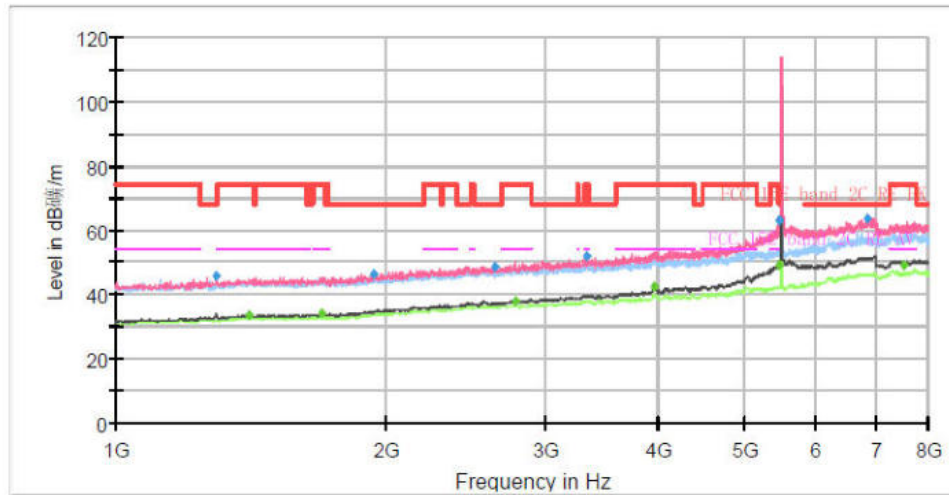

Final Result


Frequency (MHz)	MaxPeak (dBV/m)	Average (dBV/m)	Limit (dBV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1294.00	45.53	---	68.20	22.67	500.00	200.0	V	5.00	-4
1407.75	---	33.59	54.00	20.41	500.00	200.0	V	156.00	-3
1698.25	---	33.97	54.00	20.03	500.00	200.0	V	180.00	-2
1936.25	46.53	---	68.20	21.67	500.00	200.0	V	180.00	0
2645.00	48.75	---	68.20	19.45	500.00	200.0	V	166.00	2
2783.25	---	38.16	54.00	15.84	500.00	200.0	V	166.00	3
3339.75	52.13	---	68.20	16.07	500.00	200.0	V	156.00	4
3968.00	---	42.17	54.00	11.83	500.00	200.0	V	179.00	7
5459.00	---	49.19	54.00	4.81	500.00	200.0	V	125.00	10
5469.50	63.13	---	68.20	5.07	500.00	200.0	V	69.00	10
6836.25	63.76	---	68.20	4.44	500.00	200.0	V	179.00	14
7520.50	---	49.16	54.00	4.84	500.00	200.0	V	149.00	16

Spectrum Overview H/V



Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. Time [s]
1	8,301.250	50.01	74.00	23.99	38.26	54.00	15.74	8.77	H	199.4	2.00	1.000
1	8,800.000	52.21	68.20	15.99	44.98			5.42	H	351.8	2.00	1.000
1	9,026.250	47.45	74.00	26.55	35.63	54.00	18.37	5.38	V	3.8	2.00	1.000
1	9,441.250	47.17	74.00	26.83	35.39	54.00	18.61	5.42	H	176.6	2.00	1.000
1	10,268.750	47.36	68.20	20.84	35.45			5.52	H	61.8	2.00	1.000
1	11,002.500	57.55	74.00	16.45	47.17	54.00	6.83	6.54	H	108	2.00	1.000
1	11,468.750	48.05	74.00	25.95	36.26	54.00	17.74	7.06	V	0	2.00	1.000
1	12,881.250	46.81	68.20	21.39	34.84			5.64	V	0.9	2.00	1.000
1	14,320.000	46.61	68.20	21.59	34.71			6.50	H	115.5	2.00	1.000
1	14,891.250	47.30	68.20	20.90	35.51			6.58	V	184.8	2.00	1.000
1	15,460.000	46.74	74.00	27.26	34.66	54.00	19.34	5.61	H	305.9	2.00	1.000
1	17,506.250	51.08	68.20	17.12	38.91			10.83	H	53.9	2.00	1.000

802.11a CH116

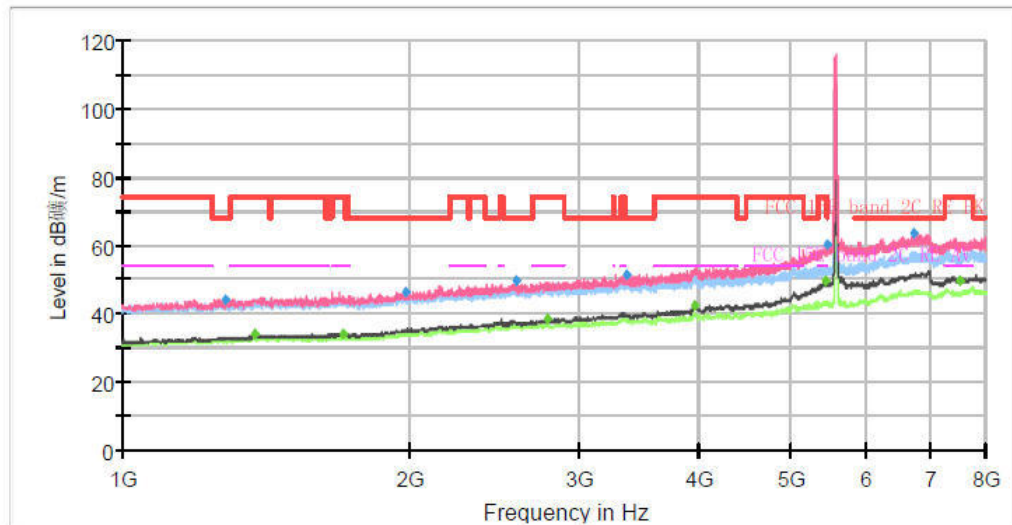

Final Result


Frequency (MHz)	MaxPeak (dBV/m)	Average (dBV/m)	Limit (dBV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1283.50	44.20	---	68.20	24.00	500.00	200.0	V	4.00	-4
1373.63	---	33.89	54.00	20.11	500.00	200.0	V	48.00	-3
1699.13	---	34.12	54.00	19.88	500.00	200.0	V	18.00	-2
1982.63	46.19	---	68.20	22.01	500.00	200.0	V	9.00	0
2580.25	49.73	---	68.20	18.47	500.00	200.0	V	18.00	3
2783.25	---	38.47	54.00	15.53	500.00	200.0	V	252.00	3
3367.75	51.30	---	68.20	16.90	500.00	200.0	V	24.00	4
3962.75	---	42.45	54.00	11.55	500.00	200.0	V	58.00	6
5441.50	---	49.44	54.00	4.56	500.00	200.0	V	68.00	10
5467.75	60.42	---	68.20	7.78	500.00	200.0	V	304.00	10
6738.25	63.80	---	68.20	4.40	500.00	200.0	V	176.00	15
7512.63	---	49.42	54.00	4.58	500.00	200.0	V	208.00	16

Spectrum Overview H/V



Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. Time [s]
1	8,235.000	49.65	74.00	24.35	38.17	54.00	15.83	8.28	V	14.7	2.00	1.000
1	8,927.500	50.86	68.20	17.34	43.53			5.25	V	297.5	2.00	1.000
1	9,067.500	47.58	74.00	26.42	35.49	54.00	18.51	5.46	V	14.7	2.00	1.000
1	9,451.250	47.18	74.00	26.82	35.27	54.00	18.73	5.43	H	184.9	2.00	1.000
1	9,881.250	47.86	68.20	20.34	35.95			5.50	H	54.3	2.00	1.000
1	11,158.750	55.36	74.00	18.64	44.38	54.00	9.62	7.03	H	131.3	2.00	1.000
1	11,807.500	46.16	74.00	27.84	34.28	54.00	19.72	6.05	H	146.7	2.00	1.000
1	12,815.000	46.38	68.20	21.82	34.69			5.53	H	360	2.00	1.000
1	14,305.000	47.37	68.20	20.83	34.66			6.42	H	8.2	2.00	1.000
1	14,816.250	46.51	68.20	21.69	34.92			5.83	H	38.6	2.00	1.000
1	15,431.250	46.24	74.00	27.76	34.41	54.00	19.59	5.39	H	315.2	2.00	1.000
1	17,457.500	50.70	68.20	17.50	38.57			10.53	H	276.7	2.00	1.000

802.11a CH140

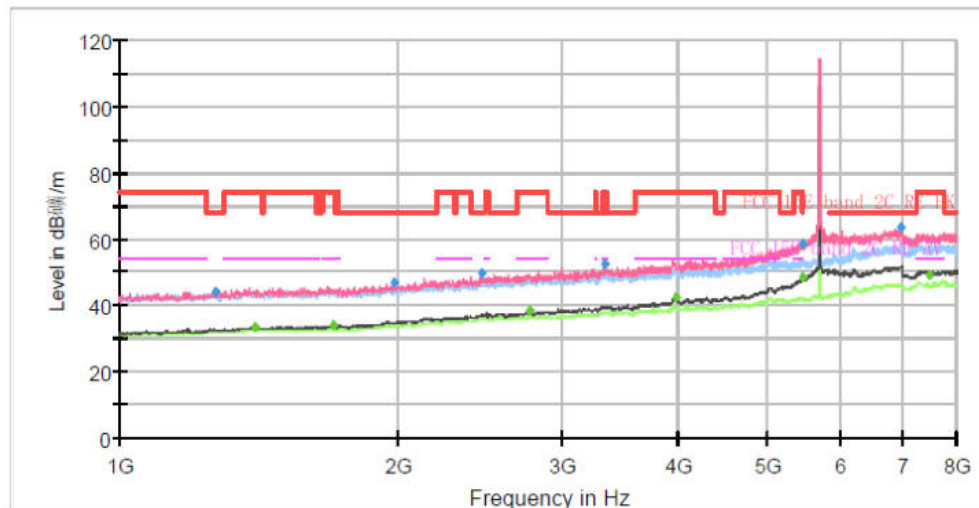

Final Result


Frequency (MHz)	MaxPeak (dBV/m)	Average (dBV/m)	Limit (dBV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1271.25	44.23	---	68.20	23.97	500.00	200.0	V	132.00	-4
1402.50	---	33.41	54.00	20.59	500.00	200.0	V	78.00	-3
1703.50	---	33.83	54.00	20.17	500.00	200.0	V	180.00	-2
1978.25	46.78	---	68.20	21.42	500.00	200.0	V	95.00	0
2461.25	49.59	---	68.20	18.61	500.00	200.0	V	178.00	2
2771.00	---	38.35	54.00	15.65	500.00	200.0	V	172.00	3
3341.50	52.25	---	68.20	15.95	500.00	200.0	V	116.00	4
3985.50	---	42.22	54.00	11.78	500.00	200.0	V	176.00	6
5457.25	---	48.28	54.00	5.72	500.00	200.0	V	78.00	10
5464.25	58.66	---	68.20	9.54	500.00	200.0	V	123.00	10
6981.50	63.56	---	68.20	4.64	500.00	200.0	V	178.00	15
7476.75	---	49.32	54.00	4.68	500.00	200.0	V	165.00	16

Spectrum Overview H/V



Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. Time [s]
1	8,285.000	50.40	74.00	23.60	38.50	54.00	15.50	8.78	H	174.9	2.00	1.000
1	8,773.750	48.73	68.20	19.47	36.68			5.37	H	326.8	2.00	1.000
1	9,120.000	53.14	74.00	20.86	48.20	54.00	5.80	5.47	H	300.1	2.00	1.000
1	9,476.250	47.02	74.00	26.98	35.13	54.00	18.87	5.46	H	91.9	2.00	1.000
1	9,882.500	47.67	68.20	20.53	36.00			5.50	H	282.3	2.00	1.000
1	10,936.250	48.09	74.00	25.91	36.72	54.00	17.28	6.45	V	111.7	2.00	1.000
1	11,398.750	53.47	74.00	20.53	42.01	54.00	11.99	7.49	H	115	2.00	1.000
1	12,908.750	46.79	68.20	21.41	34.91			5.69	H	228.7	2.00	1.000
1	13,747.500	46.33	68.20	21.87	34.83			6.15	H	1.3	2.00	1.000
1	14,913.750	47.44	68.20	20.76	35.37			6.67	H	46.6	2.00	1.000
1	15,442.500	46.05	74.00	27.95	34.38	54.00	19.62	5.48	H	237.5	2.00	1.000
1	17,526.250	50.40	68.20	17.80	38.79			10.90	H	273.5	2.00	1.000

802.11a CH149

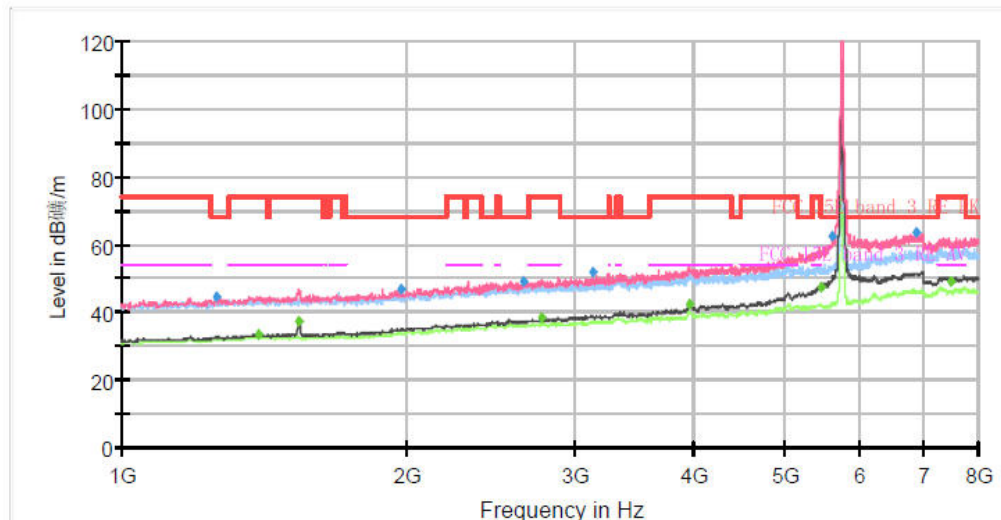

Final Result


Frequency (MHz)	MaxPeak (dBV/m)	Average (dBV/m)	Limit (dBV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1260.75	44.39	---	68.20	23.81	500.00	200.0	V	153.00	-4
1393.75	---	33.55	54.00	20.45	500.00	200.0	V	128.00	-3
1540.75	---	37.34	54.00	16.66	500.00	200.0	V	78.00	-3
1974.75	46.95	---	68.20	21.25	500.00	200.0	V	176.00	0
2655.50	49.39	---	68.20	18.81	500.00	200.0	V	178.00	2
2776.25	---	38.43	54.00	15.57	500.00	200.0	V	178.00	3
3142.00	52.06	---	68.20	16.14	500.00	200.0	V	12.00	4
3971.50	---	42.32	54.00	11.68	500.00	200.0	V	172.00	7
5455.50	---	47.36	54.00	6.64	500.00	200.0	V	68.00	10
5621.75	62.26	---	68.20	5.94	500.00	200.0	V	78.00	11
6885.25	63.44	---	68.20	4.76	500.00	200.0	V	109.00	14
7497.75	---	49.33	54.00	4.67	500.00	200.0	V	158.00	16



EMI Final Results

Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. Time [s]
1	8,286.250	50.10	74.00	23.90	38.65	54.00	15.35	8.79	H	132.2	2.00	1.000
1	8,695.000	48.72	68.20	19.48	36.50			5.33	V	287.3	2.00	1.000
1	9,191.250	49.80	74.00	24.20	40.98	54.00	13.02	5.50	H	228.5	2.00	1.000
1	9,465.000	46.82	74.00	27.18	35.64	54.00	18.36	5.45	H	360	2.00	1.000
1	10,112.500	48.30	68.20	19.90	35.91			5.51	H	102.8	2.00	1.000
1	10,920.000	48.28	74.00	25.72	36.52	54.00	17.48	6.28	H	272.5	2.00	1.000
1	11,498.750	49.07	74.00	24.93	36.60	54.00	17.40	6.87	V	197.7	2.00	1.000
1	12,815.000	46.29	68.20	21.91	34.67			5.53	V	0	2.00	1.000
1	14,185.000	47.48	68.20	20.72	34.97			5.79	H	294.8	2.00	1.000
1	14,876.250	47.75	68.20	20.45	35.87			6.43	H	206.2	2.00	1.000
1	15,435.000	47.02	74.00	26.98	35.10	54.00	18.90	5.42	H	14.3	2.00	1.000
1	16,431.250	47.40	68.20	20.80	35.69			6.04	H	243.3	2.00	1.000

802.11a CH157

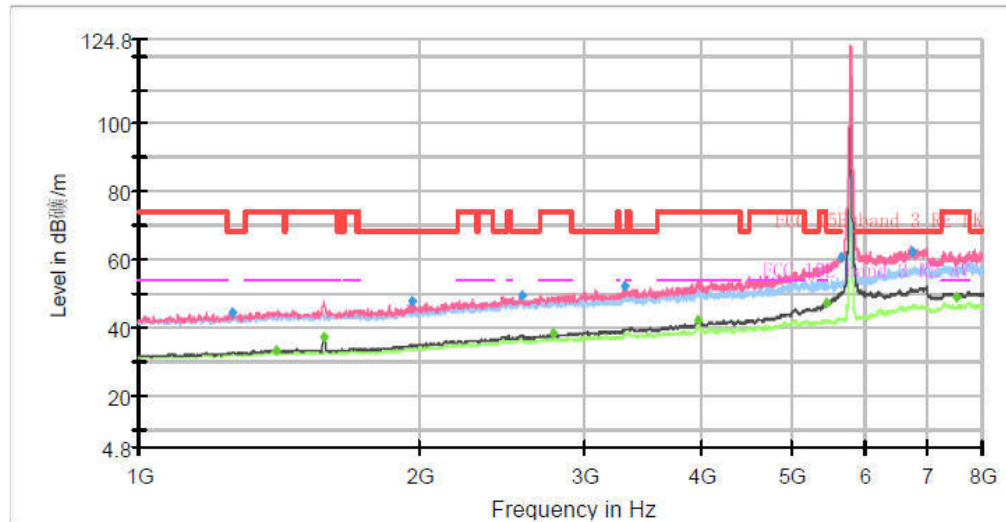

Final Result

Frequency (MHz)	MaxPeak (dBV/m)	Average (dBV/m)	Limit (dBV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1257.25	44.28	---	68.20	23.92	500.00	200.0	V	177.00	-4
1400.75	---	33.38	54.00	20.62	500.00	200.0	V	180.00	-3
1581.00	---	37.10	54.00	16.90	500.00	200.0	V	69.00	-2
1957.25	47.54	---	68.20	20.66	500.00	200.0	V	178.00	0
2568.00	49.33	---	68.20	18.87	500.00	200.0	V	129.00	3
2783.25	---	38.02	54.00	15.98	500.00	200.0	V	119.00	3
3318.75	51.96	---	68.20	16.24	500.00	200.0	V	109.00	4
3976.75	---	42.14	54.00	11.86	500.00	200.0	V	174.00	7
5453.75	---	47.36	54.00	6.64	500.00	200.0	V	59.00	10
5646.25	60.87	---	68.20	7.33	500.00	200.0	V	69.00	11
6743.50	62.18	---	68.20	6.02	500.00	200.0	V	119.00	15
7513.50	---	48.79	54.00	5.21	500.00	200.0	V	39.00	16



EMI Final Results

Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. Time [s]
1	8,288.750	50.92	74.00	23.08	38.58	54.00	15.42	8.81	V	17.3	2.00	1.000
1	8,658.750	48.20	68.20	20.00	36.66			5.45	V	32	2.00	1.000
1	9,060.000	47.88	74.00	26.12	35.43	54.00	18.57	5.44	H	2.9	2.00	1.000
1	9,255.000	47.95	68.20	20.25	36.55			5.55	H	229.9	2.00	1.000
1	9,477.500	47.93	74.00	26.07	35.45	54.00	18.55	5.46	H	289.8	2.00	1.000
1	9,887.500	47.59	68.20	20.61	35.92			5.49	V	46.6	2.00	1.000
1	11,570.000	55.82	74.00	18.18	43.00	54.00	11.00	6.79	V	360	2.00	1.000
1	12,356.250	46.22	74.00	27.78	34.25	54.00	19.75	5.98	H	237.4	2.00	1.000
1	12,813.750	46.95	68.20	21.25	34.69			5.53	H	82.1	2.00	1.000
1	14,911.250	48.18	68.20	20.02	36.14			6.68	H	360	2.00	1.000
1	15,461.250	47.00	74.00	27.00	35.01	54.00	18.99	5.62	H	289.8	2.00	1.000
1	17,355.000	53.78	68.20	14.42	40.23			9.26	V	1	2.00	1.000