
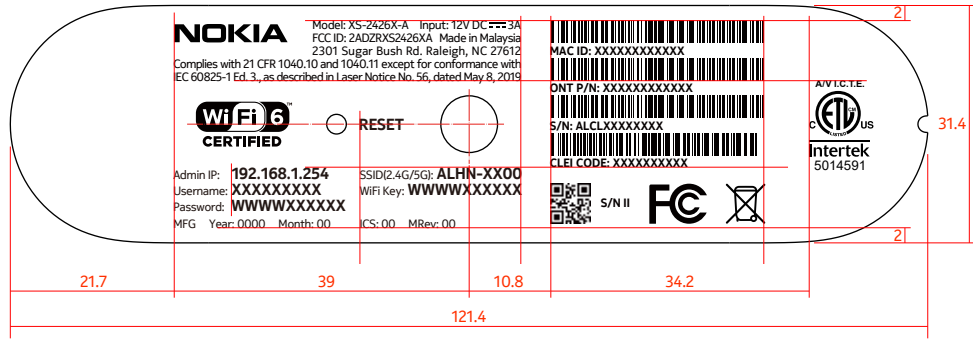




NAR

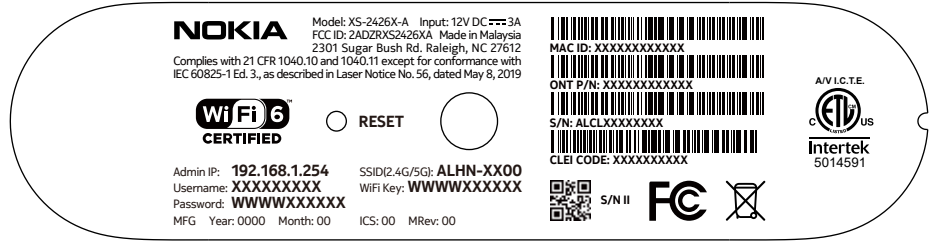

Red line: positions that need to be aligned.

- Model: XS-2426X-A Input: 12V DC 3A — Nokia pure headline, Regular, 4.5pt
- RESET — Nokia pure headline, Bold, 6pt
- Admin IP: — Nokia pure headline, Regular, 4.5pt
- 192.168.1.254 — Nokia pure headline, Bold, 6pt
- 12 characters, X=0.17, interval=0
- S/N: ALCLXXXXXXXX — Nokia pure headline, Bold, 4.5pt
- 10 characters, X=0.17, interval=1
- CLEI CODE: XXXXXXXXXXXX
- S/N II 5015404 — Arial, Regular, 4pt

JP

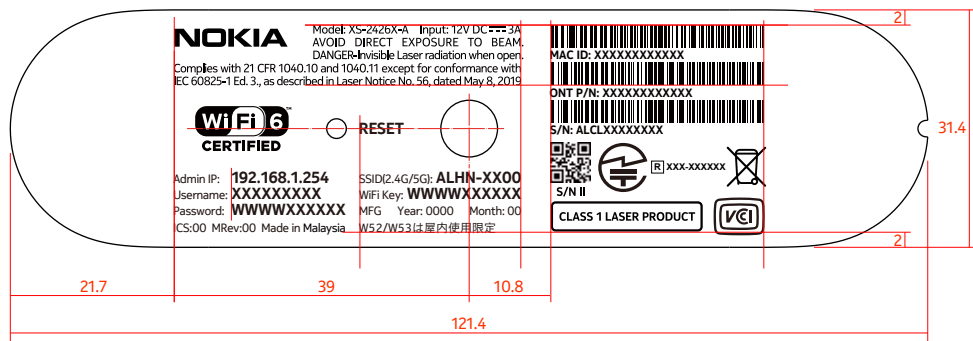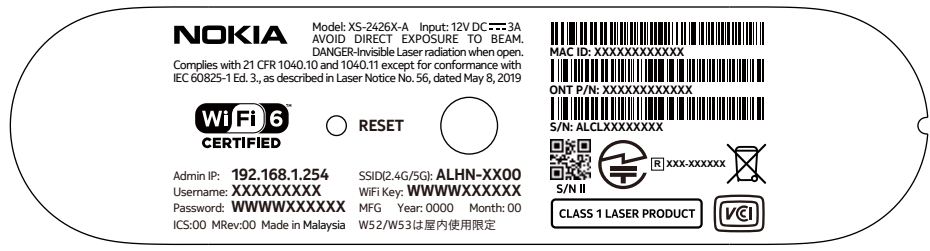

Red line: positions that need to be aligned.

- Model: XS-2426X-A Input: 12V DC 3A — Nokia pure headline, Regular, 4.5pt
- RESET — Nokia pure headline, Bold, 6pt
- Admin IP: — Nokia pure headline, Regular, 4.5pt
- 192.168.1.254 — Nokia pure headline, Bold, 6pt
- W52/W53は屋内使用限定 — Nokia pure headline Chinese, Regular, 4.5pt
- 12 characters, X=0.17, interval=0
- S/N: ALCLXXXXXXXX — Nokia pure headline, Bold, 4.5pt
- CLASS 1 LASER PRODUCT — Nokia pure headline, Bold, 4.5pt
- S/N II — Nokia pure headline, Bold, 4.5pt