

# Global United Technology Services Co., Ltd.

Report No.: GTSE14120226002

# **FCC** Report

Shenzhen Booyue Daily Necessities Company Limited Applicant:

Unit 07,9/F, Changhong Technology Building, No. 18, Keji 12th **Address of Applicant:** 

Road South, Nanshan, Shenzhen, China

**Equipment Under Test (EUT)** 

**Product Name:** Children's Digital Player

Model No.: V8 BT Trade Mark: alilo

FCC ID: 2AE4F-V8BT

FCC CFR Title 47 Part 15 Subpart B:2014 **Applicable standards:** 

June 05, 2015 Date of sample receipt:

June 05-08, 2015 Date of Test:

June 09, 2015 Date of report issue:

Test Result: PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the GTS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of GTS or testing done by GTS in connection with, distribution or use of the product described in this report must be approved by GTS in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



### 2 Version

Version No.	Date	Description
00	June 09, 2015	Original

Prepared By:	Edward. Pan	Date:	June 09, 2015
	Project Engineer		
Check By:	hank. yan	Date:	June 09, 2015
	Reviewer		



#### 3 Contents

			Page
1	CO	VER PAGE	1
2	VE	RSION	2
3	СО	NTENTS	3
4	TES	ST SUMMARY	4
	4.1	MEASUREMENT UNCERTAINTY	4
5	GE	NERAL INFORMATION	5
	5.1 5.2 5.3 5.4 5.5 5.6 5.7 5.8 5.9	CLIENT INFORMATION.  GENERAL DESCRIPTION OF EUT.  TEST MODE	5 
6	TES	ST INSTRUMENTS LIST	7
7	TES	ST RESULTS AND MEASUREMENT DATA	8
	7.1 7.2	CONDUCTED EMISSIONS	
8	TES	ST SETUP PHOTO	17
9	EU <sup>-</sup>	T CONSTRUCTIONAL DETAILS	18



## 4 Test Summary

Test Item	Section in CFR 47	Result	
Conducted Emission	Part15.107	PASS	
Radiated Emissions	Part15.109	PASS	

PASS: The EUT complies with the essential requirements in the standard.

### 4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	± 4.34dB	(1)
Radiated Emission	30MHz ~ 1000MHz	± 4.24dB	(1)
Radiated Emission	1GHz ~ 26.5GHz	± 4.68dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	± 3.45dB	(1)
Note (1): The measurement unce	ertainty is for coverage factor of k	=2 and a level of confidence of	95%.



#### 5 General Information

#### 5.1 Client Information

Applicant:	Shenzhen Booyue Daily Necessities Company Limited	
Address of Applicant:	Unit 07,9/F,Changhong Technology Building,No.18,Keji 12th Road South,Nanshan,Shenzhen,China	

#### 5.2 General Description of EUT

Product Name:	Children's Digital Player
Model No.:	V8 BT
Power supply:	DC 3.7V Li-ion Battery

#### 5.3 Test mode

Test mode:	
Playing mode	Keep the EUT in music playing mode
PC mode	Keep the EUT in exchanging data mode.



#### 5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### • CNAS —Registration No.: CNAS L5775

CNAS has accredited Global United Technology Services Co., Ltd. To ISO/IEC 17025 General Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

#### • FCC —Registration No.: 600491

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, June 28, 2013.

#### • Industry Canada (IC) —Registration No.: 9079A-2

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, June 26, 2013.

#### 5.5 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: Room 301-309, 3th Floor, Block A, Huafeng Jinyuan Business Building, No. 300 Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen 518102

Tel: 0755-27798480

#### 5.6 Description of Support Units

Fax: 0755-27798960

Francis						
Manufacturer	Description	Model	Serial Number	FCC Approval		
Apple	PC	A1278	C1MN99ERDTY3	DoC		
DELTA	ADAPTER	ADP-60ADT	N/A	Verification		
DELL	KEYBOARD	SK-8115	N/A	DoC		
DELL	MOUSE	MOC5UO	N/A	DoC		
Shenzhen Booyue Daily Necessities Company Limited	Adapter	K05050-2	N/A	Verification		

#### 5.7 Deviation from Standards

Biconical, log.per. antenna and horn antenna were used instead of dipole antenna. Semi-anechoic Chamber was used as alternation of open air test sites, and all test suites were performed with radiated method in it.

#### 5.8 Abnormalities from Standard Conditions

None.

#### 5.9 Other Information Requested by the Customer

None.



## 6 Test Instruments list

Radia	Radiated Emission:					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.0(L)*6.0(W)* 6.0(H)	GTS250	Mar. 27 2015	Mar. 26 2016
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	ESU EMI Test Receiver	R&S	ESU26	GTS203	July 01 2014	June 30 2015
4	BiConiLog Antenna	SCHWARZBECK	VULB9163	GTS214	July 01 2014	June 30 2015
5	Double -ridged waveguide horn	SCHWARZBECK	9120D	GTS208	June 27 2014	June 26 2015
6	RF Amplifier	HP	8347A	GTS204	July 01 2014	June 30 2015
7	Preamplifier	HP	8349B	GTS206	July 01 2014	June 30 2015
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
9	Coaxial cable	GTS	N/A	GTS210	Mar. 28 2015	Mar. 27 2016
10	Coaxial Cable	GTS	N/A	GTS211	Mar. 28 2015	Mar. 27 2016

Cond	Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)	
1	Shielding Room	ZhongYu Electron	7.0(L)x3.0(W)x3.0(H)	GTS264	Sep. 07 2013	Sep. 06 2015	
2	<b>EMI Test Receiver</b>	Rohde & Schwarz	ESCS30	GTS223	July 01 2014	June 30 2015	
3	10dB Pulse Limita	Rohde & Schwarz	N/A	GTS224	July 01 2014	June 30 2015	
4	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	July 01 2014	June 30 2015	
5	LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	GTS226	July 01 2014	June 30 2015	
6	Coaxial Cable	GTS	N/A	GTS227	July 01 2014	June 30 2015	
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A	

Gen	General used equipment:							
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)		
1	Barometer	ChangChun	DYM3	GTS257	July 08 2014	July 07 2015		



## 7 Test Results and Measurement Data


#### 7.1 Conducted Emissions

Test Requirement:	FCC Part15 B Section 15.107						
Test Method:	ANSI C63.10:2009						
Test Frequency Range:	150KHz to 30MHz						
Class / Severity:	Class B						
Receiver setup:	RBW=9KHz, VBW=30KHz, Sv	weep time=auto					
Limit:	Fraguency range (MHz)	Limit (c	dBuV)				
	Frequency range (MHz)	Quasi-peak	Average				
	0.15-0.5	66 to 56*	56 to 46*				
	0.5-5	56	46				
	5-30	60	50				
Took ookun.	* Decreases with the logarithn	of the frequency.					
Test setup:	Reference Plane		-				
	AUX Equipment E.U.T  Test table/Insulation plane  Remark E.U.T Equipment Under Test LISN: Line Impedence Stabilization Network Test table height=0.8m						
Test procedure:	The E.U.T and simulators a line impedance stabilization 500hm/50uH coupling impe	n network (L.I.S.N.). Th	nis provides a				
	2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).						
	3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be clacked according to ANSI C63.4:2009 on conducted measurement.						
Test Instruments:	Refer to section 6 for details						
Test mode:	Pre-scan all modes in section on the test report.	5.3, only the data of w	orst mode was show				
Test results:	Pass						



#### **Measurement Data**

Line:

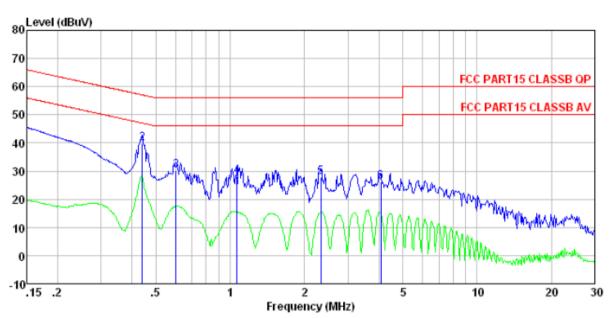


Condition : FCC PART15 CLASSB QP LISN-2013 LINE

Job No. : 2260RF Test mode : PC mode Test Engineer: Qing

00.	2110111001		LISN	Cable		Limit	Over	
	Freq	Level	Factor	Loss	Level	Line	Limit	Remark
	MHz	dBuV	dB	dB	dBu₹	dBuV	dB	
1	0.150	42.14	0.15	0.12	42.41	66.00	-23.59	QP
2 3	0.440	39.69	0.12	0.11	39.92	57.07	-17.15	QP
3	0.604	29.82	0.13	0.12	30.07	56.00	-25.93	QP
4 5	1.065	28.09	0.14	0.13	28.36	56.00	-27.64	QP
5	2.334	27.62	0.13	0.15	27.90	56.00	-28.10	QP
6	4.070	25.84	0.20	0.15	26.19	56.00	-29.81	QP



#### **Neutral:**

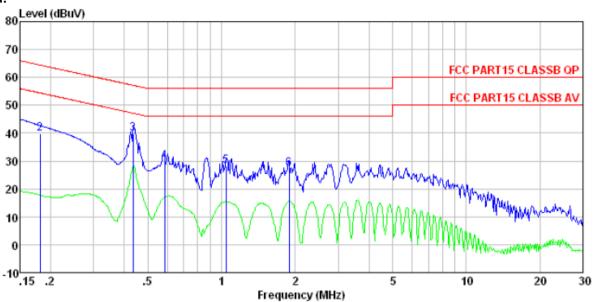

Condition : FCC PART15 CLASSB QP LISN-2013 NEUTRAL

Job No. : 2260RF Test mode : PC mode Test Engineer: Qing

est	Engineer.						_		
		Read	LISN	Cable		Limit	Over		
	Freq	Level	Factor	Loss	Level	Line	Limit	Remark	
									_
	MHz	dBuV	dB	dB	dBuV	dBuV	d₿		
1	0.150	41.78	0.07	0.12	41.97	66.00	-24.03	QP	
2	0.182	39.54	0.07	0.13	39.74	64.42	-24.68	QP	
3		39.61		0.11					
4	0.585	29.51							
5	1.043		0.07						
6		27.11	0.09						

#### Notes:


- 1. An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3. Final Level =Receiver Read level + LISN Factor + Cable Loss
- 4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.



#### 7.2 Radiated Emission

 Naulateu Ellission							
Test Requirement:	FCC Part15 B Section 15.109						
Test Method:	ANSI C63.10:2009						
Test Frequency Range:	30MHz to 6GHz	<u>z</u>					
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)						
Receiver setup:							
	Frequency 30MHz-	Remark Quasi-peak Value					
	1GHz	Quasi-pea	k 120kHz	300kHz	Quasi-peak value		
	Above 1GHz	Peak	1MHz	3MHz	Peak Value		
	7.5070 101.12	Peak	1MHz	10Hz	Average Value		
Limit:					T		
	Freque	ency	Limit (dBuV	/m @3m)	Remark		
	30MHz-8	8MHz	40.0	0	Quasi-peak Value		
	88MHz-2	16MHz	43.5	0	Quasi-peak Value		
	216MHz-9	60MHz	46.0	0	Quasi-peak Value		
	960MHz-	-1GHz	54.0	0	Quasi-peak Value		
	Above 1	IGH <sub>7</sub>	54.0	0	Average Value		
	7,5000		74.0	0	Peak Value		
Test Procedure:	ground at a 3 determine th	3 meter camb e position of	per. The table was the highest rac	was rotated diation.	0.8 meters above the 360 degrees to		
	2. The EUT wa antenna, whi tower.		•		ole-height antenna		
	ground to de	termine the r	naximum valu	e of the field	r meters above the d strength. Both are set to make the		
	4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.						
	The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.						
	6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.						
Test setup:	Below 1GHz						
	·	· · · · · · · · · · · · · · · · · · ·	·				



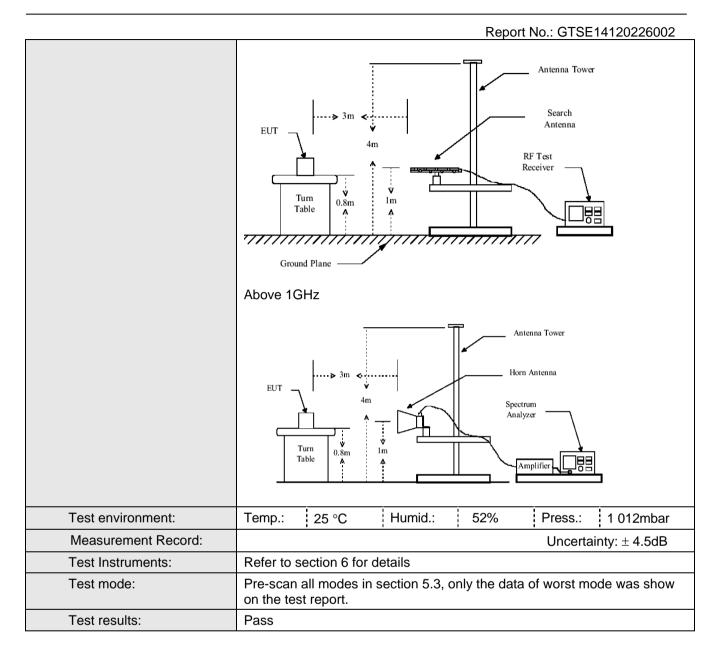

#### Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:


Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor



#### **Measurement Data**

Below 1GHz

#### Horizontal:

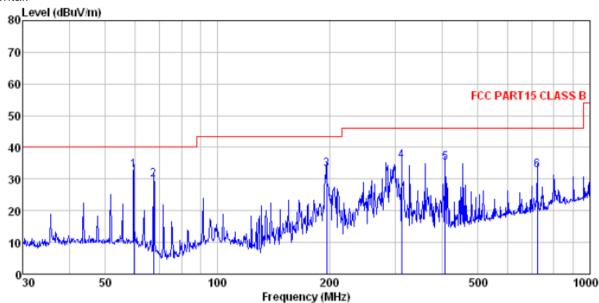

Site


3m chamber FCC PART15 CLASS B 3m VULB9163-2013M HORIZONTAL Condition

: 2260RF : PC mode Job No. Test Mode Test Engineer

030	DIETHOUT.	CITCIL							
	Freq		Antenna Factor					Over Limit	Remark
	MHz	dBu∜	<u>dB</u> /m	dB		dBuV/m	dBuV/m	<u>dB</u>	
1 2 3 4 5 6		47.92 47.94 44.46	11.61 12.57 15.22 17.26	0.92 1.82 2.42 2.90	29. 92 29. 87 29. 21 29. 93 29. 48 29. 20	29.70 33.10 35.65 35.14	40.00 43.50 46.00 46.00	-10.30 -10.40 -10.35 -10.86	QP QP QP QP



#### Vertical:

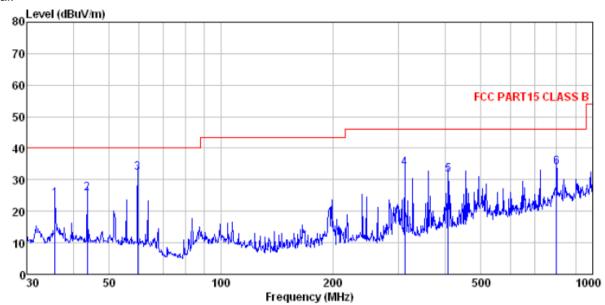

Site

3m chamber FCC PART15 CLASS B 3m VULB9163-2013M VERTICAL Condition


Job No. 2260RF Test Mode : Test Engineer: : PC mode Chen

rugineer.	CITCIL							
	Read	Ant enna	Cable	Preamp		Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBu∀	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
35.749	38.87	14.49	0.62	30.07	23.91	40.00	-16.09	QP
43.659	39.36	15.56	0.70	30.03	25.59	40.00	-14.41	QP
59.649	46.42	14.73	0.86	29.92	32.09	40.00	-7.91	QP
312.179	46.03	15.22	2.42	29.93	33.74	46.00	-12.26	QP
408.946	41.03	17.26	2.90	29.48	31.71	46.00	-14.29	QP
798.980	36.64	22.06						
	Freq MHz 35.749 43.659 59.649 312.179 408.946	Reads Freq Level MHz dBuV 35.749 38.87 43.659 39.36 59.649 46.42 312.179 46.03 408.946 41.03	ReadAntenna Freq Level Factor  MHz dBuV dB/m  35.749 38.87 14.49 43.659 39.36 15.56 59.649 46.42 14.73 312.179 46.03 15.22 408.946 41.03 17.26	ReadAntenna Cable Freq Level Factor Loss  MHz dBuV dB/m dB  35.749 38.87 14.49 0.62 43.659 39.36 15.56 0.70 59.649 46.42 14.73 0.86 312.179 46.03 15.22 2.42 408.946 41.03 17.26 2.90	ReadAntenna Cable Preamp Freq Level Factor Loss Factor  MHz dBuV dB/m dB dB  35.749 38.87 14.49 0.62 30.07 43.659 39.36 15.56 0.70 30.03 59.649 46.42 14.73 0.86 29.92 312.179 46.03 15.22 2.42 29.93 408.946 41.03 17.26 2.90 29.48	ReadAntenna Cable Preamp Level Factor Loss Factor Level  MHz dBuV dB/m dB dB dBuV/m  35.749 38.87 14.49 0.62 30.07 23.91 43.659 39.36 15.56 0.70 30.03 25.59 59.649 46.42 14.73 0.86 29.92 32.09 312.179 46.03 15.22 2.42 29.93 33.74 408.946 41.03 17.26 2.90 29.48 31.71	MHz dBuV dB/m dB dB dBuV/m dBuV/m  35.749 38.87 14.49 0.62 30.07 23.91 40.00 43.659 39.36 15.56 0.70 30.03 25.59 40.00 59.649 46.42 14.73 0.86 29.92 32.09 40.00 312.179 46.03 15.22 2.42 29.93 33.74 46.00 408.946 41.03 17.26 2.90 29.48 31.71 46.00	ReadAntenna   Cable   Preamp   Limit   Over   Level   Freq   Level   Factor   Loss   Factor   Level   Line   Limit



#### Above 1GHz

#### Horizontal:

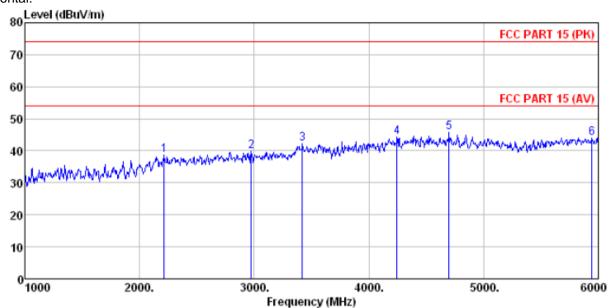

Site


: 3m chamber : FCC PART 15 (PK) 3m BBHA9120D ANT(>1GHZ) HORIZONTAL Condition

Job No. : 2260RF Test Mode : PC m Test Engineer: Chen : PC mode

	Trie Tricor.	OILOIL							
	F		Antenna				Limit	Over	Paraula
	rreq	rever	Factor	LOSS	ractor	rever	Line	Limit	Kemark
	MHz	dBu∀	dB/m	₫B	₫B	dBuV/m	dBuV/m	₫B	
1	2215.000	39.70	27.98	5.20	34.23	38.65	74.00	-35.35	Peak
2	2975.000	38.71	28.45	5.90	33.35	39.71	74.00	-34.29	Peak
3	3420.000	39.51	28.67	6.80	32.85	42.13	74.00	-31.87	Peak
4	4245.000	37.72	30.38	8.10	31.90	44.30	74.00	-29.70	Peak
5	4700.000	37.67	31.65	8.51	32.04	45.79	74.00	-28.21	Peak
6	5945.000	33.31	32.82	10.13	32, 16	44.10	74.00	-29.90	Peak



#### Vertical:

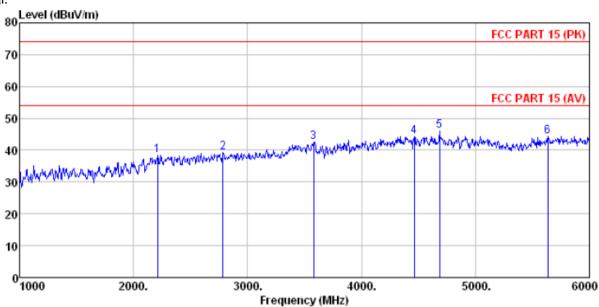

Site : 3m chamber

Condition : FCC PART 15 (PK) 3m BBHA9120D ANT (>1GHZ) VERTICAL


Job No. : 2260RF Test Mode : PC mode Test Engineer: Chen


est	rngineer:	Chen							
	-	Read	Ant enna	Cable	Preamp		Limit	Over	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBu∀	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
				- 40		00 54		05 40	<b>.</b> .
1	2210.000	39.58	27.97	5.19	34.23	38.51	74.00	-35.49	Peak
2	2785.000	38.83	28.37	5.74	33.57	39.37	74.00	-34.63	Peak
3	3580.000	39.05	29.11	7.11	32.66	42.61	74.00	-31.39	Peak
4	4465.000	36.64	31.26	8.31	31.92	44.29	74.00	-29.71	Peak
5	4685.000	37.85	31.63	8.49	32.03	45.94	74.00	-28.06	Peak
6	5635,000	34.66	32, 36	9, 70	32, 35	44.37	74.00	-29.63	Peak



# 8 Test Setup Photo

Radiated Emission

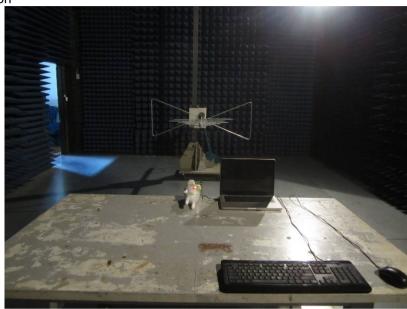

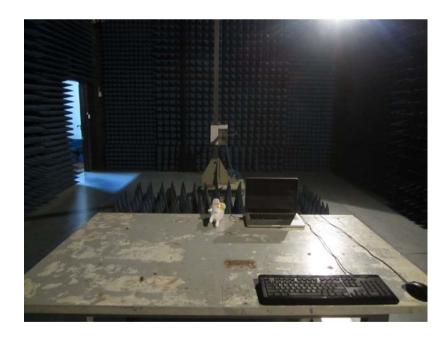



Conducted Emission



# 9 EUT Constructional Details

Reference to the test report No. GTSE14120226001

----- end-----