FCC Test Report

Report No.: AGC00069150808FE02

FCC ID : 2AE56A6

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: Smart Phone

BRAND NAME : KENXINDA

MODEL NAME : A6

CLIENT: KENXINDA TECHNOLOGY CO., LIMITED

DATE OF ISSUE : Sept.02, 2015

STANDARD(S) : FCC Part 22H & 24E Rules

REPORT VERSION: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd.

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Report No.: AGC00069150808FE02 Page 2 of 108

REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Sept.02, 2015	Valid	Original Report

TABLE OF CONTENTS

TABLE OF CONTENTS	3
1. VERIFICATION OF COMPLIANCE	5
2. GENERAL INFORMATION	6
2.1 PRODUCT DESCRIPTION	6
2.2 RELATED SUBMITTAL(S) / GRANT (S)	8
2.3 TEST METHODOLOGY	8
2.4 TEST FACILITY	8
2.5 MEASUREMENT INSTRUMENTS	g
2.6 SPECIAL ACCESSORIES	
2.7 EQUIPMENT MODIFICATIONS	9
3. SYSTEM TEST CONFIGURATION	10
3.1 EUT CONFIGURATION	10
3.2 EUT EXERCISE	10
3.3 GENERAL TECHNICAL REQUIREMENTS	10
3.4 CONFIGURATION OF EUT SYSTEM	11
4. SUMMARY OF TEST RESULTS	12
5. DESCRIPTION OF TEST MODES	12
6. OUTPUT POWER	13
6.1 CONDUCTED OUTPUT POWER	13
6.2 RADIATED OUTPUT POWER	20
6.3. PEAK-TO-AVERAGE RATIO	23
7. OCCUPIED BANDWIDTH	25
7.1 MEASUREMENT METHOD	25
7.2 PROVISIONS APPLICABLE	25
7.3 MEASUREMENT RESULT	26
APPENDIX A:BANDWIDTH	26
8. BAND EDGE	40
8.1 MEASUREMENT METHOD	40

8.2 PROVISIONS APPLICABLE	40
8.3 MEASUREMENT RESULT	41
APPENDIX B: BAND EDGES COMPLIANCE	41
9. SPURIOUS EMISSION	49
9.1 CONDUCTED SPURIOUS EMISSION	49
APPENDIX C: SPURIOUS EMISSION AT ANTENNA TERMINAL	50
9.2 RADIATED SPURIOUS EMISSION	86
10. MAINS CONDUCTED EMISSION	90
10.1 MEASUREMENT METHOD	90
10.2 PROVISIONS APPLICABLE	90
10.3 MEASUREMENT RESULT	91
11. FREQUENCY STABILITY	93
11.1 MEASUREMENT METHOD	93
11.2 PROVISIONS APPLICABLE	
11.3 MEASUREMENT RESULT	95
Appendix D:Frequency Stability	95
PHOTOGRAPHS OF TEST SETUP	101
PHOTOGRAPHS OF EUT	103

Page 5 of 108

1. VERIFICATION OF COMPLIANCE

Applicant	KENXINDA TECHNOLOGY CO., LIMITED
Address	UNIT B 13/F PRAT COMMERCIAL BUILDING 17-19 PRAT AVENUE TSIMSHATSUI KL HONGKONG
Manufacturer	SHENZHEN KENXINDA TECHNOLOGY CO., LTD. (BAO'AN BRANCH)
Address	1-6 Floor, No.105 Work Shop & 1-5 Floor, No.104 Work Shop, Xinweihuaning Road, Dalang Community, Dalang Street, Baoán District, Shenzhen, P.R.C
Product Designation	Smart Phone
Brand Name	KENXINDA
Test Model	A6
Date of test	Aug.27, 2015 to Aug.29, 2015
Deviation	None
Condition of Test Sample	Normal

We hereby certify that:

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C 63.4:2003 and TIA/EIA 603. The sample tested as described in this report is in compliance with the FCC Rules Part 22H and 24E.

The test results of this report relate only to the tested sample identified in this report.

Tested By	Matt Zhang	
	Matt Zhang(Zhang Liang)	Sept.02, 2015
Reviewed By	Bore sie	
	Bart Xie(Xie Xiaobin)	Sept.02, 2015
Approved By	Solya Hong	
	Solger Zhang(Zhang Hongyi) Authorized Officer	Sept.02, 2015

Page 6 of 108

2. GENERAL INFORMATION

2.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

7 Thajor teerinical description o				
Product Designation:	Smart Phone			
Hardware version:	M820_V7.1SX			
Software version:	ALPS.KK1.MP1.V2.22			
Frequency Bands:	☐ GSM 850 ☐ PCS 1900 (U.S. Bands) ☐ GSM 900 ☐ DCS 1800 (Non-U.S. Bands) ☐ UMTS FDD Band II ☐ UMTS FDD Band V (U.S. Bands) ☐ UMTS FDD Band I ☐ UMTS FDD Band VIII (Non-U.S. Bands)			
Antenna:	Integrated Antenna			
Type of Modulation	GSM / GPRS : GMSK WCDMA : QPSK			
Antenna gain(GSM):	-1.0dBi			
Power Supply:	DC 3.8V by battery			
Battery parameter:	DC3.8V/2000mAh			
Adapter Input:	AC100-240V, 50-60Hz, 100mA			
Adapter Output:	DC5V, 1000mA			
Dual Card: WCDMA / GSM Card Slot GSM Card Slot				
GPRS Class	12			
Extreme Vol. Limits:	DC3.4 V to 4.35 V (Normal: DC3.8 V)			
Extreme Temp. Tolerance	-10℃ to +50℃			
*** Note: The High Voltage DC4.35V and Low Voltage DC3.4V were declared by manufacturer, The				
EUT couldn't be operating normally with higher or lower voltage.				
Other functions have been performed according to verification procedure except for Bluetooth and				

^{***} **Note:** The maximum power levels are GSM for MCS-4: GMSK link, and RMC 12.2kbps mode for WCDMA band II, WCDMA band V, only these modes were used for all tests.

MS function. Card 1 can't transmit with Card 2 simultaneously.

We found out the test mode with the highest power level after we analyze all the data rates. So we chose worst case as a representative.

Report No.: AGC00069150808FE02 Page 7 of 108

WCDMA Card Slot:

	Maximum ERP/EIRP	Max. Conducted Power	Max. Average	
	(dBm)	(dBm)	Burst Power (dBm)	
GSM 850	30.42	32.53	31.21	
PCS 1900	27.31	29.56	28.22	
UMTS BAND II	21.26	23.59	21.35	
UMTS BAND V	21.47	23.42	21.28	

GSM Card Slot:

	Maximum ERP/EIRP	Max. Conducted Power	Max. Average	
	(dBm)	(dBm)	Burst Power (dBm)	
GSM 850	30.21	31.83	31.12	
PCS 1900	27.15	29.16	28.05	

Page 8 of 108

2.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2AE56A6**, filing to comply with the FCC Part 22H&24E requirements.

2.3 TEST METHODOLOGY

The radiated emission testing was performed according to the procedures of ANSI C 63.4: 2003; TIA/EIA 603 and FCC CFR 47 Rules of 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057.

KDB 971168 D01 Power Meas License Digital Systems v02r01

2.4 TEST FACILITY

Site	Dongguan Precise Testing Service Co., Ltd.		
Location Building D,Baoding Technology Park,Guangming Road2,Dongcheng District, Dongguan, Guangdong, China,			
FCC Registration No.	371540		
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2009.		

Page 9 of 108

2.5 MEASUREMENT INSTRUMENTS

Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016
Trilog Broadband Antenna (25M-1GHz)	SCHWARZBECK	VULB9160	9160-3355	July 4, 2015	July 3, 2016
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 4, 2015	July 3, 2016
RF Cable	SCHWARZBECK	AK9515E	96221	July 4, 2015	July 3, 2016
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2015	June 5, 2016
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A
Active loop antenna (9K-30MHz)	Schwarzbeck	FMZB1519	1519-038	June 6, 2015	June 5, 2016
Spectrum analyzer	Agilent	E4407B	MY46185649	June 6, 2015	June 5, 2016
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	July 11, 2015	July 10, 2016
Spectrum Analyzer	Agilent	E4411B	MY4511453	July 4, 2015	July 3, 2016
Signal Amplifier	SCHWARZBECK	BBV 9718	9718-269	July 7, 2015	July 6, 2016
RF Cable	SCHWARZBECK	AK9515H	96220	July 8, 2015	July 7, 2016
Horn Ant (18G-40GHz)	Schwarzbeck	BBHA 9170	9170-181	June 6, 2015	June 5, 2016
Artificial Mains Network	Narda	L2-16B	000WX31025	July 8, 2015	July 7, 2016
Artificial Mains Network (AUX)	Narda	L2-16B	000WX31026	July 8, 2015	July 7, 2016
RF Cable	SCHWARZBECK	AK9515E	96222	July 4, 2015	July 3, 2016
Shielded Room	CHENGYU	843	PTS-002	June 6,2015	June 5,2016
COMMUNICATION TESTER	AGILENT	8960	GB46490550	July 25, 2015	July 24, 2016

2.6 SPECIAL ACCESSORIES

The battery and the charger, earphone supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

2.7 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

Page 10 of 108

3. SYSTEM TEST CONFIGURATION

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

3.3 GENERAL TECHNICAL REQUIREMENTS

Item Number	Item	FCC Rules	
4	Output Dawar	Conducted output power	2.1046/22.913(a) (2) / 24.232
l	Output Power	Radiated output power	(c)
2	Peak-to-Average Ratio	Peak-to-Average Ratio	24.232(d)
3	Spurious Emission	Conducted spurious emission	2.1051 / 22.917 / 24.238
	Radiated spurious emission		
4	Mains Conducted Emi	ssion	15.107 / 15.207
5	Frequency Stability		2.1055/22.355 /24.235
6	Occupied Bandwidth		2.1049 (h)(i)
7	Emission Bandwidth		22.917(a)/24.238(a)
8	Band Edge		22.917(a)/24.238(a)

Page 11 of 108

3.4 CONFIGURATION OF EUT SYSTEM

Fig. 2-1 Configuration of EUT System




Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Note
1	Smart Phone	A6	FCC ID: 2AE56A6	EUT
2	Adapter	A6	DC5V /1000mA	Accessory
3	Battery	A6	DC3.8/ 2000 mAh	Accessory
4	Earphone	A6	N/A	Accessory
5	USB Cable	A6	N/A	Accessory

^{***}Note: All the accessories have been used during the test. The following "EUT" in setup diagram means EUT system.

Page 12 of 108

4. SUMMARY OF TEST RESULTS

Item Number	Item Description		FCC Rules	Result
		Conducted		
1	Output Dower	Output Power	2.1046/22.913(a) (2) /	Door
!	Output Power	Radiated	24.232 (c)	Pass
		Output Power		
2	Peak-to-Average	Peak-to-Average	24 222(4)	Door
2	Ratio	Ratio	24.232(d)	Pass
	Spurious Emission	Conducted	- 2.1051 / 22.917 / 24.238	Pass
3		Spurious Emission		
3		Radiated		
		Spurious Emission		
4	Mains Conducted Em	ission	15.107 / 15.207	Pass
5	Fraguency Stability		2.1055/22.355	Pass
5	Frequency Stability		/24.235	F d 5 5
6	Occupied Bandwidth		2.1049 (h)(i)	Pass
7	Emission Bandwidth		22.917(a)/24.238(a)	Pass
8	Band Edge		22.917(a)/24.238(a)	Pass

5. DESCRIPTION OF TEST MODES

been tested during the test.

During the testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication Tester (CMU 200) to ensure max power transmission and proper modulation. Three channels (The top channel, the middle channel and the bottom channel) were chosen for testing on both GSM and PCS frequency band.

***Note: GSM/GPRS 850, GSM/GPRS 1900, WCDMA/HSPA band II, WCDMA/HSPA band V, mode have

The worst condition was recorded in the test report if no other modes test data.

Page 13 of 108

6. OUTPUT POWER

6.1 CONDUCTED OUTPUT POWER

6.1.1 MEASUREMENT METHOD

The transmitter output port was connected to base station.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Measure the maximum burst average power and average power for other modulation signal.

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all modes (GSM/GPRS850, GSM/GPRS1900, WCDMA/HSPA band II, WCDMA/HSPA band V) at 3 typical channels (the Top Channel, the Middle Channel and the Bottom Channel) for each band.

6.1.2 MEASUREMENT RESULT

Conducted Output Power Limits for GSM850/EDGE band						
Mode	Nominal Peak Power	Tolerance(dB)				
GSM	33 dBm (2W)	- 2				
	Conducted Output Power Limits for PCS1900/EDGE band					
Mode	Nominal Peak Power	Tolerance(dB)				
GSM	30 dBm (1W)	- 2				
	Conducted Output Power Limits for UMTS	band II				
Mode	Nominal Peak Power	Tolerance(dB)				
WCDMA	24 dBm (0.25W)	- 2				
	Conducted Output Power Limits for UMTS band V					
Mode	Nominal Peak Power	Tolerance(dB)				
WCDMA	24 dBm (0.25W)	- 2				

Report No.: AGC00069150808FE02 Page 14 of 108

GSM 850:

Mode	Frequency	Reference	Peak	Tolerance	Avg.Burst	Duty cycle	Frame
Mode	(MHz)	Power	Power		Power	Factor(dB)	Power(dBm)
	824.2	33	32.53	-0.47	31.21	-9	22.21
GSM850	836.6	33	32.49	-0.51	31.19	-9	22.19
	848.8	33	32.53	-0.47	31.15	-9	22.15
CDDC050	824.2	33	32.37	-0.63	30.68	-9	21.68
GPRS850	836.6	33	32.34	-0.66	30.64	-9	21.64
(1 Slot)	848.8	33	32.32	-0.68	30.62	-9	21.62
CDDC050	824.2	30	29.61	-0.39	28.39	-6	22.39
GPRS850	836.6	30	29.57	-0.43	28.34	-6	22.34
(2 Slot)	848.8	30	29.54	-0.46	28.37	-6	22.37
CDDC050	824.2	28.23	27.68	-0.55	26.34	-4.26	22.08
GPRS850	836.6	28.23	27.64	-0.59	26.29	-4.26	22.03
(3 Slot)	848.8	28.23	27.61	-0.62	26.26	-4.26	22
CDDC0F0	824.2	27	26.69	-0.31	25.32	-3	22.32
GPRS850	836.6	27	26.64	-0.36	25.38	-3	22.38
(4 Slot)	848.8	27	26.61	-0.39	25.26	-3	22.26

Report No.: AGC00069150808FE02 Page 15 of 108

PCS 1900:

		Deference					
Mode	Frequency (MHz)	Reference Power	Peak Power	Tolerance	Avg.Burst Power	Duty cycle Factor(dB)	Frame Power(dBm)
	1850.2	30	29.56	-0.44	28.22	-9	19.22
GSM1900	1880	30	29.51	-0.49	28.18	-9	19.18
	1909.8	30	29.47	-0.53	28.15	-9	19.15
00004000	1850.2	30	29.39	-0.61	27.65	-9	18.65
GPRS1900	1880	30	29.36	-0.64	27.61	-9	18.61
(1 Slot)	1909.8	30	29.31	-0.69	27.57	-9	18.57
ODD04000	1850.2	27	26.68	-0.32	25.37	-6	19.37
GPRS1900	1880	27	26.64	-0.36	25.34	-6	19.34
(2 Slot)	1909.8	27	26.61	-0.39	25.32	-6	19.32
ODD04000	1850.2	25.23	24.61	-0.62	23.45	-4.26	19.19
GPRS1900	1880	25.23	24.59	-0.64	23.44	-4.26	19.18
(3 Slot)	1909.8	25.23	24.52	-0.71	23.42	-4.26	19.16
ODD04000	1850.2	24	23.61	-0.39	22.34	-3	19.34
GPRS1900	1880	24	23.55	-0.45	22.31	-3	19.31
(4 Slot)	1909.8	24	23.52	-0.48	22.28	-3	19.28

Report No.: AGC00069150808FE02 Page 16 of 108

UMTS BAND II

Mode	Frequency (MHz)	Reference power	Peak Power	Tolerance	Avg.Burst Power
	1852.6	24	23.59	-0.41	21.35
WCDMA 1900 RMC	1880	24	23.49	-0.51	21.32
Tavio	1907.4	24	23.44	-0.56	21.28
	1852.6	24	23.39	-0.61	21.17
WCDMA 1900 AMR	1880	24	23.36	-0.64	21.14
7 ((1))	1907.4	24	23.32	-0.68	21.12
	1852.6	24	22.54	-1.46	20.26
HSDPA Subtest 1	1880	24	22.51	-1.49	20.23
	1907.4	24	22.48	-1.52	20.21
	1852.6	24	22.64	-1.36	20.37
HSDPA Subtest 2	1880	24	22.59	-1.41	20.29
Odbiosi 2	1907.4	24	22.62	-1.38	20.26
	1852.6	24	22.57	-1.43	20.34
HSDPA Subtest 3	1880	24	22.56	-1.44	20.29
Cubicsi 5	1907.4	24	22.67	-1.33	20.27
	1852.6	24	22.62	-1.38	20.31
HSDPA Subtest 4	1880	24	22.59	-1.41	20.28
Oublest 4	1907.4	24	22.56	-1.44	20.24
	1852.6	24	22.67	-1.33	20.22
HSUPA Subtest 1	1880	24	22.63	-1.37	20.16
Subtest 1	1907.4	24	22.58	-1.42	20.18
	1852.6	24	22.61	-1.39	20.24
HSUPA Subtest 2	1880	24	22.64	-1.36	20.26
Oublest 2	1907.4	24	22.58	-1.42	20.22
	1852.6	24	22.65	-1.35	20.34
HSUPA Subtest 3	1880	24	22.62	-1.38	20.29
Cubiesi 3	1907.4	24	22.59	-1.41	20.33
	1852.6	24	22.71	-1.29	20.32
HSUPA Subtest 4	1880	24	22.68	-1.32	20.36
Oublest 4	1907.4	24	22.64	-1.36	20.28
	1852.6	24	22.66	-1.34	20.34
HSUPA Subtest 5	1880	24	22.65	-1.35	20.37
Sublest 3	1907.4	24	22.56	-1.44	20.26

Report No.: AGC00069150808FE02 Page 17 of 108

UMTS BAND V

Mode	Frequency (MHz)	Reference power	Peak Power	Tolerance	Avg.Burst Power
	826.6	24	23.42	-0.58	21.28
WCDMA 850 RMC	836.4	24	23.38	-0.62	21.26
	846.4	24	23.36	-0.64	21.23
	826.6	24	23.29	-0.71	21.17
WCDMA 850 AMR	836.4	24	23.24	-0.76	21.16
7 ((V))	846.4	24	23.22	-0.78	21.13
	826.6	24	22.53	-1.47	20.31
HSDPA Subtest 1	836.4	24	22.47	-1.53	20.26
Cubicot i	846.4	24	22.45	-1.55	20.24
	826.6	24	22.58	-1.42	20.25
HSDPA Subtest 2	836.4	24	22.52	-1.48	20.22
Gubicst 2	846.4	24	22.49	-1.51	20.19
	826.6	24	22.66	-1.34	20.34
HSDPA Subtest 3	836.4	24	22.64	-1.36	20.29
Subtest 5	846.4	24	22.56	-1.44	20.27
	826.6	24	22.63	-1.37	20.34
HSDPA Subtest 4	836.4	24	22.61	-1.39	20.29
Gubtost 4	846.4	24	22.57	-1.43	20.26
	826.6	24	22.64	-1.36	20.24
HSUPA Subtest 1	836.4	24	22.59	-1.41	20.22
Gubicot i	846.4	24	22.55	-1.45	20.16
	826.6	24	22.67	-1.33	20.23
HSUPA Subtest 2	836.4	24	22.59	-1.41	20.21
Gubicot 2	846.4	24	22.55	-1.45	20.17
	826.6	24	22.68	-1.32	20.33
HSUPA Subtest 3	836.4	24	22.64	-1.36	20.26
	846.4	24	22.59	-1.41	20.23
	826.6	24	22.66	-1.34	20.35
HSUPA Subtest 4	836.4	24	22.55	-1.45	20.31
Cubicot 4	846.4	24	22.52	-1.48	20.28
	826.6	24	22.67	-1.33	20.34
HSUPA Subtest 5	836.4	24	22.63	-1.37	20.26
Oublest 5	846.4	24	22.59	-1.41	20.29

Page 18 of 108

According to 3GPP 25.101 sub-clause 6.2.2 , the maximum output power is allowed to be reduced by following the table.

Table 6.1aA: UE maximum output power with HS-DPCCH and E-DCH

UE Transmit Channel Configuration	CM(db)	MPR(db)		
For all combinations of ,DPDCH,DPCCH	0< CM<2.5	MAN/(CM 4 0)		
HS-DPDCH,E-DPDCH and E-DPCCH	0≤ CM≤3.5	MAX(CM-1,0)		
Note: CM=1 for $\beta_a/\beta_a=12/15$ $\beta_{ba}/\beta_a=24/15$ For all other combinations of DPDCH_DPCCH				

Note: CM=1 for β_c/β_d =12/15, β_{hs}/β_c =24/15.For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Page 19 of 108

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done. However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensate for the power back-off by increasing the gain of TX_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.

Page 20 of 108

6.2 RADIATED OUTPUT POWER

6.2.1 MEASUREMENT METHOD

The measurements procedures specified in TIA-603C-2004 were applied.

- In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (Pin) is applied to the input of the dipole, and the power received (Pr) at the chamber's probe antenna is recorded.
- 2 The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established as ARpl=Pin + 2.15 Pr. The ARpl is the attenuation of "reference path loss", and including the gain of receive antenna, the cable loss and the air loss. The measurement results are obtained as described below: Power=PMea+ARpl
- 3 The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.
- 4 From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.
- 5 The EUT is then put into continuously transmitting mode at its maximum power level.
- Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step1 is added to this result.
- 7 This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power (Pin).
- 8 ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.15dBi..

6.2.2 PROVISIONS APPLICABLE

This is the test for the maximum radiated power from the EUT. Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 22.913(a) specifies "Maximum ERP. The effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

Mode	Nominal Peak Power
GSM 850	<=38.45 dBm (7W)
PCS 1900	<=33 dBm (2W)
UMTS BAND II	<=33 dBm (2W)
UMTS BANDV	<=38.45 dBm (7W)

Report No.: AGC00069150808FE02 Page 21 of 108

6.2.3 MEASUREMENT RESULT

Radiated Power (ERP) for GSM 850					
		Result			
Mode	Frequency	Max. Peak ERP	Polarization	Conclusion	
		(dBm)	Of Max. ERP		
	824.2	30.42	Horizontal	Pass	
	836.6	30.35	Horizontal	Pass	
GSM850 -	848.8	30.32	Horizontal	Pass	
GSIVIOSU	824.2	29.69	Vertical	Pass	
	836.6	29.81	Vertical	Pass	
	848.8	28.78	Vertical	Pass	

Radiated Power (E.I.R.P) for PCS 1900					
		Res	Result		
Mode	Frequency	Max. Peak	Polarization	Conclusion	
		E.I.R.P.(dBm)	Of Max. E.I.R.P.		
	1850.2	27.26	Horizontal	Pass	
	1880.0	27.31	Horizontal	Pass	
GSM 1900	1909.8	27.22	Horizontal	Pass	
G3W 1900	1850.2	26.59	Vertical	Pass	
	1880.0	26.78	Vertical	Pass	
	1909.8	26.81	Vertical	Pass	

Radiated Power (E.I.R.P) for UMTS band II						
		Result				
Mode	Frequency	Max. Peak E.I.R.P	Polarization			
		(dBm)	Of Max. E.I.R.P			
	1852.6	21.26	Horizontal	Pass		
	1880	21.18	Horizontal	Pass		
RMC	1907.4	21.15	Horizontal	Pass		
12.2kbps	1852.6	21.02	Vertical	Pass		
	1880	20.86	Vertical	Pass		
	1907.4	21.06	Vertical	Pass		

Radiated Power (ERP) for UMTS band V					
		R	esult		
Mode	Frequency	Max. Peak ERP	Polarization	Conclusion	
		(dBm)	Of Max. E.I.R.P.		
	826.6	21.47	Horizontal	Pass	
	836.4	20.89	Horizontal	Pass	
RMC	846.4	21.37	Horizontal	Pass	
12.2kbps	826.6	20.75	Vertical	Pass	
	836.4	20.69	Vertical	Pass	
	846.4	20.88	Vertical	Pass	

Note: Above is worst mode data.

Page 23 of 108

6.3. PEAK-TO-AVERAGE RATIO

6.3.1 MEASUREMENT METHOD

Use one of the procedures presented in 4.1 to measure the total peak power and record as PPk. Use one of the applicable procedures presented 4.2 to measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

PAPR (dB) = PPk (dBm) - PAvg (dBm).

6.3.2 PROVISIONS APPLICABLE

This is the test for the Peak-to-Average Ratio from the EUT.

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

6.3.3 MEASUREMENT RESULT

Modes	GSM850(GSM)			
Channel	128	190	251	
	(Low)	(Mid)	(High)	
Frequency	824.2	836.6	848.8	
(MHz)	024.2	030.0	040.0	
Peak-To-Average Ratio (dB)/GSM	1.32	1.3	1.38	

Modes	PCS 1900 (GSM)			
Channel	512	661	810	
	(Low)	(Mid)	(High)	
Frequency	1850.2 1880		1909.8	
(MHz)	1650.2	1000	1909.0	
Peak-To-Average Ratio (dB)/GSM	1.34	1.33	1.32	

Report No.: AGC00069150808FE02 Page 24 of 108

Modes	UMTS BAND II		
Channel	9663	9800	9937
	(Low)	(Mid)	(High)
Frequency (MHz)	1852.6	1880	1907.4
Peak-To-Average Ratio (dB)	2.24	2.17	2.16

Modes	UMTS BAND V			
Channel	4358	4407	4457	
	(Low)	(Mid)	(High)	
Frequency	826.6	836.6	846.4	
(MHz)	020.0	000.0	040.4	
Peak-To-Average Ratio (dB)	2.14	2.12	2.13	

Page 25 of 108

7. OCCUPIED BANDWIDTH

7.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

7.2 PROVISIONS APPLICABLE

The emission bandwidth is defined as two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power

Report No.: AGC00069150808FE02 Page 26 of 108

7.3 MEASUREMENT RESULT

APPENDIX A:BANDWIDTH

Test Results

Test	Test	Test	Occupied Bandwidth	Emission Bandwidth	Vardiat
Band	Mode	Channel	(KHZ)	(KHZ)	Verdict
GSM850 GSM	LCH	244.10	314.95	PASS	
	MCH	246.27	321.91	PASS	
	HCH	246.34	312.64	PASS	

Test Band	Test	Test	Occupied Bandwidth	Emission Bandwidth	Vardiet
	Mode	Channel	(KHZ)	(KHZ)	Verdict
GSM1900 GSM	<u> </u>	LCH	244.81	316.14	PASS
		MCH	242.39	312.27	PASS
		HCH	243.93	316.12	PASS


Report No.: AGC00069150808FE02 Page 27 of 108

For GSM

Test Band=GSM850


Test Mode=GSM

Test Channel=LCH

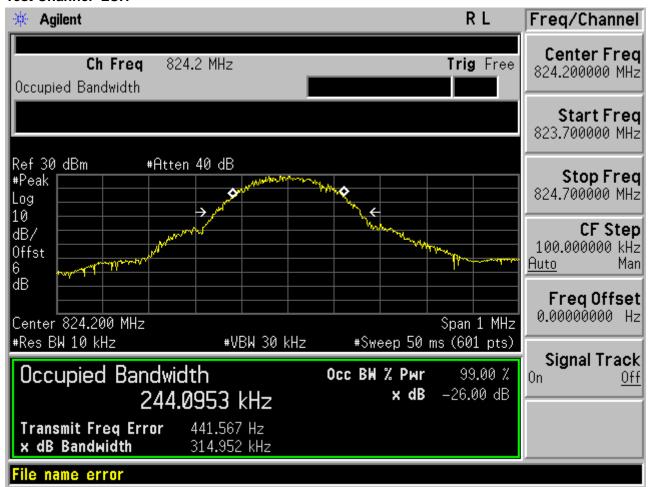


Report No.: AGC00069150808FE02 Page 28 of 108

Test Channel=MCH

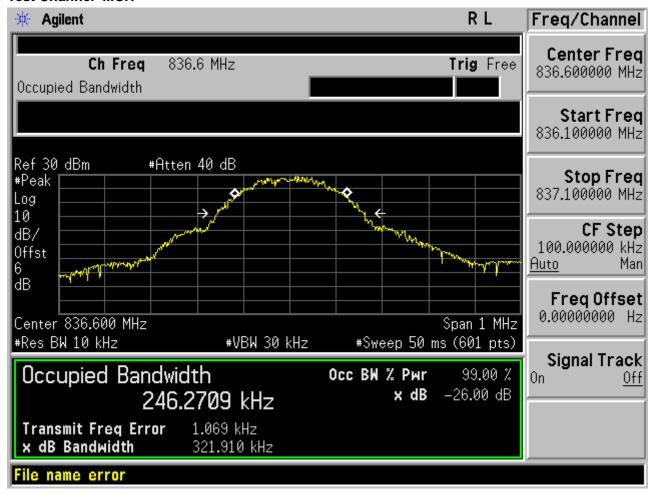

Page 29 of 108

Test Channel=HCH

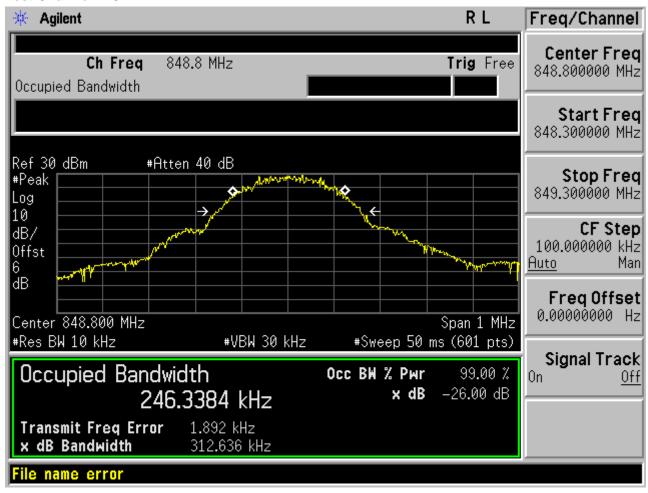

Report No.: AGC00069150808FE02 Page 30 of 108


Test Band=GSM1900

Test Mode=GSM Test Channel=LCH




Report No.: AGC00069150808FE02 Page 31 of 108

Test Channel=MCH

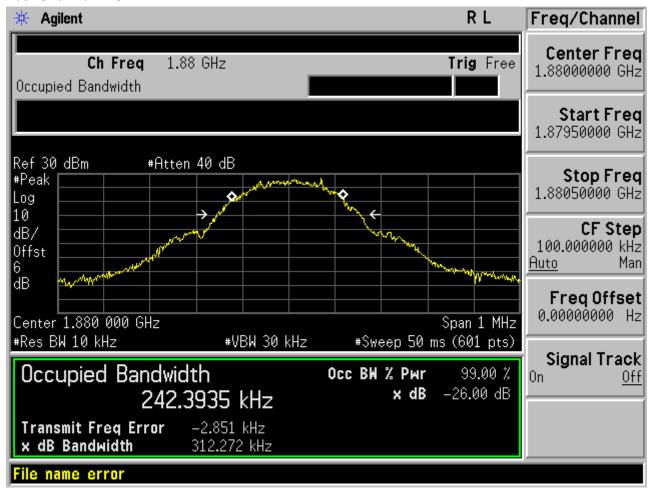

Page 32 of 108

Test Channel=HCH

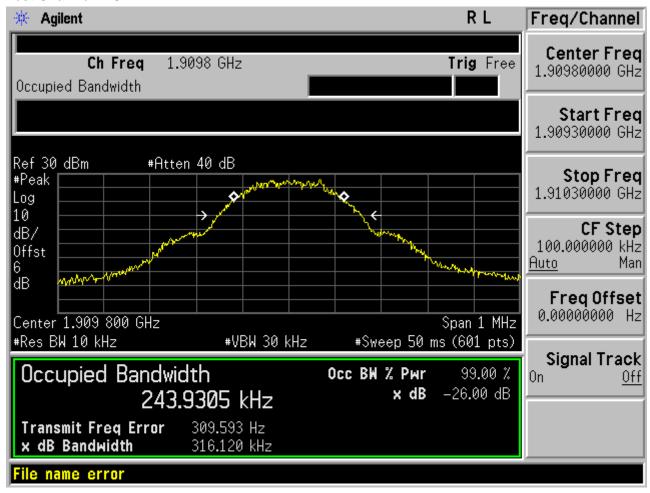

Report No.: AGC00069150808FE02 Page 33 of 108

Test Band	Test	Test	Occupied Bandwidth	Emission Bandwidth	Verdi
	Mode	Channel	(KHZ)	(KHZ)	ct
WCDMA8 50		LCH	4149.9	4675	PASS
	UMTS	MCH	4143.8	4665	PASS
		HCH	4151.0	4665	PASS

Test Band	Test	Test	Occupied Bandwidth	Emission Bandwidth	Verdi
	Mode	Channel	(KHZ)	(KHZ)	ct
WCDMA1 900		LCH	4151.1	4684	PASS
	UMTS	MCH	4152.5	4681	PASS
		HCH	4154.9	4687	PASS


Report No.: AGC00069150808FE02 Page 34 of 108

For WCDMA

Test Band=WCDMA850


Test Mode=UMTS

Test Channel=LCH

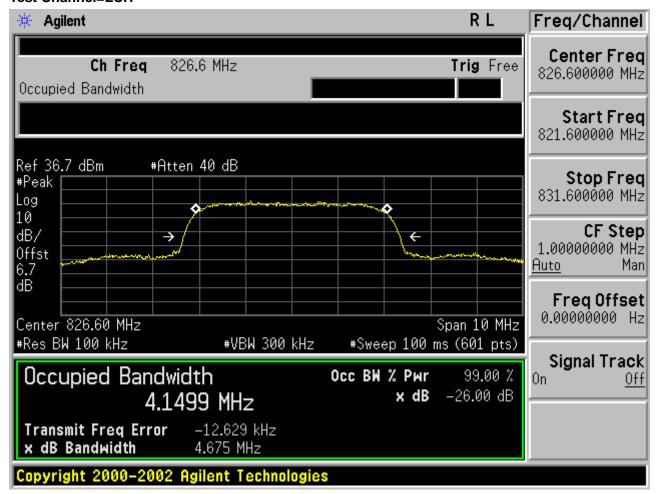


Page 35 of 108

Test Channel=MCH

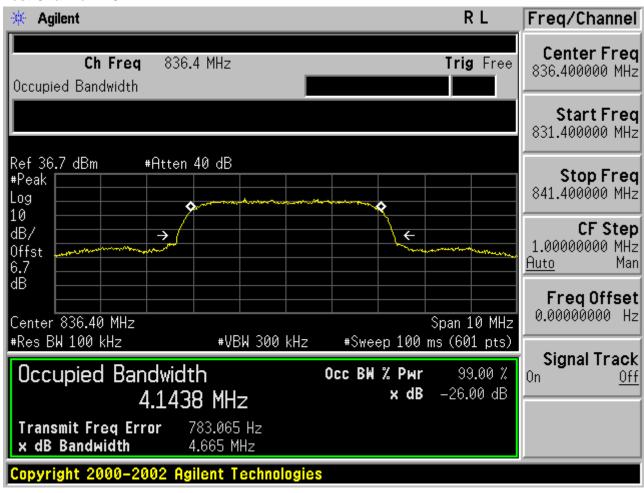

Page 36 of 108


Test Channel=HCH

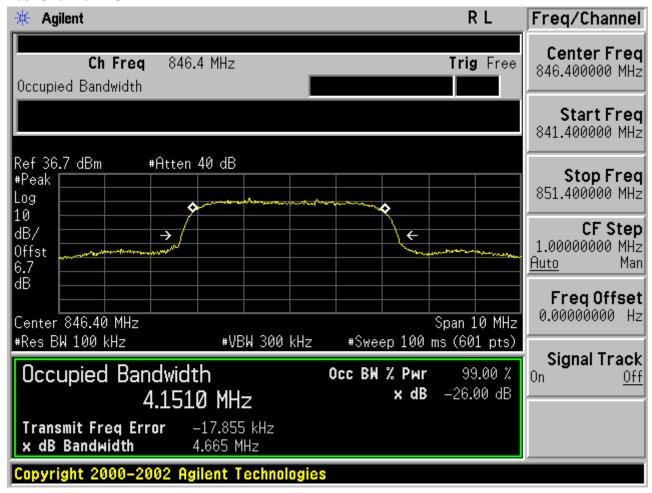


Report No.: AGC00069150808FE02 Page 37 of 108

Test Band=WCDMA1900


Test Mode=UMTS

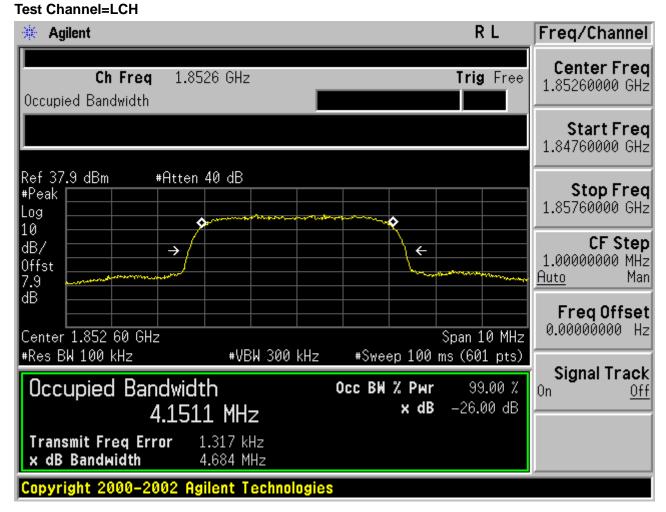

Page 38 of 108

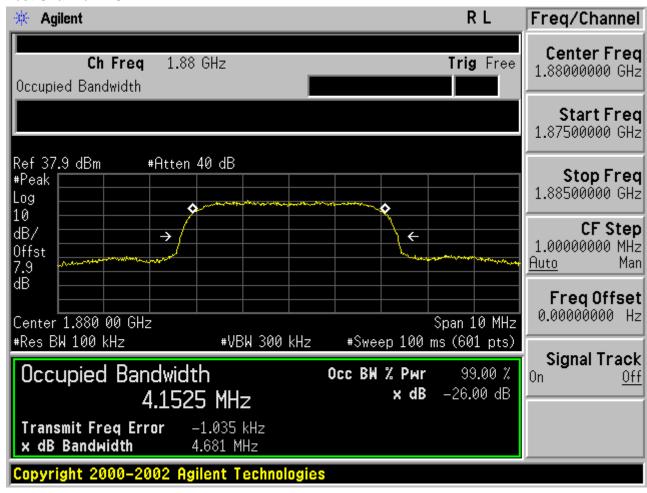

Page 39 of 108

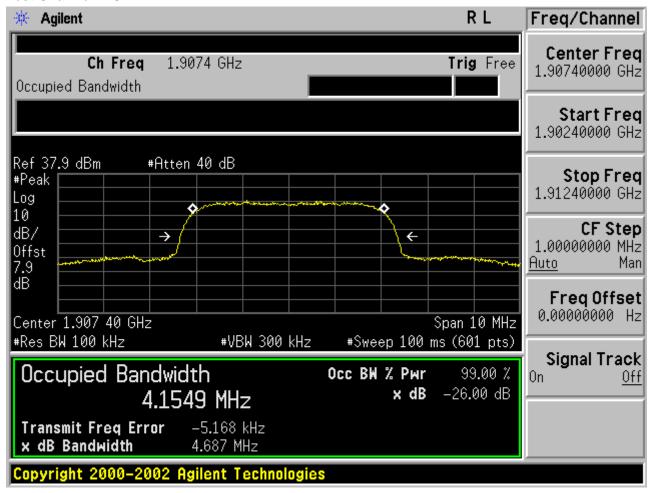

Page 40 of 108

8. BAND EDGE

8.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

8.2 PROVISIONS APPLICABLE

As Specified in FCC rules of 22.917(a) and 24.238(a)

Page 41 of 108

8.3 MEASUREMENT RESULT


APPENDIX B: BAND EDGES COMPLIANCE

Test Results


For GSM

Test Band=GSM850

Test Mode=GSM

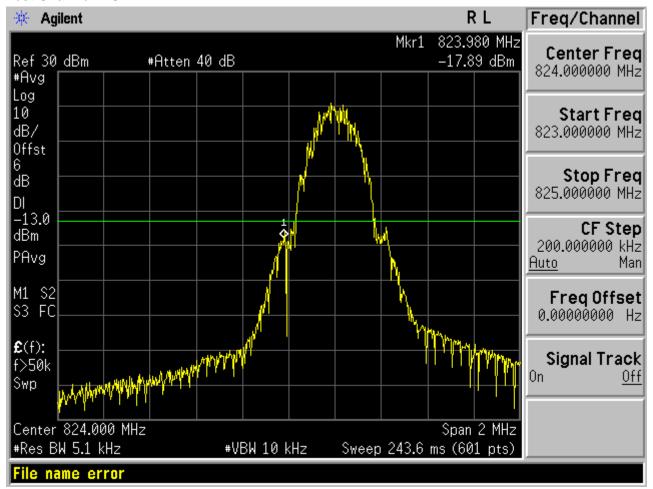


Report No.: AGC00069150808FE02 Page 42 of 108

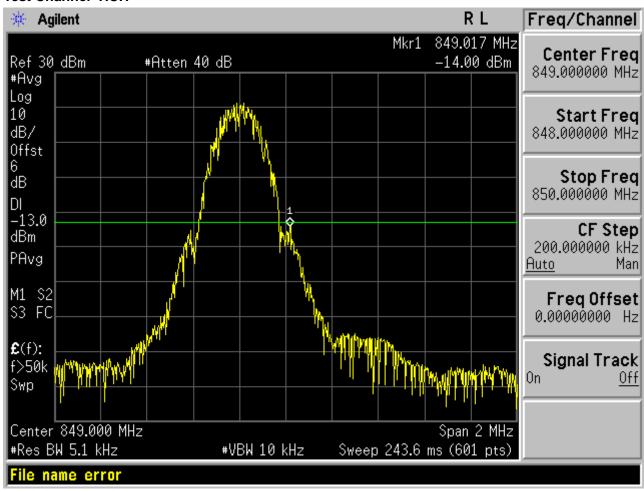


Report No.: AGC00069150808FE02 Page 43 of 108

Test Band=GSM1900

Test Mode=GSM
Test Channel=LCH

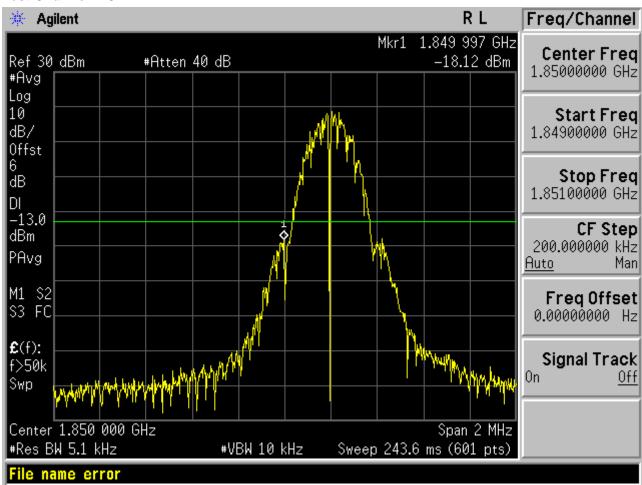


Report No.: AGC00069150808FE02 Page 44 of 108

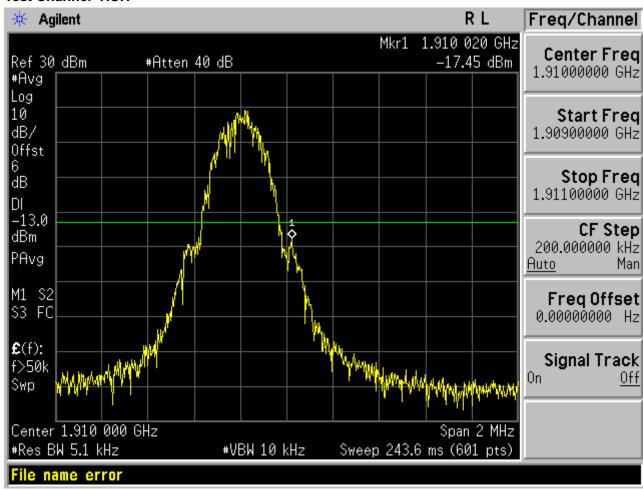


Page 45 of 108

For WCDMA

Test Band=WCDMA850
Test Mode=UMTS

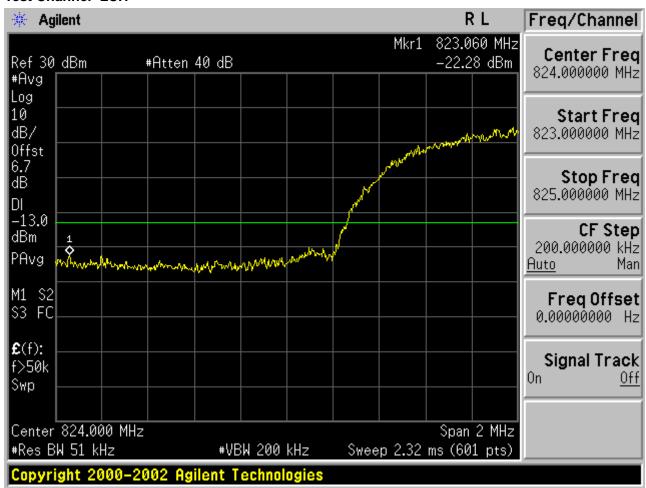


Page 46 of 108

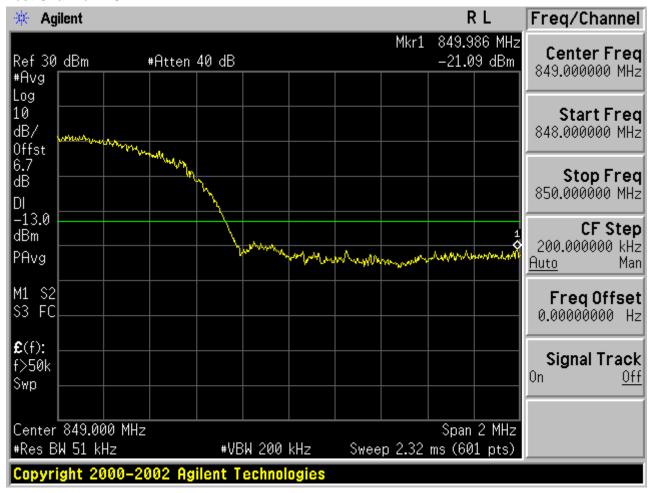


Report No.: AGC00069150808FE02 Page 47 of 108

Test Band=WCDMA1900

Test Mode=UMTS Test Channel=LCH

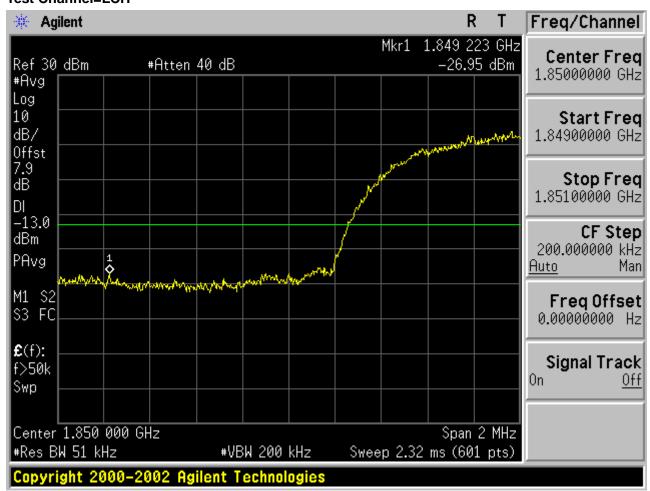

Page 48 of 108

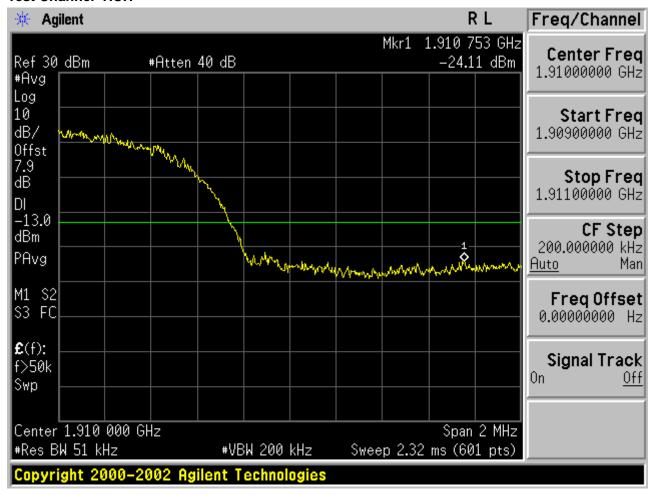

Page 49 of 108

9. SPURIOUS EMISSION

9.1 CONDUCTED SPURIOUS EMISSION

9.1.1 MEASUREMENT METHOD

The following steps outline the procedure used to measure the conducted emissions from the EUT.

- 1, Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For GSM 850, data taken from 30 MHz to 9 GHz.
- 2, Determine EUT transmit frequencies: the following typical channels were chosen to conducted emissions testing.

Typical Channels for testing of GSM 850		
Channel	Frequency (MHz)	
128	824.2	
190	836.6	
251	848.8	

Typical Channels for testing of PCS 1900		
Channel	Frequency (MHz)	
512	1850.2	
661	1880.0	
810	1909.8	

Typical Channels for testing of UMTS band II		
Channel	Frequency (MHz)	
9663	1852.6	
9800	1880	
9937	1907.4	

Typical Channels for testing of UMTS band V		
Channel	Frequency (MHz)	
4358	826.6	
4407	836.4	
4457	846.4	

Report No.: AGC00069150808FE02 Page 50 of 108

9.1.2 PROVISIONS APPLICABLE

On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.


9.1.3 MEASUREMENT RESULT


APPENDIX C: SPURIOUS EMISSION AT ANTENNA TERMINAL

Test Results


Test Band=GSM850


Test Mode=GSM

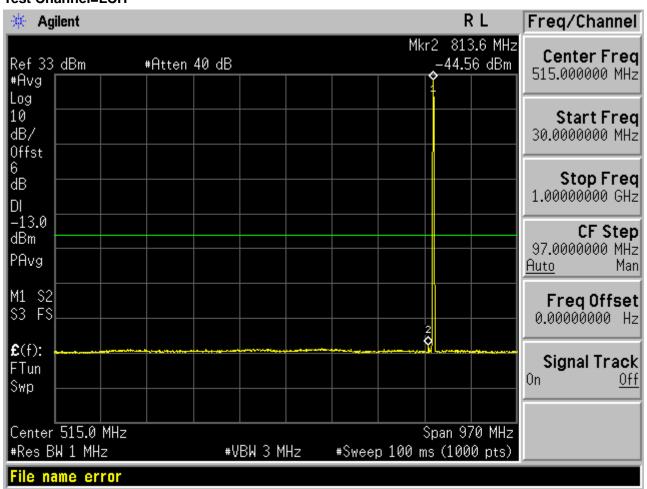

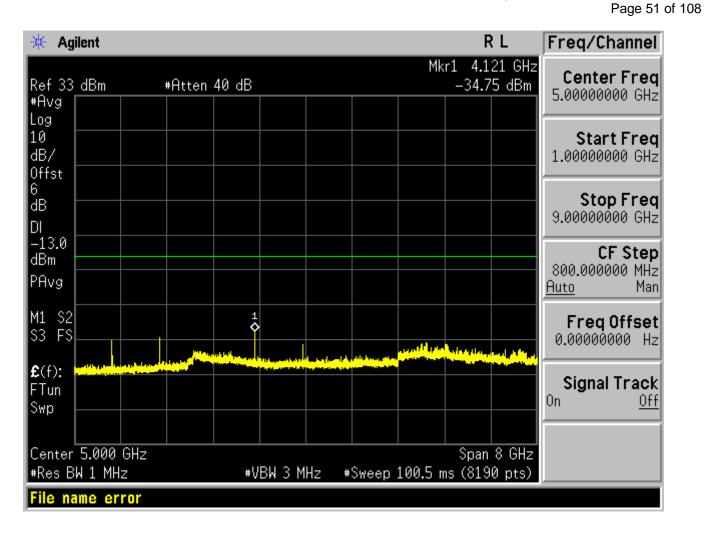



Report No.: AGC00069150808FE02 Page 52 of 108

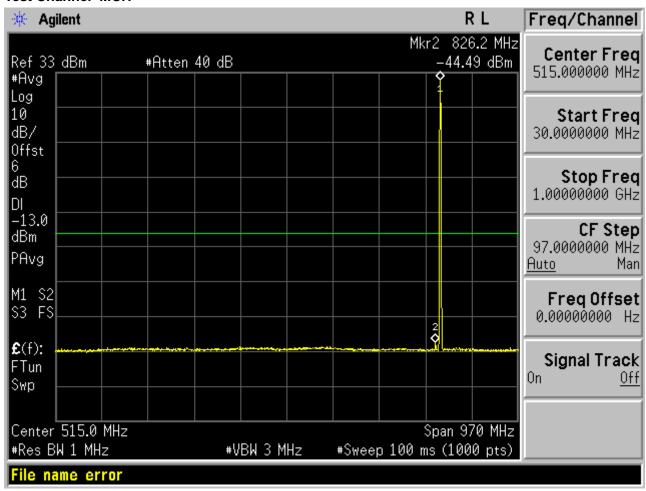

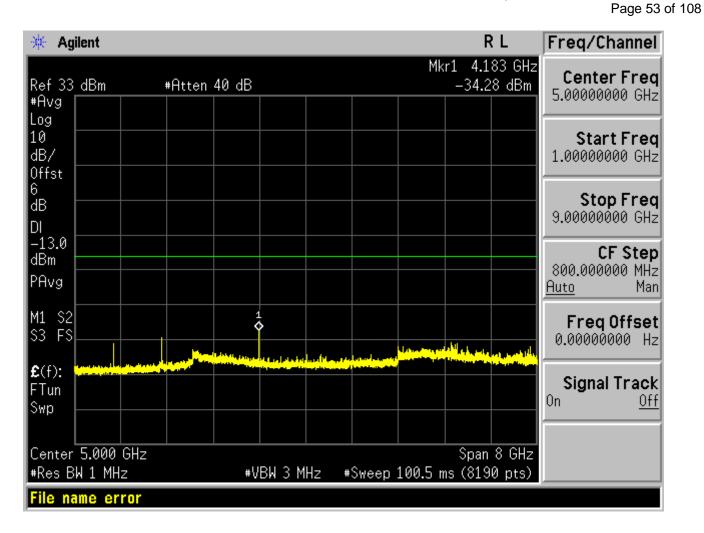

Page 54 of 108

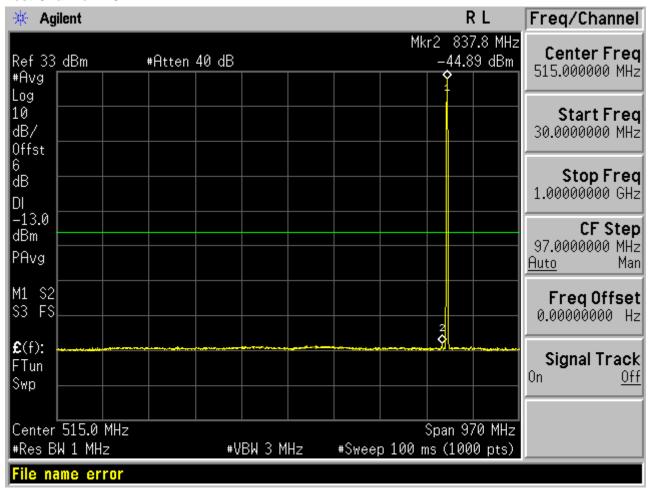


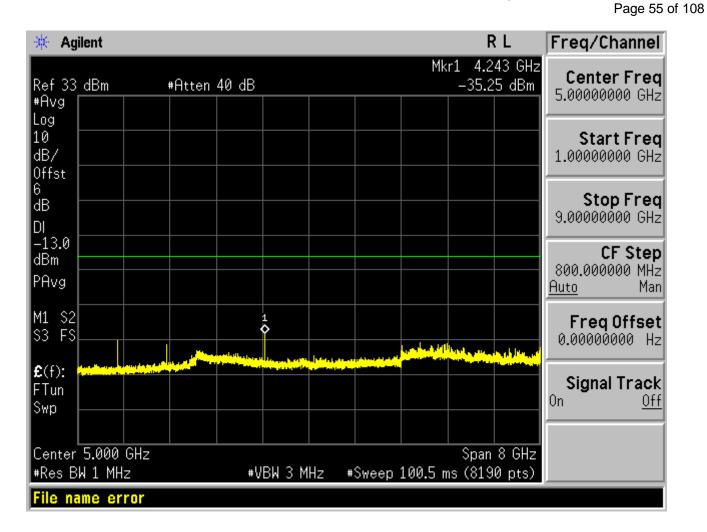



Report No.: AGC00069150808FE02 Page 56 of 108


Test Band=GSM1900

Test Mode=GSM
Test Channel=LCH

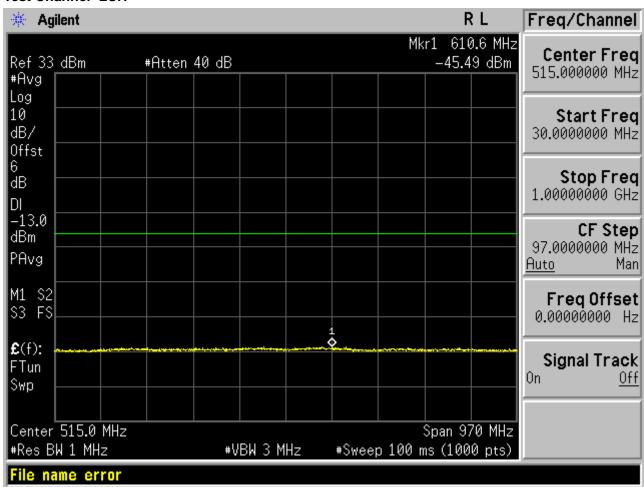


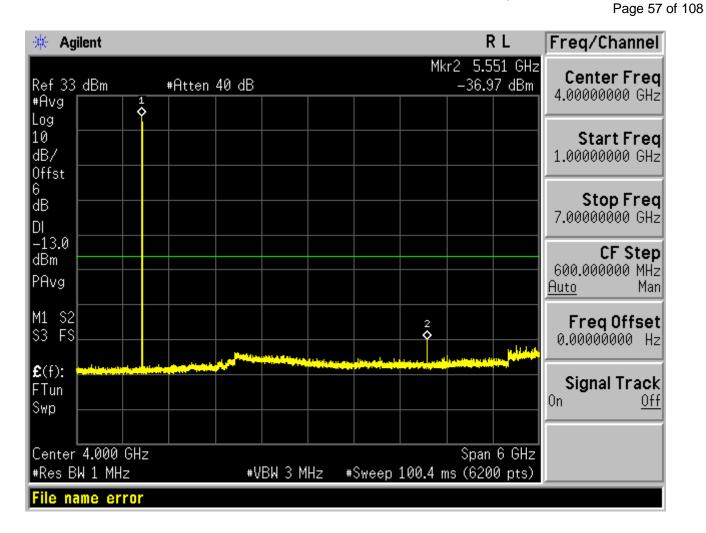


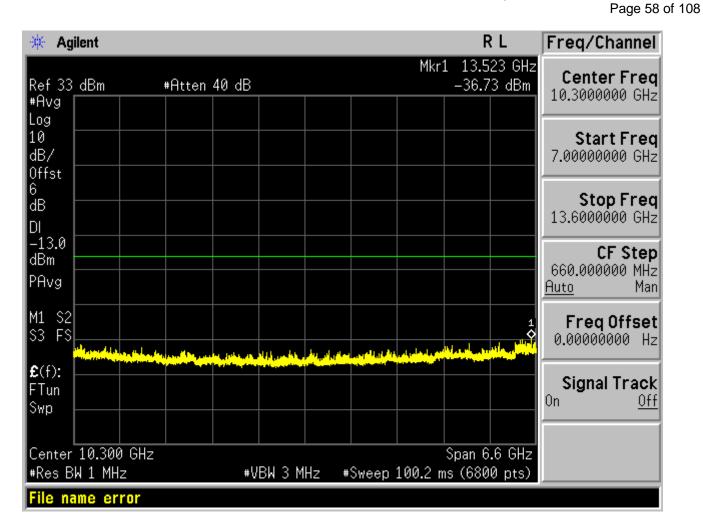

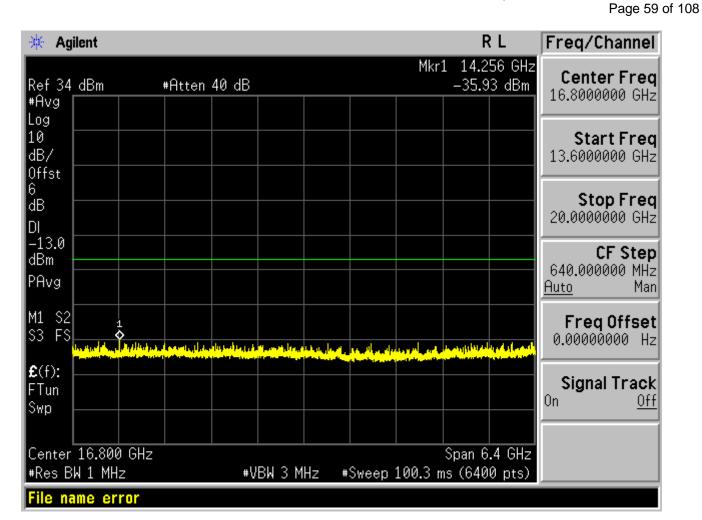



Report No.: AGC00069150808FE02 Page 60 of 108

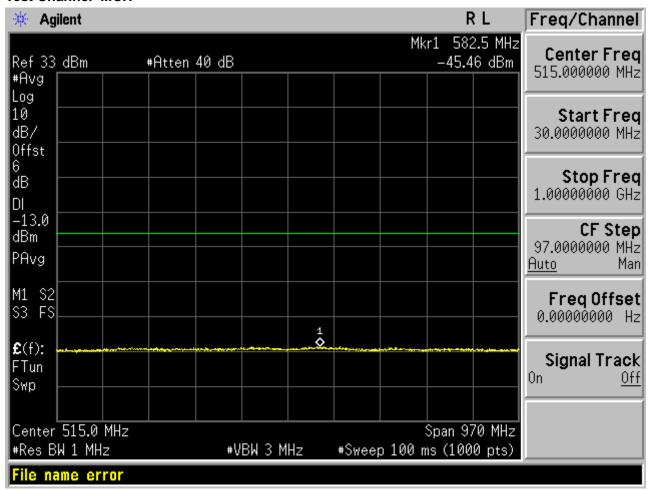

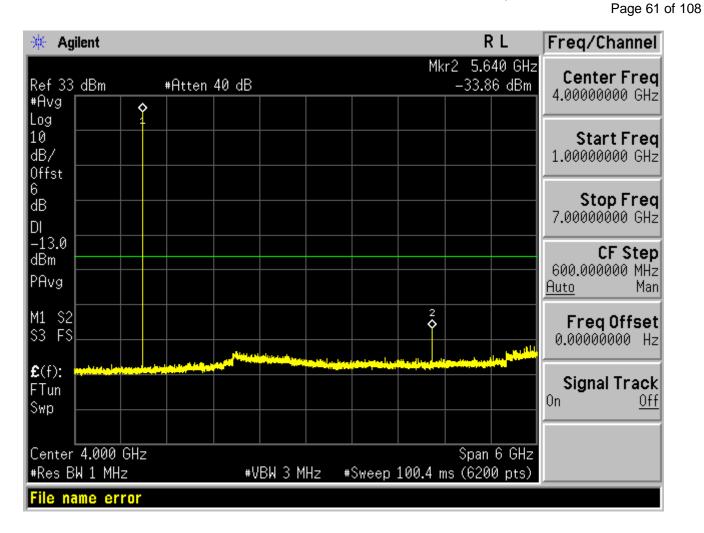



Page 62 of 108

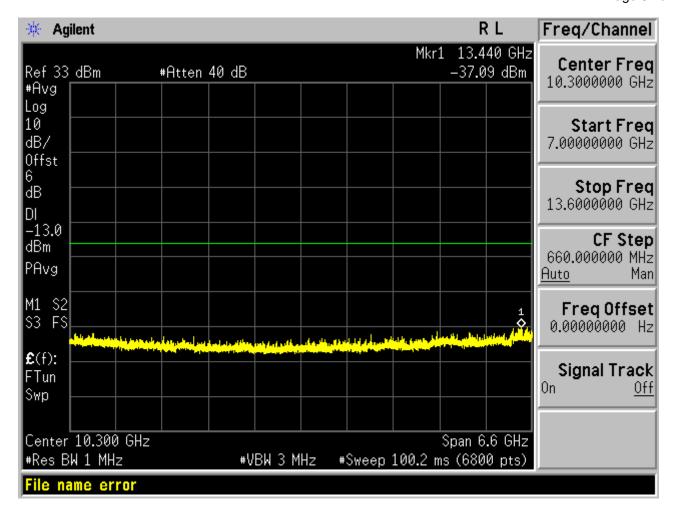


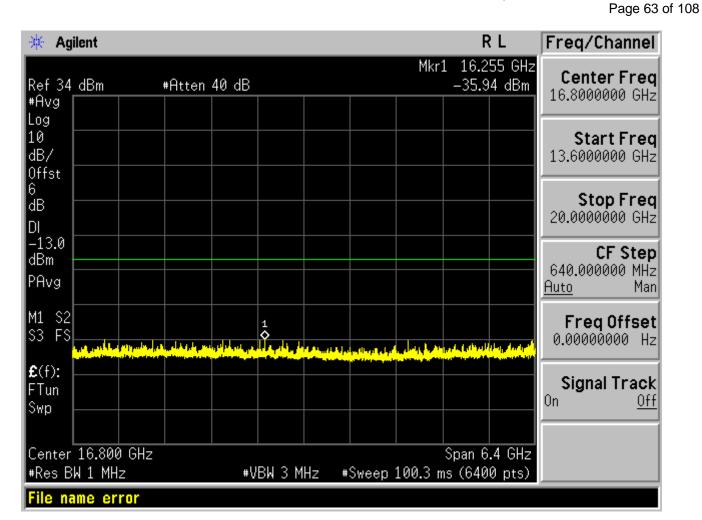


Page 64 of 108

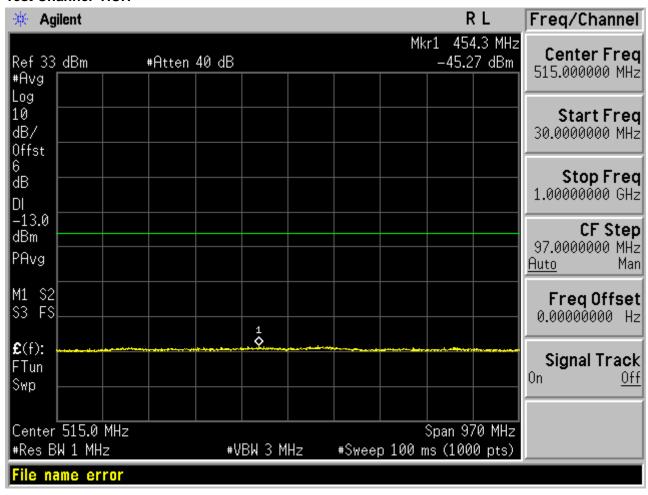

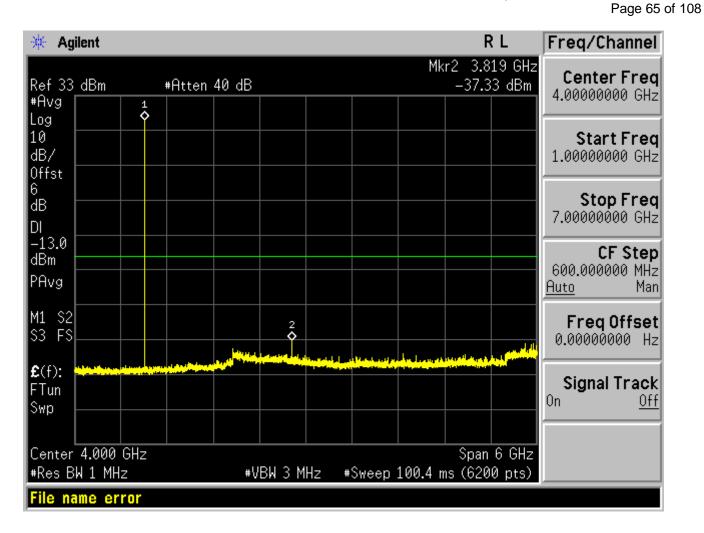

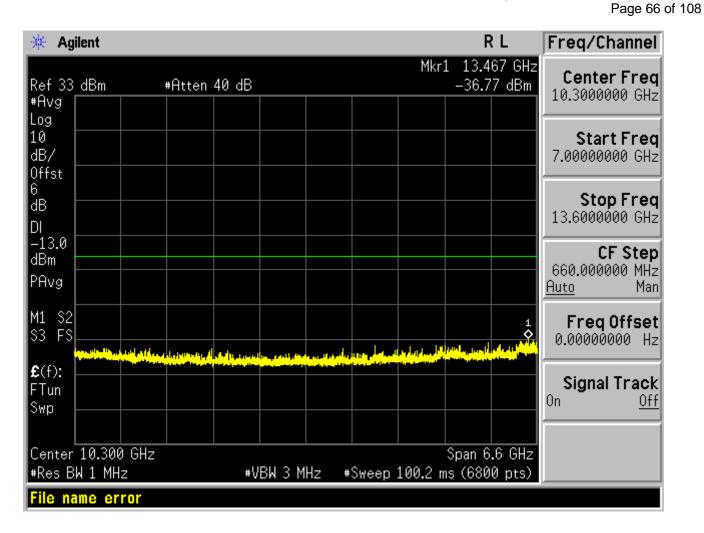


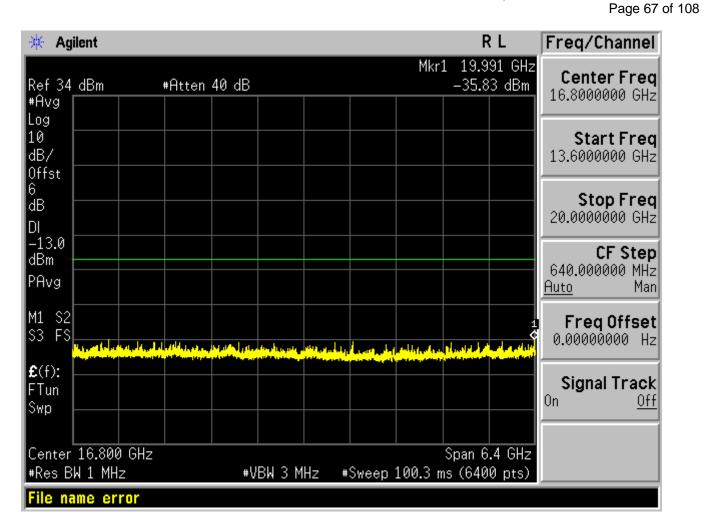


Report No.: AGC00069150808FE02 Page 68 of 108

Test Band=WCDMA850


Test Mode=UMTS Test Channel=LCH

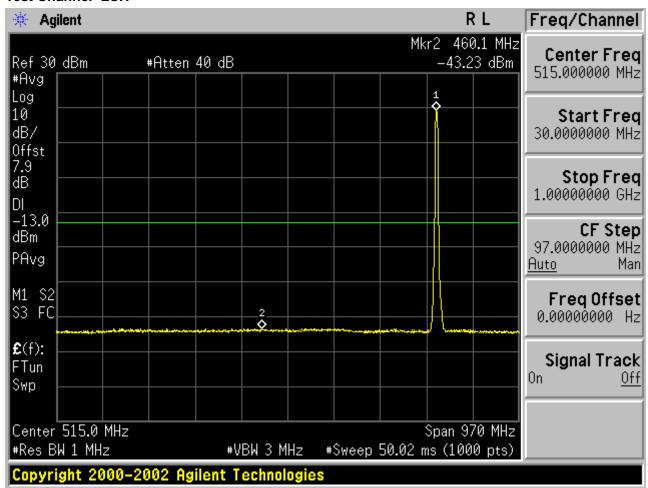


Page 69 of 108

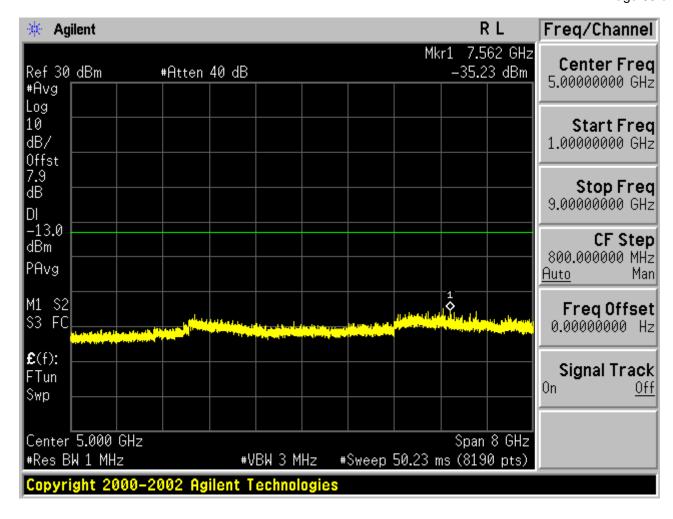



Report No.: AGC00069150808FE02 Page 70 of 108

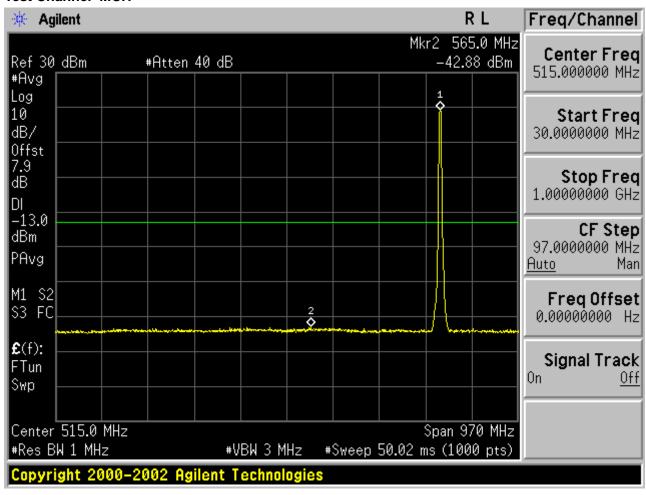

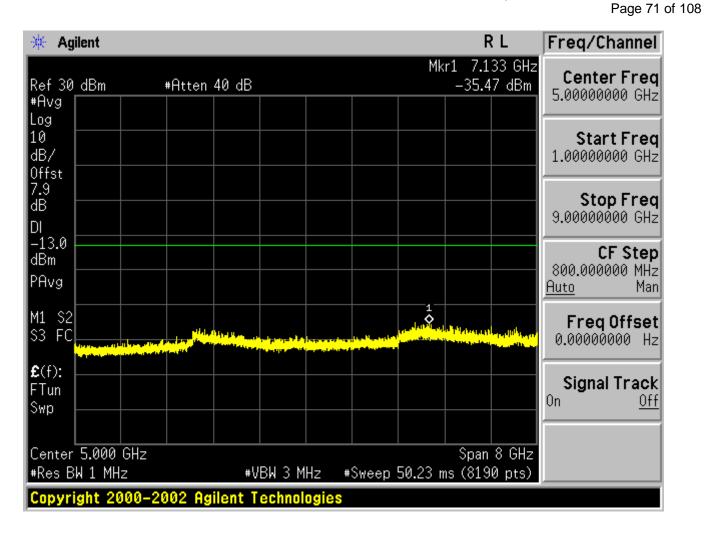

Report No.: AGC00069150808FE02 Page 72 of 108

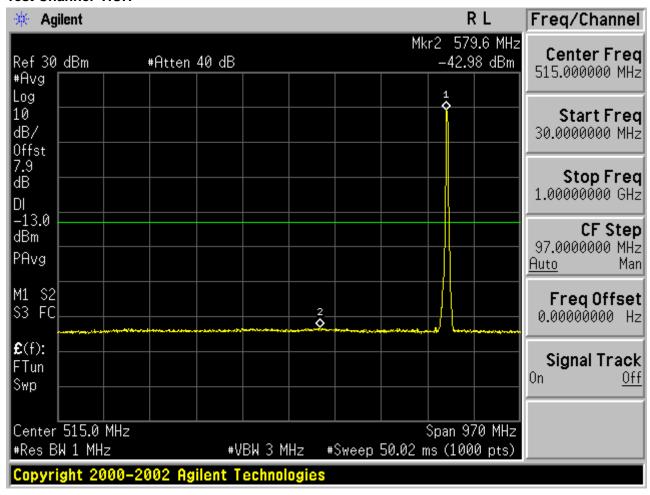


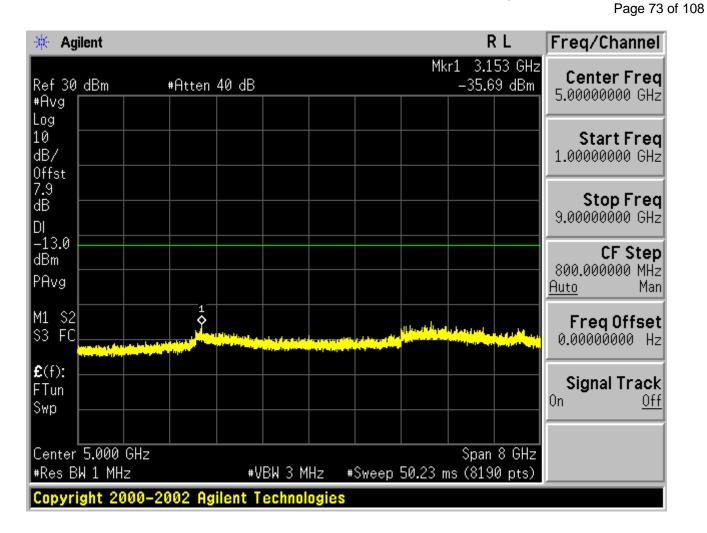



Report No.: AGC00069150808FE02 Page 74 of 108


Test Band=WCDMA1900

Test Mode=UMTS Test Channel=LCH

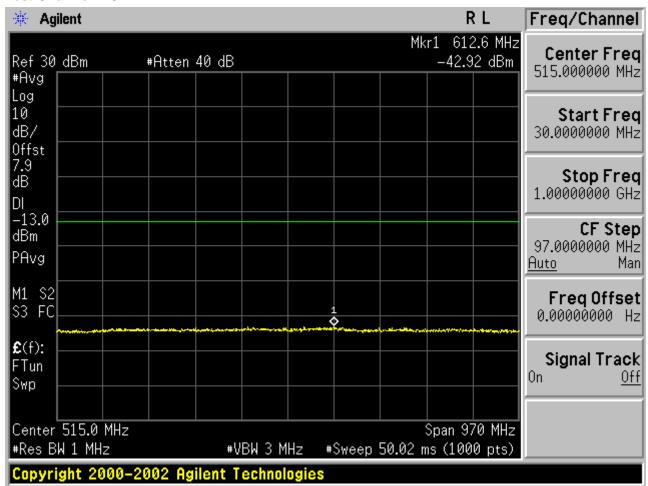

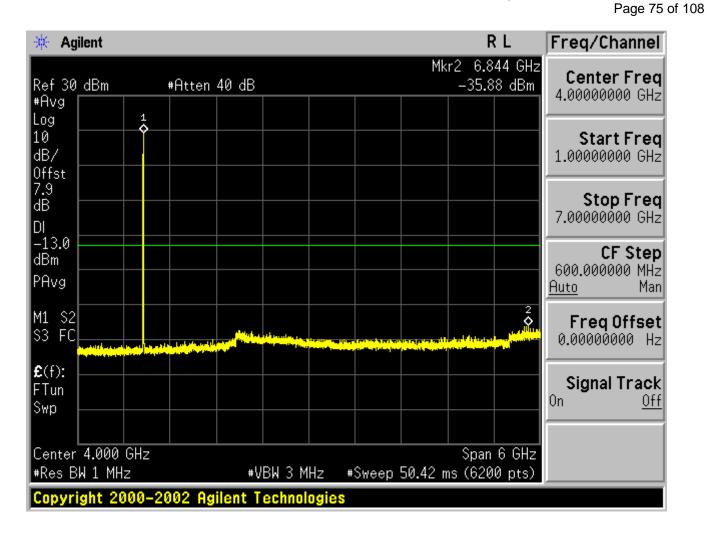


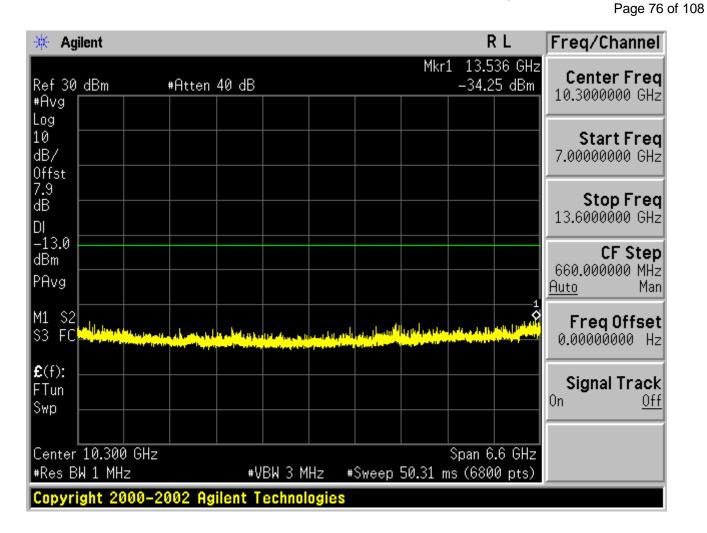


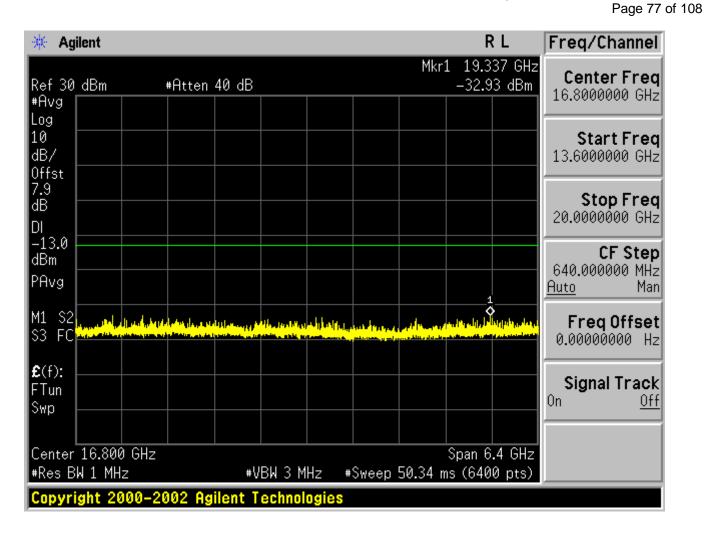


Page 78 of 108


Test Channel=MCH

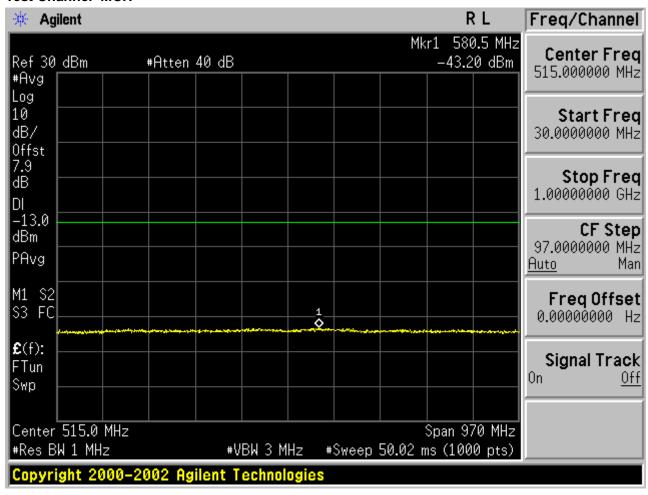

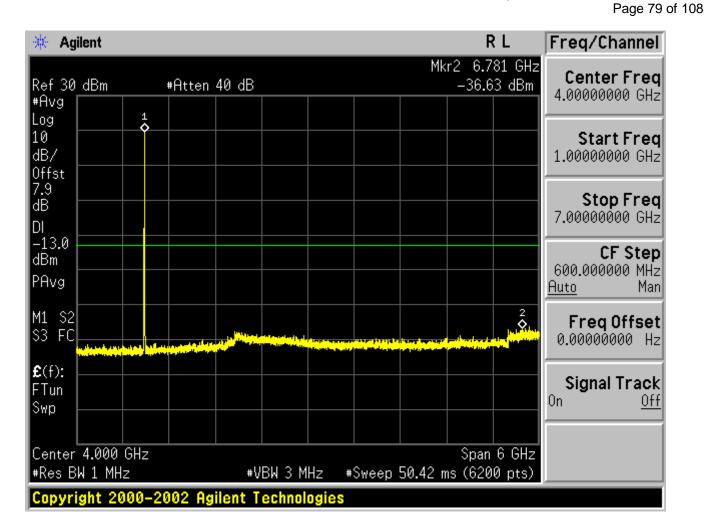

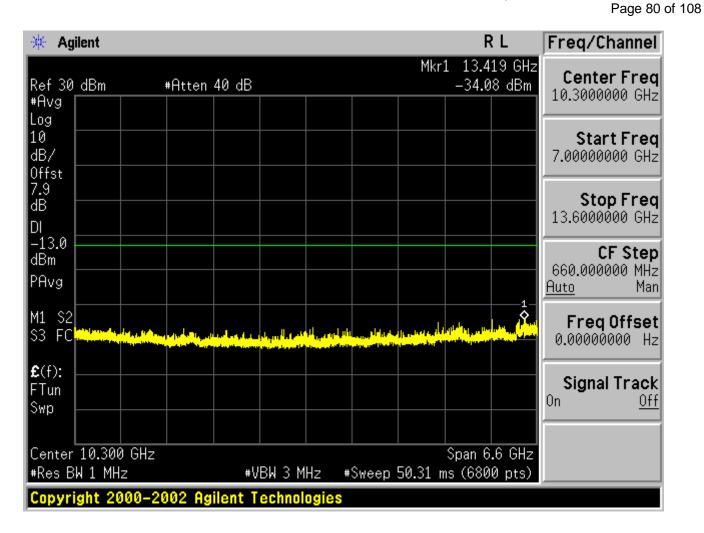



Page 81 of 108

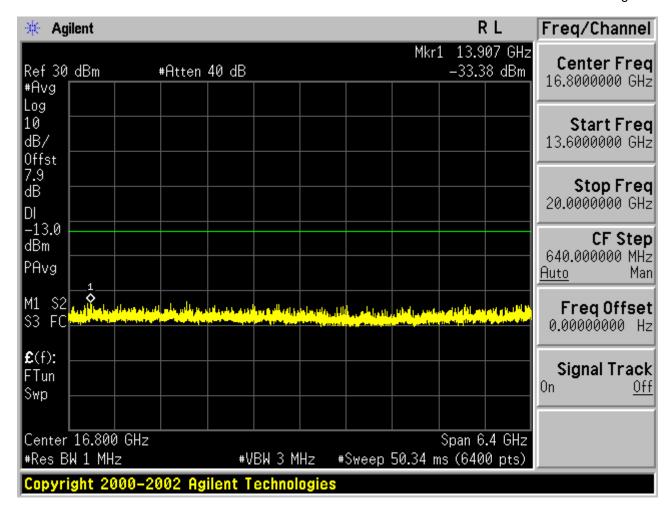


Page 82 of 108

Test Channel=HCH

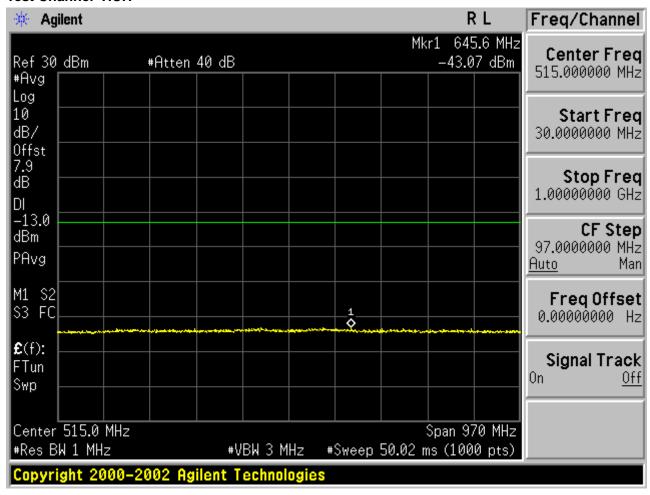


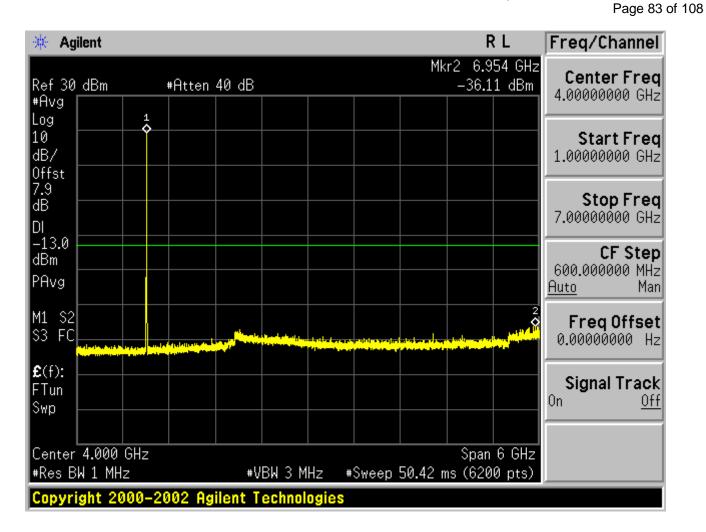

Page 84 of 108

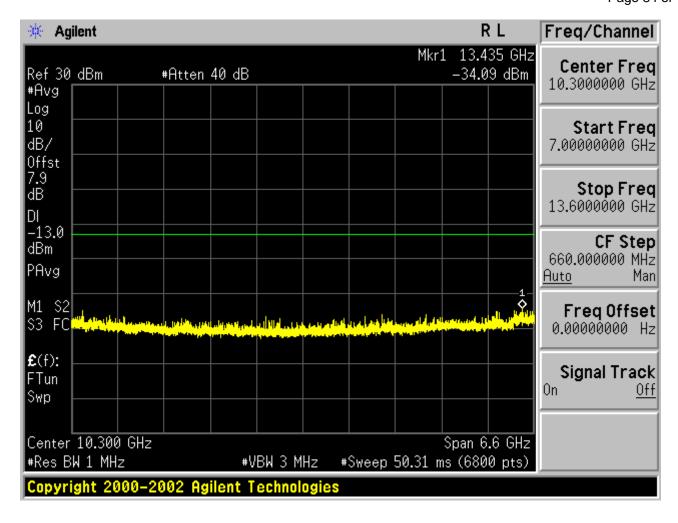

Page 85 of 108

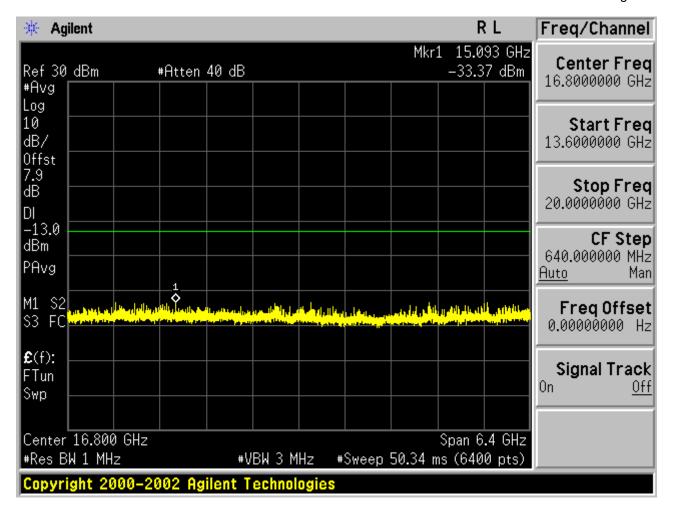

Note: 1. Below 30MHZ no Spurious found and The GSM modes is the worst condition.

2. As no emission found in standby or receive mode, no recording in this report.

Report No.: AGC00069150808FE02 Page 86 of 108


9.2 RADIATED SPURIOUS EMISSION

9.2.1 MEASUREMENT METHOD

The measurements procedures specified in TIA-603C-2004 were used for testing. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set 1MHz as outlined in Part 24.238. The measurements were performed on all modes(GPRS 850, GPRS 1900, HSPA band II, HSPA band V) at 3 typical channels (the Top Channel, the Middle Channel and the Bottom Channel) for each band.


The procedure of radiated spurious emissions is as follows:

a) Pre-calibration With pre-calibration method, the Radiated Spurious Emissions(RSE) is calculated as, RSE=Rx(dBuV)+CL(dB)+SA(dB)+Gain(dBi)-107(dBuV to dBm) The SA is calibrated using following setup.

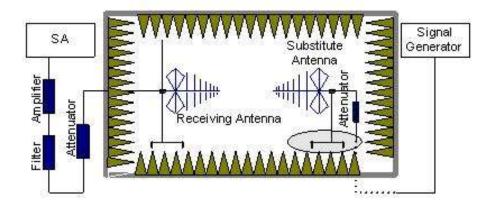

b) EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the test item for emission measurements. The height of receiving antenna is 0.8m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the test item and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1MHz bandwidth.

Report No.: AGC00069150808FE02 Page 87 of 108

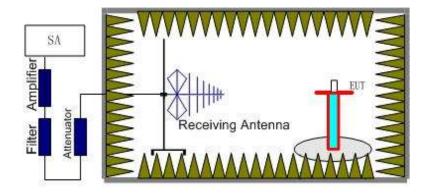

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the PCS 1900 band (1850.2 MHz, 1880 MHz and 1909.8 MHz) ,GSM850 band (824.2MHz, 836.6MHz, 848.8MHz), UMTS band II(1852.6MHz, 1880MHz, 1907.4MHz), UMTS band V(826.6MHz, 836.4MHz, 846.4MHz) . It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of any band into any of the other blocks.

The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss and the air loss. The measurement results are obtained as described below: Power= $P_{Mea}+A_{Rpl}$

9.2.2 PROVISIONS APPLICABLE

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Note: only result the worst condition of each test mode:

Report No.: AGC00069150808FE02 Page 88 of 108

9.2.3 MEASUREMENT RESULT

GSM 850:

	The Worst Tes	st Results fo	r Channel 251	/848.8 MHz	
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit(dBm)	Polarity
1685.23	-41.49	-5.01	-46.50	-13.00	Horizontal
2456.12	-42.93	-2.18	-45.11	-13.00	Vertical
3645.78	-42.48	3.46	-39.02	-13.00	Vertical
4536.58	-42.31	2.79	-39.52	-13.00	Horizontal

PCS 1900:

	The Worst Tes	t Results fo	r Channel 810	/1909.8MHz	
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity
1429.36	-43.75	-3.22	-46.97	-13.00	Vertical
2563.47	-42.29	-0.24	-42.53	-13.00	Vertical
3645.26	-44.68	3.98	-40.70	-13.00	Horizontal
4563.56	-44.79	11.56	-33.23	-13.00	Vertical
5689.25	-44.63	17.89	-26.74	-13.00	Horizontal

UMTS band II:

	The Worst Test	Results for	Channel 9938	/1907.4MHz	
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity
2000.00	-38.82	-2.25	-41.07	-13.00	Vertical
9548.50	-40.64	-3.03	-43.67	-13.00	Horizontal
13367.40	-41.31	-1.87	-43.18	-13.00	Horizontal
15277.80	-41.29	8.52	-32.77	-13.00	Vertical
17931.60	-41.19	18.7	-22.49	-13.00	Horizontal

Page 89 of 108

UMTS band V:

	The Worst Tes	t Results for	Channel 4458	8/846.4MHz	
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity
1598.26	-41.68	-2.26	-43.94	-13.00	Vertical
2365.78	-41.29	-3.12	-44.41	-13.00	Horizontal
4967.65	-42.32	-1.74	-44.06	-13.00	Horizontal
6457.86	-42.42	8.74	-33.68	-13.00	Vertical
7896.56	-43.87	17.89	-25.98	-13.00	Horizontal

Note: ARpl= Factor=Antenna Factor+ Cable loss-Amplifier gain.

The "Factor" value can be calculated automatically by software of measurement system.

Below 30MHZ no Spurious found and The GSM modes is the worst condition.

Page 90 of 108

10. MAINS CONDUCTED EMISSION

10.1 MEASUREMENT METHOD

The measurement procedure specified in ANSI C63.4-2003 was used for testing. Conducted Emission was measured with travel charger.

10.2 PROVISIONS APPLICABLE


Frequency of Emission (MHz)	Conducted	Limit(dBuV)
	Quasi-Peak	Average
0.15 – 0.5	66 to 56 *	56 to 46 *
0.5 – 5	56	46
5 – 30	60	50
*Decreases with the logarithm of the frequency.		
*The lower limit shall apply at the transition freque	ncy.	

Note: The GSM850 mode is the worst condition and the test result as following:

Page 91 of 108

10.3 MEASUREMENT RESULT

LINE CONDUCTED EMISSION - L

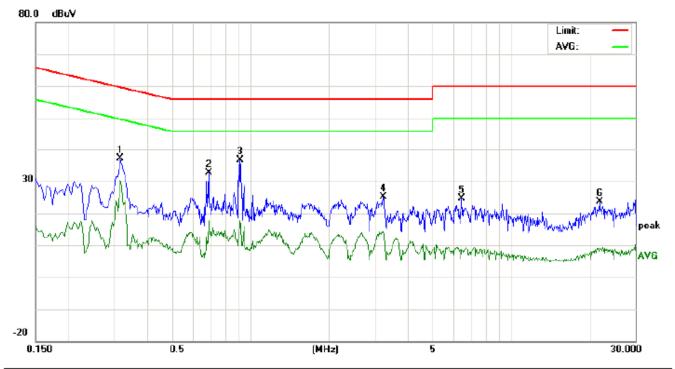

Site: Conduction Phase: L1 Temperature: 23.2 Limit: FCC Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 56.5 %


EUT: Smart Phone

M/N: A6 Mode: Call Note:

No.	Freq.			Correct Factor	1	asuren (dBuV)		ı	nit uV)		rgin IB)	P/F	Comment	
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.3180	26.83		20.11	10.30	37.13		30.41	59.76	49.76	-22.63	-19.35	Р	
2	0.6900	22.23		7.28	10.35	32.58		17.63	56.00	46.00	-23.42	-28.37	Р	
3	0.9140	26.16		7.11	10.40	36.56		17.51	56.00	46.00	-19.44	-28.49	Р	
4	3.2340	14.55		3.73	10.53	25.08		14.26	56.00	46.00	-30.92	-31.74	Р	
5	6.4620	14.32		-1.76	10.30	24.62		8.54	60.00	50.00	-35.38	-41.46	Р	
6	21.9460	13.63		-1.61	10.12	23.75		8.51	60.00	50.00	-36.25	-41.49	Р	

Page 92 of 108

LINE CONDUCTED EMISSION - N

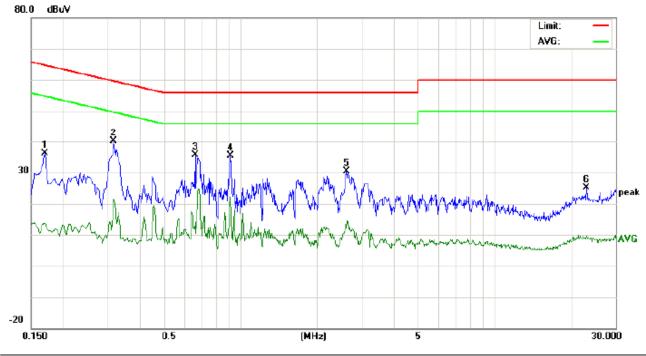

Site: Conduction Phase: N Temperature: 23.2
Limit: FCC Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 56.5 %

EUT: Smart Phone

M/N: A6 Mode: Call Note:

No.	0. (MHz) T		ding_L (dBuV)		Correct Factor		asuren (dBuV)		ı	nit uV)		rgin IB)	P/F	Comment
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1700	25.89		3.44	10.18	36.07		13.62	64.96	54.96	-28.89	-41.34	Р	
2	0.3180	29.80		11.32	10.30	40.10		21.62	59.76	49.76	-19.66	-28.14	Р	
3	0.6620	25.26		3.75	10.33	35.59		14.08	56.00	46.00	-20.41	-31.92	Р	
4	0.9180	25.09		11.75	10.40	35.49		22.15	56.00	46.00	-20.51	-23.85	Р	
5	2.6220	19.91		1.78	10.46	30.37		12.24	56.00	46.00	-25.63	-33.76	Р	
6	23.1220	15.13		-0.38	10.11	25.24		9.73	60.00	50.00	-34.76	-40.27	Р	

Note: The GSM850 mode is the worst condition.

Page 93 of 108

11. FREQUENCY STABILITY

11.1 MEASUREMENT METHOD

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

- 1 , Measure the carrier frequency at room temperature.
- 2 , Subject the EUT to overnight soak at -10℃.
- 3 , With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on channel 661 for PCS 1900 band , channel 190 for GSM 850 band, channel 9400 for UMTS band II and channel 4175 for UMTS band V measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 4 , Repeat the above measurements at 10° C increments from -10°C to +55°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 5 , Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
- 6 , Subject the EUT to overnight soak at +55°C.
- 7 , With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 8 , Repeat the above measurements at 10° C increments from +55 $^{\circ}$ C to -10 $^{\circ}$ C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 9 , At all temperature levels hold the temperature to +/- 0.5 ℃ during the measurement procedure.

11.2 PROVISIONS APPLICABLE

11.2.1 For Hand carried battery powered equipment

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 6.3VDC and 8.5VDC, with a nominal voltage of 7.4VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

Page 94 of 108

11.2.2 For equipment powered by primary supply voltage

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment, the normal environment temperature is 20°C.

Report No.: AGC00069150808FE02 Page 95 of 108

11.3 MEASUREMENT RESULT

Appendix D:Frequency Stability

Test Results

Frequency Error vs. Voltage:

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	\/o.ndi.at
Band	Mode	Channel	Temp.	Volt.(V)	(Hz)	(ppm)	(ppm)	Verdict
			TN	3.4	11.62	0.01	±2.5	PASS
		LCH	TN	3.8	12.07	0.01	±2.5	PASS
			TN	4.35	15.05	0.02	±2.5	PASS
			TN	3.4	10.85	0.01	±2.5	PASS
GSM850	GSM	MCH	TN	3.8	14.46	0.02	±2.5	PASS
			TN	4.35	17.37	0.02	±2.5	PASS
			TN	3.4	13.24	0.02	±2.5	PASS
		HCH	TN	3.8	15.56	0.02	±2.5	PASS
			TN	4.35	13.50	0.02	±2.5	PASS

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	Verdict
Band	Mode	Channel	Temp.	Volt.	(Hz)	(ppm)	(ppm)	
				(V)				
			TN	3.4	31.96	0.02	±2.5	PASS
		LCH	TN	3.8	29.90	0.02	±2.5	PASS
			TN	4.35	20.99	0.01	±2.5	PASS
			TN	3.4	26.93	0.01	±2.5	PASS
GSM1900	GSM	MCH	TN	3.8	25.89	0.01	±2.5	PASS
			TN	4.35	26.35	0.01	±2.5	PASS
			TN	3.4	26.73	0.01	±2.5	PASS
		HCH	TN	3.8	27.18	0.01	±2.5	PASS
			TN	4.35	34.74	0.02	±2.5	PASS

Report No.: AGC00069150808FE02 Page 96 of 108

Frequency Error vs. Temperature:

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	Verdict
Band	Mode	Channe	Volt.	Temp	(Hz)	(ppm)	(ppm	
		1)	
			VN	-10	12.91	0.02	±2.5	PASS
			VN	0	12.07	0.01	±2.5	PASS
			VN	10	11.56	0.01	±2.5	PASS
GSM850	GSM	LCH	VN	20	14.98	0.02	±2.5	PASS
			VN	30	13.04	0.02	±2.5	PASS
			VN	40	9.88	0.01	±2.5	PASS
			VN	50	14.59	0.02	±2.5	PASS
			VN	-10	10.85	0.01	±2.5	PASS
			VN	0	14.72	0.02	±2.5	PASS
			VN	10	16.21	0.02	±2.5	PASS
GSM850	GSM	MCH	VN	20	13.50	0.02	±2.5	PASS
			VN	30	13.88	0.02	±2.5	PASS
			VN	40	13.37	0.02	±2.5	PASS
			VN	50	8.91	0.01	±2.5	PASS
			VN	-10	17.89	0.02	±2.5	PASS
			VN	0	14.98	0.02	±2.5	PASS
			VN	10	14.08	0.02	±2.5	PASS
GSM850	GSM	HCH	VN	20	13.82	0.02	±2.5	PASS
			VN	30	18.14	0.02	±2.5	PASS
			VN	40	17.18	0.02	±2.5	PASS
			VN	50	13.30	0.02	±2.5	PASS

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	Verdict
Band	Mode	Channel	Volt.	Temp.	(Hz)	(ppm)	(ppm)	
			VN	-10	29.83	0.02	±2.5	PASS
			VN	0	26.47	0.01	±2.5	PASS
			VN	10	20.53	0.01	±2.5	PASS
GSM1900	GSM	LCH	VN	20	28.73	0.02	±2.5	PASS
			VN	30	27.83	0.02	±2.5	PASS
			VN	40	27.70	0.01	±2.5	PASS
			VN	50	30.15	0.02	±2.5	PASS
			VN	-10	25.63	0.01	±2.5	PASS
			VN	0	26.22	0.01	±2.5	PASS
			VN	10	25.31	0.01	±2.5	PASS
GSM1900	GSM	MCH	VN	20	25.18	0.01	±2.5	PASS
			VN	30	23.18	0.01	±2.5	PASS
			VN	40	26.86	0.01	±2.5	PASS
			VN	50	24.80	0.01	±2.5	PASS
			VN	-10	33.90	0.02	±2.5	PASS
			VN	0	35.00	0.02	±2.5	PASS
			VN	10	37.00	0.02	±2.5	PASS
GSM1900	GSM	HCH	VN	20	31.70	0.02	±2.5	PASS
			VN	30	37.58	0.02	±2.5	PASS
			VN	40	35.84	0.02	±2.5	PASS
			VN	50	31.38	0.02	±2.5	PASS

Report No.: AGC00069150808FE02 Page 98 of 108

Frequency Error vs. Voltage:

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	Verdict
Band	Mode	Channe	Temp.	Volt.	(Hz)	(ppm)	(ppm	
		1		(V))	
			TN	3.4	19.23	0.02	±2.5	PASS
		LCH	TN	3.8	18.77	0.02	±2.5	PASS
			TN	4.35	17.85	0.02	±2.5	PASS
WCDMA			TN	3.4	15.11	0.02	±2.5	PASS
850	UMTS	MCH	TN	3.8	18.77	0.02	±2.5	PASS
830			TN	4.35	13.28	0.02	±2.5	PASS
			TN	3.4	20.14	0.02	±2.5	PASS
		HCH	TN	3.8	18.77	0.02	±2.5	PASS
			TN	4.35	20.60	0.02	±2.5	PASS

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	Verdict
Band	Mode	Channe	Temp.	Volt.	(Hz)	(ppm)	(ppm	
		I		(V))	
WCDMA 1900	UMTS	LCH	TN	3.4	34.79	0.02	±2.5	PASS
			TN	3.8	38.91	0.02	±2.5	PASS
			TN	4.35	30.21	0.02	±2.5	PASS
		MCH	TN	3.4	47.38	0.03	±2.5	PASS
			TN	3.8	38.91	0.02	±2.5	PASS
			TN	4.35	34.56	0.02	±2.5	PASS
		НСН	TN	3.4	45.55	0.02	±2.5	PASS
			TN	3.8	38.91	0.02	±2.5	PASS
			TN	4.35	44.86	0.02	±2.5	PASS

Report No.: AGC00069150808FE02 Page 99 of 108

Frequency Error vs. Temperature:

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	Verdict
Band	Mode	Channe	Volt.	Temp	(Hz)	(ppm)	(ppm	
		1)	
MODMA	UMTS	LCH	VN	-10	14.65	0.02	±2.5	PASS
			VN	0	10.76	0.01	±2.5	PASS
			VN	10	19.23	0.02	±2.5	PASS
WCDMA			VN	20	12.59	0.02	±2.5	PASS
850			VN	30	10.30	0.01	±2.5	PASS
			VN	40	10.07	0.01	±2.5	PASS
			VN	50	27.01	0.03	±2.5	PASS
	UMTS	МСН	VN	-10	16.02	0.02	±2.5	PASS
MODIMA			VN	0	13.50	0.02	±2.5	PASS
			VN	10	16.94	0.02	±2.5	PASS
WCDMA			VN	20	19.91	0.02	±2.5	PASS
850			VN	30	13.05	0.02	±2.5	PASS
			VN	40	18.54	0.02	±2.5	PASS
			VN	50	14.88	0.02	±2.5	PASS
	UMTS	нсн	VN	-10	15.34	0.02	±2.5	PASS
WCDMA 850			VN	0	17.85	0.02	±2.5	PASS
			VN	10	15.11	0.02	±2.5	PASS
			VN	20	12.82	0.02	±2.5	PASS
			VN	30	17.40	0.02	±2.5	PASS
			VN	40	13.73	0.02	±2.5	PASS
			VN	50	13.73	0.02	±2.5	PASS

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	Verdict
Band	Mode	Channe	Volt.	Temp	(Hz)	(ppm)	(ppm	
		1)	
WCDMA 1900	UMTS	LCH	VN	-10	30.44	0.02	±2.5	PASS
			VN	0	36.16	0.02	±2.5	PASS
			VN	10	34.33	0.02	±2.5	PASS
			VN	20	34.33	0.02	±2.5	PASS
			VN	30	36.39	0.02	±2.5	PASS
			VN	40	37.31	0.02	±2.5	PASS
			VN	50	30.44	0.02	±2.5	PASS
WCDMA 1900	UMTS	МСН	VN	-10	43.03	0.02	±2.5	PASS
			VN	0	43.95	0.02	±2.5	PASS
			VN	10	37.99	0.02	±2.5	PASS
			VN	20	43.72	0.02	±2.5	PASS
			VN	30	41.20	0.02	±2.5	PASS
			VN	40	37.77	0.02	±2.5	PASS
			VN	50	38.22	0.02	±2.5	PASS
WCDMA 1900	UMTS	НСН	VN	-10	43.49	0.02	±2.5	PASS
			VN	0	45.55	0.02	±2.5	PASS
			VN	10	42.34	0.02	±2.5	PASS
			VN	20	40.74	0.02	±2.5	PASS
			VN	30	43.03	0.02	±2.5	PASS
			VN	40	39.37	0.02	±2.5	PASS
			VN	50	46.23	0.02	±2.5	PASS


Report No.: AGC00069150808FE02 Page 101 of 108

PHOTOGRAPHS OF TEST SETUP

CONDUCTED EMISSION



RADIATED SPURIOUS EMISSION

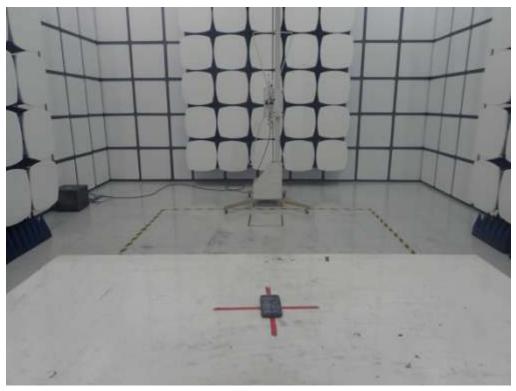

Report No.: AGC00069150808FE02 Page 102 of 108

CONDUCTED MEASUREMENTS




Report No.: AGC00069150808FE02 Page 103 of 108

PHOTOGRAPHS OF EUT

TOTAL VIEW OF EUT



TOP VIEW OF EUT

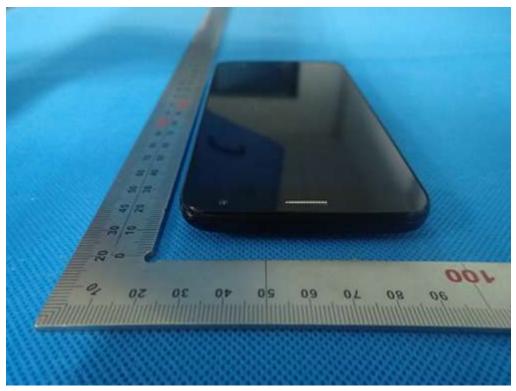

Report No.: AGC00069150808FE02 Page 104 of 108

BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



Report No.: AGC00069150808FE02 Page 105 of 108

BACK VIEW OF EUT



LEFT VIEW OF EUT



Report No.: AGC00069150808FE02 Page 106 of 108

RIGHT VIEW OF EUT





Report No.: AGC00069150808FE02 Page 107 of 108

OPEN VIEW OF EUT-2




OPEN VIEW OF EUT-3




Report No.: AGC00069150808FE02 Page 108 of 108

INTERNAL VIEW OF EUT-1

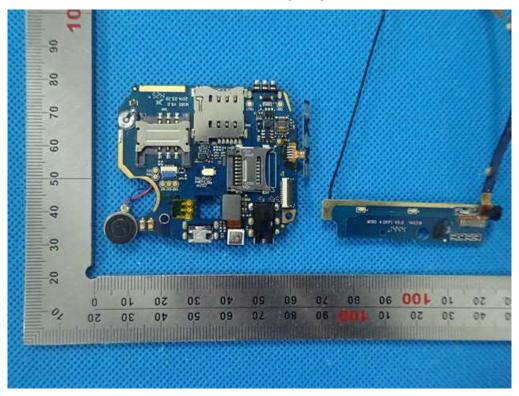

INTERNAL VIEW OF EUT-2

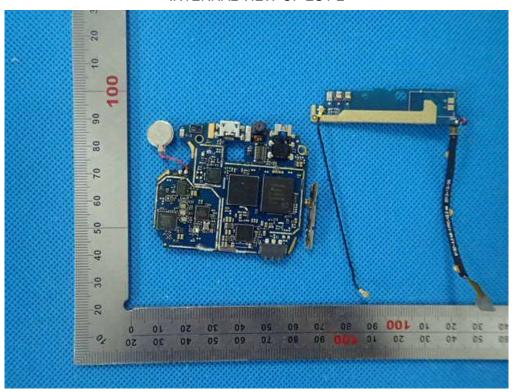

----END OF REPORT----