

FCC PART 15.247

TEST REPORT

For

Shenzhen Excera Technology Co., Ltd.

3rd Floor, Jiada R&D Building, No.5 Songpingshan Road, Hi-Tech Park North, Nanshan District, Shenzhen

FCC ID: 2AE6CEP8100VHF

Report Type: **Product Type:** Original Report Digital Portable Radio **Test Engineer:** Sonia Zhou Report Number: RSZ160201012-00C **Report Date:** 2016-02-24 Rocky Kang Rocky Kang Reviewed By: RF Engineer **Prepared By:** Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

| GENERAL INFORMATION | 4 |
|---|--------|
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) | 4 |
| OBJECTIVE | |
| RELATED SUBMITTAL(S)/GRANT(S) TEST METHODOLOGY | 4 1 |
| TEST FACILITY | |
| SYSTEM TEST CONFIGURATION | |
| DESCRIPTION OF TEST CONFIGURATION | |
| SPECIAL ACCESSORIES | |
| EQUIPMENT MODIFICATIONS | 5 |
| External I/O Cable | 5 |
| BLOCK DIAGRAM OF TEST SETUP | |
| SUMMARY OF TEST RESULTS | 6 |
| FCC§15.247 (i), §1.1307 (b) (1) & §2.1093 – RF EXPOSURE | 7 |
| APPLICABLE STANDARD | |
| FCC §15.203 - ANTENNA REQUIREMENT | |
| APPLICABLE STANDARD | |
| Antenna Connector Construction | |
| FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS | |
| APPLICABLE STANDARD | |
| MEASUREMENT UNCERTAINTY | |
| EUT SETUP EMI TEST RECEIVER SETUP | |
| TEST PROCEDURE | |
| TEST EQUIPMENT LIST AND DETAILS. | 10 |
| CORRECTED FACTOR & MARGIN CALCULATION | 10 |
| TEST RESULTS SUMMARYTEST DATA | |
| | |
| FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS | |
| APPLICABLE STANDARD MEASUREMENT UNCERTAINTY | |
| EUT SETUP | |
| EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP | 15 |
| TEST PROCEDURE | 15 |
| TEST EQUIPMENT LIST AND DETAILS | |
| CORRECTED AMPLITUDE & MARGIN CALCULATION | |
| TEST DATA | |
| FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH | |
| APPLICABLE STANDARD | |
| TEST PROCEDURE | 19 |
| TEST EQUIPMENT LIST AND DETAILS | |

Report No.: RSZ160201012-00C

Report No.: RSZ160201012-00C

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The Shenzhen Excera Technology Co., Ltd.'s product, model number: EP8100 VHF (FCC ID: 2AE6CEP8100VHF) or the "EUT" in this report was a Digital Portable Radio, which was measured approximately: 125 mm (L) x 54 mm (W) x 35 mm (H), rated with input voltage: DC 7.4 V rechargeable battery.

Report No.: RSZ160201012-00C

* All measurement and test data in this report was gathered from production sample serial number: 1601347 (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2016-02-01

Objective

This report is prepared on behalf of *Shenzhen Excera Technology Co., Ltd.* in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DSS and Part 90 TNF submissions with FCC ID: 2AE6CEP8100VHF.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement uncertainty with RF radiated emission is 5.81 dB for 30MHz-1GHz and 4.88 dB for above 1GHz, 1.95dB for conducted measurement.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on October 31, 2013. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.10-2013.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

FCC Part 15.247 Page 4 of 29

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineer mode.

Special Accessories

No special accessory.

Equipment Modifications


No modification was made to the EUT tested.

External I/O Cable

| Cable Description | Length (m) | From Port | То |
|-------------------|------------|-----------|----|
| / | / | / | / |

Report No.: RSZ160201012-00C

Block Diagram of Test Setup

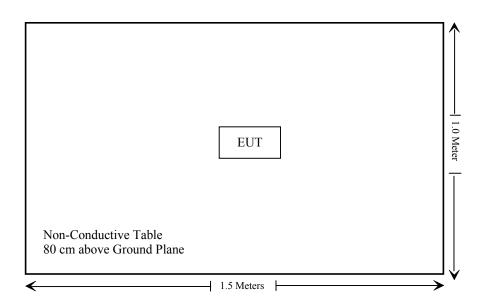

FCC Part 15.247 Page 5 of 29

SUMMARY OF TEST RESULTS

| FCC Rules | Description of Test | Result |
|---------------------------------------|--|------------|
| §15.247 (i), §1.1307 (b) (1)& §2.1093 | RF Exposure | Compliance |
| §15.203 | Antenna Requirement | Compliance |
| §15.207 (a) | AC Line Conducted Emissions | Compliance |
| §15.205, §15.209, §15.247(d) | Spurious Emissions | Compliance |
| §15.247 (a)(2) | 6 dB Emission Bandwidth | Compliance |
| §15.247(b)(3) | Maximum Conducted Output Power | Compliance |
| §15.247(d) | 100 kHz Bandwidth of Frequency Band Edge | Compliance |
| §15.247(e) | Power Spectral Density | Compliance |

Report No.: RSZ160201012-00C

FCC Part 15.247 Page 6 of 29

FCC§15.247 (i), §1.1307 (b) (1) & §2.1093 – RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

Report No.: RSZ160201012-00C

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances \leq 50 mm are determined by:

[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] \cdot [$\sqrt{f(GHz)}$] \leq 3.0 for 1-g SAR and \leq 7.5 for 10-g extremity SAR, where

- 1. f(GHz) is the RF channel transmit frequency in GHz.
- 2. Power and distance are rounded to the nearest mW and mm before calculation.
- 3. The result is rounded to one decimal place for comparison.
- 4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

Measurement Result

For worst case:

| Mode | Frequency (MHz) | Max Tune-up Conducted Power (dBm) | Max Tune-up Conducted Power (mW) | Distance (mm) | Calculated value | Threshold (1-g SAR) | SAR Test Exclusion |
|------|--------------------|--|---|---------------|------------------|------------------------|-----------------------|
| BLE | 2440 | 9.6 | 9.12 | 0 | 2.8 | 3.0 | Yes |

Result: No SAR test is required

FCC Part 15.247 Page 7 of 29

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

Report No.: RSZ160201012-00C

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has an internal antenna arrangement, which was permanently attached and the antenna gain is 0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC Part 15.247 Page 8 of 29

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

Measurement Uncertainty


Input quantities to be considered for conducted disturbance measurements maybe receiver reading, attenuation of the connection between LISN and receiver, LISN voltage division factor, LISN VDF frequency interpolation and receiver related input quantities, etc.

Based on CISPR 16-4-2:2011, the expended combined standard uncertainty of conducted disturbance test at Bay Area Compliance Laboratories Corp. (Shenzhen) is shown as below. And the uncertainty will not be taken into consideration for the test data recorded in the report.

Report No.: RSZ160201012-00C

| Port | Expanded Measurement uncertainty |
|----------|--|
| AC Mains | 3.34 dB (k=2, 95% level of confidence) |
| CAT 3 | 3.72 dB (k=2, 95% level of confidence) |
| CAT 5 | 3.74 dB (k=2, 95% level of confidence) |
| CAT 6 | 4.54 dB (k=2, 95% level of confidence) |

EUT Setup

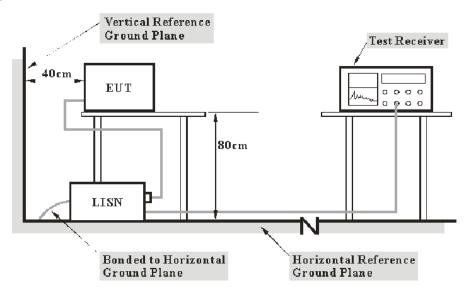

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

FCC Part 15.247 Page 9 of 29

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| Frequency Range | IF B/W |
|------------------|--------|
| 150 kHz – 30 MHz | 9 kHz |

Report No.: RSZ160201012-00C

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|-----------------------|-----------------------------|---------|----------------------------|---------------------|-------------------------|
| Rohde & Schwarz | EMI Test Receiver | ESCS30 | 100176 | 2015-06-03 | 2016-06-02 |
| Rohde & Schwarz | LISN | ENV216 | 3560.6650.12- 101613-Yb | 2015-12-01 | 2016-12-01 |
| Rohde & Schwarz | LISN | ESH2-Z5 | 892107/021 | 2015-06-09 | 2016-06-09 |
| Rohde & Schwarz | Transient Limiter | ESH3Z2 | DE25985 | 2015-05-14 | 2016-05-13 |
| Rohde & Schwarz | CE Test software | EMC 32 | V8.53 | NCR | NCR |
| Ducommun technologies | Conducted Emission Cable | RG-214 | CB031 | 2015-06-15 | 2016-06-15 |
| Sunol Sciences | Horn Antenna | DRH-118 | A052604 | 2014-12-29 | 2017-12-28 |

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

Correction Factor = LISN VDF + Cable Loss + Transient Limiter Attenuation

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

Margin = Limit – Corrected Amplitude

FCC Part 15.247 Page 10 of 29

Test Results Summary

According to the recorded data in following table, the EUT complied with the <u>FCC Part 15.207</u>, the worst margin reading as below:

Report No.: RSZ160201012-00C

8.2 dB at 0.170501 MHz in the Line conducted mode

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_{\rm m} + U_{(L{\rm m})} \leq L_{\rm lim} + U_{\rm cispr}$$

In BACL, $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data

Environmental Conditions

| Temperature: | 23 ℃ |
|--------------------|-----------|
| Relative Humidity: | 52 % |
| ATM Pressure: | 101.0 kPa |

The testing was performed by Sonia Zhou on 2016-02-16.


EUT operation mode: Communication

FCC Part 15.247 Page 11 of 29

AC 120V/60 Hz, Line:

EMI Auto Test L

Report No.: RSZ160201012-00C

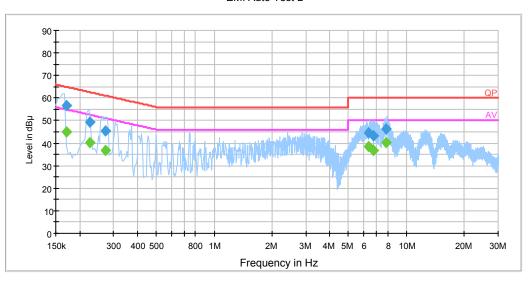


| Frequency (MHz) | Corrected Amplitude (dBµV) | Correction Factor (dB) | Limit (dBµV) | Margin (dB) | Detector (PK/Ave./QP) |
|--------------------|----------------------------------|------------------------------|-----------------|----------------|--------------------------|
| 0.170501 | 56.7 | 20.0 | 64.9 | 8.2 | QP |
| 0.170501 | 45.0 | 20.0 | 54.9 | 9.9 | Ave. |
| 0.226500 | 49.5 | 20.0 | 62.6 | 13.1 | QP |
| 0.226500 | 40.1 | 20.0 | 52.6 | 12.5 | Ave. |
| 0.273500 | 45.5 | 19.9 | 61.0 | 15.5 | QP |
| 0.273500 | 36.6 | 19.9 | 51.0 | 14.4 | Ave. |
| 6.373490 | 44.6 | 20.0 | 60.0 | 15.4 | QP |
| 6.373490 | 38.5 | 20.0 | 50.0 | 11.5 | Ave. |
| 6.739610 | 43.3 | 20.0 | 60.0 | 16.7 | QP |
| 6.739610 | 37.0 | 20.0 | 50.0 | 13.0 | Ave. |
| 7.807170 | 46.4 | 20.1 | 60.0 | 13.6 | QP |
| 7.807170 | 40.4 | 20.1 | 50.0 | 9.6 | Ave. |

FCC Part 15.247 Page 12 of 29

AC 120V/60 Hz, Neutral:

EMI Auto Test N

Report No.: RSZ160201012-00C

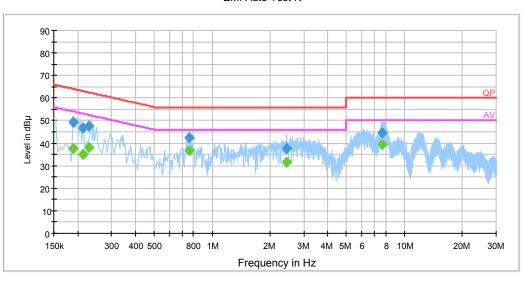

| Frequency (MHz) | Corrected Amplitude (dBµV) | Correction Factor (dB) | Limit (dBµV) | Margin (dB) | Detector (PK/Ave./QP) |
|-----------------|----------------------------------|------------------------------|-----------------|----------------|--------------------------|
| 0.189500 | 49.4 | 20.0 | 64.1 | 14.7 | QP |
| 0.189500 | 37.7 | 20.0 | 54.1 | 16.4 | Ave. |
| 0.213500 | 46.8 | 20.0 | 63.1 | 16.3 | QP |
| 0.213500 | 35.2 | 20.0 | 53.1 | 17.9 | Ave. |
| 0.229500 | 47.6 | 20.0 | 62.5 | 14.9 | QP |
| 0.229500 | 38.1 | 20.0 | 52.5 | 14.4 | Ave. |
| 0.758630 | 42.3 | 19.9 | 56.0 | 13.7 | QP |
| 0.758630 | 36.6 | 19.9 | 46.0 | 9.4 | Ave. |
| 2.445430 | 37.9 | 20.0 | 56.0 | 18.1 | QP |
| 2.445430 | 31.7 | 20.0 | 46.0 | 14.3 | Ave. |
| 7.690470 | 44.7 | 20.1 | 60.0 | 15.3 | QP |
| 7.690470 | 39.3 | 20.1 | 50.0 | 10.7 | Ave. |

Note:

- 1) Correction Factor =LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
 2) Corrected Amplitude = Reading + Correction Factor
 3) Margin = Limit Corrected Amplitude

FCC Part 15.247 Page 13 of 29

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty


All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Report No.: RSZ160201012-00C

Based on CISPR 16-4-2:2011, the expended combined standard uncertainty of radiation emissions at Bay Area Compliance Laboratories Corp. (Shenzhen) is 5.81 dB for 30MHz-1GHz and 4.88 dB for above 1GHz, 1.95dB for conducted measurement at antenna port. And the uncertainty will not be taken into consideration for the test data recorded in the report


EUT Setup

Below 1 GHz:

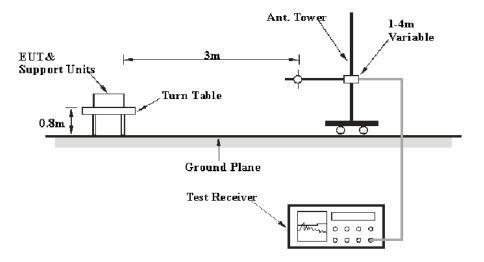

FCC Part 15.247 Page 14 of 29

Above 1GHz:

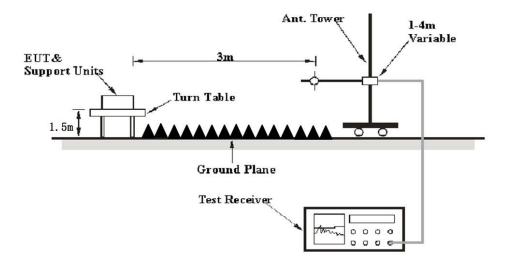

Report No.: RSZ160201012-00C

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

| Frequency Range | RBW | Video B/W | IF B/W | Detector |
|-------------------|---------|-----------|---------|----------|
| 30 MHz – 1000 MHz | 100 kHz | 300 kHz | 120 kHz | QP |
| Above 1 GHz | 1MHz | 3 MHz | / | PK |
| Above I GHZ | 1MHz | 10 Hz | / | Ave. |

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

FCC Part 15.247 Page 15 of 29

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|-------------------------------|--------------------|---------------------------|------------------------|---------------------|-------------------------|
| HP | Amplifier | HP8447E | 1937A01046 | 2015-05-06 | 2016-05-05 |
| Rohde & Schwarz | EMI Test Receiver | ESCI | 101120 | 2015-11-03 | 2016-11-03 |
| Sunol Sciences | Bi-log Antenna | JB1 | A040904-2 | 2014-12-07 | 2017-12-06 |
| Mini | Amplifier | ZVA-183-S+ | 5969001149 | 2015-04-23 | 2016-04-22 |
| A.H. System | Horn Antenna | SAS-200/571 | 135 | 2013-02-11 | 2016-02-10 |
| Rohde & Schwarz | Signal Analyzer | FSIQ26 | 8386001028 | 2015-12-11 | 2016-12-11 |
| the electro- Mechanics Co. | Horn Antenna | 3116 | 9510-2270 | 2013-10-14 | 2016-10-13 |
| TDK | Chamber | Chamber A | 2# | 2013-10-15 | 2016-10-15 |
| TDK | Chamber | Chamber B | 1# | 2015-07-23 | 2016-07-22 |
| DUCOMMUN | Pre-amplifier | ALN- 22093530-01 | 991373-01 | 2015-08-03 | 2016-08-03 |
| Rohde & Schwarz | Auto test Software | EMC32 | V9.10 | NCR | NCR |
| Ducommun technologies | RF Cable | UFA210A-1- 4724-30050U | MFR64369 223410-001 | 2015-06-15 | 2016-06-15 |
| Ducommun technologies | RF Cable | 104PEA | 218124002 | 2015-06-15 | 2016-06-15 |
| Ducommun technologies | RF Cable | RG-214 | 1 | 2015-06-15 | 2016-06-15 |
| Ducommun technologies | RF Cable | RG-214 | 2 | 2015-06-15 | 2016-06-15 |
| Ducommun technologies | RF Cable | RG-214 | 3 | 2015-06-15 | 2016-06-15 |
| WEINSCHEL | 10dB Attenuator | 5324 | AU0709 | 2015-06-18 | 2016-06-18 |

Report No.: RSZ160201012-00C

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude = Meter Reading + Antenna Factor + Cable Loss - Amplifier Gain

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin = Limit – Corrected Amplitude

FCC Part 15.247 Page 16 of 29

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the <u>FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247</u>.

8.47 dB at 2483.54 MHz in the Vertical polarization in Middle channel

Report No.: RSZ160201012-00C

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_{\rm m} + U_{(L{\rm m})} \leq L_{\rm lim} + U_{\rm cispr}$$

In BACL, $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data

Environmental Conditions

| Temperature: | 23 ℃ |
|--------------------|-----------|
| Relative Humidity: | 52 % |
| ATM Pressure: | 101.0 kPa |

The testing was performed by Sonia Zhou on 2016-02-19.

EUT operation mode: Transmitting

30 MHz-25 GHz:

BLE Mode:

| Frequency | Frequency Rece | eceiver | Turntable Detector Degree Heigh | Rx An | Rx Antenna | | Corrected | 10.21//200/20/ | |
|-----------|----------------|--------------------------|---------------------------------|------------|----------------|-------------|-----------------------|----------------|----------------|
| (MHz) | Reading (dBµV) | Detector (PK/QP/Ave.) | | Height (m) | Polar (H/V) | Factor (dB) | Amplitude (dBµV/m) | | Margin (dB) |
| | | | Low Cł | nannel (2 | 2402 M | Hz) | | | |
| 230.09 | 41.88 | QP | 132 | 1.7 | Н | -9.10 | 32.78 | 46 | 13.22 |
| 2402.00 | 100.09 | PK | 18 | 1.6 | Н | -6.46 | 93.63 | / | / |
| 2402.00 | 95.04 | Ave. | 18 | 1.6 | Н | -6.46 | 88.58 | / | / |
| 2402.00 | 100.96 | PK | 30 | 2.2 | V | -6.46 | 94.50 | / | / |
| 2402.00 | 96.03 | Ave. | 30 | 2.2 | V | -6.46 | 89.57 | / | / |
| 2388.46 | 48.66 | PK | 50 | 1.3 | V | -6.46 | 42.20 | 74 | 31.80 |
| 2388.46 | 30.53 | Ave. | 50 | 1.3 | V | -6.46 | 24.07 | 54 | 29.93 |
| 2389.99 | 49.47 | PK | 359 | 1.1 | V | -6.46 | 43.01 | 74 | 30.99 |
| 2389.99 | 31.43 | Ave. | 359 | 1.1 | V | -6.46 | 24.97 | 54 | 29.03 |
| 2497.18 | 50.82 | PK | 225 | 1.3 | V | -4.74 | 46.08 | 74 | 27.92 |
| 2497.18 | 30.51 | Ave. | 225 | 1.3 | V | -4.74 | 25.77 | 54 | 28.23 |
| 4804.00 | 48.43 | PK | 7 | 1.6 | V | 3.79 | 52.22 | 74 | 21.78 |
| 4804.00 | 36.04 | Ave. | 7 | 1.6 | V | 3.79 | 39.83 | 54 | 14.17 |

FCC Part 15.247 Page 17 of 29

| Frequency | R | Receiver | | Rx An | tenna | | Corrected | | |
|-----------|----------------|--------------------------|----------|------------|----------------|-------------|-----------------------|----|-------------|
| (MHz) | Reading (dBµV) | Detector (PK/QP/Ave.) | | Height (m) | Polar (H/V) | Factor (dB) | Amplitude (dBμV/m) | | Margin (dB) |
| | | | Middle C | Channel | (2440 N | MHz) | | | |
| 230.09 | 41.26 | QP | 346 | 1.5 | Н | -9.10 | 32.16 | 46 | 13.84 |
| 2440.00 | 99.36 | PK | 34 | 2.3 | Н | -6.46 | 92.90 | / | / |
| 2440.00 | 94.57 | Ave. | 34 | 2.3 | Н | -6.46 | 88.11 | / | / |
| 2440.00 | 100.11 | PK | 247 | 2.3 | V | -6.46 | 93.65 | / | / |
| 2440.00 | 95.48 | Ave. | 247 | 2.3 | V | -6.46 | 89.02 | / | / |
| 2373.88 | 48.79 | PK | 288 | 1.4 | V | -6.46 | 42.33 | 74 | 31.67 |
| 2373.88 | 30.12 | Ave. | 288 | 1.4 | V | -6.46 | 23.66 | 54 | 30.34 |
| 2483.54 | 61.47 | PK | 138 | 1.6 | V | -4.74 | 56.73 | 74 | 17.27 |
| 2483.54 | 50.27 | Ave. | 138 | 1.6 | V | -4.74 | 45.53 | 54 | 8.47 |
| 2484.33 | 59.47 | PK | 189 | 1.5 | V | -4.74 | 54.73 | 74 | 19.27 |
| 2484.33 | 48.77 | Ave. | 189 | 1.5 | V | -4.74 | 44.03 | 54 | 9.97 |
| 4880.00 | 48.73 | PK | 3 | 1.2 | V | 3.56 | 52.29 | 74 | 21.71 |
| 4880.00 | 37.39 | Ave. | 3 | 1.2 | V | 3.56 | 40.95 | 54 | 13.05 |
| | • | • | High Cl | nannel (2 | 2480 M | Hz) | | | |
| 230.09 | 40.25 | QP | 327 | 1.6 | Н | -9.10 | 31.15 | 46 | 14.85 |
| 2480.00 | 98.33 | PK | 28 | 2.0 | Н | -4.74 | 93.59 | / | / |
| 2480.00 | 93.76 | Ave. | 28 | 2.0 | Н | -4.74 | 89.02 | / | / |
| 2480.00 | 99.22 | PK | 72 | 2.3 | V | -4.74 | 94.48 | / | / |
| 2480.00 | 94.69 | Ave. | 72 | 2.3 | V | -4.74 | 89.95 | / | / |
| 2388.73 | 49.27 | PK | 223 | 2.1 | V | -6.46 | 42.81 | 74 | 31.19 |
| 2388.73 | 29.51 | Ave. | 223 | 2.1 | V | -6.46 | 23.05 | 54 | 30.95 |
| 2383.51 | 62.45 | PK | 152 | 2.3 | V | -6.46 | 55.99 | 74 | 18.01 |
| 2383.51 | 51.69 | Ave. | 152 | 2.3 | V | -6.46 | 45.23 | 54 | 8.77 |
| 2483.76 | 59.73 | PK | 52 | 1.1 | V | -4.74 | 54.99 | 74 | 19.01 |
| 2483.76 | 49.43 | Ave. | 52 | 1.1 | V | -4.74 | 44.69 | 54 | 9.31 |
| 4960.00 | 49.24 | PK | 92 | 1.8 | V | 3.19 | 52.43 | 74 | 21.57 |
| 4960.00 | 38.34 | Ave. | 92 | 1.8 | V | 3.19 | 41.53 | 54 | 12.47 |

Report No.: RSZ160201012-00C

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor Corrected Amplitude = Corrected Factor + Reading Margin = Limit - Corrected. Amplitude

FCC Part 15.247 Page 18 of 29

FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH


Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Report No.: RSZ160201012-00C

Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- 3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
- 4. Repeat above procedures until all frequencies measured were complete.



Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|-----------------------|-----------------|--------|---------------|---------------------|-------------------------|
| Rohde & Schwarz | Signal Analyzer | FSIQ26 | 8386001028 | 2015-12-11 | 2016-12-11 |
| Ducommun technologies | RF Cable | RG-214 | 3 | 2015-06-15 | 2016-06-15 |
| WEINSCHEL | 3dB Attenuator | 5321 | AU0709 | 2015-06-18 | 2016-06-18 |

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

| Temperature: | 23 ℃ |
|--------------------|-----------|
| Relative Humidity: | 52 % |
| ATM Pressure: | 101.0 kPa |

The testing was performed by Sonia Zhou on 2016-02-19.

Test Result: Pass.

Please refer to the following table and plots.


FCC Part 15.247 Page 19 of 29

EUT operation mode: Transmitting

| Channel | Frequency (MHz) | 6 dB Emission Bandwidth (MHz) | Limit (kHz) | |
|---------|--------------------|-------------------------------------|----------------|--|
| Low | 2402 | 0.72 | ≥500 | |
| Middle | 2440 | 0.71 | ≥500 | |
| High | 2480 | 0.71 | ≥500 | |

Report No.: RSZ160201012-00C


BLE Low Channel

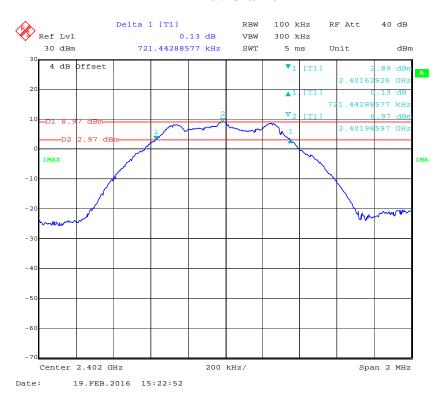


FCC Part 15.247 Page 20 of 29

BLE Middle Channel

Report No.: RSZ160201012-00C

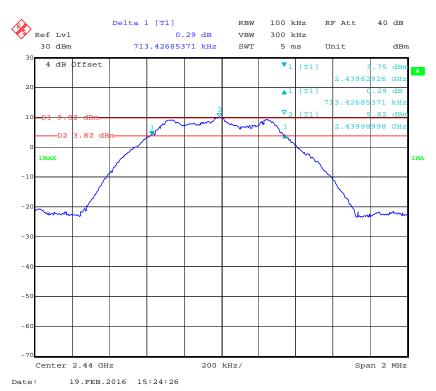

BLE High Channel

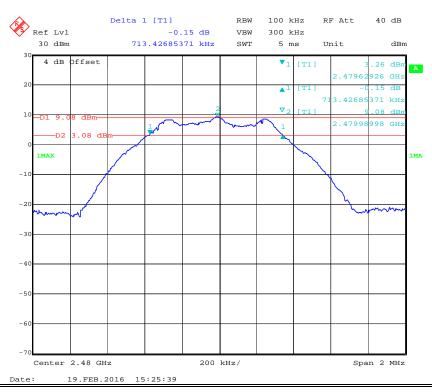

FCC Part 15.247 Page 21 of 29

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER


Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Report No.: RSZ160201012-00C

Test Procedure

- 1. Place the EUT on a bench and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
- 3. Add a correction factor to the display.



Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|-----------------------|----------------|--------|---------------|---------------------|-------------------------|
| НР | Power Meter | N1912A | MY5000448 | 2015-11-03 | 2016-11-03 |
| НР | Power Sensor | N1921A | MY54210016 | 2015-11-03 | 2016-11-03 |
| Ducommun technologies | RF Cable | RG-214 | 3 | 2015-06-15 | 2016-06-15 |
| WEINSCHEL | 3dB Attenuator | 5321 | AU0709 | 2015-06-18 | 2016-06-18 |

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC Part 15.247 Page 22 of 29

Test Data

Environmental Conditions

| Temperature: | 23 ℃ |
|--------------------|-----------|
| Relative Humidity: | 52 % |
| ATM Pressure: | 101.0 kPa |

The testing was performed by Sonia Zhou on 2016-02-19.

EUT operation mode: Transmitting

BLE mode

Report No.: RSZ160201012-00C

| Channel | Frequency (MHz) | Max Peak Output Power (dBm) | Limit (dBm) | Result |
|---------|--------------------|-----------------------------------|----------------|--------|
| Low | 2402 | 8.68 | 30 | Pass |
| Middle | 2440 | 9.51 | 30 | Pass |
| High | 2480 | 8.68 | 30 | Pass |

FCC Part 15.247 Page 23 of 29

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE


Report No.: RSZ160201012-00C

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- 3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- 5. Repeat above procedures until all measured frequencies were complete.



Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|-----------------------|-----------------|--------|------------------|---------------------|-------------------------|
| Rohde & Schwarz | Signal Analyzer | FSIQ26 | 8386001028 | 2015-12-11 | 2016-12-11 |
| Ducommun technologies | RF Cable | RG-214 | 3 | 2015-06-15 | 2016-06-15 |
| WEINSCHEL | 3dB Attenuator | 5321 | AU0709 | 2015-06-18 | 2016-06-18 |

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC Part 15.247 Page 24 of 29

Test Data

Environmental Conditions

| Temperature: | 23 ℃ | |
|--------------------|-----------|--|
| Relative Humidity: | 52 % | |
| ATM Pressure: | 101.0 kPa | |

The testing was performed by Sonia Zhou on 2016-02-19.


EUT operation mode: Transmitting

Test Result: Compliance

Please refer to the following plots.

BLE: Band Edge, Left Side


Report No.: RSZ160201012-00C

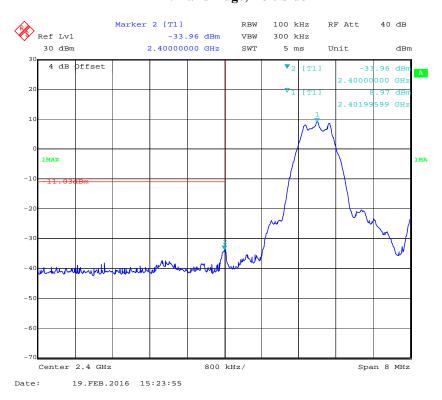

FCC Part 15.247 Page 25 of 29

BLE: Band Edge, Right Side

Report No.: RSZ160201012-00C

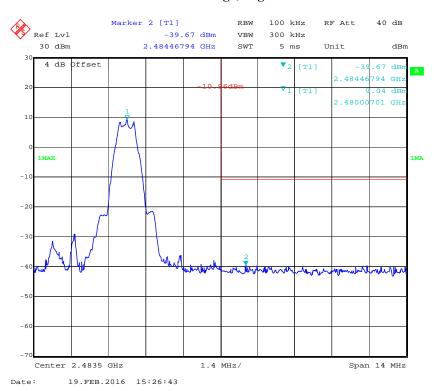

FCC Part 15.247 Page 26 of 29

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard


For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Report No.: RSZ160201012-00C

Test Procedure

According to KDB558074 D01 DTS Meas Guidance v03r03 sub-clause 10.2

- 1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
- 2. Set the RBW to: 3kHz < RBW < 100 kHz.
- 3. Set the VBW \geq 3×RBW.
- 4. Set the span to 1.5 times the DTS bandwidth.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level within the RBW.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|-----------------------|-----------------|--------|------------------|---------------------|-------------------------|
| Rohde & Schwarz | Signal Analyzer | FSIQ26 | 8386001028 | 2015-12-11 | 2016-12-11 |
| Ducommun technologies | RF Cable | RG-214 | 3 | 2015-06-15 | 2016-06-15 |
| WEINSCHEL | 3dB Attenuator | 5321 | AU0709 | 2015-06-18 | 2016-06-18 |

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC Part 15.247 Page 27 of 29

Test Data

Environmental Conditions

| Temperature: 23 °C | | |
|--------------------|-----------|--|
| Relative Humidity: | 52 % | |
| ATM Pressure: | 101.0 kPa | |

The testing was performed by Sonia Zhou on 2016-02-19.


EUT operation mode: Transmitting

Test Result: Pass

| Channel | Frequency (MHz) | PSD (dBm/3kHz) | Limit (dBm/3kHz) |
|----------|--------------------|-------------------|---------------------|
| BLE mode | | | |
| Low | 2402 | -7.53 | ≤8 |
| Middle | 2440 | -6.84 | ≤8 |
| High | 2480 | -7.45 | ≤8 |

Report No.: RSZ160201012-00C


Power Spectral Density, BLE Low Channel

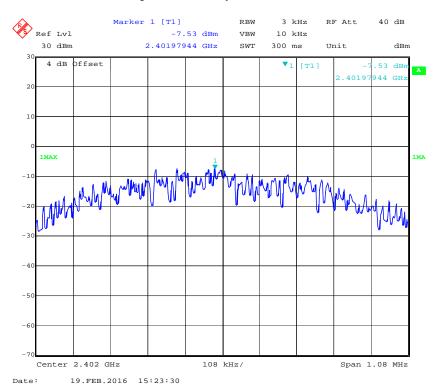


FCC Part 15.247 Page 28 of 29

Power Spectral Density, BLE Middle Channel

Report No.: RSZ160201012-00C

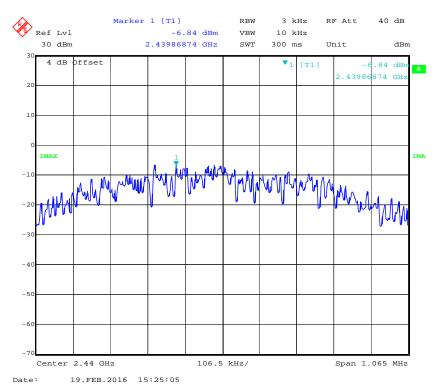

Power Spectral Density, BLE High Channel

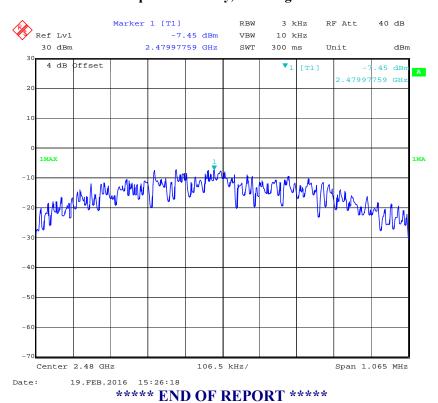

FCC Part 15.247 Page 29 of 29