

FCC ID CERTIFICATION TEST REPORT

FOR

Applicant	:	Innovative Concepts and Design LLC
Address	:	458 Florida Grove Road, Perth Amboy, New Jersey 08861-3729 United States
Equipment under Test	:	Wireless microphone
Model No.	:	WM-KP800
Trade Mark	:	GEMINI
FCC ID	:	2AE6G-WMKP800
Manufacturer	:	Shenzhen Youjun Electronics Limited
Address	:	B12 Building of the first industrial area, Baihuadong, Guanguang road, Guangming new district 518107, Shenzhen, Guangdong, China

Issued By: Dongguan Dongdian Testing Service Co., Ltd.

Add.: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park,

Dongguan City, Guangdong Province, China, 523808

Tel.: +86-0769-38826678, **E-mail:** ddt@dgddt.com, <http://www.dgddt.com>

REPORT

Table of Contents

	Test report declares.....	4
1.	Summary of Test Results.....	6
2.	General test information.....	7
2.1.	Description of EUT	7
2.2.	Accessories of EUT.....	7
2.3.	Assistant equipment used for test.....	7
2.4.	Block diagram of EUT configuration for test.....	7
2.5.	Deviations of test standard.....	7
2.6.	Test environment conditions	8
2.7.	Test laboratory	8
2.8.	Measurement uncertainty.....	8
3.	Equipment Used During Test.....	9
4.	Maximum Radiated Power.....	11
4.1.	Block diagram of test setup.....	11
4.2.	Limits	11
4.3.	Test procedure	11
4.4.	Test result.....	11
4.5.	Original test data	12
5.	Occupied Bandwidth	13
5.1.	Block diagram of test setup.....	13
5.2.	Limits	13
5.3.	Test procedure	13
5.4.	Test result.....	13
5.5.	Original test data	14
6.	Frequency Tolerance	15
6.1.	Block diagram of test setup.....	15
6.2.	Limits	15
6.3.	Test Procedure	15
6.4.	Test Result	15
7.	Emission Mask	17
7.1.	Block diagram of test setup.....	17
7.2.	Limits	17
7.3.	Test procedure	17
7.4.	Test Result	18
7.5.	Original test data	18
8.	Radiated Spurious Emission.....	19
8.1.	Block diagram of test setup.....	19

8.2.	Limits	20
8.3.	Test Procedure	20
8.4.	Test result	20
9.	Power Line Conducted Emission	26
9.1.	Block diagram of test setup	26
9.2.	Power Line Conducted Emission Limits	26
9.3.	Test Procedure	26
9.4.	Test Result	27
10.	Antenna Requirements	28
10.1.	Limit	28
10.2.	Result	28

Test Report Declare

Applicant	:	Innovative Concepts and Design LLC
Address	:	458 Florida Grove Road, Perth Amboy, New Jersey 08861-3729 United States
Equipment under Test	:	Wireless microphone
Model No.	:	WM-KP800
Trade Mark	:	GEMINI
Manufacturer	:	Shenzhen Youjun Electronics Limited
Address	:	B12 Building of the first industrial area, Baihuadong, Guangang road, Guangming new district 518107, Shenzhen, Guangdong, China

Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C

Test Procedure Used:

ANSI C63.10:2013

We Declare:

The equipment described above is tested by Dongguan Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Dongguan Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC&IC standards.

Report No.:	DDT-R20032729-1E1		
Date of Receipt:	Apr. 02, 2020	Date of Test:	Apr. 02, 2020 ~ Jun. 09, 2020

Prepared By:

Talent Zhang

Talent Zhang/Engineer

Approved By:



Damon Hu/EMC Manager

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Dongguan Dongdian Testing Service Co., Ltd.

Revision History

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	Jun. 09, 2020	

1. Summary of Test Results

Description of Test Item	Standard	Verdict
Maximum Radiated Power	FCC Part 15: 15.236(d)(1) ANSI C63.10:2013	Pass
Occupied Bandwidth	FCC Part 15: 15.215 FCC Part 15: 15.236(f)(2) ANSI C63.10:2013	Pass
Frequency Tolerance	FCC Part 15: 15.236(f)(3) ANSI C63.10:2013	Pass
Emission Mask	FCC Part 15: 15.236(g)	Pass
Radiated Spurious Emission	FCC Part 15: 15.236(g)	Pass
Power Line Conducted Emissions	FCC Part 15: 15.207 ANSI C63.10:2013	N/A
Antenna Requirement	FCC Part 15: 15.203	Pass

Note: N/A is an abbreviation for Not Applicable.

2. General test information

2.1. Description of EUT

Eut* Name	: Wireless microphone
Model Number	: WM-KP800
EUT Function Description	: Please reference user manual of this device
Power Supply	: DC 3V from battery
Operation Frequency	: 203.76 MHz and 207.76 MHz
Modulation	: FM
Antenna Type	: Spring antenna, maximum PK gain: 1 dBi
Sample Type	: Series production

Note: EUT is the ab. of equipment under test.

Channel information:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	203.760	2	207.760

2.2. Accessories of EUT

Description of Accessories	Manufacturer	Model number	Description	Remark
N/A	N/A	N/A	N/A	N/A

2.3. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	EMC Compliance	SN
N/A	N/A	N/A	N/A	N/A

2.4. Block diagram of EUT configuration for test

EUT

Switch channels by button control, test channels as below table.

Channel	Frequency (MHz)
1	203.760
2	207.760

2.5. Deviations of test standard

No deviation.

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-25 °C
Humidity range:	40-75%
Pressure range:	86-106 kPa

2.7. Test laboratory

Dongguan Dongdian Testing Service Co., Ltd.

Add.: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City, Guangdong Province, China, 523808

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com

CNAS Accreditation No. L6451; A2LA Accreditation No. 3870.01

FCC Designation Number: CN1182; FCC Test Firm Registration Number: 540522

Industry Canada site registration number: 10288A-1

2.8. Measurement uncertainty

Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum Analyzer)	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$);
	1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$);
	1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Frequencies Stability	6.7×10^{-8} (Antenna couple method)
	5.5×10^{-8} (Conducted method)
Conducted Spurious Emissions	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$);
	1.40 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
	1.66 dB ($8 \text{ GHz} \leq f < 22 \text{ GHz}$)
Uncertainty for Radio Frequency (RBW<20 kHz)	3×10^{-8}
Temperature	0.4 °C
Humidity	2 %
Uncertainty for Radiation Emission Test (30 MHz-1 GHz)	4.70 dB (Antenna Polarize: V)
	4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission Test (1 GHz-40 GHz)	4.10 dB (1-6 GHz)
	4.40 dB (6 GHz-18 GHz)
	3.54 dB (18 GHz-26 GHz)
	4.30 dB (26 GHz-40 GHz)
Uncertainty for Power Line Conduction Emission Test	3.32 dB (150 kHz-30 MHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3. Equipment Used During Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
RF Connected Test (Tonscend RF Measurement System)					
Spectrum analyzer	R&S	FSU26	200071	Sep. 29, 2019	1 Year
Wideband Radio Communication tester	R&S	CMW500	117491	Jun. 25, 2019	1 Year
Vector Signal Generator	Agilent	E8267D	US49060192	Sep. 29, 2019	1 Year
Vector Signal Generator	Agilent	N5182A	MY48180737	Jun. 25, 2019	1 Year
Power Sensor	Agilent	U2021XA	MY55150010	Jun. 28, 2019	1 Year
Power Sensor	Agilent	U2021XA	MY55150011	Jun. 28, 2019	1 Year
DC Power Source	MATRIS	MPS-3005L-3	D813058W	Jun. 25, 2019	1 Year
RF Cable	Micable	C10-01-01-1	100309	Sep. 29, 2019	1 Year
Temp&Humi Programmable	ZHIXIANG	ZXGDJS-150L	ZX170110-A	Oct. 21, 2019	1 Year
Test Software	JS Tonscend	JS1120-3	Ver.2.7	N/A	N/A
Radiation 1#chamber					
EMI Test Receiver	R&S	ESU8	100316	Sep. 29, 2019	1 Year
Spectrum analyzer	Agilent	E4447A	MY50180031	Jun. 25, 2019	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB9163	9163-462	Nov. 15, 2019	1 Year
Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	Sep. 29, 2019	1 Year
Double Ridged Horn Antenna	R&S	HF907	100276	Nov. 15, 2019	1 Year
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	Sep. 29, 2019	1 Year
Pre-amplifier	A.H.	PAM-0118	360	Sep. 29, 2019	1 Year
Pre-amplifier	TERA-MW	TRLA-0040 G35	101303	Sep. 29, 2019	1 Year
RF Cable	HUBSER	CP-X2+ CP-X1	W11.03+ W12.02	Sep. 29, 2019	1 Year
RF Cable	N/A	5m+6m+1m	06270619	Sep. 29, 2019	1 Year
MI Cable	HUBSER	C10-01-01-1 M	1091629	Sep. 29, 2019	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A
Radiation 2#chamber					
EMI Test Receiver	R&S	ESCI	101364	Sep. 29, 2019	1 Year
Spectrum analyzer	Agilent	E4447A	MY50180031	Jun. 25, 2019	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	9163-994	Nov. 15, 2019	1 Year
Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	Sep. 29, 2019	1 Year
Double Ridged Horn Antenna	Schwarzbeck	BBHA9120	02108	Jul. 21, 2019	1 Year
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	Sep. 29, 2019	1 Year

Pre-amplifier	TERA-MW	TRLA-0040 G35	101303	Sep. 29, 2019	1 Year
RF Cable	N/A	14+1.5m	06270619	Sep. 29, 2019	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A
Power Line Conducted Emissions Test					
EMI Test Receiver	R&S	ESU8	100316	Sep. 29, 2019	1 Year
LISN 1	R&S	ENV216	101109	Sep. 29, 2019	1 Year
LISN 2	R&S	ESH2-Z5	100309	Sep. 29, 2019	1 Year
Pulse Limiter	R&S	ESH3-Z2	101242	Sep. 29, 2019	1 Year
CE Cable 1	HUBSER	N/A	W10.01	Sep. 29, 2019	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A

4. Maximum Radiated Power

4.1. Block diagram of test setup



4.2. Limits

15.236(d) The maximum radiated power shall not exceed the following values:

- (1) In the bands allocated and assigned for broadcast television and in the 600 MHz service band: 50 mW EIRP
- (2) In the 600 MHz guard band and the 600 MHz duplex gap: 20 mW EIRP.

4.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Measure the maximum output power of EUT by spectrum analyzer with PK detector and set RBW 3 MHz, VBW 10 MHz, Span 5 MHz, Sweep time=auto, Measurement points ≥ 2 span / RBW


(3) Radiated RF power= Conduction measurement Level + Ant. Gain

Note: The attenuator loss was inputted into spectrum analyzer as amplitude offset.

4.4. Test result

Frequency (MHz)	Conduction measurement level (dBm)	Ant. Gain(dBi)	Radiated RF power(dBm)	Limit (dBm)	Verdict
203.760	13.95	1.00	14.95	17	Pass
207.760	13.69	1.00	14.69	17	Pass

4.5. Original test data

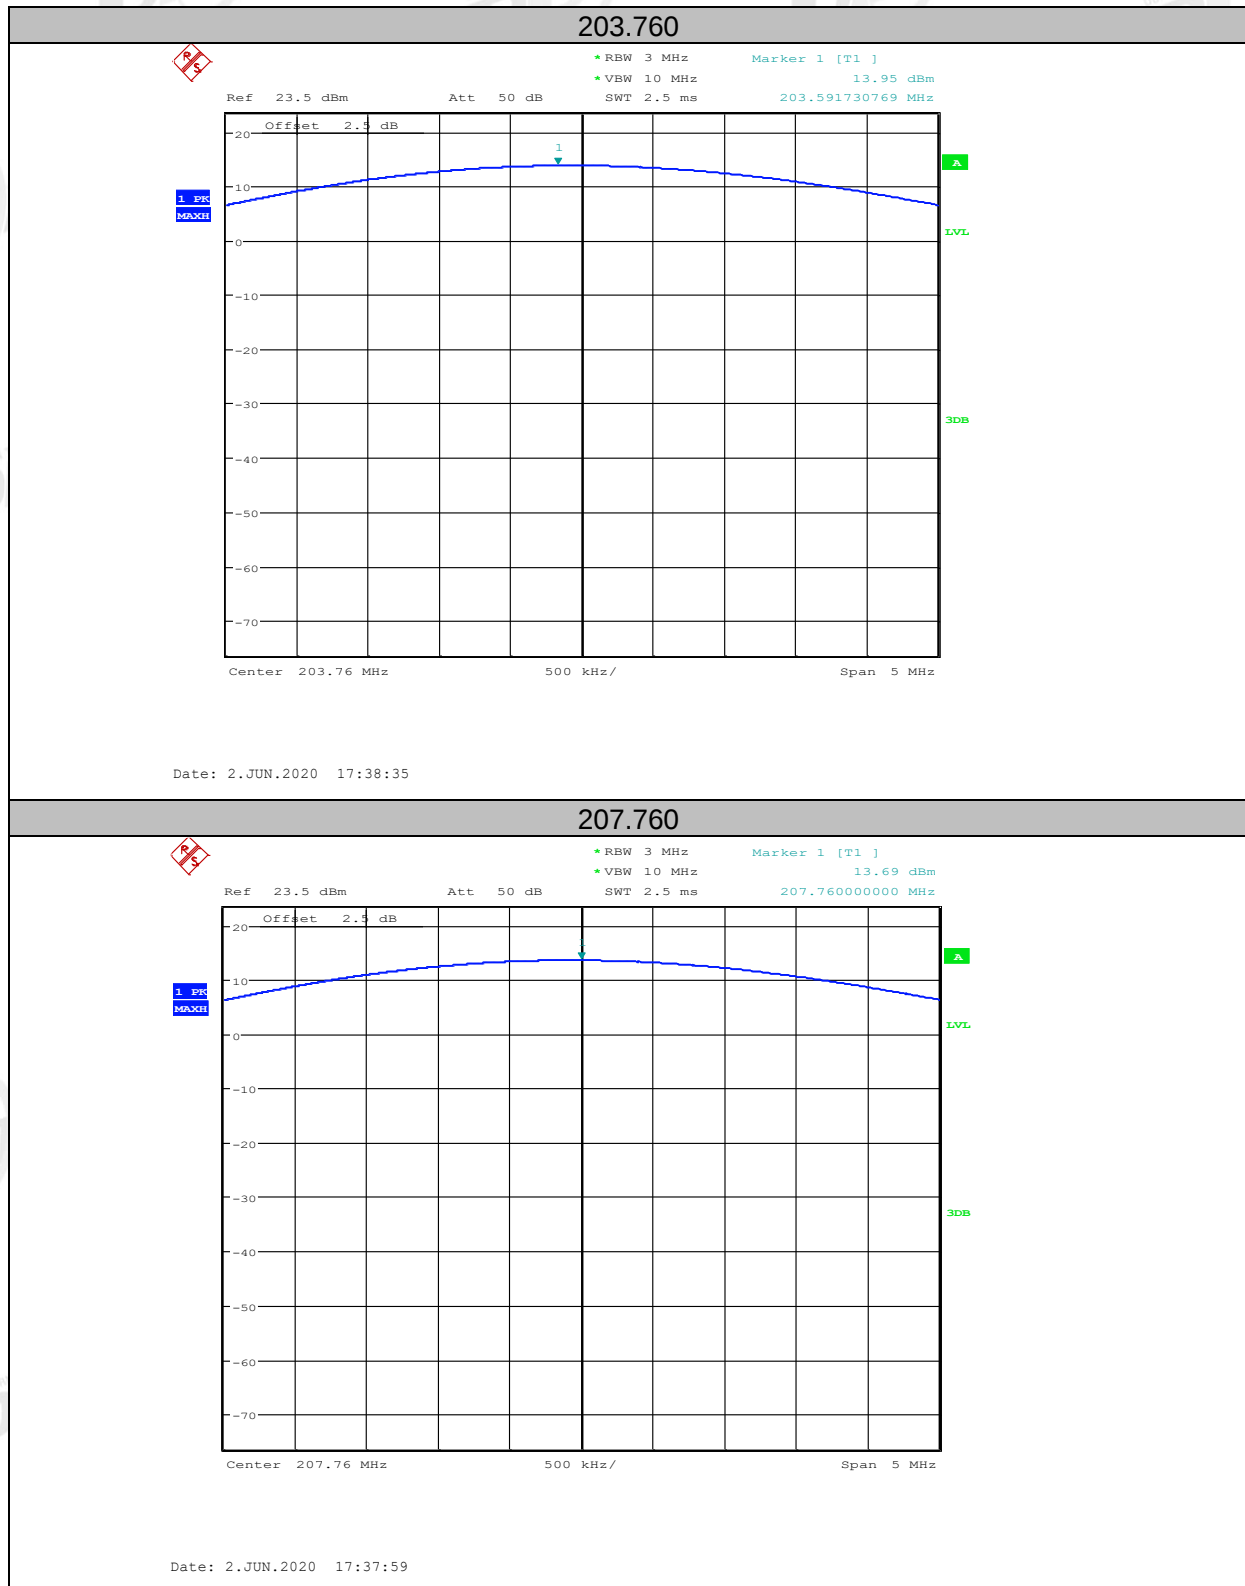

5. Occupied Bandwidth

5.1. Block diagram of test setup

Same as section 4.1

5.2. Limits

FCC Part 15.236(f)(2) One or more adjacent 25 kHz segments within the assignable frequencies may be combined to form a channel whose maximum bandwidth shall not exceed 200 kHz. The operating bandwidth shall not exceed 200 kHz.


5.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) The bandwidth of the fundamental frequency was measured by spectrum analyzer with 1 kHz RBW and 3 kHz VBW.
- (3) Using the 99% power OBW function of the spectrum analyzer. This is the occupied bandwidth specified.

5.4. Test result

Frequency (MHz)	99% bandwidth Result (kHz)	Limit (kHz)	Verdict
203.760	70.51	200	Pass
207.760	69.71	200	Pass

5.5. Original test data

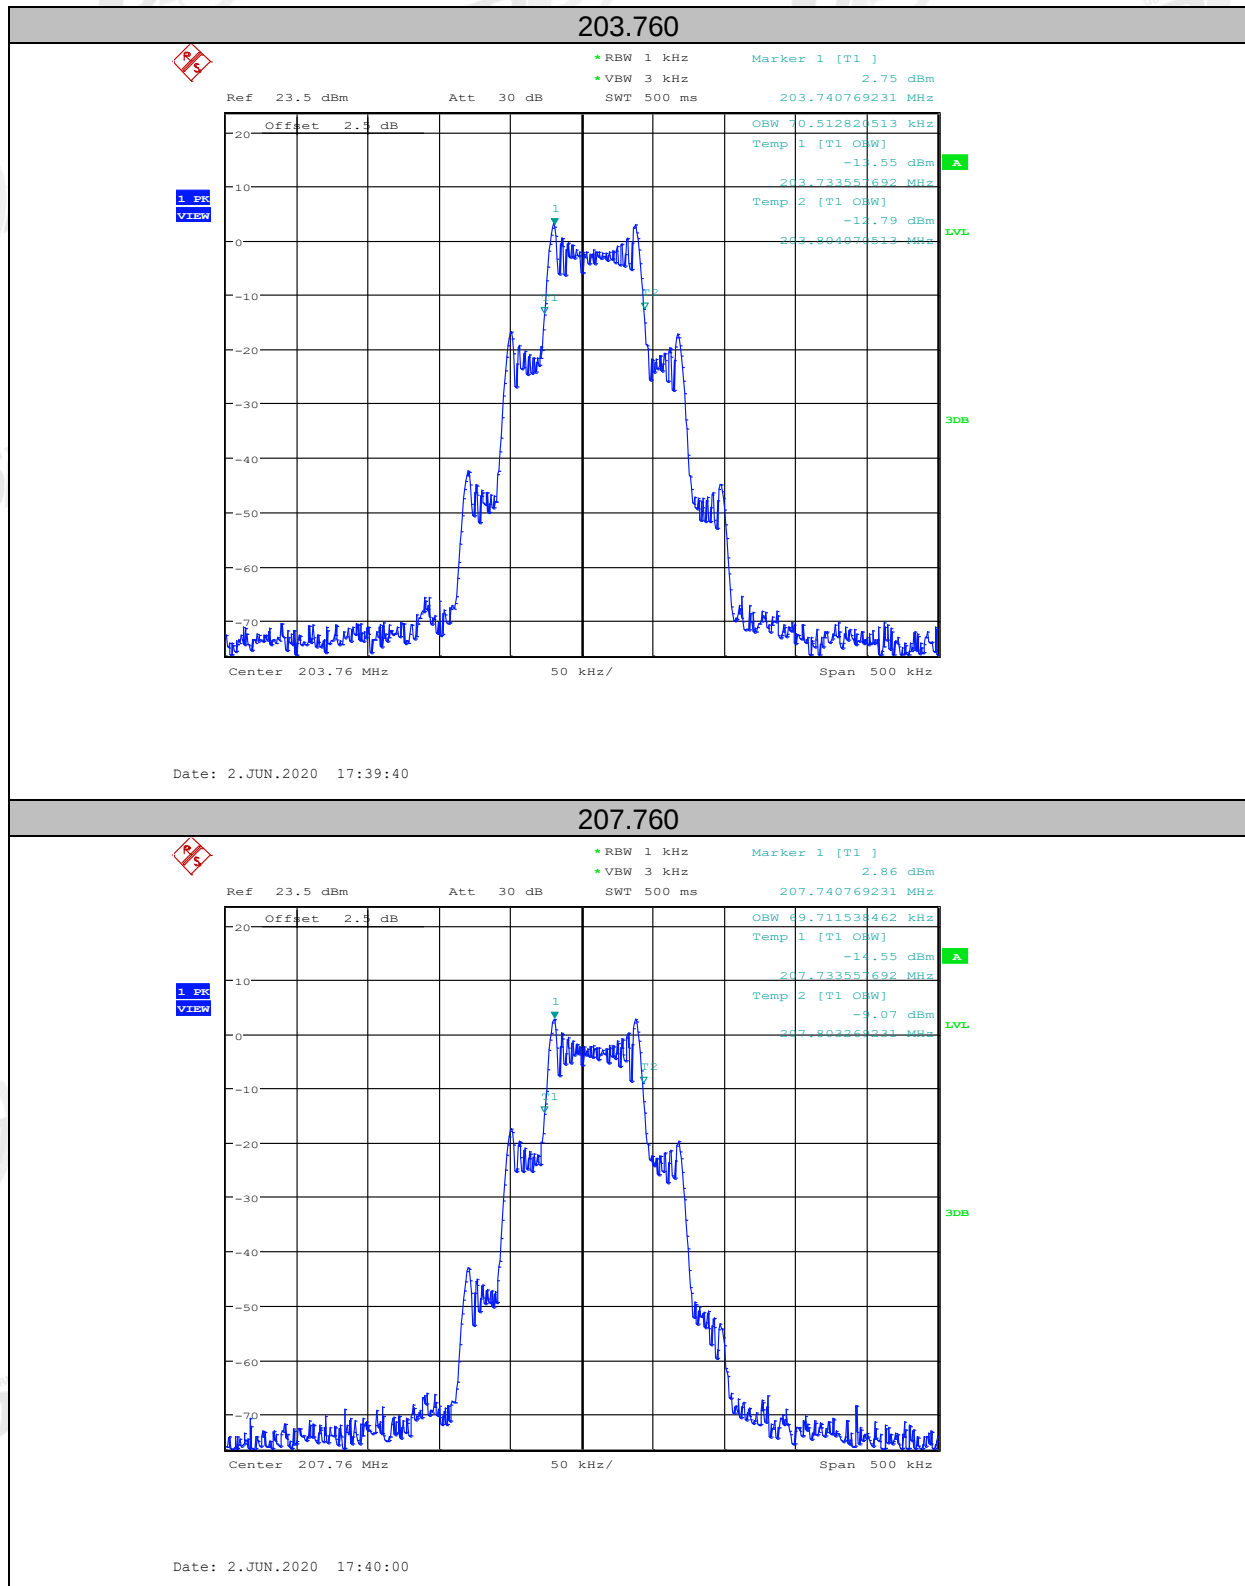

6. Frequency Tolerance

6.1. Block diagram of test setup

Same as section 4.1

6.2. Limits

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.005\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. Battery operated equipment shall be tested using a new battery.

6.3. Test Procedure

(1) Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, set the Spectrum Analyzer as below:

Centre Frequency: The centre frequency of the channel under test.

Resolution BW: 10 kHz.

Video BW: 10 kHz.

Span: 1 MHz.

Detector: Peak.

Trace Mode: Max Hold.

(2) When the trace is complete, find the peak value of the power envelope and record the frequency.

6.4. Test Result

CH	Temperature(°C)	Result			Limit
		Measured (MHz)	Tolerance (kHz)	Tolerance (ppm)	
CH1: 203.760 MHz	-20	203.761	+1	+4.908	+/-50
	-10	203.760	0	0	+/-50
	0	203.760	0	0	+/-50
	10	203.760	0	0	+/-50
	20	203.760	0	0	+/-50
	30	203.760	0	0	+/-50
	40	203.761	+1	+4.908	+/-50
	50	203.761	+1	+4.908	+/-50
CH2: 207.760 MHz	-20	207.761	+1	+4.813	+/-50
	-10	207.760	0	0	+/-50
	0	207.760	0	0	+/-50
	10	207.760	0	0	+/-50
	20	207.760	0	0	+/-50

	30	207.760	0	0	+/-50
	40	207.761	+1	+4.813	+/-50
	50	207.761	+1	+4.813	+/-50

CH	Voltage(V)	Result			Limit
		Measured (MHz)	Tolerance (kHz)	Tolerance (ppm)	ppm
CH1: 203.760 MHz	2.55	203.761	+1	+4.908	+/-50
	3.45	203.760	0	0	+/-50
CH2: 207.760 MHz	2.55	207.761	+1	+4.813	+/-50
	3.45	207.760	0	0	+/-50


7. Emission Mask

7.1. Block diagram of test setup

Same as section 4.1

7.2. Limits

According to §15.236(g), Emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in §8.3 of ETSI EN 300 422-1 V1.4.2 (2011-08), Electromagnetic compatibility and Radio spectrum Matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range; Part 1: Technical characteristics and methods of measurement. Emissions outside of this band shall comply with the limits specified in section 8.4 of ETSI EN 300 422-1 V1.4.2 (2011-08).

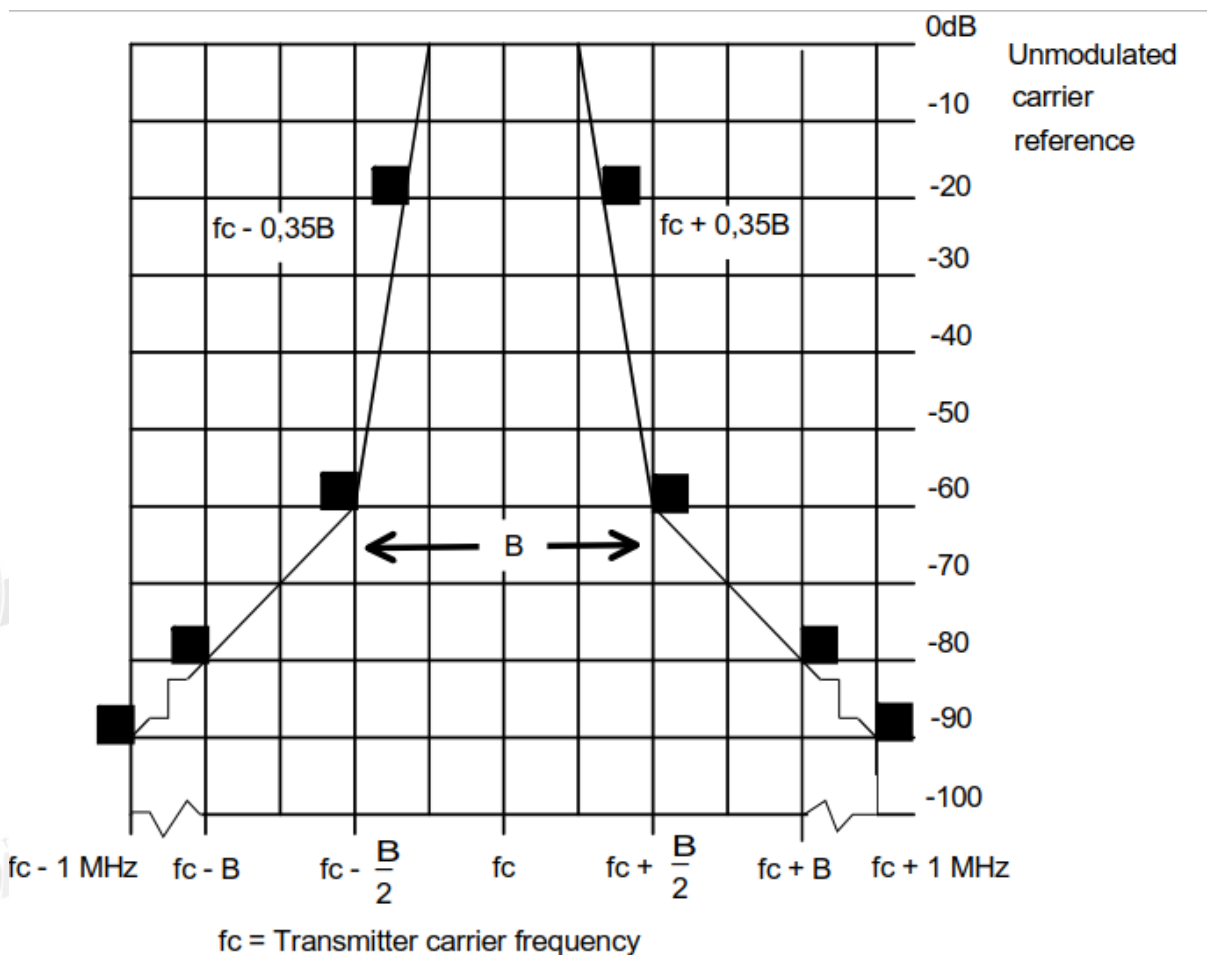


7.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Apply a 500Hz modulation signal to EUT and measure the frequencies of the modulated signal from the EUT where it is the specified number of dB below the reference level.

7.4. Test Result

Frequency (MHz)	Verdict
203.760	Pass
207.760	Pass


7.5. Original test data

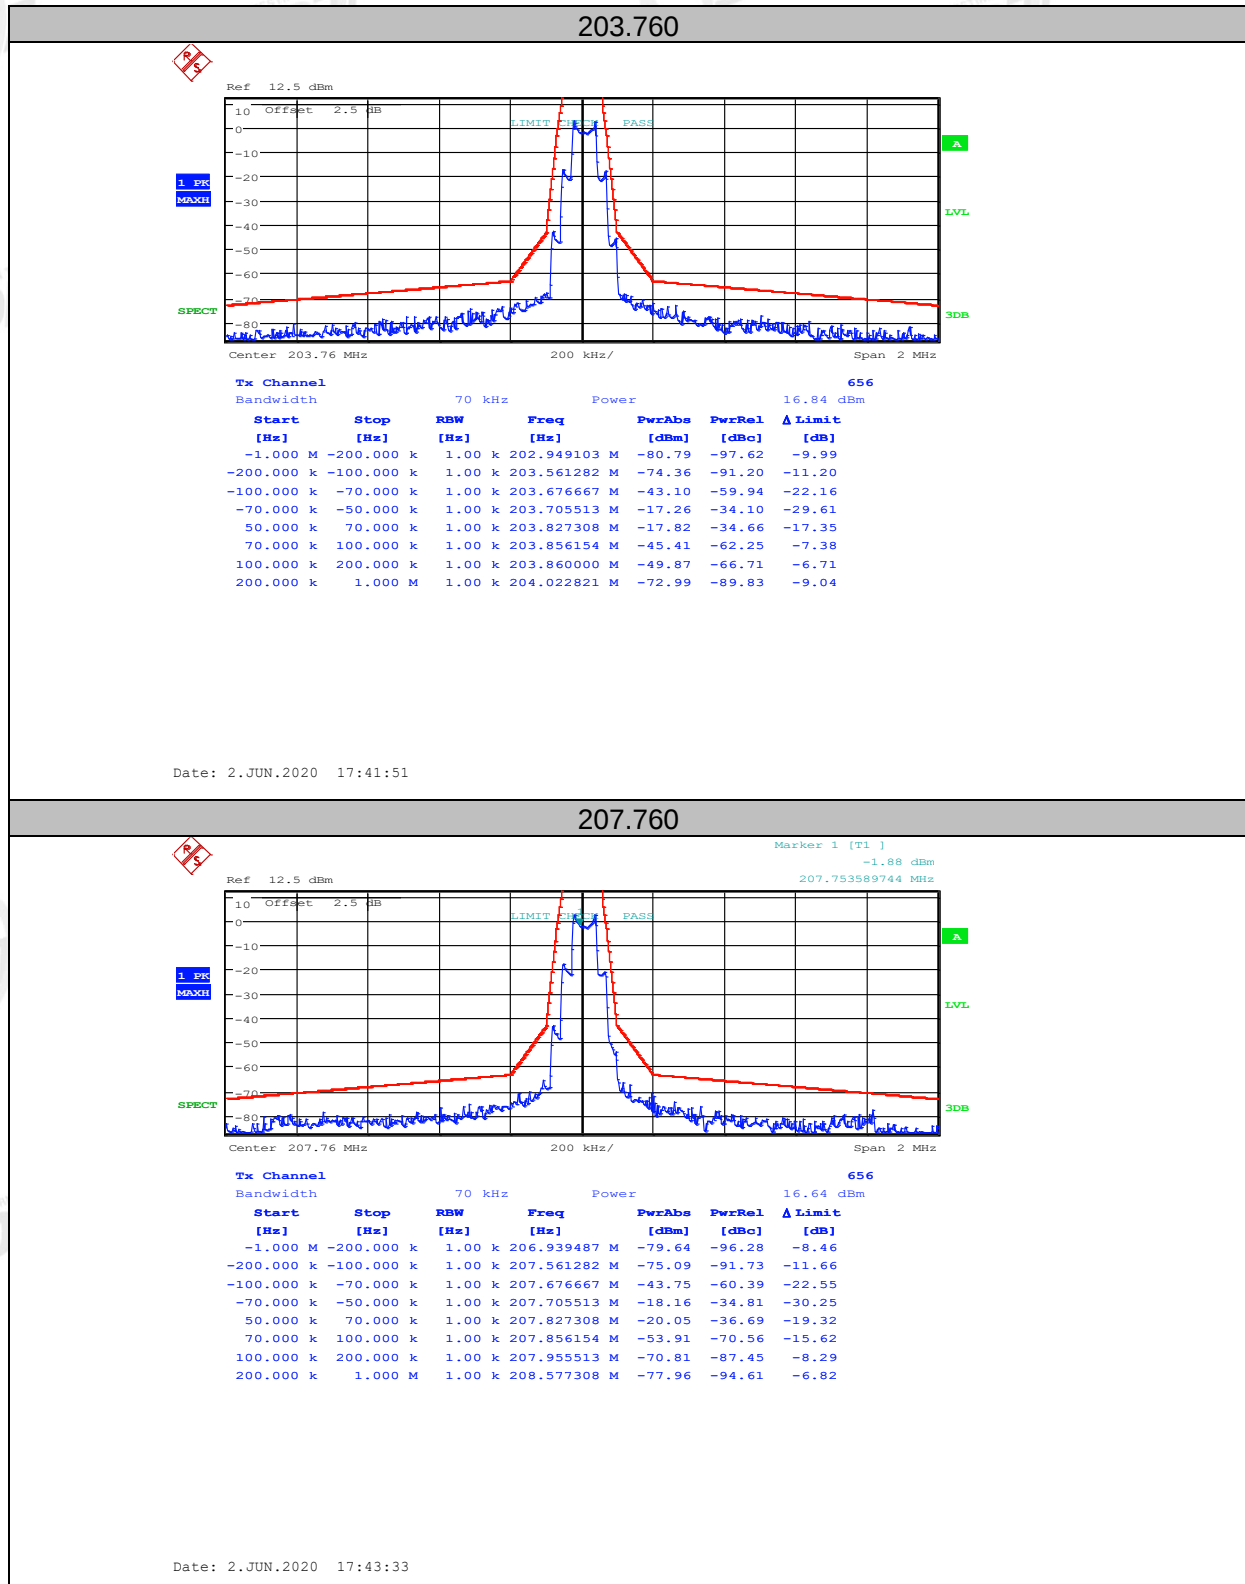


8. Radiated Spurious Emission

8.1. Block diagram of test setup

Below 1G:

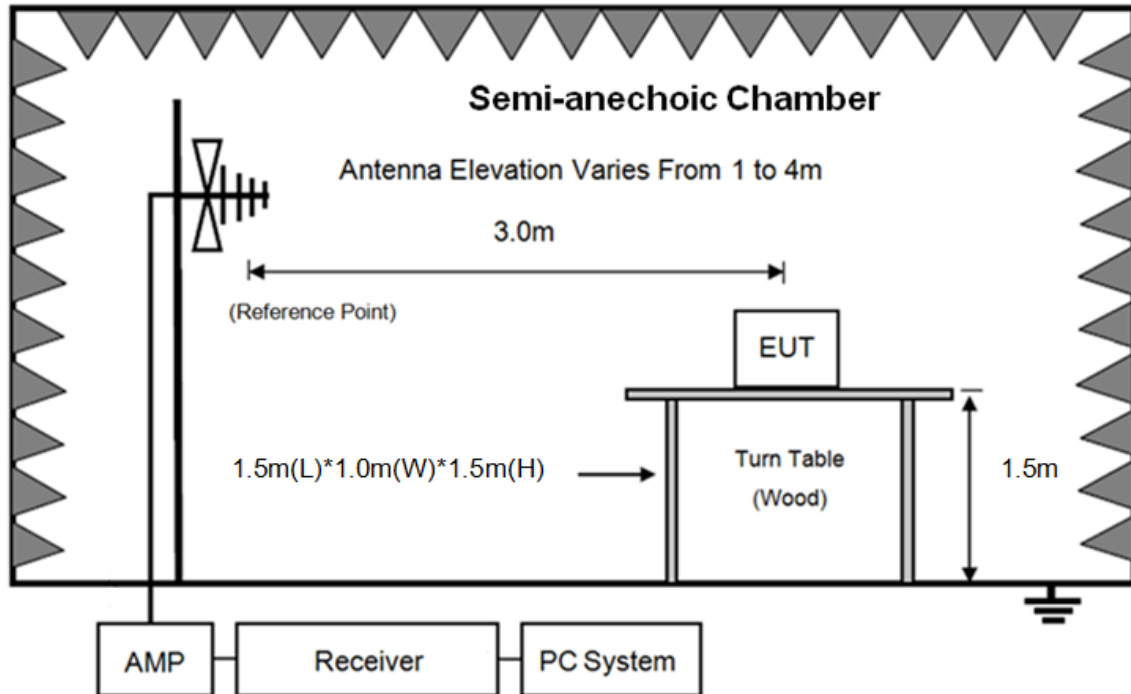

Above 1G:

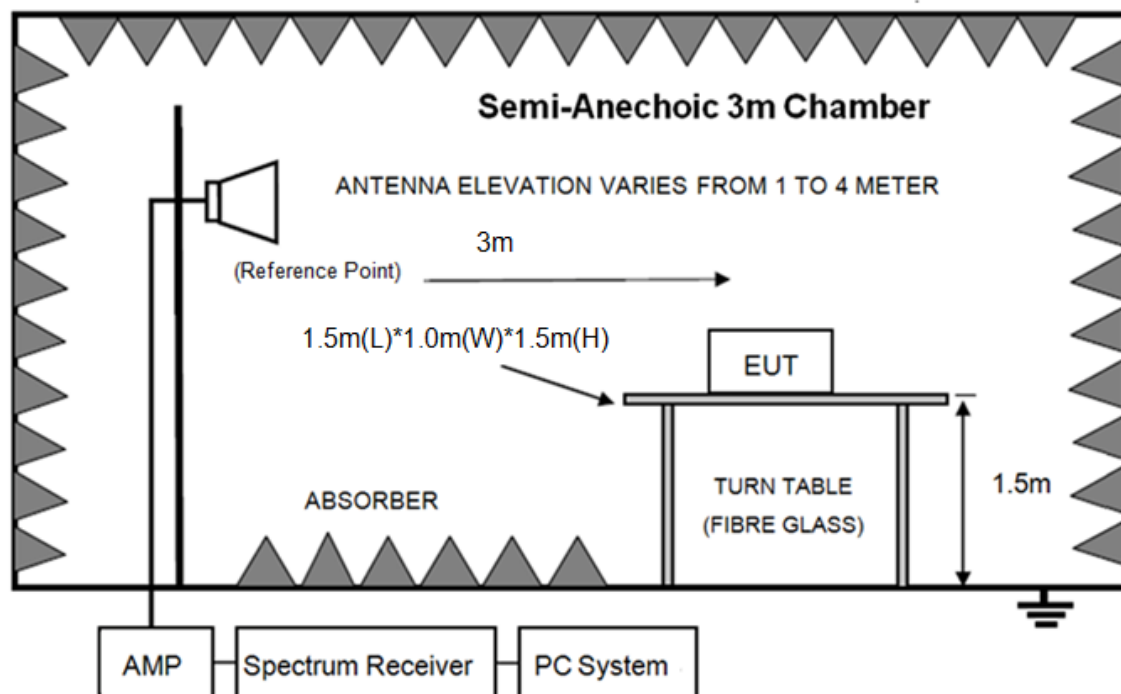

8.2. Limits

According to §15.236 (g), Emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in §8.3 of ETSI EN 300 422-1 V1.4.2 (2011-08), Electromagnetic compatibility and Radio spectrum Matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range; Part 1: Technical characteristics and methods of measurement. Emissions outside of this band shall comply with the limits specified in section 8.4 of ETSI EN 300 422-1 V1.4.2 (2011-08).

Frequency Range	Maximum power e.r.p (≤1GHz) e.i.r.p (>1GHz)	Bandwidth
30 MHz to 47 MHz	-36 dBm	100 kHz
47 MHz to 74 MHz	-54 dBm	100 kHz
74 MHz to 87.5 MHz	-36 dBm	100 kHz
87.5 MHz to 137 MHz	-54 dBm	100 kHz
137 MHz to 174 MHz	-36 dBm	100 kHz
174 MHz to 230 MHz	-54 dBm	100 kHz
230 MHz to 470 MHz	-36 dBm	100 kHz
470 MHz to 862 MHz	-54 dBm	100 kHz
862 MHz to 1 GHz	-36 dBm	100 kHz
1 GHz to 12.75 GHz	-30 dBm	1 MHz

8.3. Test Procedure

- (1) Scan from 25MHz to 12.75GHz, find the maximum radiation frequency to measure.
- (2) The technique used to find the Spurious Emissions of the transmitter was the antenna substitution method. Substitution method was performed to determine the actual ERP/EIRP emission levels of the EUT.
- (3) Refer to EN 300 422-3 V2.1.1 Clause 8.4.2 and Annex C

8.4. Test result

Pass. (See below detailed test result)

Radiated Emission test (below 1GHz)

TR-4-E-009 Radiated Spurious Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2020 RE 1# Report data\Q20032729-1E WM-KP800\CE
RF LOW1G FM6

Test Date : 2020-06-02

Tested By : Jacky

EUT : Wireless microphone

Model Number : WM-KP800


Power Supply : Battery

Test Mode : TX Mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2019 VULB 9163 1#/3m/HORIZONTAL

Memo : 203.76MHz

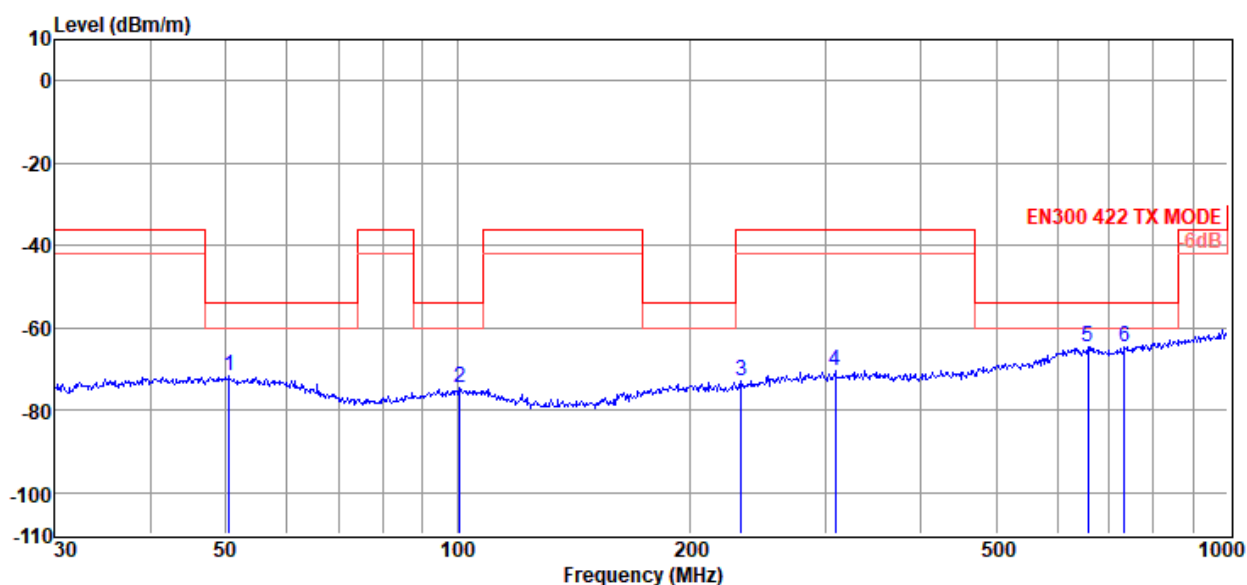

Item (Mark)	Freq. (MHz)	Read Level (dBm)	Antenna Factor (dB/m)	Cable Loss dB	Site Loss Factor dB	Result Level (dBm)	Limit Line (dBm)	Over Limit (dB)	Type
1	50.59	-103.44	14.12	4.00	13.49	-71.83	-54.00	-17.83	EIRP
2	100.58	-102.55	11.86	4.41	11.63	-74.65	-54.00	-20.65	EIRP
3	233.35	-102.23	12.43	5.21	11.62	-72.97	-36.00	-36.97	EIRP
4	308.91	-101.86	14.22	5.56	11.71	-70.37	-36.00	-34.37	EIRP
5	658.84	-100.93	19.62	6.94	9.63	-64.74	-54.00	-10.74	EIRP
6	734.49	-101.07	20.19	7.18	9.02	-64.68	-54.00	-10.68	EIRP

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Site Loss Factor.

2. Below 1 GHz test setup: RBW: 100 kHz, VBW: 300 kHz, Sweep time: auto.

3. Above 1 GHz test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Spurious Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2020 RE 1# Report data\Q20032729-1E WM-KP800\CE
RFI QW1G FM6

Test Date : 2020-06-02

Tested By : Jacky

EUT : Wireless microphone

Model Number : WM-KP800


Power Supply : Battery

Test Mode : TX Mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2019 VULB 9163 1#/3m/VERTICAL

Memo : 203.76MHz

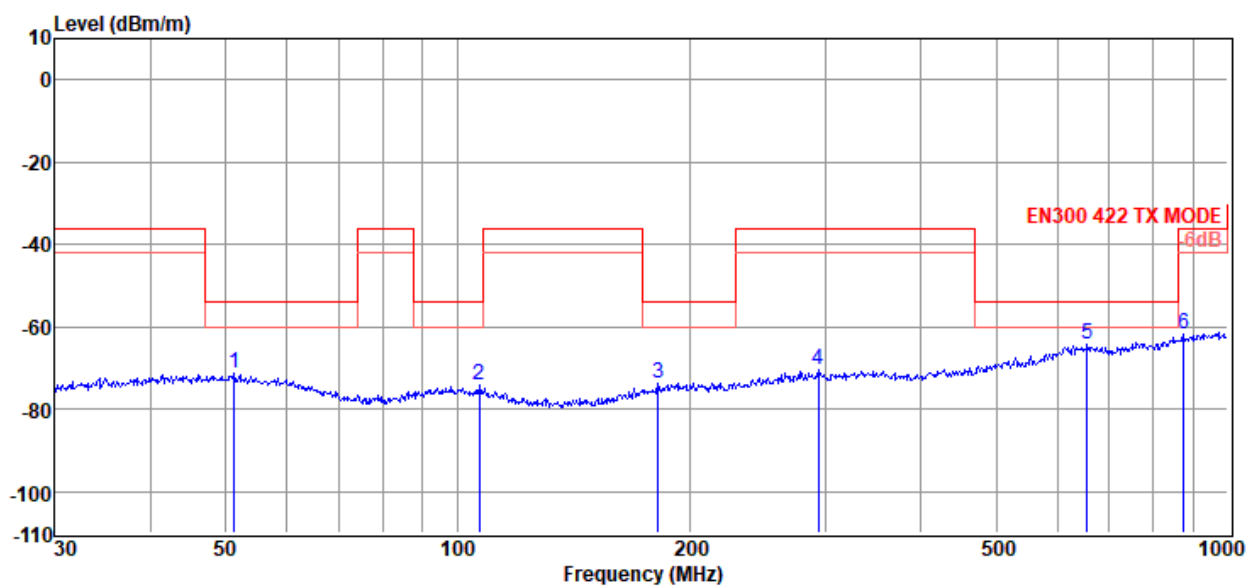

Item (Mark)	Freq. (MHz)	Read Level (dBm)	Antenna Factor (dB/m)	Cable Loss dB	Site Loss Factor dB	Result Level (dBm)	Limit Line (dBm)	Over Limit (dB)	Type
1	51.30	-103.03	14.03	4.00	13.77	-71.23	-54.00	-17.23	EIRP
2	106.76	-102.78	11.49	4.46	12.89	-73.94	-54.00	-19.94	EIRP
3	181.92	-101.60	10.06	4.93	13.07	-73.54	-54.00	-19.54	EIRP
4	294.11	-101.66	13.97	5.50	11.58	-70.61	-36.00	-34.61	EIRP
5	656.53	-100.73	19.61	6.94	9.86	-64.32	-54.00	-10.32	EIRP
6	875.25	-100.67	21.54	7.61	9.76	-61.76	-36.00	-25.76	EIRP

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Site Loss Factor.

2. Below 1 GHz test setup: RBW: 100 kHz, VBW: 300 kHz, Sweep time: auto.

3. Above 1 GHz test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Spurious Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2020 RE 1# Report data\Q20032729-1E WM-KP800\CE
RFI QW1G FM6

Test Date : 2020-06-02

Tested By : Jacky

EUT : Wireless microphone

Model Number : WM-KP800


Power Supply : Battery

Test Mode : TX Mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2019 VULB 9163 1#/3m/VERTICAL

Memo : 207.76MHz

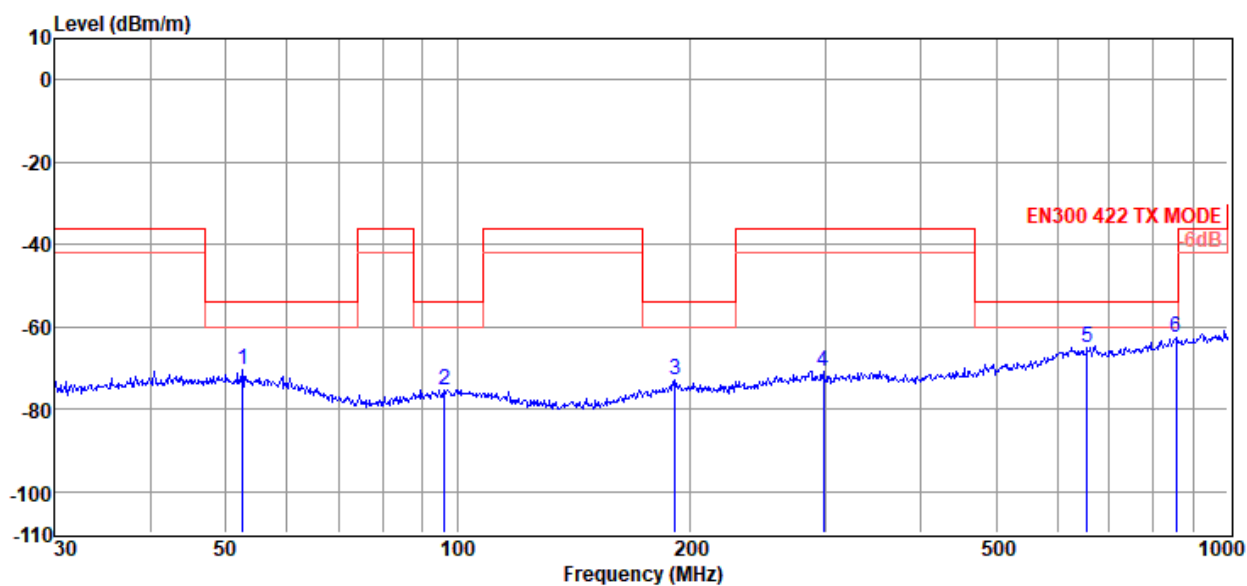

Item (Mark)	Freq. (MHz)	Read Level (dBm)	Antenna Factor (dB/m)	Cable Loss dB	Site Loss Factor dB	Result Level (dBm)	Limit Line (dBm)	Over Limit (dB)	Type
1	52.58	-102.28	13.87	4.02	13.77	-70.62	-54.00	-16.62	EIRP
2	96.10	-103.98	11.52	4.38	12.89	-75.19	-54.00	-21.19	EIRP
3	191.75	-101.91	11.15	4.99	12.77	-73.00	-54.00	-19.00	EIRP
4	298.27	-101.91	14.06	5.51	11.58	-70.76	-36.00	-34.76	EIRP
5	656.53	-101.36	19.61	6.94	9.86	-64.95	-54.00	-10.95	EIRP
6	857.03	-101.21	21.34	7.56	9.59	-62.72	-54.00	-8.72	EIRP

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Site Loss Factor.

2. Below 1 GHz test setup: RBW: 100 kHz, VBW: 300 kHz, Sweep time: auto.

3. Above 1 GHz test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Spurious Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2020 RE 1# Report data\Q20032729-1E WM-KP800\CE
RFI QW1G FM6

Test Date : 2020-06-02

Tested By : Jacky

EUT : Wireless microphone

Model Number : WM-KP800


Power Supply : Battery

Test Mode : TX Mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2019 VULB 9163 1#/3m/HORIZONTAL

Memo : 207.76MHz

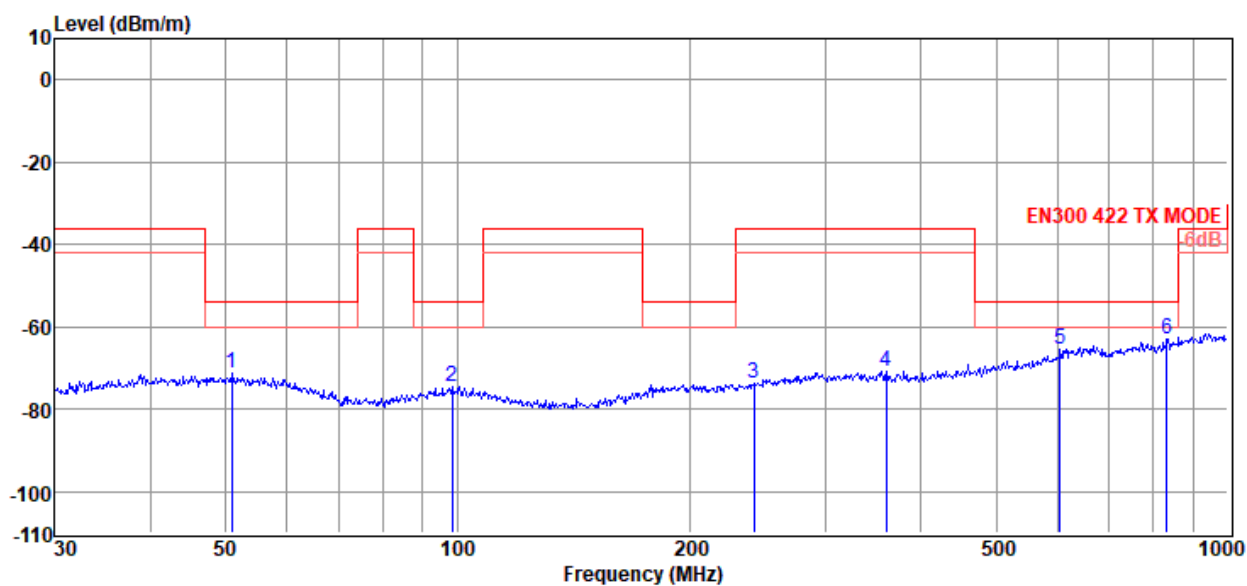

Item (Mark)	Freq. (MHz)	Read Level (dBm)	Antenna Factor (dB/m)	Cable Loss dB	Site Loss Factor dB	Result Level (dBm)	Limit Line (dBm)	Over Limit (dB)	Type
1	50.94	-102.78	14.08	4.00	13.49	-71.21	-54.00	-17.21	EIRP
2	98.49	-102.31	11.76	4.40	11.63	-74.52	-54.00	-20.52	EIRP
3	242.53	-103.29	12.68	5.26	11.62	-73.73	-36.00	-37.73	EIRP
4	360.45	-102.58	14.87	5.80	10.97	-70.94	-36.00	-34.94	EIRP
5	605.66	-100.87	19.24	6.76	9.46	-65.41	-54.00	-11.41	EIRP
6	833.32	-101.04	21.08	7.48	9.39	-63.09	-54.00	-9.09	EIRP

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Site Loss Factor.

2. Below 1 GHz test setup: RBW: 100 kHz, VBW: 300 kHz, Sweep time: auto.


3. Above 1 GHz test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Radiated Emission test (above 1GHz)

203.760 Mhz				
1404.00	-59.37	-30.00	H	PASS
1820.00	-58.83	-30.00	H	PASS
2006.00	-56.76	-30.00	H	PASS
2414.00	-50.36	-30.00	H	PASS
2464.00	-49.00	-30.00	H	PASS
2786.00	-54.26	-30.00	H	PASS
1236.00	-59.74	-30.00	V	PASS
1866.00	-58.48	-30.00	V	PASS
2190.00	-57.90	-30.00	V	PASS
2474.00	-53.26	-30.00	V	PASS
2690.00	-54.67	-30.00	V	PASS
2966.00	-52.97	-30.00	V	PASS
207.760 Mhz				
1150.00	-59.36	-30.00	H	PASS
1626.00	-59.57	-30.00	H	PASS
1910.00	-57.13	-30.00	H	PASS
2176.00	-57.33	-30.00	H	PASS
2610.00	-54.35	-30.00	H	PASS
2880.00	-54.72	-30.00	H	PASS
1176.00	-60.19	-30.00	V	PASS
1464.00	-60.47	-30.00	V	PASS
2000.00	-57.41	-30.00	V	PASS
2400.00	-57.00	-30.00	V	PASS
2784.00	-55.84	-30.00	V	PASS
2980.00	-54.68	-30.00	V	PASS

9. Power Line Conducted Emission

9.1. Block diagram of test setup

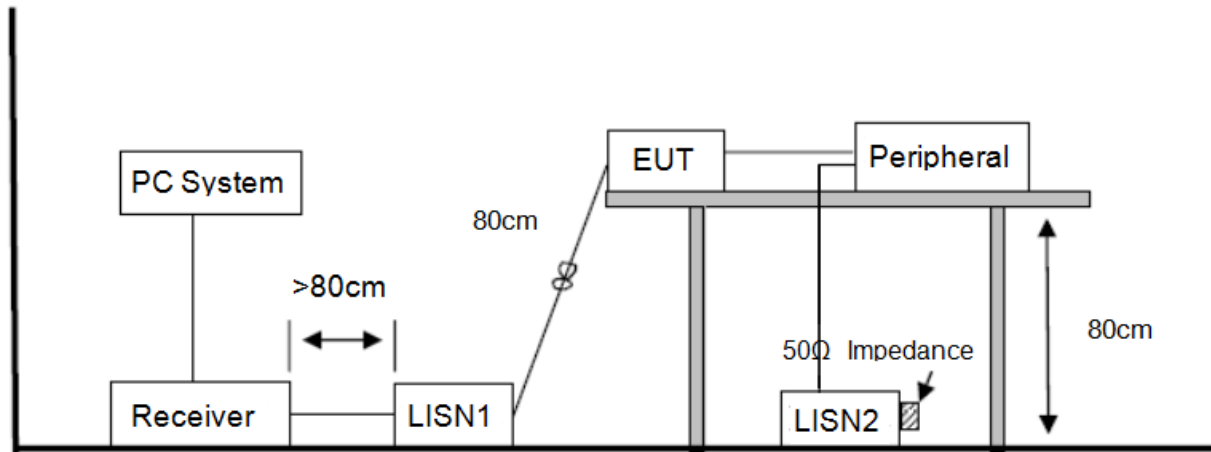

9.2. Power Line Conducted Emission Limits

Frequency	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150 kHz ~ 500 kHz	66 ~ 56*	56 ~ 46*
500 kHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

9.3. Test Procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

Configuration EUT to simulate typical usage as described in clause 2.4 and test equipment as described in clause 10.2 of this report.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

9.4. Test Result

Not Applicable

Remark: Conducted limits are not required for devices which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines according to 15.207(C).

10. Antenna Requirements

10.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

10.2. Result

The antenna used for this product is Spring antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only 1 dBi.

END OF REPORT