Report No.: BCTC-15060083



FCC Part 15C Test Report FCC ID: 2AE6PFFC100A

Product Name:	Remote Control
Trademark:	
Model Name :	FFC100A,FFC100B,ZD-OF04,ZD-MF04,ZD-QF04,ZD-DF04,ZD-HF12,Z D-NF04,ZD-LF04,ZD-FF04
Prepared For :	R&C Oregon inc, Dba Feather Flyers
Address :	2075 West Lowry Street, Meridian, Idaho, 83646, United States
Prepared By :	Shenzhen BCTC Technology Co., Ltd.
Address :	No.101, Yousong Road, Longhua New District, Shenzhen, China
Test Date:	Jun. 15 - Jun. 18, 2015
Date of Report :	Jun. 19, 2015
Report No.:	BCTC-15060083



VERIFICATION OF COMPLIANCE

Applicant's name:	R&C Oregon inc, Dba Feather Flyers			
Address:	2075 West Lowry Street, Meridian, Idaho, 83646, United			
	States			
Manufacture's Name:	Hangzhou Zhengdian Technology Co., Ltd.			
Address:	No.1 building Wangshan Community Xingqiao Street			
	Yuhang District Hangzhou, China			
Product description				
Product name:	Remote Control			
Trademark:				
Model Name:	FFC100A,FFC100B,ZD-OF04,ZD-MF04,ZD-QF04, ZD-DF04,ZD-HF12,ZD-NF04,ZD-LF04,ZD-FF04			
Test procedure	FCC Part15.231			
Standards	ANSI C63.10-2009			
	is been tested by BCTC, and the test results show that the n compliance with the FCC requirements. And it is applicable only n the report.			
·	ced except in full, without the written approval of BCTC, this vised by BCTC, personal only, and shall be noted in the revision of			
Test Result	Pass			
Testing Engineer	Evic Yang			
	(Eric Yang)			
Technical Manager	Sophie Lu			
	(Sophia Lee)			
	TECHN			

FCC Report

Tel: 400-788-9558 0755-33019988

Authorized Signatory:

Web:Http//www.bctc-lab.com

(Carson. Zhang)

Page 2 of 30



Table of Contents **Page** 1. SUMMARY OF TEST RESULTS 5 1.1 TEST FACILITY 6 1.2 MEASUREMENT UNCERTAINTY 6 2. GENERAL INFORMATION 7 2.1 GENERAL DESCRIPTION OF EUT 7 2.2 DESCRIPTION OF TEST MODES 8 2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED 8 2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE) 8 2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS 9 3. EMC EMISSION TEST 10 3.1 CONDUCTED EMISSION MEASUREMENT 10 3.1.1 POWER LINE CONDUCTED EMISSION LIMITS 10 3.1.2 TEST PROCEDURE 11 3.1.3 DEVIATION FROM TEST STANDARD 11 3.1.4 TEST SETUP 11 3.1.5 EUT OPERATING CONDITIONS 11 3.1.6 TEST RESULTS 11 3.2 RADIATED EMISSION MEASUREMENT 12 3.2.1 RADIATED EMISSION LIMITS 12 3.2.2 TEST PROCEDURE 13 3.2.3 TEST SETUP 14 3.2.4 EUT OPERATING CONDITIONS 15 3.2.5 TEST RESULTS 16 4. BANDWIDTH TEST 21 **4.1 APPLIED PROCEDURES / LIMIT** 21 **4.1.1 TEST PROCEDURE** 21 4.1.2 DEVIATION FROM STANDARD 21 4.1.3 TEST SETUP 21 4.1.4 EUT OPERATION CONDITIONS 21 **4.1.5 TEST RESULTS** 22 5. CALCULATION OF AVERAGE FACTOR 23 6. DWELL TIME 26 **6.1 DEVIATION FROM STANDARD** 26 **6.2 TEST SETUP** 26



Shenzhen BCTC Technology Co., Ltd. Report No.: BCTC-15060083

Table of Contents	Page
6.3 EUT OPERATION CONDITIONS 6.4 TEST RESULTS	26 27
7 . ANTENNA REQUIREMENT	28
7.1 STANDARD REQUIREMENT	28
7.2 EUT ANTENNA	28
8 . EUT TEST PHOTO APPENDIX-PHOTOGRAPHS OF FUT CONSTRUCTIONAL DETAILS	29



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.231) , Subpart C					
Standard Section	Test Item	Remark			
15.207	Conducted Emission	N/A			
15.209,15.231b	Radiated Emission Test	PASS			
15.231c	20dB Occupy Bandwidth	PASS			
15.231a	Dwell time	PASS			
15.203	Antenna Requirement	PASS			

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report



1.1 TEST FACILITY

Shenzhen BCTC Technology Co., Ltd.

Add.:No.101, Yousong Road, Longhua New District, Shenzhen, China

FCC Registration No.:187086

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $\mathbf{y} \pm \mathbf{U}$, where expended uncertainty \mathbf{U} is based on a standard uncertainty multiplied by a coverage factor of $\mathbf{k=2}$, providing a level of confidence of approximately 95 % $^{\circ}$

No.	Item	Uncertainty
1	Conducted Emission Test	±1.38dB
2	RF power,conducted	±0.16dB
3	Spurious emissions,conducted	±0.21dB
4	All emissions,radiated(<1G)	±4.68dB
5	All emissions,radiated(>1G)	±4.89dB
6	Temperature	±0.5°C
7	Humidity	±2%



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Remote Control		
Trade Name			
Model Name	FFC100A		
Serial Model	FFC100B,ZD-OF04,ZD-	MF04,ZD-QF04,ZD-DF04,ZD-H	
	F12,ZD-NF04,ZD-LF04,	ZD-FF04	
Model Difference	All the same,Only mode	I name is different.	
	The EUT is a Remote C	ontrol	
	Operation Frequency:	433.92MHz	
	Modulation Type:	ASK	
Draduat Description	Antenna Designation:	Integral	
Product Description	Antenna Gain	3dBi	
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.		
Adapter	N/A		
Battery	DC 12V		
Connecting I/O Port(s)	Please refer to the User's Manual		
Hardware Version	V1.1		
Software Version	V0.1		

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2.2 DESCRIPTION OF TEST MODES

For All Emission				
Final Test Mode	Description			
Mode 1	TX Mode			

Note:

- (1) New battery is used during the test
- (2) The antenna is telescopic antenna, The worst mode is on max length(7cm).
- (3) For this device equipped with 4 buttons, all 4 buttons was pre-tested and the worst button was Increase the speed button and the data was recrding the report.

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test

EUT

2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in <code>"Length_"</code> column.
- (3) "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".



2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation, 20db bandwith, dwell time test equipment

Taul	Radiation, 2000 bandwith, dwell time test equipment						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibratio n period
1	Spectrum Analyzer	Agilent	E4407B	MY4510804 0	2014.07.06	2015.07.05	1 year
2	Test Receiver	R&S	ESCI	1166.595 0K03-101 165-ha	2015.06.06	2016.06.05	1 year
3	Bilog Antenna	R&S	VULB 9168	VULB91 68-438	2014.07.06	2015.07.05	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	620026441 6	2015.06.06	2016.06.05	1 year
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	2015.06.06	2016.06.05	1 year
6	Horn Antenna	R&S	HF906	10027	2014.07.06	2015.07.05	1 year
7	RF cables (1GHz~25GH z)	Florida RFLa bs	Lab-Fle	966 cable 2#	2015.06.06	2016.06.05	1 year
8	Amplifier	R&S	BBV9743	9743-01 9	2014.12.22	2015.12.21	1 year
9	Loop Antenna	ARA	PLA-1030/B	1029	2015.06.06	2016.06.05	1 year
10	RF cables (9kHz~1GHz)	R&S	R203	R20X	2015.06.06	2016.06.05	1 year
11	Antenna connector (20db bandwith,dwe Il time)	Florida RFLa bs	Lab-Fle	RF 01#	2015.06.06	2016.06.05	1 year

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FDF II NOV (MU=)	Class B (d	Standard	
FRE U NCY (MHz)	Quasi-peak	Average	Standard
0.15 -0.5	66 - 56 *	56 - 46 *	CISPR
0. 0 -5.0	56.00	46.00	CISPR
5.0 -30.0	60.00	50.00	CISPR

0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting	
Attenuation	10 dB	
Start Frequency	0.15 MHz	
Stop Frequency	30 MHz	
IF Bandwidth	9 kHz	




3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d LISN at least 80 cm from nearest part of EUT chassis.
- e For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

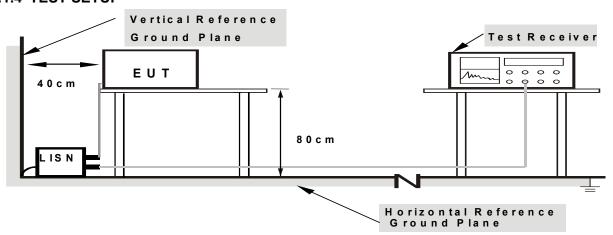

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

3.1.6 TEST RESULTS

The product's power provide by battery, no requriment for conduct test.



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.231(b) limit in the table below has to be followed.

DC 10110WCG.		
Frequencies(MHz) Field Strength(micorvolts/meter		Measurement Distance(meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)			
	PEAK	AVERAGE		
Above 1000	74	54		

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

FUNDAMENTAL AND HARMONICS EMISSION LIMITS

Fundamental Frequency (MHz)	Field Strength of Fundamental (microvolts/meter)	Field Strength of Spurious Emissions (microvolts/meter)
40.66 - 40.70	2.250	225
70 - 130	1,250	125
130 - 174	1,250 to 3,750 **	125 to 375 **
174 - 260	3,750	375
260 - 470	3,750 to 12,500 **	375 to 1,250 **
Above 470	12,500	1,250

^{**} linear interpolations

[Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz, μ V/m at 3 meters = 56.81818(F) - 6136.3636; for the band 260-470 MHz, μ V/m at 3 meters = 41.6667(F) - 7083.3333. The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.]



FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW setting	1 MHz / 1 MHz for Peak

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.




g. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case was X axis and the emissions were reported


3.2.3 TEST SETUP

(A) Radiated Emission Test-Up Frequency Below 30MHz

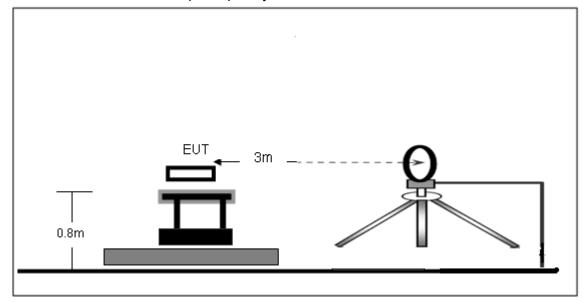




(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

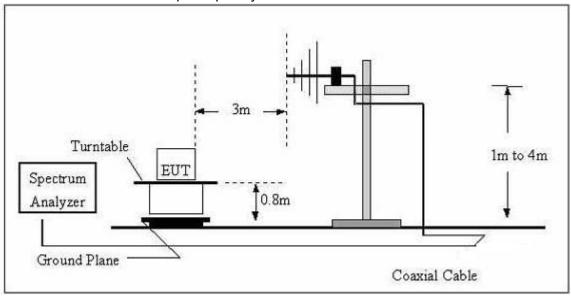

(C) Radiated Emission Test-Up Frequency Above 1GHz

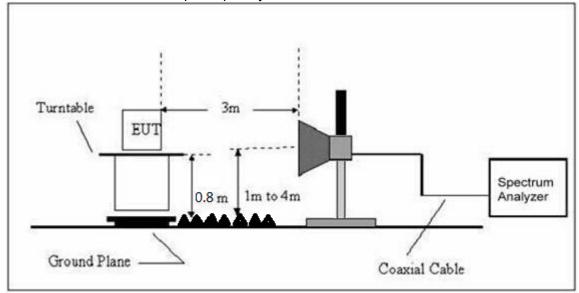

3.2.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



3.2.5 TEST RESULTS

Radiated Spurious Emission (Below 30MHz)

EUT:	Remote Control	Model Name :	FFC100A
Temperature :	20 ℃	Relative Humidity:	48%
Pressure :	1010 hPa	Polarization :	
Test Voltage :	By Battery		
Test Mode :	TX Mode		

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
				PASS
				PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor =40 log (specific distance/test distance)(dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.



Radiated Spurious Emission (Between 30MHz – 1GHz)

EUT:	Remote Control	Model Name :	FFC100A
Temperature :	26 ℃	Relative Humidity:	54%
Pressure :	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 12V		
Test Mode :	TX Mode		

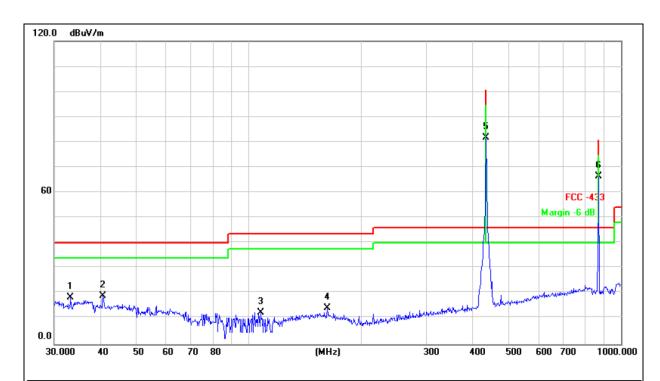

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBu∀	dB/m	dBuV/m	dBuV/m	dB	Detector
1		33.2111	26.80	-8.41	18.39	40.00	-21.61	QP
2		40.5591	27.88	-8.92	18.96	40.00	-21.04	QP
3		107.5100	28.21	-15.79	12.42	43.50	-31.08	QP
4		162.6106	27.28	-13.03	14.25	43.50	-29.25	QP
5		433.9200	91.06	-9.37	81.69	100.80	-19.11	peak
6	*	867.8400	68.52	-2.05	66.47	80.80	-14.33	peak


Remark:

Factor = Antenna Factor + Correct Factor. Correct Factor= Cable Loss – Pre-amplifier



Shenzhen BCTC Technology Co., Ltd.

EUT:	Remote Control	Model Name :	FFC100A
Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
Test Voltage :	DC 12V		
Test Mode :	TX Mode		

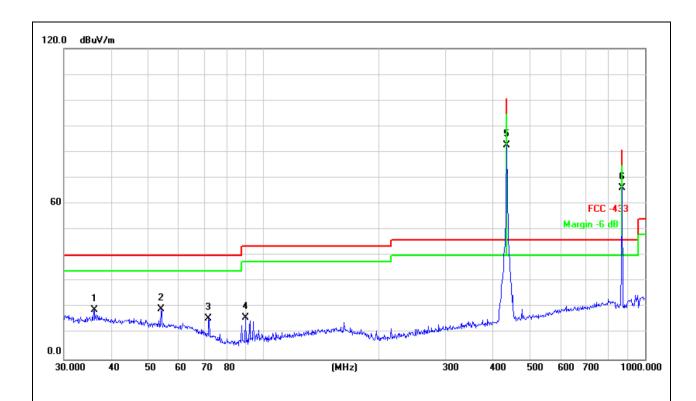

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBu∀	dB/m	dBuV/m	dBuV/m	dB	Detector
1		36.0007	27.78	-8.59	19.19	40.00	-20.81	QP
2		53.8817	30.41	-10.93	19.48	40.00	-20.52	QP
3		71.8319	31.03	-15.19	15.84	40.00	-24.16	QP
4		89.5899	33.51	-17.55	15.96	43.50	-27.54	QP
5		433.9200	92.05	-9.37	82.68	100.80	-18.12	peak
6	*	867.8400	68.27	-2.05	66.22	80.80	-14.58	peak

Remark:

Factor = Antenna Factor + Correct Factor. Correct Factor= Cable Loss – Pre-amplifier



For average Emission

Frequency MHz	Peak Level dBuV/m	Duty cycle factor	AverageLevel dBuV/m	Polarization	Limit AV	Margin
433.92	82.68	-7.17	75.51	Vertical	80.80	-5.29
867.84	66.22	-7.17	59.05	Vertical	60.80	-1.75

Shenzhen BCTC Technology Co., Ltd.

Notes: 1. Average emission Level = Peak Level + Duty cycle factor 2. Duty cycle level please see clause 5.

Frequency MHz	Peak Level dBuV/m	Duty cycle factor	AverageLevel dBuV/m	Polarization	Limit AV	Margin
433.92	81.69	-7.17	74.52	Horizontal	80.80	-6.28
867.84	66.47	-7.17	59.30	Horizontal	60.80	-1.50

Notes: 1. Average emission Level = Peak Level + Duty cycle factor 2.Duty cycle level please see clause 5.



Shenzhen BCTC Technology Co., Ltd.

Radiated Spurious Emission (1GHz to 10th harmonics)

Peak Frequency	Peak	Duty cycle	Average		Limit		Margin dB	
MHz	Level dBuV/m	factor	Level dBuV/m	Polarization	PK	AV	PK	AV
1301.76	64.86	-7.17	57.69	Vertical	80.80	60.80	-15.94	-3.11
1735.68	62.39	-7.17	55.22	Vertical	80.80	60.80	-18.41	-5.58
2169.60	59.57	-7.17	52.40	Vertical	80.80	60.80	-21.23	-8.40
2603.52	57.84	-7.17	50.67	Vertical	80.80	60.80	-22.96	-10.13
3037.44	51.63	-7.17	44.46	Vertical	80.80	60.80	-29.17	-16.34
3471.36	53.11	-7.17	45.94	Vertical	80.80	60.80	-27.69	-14.86

Frequency	Peak Level	el Duty cycle	Average	erage	Limit		Margin dB	
MHz	dBuV/m	factor	Level dBuV/m	Polarization	PK	AV	PK	AV
1301.76	64.77	-7.17	57.60	Horizontal	80.80	60.80	-16.03	-3.20
1735.68	62.55	-7.17	55.38	Horizontal	80.80	60.80	-18.25	-5.42
2169.60	59.68	-7.17	52.51	Horizontal	80.80	60.80	-21.12	-8.29
2603.52	55.91	-7.17	48.74	Horizontal	80.80	60.80	-24.89	-12.06
3037.44	52.95	-7.17	45.78	Horizontal	80.80	60.80	-27.85	-15.02
3471.36	51.89	-7.17	44.72	Horizontal	80.80	60.80	-28.91	-16.08

Notes: 1. Average emission Level = Peak Level + Duty cycle factor

- 2. Duty cycle level please see clause 5.
- 3. Pulse Desensitization Correction Factor

Pulse Width (PW) = 25ms

2/PW = 2/25ms = 0.008kHz

RBW (100 kHz) > 2/PW (0.008kHz)

Therefore PDCF is not needed



4. BANDWIDTH TEST

4.1 APPLIED PROCEDURES / LIMIT

According to FCC 15.231(c) requirement:

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating between 70 MHz to 900 MHz. Those devices operating above 900 MHz, the emission spurious shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

B.W (20dBc) Limit = 0.25% * f(MHz) = 0.25% * 433.92MHz = 1.0848MHz

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	100kHz
VB	≥RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW= 100kHz, VBW≥ RBW, Sweep time = Auto.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP



4.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



4.1.5 TEST RESULTS

EUT:	Remote Control	Model Name :	FFC100A
Temperature:	25 ℃	Relative Humidity:	60%
Pressure :	1012 hPa	Test Voltage :	By Battery
Test Mode :	TX Mode		

Frequency	20dB Bandwidth (kHz)	Result
433.92MHz	720	PASS

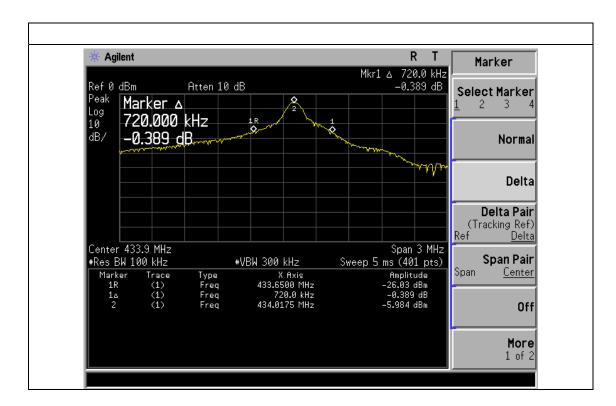



5. CALCULATION OF AVERAGE FACTOR

The output field strengths of specification in accordance with the FCC rules specify measurements with an average detector. During the test, a spectrum analyzer incorporating a peak detector was used. Therefore, a reduction factor can be applied to the resultant peak signal level and compared to the limit for measurement instrumentation incorporating an average detector.

The duty cycle is measured in 100 ms or the repetition cycle period, whichever is a shorter time frame. The duty cycle is measured by placing the spectrum analyzer to set zero span at 100kHz resolution bandwidth.

Averaging factor in dB =20log (duty cycle)

The duration of one cycle = 100.00ms

The duty cycle is simply the on-time divided the duration of one cycle


Duty Cycle = (0.725ms*43+0.275ms*46)/100=43.825ms / 100ms=0.438


Therefore, the averaging factor is found by 20log0.438=-7.17dB

Test plot as follows:


Note: During the 100ms, the amount of pulse and on-time of pulse are the same for every pulse train.




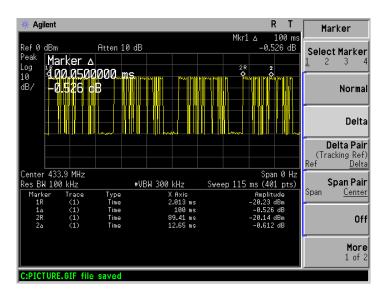


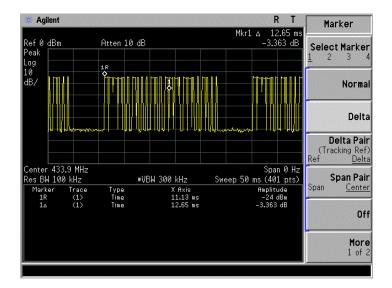



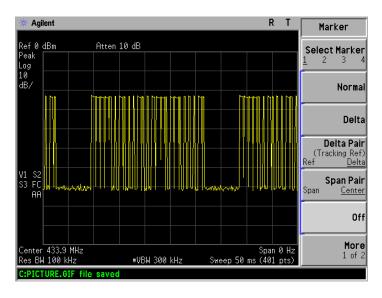

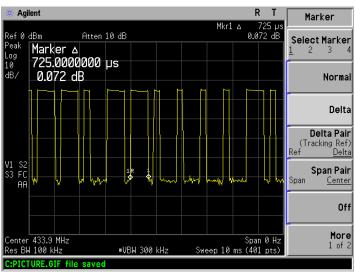

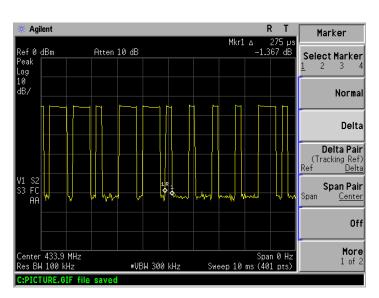



6. DWELL TIME APPLICABLE STANDARD

According to FCC 15.231(a) requirement:

A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

TEST PROCEDURE

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.

6.1 DEVIATION FROM STANDARD

No deviation.

6.2 TEST SETUP

EUT	SPECTRUM
	ANALYZER


6.3 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



6.4 TEST RESULTS

	Dwell time (second)	Limit (second)	Result
Full voltage(DC 12V)	4.075	<5s	Pass
Low voltage(DC 10.8V)	3.9	<5s	Pass

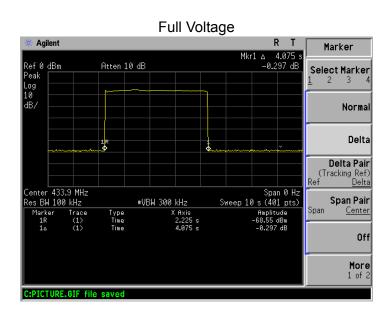

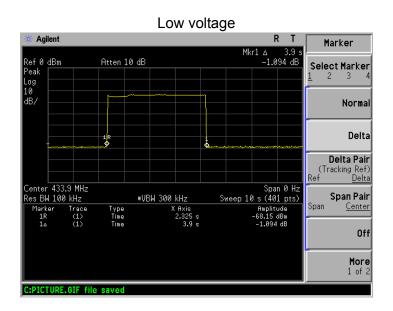



7. ANTENNA REQUIREMENT

7.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

7.2 EUT ANTENNA


The EUT antenna is the permanent attached antenna. It comply with the standard requirement.



8. EUT TEST PHOTO

Radiated Measurement Photos



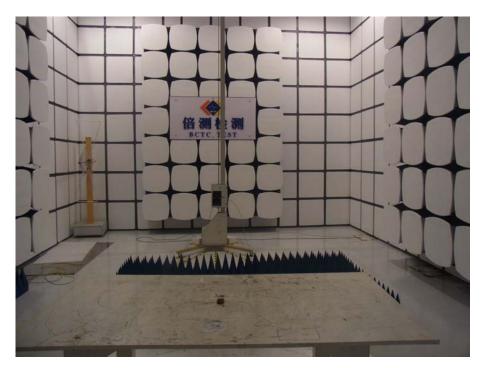



9. EUT TEST PHOTO



