

TEST REPORT

Report No.: BCTC2108391545-1E

Applicant: Mofi Network Inc

Product Name: MOFI5500-5GXeLTE

Model/Type
reference: MOFI5500-5GXeLTE

Tested Date: 2021-08-04 to 2021-10-25

Issued Date: 2021-10-26

Shenzhen BCTC Testing Co., Ltd.



FCC ID: 2AE6X-MOFI5500

Product Name: MOFI5500-5GXeLTE
Trademark: N/A
Model/Type reference: MOFI5500-5GXeLTE
Prepared For: Mofi Network Inc
Address: 15 SIMS CRES UNITS 4,5,6 RICHMOND HILL, ON, L4B 1C9
Manufacturer: Mofi Network Inc
Address: 15 SIMS CRES UNITS 4,5,6 RICHMOND HILL, ON, L4B 1C9
Prepared By: Shenzhen BCTC Testing Co., Ltd.
Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: 2021-08-04
Sample tested Date: 2021-08-04 to 2021-10-25
Issue Date: 2021-10-26
Report No.: BCTC2108391545-1E
Test Standards: FCC Part15.247
ANSI C63.10-2013
Test Results: PASS
Remark: This is WIFI-2.4GHz band radio test report.

Tested by:



Eric Yang/Project Handler

Approved by:



Zero Zhou/Reviewer


The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

Table Of Content

Test Report Declaration	Page
1. Version	5
2. Test Summary	6
3. Measurement Uncertainty	7
4. Product Information And Test Setup	8
4.1 Product Information	8
4.2 Test Setup Configuration	9
4.3 Support Equipment	9
4.4 Channel List	10
4.5 Test Mode	11
5. Test Facility And Test Instrument Used	12
5.1 Test Facility	12
5.2 Test Instrument Used	12
6. Conducted Emissions	14
6.1 Block Diagram Of Test Setup	14
6.2 Limit	14
6.3 Test procedure	14
6.4 EUT operating Conditions	14
6.5 Test Result	15
7. Radiated Emissions	17
7.1 Block Diagram Of Test Setup	17
7.2 Limit	18
7.3 Test procedure	19
7.4 EUT Operating Conditions	20
7.5 Test Result	21
8. Radiated Band Emission Measurement And Restricted Bands Of Operation	28
8.1 Block Diagram Of Test Setup	28
8.2 Limit	28
8.3 Test procedure	29
8.4 EUT Operating Conditions	29
8.5 Test Result	30
9. Power Spectral Density Test	32
9.1 Block Diagram Of Test Setup	32
9.2 Limit	32
9.3 Test procedure	32
9.4 EUT Operating Conditions	32
9.5 Test Result	33
10. Bandwidth Test	40
10.1 Block Diagram Of Test Setup	40
10.2 Limit	40
10.3 Test procedure	40
10.4 EUT Operating Conditions	40
10.5 Test Result	41
11. Peak Output Power Test	49
11.1 Block Diagram Of Test Setup	49

11.2	Limit	49
11.3	Test Procedure	49
11.4	EUT Operating Conditions	49
11.5	Test Result.....	50
12.	100 KHz Bandwidth Of Frequency Band Edge.....	51
12.1	Block Diagram Of Test Setup.....	51
12.2	Limit	51
12.3	Test Procedure	51
12.4	EUT Operating Conditions	51
12.5	Test Result.....	52
13.	Duty Cycle Of Test Signal	61
13.1	Standard Requirement	61
13.2	Formula.....	61
13.3	Test Procedure	61
13.4	Test Result.....	61
14.	Antenna Requirement	64
14.1	Limit	64
14.1	Test Result.....	64
15.	EUT Photographs.....	65
16.	EUT Test Setup Photographs.....	66

(Note: N/A Means Not Applicable)

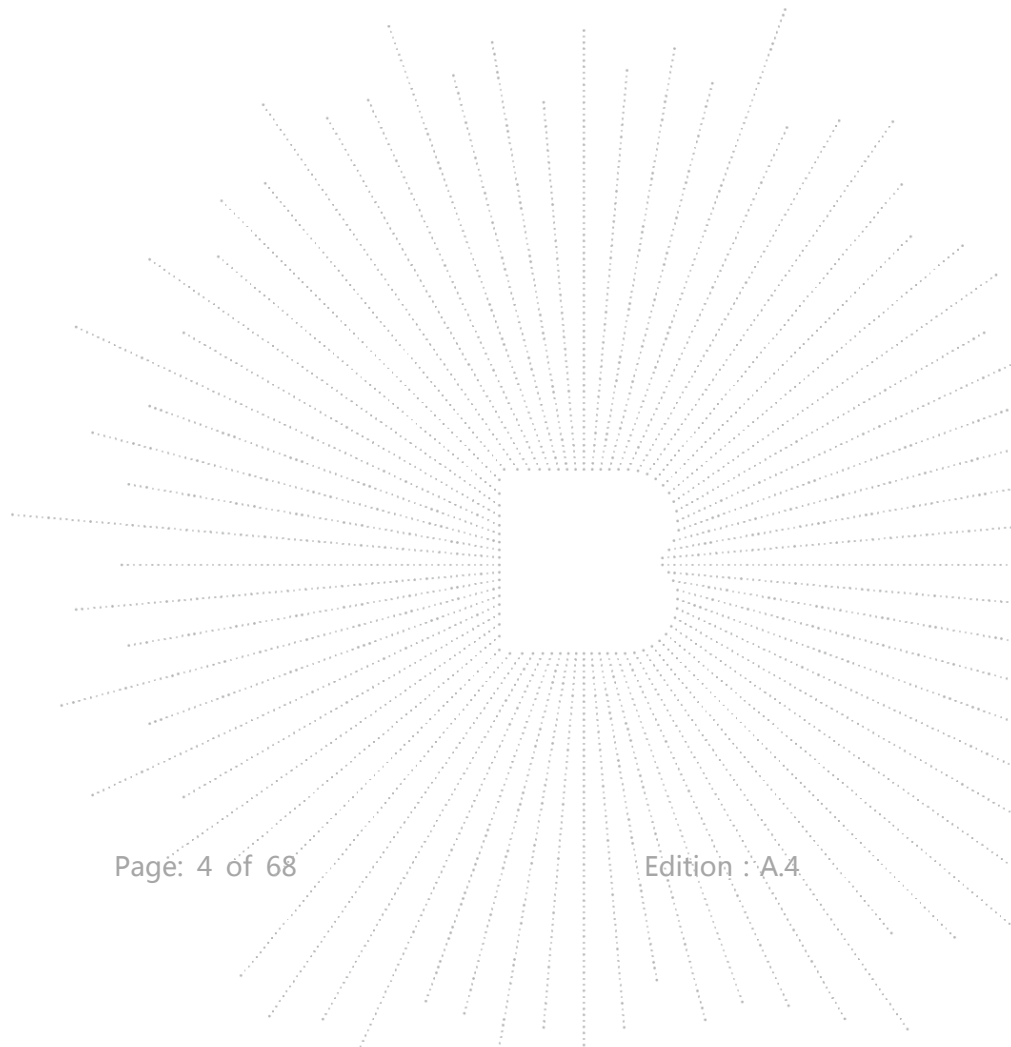

1. Version

Report No.	Issue Date	Description	Approved
BCTC2108391545-1E	2021-10-26	Original	Valid

2. Test Summary

The Product has been tested according to the following specifications:

No.	Test Parameter	Clause No	Results
1	Conducted Emission	15.207	PASS
2	6dB Bandwidth	15.247 (a)(2)	PASS
3	Peak Output Power	15.247 (b)	PASS
4	Radiated Spurious Emission	15.247 (d)	PASS
5	Power Spectral Density	15.247 (e)	PASS
6	Restricted Band of Operation	15.205	PASS
7	Band Edge (Out of Band Emissions)	15.247 (d)	PASS
8	Antenna Requirement	15.203	PASS

3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
2	3m chamber Radiated spurious emission(9KHz-30MHz)	U=3.7dB
3	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
4	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
5	Conducted Emission (150kHz-30MHz)	U=3.20dB
6	Conducted Adjacent channel power	U=1.38dB
7	Conducted output power uncertainty Above 1G	U=1.576dB
8	Conducted output power uncertainty below 1G	U=1.28dB
9	humidity uncertainty	U=5.3%
10	Temperature uncertainty	U=0.59°C

4. Product Information And Test Setup


4.1 Product Information

Model/Type reference:	MOFI5500-5GXeLTE
Model differences:	N/A
Operation Frequency:	802.11b/g/n20MHz:2412~2462 MHz 802.11n40MHz:2422~2452 MHz
Bit Rate of Transmitter:	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n Up to 75Mbps
Type of Modulation:	WIFI: OFDM/DSSS
Number Of Channel:	802.11b/g/n20MHz:11 CH 802.11n40MHz: 7 CH
Antenna installation:	External antenna*4
Antenna Gain:	Antenna A:2dBi Antenna B:2dBi Antenna C:2dBi Antenna D:2dBi
Ratings:	DC 12V 3A
Adapter:	MODEL: TAP45-120S350U1 INPUT: AC100-240V~50/60Hz OUTPUT: DC 12 V 3.5A


4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.

Conducted Emission:



Radiated Spurious Emission



4.3 Support Equipment

	Device Type	Brand	Model	Series No.	Note
E-2	Adapter	N/A	TAP45-120S350U1	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	1.2M	DC cable unshielded

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

Channel List for 802.11b/g/n(20)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	02	2417	03	2422
04	2427	05	2432	06	2437
07	2442	08	2447	09	2452
10	2457	11	2462		

Channel List for 802.11n(40)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
03	2422	04	2427	05	2432
06	2437	07	2442	08	2447
09	2452				

Table for PCB antenna

Ant.	Brand	Model Name	Antenna Type	Gain (dBi)	NOTE
A	N/A	N/A	External antenna	2	N/A
B	N/A	N/A	External antenna	2	N/A
C	N/A	N/A	External antenna	2	N/A
D	N/A	N/A	External antenna	2	N/A


EUT has four External antennas with Max gain 2dBi on every antenna, CDD device with two spatial streams, also can operate with one spatial streams according to KDB662911 D01 v02r01, Directional gain= GANT + Array Gain, where Array Gain is as follows.

1) For power spectral density (PSD) measurements,
 $\text{Array Gain} = 10 \log(\text{NANT}/\text{NSS}) \text{ dB} = 10 \log(4/1) = 6.02 \text{ dB}$,

So the directional gain for PSD is 8.02dBi

2) For power measurements,
The Array gain = 0 dB for $\text{NANT} \leq 4$,

So the directional gain for Power measurements is 2dBi

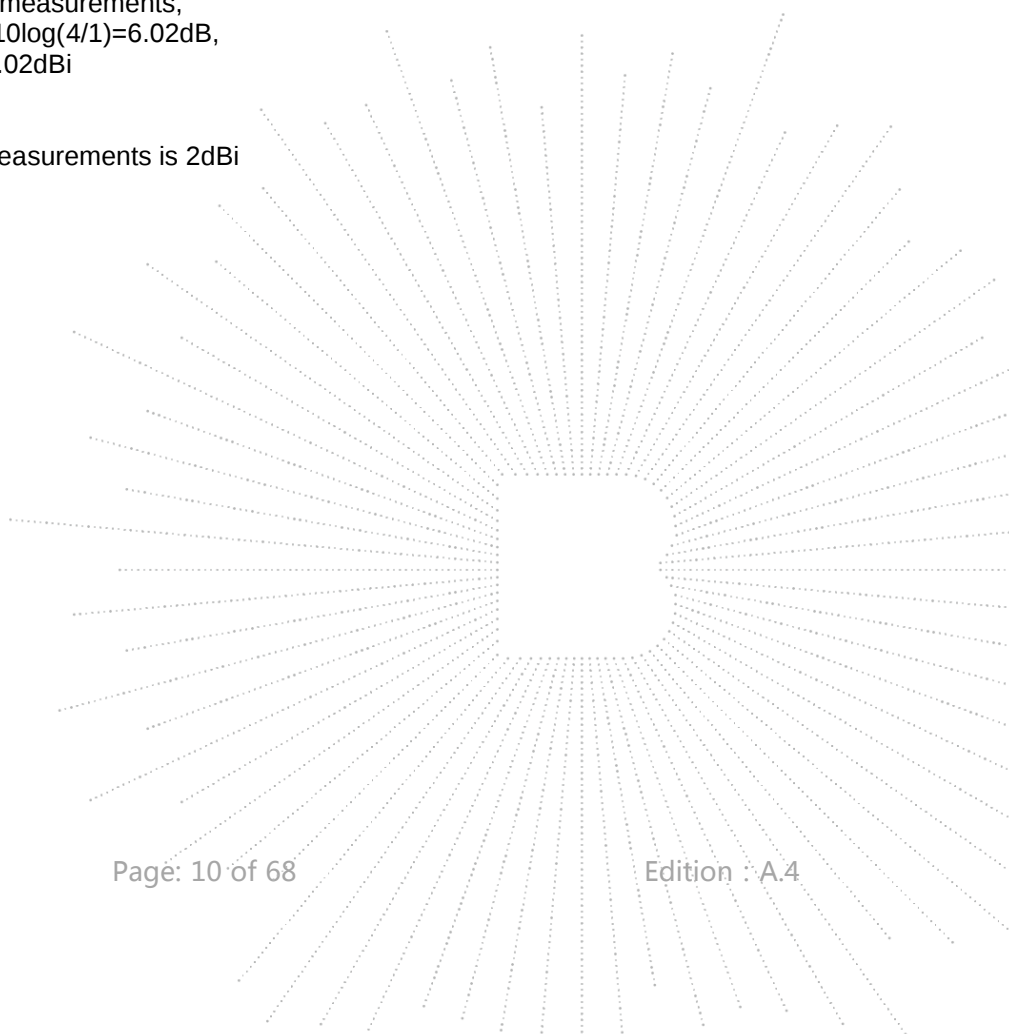

4.5 Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n20 CH1/ CH6/ CH11
Mode 4	802.11n40 CH3/ CH6/ CH9
Mode 5	Link Mode

Note:

(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.

5. Test Facility And Test Instrument Used

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

IC Registered No.: 23583

5.2 Test Instrument Used

Conducted emissions Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Receiver	R&S	ESR3	102075	May 28, 2021	May 27, 2022
LISN	R&S	ENV216	101375	May 28, 2021	May 27, 2022
ISN	HPX	ISN T800	S1509001	May 28, 2021	May 27, 2022
Software	Frad	EZ-EMC	EMC-CON 3A1	\	\


Radiated emissions Test (966 chamber)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	ChengYu	966 Room	966	Jun. 06. 2020	Jun. 05, 2023
Receiver	R&S	ESR3	102075	May 28, 2021	May 27, 2022
Receiver	R&S	ESRP	101154	May 28, 2021	May 27, 2022
Amplifier	SKET	LAPA_01G18 G-45dB	\	May 28, 2021	May 27, 2022
Amplifier	Schwarzbeck	BBV9744	9744-0037	May 28, 2021	May 27, 2022
TRILOG Broadband Antenna	schwarzbeck	VULB 9163	VULB9163-9 42	Jun. 01, 2021	May 31, 2022
Horn Antenna	SCHWARZBECK	BBHA9120D	1541	Jun. 02, 2021	Jun. 01, 2022
Horn Antenna (18GHz-40GH z)	SCHWARZBECK	BBHA9170	822	Jun. 15, 2021	Jun. 14, 2022
Amplifier (18GHz-40GH z)	MITEQ	TTA1840-35- HG	2034381	May 28, 2021	May 27, 2022
Loop Antenna (9kHz-30MHz)	SCHWARZBECK	FMZB1519B	014	Jun. 02, 2021	Jun. 01, 2022
RF cables1 (9kHz-30MHz)	Huber+Suhnar	9kHz-30MHz	B1702988-00 08	May 28, 2021	May 27, 2022
RF cables2 (30MHz-1GHz)	Huber+Suhnar	30MHz-1GH z	1486150	May 28, 2021	May 27, 2022
RF cables3 (1GHz-40GHz)	Huber+Suhnar	1GHz-40GHz	1607106	May 28, 2021	May 27, 2022
Power Metter	Keysight	E4419B	\	May 28, 2021	May 27, 2022
Power Sensor (AV)	Keysight	E9 300A	\	May 28, 2021	May 27, 2022
Signal Analyzer 20kHz-26.5GH z	KEYSIGHT	N9020A	MY49100060	May 28, 2021	May 27, 2022
Spectrum Analyzer 9kHz-40GHz	R&S	FSP40	100363	May 28, 2021	May 27, 2022
Software	Frad	EZ-EMC	FA-03A2 RE	\	\

RF conducted test

Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Signal Analyzer 20kHz-26.5GHz	KEYSIGHT	N9020A	MY49100060	May 28, 2021	May 27, 2022
Spectrum Analyzer 9kHz-40GHz	Agilent	FSP40	100363	May 28, 2021	May 27, 2022

6. Conducted Emissions

6.1 Block Diagram Of Test Setup

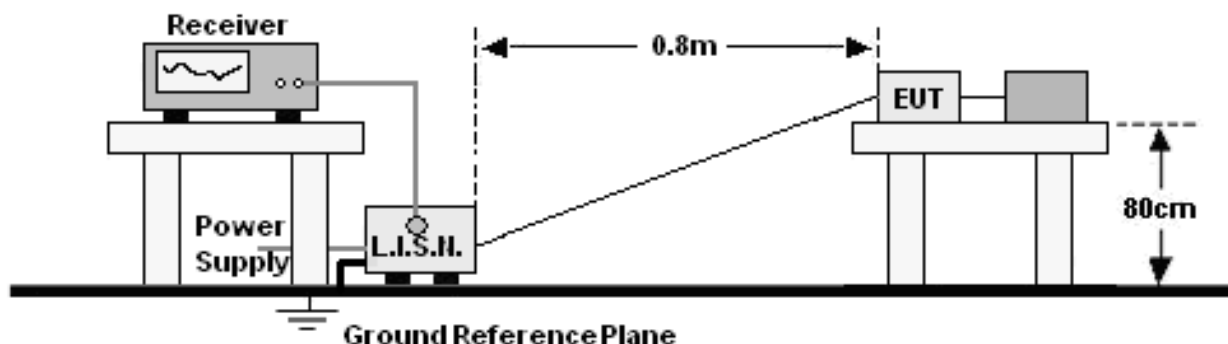

6.2 Limit

FREQUENCY (MHz)	Limit (dBuV)	
	Quas-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Notes:

- *Decreasing linearly with logarithm of frequency.
- The lower limit shall apply at the transition frequencies.

6.3 Test procedure

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

a. The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N.).

b. The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.


c. For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

6.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

6.5 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage :	AC120V/60Hz
Test Mode:	Mode 5	Polarization :	L

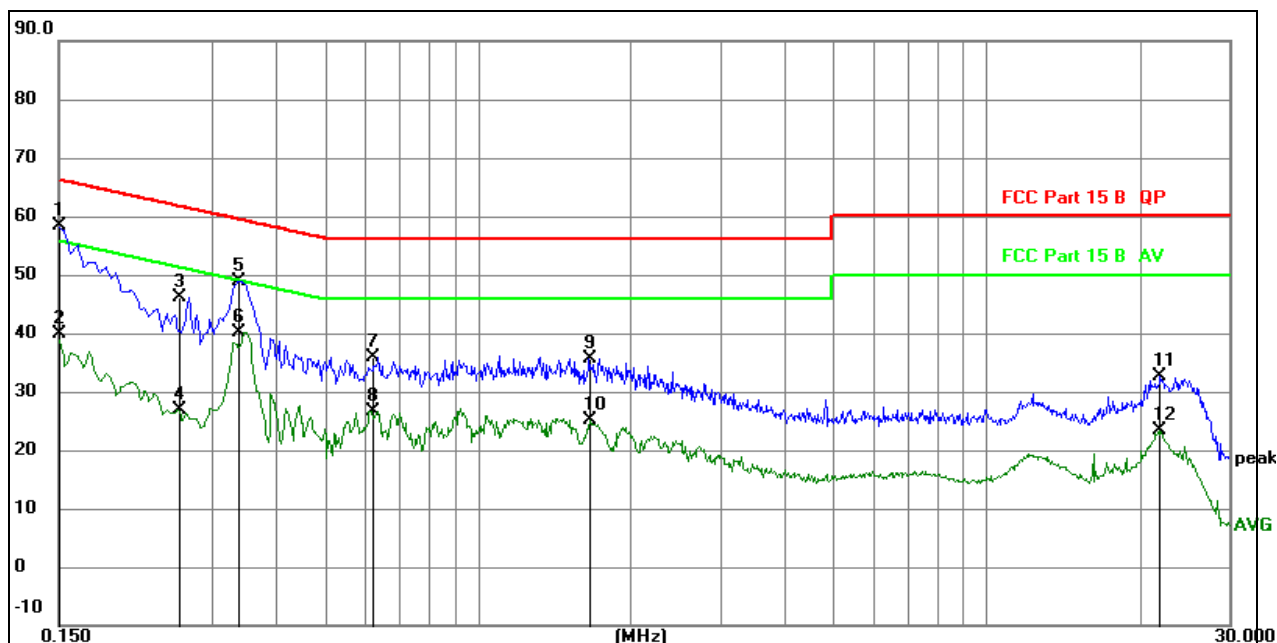


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dB	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1500	48.72	9.61	58.33	66.00	-7.67	QP
2		0.1500	30.34	9.61	39.95	56.00	-16.05	AVG
3		0.2580	36.45	9.61	46.06	61.50	-15.44	QP
4		0.2580	17.37	9.61	26.98	51.50	-24.52	AVG
5		0.3390	39.39	9.61	49.00	59.23	-10.23	QP
6		0.3390	30.53	9.61	40.14	49.23	-9.09	AVG
7		0.6180	26.35	9.62	35.97	56.00	-20.03	QP
8		0.6180	17.13	9.62	26.75	46.00	-19.25	AVG
9		1.6620	26.07	9.63	35.70	56.00	-20.30	QP
10		1.6620	15.52	9.63	25.15	46.00	-20.85	AVG
11		21.8625	22.83	9.75	32.58	60.00	-27.42	QP
12		21.8625	13.51	9.75	23.26	50.00	-26.74	AVG

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage :	AC120V/60Hz
Test Mode:	Mode 5	Polarization :	N

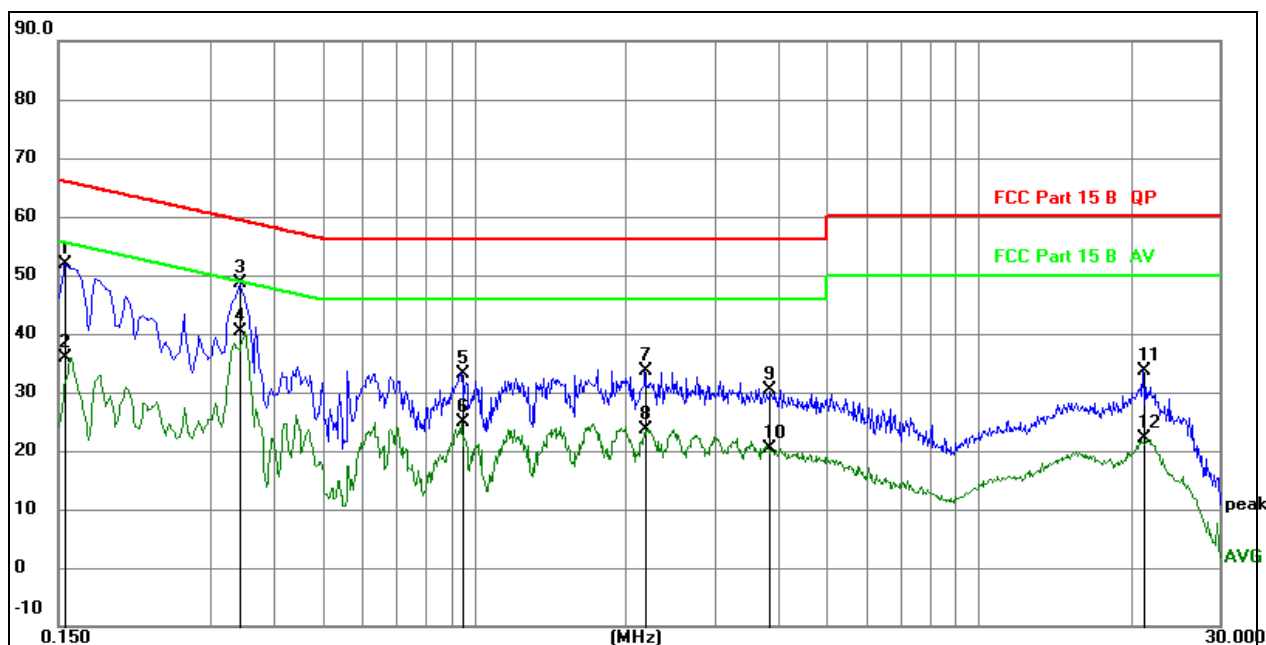

Remark:


1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No. Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	0.1545	42.38	9.61	51.99	65.75	-13.76	QP
2	0.1545	26.19	9.61	35.80	55.75	-19.95	AVG
3	0.3435	39.12	9.61	48.73	59.12	-10.39	QP
4 *	0.3435	30.77	9.61	40.38	49.12	-8.74	AVG
5	0.9465	23.55	9.62	33.17	56.00	-22.83	QP
6	0.9465	15.20	9.62	24.82	46.00	-21.18	AVG
7	2.1885	24.07	9.64	33.71	56.00	-22.29	QP
8	2.1885	14.02	9.64	23.66	46.00	-22.34	AVG
9	3.8265	20.59	9.68	30.27	56.00	-25.73	QP
10	3.8265	10.81	9.68	20.49	46.00	-25.51	AVG
11	21.2505	23.86	9.75	33.61	60.00	-26.39	QP
12	21.2505	12.37	9.75	22.12	50.00	-27.88	AVG


7. Radiated Emissions

7.1 Block Diagram Of Test Setup


(A) Radiated Emission Test-Up Frequency Below 30MHz

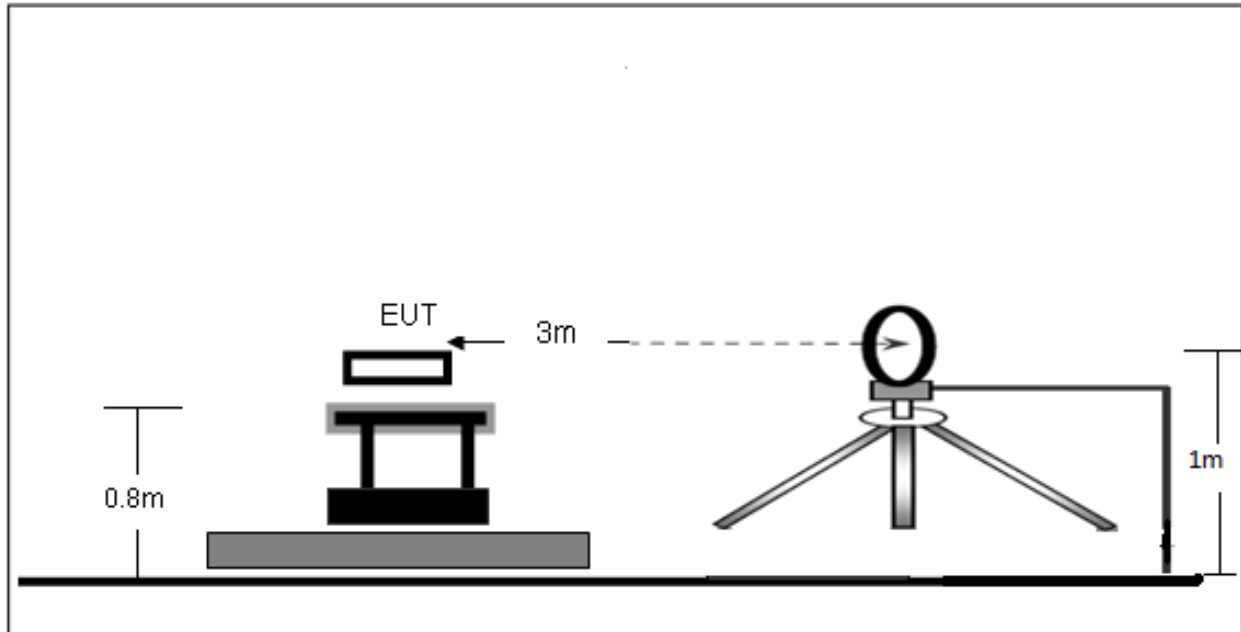

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

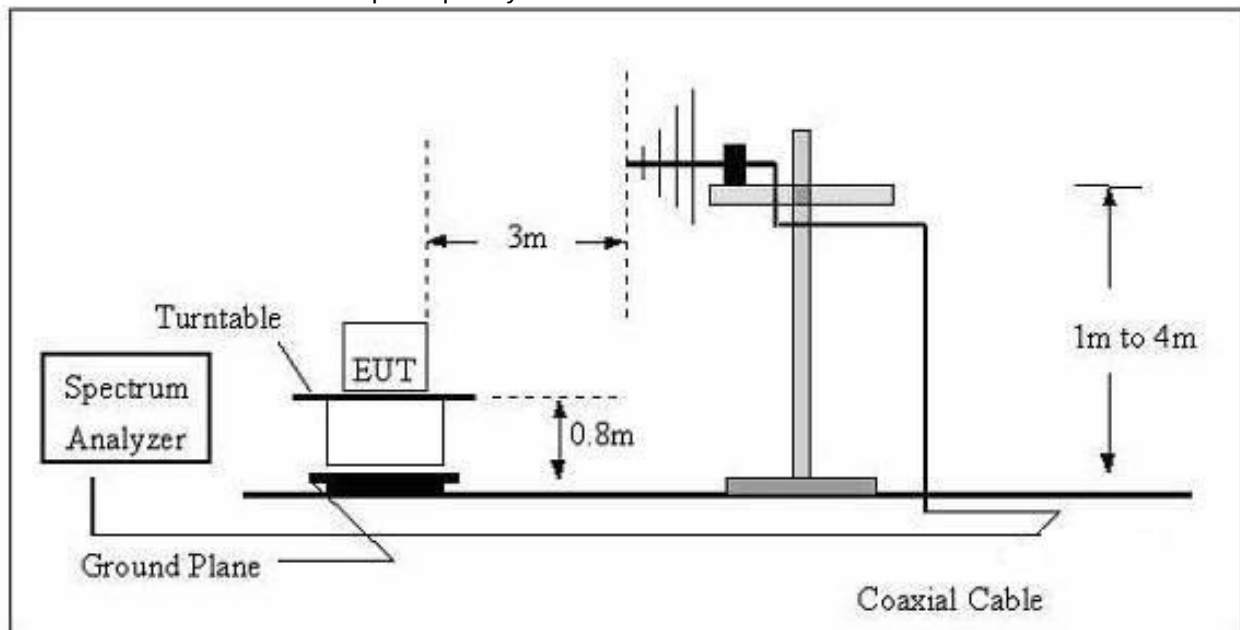

(C) Radiated Emission Test-Up Frequency Above 1GHz

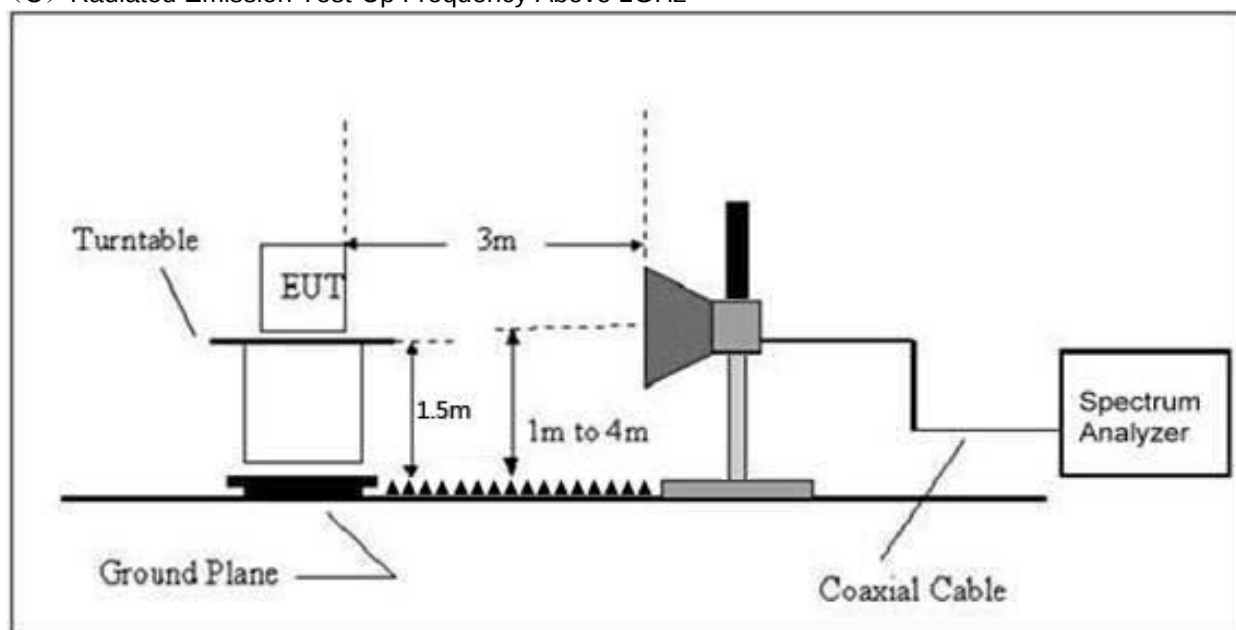

7.2 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Field Strength uV/m	Distance (m)	Field Strength Limit at 3m Distance	
			uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1)The limit for radiated test was performed according to FCC PART 15C.
- (2)The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

7.3 Test procedure

Receiver Parameter	Setting
Attenuation	Auto
9kHz~150kHz	RBW 200Hz for QP
150kHz~30MHz	RBW 9kHz for QP
30MHz~1000MHz	RBW 120kHz for QP

Spectrum Parameter	Setting
1-25GHz	RBW 1 MHz /VBW 1 MHz for Peak, RBW 1 MHz / VBW 10Hz for Average

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).

h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

Above 1GHz test procedure as below:

a. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.

b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.

e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

g. Test the EUT in the lowest channel, the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

7.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

7.5 Test Result

Below 30MHz

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage :	AC120V/60Hz
Test Mode:	Mode 5	Polarization :	---

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuV) + distance extrapolation factor.

Between 30MHz – 1GHz

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage :	AC120V/60Hz
Test Mode:	Mode 5	Polarization :	Horizontal

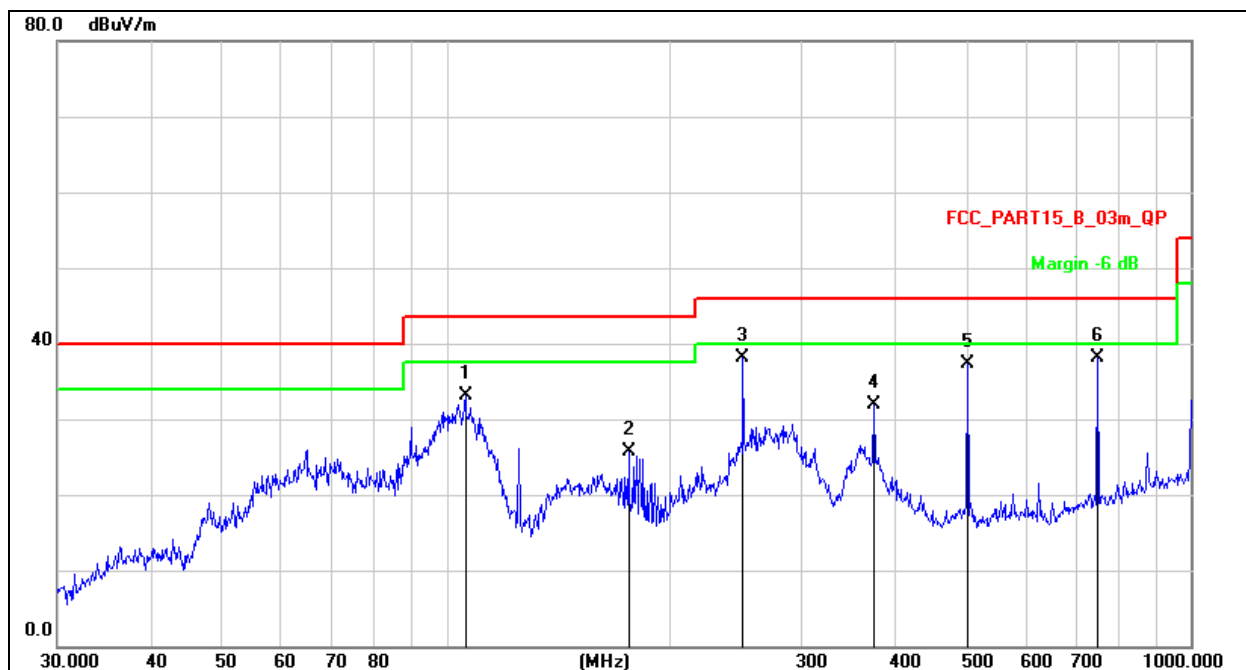


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		106.0126	49.75	-16.67	33.08	43.50	-10.42	QP
2		175.6516	43.56	-17.86	25.70	43.50	-17.80	QP
3		250.3012	53.25	-15.14	38.11	46.00	-7.89	QP
4		375.9385	43.61	-11.64	31.97	46.00	-14.03	QP
5		501.1790	46.31	-8.91	37.40	46.00	-8.60	QP
6	*	750.1083	42.53	-4.34	38.19	46.00	-7.81	QP

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage :	AC120V/60Hz
Test Mode:	Mode 5	Polarization :	Vertical

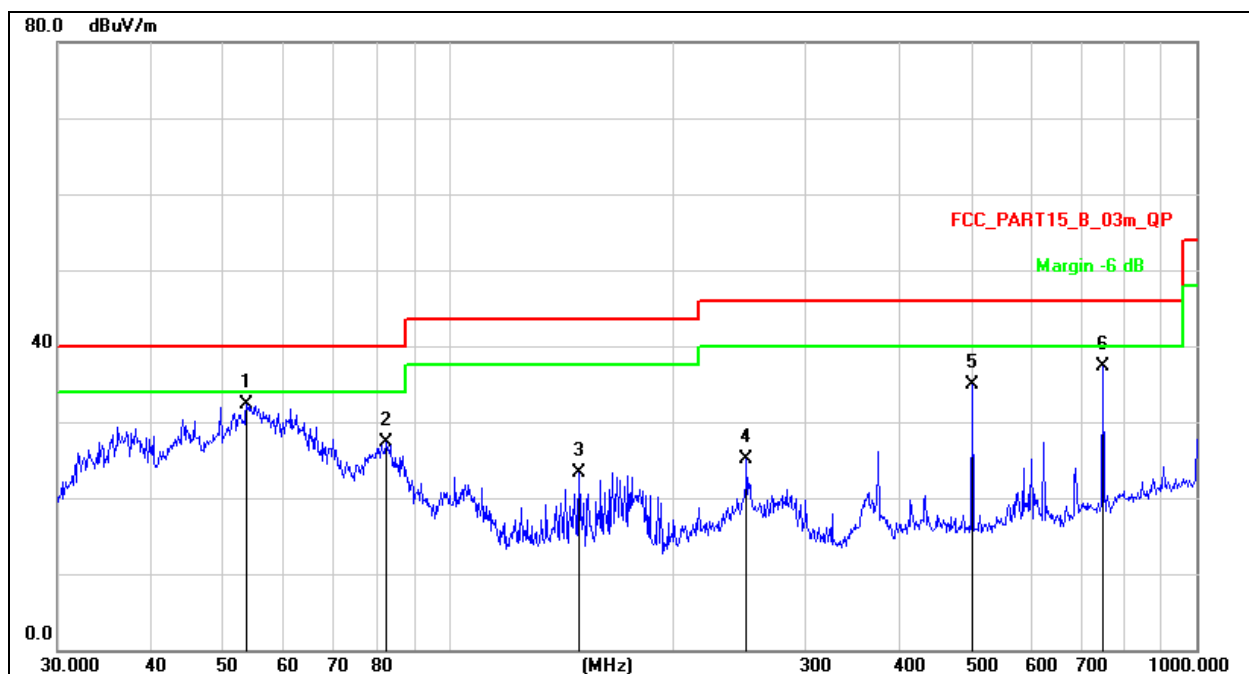

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	*	53.6932	47.52	-15.24	32.28	40.00	-7.72	QP
2		82.3588	47.19	-19.87	27.32	40.00	-12.68	QP
3		149.4857	42.81	-19.47	23.34	43.50	-20.16	QP
4		250.3012	40.23	-15.14	25.09	46.00	-20.91	QP
5		501.1790	43.90	-8.91	34.99	46.00	-11.01	QP
6		750.1083	41.61	-4.34	37.27	46.00	-8.73	QP

Between 1GHz – 25GHz
802.11b

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure-m ent	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel:2412MHz							
V	4824.00	53.91	-0.43	53.48	74.00	-20.52	PK
V	4824.00	43.32	-0.43	42.89	54.00	-11.11	AV
V	7236.00	45.19	8.31	53.50	74.00	-20.50	PK
V	7236.00	35.85	8.31	44.16	54.00	-9.84	AV
H	4804.00	51.63	-0.43	51.20	74.00	-22.80	PK
H	4804.00	41.95	-0.43	41.52	54.00	-12.48	AV
H	7236.00	43.37	8.31	51.68	74.00	-22.32	PK
H	7236.00	36.17	8.31	44.48	54.00	-9.52	AV
Middle channel:2437MHz							
V	4874.00	50.50	-0.38	50.12	74.00	-23.88	PK
V	4874.00	44.08	-0.38	43.70	54.00	-10.30	AV
V	7311.00	43.30	8.83	52.13	74.00	-21.87	PK
V	7311.00	33.39	8.83	42.22	54.00	-11.78	AV
H	4874.00	48.49	-0.38	48.11	74.00	-25.89	PK
H	4874.00	39.23	-0.38	38.85	54.00	-15.15	AV
H	7311.00	41.05	8.83	49.88	74.00	-24.12	PK
H	7311.00	32.87	8.83	41.70	54.00	-12.30	AV
High channel:2462MHz							
V	4924.00	53.11	-0.32	52.79	74.00	-21.21	PK
V	4924.00	42.53	-0.32	42.21	54.00	-11.79	AV
V	7386.00	44.73	9.35	54.08	74.00	-19.92	PK
V	7386.00	34.63	9.35	43.98	54.00	-10.02	AV
H	4924.00	51.31	-0.32	50.99	74.00	-23.01	PK
H	4924.00	40.60	-0.32	40.28	54.00	-13.72	AV
H	7386.00	43.33	9.35	52.68	74.00	-21.32	PK
H	7386.00	36.10	9.35	45.45	54.00	-8.55	AV

Remark:

- 1.Emission Level = Meter Reading + Factor,
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Over= Emission Level - Limit
- 2.If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
5. All the Modulation are test, the worst mode is 802.11b MIMO Mode, the data recording in the report.

802.11g

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure-m ent	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel:2412MHz							
V	4824.00	54.89	-0.43	54.46	74.00	-19.54	PK
V	4824.00	45.51	-0.43	45.08	54.00	-8.92	AV
V	7236.00	47.43	8.31	55.74	74.00	-18.26	PK
V	7236.00	37.04	8.31	45.35	54.00	-8.65	AV
H	4804.00	53.03	-0.43	52.60	74.00	-21.40	PK
H	4804.00	42.27	-0.43	41.84	54.00	-12.16	AV
H	7236.00	45.46	8.31	53.77	74.00	-20.23	PK
H	7236.00	37.56	8.31	45.87	54.00	-8.13	AV
Middle channel:2437MHz							
V	4874.00	50.91	-0.38	50.53	74.00	-23.47	PK
V	4874.00	44.24	-0.38	43.86	54.00	-10.14	AV
V	7311.00	40.22	8.83	49.05	74.00	-24.95	PK
V	7311.00	31.66	8.83	40.49	54.00	-13.51	AV
H	4874.00	46.33	-0.38	45.95	74.00	-28.05	PK
H	4874.00	36.59	-0.38	36.21	54.00	-17.79	AV
H	7311.00	38.36	8.83	47.19	74.00	-26.81	PK
H	7311.00	29.61	8.83	38.44	54.00	-15.56	AV
High channel:2462MHz							
V	4924.00	52.49	-0.32	52.17	74.00	-21.83	PK
V	4924.00	44.36	-0.32	44.04	54.00	-9.96	AV
V	7386.00	45.15	9.35	54.50	74.00	-19.50	PK
V	7386.00	34.34	9.35	43.69	54.00	-10.31	AV
H	4924.00	50.14	-0.32	49.82	74.00	-24.18	PK
H	4924.00	40.43	-0.32	40.11	54.00	-13.89	AV
H	7386.00	42.18	9.35	51.53	74.00	-22.47	PK
H	7386.00	33.58	9.35	42.93	54.00	-11.07	AV

Remark:

- 1.Emission Level = Meter Reading + Factor,
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Over= Emission Level - Limit
- 2.If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
5. All the Modulation are test, the worst mode is 802.11g MIMO Mode, the data recording in the report.

802.11n20

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure-m ent	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel:2412MHz							
V	4824.00	52.92	-0.43	52.49	74.00	-21.51	PK
V	4824.00	42.17	-0.43	41.74	54.00	-12.26	AV
V	7236.00	45.41	8.31	53.72	74.00	-20.28	PK
V	7236.00	35.07	8.31	43.38	54.00	-10.62	AV
H	4804.00	50.46	-0.43	50.03	74.00	-23.97	PK
H	4804.00	41.43	-0.43	41.00	54.00	-13.00	AV
H	7236.00	43.84	8.31	52.15	74.00	-21.85	PK
H	7236.00	35.35	8.31	43.66	54.00	-10.34	AV
Middle channel:2437MHz							
V	4874.00	49.35	-0.38	48.97	74.00	-25.03	PK
V	4874.00	41.98	-0.38	41.60	54.00	-12.40	AV
V	7311.00	39.83	8.83	48.66	74.00	-25.34	PK
V	7311.00	29.86	8.83	38.69	54.00	-15.31	AV
H	4874.00	48.13	-0.38	47.75	74.00	-26.25	PK
H	4874.00	38.06	-0.38	37.68	54.00	-16.32	AV
H	7311.00	37.11	8.83	45.94	74.00	-28.06	PK
H	7311.00	29.15	8.83	37.98	54.00	-16.02	AV
High channel:2462MHz							
V	4924.00	51.96	-0.32	51.64	74.00	-22.36	PK
V	4924.00	43.52	-0.32	43.20	54.00	-10.80	AV
V	7386.00	43.22	9.35	52.57	74.00	-21.43	PK
V	7386.00	33.84	9.35	43.19	54.00	-10.81	AV
H	4924.00	49.25	-0.32	48.93	74.00	-25.07	PK
H	4924.00	38.56	-0.32	38.24	54.00	-15.76	AV
H	7386.00	40.94	9.35	50.29	74.00	-23.71	PK
H	7386.00	32.04	9.35	41.39	54.00	-12.61	AV

Remark:

1.Emission Level = Meter Reading + Factor,

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Over= Emission Level - Limit

2.If peak below the average limit, the average emission was no test.

3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB

4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

5. All the Modulation are test, the worst mode is 802.11n20 MIMO Mode, the data recording in the report.

802.11n40

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure-m ent	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel:2422MHz							
V	4844.00	53.76	-0.43	53.33	74.00	-20.67	PK
V	4844.00	45.56	-0.43	45.13	54.00	-8.87	AV
V	7266.00	44.82	8.31	53.13	74.00	-20.87	PK
V	7266.00	34.88	8.31	43.19	54.00	-10.81	AV
H	4844.00	52.25	-0.43	51.82	74.00	-22.18	PK
H	4844.00	43.21	-0.43	42.78	54.00	-11.22	AV
H	7266.00	41.90	8.31	50.21	74.00	-23.79	PK
H	7266.00	33.14	8.31	41.45	54.00	-12.55	AV
Middle channel:2437MHz							
V	4874.00	51.80	-0.38	51.42	74.00	-22.58	PK
V	4874.00	44.86	-0.38	44.48	54.00	-9.52	AV
V	7311.00	44.26	8.83	53.09	74.00	-20.91	PK
V	7311.00	36.00	8.83	44.83	54.00	-9.17	AV
H	4874.00	48.51	-0.38	48.13	74.00	-25.87	PK
H	4874.00	37.81	-0.38	37.43	54.00	-16.57	AV
H	7311.00	42.34	8.83	51.17	74.00	-22.83	PK
H	7311.00	33.98	8.83	42.81	54.00	-11.19	AV
High channel:2452MHz							
V	4904.00	52.85	-0.32	52.53	74.00	-21.47	PK
V	4904.00	44.69	-0.32	44.37	54.00	-9.63	AV
V	7356.00	44.78	9.35	54.13	74.00	-19.87	PK
V	7356.00	33.87	9.35	43.22	54.00	-10.78	AV
H	4904.00	50.24	-0.32	49.92	74.00	-24.08	PK
H	4904.00	40.22	-0.32	39.90	54.00	-14.10	AV
H	7356.00	43.46	9.35	52.81	74.00	-21.19	PK
H	7356.00	35.47	9.35	44.82	54.00	-9.18	AV


Remark:

- 1.Emission Level = Meter Reading + Factor,
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Over= Emission Level - Limit
- 2.If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
- 5.All the Modulation are test, the worst mode is 802.11n40 MIMO Mode, the data recording in the report.

8. Radiated Band Emission Measurement And Restricted Bands Of Operation

8.1 Block Diagram Of Test Setup

Radiated Emission Test-Up Frequency Above 1GHz

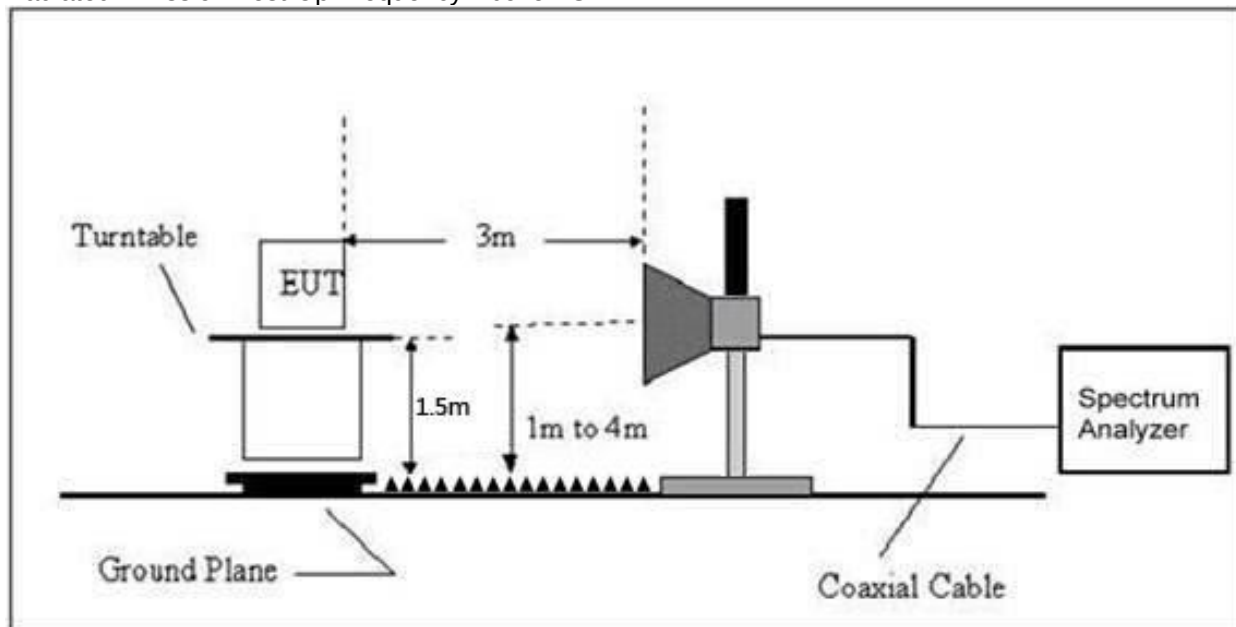

8.2 Limit

FCC Part15 C Section 15.209 and 15.205

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1)The limit for radiated test was performed according to FCC PART 15C.
- (2)The tighter limit applies at the band edges.
- (3)Emission level (dBuV/m)=20log Emission level (uV/m).

8.3 Test procedure

Receiver Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Above 1GHz test procedure as below:

a.The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.

b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.

e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

g.Test the EUT in the lowest channel,the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

8.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

8.5 Test Result

Test Mode	Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure-ment (dBuV/m)	Limits (dBuV/m)		Result
					PK	PK	AV	
802.11b	Low Channel 2412MHz							
	H	2390.00	57.63	-6.70	50.93	74.00	54.00	PASS
	H	2400.00	49.39	-6.71	42.68	74.00	54.00	PASS
	V	2390.00	57.44	-6.70	50.74	74.00	54.00	PASS
	V	2400.00	49.05	-6.71	42.34	74.00	54.00	PASS
	High Channel 2462MHz							
	H	2483.50	57.16	-6.79	50.37	74.00	54.00	PASS
	H	2485.00	49.26	-6.81	42.45	74.00	54.00	PASS
	V	2483.50	56.62	-6.79	49.83	74.00	54.00	PASS
	V	2485.00	48.13	-6.81	41.32	74.00	54.00	PASS
802.11g	Low Channel 2412MHz							
	H	2390.00	57.03	-6.70	50.33	74.00	54.00	PASS
	H	2400.00	48.49	-6.71	41.78	74.00	54.00	PASS
	V	2390.00	56.63	-6.70	49.93	74.00	54.00	PASS
	V	2400.00	48.18	-6.71	41.47	74.00	54.00	PASS
	High Channel 2462MHz							
	H	2483.50	56.73	-6.79	49.94	74.00	54.00	PASS
	H	2485.00	48.60	-6.81	41.79	74.00	54.00	PASS
	V	2483.50	55.54	-6.79	48.75	74.00	54.00	PASS
	V	2485.00	47.71	-6.81	40.90	74.00	54.00	PASS

Remark:

1. Emission Level = Meter Reading + Factor,
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Over= Emission Level - Limit
2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.
- 3 In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
5. All the Modulation are test, the worst mode is MIMO Mode, the data recording in the report.

Test Mode	Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure-ment (dBuV/m)	Limits (dBuV/m)		Result
					PK	PK	AV	
802.11n20	Low Channel 2412MHz							
	H	2390.00	56.45	-6.70	49.75	74.00	54.00	PASS
	H	2400.00	49.03	-6.71	42.32	74.00	54.00	PASS
	V	2390.00	56.14	-6.70	49.44	74.00	54.00	PASS
	V	2400.00	49.10	-6.71	42.39	74.00	54.00	PASS
	High Channel 2462MHz							
	H	2483.50	55.51	-6.79	48.72	74.00	54.00	PASS
	H	2500.00	49.41	-6.81	42.60	74.00	54.00	PASS
	V	2483.50	56.34	-6.79	49.55	74.00	54.00	PASS
	V	2500.00	48.43	-6.81	41.62	74.00	54.00	PASS
802.11n40	Low Channel 2422MHz							
	H	2390.00	56.64	-6.70	49.94	74.00	54.00	PASS
	H	2400.00	48.57	-6.71	41.86	74.00	54.00	PASS
	V	2390.00	57.51	-6.70	50.81	74.00	54.00	PASS
	V	2400.00	48.89	-6.71	42.18	74.00	54.00	PASS
	High Channel 2452MHz							
	H	2483.50	56.70	-6.79	49.91	74.00	54.00	PASS
	H	2500.00	49.61	-6.81	42.80	74.00	54.00	PASS
	V	2483.50	56.94	-6.79	50.15	74.00	54.00	PASS
	V	2500.00	49.52	-6.81	42.71	74.00	54.00	PASS
Remark:								
1. Emission Level = Meter Reading + Factor, Factor = Antenna Factor + Cable Loss – Pre-amplifier. Over= Emission Level - Limit								
2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.								
3 In restricted bands of operation, The spurious emissions below the permissible value more than 20dB								
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.								
5. All the Modulation are test, the worst mode is MIMO Mode, the data recording in the report.								

9. Power Spectral Density Test

9.1 Block Diagram Of Test Setup



9.2 Limit

FCC Part15 (15.247), Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

9.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: 3 kHz
4. Set the VBW $\geq 3 \times$ RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

9.4 EUT Operating Conditions

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Note: Power Spectral Density(dBm)=Reading+Cable Loss

9.5 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage :	AC120V/60Hz


Test Mode	Frequency	Power Spectral Density (dBm/3kHz) ANTA	Power Spectral Density (dBm/3kHz) ANTB	Power Spectral Density (dBm/3kHz) ANTC	Power Spectral Density (dBm/3kHz) ANT D	Total power density (dBm/3KHz)	Limit (dBm/3kHz)	Result
TX b Mode	2412 MHz	-8.19	-8.94	-8.98	-8.60	-2.65	5.98	PASS
	2437 MHz	-10.26	-9.60	-7.65	-8.00	-2.72	5.98	PASS
	2462 MHz	-8.61	-8.67	-7.67	-8.00	-2.20	5.98	PASS
TX g Mode	2412 MHz	-15.51	-14.79	-14.19	-13.80	-8.50	5.98	PASS
	2437 MHz	-16.11	-15.21	-15.35	-13.47	-8.90	5.98	PASS
	2462 MHz	-15.14	-16.13	-14.96	-14.59	-9.15	5.98	PASS
TX n Mode (20M)	2412 MHz	-17.85	-16.75	-16.16	-16.15	-10.65	5.98	PASS
	2437 MHz	-18.10	-17.60	-16.88	-15.85	-11.00	5.98	PASS
	2462 MHz	-16.71	-17.08	-16.07	-16.67	-10.60	5.98	PASS
TX n Mode (40M)	2422 MHz	-18.90	-17.66	-21.86	-20.51	-13.43	5.98	PASS
	2437 MHz	-18.82	-19.23	-21.14	-19.75	-13.63	5.98	PASS
	2452 MHz	-20.61	-17.73	-20.16	-18.82	-13.16	5.98	PASS

For MIMO mode:


Directional gain= $G_{ANT}+10 \log(N_{ANT}/N_{SS})$ dBi=8.02dBi

8.02dbi>6.0 dbi so power limit= $8-(8.02-6.0)=5.98$


Note: A(B/C/D) Represent the value of antenna A, B, C, D, The worst data is Antenna C, only shown Antenna C Plot.

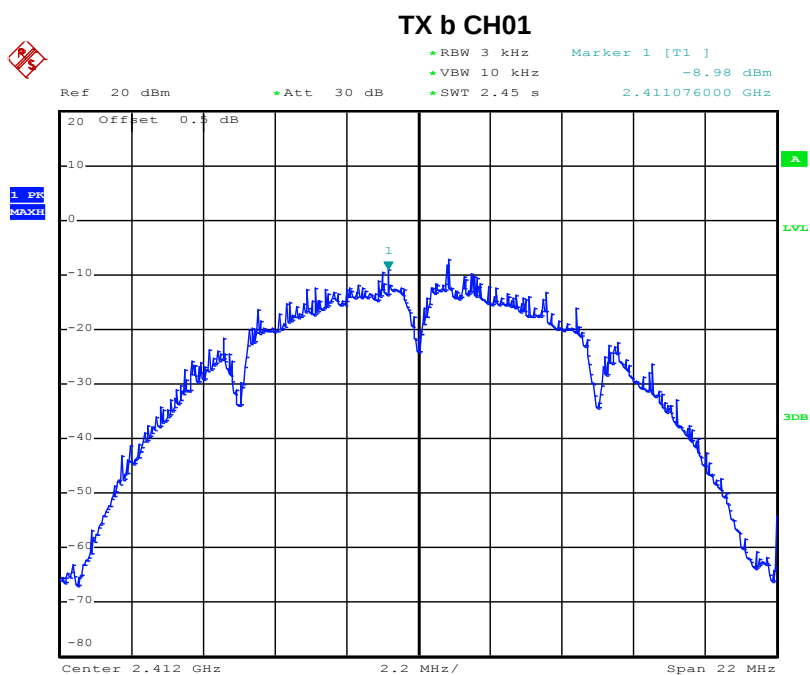


Date: 19.OCT.2021 15:29:37

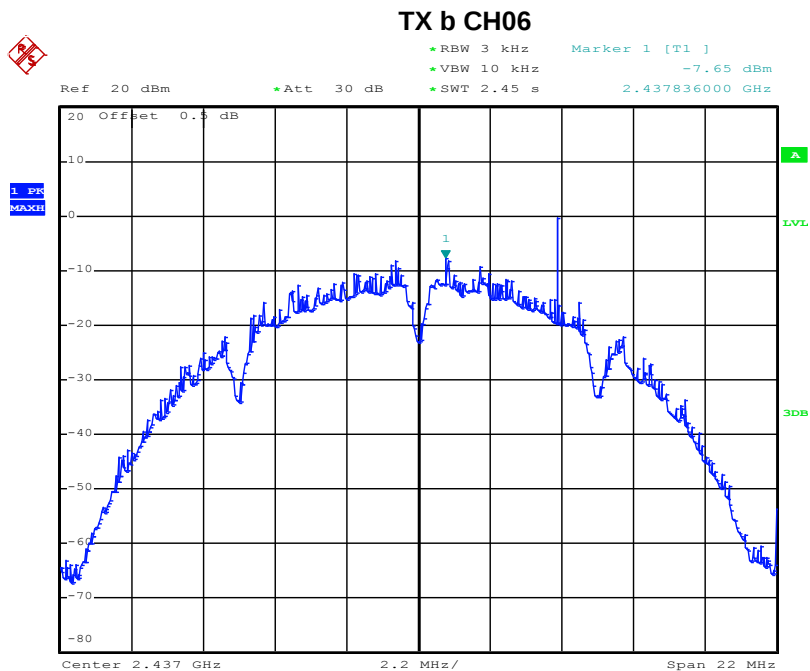


Date: 19.OCT.2021 15:29:14

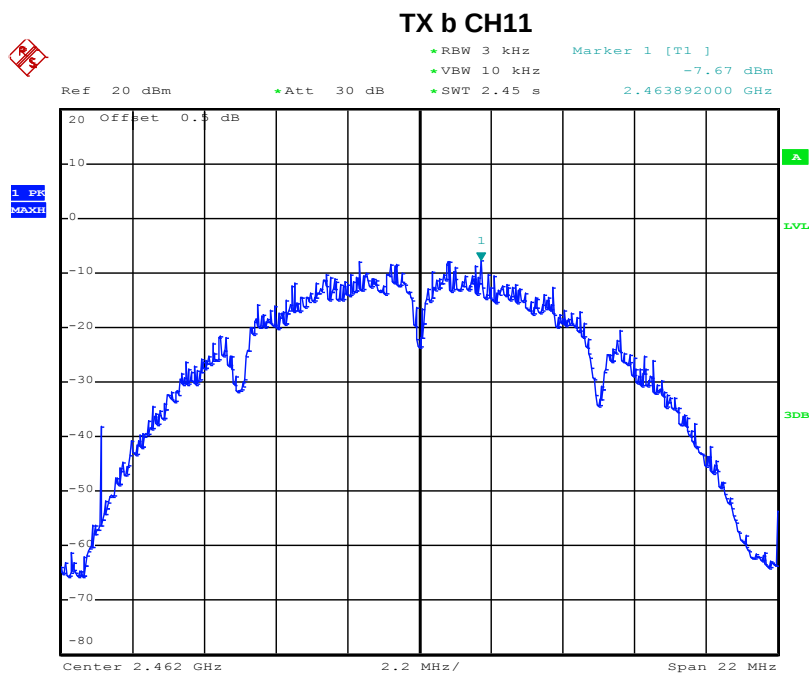


Date: 19.OCT.2021 15:28:49

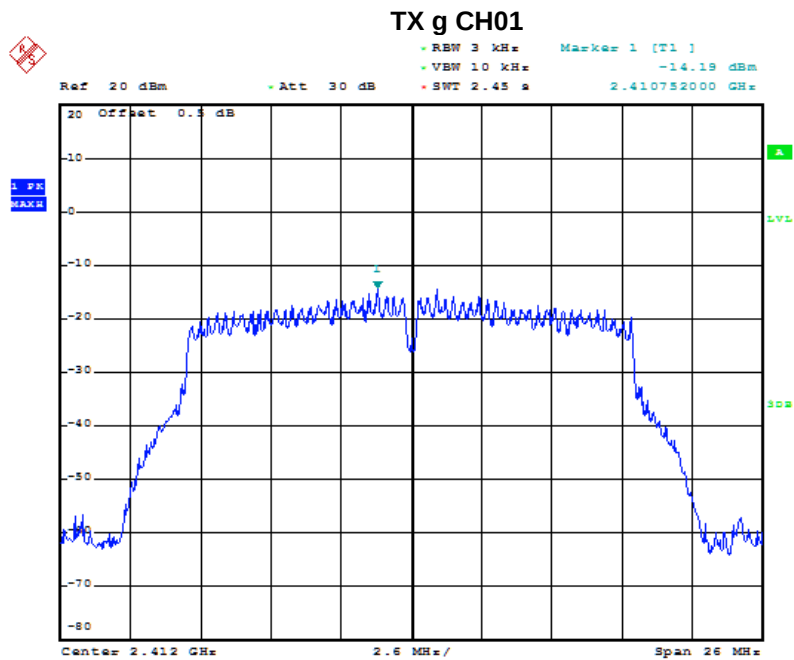


Date: 19.OCT.2021 15:30:20

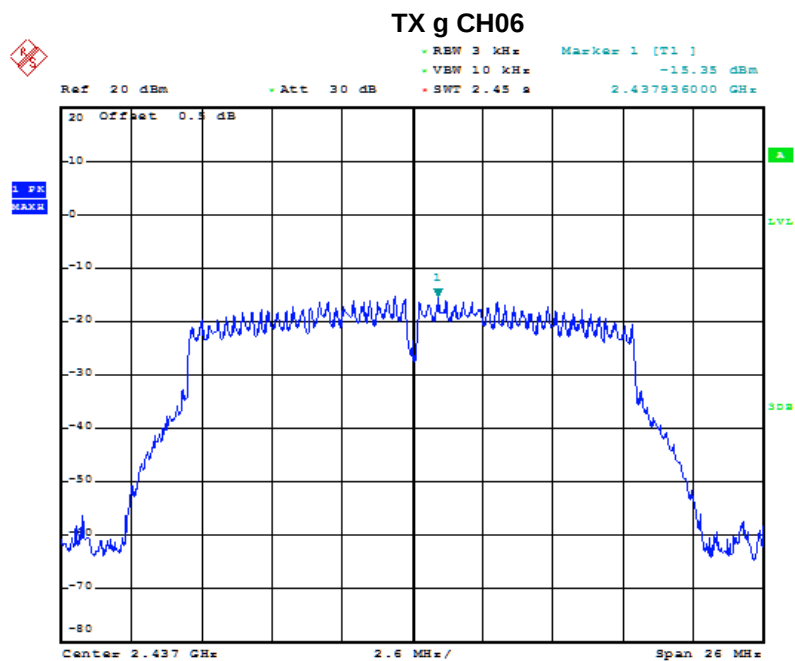


Date: 19.OCT.2021 15:30:45

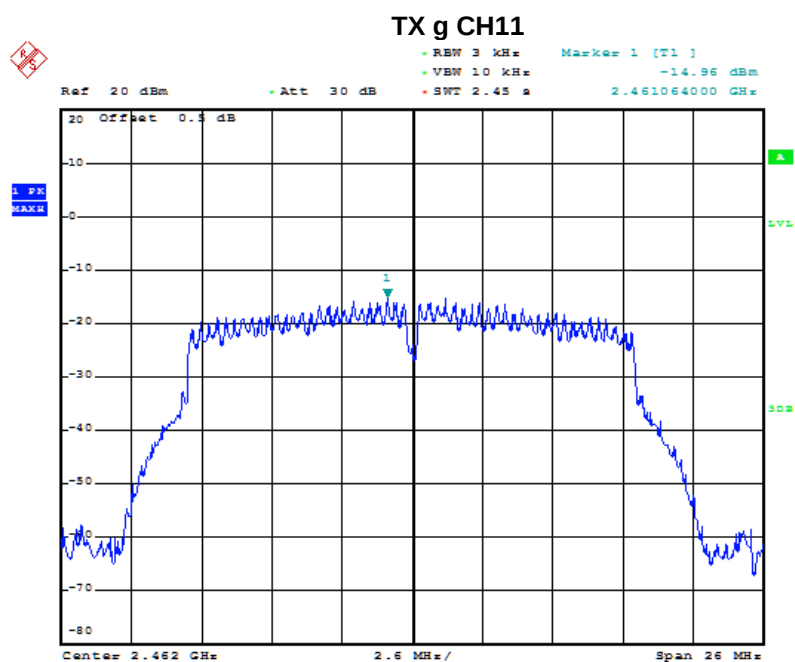

Date: 19.OCT.2021 15:31:08

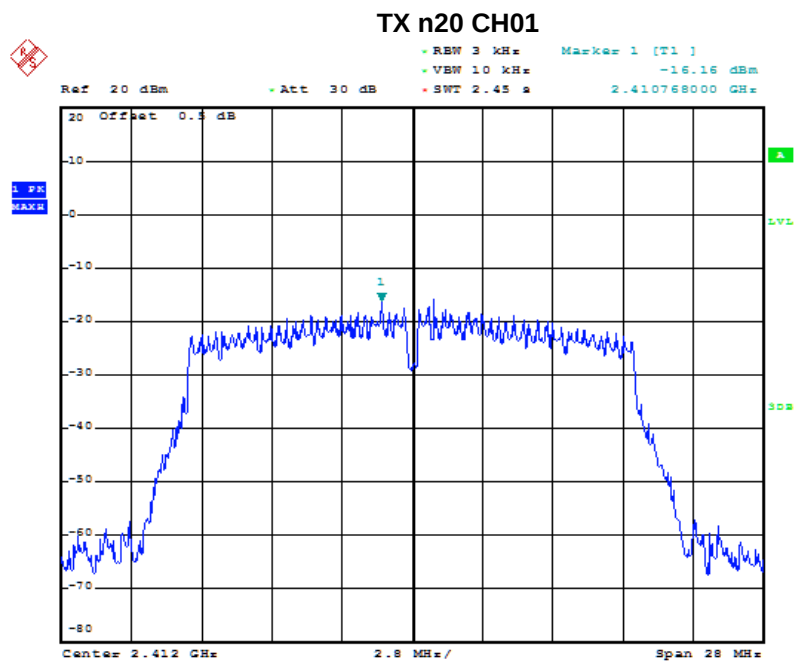


Date: 19.OCT.2021 15:33:03

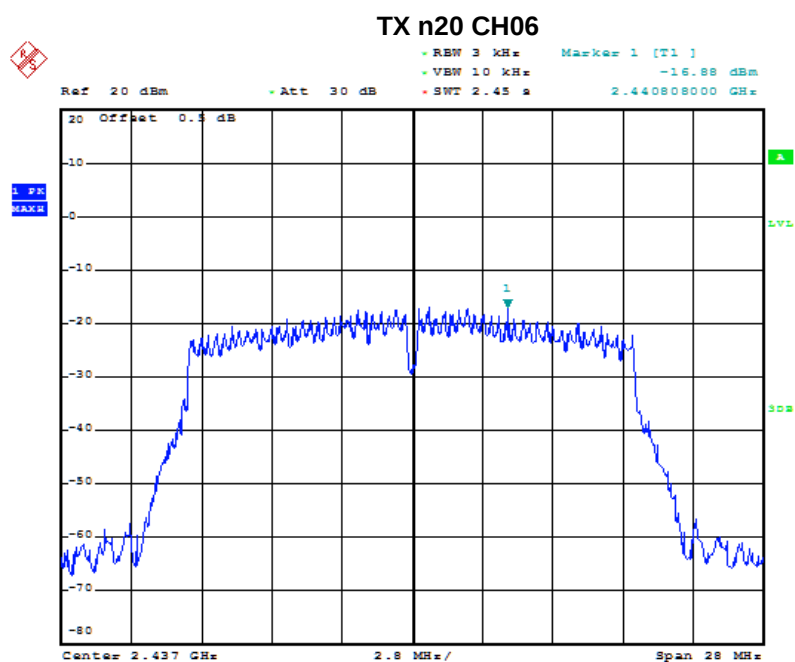


Date: 19.OCT.2021 15:32:41

TX n20 CH11

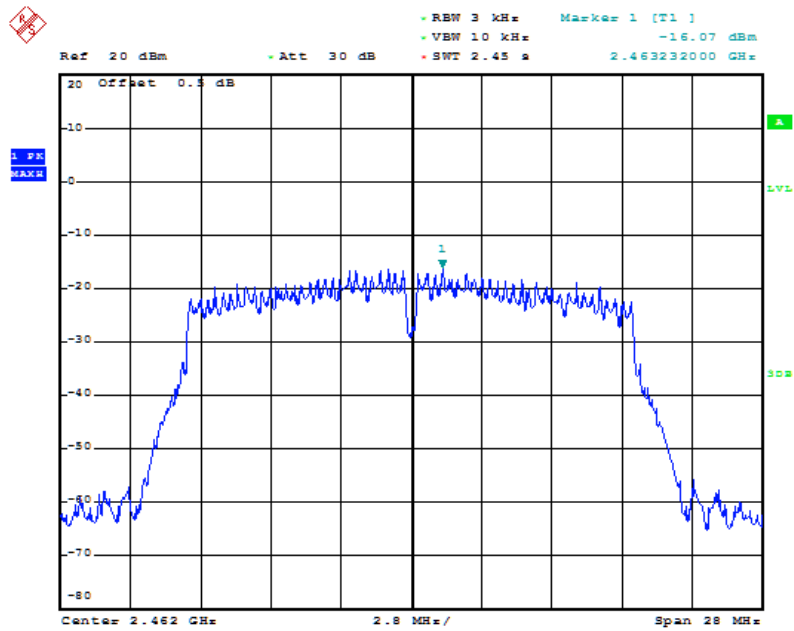


Date: 19.OCT.2021 15:32:12


TX n40 CH03

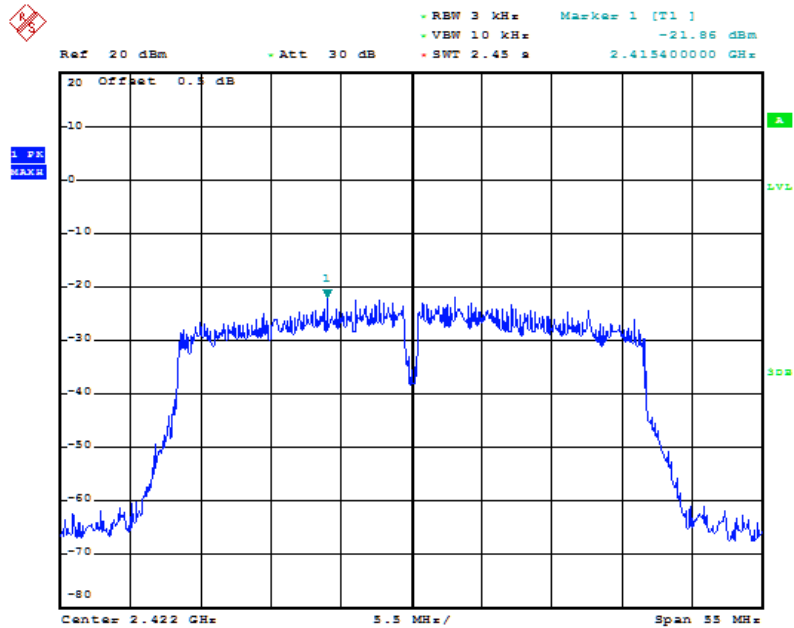

Date: 19.OCT.2021 15:36:06

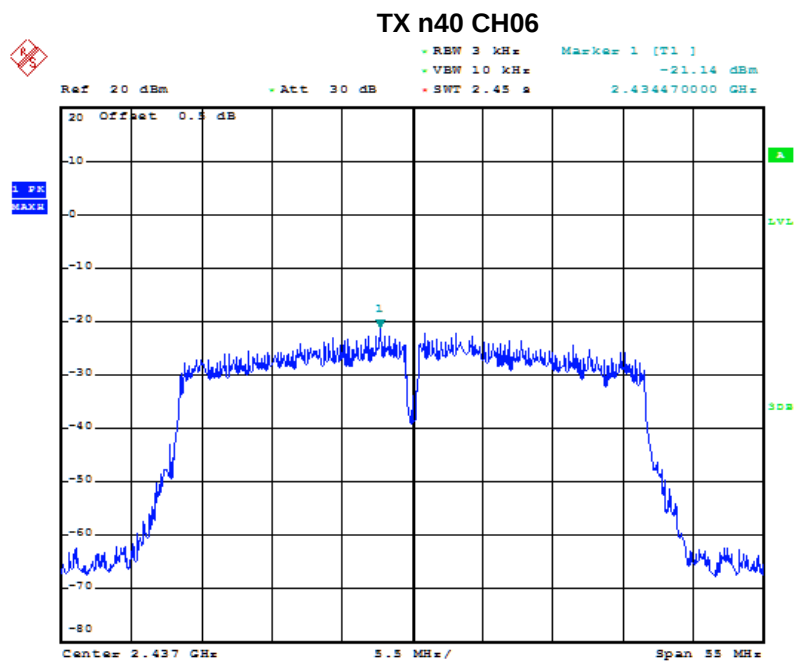

Date: 19.OCT.2021 15:35:39

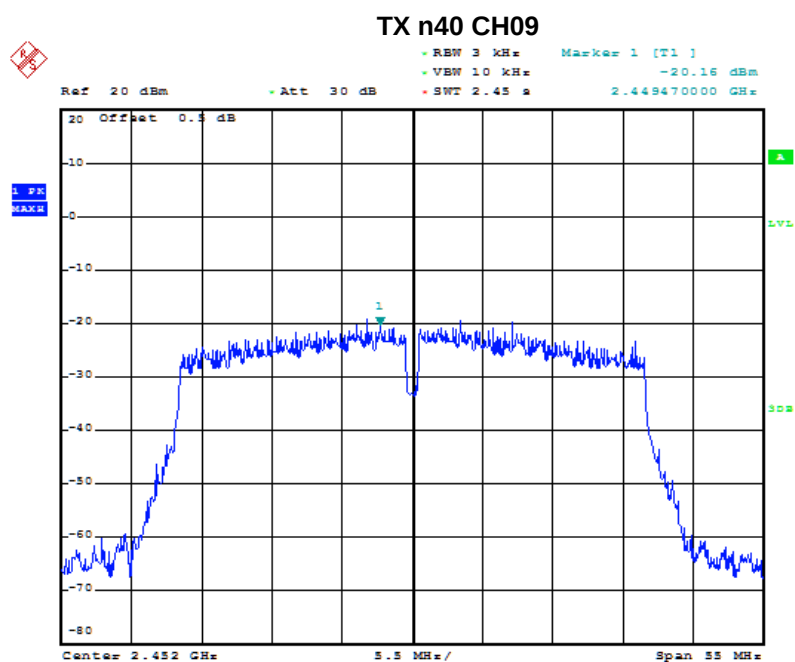

Date: 19.OCT.2021 15:35:12

10. Bandwidth Test

10.1 Block Diagram Of Test Setup



10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 EUT Operating Conditions


The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.

10.5 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage :	AC120V/60Hz
Test Mode:	TX b Mode		


Frequency (MHz)	6dB bandwidth (MHz) ANTA	6dB bandwidth (MHz) ANTB	6dB bandwidth (MHz) ANTC	6dB bandwidth (MHz) ANTD	Limit (kHz)	Result
2412	8.00	8.08	8.16	7.20	500	Pass
2437	8.08	8.16	8.20	8.16	500	Pass
2462	7.84	8.08	8.08	7.68	500	Pass

Note: (A/B/C/D) Represent the value of antenna A, B, C, D, The worst data is Antenna C, only shown Antenna C Plot.

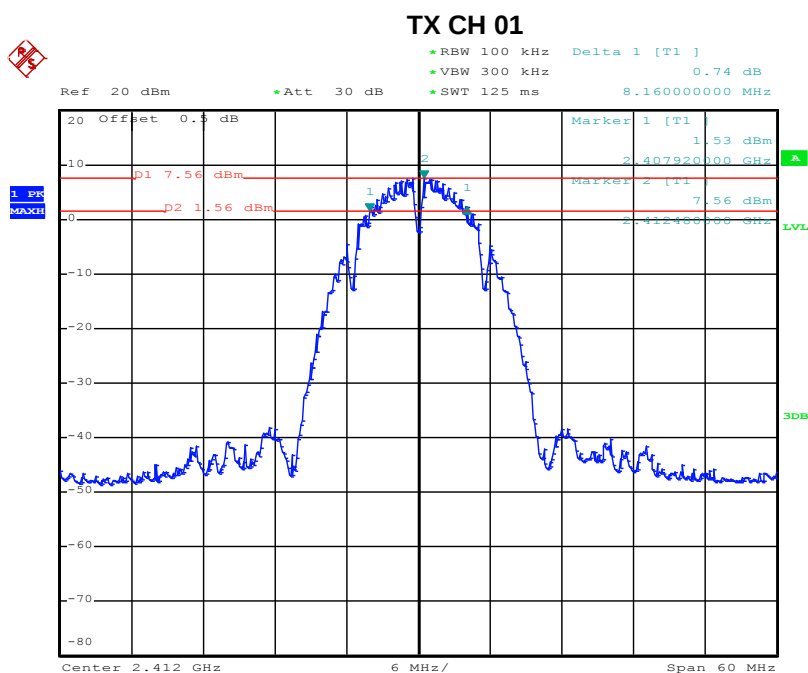


Date: 19.OCT.2021 14:41:17

TX CH 06

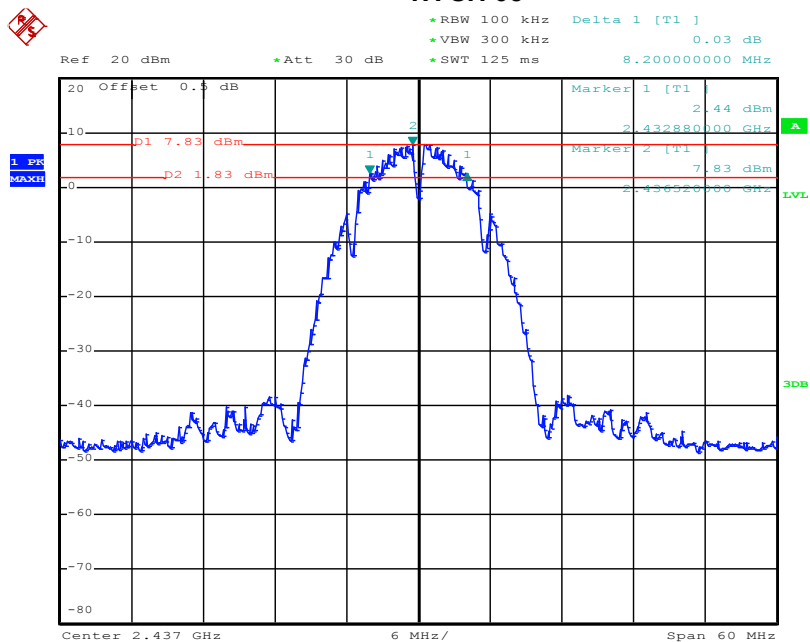

Date: 19.OCT.2021 12:55:57

TX CH 11

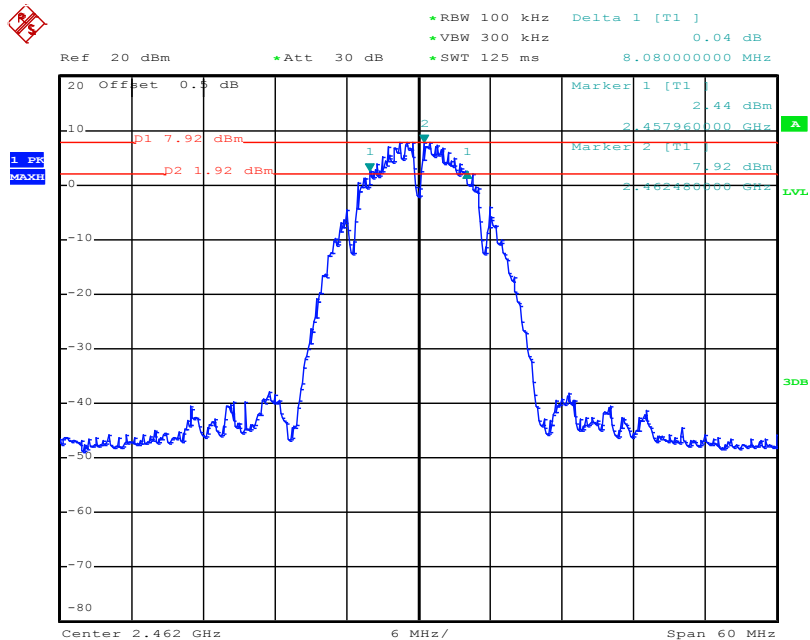


Date: 19.OCT.2021 12:54:55

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage :	AC120V/60Hz
Test Mode:	TX g Mode		


Frequency (MHz)	6dB bandwidth (MHz) ANTA	6dB bandwidth (MHz) ANTB	6dB bandwidth (MHz) ANTC	6dB bandwidth (MHz) ANTD	Limit (kHz)	Result
2412	15.20	15.20	15.24	15.20	500	Pass
2437	15.20	15.20	15.28	15.20	500	Pass
2462	15.20	14.00	15.16	15.20	500	Pass

Note: (A/B/C/D) Represent the value of antenna A, B, C, D, The worst data is Antenna C, only shown Antenna C Plot.

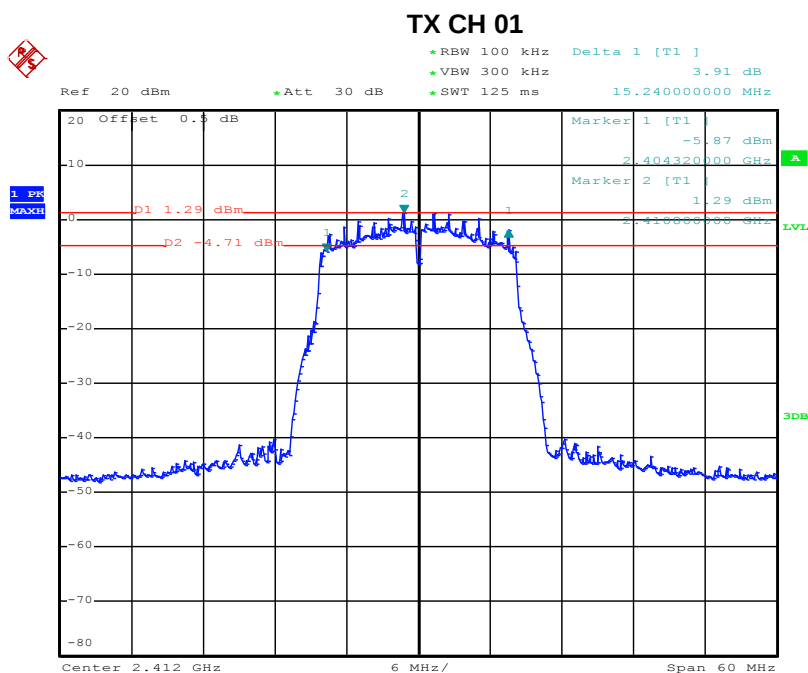


Date: 19.OCT.2021 14:40:22

TX CH 06

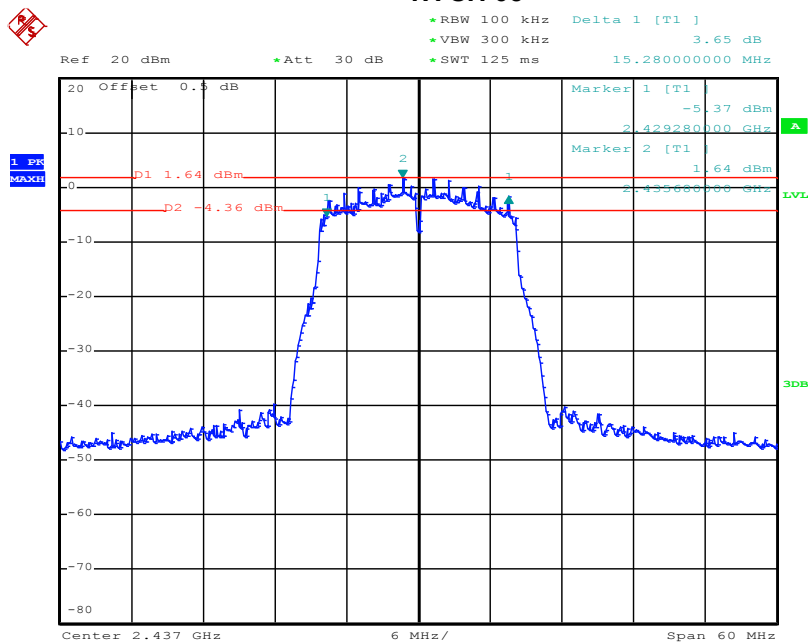

Date: 19.OCT.2021 12:57:44

TX CH 11

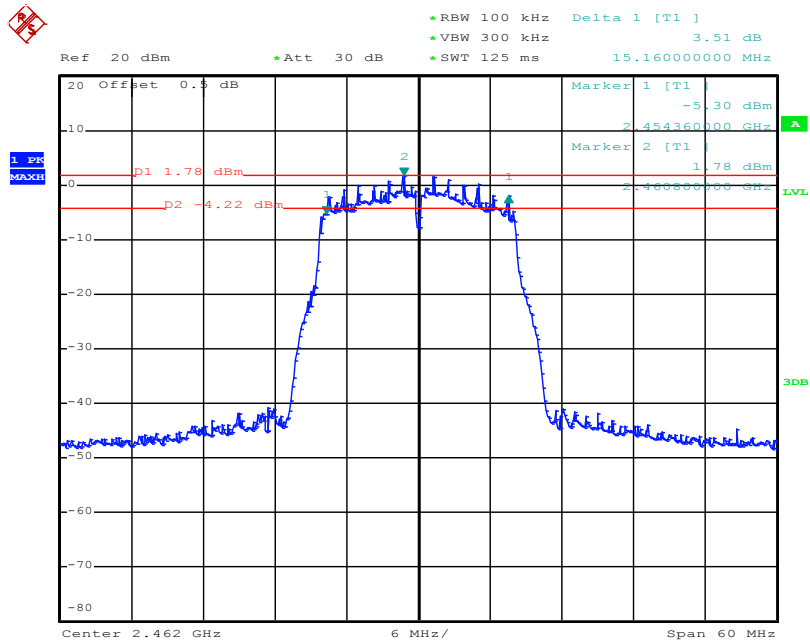


Date: 19.OCT.2021 12:53:43

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage :	AC120V/60Hz
Test Mode:	TX n Mode(20M)		


Frequency (MHz)	6dB bandwidth (MHz) ANTA	6dB bandwidth (MHz) ANTB	6dB bandwidth (MHz) ANTC	6dB bandwidth (MHz) ANTD	Limit (kHz)	Result
2412	15.20	15.20	15.24	15.20	500	Pass
2437	15.20	15.08	15.28	15.20	500	Pass
2462	15.16	15.20	15.16	15.20	500	Pass

Note: (A/B/C/D) Represent the value of antenna A, B, C, D, The worst data is Antenna C, only shown Antenna C Plot.

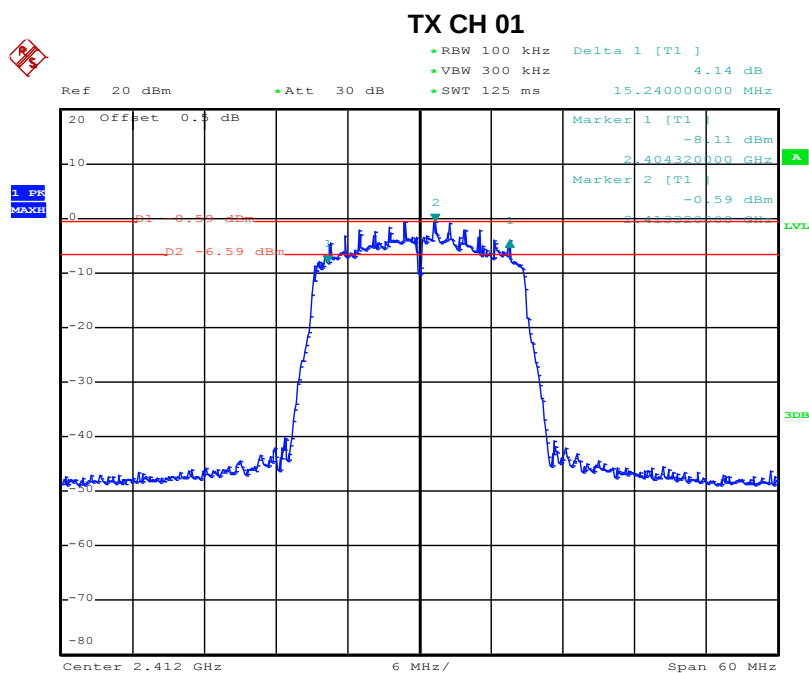


Date: 19.OCT.2021 14:38:27

TX CH 06

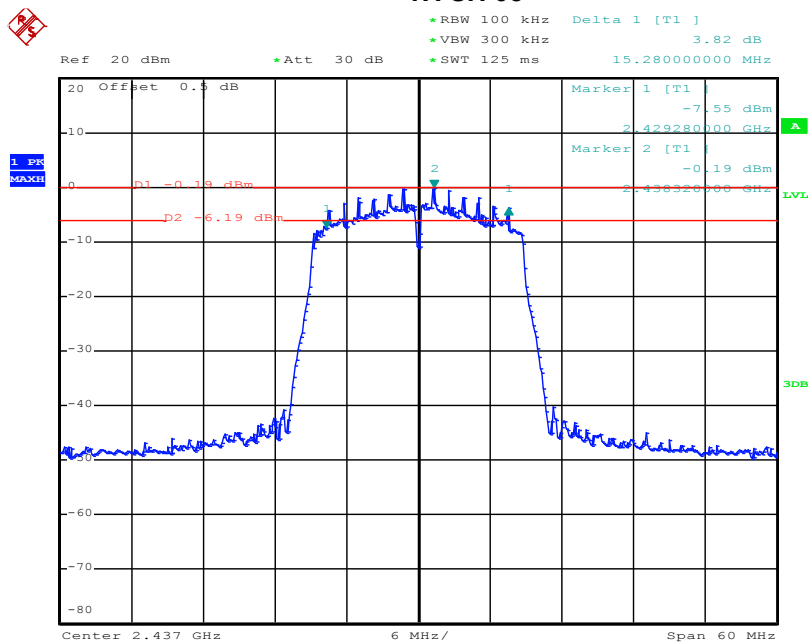

Date: 19.OCT.2021 12:58:38

TX CH 11

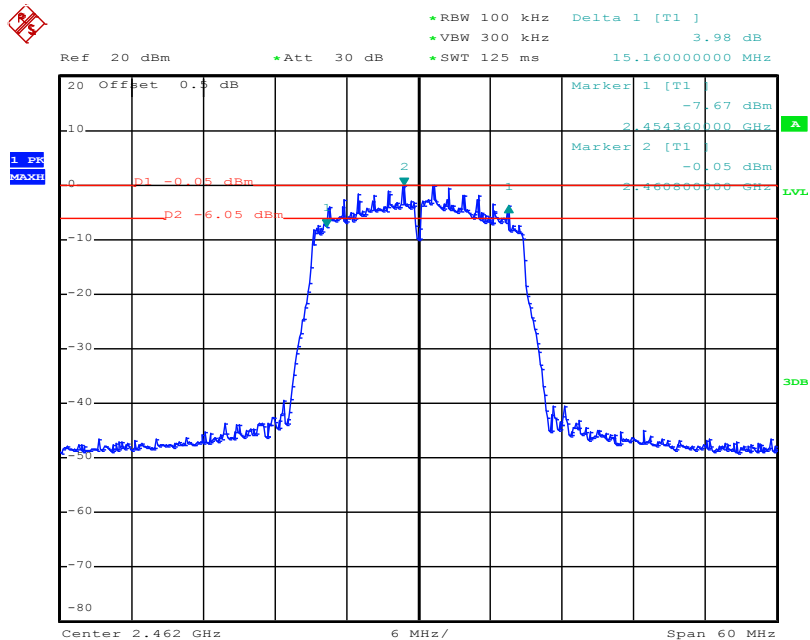


Date: 19.OCT.2021 12:52:46


Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage :	AC120V/60Hz
Test Mode:	TX n Mode(40M)		

Frequency (MHz)	6dB bandwidth (MHz) ANTA	6dB bandwidth (MHz) ANTB	6dB bandwidth (MHz) ANTC	6dB bandwidth (MHz) ANTD	Limit (kHz)	Result
2412	35.28	35.12	35.32	35.24	500	Pass
2437	35.16	35.12	35.20	35.20	500	Pass
2462	35.16	35.24	35.32	35.20	500	Pass


Note: (A/B/C/D) Represent the value of antenna A, B, C, D, The worst data is Antenna C, only shown Antenna C Plot.

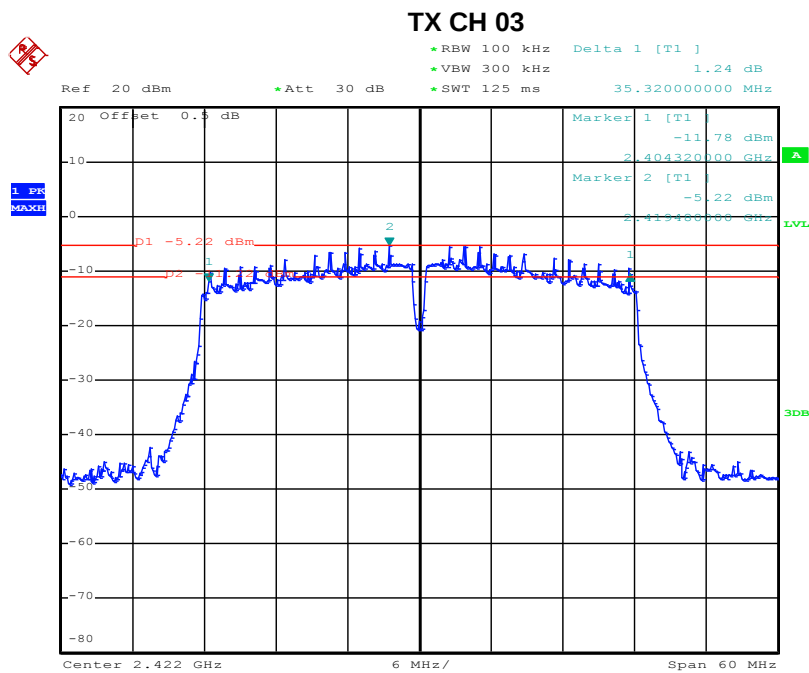

Date: 19.OCT.2021 12:48:02

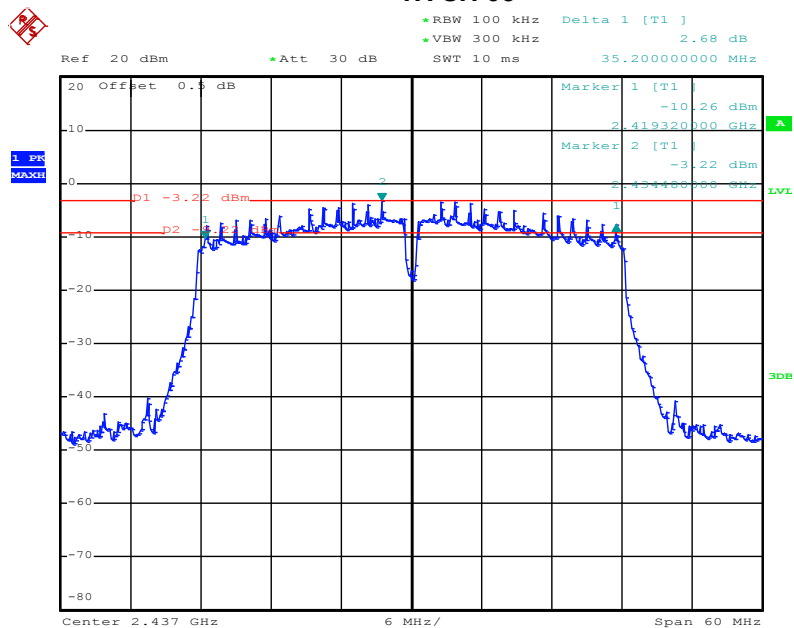TX CH 06


Date: 19.OCT.2021 15:55:02

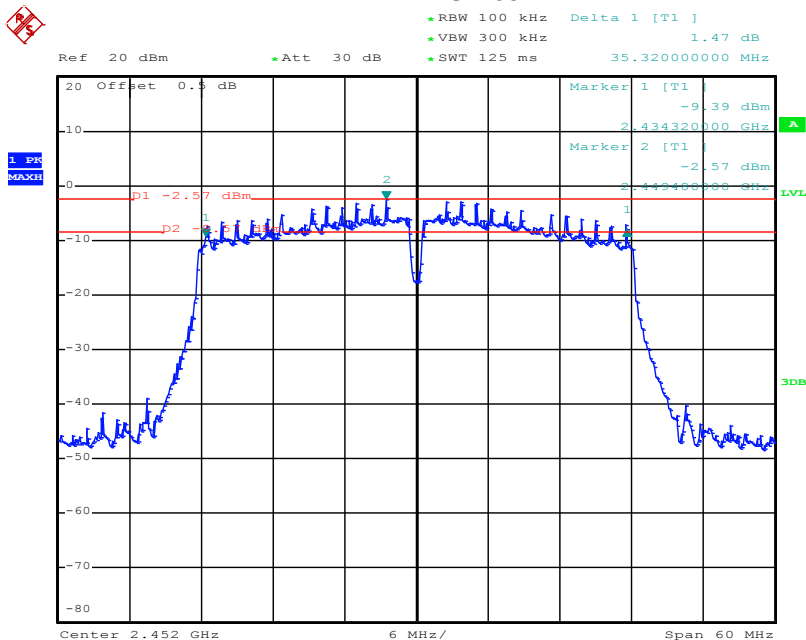TX CH 09


Date: 19.OCT.2021 12:51:00

11. Peak Output Power Test

11.1 Block Diagram Of Test Setup



11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

11.3 Test Procedure

- The EUT was directly connected to the Power meter

11.4 EUT Operating Conditions

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Note: Power Spectral Density(dBm)=Reading+Cable Loss


11.5 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage :	AC120V/60Hz

Test Mode	Frequency	Maximum Conducted Output Power(PK) ANT A	Maximum Conducted Output Power(PK) ANT B	Maximum Conducted Output Power(PK) ANT C	Maximum Conducted Output Power(PK) ANT D	Total Power Conducted Output Power(PK)	LIMIT
	(MHz)	(dBm)	(dBm)	(dBm)	(dBm)	(dBm)	dBm
802.11b	2412	17.37	17.23	17.34	16.97	23.25	30
	2437	16.52	16.58	17.54	17.32	23.03	30
	2462	17.79	16.71	17.33	17.71	23.43	30
802.11g	2412	16.05	14.89	16.37	15.79	21.83	30
	2437	14.44	15.21	16.22	15.18	21.33	30
	2462	16.54	15.49	16.12	15.13	21.87	30
802.11n20	2412	13.85	13.54	14.23	13.56	19.82	30
	2437	13.05	12.79	14.35	13.83	19.57	30
	2462	14.33	12.83	13.87	13.21	19.62	30
802.11n40	2422	10.63	10.91	9.10	9.40	16.10	30
	2437	10.11	10.26	9.37	9.76	15.91	30
	2452	9.13	11.63	12.01	10.34	16.94	30

12. 100 KHz Bandwidth Of Frequency Band Edge

12.1 Block Diagram Of Test Setup

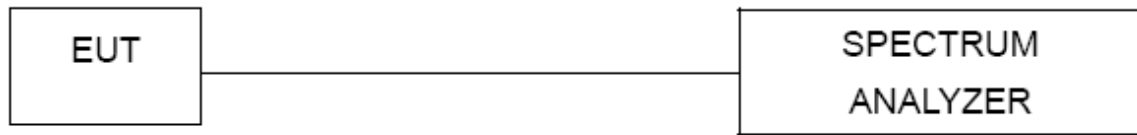

12.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

12.3 Test Procedure

Using the following spectrum analyzer setting:

- a) Set the RBW = 100KHz.
- b) Set the VBW = 300KHz.
- c) Sweep time = auto couple.
- d) Detector function = peak.
- e) Trace mode = max hold.
- f) Allow trace to fully stabilize..

12.4 EUT Operating Conditions


The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Note: Power Spectral Density(dBm)=Reading+Cable Loss

12.5 Test Result


Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage :	AC120V/60Hz

Note: (A/B/C/D) Represent the value of antenna A, B, C, D, The worst data is Antenna C, only shown Antenna C Plot.

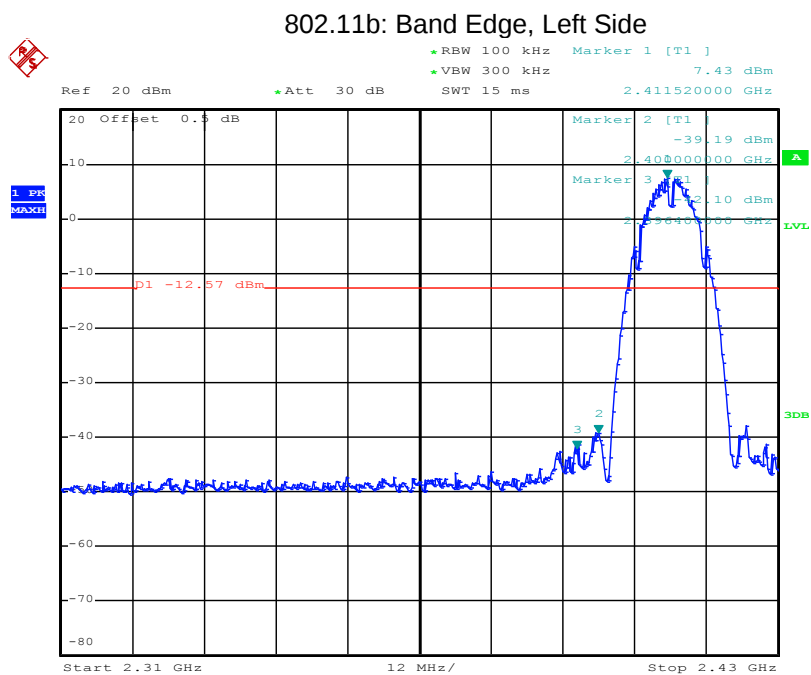


Date: 19.OCT.2021 15:25:41

802.11b: Band Edge, Right Side

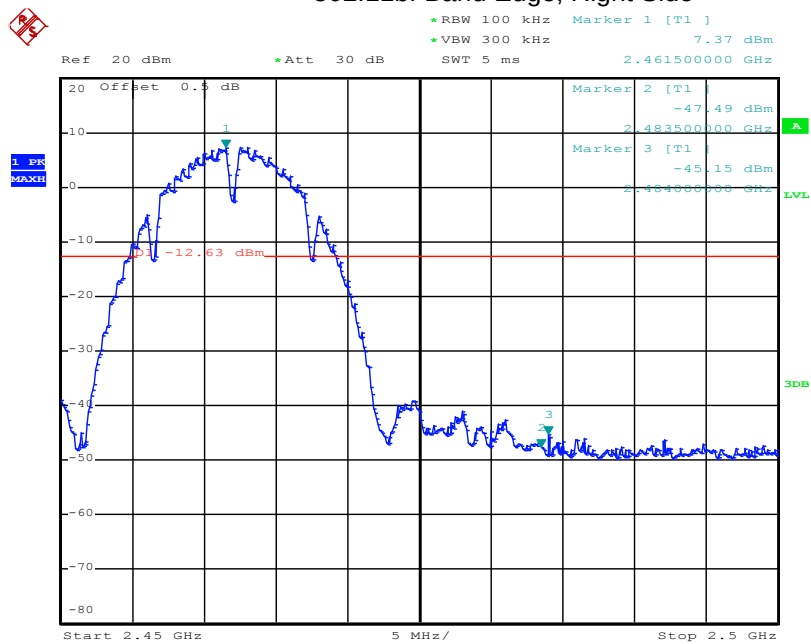


Date: 19.OCT.2021 15:18:14

802.11g: Band Edge, Left Side

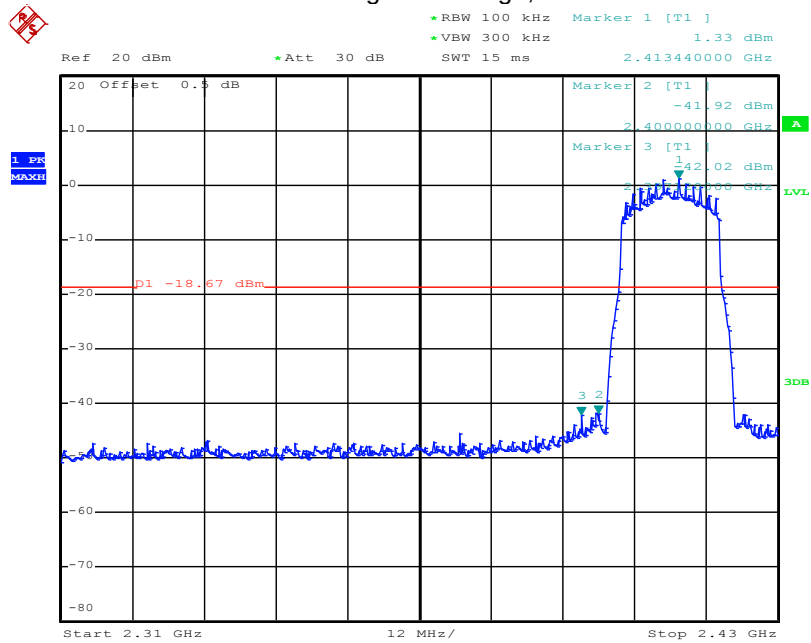


Date: 19.OCT.2021 15:25:02

802.11g: Band Edge, Right Side

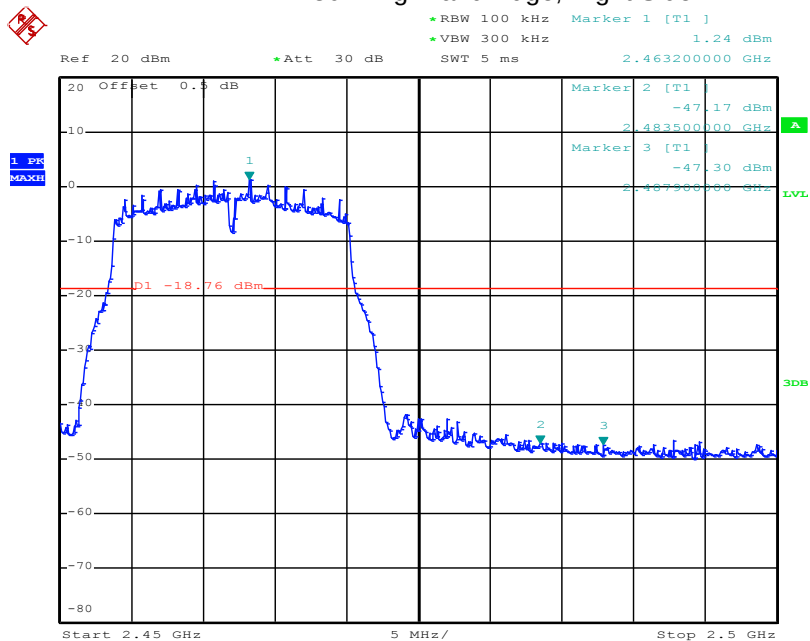


Date: 19.OCT.2021 15:18:58

802.11n-HT20: Band Edge, Left Side

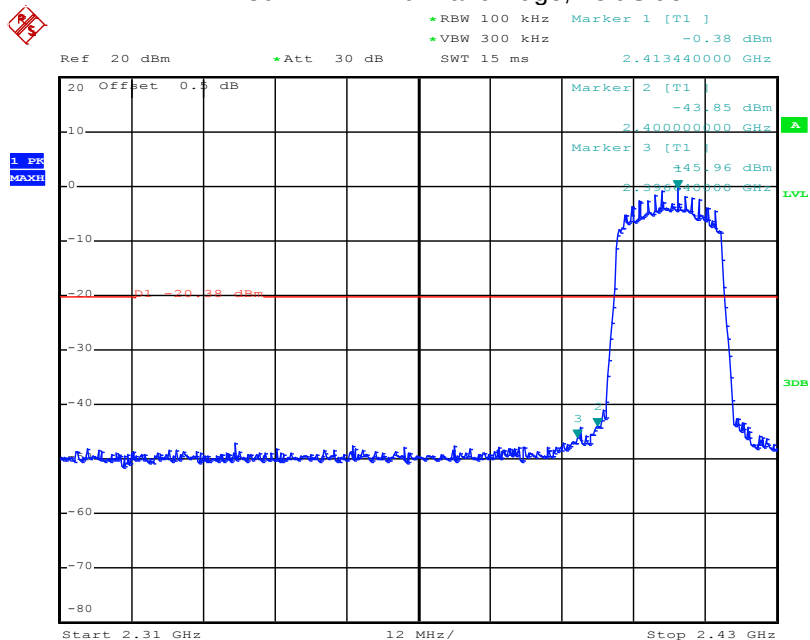


Date: 19.OCT.2021 15:24:25

802.11n-HT20: Band Edge, Right Side

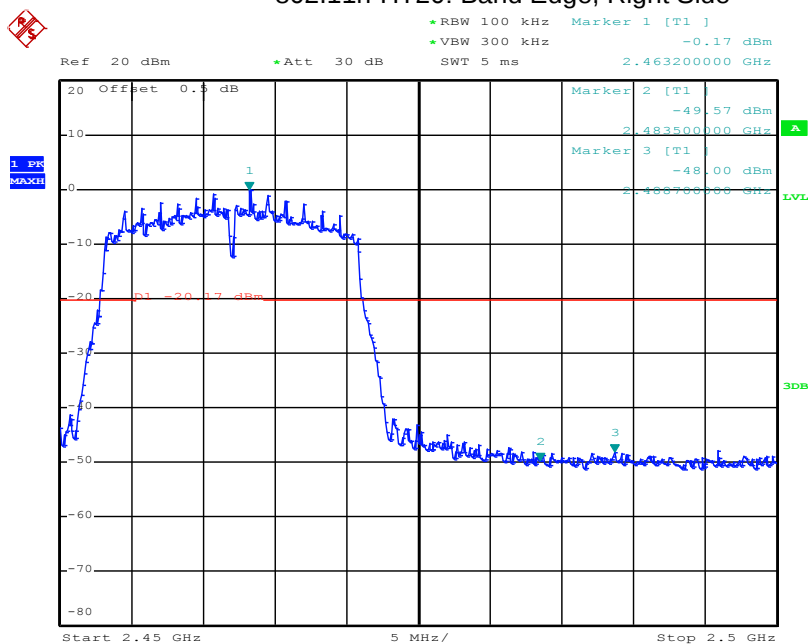


Date: 19.OCT.2021 15:19:31

802.11n-HT40: Band Edge, Left Side

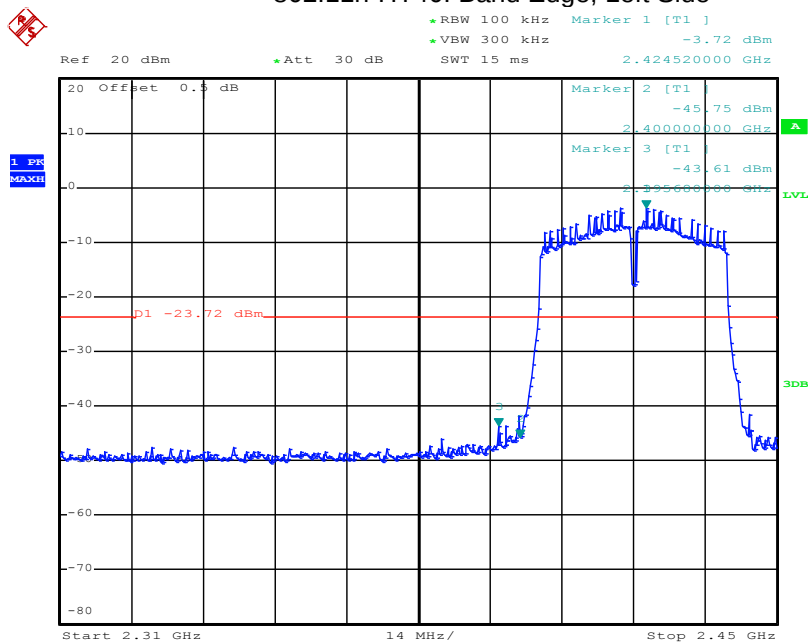

Date: 19.OCT.2021 15:23:22

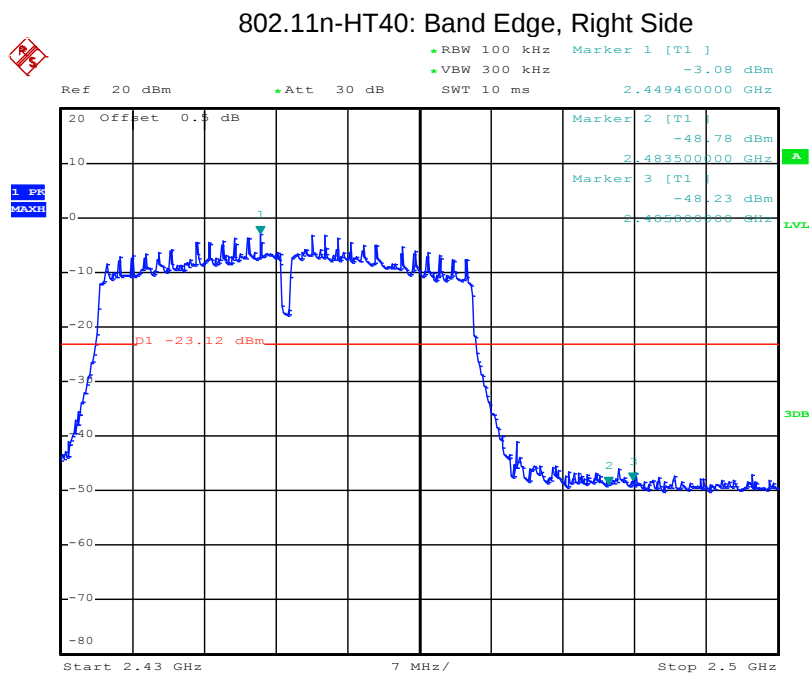


Date: 19.OCT.2021 15:21:03

Conducted Emission Measurement


Note: (A/B/C/D) Represent the value of antenna A, B, C, D, The worst data is Antenna C, only shown Antenna C Plot.

802.11b

Low Channel 2412MHz

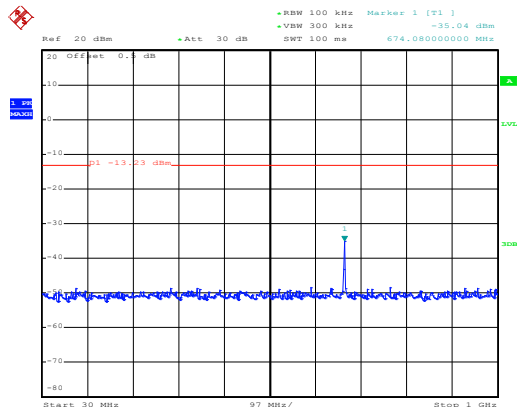


Date: 19.OCT.2021 15:14:23

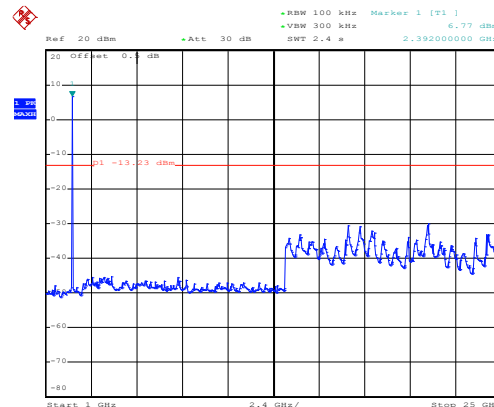


Date: 19.OCT.2021 15:14:05

Middle Channel 2437MHz

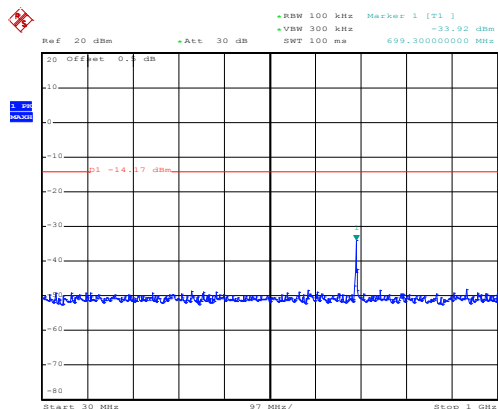


Date: 19.OCT.2021 15:15:35

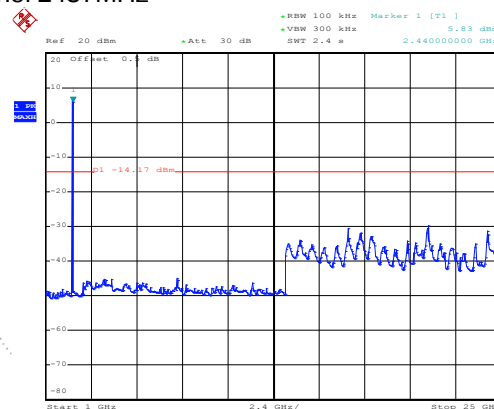


Date: 19.OCT.2021 15:15:01

High Channel 2462MHz

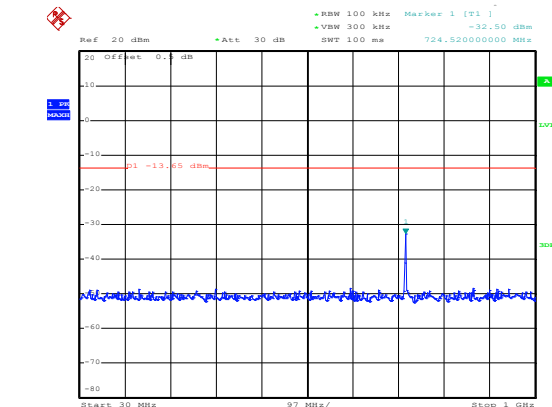


Date: 19.OCT.2021 15:17:05

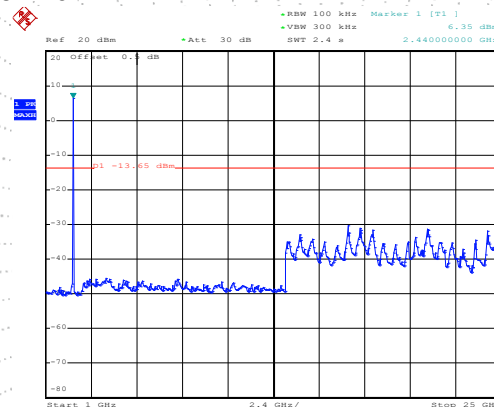


Date: 19.OCT.2021 15:16:44

802.11g

Low Channel 2412MHz

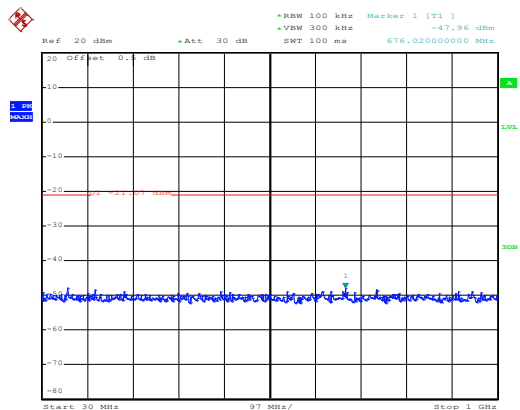


Date: 19.OCT.2021 15:13:29

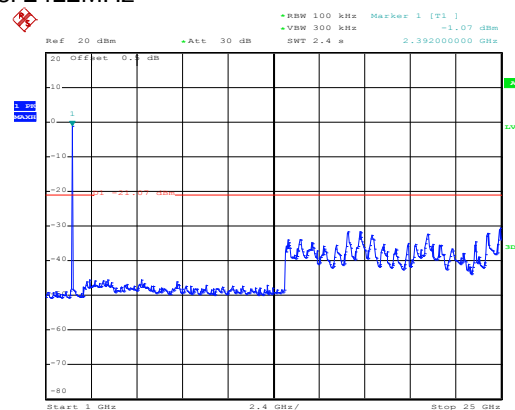


Date: 19.OCT.2021 15:13:10

Middle Channel 2437MHz

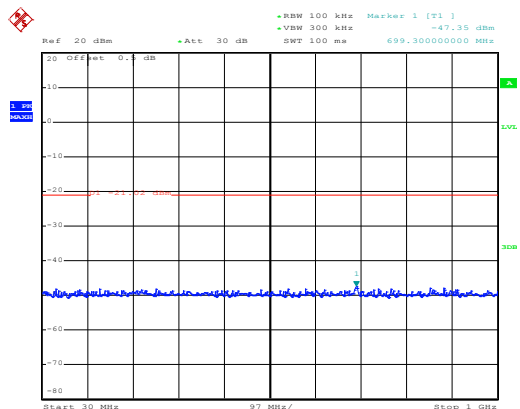


Date: 19.OCT.2021 15:12:31

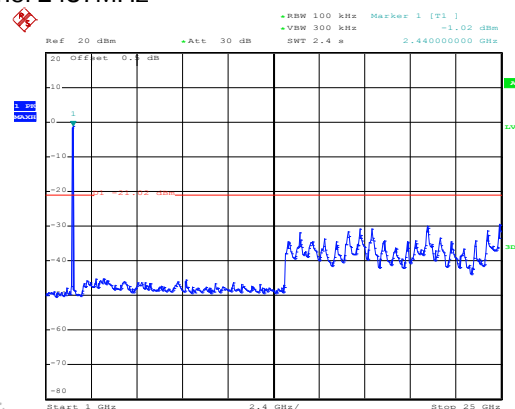


Date: 19.OCT.2021 15:11:29

High Channel 2462MHz

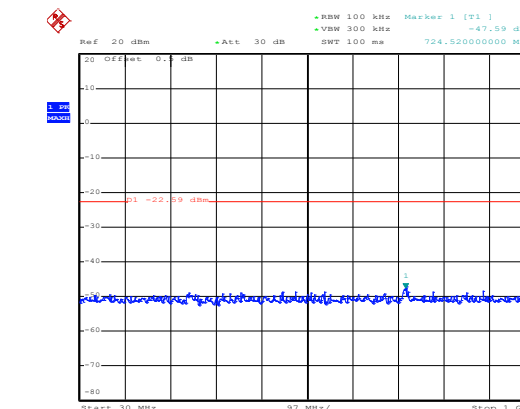


Date: 19.OCT.2021 15:10:34

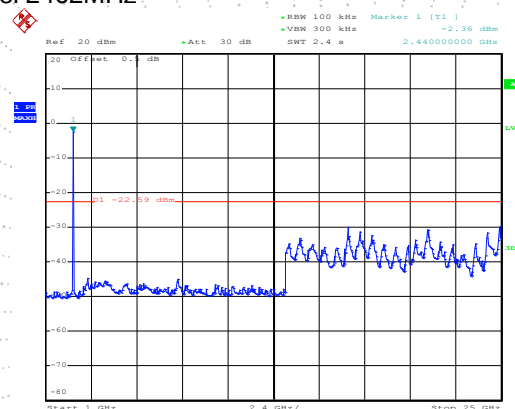


Date: 19.OCT.2021 15:10:15

802.11n20

Low Channel 2412MHz

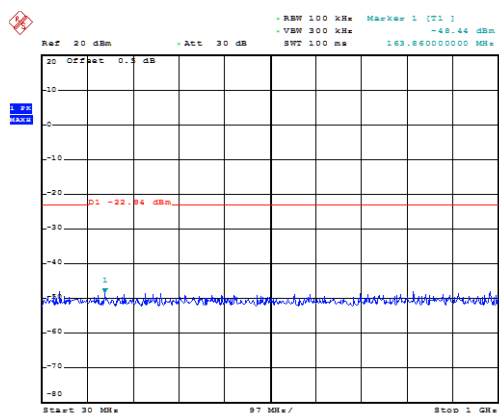


Date: 19.OCT.2021 15:01:15

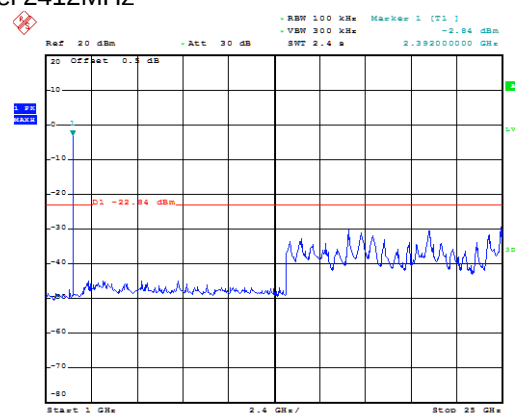


Date: 19.OCT.2021 15:00:38

Middle Channel 2437MHz

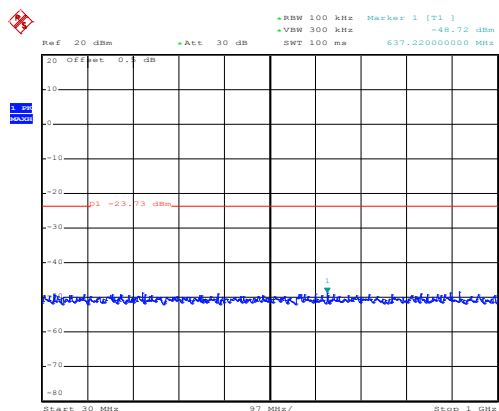


Date: 19.OCT.2021 15:03:09

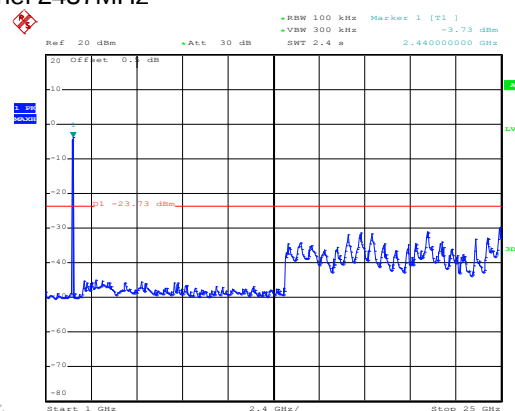


Date: 19.OCT.2021 15:02:38

High Channel 2462MHz

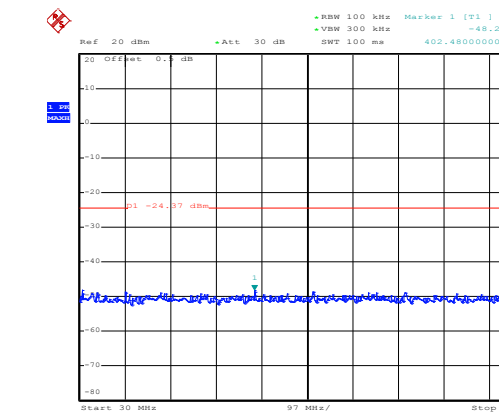


Date: 19.OCT.2021 15:04:50

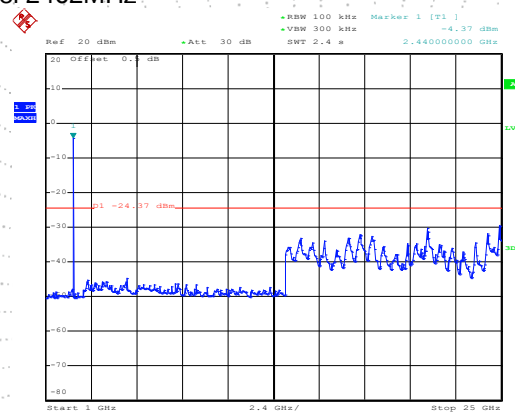


Date: 19.OCT.2021 15:04:20

802.11n40

Low Channel 2422MHz

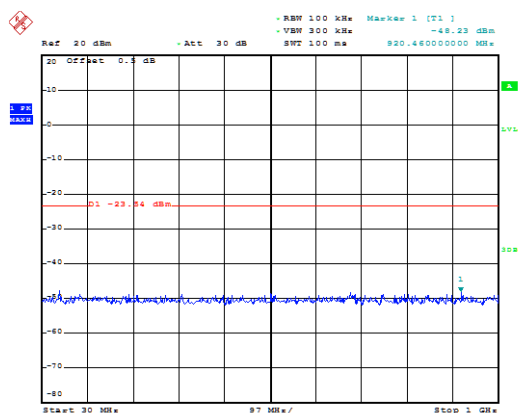


Date: 19.OCT.2021 14:58:30

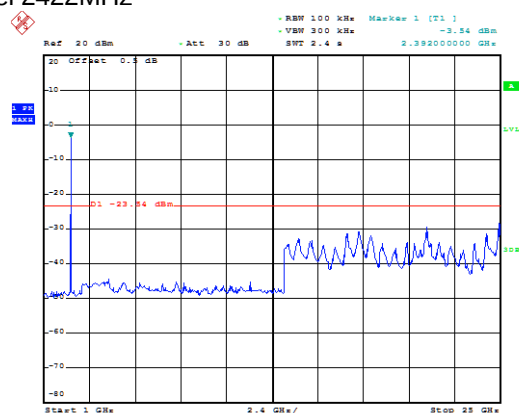


Date: 19.OCT.2021 14:58:05

Middle Channel 2437MHz

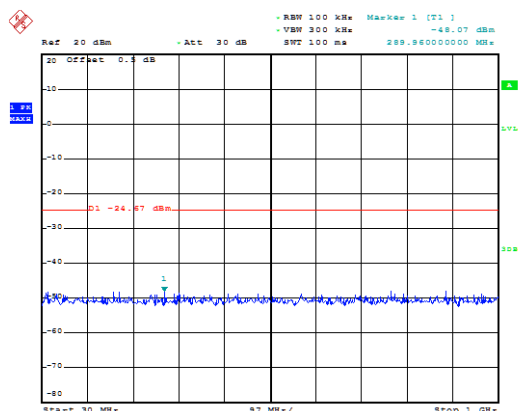


Date: 19.OCT.2021 14:55:29

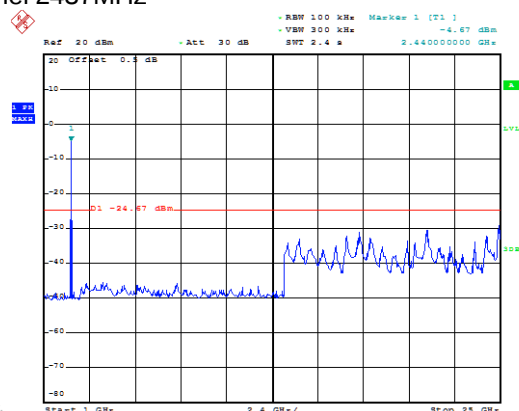


Date: 19.OCT.2021 14:54:42

High Channel 2452MHz

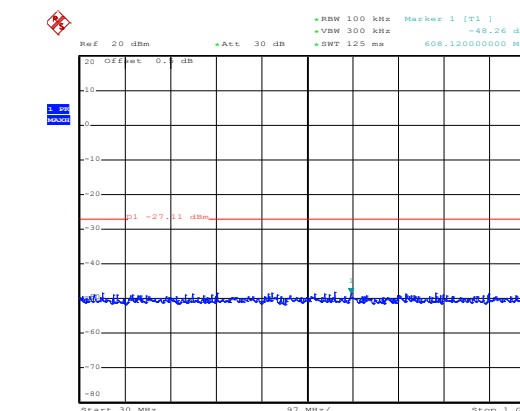

Date: 19.OCT.2021 14:51:16

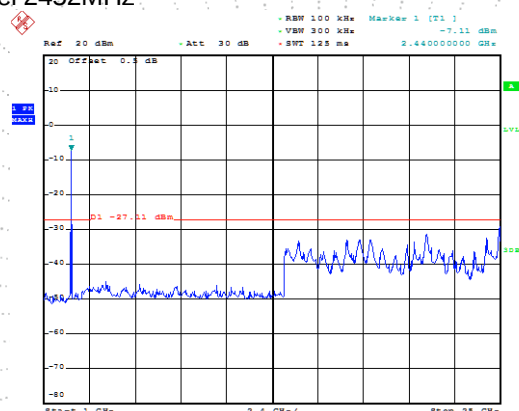

Date: 19.OCT.2021 14:50:53

13. Duty Cycle Of Test Signal

13.1 Standard Requirement

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle. All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

13.2 Formula

Duty Cycle = $T_{on} / (T_{on} + T_{off})$

13.3 Test Procedure


1. Set span = Zero
2. RBW = 8MHz
3. VBW = 8MHz,
4. Detector = Peak

13.4 Test Result


	Duty Cycle	Duty Fator (dB)
802.11b	1	0
802.11g	1	0
802.11n(HT20)	1	0
802.11n(HT40)	1	0

Note: (A/B/C/D) Represent the value of antenna A, B, C, D, The worst data is Antenna A, only shown Antenna A Plot.


802.11b

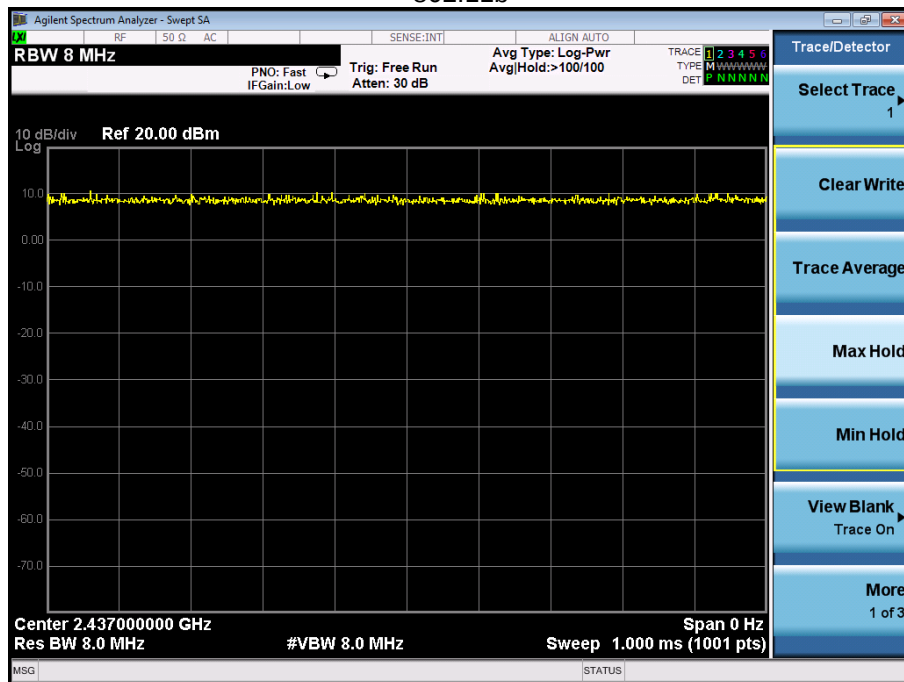


802.11g

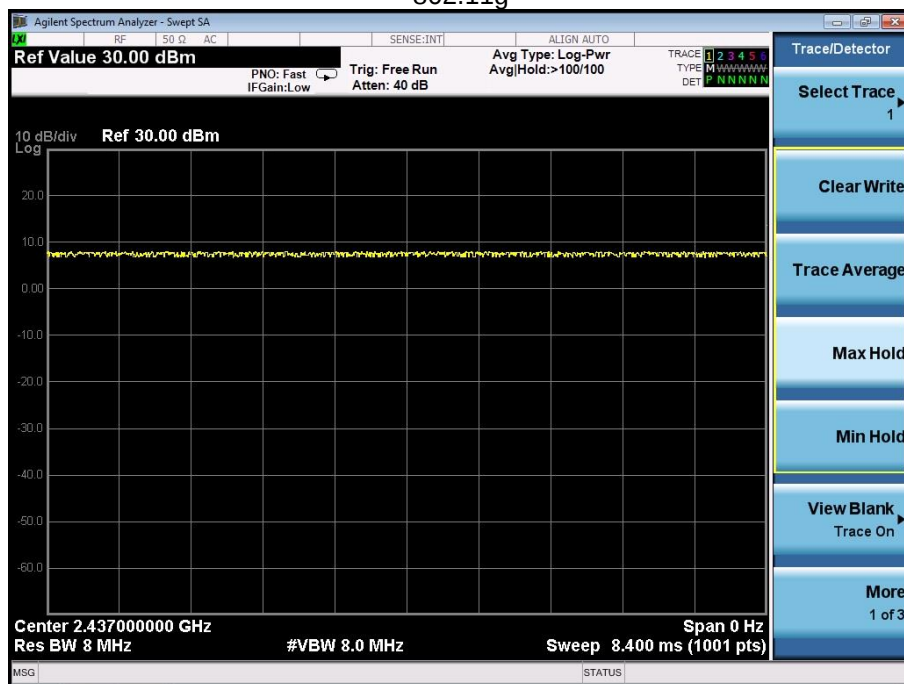

802.11n(HT20)

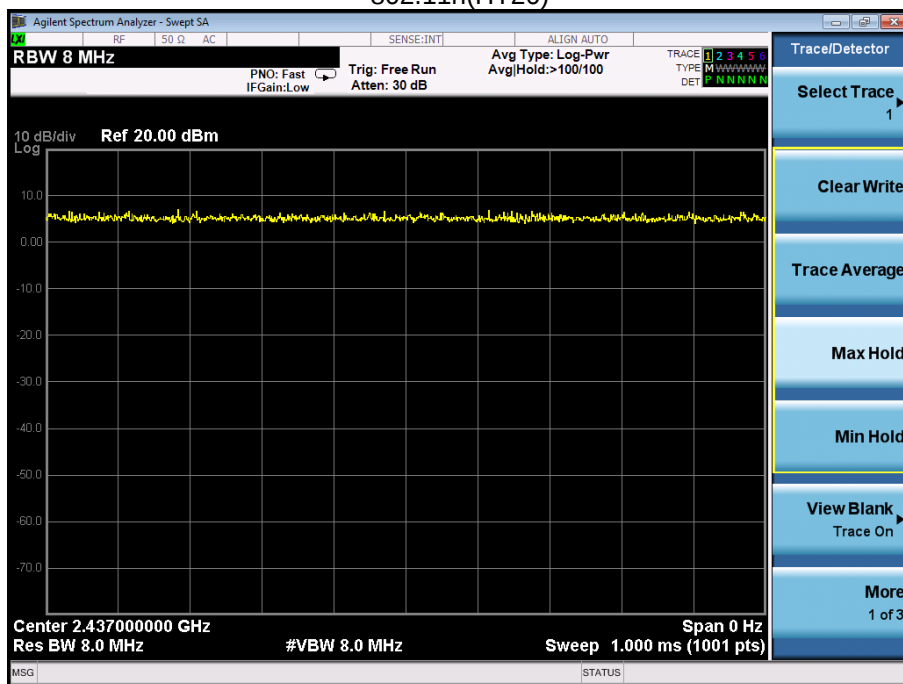

802.11n(HT40)

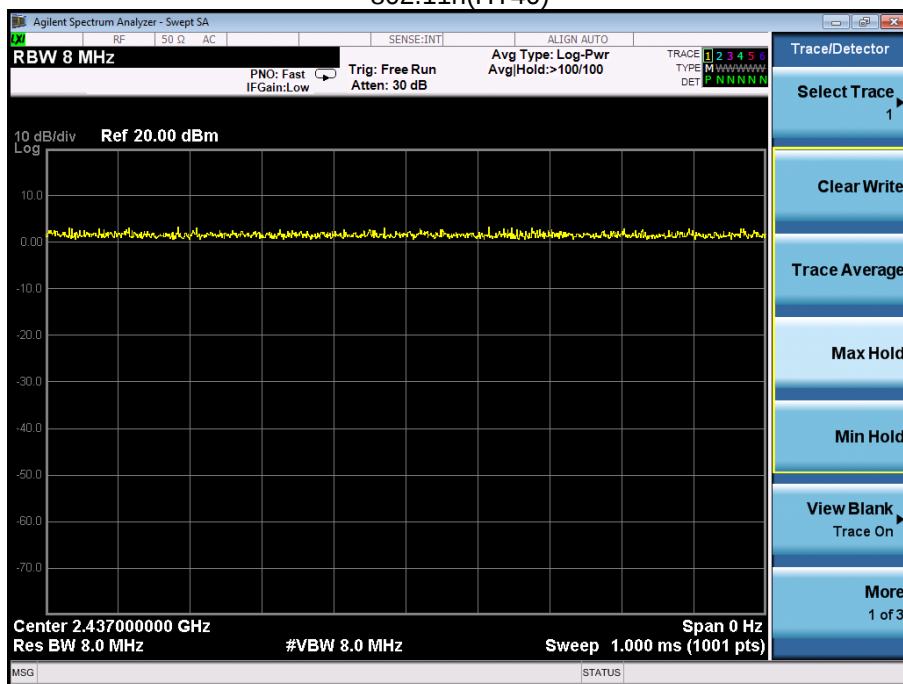

14. Antenna Requirement

14.1 Limit

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

14.1 Test Result

The EUT antenna is External antenna (antenna gain: 2dBi), fulfill the requirement of this section.

15. EUT Photographs

EUT Photo 1




EUT Photo 2



16. EUT Test Setup Photographs

Conducted Emission

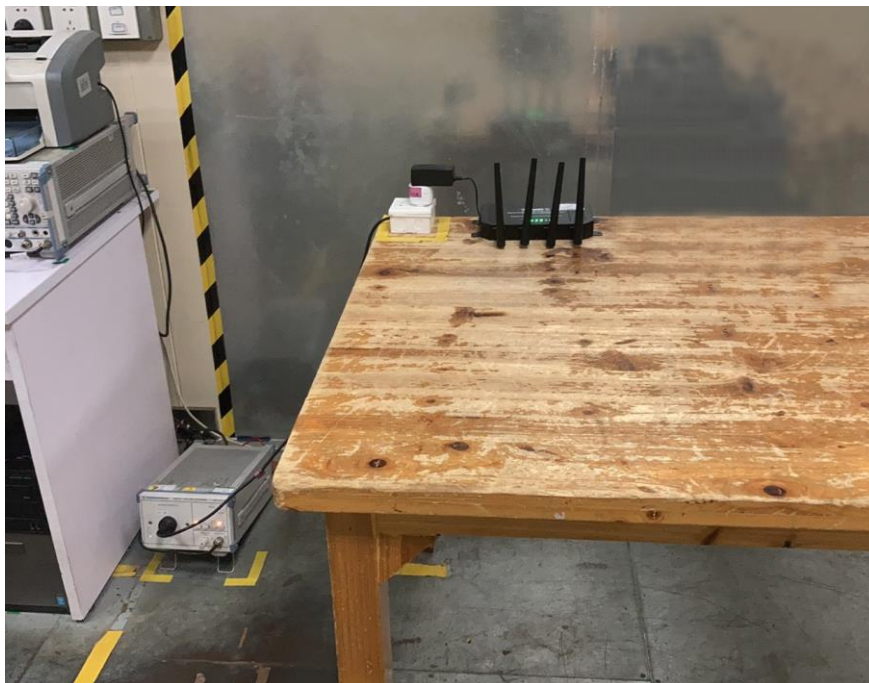

Radiated Measurement Photos





STATEMENT

- 1.The equipment lists are traceable to the national reference standards.
- 2.The test report can not be partially copied unless prior written approval is issued from our lab.
- 3.The test report is invalid without stamp of laboratory.
- 4.The test report is invalid without signature of person(s) testing and authorizing.
- 5.The test process and test result is only related to the Unit Under Test.
- 6.The quality system of our laboratory is in accordance with ISO/IEC17025.
- 7.If there is any objection to report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL : 400-788-9558

P.C.: 518103

FAX : 0755-33229357

Website : <http://www.chnbctc.com>

E-Mail : bctc@bctc-lab.com.cn

***** END *****