



**Shenzhen GTI Technology Co., Ltd.**

1F, 2 Block, Jiaquan Building, Guanlan High-tech Park Baoan District,  
Shenzhen, Guangdong, China.

Tel: +86-755-27559792

Fax: +86-755-86116468

Report No.: GTI20150681F-4

Page 1 of 90

# TEST REPORT

**Product Name** ..... : 3G smart phone

**Trademark** ..... : **SK**

**Model/Type reference** ..... : Sync 5c

**Listed Model(s)** ..... : /

**FCC ID** ..... : 2AE7RSANTOKSYNC5C

ANSI C95.1-1999

**Test Standards** ..... : 47CFR §2.1093

IEEE Std 1528-2003

**Applicant** ..... : Santok Limited

**Address of applicant** ..... : Santok house, Unit L, Braintree Industrial Estate Braintree Road, South Ruislip, Middlesex, HA4 0EJ United Kingdom

**Date of Receipt** ..... : Nov. 13, 2015

**Date of Test Date** ..... : Nov. 19, 2015 - Nov. 20, 2015

**Data of issue** ..... : Nov. 25, 2015

<b>Test result</b>	<b>Pass *</b>
--------------------	---------------

\* In the configuration tested, the EUT complied with the standards specified above



GENERAL DESCRIPTION OF EUT	
Equipment:	3G smart phone
Model Name:	Sync 5c
Manufacturer:	Santok Limited
Manufacturer Address:	Santok house, Unit L, Braintree Industrial Estate Braintree Road, South Ruislip, Middlesex, HA4 0EJ United Kingdom
Power Rating:	DC 3.7V form 2000mAh by rechargeable battery or DC 5.0V form Input: 100-240V~, 50/60Hz, 0.2A Output: 5.0V---1A adapter

Compiled By:

(Thomas Morgan)

Reviewed By:

(Tony Wang)

Approved By:

(Walter Chen)

This test report consists of 90 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by GTI. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of compiler, reviewer and approver. Any objections must be raised to GTI within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.

	Table of Contents	Page
<b>1. SUMMARY.....</b>		<b>4</b>
1.1 TEST STANDARDS.....		4
1.2 SUMMARY OF MAXIMUM SAR VALUE .....		4
1.3 TEST FACILITY .....		6
1.3.1 Address of the test laboratory.....		6
1.3.2 Laboratory accreditation.....		6
1.4 MEASUREMENT UNCERTAINTY (300MHz-3GHz).....		6
1.5 SYSTEM CHECK UNCERTAINTY.....		7
<b>2. GENERAL INFORMATION.....</b>		<b>9</b>
2.1 ENVIRONMENTAL CONDITIONS .....		9
2.2 GENERAL DESCRIPTION OF EUT .....		9
2.3 DESCRIPTION OF TEST MODES.....		11
2.4 MEASUREMENT INSTRUMENTS LIST .....		11
<b>3. SAR MEASUREMENTS SYSTEM CONFIGURATION.....</b>		<b>12</b>
3.1 SAR MEASUREMENT SET-UP.....		12
3.2 DASY5 E-FIELD PROBE SYSTEM.....		13
3.3 PHANTOMS .....		14
3.4 DEVICE HOLDER.....		14
3.5 SCANNING PROCEDURE.....		14
3.6 DATA STORAGE AND EVALUATION .....		17
<b>4. TISSUE SIMULATING LIQUID.....</b>		<b>19</b>
4.1 THE COMPOSITION OF THE TISSUE SIMULATING LIQUID .....		19
4.2 TISSUE CALIBRATION RESULT .....		19
<b>5. SYSTEM CHECK .....</b>		<b>20</b>
<b>6. EUT TEST POSITION.....</b>		<b>22</b>
6.1 DEFINE TWO IMAGINARY LINES ON THE HANDSET .....		22
6.2 CHEEK POSITION.....		22
6.3 TILT POSITION.....		23
6.4 BODY WORN POSITION .....		23
<b>7. MEASUREMENT PROCEDURES.....</b>		<b>24</b>
7.1 CONDUCTED POWER MEASUREMENT.....		24
7.2 SAR MEASUREMENT .....		24
7.2.1 GSM Test Configuration.....		24
7.2.2 WCDMA Test Configuration.....		24
7.2.3 WIFI Test Configuration.....		27
<b>8. TEST CONDITIONS AND RESULTS.....</b>		<b>28</b>
8.1 CONDUCTED POWER RESULTS.....		28
8.2 ANTENNA LOCATION .....		31
8.3 TEST RESULTS .....		33
8.3.1 SAR Test Results Summary .....		33
8.3.2 Standalone SAR.....		35
8.3.3 Simultaneous SAR Evaluation .....		39
<b>9. SYSTEM CHECK RESULTS .....</b>		<b>41</b>
<b>10. SAR TEST GRAPH RESULTS.....</b>		<b>45</b>
<b>11. CALIBRATION CERTIFICATE.....</b>		<b>53</b>
11.1 PROBE CALIBRATION CERTIFICATE ES3DV3 (3292) .....		53
11.2 PROBE CALIBRATION CERTIFICATE D835V2 (4D134).....		64
11.3 PROBE CALIBRATION CERTIFICATE D1900V2 (5D150).....		72
11.4 DAE CALIBRATION CERTIFICATE DAE4 (1315).....		80
<b>12. EUT TEST PHOTO.....</b>		<b>83</b>
<b>13. PHOTOGRAPHS OF EUT CONSTRUCTIONAL.....</b>		<b>90</b>

# 1. SUMMARY

## 1.1 Test Standards

[IEEE Std C95.1, 1999](#): IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 KHz to 300 GHz. It specifies the maximum exposure limit of 1.6 W/kg as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

[IEEE Std 1528™-2003](#): IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.

[FCC Part 2.1093 Radiofrequency Radiation Exposure Evaluation: Portable Devices](#)

[KDB 447498 D01 Mobile Portable RF Exposure v05r02](#): Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies

[KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r03](#): SAR Measurement Requirements for 100 MHz to 6 GHz

[KDB865664 D02 SAR Reporting v01r01](#): RF Exposure Compliance Reporting and Documentation Considerations

[KDB248227 D01 802.11 Wi-Fi SAR v02r01](#): SAR GUIDANCE FOR IEEE 802.11 (Wi-Fi) TRANSMITTERS

[KDB648474 D04 Handset SAR V01r02](#): SAR Evaluation Considerations for Wireless Handsets.

[KDB941225 D06 Hot Spot SAR v02](#): SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities

[KDB941225 D01 3G SAR Procedures v03](#): 3G MEAUREMENT PROCEDURES

## 1.2 Summary of Maximum SAR Value

The maximum results of Specific Absorption Rate (SAR) found during testing for EUT are as follows:

Head SAR Configuration

Mode	Test Position	Channel /Frequency(MHz)	Limit SAR <sub>1g</sub> 1.6 W/kg	
			Highest Tested 1g-SAR(W/Kg)	Highest Scaled Maximum SAR(W/Kg)
GSM 850	Left Cheek	251/848.8	0.141	0.145
GSM 1900	Right Cheek	512/1850.2	0.483	0.546
WCDMA Band II	Right Cheek	9262/1852.4	0.502	0.542
WCDMA Band V	Right Cheek	4132/826.4	0.100	0.112

**Body-Worn& Hotspot Mode Configuration**

Mode	Test Position	Channel /Frequency(MHz)	Limit SAR <sub>1g</sub> 1.6 W/kg	
			Highest Tested 1g-SAR(W/Kg)	Highest Scaled Maximum SAR(W/Kg)
GSM 850	Rear Side	251/848.8	0.496	0.521
GSM 1900	Bottom Edge	512/1850.2	0.423	0.478
WCDMA Band II	Bottom Edge	9262/1852.4	0.559	0.604
WCDMA Band V	Rear Side	4132/826.4	0.263	0.295

**Highest Simultaneous transmission SAR Summary**

Exposure Position	Transmission Combination	Highest Simultaneous Maximum SAR(W/Kg)
Head	GSM1900+WLAN	0.920
Body-worn& Hotspot Mode	WCDMA Band II+ WLAN	1.004

**Note:**

1. This device is compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6W/Kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1, and had been tested in accordance with measurement methods and procedures specified in IEEE 1528-2003 and the relevant KDB files.
2. This EUT owns SIM1 and SIM2, contains two SIM card slots, and the EUT supports Dual Standby but without Dual Active, they share the same software and hardware(RF module and Power supply, etc.). When a call is established on one SIM, the other is no longer active, callers to the other SIM will hear a message that the phone is switched off or they'll be redirected to voicemail. After pre-scan test, the SIM 1 which supported all band(WCDMA,GSM) was the worst case, so we tested and recorded the results according to SIM 1.
3. This EUT owns G Sensor/M Sensor/L+P Sensor, they will not affect the RF characteristics, no power reduction concerned in this report.
4. This EUT is Class B – EUT, cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.



## 1.3 Test Facility

### 1.3.1 Address of the test laboratory

**Shenzhen General Testing & Inspection Technology Co., Ltd.**

Add: 1F, 2 Block, Jiaquan Building, Guanlan High-tech Park Baoan District, Shenzhen, Guangdong, China.

### 1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

#### IC Registration No.: 9783A

The 3m alternate test site of Shenzhen GTI Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Aug, 2011.

#### FCC-Registration No.: 214666

Shenzhen GTI Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 214666, Sep 19, 2011

## 1.4 Measurement Uncertainty (300MHz-3GHz)

No.	Error Description	Type	Uncertainty Value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degre e of freedom
Measurement System										
1	Probe calibration	B	6.55%	N	1	1	1	6.55%	6.55%	$\infty$
2	Axial isotropy	B	4.70%	R	$\sqrt{3}$	0.7	0.7	1.90%	1.90%	$\infty$
3	Hemispherical isotropy	B	9.60%	R	$\sqrt{3}$	0.7	0.7	3.88%	3.88%	$\infty$
4	Boundary Effects	B	1.00%	R	$\sqrt{3}$	1	1	0.58%	0.58%	$\infty$
5	Probe Linearity	B	4.70%	R	$\sqrt{3}$	1	1	2.71%	2.71%	$\infty$
6	Detection limit	B	1.00%	R	$\sqrt{3}$	1	1	0.58%	0.58%	$\infty$
7	Readout Electronics	A	0.30%	N	1	1	1	0.30%	0.30%	$\infty$
8	Response Time	B	0.00%	R	$\sqrt{3}$	1	1	0.00%	0.00%	$\infty$
9	Integration Time	B	0.00%	R	$\sqrt{3}$	1	1	0.00%	0.00%	$\infty$
10	RF ambient conditions-noise	B	1.00%	R	$\sqrt{3}$	1	1	0.58%	0.58%	$\infty$
11	RF ambient conditions-reflection	B	1.00%	R	$\sqrt{3}$	1	1	0.58%	0.58%	$\infty$
12	Probe positioned mech. restrictions	B	0.80%	R	$\sqrt{3}$	1	1	0.46%	0.46%	$\infty$

13	Probe positioning with respect to phantom shell	B	6.70%	R	$\sqrt{3}$	1	1	3.87%	3.87%	$\infty$
14	Max.SAR evaluation	B	2.00%	R	$\sqrt{3}$	1	1	1.15%	1.15%	$\infty$
Test Sample Related										
15	Test sample positioning	A	1.86%	N	1	1	1	1.86%	1.86%	$\infty$
16	Device holder uncertainty	A	1.70%	N	1	1	1	1.70%	1.70%	$\infty$
17	Drift of output power	B	5.00%	R	$\sqrt{3}$	1	1	2.89%	2.89%	$\infty$
Phantom and Set-up										
18	Phantom uncertainty	B	4.00%	R	$\sqrt{3}$	1	1	2.31%	2.31%	$\infty$
19	Liquid conductivity (target)	B	5.00%	R	$\sqrt{3}$	0.64	0.4 <sub>3</sub>	1.85%	1.24%	$\infty$
20	Liquid conductivity (meas.)	A	2.50%	N	1	0.64	0.4 <sub>3</sub>	1.60%	1.08%	$\infty$
21	Liquid permittivity (target)	B	5.00%	R	$\sqrt{3}$	0.60	0.4 <sub>9</sub>	1.73%	1.41%	$\infty$
22	Liquid permittivity (meas.)	A	2.50%	N	1	0.60	0.4 <sub>9</sub>	1.50%	1.23%	$\infty$
Combined standard uncertainty	$u_c = \sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$	/	/	/	/	/	/	10.87%	10.63%	$\infty$
Expanded uncertainty (confidence interval of 95 %)	$u_e = 2u_c$	/	R	K=2	/	/	/	21.73%	21.27%	$\infty$

## 1.5 System Check Uncertainty

No.	Error Description	Type	Uncertainty Value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement System										
1	Probe calibration	B	6.55%	N	1	1	1	6.55%	6.55%	$\infty$
2	Axial isotropy	B	4.70%	R	$\sqrt{3}$	0.7	0.7	1.90%	1.90%	$\infty$
3	Hemispherical isotropy	B	9.60%	R	$\sqrt{3}$	0.7	0.7	3.88%	3.88%	$\infty$
4	Boundary Effects	B	1.00%	R	$\sqrt{3}$	1	1	0.58%	0.58%	$\infty$
5	Probe Linearity	B	4.70%	R	$\sqrt{3}$	1	1	2.71%	2.71%	$\infty$
6	Detection limit	B	1.00%	R	$\sqrt{3}$	1	1	0.58%	0.58%	$\infty$
7	Readout Electronics	A	0.30%	N	1	1	1	0.30%	0.30%	$\infty$
8	Response Time	B	0.00%	R	$\sqrt{3}$	1	1	0.00%	0.00%	$\infty$

9	Integration Time	B	0.00%	R	$\sqrt{3}$	1	1	0.00%	0.00%	$\infty$
10	RF ambient conditions-noise	B	1.00%	R	$\sqrt{3}$	1	1	0.58%	0.58%	$\infty$
11	RF ambient conditions-reflection	B	1.00%	R	$\sqrt{3}$	1	1	0.58%	0.58%	$\infty$
12	Probe positioned mech. restrictions	B	0.80%	R	$\sqrt{3}$	1	1	0.46%	0.46%	$\infty$
13	Probe positioning with respect to phantom shell	B	6.70%	R	$\sqrt{3}$	1	1	3.87%	3.87%	$\infty$
14	Max.SAR evaluation	B	2.00%	R	$\sqrt{3}$	1	1	1.15%	1.15%	$\infty$
Dipole Related										
15	Dev. of experimental dipole	B	5.50%	R	$\sqrt{3}$	1	1	3.18%	3.18%	$\infty$
16	Dipole Axis to Liquid Dist.	B	2.00%	R	$\sqrt{3}$	1	1	1.15%	1.15%	$\infty$
17	Input power & SAR drift	B	3.40%	R	$\sqrt{3}$	1	1	1.96%	1.96%	$\infty$
Phantom and Setup										
18	Phantom uncertainty	B	4.00%	R	$\sqrt{3}$	1	1	2.31%	2.31%	$\infty$
19	SAR correction	B	1.90%	R	$\sqrt{3}$	1	$\frac{0.8}{4}$	1.10%	0.92%	
20	Liquid conductivity (meas.)	A	2.50%	N	1	$\frac{0.7}{8}$	$\frac{0.7}{1}$	1.95%	1.78%	$\infty$
21	Liquid permittivity (meas.)	A	2.50%	N	1	$\frac{0.2}{6}$	$\frac{0.2}{6}$	0.65%	0.65%	$\infty$
22	Temp. unc. - Conductivity	B	1.70%	R	$\sqrt{3}$	$\frac{0.7}{8}$	$\frac{0.7}{1}$	0.77%	0.70%	$\infty$
23	Temp. unc. - Permittivity	B	0.30%	R	$\sqrt{3}$	$\frac{0.2}{3}$	$\frac{0.2}{6}$	0.04%	0.05%	$\infty$
Combined standard uncertainty	$u_c = \sqrt{\sum_{t=1}^{23} c_t^2 u_t^2}$		/	/	/	/	/	10.65%	10.60 %	$\infty$
Expanded uncertainty (confidence interval of 95 %)	$u_e = 2u_c$		/	R	K=2	/	/	21.31%	21.20 %	$\infty$

## 2. GENERAL INFORMATION

### 2.1 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	22°C
Relative Humidity:	35%-55 %
Air Pressure:	101 kPa

### 2.2 General Description of EUT

Product Name:	3G smart phone
Model/Type reference:	Sync 5c
Test Device	Prototype
Power supply:	DC 3.7V from battery
Adapter information	Model:D12-501000F Input: 100-240V, 50/60Hz 0.2A Output:DC5V---1 A
Hardware version:	FS031-MB-V0.3A
Software version:	STK_Sync5c_MY27_20150929_V1.0

#### 2G

Operation Band:	GSM850, PCS1900
Supported Type:	GSM/GPRS
Power Class:	GSM850:Power Class 4 PCS1900:Power Class 1
Modulation Type:	GMSK for GSM/GPRS
GSM Release Version	R99
GPRS Multislot Class	12
GSM/GPRS Transfer Mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
Antenna type:	PIFA Antenna
Antenna gain:	GSM850:-2 dB; PCS1900:-3 dB

#### WCDMA

Operation Band:	FDD Band II& Band V
Power Class:	Power Class 3
Modulation Type:	QPSK for WCDMA/HSUPA/HSDPA
WCDMA Release Version:	R99

HSDPA Release Version:	Release 7, CAT14
HSUPA Release Version:	Release 7, CAT7
DC-HSUPA Release Version:	Not Supported
Antenna type:	PIFA Antenna
Antenna gain:	WCDMA850 -2 dBi / WCDMA1900 -3 dBi
<b>WIFI</b>	
Supported type:	802.11b/802.11g/802.11n(H20)
Modulation:	802.11b: DSSS 802.11g/802.11n(H20): OFDM
Operation frequency:	802.11b/802.11g/802.11n(H20): 2412MHz~2462MHz
Channel number:	802.11b/802.11g/802.11n(H20): 11
Channel separation:	5MHz
Antenna type:	PIFA Antenna
Antenna gain:	-3 dBi
<b>Bluetooth</b>	
Version:	Supported BT2.1+EDR
Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	PIFA Antenna
Antenna gain:	-3 dBi

## 2.3 Description of Test Modes

The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power the EUT has been tested under typical operating condition and The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

## 2.4 Measurement Instruments List

Test Equipment	Manufacturer	Type/Model	Serial Number	Calibrated until
Data Acquisition Electronics DAEx	SPEAG	DAE4	1315	Jul. 21,2016
E-field Probe	SPEAG	ES3DV3	3292	Aug 14,2016
System Validation Dipole 835V2	SPEAG	D835V2	4d134	July 23,2016
System Validation Dipole 1900V2	SPEAG	D1900V2	5d150	July 24,2016
Dielectric Probe Kit	SPEAG	DAK-3.5	0126	Mar. 05,2016
Power meter	Agilent	N914A	MY52090010	Mar. 05,2016
Power sensor	Agilent	E9304A	MY52140008	Mar. 05,2016
Power sensor	Agilent	E9301H	MY54470001	Mar. 05,2016
Network analyzer	Agilent	N9923A	MY51491493	Mar. 05,2016
Signal Generator	Agilent	E8257D	MY46521908	Jun. 05,2016
Dual Directional Coupler	Agilent	778D	MY48220612	Mar. 05,2016
Power Amplifier	Mini-Circuits	ZHL-42W	QA1202003	Mar. 05,2016
Attenuator 3dB	Agilent	8491A	MY39268101	Mar. 05,2016
Universal Radio Communication Tester	ROHDE & SCHWARZ	CMU200	112012	Oct 15,2016

Note: 1. The Cal. Interval was one year.

### 3. SAR MEASUREMENTS SYSTEM CONFIGURATION

### 3.1 SAR MEASUREMENT SET-UP

The DASY5 system for performing compliance tests consists of the following items:

A standard high precision 6-axis robot (Stäubli RX family) with controller and software.

An arm extension for accommodating the data acquisition electronics (DAE).

A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.

A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

A unit to operate the optical surface detector which is connected to the EOC.

The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.

The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 2003. DASY5 software and SEMCAD data evaluation software.


Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.

The generic twin phantom enabling the testing of left-hand and right-hand usage.

The device holder for handheld Mobile Phones.

Tissue simulating liquid mixed according to the given recipes.

System validation dipoles allowing to validate the proper functioning of the system.

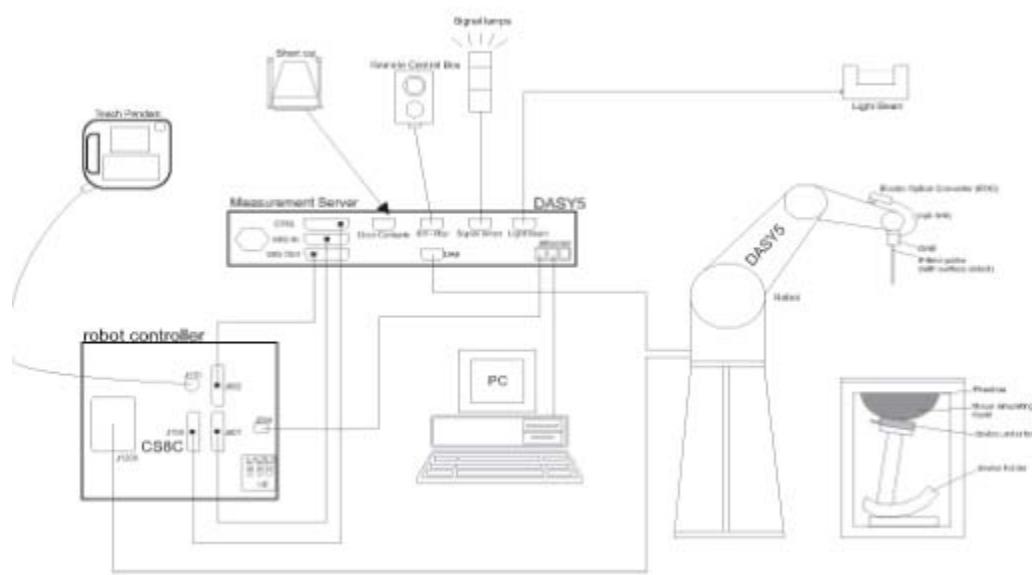

### 3.2 DASY5 E-FIELD PROBE SYSTEM

The SAR measurements were conducted with the dosimetric probe ES3DV3 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

#### Probe Specification:


Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available.
Frequency	10 MHz to 4 GHz; Linearity: $\pm 0.2$ dB (30 MHz to 4 GHz)
Directivity	$\pm 0.2$ dB in HSL (rotation around probe axis) $\pm 0.3$ dB in tissue material (rotation normal to probe axis)
Dynamic Range	5 $\mu$ W/g to $> 100$ W/kg; Linearity: $\pm 0.2$ dB
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm
Application	General dosimetry up to 4 GHz Dosimetry in strong gradient fields Compliance tests of Mobile Phones
Compatibility	DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI



#### Isotropic E-Field Probe:

The isotropic E-Field probe has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change.

The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

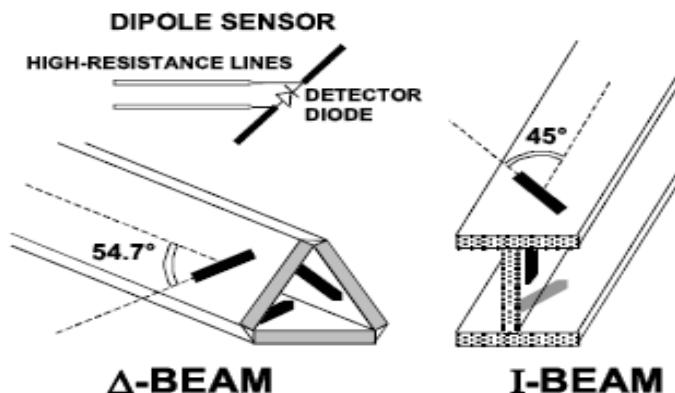

### 3.3 PHANTOMS

The phantom used for all tests i.e. for both system checks and device testing, was the twin-headed "SAM Phantom", manufactured by SPEAG. The SAM twin phantom is a fibreglass shell phantom with 2mm shell thickness (except the ear region, where shell thickness increases to 6mm).

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.



SAM Twin Phantom

### 3.4 DEVICE HOLDER

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the DASY system.

The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.



Device holder supplied by SPEAG

### 3.5 SCANNING PROCEDURE

The DASY5 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

The "reference" and "drift" measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT's output power and should vary max.  $\pm 5\%$ .

The "surface check" measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above  $\pm 0.1\text{mm}$ ). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe

(It does not depend on the surface reflectivity or the probe angle to the surface within  $\pm 30^\circ$ .)

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

### Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r03 SAR measurement 100 MHz to 6 GHz.

	$\leq 3$ GHz	$> 3$ GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	$5 \pm 1$ mm	$\frac{3}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
	$\leq 2$ GHz: $\leq 15$ mm $2 - 3$ GHz: $\leq 12$ mm	$3 - 4$ GHz: $\leq 12$ mm $4 - 6$ GHz: $\leq 10$ mm
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

### Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r03 SAR measurement 100 MHz to 6 GHz.

Maximum zoom scan spatial resolution: $\Delta x_{Zoom}$ , $\Delta y_{Zoom}$		$\leq 2$ GHz: $\leq 8$ mm $2 - 3$ GHz: $\leq 5$ mm*	$3 - 4$ GHz: $\leq 5$ mm* $4 - 6$ GHz: $\leq 4$ mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		$\leq 5$ mm  $3 - 4$ GHz: $\leq 4$ mm $4 - 5$ GHz: $\leq 3$ mm $5 - 6$ GHz: $\leq 2$ mm
	graded grid	$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm  $3 - 4$ GHz: $\leq 3$ mm $4 - 5$ GHz: $\leq 2.5$ mm $5 - 6$ GHz: $\leq 2$ mm
		$\Delta z_{Zoom}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$
Minimum zoom scan volume	x, y, z	$\geq 30$ mm	$3 - 4$ GHz: $\geq 28$ mm $4 - 5$ GHz: $\geq 25$ mm $5 - 6$ GHz: $\geq 22$ mm

Note:  $\delta$  is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

\* When zoom scan is required and the *reported* SAR from the *area scan based 1-g SAR estimation* procedures of KDB 447498 is  $\leq 1.4$  W/kg,  $\leq 8$  mm,  $\leq 7$  mm and  $\leq 5$  mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

## Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

## Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5% (0.21dB), the SAR will be retested.

## Spatial Peak Detection

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:



- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

### 3.6 DATA STORAGE AND EVALUATION

## Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension ".DA4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [W/kg], [mW/cm<sup>2</sup>], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

## Data Evaluation

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Normi, ai0, ai1, ai2
	- Conversion factor	ConvFi
	- Diode compression point	Dcp1
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	$\sigma$
	- Density	$\rho$

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the

corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcpi}$$

With  $V_i$  = compensated signal of channel i  $(i = x, y, z)$   
 $U_i$  = input signal of channel i  $(i = x, y, z)$   
 $cf$  = crest factor of exciting field (DASY parameter)  
 $dcpi$  = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$E - \text{fieldprobes} : \quad E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

$$H - \text{fieldprobes} : \quad H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

With  $V_i$  = compensated signal of channel i  $(i = x, y, z)$   
 $Norm_i$  = sensor sensitivity of channel i  $(i = x, y, z)$   
[ $\text{mV}/(\text{V}/\text{m})^2$ ] for E-field Probes  
 $ConvF$  = sensitivity enhancement in solution  
 $a_{ij}$  = sensor sensitivity factors for H-field probes  
 $f$  = carrier frequency [GHz]  
 $E_i$  = electric field strength of channel i in V/m  
 $H_i$  = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1'000}$$

With  $SAR$  = local specific absorption rate in W/kg  
 $E_{tot}$  = total field strength in V/m  
 $\sigma$  = conductivity in [ $\text{mho}/\text{m}$ ] or [ $\text{Siemens}/\text{m}$ ]  
 $\rho$  = equivalent tissue density in  $\text{g}/\text{cm}^3$

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.

## 4. TISSUE SIMULATING LIQUID

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15cm. For head SAR testing the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5% are listed in 4.2.

### 4.1 The composition of the tissue simulating liquid

Ingredient	835MHz		1900MHz	
	Head	Body	Head	Body
Water	41.45	52.5	55.242	69.91
Salt	1.45	1.40	0.306	0.13
Sugar	56	45.0	0.00	0.00
Preventol	0.10	0.10	0.00	0.00
HEC	1.00	1.00	0.00	0.00
DGBE	0.00	0.00	44.452	29.96

### 4.2 Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using SPEAG Dielectric Probe Kit and Agilent Network Analyzer N9923A.

Frequency (MHz)	Dielectric Parameters ( $\pm 5\%$ )		Tissue Temp [°C]	Test Date	
835	head	$\epsilon_r$ 39.425-43.575	$\delta[\text{s/m}]$ 0.855-0.945	22	Nov., 19,2015
		41.50	0.89		
	body	$\epsilon_r$ 52.44-57.96	$\delta[\text{s/m}]$ 0.9215-1.0185	22	Nov., 19,2015
		55.87	0.96		


Frequency (MHz)	Dielectric Parameters ( $\pm 5\%$ )		Tissue Temp [°C]	Test Date	
1900	head	$\epsilon_r$ 38.00-42.00	$\delta[\text{s/m}]$ 1.33-1.47	22	Nov.,20,2015
		39.75	1.45		
	body	$\epsilon_r$ 50.635-55.965	$\delta[\text{s/m}]$ 1.444-1.596	22	Nov,20,2015
		51.05	1.57		

## 5. System Check

The purpose of the system check is to verify that the system operates within its specifications at the device test frequency. The system check is simple check of repeatability to make sure that the system works correctly at the time of the compliance test;

System check results have to be equal or near the values determined during dipole calibration with the relevant liquids and test system ( $\pm 10\%$ ).

System check is performed regularly on all frequency bands where tests are performed with the DASY5 system.

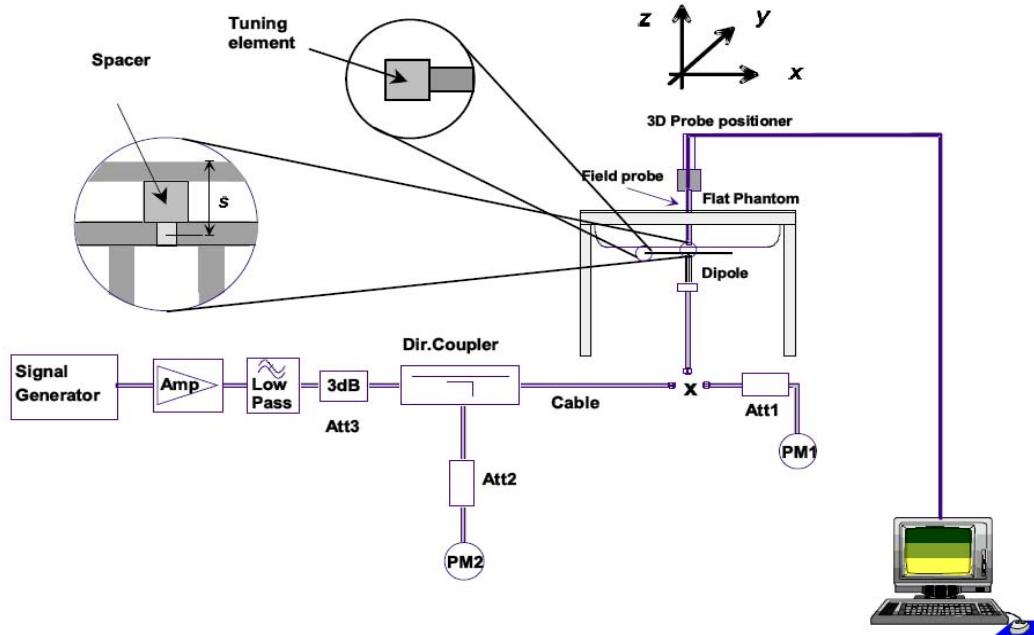

The output power on dipole port must be calibrated to 24 dBm (250mW) before dipole is connected.



Photo of Dipole Setup



## System Check in Head Tissue Simulating Liquid

Measurement is made at temperature 22.0 °C and relative humidity 55%.						Measurement Date
Verification results	Frequency (MHz)	Target value (W/kg)	Measured 250mW value (W/kg)	Normalized 1W value (W/kg)	Deviation	
	835	9.62	2.44	9.76	1.46%	Nov.,19,2015
	1900	38.30	9.71	38.84	1.41%	Nov.,20,2015

Note : 1. The test plots see Chapter9.  
2. Target Values used derive from the calibration certificate

## System Check in Body Tissue Simulating Liquid


Measurement is made at temperature 22.0 °C and relative humidity 55%.						Measurement Date
Verification results	Frequency (MHz)	Target value (W/kg)	Measured 250mW value (W/kg)	Normalized 1W value (W/kg)	Deviation	
	835	9.77	2.39	9.56	-0.62%	Nov.,19,2015
	1900	39.90	9.86	39.44	2.98%	Nov.,20,2015

Note : 1. The test plots see Chapter9.  
2. Target Values used derive from the calibration certificate

## 6. EUT TEST POSITION


### 6.1 Define Two Imaginary Lines on the Handset

- (1) The vertical centerline passes through two points on the front side of the handset the midpoint of the width  $w_t$  of the handset at the level of the acoustic output, and the midpoint of the width  $w_b$  of the handset.
- (2) The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- (3) The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

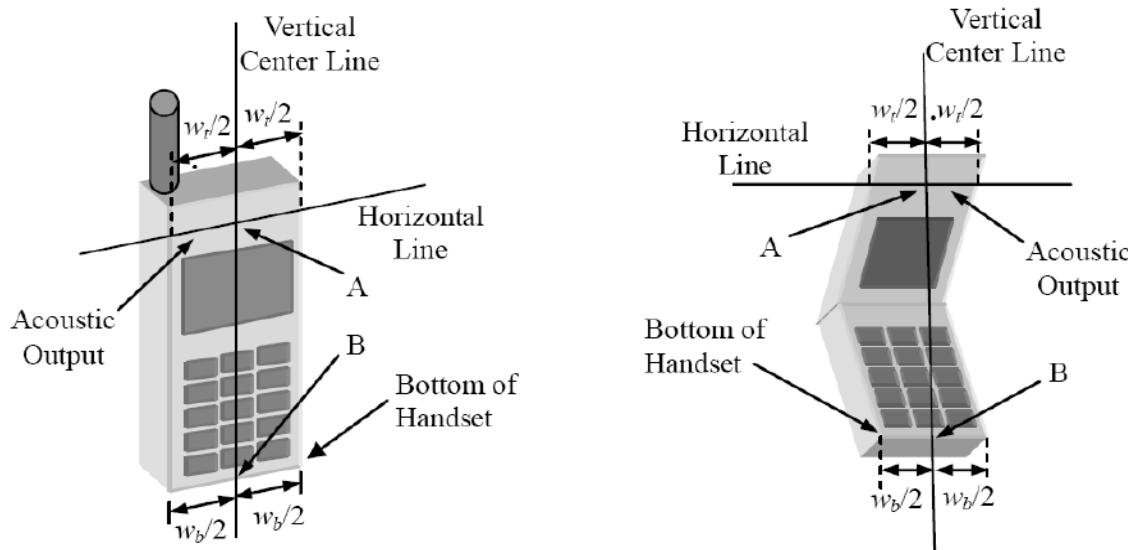


### 6.2 Cheek Position

- (1) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- (2) To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost

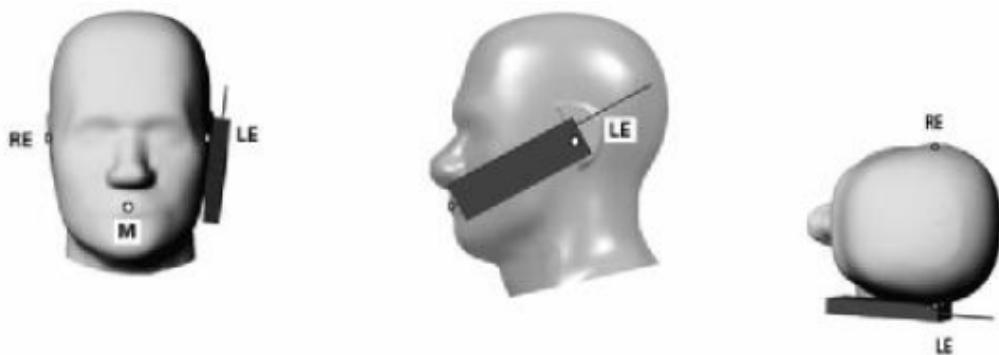


### 6.3 Tilt Position

- (1) To position the device in the —cheek position described above.
- (2) While maintaining the device in the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until with the ear is lost.

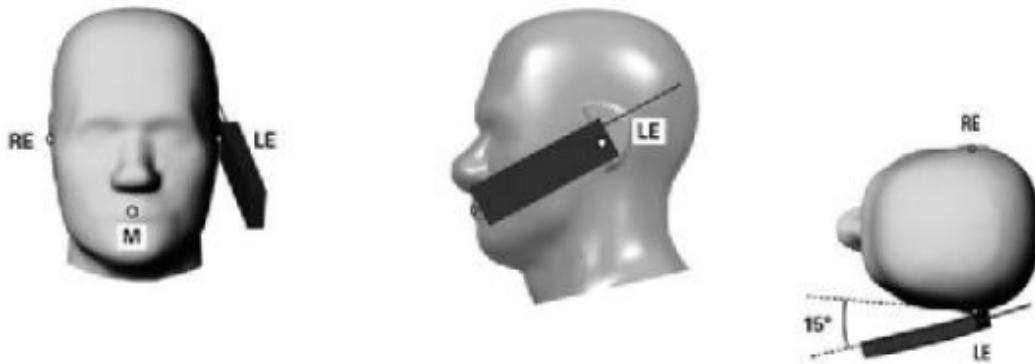

### 6.4 Body Worn Position

- (1) To position the EUT parallel to the phantom surface.
- (2) To adjust the EUT parallel to the flat phantom.
- (3) To adjust the distance between the EUT surface and the flat phantom to 10mm.

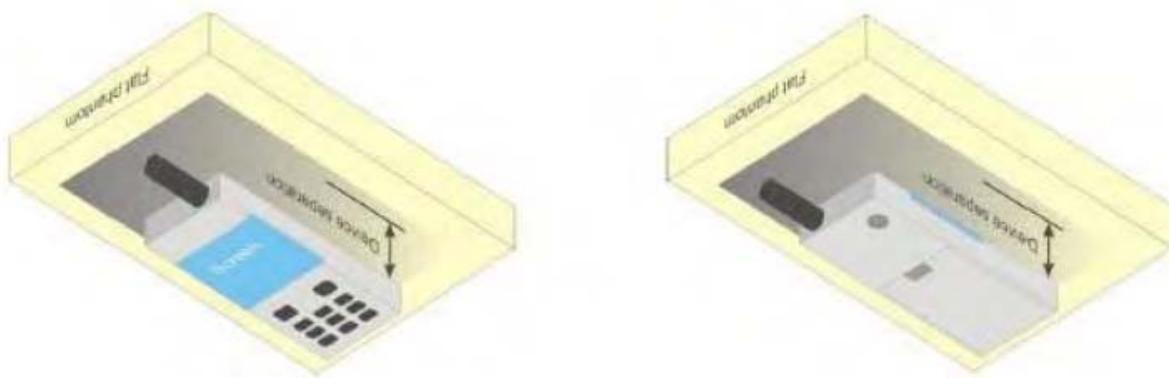

## 7. Measurement Procedures

The measurement procedures are as follows:

### 7.1 Conducted power measurement

- a) For WWAN power measurement, use base station simulator connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- b) Read the WWAN RF power level from the base station simulator.
- c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously Transmission, at maximum RF power in each supported wireless interface and frequency band.
- d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power.

### 7.2 SAR measurement

#### 7.2.1 GSM Test Configuration

SAR tests for GSM 850 and GSM 1900, a communication link is set up with a System Simulator (SS) by air link. The power level is set to "5" for GSM 850, set to "0" for GSM 1900. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslots is 5.

According to specification 3GPP TS 51.010, the maximum power of the GSM can do the power reduction for the multi-slot. The allowed power reduction calculation method are shown in chapter8.1 NOTES 1).

#### 7.2.2 WCDMA Test Configuration

##### 7.2.2.1 3G SAR Test Reduction Procedure

In the following procedures, the mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as "otherwise" in the applicable procedures; SAR measurement is required for the secondary mode.

##### 7.2.2.2 Output power Verification

Maximum output power is verified on the high, middle and low channels according to procedures described in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all "1's" for WCDMA/HSDPA or by applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable

physical channel configurations (DPCCH, DPDCH<sub>n</sub> and spreading codes, HSDPA, HSPA) are required in the SAR report. All configurations that are not supported by the handset or cannot be measured due to technical or equipment limitations must be clearly identified.

#### 7.2.2.3 Head SAR

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”. The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure.

#### 7.2.2.4 Body-Worn Accessory SAR

SAR for body-worn accessory configurations is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCH<sub>n</sub> configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCH<sub>n</sub>, for the highest reported body-worn accessory exposure SAR configuration in 12.2 kbps RMC. When more than 2 DPDCH<sub>n</sub> are supported by the handset, it may be necessary to configure additional DPDCH<sub>n</sub> using FTM (Factory Test Mode) or other chipset based test approaches with parameters similar to those used in 384 kbps and 768 kbps RMC.

#### 7.2.2.5 Handsets with Release 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body-worn accessory configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSDPA using the HSDPA body SAR procedures in the “Release 5 HSDPA Data Devices” section of KDB 941225 D01, for the highest reported SAR body-worn accessory exposure configuration in 12.2 kbps RMC. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

**Release 5 HSDPA Data Devices:** The following procedures are applicable to HSDPA data devices operating under 3GPP Release 5. SAR is required for devices in body-worn accessory and other body exposure conditions, including handsets and data modems operating in various electronic devices. HSDPA operates in conjunction with WCDMA and requires an active DPCCH. The default test configuration is to measure SAR in WCDMA with HSDPA remain inactive, to establish a radio link between the test device and a communication test set using a 12.2 kbps RMC configured in Test Loop Mode 1. SAR for HSDPA is selectively measured using the highest reported SAR configuration in WCDMA, with an FRC in H-set 1 and a 12.2 kbps RMC. SAR is selectively confirmed for other physical channel configurations (DPCCH & DPDCH<sub>n</sub>) according to exposure conditions, device operating capabilities and maximum output power specified for production units, including tune-up tolerance by applying the 3G SAR test reduction procedures. Maximum output power is verified according to the applicable versions of 3GPP TS 34.121. SAR must be measured based on these maximum output conditions and requirements in KDB Publication 447498, with respect to the UE Categories, and explained in the SAR report.

When voice transmission in next to the ear head exposure conditions is applicable to a WCDMA/HSDPA data device, head SAR is measured according to the ‘Head SAR’ procedures in section 7.2.2.3. SAR for body exposure configurations is measured according to the ‘Body-Worn Accessory SAR’ procedures in the section 7.2.2.4. The 3G SAR test reduction procedure is applied to HSDPA body SAR with 12.2 kbps RMC as the primary mode. Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, for the highest reported SAR configuration in 12.2 kbps RMC without HSDPA.

HSDPA should be configured according to the UE category of a test device. The number of HSDSCH/HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors ( $\beta_c$ ,  $\beta_d$ ), and HS-DPCCH power offset parameters ( $\Delta_{ACK}$ ,  $\Delta_{NACK}$ ,  $\Delta_{CQI}$ ) should be set according to values indicated in Table1. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set.

**Table 1: Subtests for WCDMA Release 5 HSDPA**

Sub-set	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{hs}$ (note 1)	CM(dB) (note 2)	MPR(dB)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (note 3)	15/15 (note 3)	64	12/15 (note 3)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note1:  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$   
Note2: CM=1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ .  
Note3: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period(TF1,TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1,TF1) to  $\beta_c=11/15$  and  $\beta_d=15/15$ .

### 7.2.2.6 Handsets with Release 6 HSPA (HSDPA/HSUPA)

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body-worn accessory configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSPA using the HSPA body SAR procedures in the “Release 6 HSPA Data Devices” section of KDB 941225 D01, for the highest reported body-worn accessory exposure SAR configuration in 12.2 kbps RMC. When VOIP is applicable for next to the ear head exposure in HSPA, the 3G SAR test reduction procedure is applied to HSPA with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body-worn accessory measurements is tested for next to the ear head exposure.

**Release 6 HSPA Data Devices:** The following procedures are applicable to HSPA (HSUPA/HSDPA) data devices operating under 3GPP Release 6. SAR is required for devices in body-worn accessory and other body exposure conditions, including handsets and data modems operating in various electronic devices. HSUPA operates in conjunction with WCDMA and HSDPA. SAR is initially measured in WCDMA test configurations with HSPA remain inactive. The default test configuration is to establish a radio link between the test device and a communication test set to configure a 12.2 kbps RMC in Test Loop Mode 1. SAR for HSPA is selectively measured with HS-DPCCH, E-DPCCH and E-DPDCH, all enabled, along with a 12.2 kbps RMC using the highest reported SAR configuration in WCDMA with 12.2 kbps RMC only. An FRC is configured according to HS-DPCCH Sub-test 1 using H-set 1 and QPSK. HSPA is configured according to E-DCH Sub-test 5 requirements. SAR for other HSPA sub-test configurations is confirmed selectively according to exposure conditions, E-DCH UE Category and maximum output power of production units, including tune-up tolerance by applying the 3G SAR test reduction procedure. Maximum output power is verified according to procedures in applicable versions of 3GPP TS 34.121. SAR must be measured based on these maximum output conditions and requirements in KDB Publication 447498, with respect to the UE Categories for HS-DPCCH and HSPA, and explained in the SAR report.

Due to inner loop power control requirements in HSPA, a communication test set is required for output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSPA are configured according to the  $\beta$  values indicated in Table 2 and other applicable procedures described in the 'WCDMA Test Configuration' and 'Release 5 HSDPA Data Devices' sections of this report.

**Table 2 : Sub-Test 5 Setup for Release 6 HSUPA**

Sub-set	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{hs}^{(1)}$	$\beta_{ec}$	$\beta_{ed}$	$\beta_{ed}$ (SF)	$\beta_{ed}$ (codes)	CM <sup>(2)</sup> (dB)	MPR (dB)	AG <sup>(4)</sup> Index	E-TFCI
1	11/15 <sup>(3)</sup>	15/15 <sup>(3)</sup>	64	11/15 <sup>(3)</sup>	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}47/15$ $\beta_{ed2}47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 <sup>(4)</sup>	15/15 <sup>(4)</sup>	64	15/15 <sup>(4)</sup>	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1:  $\Delta$ ACK,  $\Delta$ NACK and  $\Delta$ CQI = 8  $\Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$ .  
Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS- DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.  
Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .  
Note 4: For subtest 5 the  $\beta_c/\beta_d$  ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 14/15$  and  $\beta_d = 15/15$ .  
Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Figure 5.1g.  
Note 6:  $\beta_{ed}$  cannot be set directly; it is set by Absolute Grant Value.

### 7.2.2.7 HSPA, HSPA+ Test Configuration

SAR test exclusion may apply to 3GPP Rel. 6 HSPA, Rel. 7 HSPA+.

SAR test exclusion for HSPA, HSPA+ is determined according to the following:

The HSPA procedures are applied to configure 3GPP Rel. 6 HSPA devices in the required sub-test mode(s) to determine SAR test exclusion.

SAR is required for Rel. 7 HSPA+ when SAR is required for Rel. 6 HSPA; otherwise, the 3G SAR test reduction procedure is applied to (uplink) HSPA+ with 12.2 kbps RMC as the primary mode. Power is measured for HSPA+ that supports uplink 16 QAM according to configurations in Table C.11.1.4 of 3GPP TS 34.121-1 to determine SAR test reduction.

### 7.2.3 WIFI Test Configuration

For WLAN SAR testing, WLAN engineering testing software installed on the DUT can provide continuous transmitting RF signal. The Tx power is set to maximum limit for 802.11 b mode by software.

For the 802.11b/g/n SAR tests, the EUT is operated at the RF continuous emission mode. For each transmission mode configuration, power must be measured for the highest and lowest channels; and at the mid-band channel(s) when there are at least 3 channels. When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11g/n mode is used for SAR measurement.

Per KDB447498 4.3.3, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g SAR for the mid-band or highest output power channel is:  $\leq 0.8 \text{ W/kg}$ , when the transmission band is  $\leq 100 \text{ MHz}$ .

SAR is not required for 2.4 GHz 802.11g/n OFDM configurations when KDB Publication 447498 SAR test exclusion applies to the OFDM configuration or when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2 \text{ W/kg}$ .

## 8. TEST CONDITIONS AND RESULTS

### 8.1 Conducted Power Results

Max Conducted power measurement results and power drift from tune-up tolerance provide by manufacturer:

**Conducted power measurement results (GSM850/1900)**

Mode	Txslot	Burst Average Power (dBm)			Tune-up Limit (dBm)	Calculation (dB)	Frame-Averaged Power (dBm)			Tune-up Limit (dBm)
		128	190	251			128	190	251	
<b>GSM 850</b>	1 Txslot	32.18	32.1	32.38	32.5	-9.03	23.15	23.07	23.35	23.47
<b>GPRS 850 (GMSK)</b>	1 Txslot	32.18	32.1	32.24	32.5	-9.03	23.15	23.07	23.21	23.47
	<b>2 Txslot</b>	<b>30.18</b>	<b>30.07</b>	<b>30.29</b>	<b>30.5</b>	<b>-6.02</b>	<b>24.16</b>	<b>24.05</b>	<b>24.27</b>	<b>24.48</b>
	3 Txslot	28.07	27.85	28.13	28.5	-4.26	23.81	23.59	23.87	24.24
	4 Txslot	26.95	26.83	26.92	27.5	-3.01	23.94	23.82	23.91	24.49
<b>Mode</b>	<b>Txslot</b>	<b>Burst Average Power (dBm)</b>			<b>Tune-up Limit (dBm)</b>	<b>Calculation (dB)</b>	<b>Frame-Averaged Power (dBm)</b>			<b>Tune-up Limit (dBm)</b>
		<b>512</b>	<b>661</b>	<b>810</b>			<b>512</b>	<b>661</b>	<b>810</b>	
<b>PCS 1900</b>	1 Txslot	29.47	29.01	29.22	30	-9.03	20.44	19.98	20.19	20.97
<b>GPRS 1900 (GMSK)</b>	1 Txslot	29.5	29.00	29.19	30	-9.03	20.47	19.97	20.16	20.97
	<b>2 Txslot</b>	<b>27.46</b>	<b>27.08</b>	<b>27.15</b>	<b>28</b>	<b>-6.02</b>	<b>21.44</b>	<b>21.06</b>	<b>21.13</b>	<b>21.98</b>
	3 Txslot	25.31	24.79	25.04	25.5	-4.26	21.05	20.53	20.78	21.24
	4 Txslot	24.30	23.73	23.97	24.5	-3.01	21.29	20.72	20.96	21.49

NOTES:

1) Division Factors

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

2) According to the conducted power as above, the GPRS measurements are performed with 2Txslots for GPRS 850 and GPRS 1900.

**Conducted power measurement results (WCDMA Band II)**

Item	Band	FDD Band II result (dBm)			Tune-up Limit (dBm)
		Test Channel			
	ARFCN	9262	9400	9538	
AMR	12.2kbps AMR	22.42	22.16	22.17	23
RMC	12.2kbps RMC	22.68	22.28	22.26	23
HSDPA	Sub - Test 1	22.39	22.04	22.06	23
	Sub - Test 2	22.44	22.15	22.06	23
	Sub - Test 3	22.25	21.74	21.79	22.5
	Sub - Test 4	22.12	21.71	21.71	22.5
HSUPA	Sub - Test 1	22.31	21.90	22.01	23
	Sub - Test 2	22.30	21.92	21.91	23
	Sub - Test 3	22.03	21.60	21.58	22.5
	Sub - Test 4	22.13	21.70	21.74	22.5
	Sub - Test 5	22.35	22.00	21.93	23

**Conducted power measurement results (WCDMA Band V)**

Item	Band	FDD Band V result (dBm)			Tune-up Limit (dBm)
		Test Channel			
	ARFCN	4132	4183	4233	
AMR	12.2kbps AMR	23.02	22.90	22.96	23.5
RMC	12.2kbps RMC	23.02	22.92	22.98	23.5
HSDPA	Sub - Test 1	22.80	22.80	22.77	23.5
	Sub - Test 2	22.87	22.78	22.84	23.5
	Sub - Test 3	22.42	22.34	22.48	23
	Sub - Test 4	22.43	22.42	22.52	23
HSUPA	Sub - Test 1	22.63	22.53	22.77	23.5
	Sub - Test 2	22.81	22.68	22.75	23.5
	Sub - Test 3	22.49	22.36	22.43	23
	Sub - Test 4	22.42	22.42	22.38	23
	Sub - Test 5	22.81	22.61	22.74	23.5

### Conducted Power Measurement Results (WiFi 802.11 b/g/n)

WiFi 2450MHz	Channel/Freq.(MHz)	Average Power (dBm) for Data Rates (Mbps)							
		1	2	5.5	11	/	/	/	/
802.11b	1(2412)	8.51	8.47	8.39	8.38	/	/	/	/
	6(2437)	9.32	9.22	9.30	9.21	/	/	/	/
	11(2462)	7.86	7.75	7.81	7.80	/	/	/	/
802.11g	Channel	6	9	12	18	24	36	48	54
	1(2412)	7.66	7.61	7.63	7.61	7.53	7.60	7.63	7.59
	6(2437)	8.61	8.59	8.59	8.47	8.61	8.49	8.52	8.49
	11(2462)	7.26	7.21	7.26	7.14	7.17	7.19	7.20	7.24
802.11n (HT20)	Channel	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
	1(2412)	5.69	5.61	5.55	5.69	5.55	5.61	5.63	5.65
	6(2437)	7.88	7.83	7.80	7.79	7.79	7.77	7.79	7.74
	11(2462)	5.18	5.11	5.04	5.10	5.04	5.15	5.18	5.12

### Conducted Power Measurement Results (Bluetooth)

Mode	Channel	Frequency (MHz)	Conducted Peak Output Power	
			(dBm)	(mW)
GFSK	00	2402	-0.260	0.94
	39	2441	0.890	1.23
	78	2480	-0.220	0.95
$\pi/4$ DQPSK	00	2402	1.970	1.57
	39	2441	2.990	1.99
	78	2480	1.790	1.51
8DPSK	00	2402	2.480	1.77
	39	2441	3.580	2.28
	78	2480	2.420	1.75

Note:

Per KDB 447498 D01v05r02, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq$  50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3$  for 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR

$f(\text{GHz})$  is the RF channel transmit frequency in GHz

Power and distance are rounded to the nearest mW and mm before calculation


The result is rounded to one decimal place for comparison

Mode	Max Power Allowed (dBm)	Max Power Rounded (mW)	Calculated Value Rounded	Separation Distance (mm)	Frequency (GHz)	Exclusion thresholds
WiFi	9.5	9	2.8	5	2.437	3
Bluetooth	4	3	0.9	5	2.441	3

Note:

Per KDB 447498 D01v05r02, when the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied to determine SAR test exclusion. The test exclusion threshold is 2.8 & 0.9 which are  $\leq 3$ , SAR testing for WiFi & Bluetooth mode is not required.

## 8.2 Antenna Location

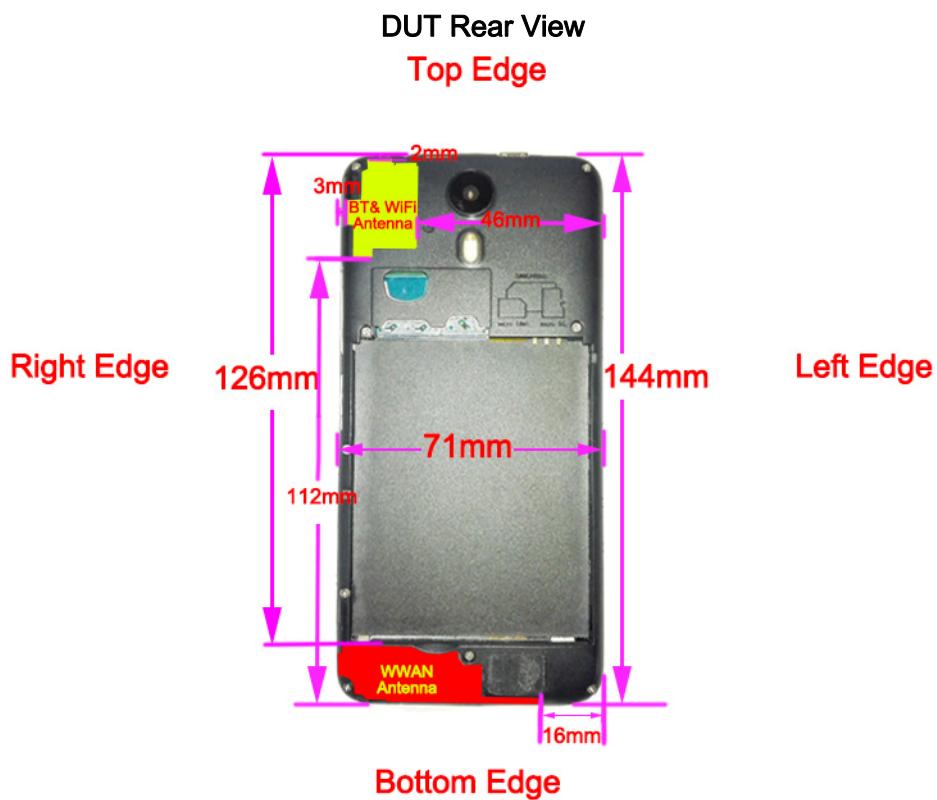

### SAR Measurement Positions

According to the KDB447498 D01 General RF Exposure Guidance v05r02, the test exclusion threshold is determined by the closest separation between the antenna and the user, if the test separation distance is <5mm, 5mm is used to determine SAR exclusion threshold.

Per KDB447498 D01, 4.3.1. Standalone SAR test exclusion considerations

- 1) The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances*  $\leq$  50 mm are determined by:  

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR, where}$$
  - $f(\text{GHz})$  is the RF channel transmit frequency in GHz
  - Power and distance are rounded to the nearest mW and mm before calculation
  - The result is rounded to one decimal place for comparison
  - 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum *test separation distance* is  $\leq$  50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum *test separation distance* is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

2) At 100 MHz to 6 GHz and for *test separation distances*  $>$  50 mm, the SAR test exclusion threshold is determined according to the following, and as illustrated in Appendix B:

- a) [Power allowed at numeric threshold for 50 mm in step 1) + (*test separation distance* - 50 mm)  $\cdot$  ( $f(\text{MHz})/150$ )] mW, at 100 MHz to 1500 MHz
- b) [Power allowed at numeric threshold for 50 mm in step 1) + (*test separation distance* - 50 mm)  $\cdot$  10] mW at  $>$  1500 MHz and  $\leq$  6 GHz

**SAR test exclusion table**

Exposure Position	Wireless Interface	GPRS850 2Tx Slot	GPRS1900 2Tx Slot	WCDMA Band II RMC	WCDMA Band V RMC
	Tune-up Maximum Power(dBm)	24.48	21.98	23	23.5
	Tune-up Maximum Power(mW) rounded	281	158	200	224
Rear side	Antenna to User(mm)	1			
	SAR exclusion threshold(mW)	16	11	11	16
	SAR test required?	Yes	Yes	Yes	Yes
Front side	Antenna to User(mm)	3			
	SAR exclusion threshold(mW)	16	11	11	16
	SAR test required?	Yes	Yes	Yes	Yes
Right side	Antenna to User(mm)	1			
	SAR exclusion threshold(mW)	16	11	11	16
	SAR test required?	Yes	Yes	Yes	Yes
Left side	Antenna to User(mm)	16			
	SAR exclusion threshold(mW)	53	35	35	53
	SAR test required?	Yes	Yes	Yes	Yes
Top side	Antenna to User(mm)	126			
	SAR exclusion threshold(mW)	587	869	869	587
	SAR test required?	No	No	No	No
Bottom side	Antenna to User(mm)	1			
	SAR exclusion threshold(mW)	16	11	11	16
	SAR test required?	Yes	Yes	Yes	Yes

## 8.3 TEST RESULTS

### 8.3.1 SAR Test Results Summary

#### Operation Mode

- Per KDB 447498 D01 v05r02, for each exposure position, Testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - $\leq 0.8 \text{ W/kg}$  or  $2.0 \text{ W/kg}$ , for 1-g or 10-g respectively, when the transmission band is  $\leq 100 \text{ MHz}$
- Per KDB 447498 D01v05r02, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - 1) Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - 2) For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)\*Tune-up Scaling Factor
- Per KDB 865664 D01 v01r03, for each frequency band, if the measured SAR is  $\geq 0.8 \text{ W/Kg}$ , testing for repeated SAR measurement is required, that the highest measured SAR is only to be tested. When the SAR results are near the limit, the following procedures are required for each device to verify these types of SAR measurement related variation concerns by repeating the highest measured SAR configuration in each frequency band.
  - 1) When the original highest measured SAR is  $\geq 0.8 \text{ W/Kg}$ , repeat that measurement once.
  - 2) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45 \text{ W/Kg}$ .
  - 3) Perform a third repeated measurement only if the original, first and second repeated measurement is  $\geq 1.5 \text{ W/Kg}$  and ratio of largest to smallest SAR for the original, first and second measurement is  $\geq 1.20$ .
- According to KDB 648474 D04 v01r02, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is  $\leq 1.2 \text{ W/Kg}$ , SAR testing with a headset connected is not required.
- According to KDB 941225 D06 v02, when the overall device length and width are  $> 9 \text{ cm} \times 5 \text{ cm}$ , Hotspot mode with a test separation distance of 10mm. For device with form factors smaller than  $9 \text{ cm} \times 5 \text{ cm}$ , Hotspot mode with a test separation distance of 5mm. Body SAR was also performed with the headset attached and without.
- According to KDB 941225 D06 v02, when the same wireless mode transmission configurations are required for SAR measurements, the more conservative configuration with a smaller separation distance should be tested for the overlapping SAR configurations. This typically applies to the back and front surfaces of a handset when SAR is required for both hotspot mode and body-worn accessory exposure conditions.
- According to KDB 248227 D01 802.11 Wi-Fi SAR v02r01 section5.2.1, SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:
  - 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is  $\leq 0.8 \text{ W/kg}$ , no further SAR testing is required for 802.11b DSSS in that exposure configuration.

2) When the reported SAR is  $> 0.8 \text{ W/kg}$ , SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is  $> 1.2 \text{ W/kg}$ , SAR is required for the third channel; i.e., all channels require testing.

- According to KDB 248227 D01 802.11 Wi-Fi SAR v02r01 section 5.2.2, SAR is not required for the following 2.4 GHz OFDM conditions.
  - 1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
  - 2) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2 \text{ W/kg}$ .

### 8.3.2 Standalone SAR

#### SAR Values [GSM 850 (GSM/GPRS)]

Test Position	Channel/ Frequency(MHz)	Test Mode	Duty Cycle	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Drift $\pm 0.21\text{dB}$	Limit SAR <sub>1g</sub> 1.6 W/kg			
						Drift (dB)	Measured SAR <sub>1g</sub> (W/kg)	Scaling Factor	Reported SAR <sub>1g</sub> (W/kg)	Graph Results
<b>Test Position of Head</b>										
Left/Cheek	251/848.8	Voice	1:8.3	23.47	23.35	-0.17	0.141	1.03	<b>0.145</b>	Figure.1
Left/Tilt	251/848.8	Voice	1:8.3	23.47	23.35	-0.05	0.092	1.03	0.095	N/A
Right/Cheek	251/848.8	Voice	1:8.3	23.47	23.35	-0.19	0.137	1.03	0.141	N/A
Right/Tilt	251/848.8	Voice	1:8.3	23.47	23.35	-0.11	0.091	1.03	0.094	N/A
<b>Test position of Body-worn accessory(Distance 10mm)</b>										
Rear Side	251/848.8	Voice	1:8.3	23.47	23.35	0.06	0.404	1.03	0.446	N/A
Front Side	251/848.8	Voice	1:8.3	23.47	23.35	0.05	0.169	1.03	0.188	N/A
<b>Test position of Hotspot Mode (Distance 10mm)</b>										
Rear Side	251/848.8	2Txslots	1:4.15	24.48	24.27	-0.05	0.496	1.05	<b>0.521</b>	Figure.1
Front Side	251/848.8	2Txslots	1:4.15	24.48	24.27	0.04	0.218	1.05	0.229	N/A
<b>Test position of Hotspot Mode (Distance 10mm)</b>										
Left Edge	251/848.8	2Txslots	1:4.15	24.48	24.27	0.02	0.048	1.05	0.050	N/A
Right Edge	251/848.8	2Txslots	1:4.15	24.48	24.27	0.09	0.176	1.05	0.185	N/A
Top Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Bottom Edge	251/848.8	2Txslots	1:4.15	24.48	24.27	0.06	0.084	1.05	0.088	N/A

Note: 1. The value with green color is the maximum SAR Value of each test band.

2. Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8 \text{ W/kg}$  then testing at the other channels is optional for such test configuration(s).
3. When multiple slots are used, SAR should be tested to account for the maximum source-based time-averaged output power.
4. Per FCC KDB Publication 648474 D04, SAR was evaluated without a headset connected to the device. Since the reported SAR was  $\leq 1.2 \text{ W/kg}$ , no additional SAR evaluations using a headset cable were required.
5. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4} \text{ dB}$  higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2 \text{ W/kg}$ , SAR measurement is not required for the secondary mode.



## SAR Values [GSM 1900 (GSM/GPRS)]

Test Position	Channel/ Frequency (MHz)	Test Mode	Duty Cycle	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Drift $\pm 0.21\text{dB}$	Limit SAR <sub>1g</sub> 1.6 W/kg			
							Drift (dB)	Measured SAR <sub>1g</sub> (W/kg)	Scaling Factor	Reported SAR <sub>1g</sub> (W/kg)
<b>Test Position of Head</b>										
Left Cheek	512/1850.2	Voice	1:8.3	20.97	20.44	-0.01	0.216	1.13	0.244	N/A
Left Tilt	512/1850.2	Voice	1:8.3	20.97	20.44	0.02	0.107	1.13	0.121	N/A
Right Cheek	512/1850.2	Voice	1:8.3	20.97	20.44	-0.06	0.483	1.13	0.546	Figure.3
Right Tilt	512/1850.2	Voice	1:8.3	20.97	20.44	0.04	0.182	1.13	0.206	N/A
<b>Test position of Body-worn accessory(Distance 10mm)</b>										
Rear Side	512/1850.2	Voice	1:8.3	20.97	20.44	0.09	0.296	1.13	0.334	N/A
Front Side	512/1850.2	Voice	1:8.3	20.97	20.44	-0.05	0.194	1.13	0.219	N/A
<b>Test position of Hotspot Mode (Distance 10mm)</b>										
Rear Side	512/1850.2	2Txslots	1:4.15	21.98	21.44	0.04	0.392	1.13	0.443	N/A
Front Side	512/1850.2	2Txslots	1:4.15	21.98	21.44	0.11	0.257	1.13	0.290	N/A
<b>Test position of Hotspot Mode (Distance 10mm)</b>										
Left Edge	512/1850.2	2Txslots	1:4.15	21.98	21.44	-0.03	0.072	1.13	0.081	N/A
Right Edge	512/1850.2	2Txslots	1:4.15	21.98	21.44	0.08	0.356	1.13	0.402	N/A
Top Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Bottom Edge	512/1850.2	2Txslots	1:4.15	21.98	21.44	0.13	0.423	1.13	0.478	Figure.4

Note: 1. The value with green color is the maximum SAR Value of each test band.

2. Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8 \text{ W/kg}$  then testing at the other channels is optional for such test configuration(s).
3. When multiple slots are used, SAR should be tested to account for the maximum source-based time-averaged output power.
4. Per FCC KDB Publication 648474 D04, SAR was evaluated without a headset connected to the device. Since the reported SAR was  $\leq 1.2 \text{ W/kg}$ ; no additional SAR evaluations using a headset cable were required.
5. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4} \text{ dB}$  higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2 \text{ W/kg}$ , SAR measurement is not required for the secondary mode



## SAR Values [WCDMA Band II (WCDMA/HSDPA/HSUPA)]

Test Position	Channel/ Frequency (MHz)	Channel Type	Duty Cycle	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Drift $\pm 0.21\text{dB}$	Limit SAR <sub>1g</sub> 1.6 W/kg			
							Drift (dB)	Measured SAR <sub>1g</sub> (W/kg)	Scaling Factor	Reported SAR <sub>1g</sub> (W/kg)
<b>Test Position of Head</b>										
Left Cheek	9262/1852.4	RMC 12.2K	1:1	23	22.68	0.02	0.228	1.08	0.246	N/A
Left Tilt	9262/1852.4	RMC 12.2K	1:1	23	22.68	0.04	0.115	1.08	0.124	N/A
Right Cheek	9262/1852.4	RMC 12.2K	1:1	23	22.68	-0.05	0.502	1.08	0.542	Figure.5
Right Tilt	9262/1852.4	RMC 12.2K	1:1	23	22.68	0.11	0.203	1.08	0.219	N/A
<b>Test position of Body-worn accessory &amp; Hotspot Mode (Distance 10mm)</b>										
Rear Side	9262/1852.4	RMC 12.2K	1:1	23	22.68	0.08	0.414	1.08	0.447	N/A
Front Side	9262/1852.4	RMC 12.2K	1:1	23	22.68	0.14	0.276	1.08	0.298	N/A
<b>Test position of Hotspot Mode (Distance 10mm)</b>										
Left Edge	9262/1852.4	RMC 12.2K	1:1	23	22.68	-0.03	0.084	1.08	0.091	N/A
Right Edge	9262/1852.4	RMC 12.2K	1:1	23	22.68	0.10	0.381	1.08	0.411	N/A
Top Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Bottom Edge	9262/1852.4	RMC 12.2K	1:1	23	22.68	-0.12	0.559	1.08	0.604	Figure.6

Note: 1. The value with green color is the maximum SAR Value of each test band.

2. Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8 \text{ W/kg}$  then testing at the other channels is optional for such test configuration(s).
3. Per FCC KDB Publication 648474 D04, SAR was evaluated without a headset connected to the device. Since the reported SAR was  $\leq 1.2 \text{ W/kg}$ , no additional SAR evaluations using a headset cable were required.
4. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq 1/4 \text{ dB}$  higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2 \text{ W/kg}$ , SAR measurement is not required for the secondary mode



## SAR Values [WCDMA Band V (WCDMA/HSDPA/HSUPA)]

Test Position	Channel/ Frequency (MHz)	Channel Type	Duty Cycle	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Drift $\pm 0.21\text{dB}$	Limit SAR <sub>1g</sub> 1.6 W/kg			
							Drift (dB)	Measured SAR <sub>1g</sub> (W/kg)	Scaling Factor	Reported SAR <sub>1g</sub> (W/kg)
<b>Test Position of Head</b>										
Left Cheek	4132/826.4	RMC 12.2K	1:1	23.5	23.02	-0.14	0.100	1.12	<b>0.112</b>	N/A
Left Tilt	4132/826.4	RMC 12.2K	1:1	23.5	23.02	0.04	0.071	1.12	0.080	N/A
Right Cheek	4132/826.4	RMC 12.2K	1:1	23.5	23.02	0.08	0.094	1.12	0.105	Figure.7
Right Tilt	4132/826.4	RMC 12.2K	1:1	23.5	23.02	-0.07	0.068	1.12	0.076	N/A
<b>Test position of Body-worn accessory&amp; Hotspot Mode (Distance 5mm)</b>										
Rear Side	4132/826.4	RMC 12.2K	1:1	23.5	23.02	-0.01	0.263	1.12	<b>0.295</b>	Figure.8
Front Side	4132/826.4	RMC 12.2K	1:1	23.5	23.02	0.14	0.124	1.12	0.139	N/A
<b>Test position of Hotspot Mode (Distance 10mm)</b>										
Left Edge	4132/826.4	RMC 12.2K	1:1	23.5	23.02	-0.11	0.039	1.12	0.044	N/A
Right Edge	4132/826.4	RMC 12.2K	1:1	23.5	23.02	0.02	0.105	1.12	0.118	N/A
Top Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Bottom Edge	4132/826.4	RMC 12.2K	1:1	23.5	23.02	0.03	0.052	1.12	0.058	N/A

Note: 1. The value with green color is the maximum SAR Value of each test band.  
2. Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8 \text{ W/kg}$  then testing at the other channels is optional for such test configuration(s).  
3. Per FCC KDB Publication 648474 D04, SAR was evaluated without a headset connected to the device. Since the reported SAR was  $\leq 1.2 \text{ W/kg}$ , no additional SAR evaluations using a headset cable were required.  
4. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq 1/4 \text{ dB}$  higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2 \text{ W/kg}$ , SAR measurement is not required for the secondary mode

### 8.3.3 Simultaneous SAR Evaluation

#### Application Simultaneous Transmission information:

NO.	Simultaneous Transmission Configurations	Smartphone		Note
		Head	Body	
1	GSM(Voice) + WLAN2.4GHz(data)	Yes	Yes	-
2	WCDMA(Voice) + WLAN2.4GHz(data)	Yes	Yes	-
3	GSM(Voice) + Bluetooth(data)	Yes	Yes	-
4	WCDMA((Voice) + Bluetooth(data)	Yes	Yes	-
5	GPRS (Data) + WLAN2.4GHz(data)	-	Yes	2.4GHz Hotspot
6	WCDMA(Data) + WLAN2.4GHz(data)	Yes	Yes	2.4GHz Hotspot
7	GPRS (Data) + Bluetooth(data)	-	Yes	Bluetooth Tethering
8	WCDMA(Data) + Bluetooth(data)	Yes	Yes	Bluetooth Tethering

#### NOTE:

- 1) WLAN2.4GHz and Bluetooth share the same antenna, and cannot transmit simultaneously.
- 2) The Reported SAR summation is calculated based on the same configuration and test position.
- 3) Per KDB 447498 D01v05r02, simultaneous transmission SAR is compliant if,
  - a) Scalar SAR summation < 1.6W/kg.
  - b) SPLSR =  $(\text{SAR1} + \text{SAR2})^{1.5} / (\text{min. separation distance, mm})$ , and the peak separation distance is determined from the square root of  $\sqrt{[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]}$ , where  $(x_1, y_1, z_1)$  and  $(x_2, y_2, z_2)$  are the coordinates of the extrapolated peak SAR locations in the zoom scan
  - c) If SPLSR  $\leq 0.04$ , simultaneously transmission SAR measurement is not necessary
  - d) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg
- 4) For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v05r02 based on the formula below.
  - a)  $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot \sqrt{f(\text{GHz})} \cdot x \text{ W/kg}$  for test separation distances  $\leq 50 \text{ mm}$ ; where  $x = 7.5$  for 1-g SAR, and  $x = 18.75$  for 10-g SAR.
  - b) When the minimum separation distance is  $< 5\text{mm}$ , the distance is used 5mm to determine SAR test exclusion.
  - c) 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is  $> 50 \text{ mm}$ .

Bluetooth Max Power Allowed (dBm)	Bluetooth Max Power Rounded(mW)	Exposure Position	Test Separation Distances	Estimated SAR (W/kg)
4	3	Bluetooth Tethering Head	5mm	0.125
4	3	Bluetooth Tethering Body Front/Rear/Right/Top Edge	10mm	0.0625
4	3	Bluetooth Tethering Left Edge	46mm	0.014
4	3	Bluetooth Tethering Bottom Edge	$> 50 \text{ mm}$	0.400
WiFi Max Power Allowed (dBm)	WiFi Max Power Rounded(mW)	Exposure Position	Test Separation Distances	Estimated SAR (W/kg)
9.5	9	Hotspot Head	5mm	0.374
9.5	9	Hotspot Body Front/Rear/Right/Top Edge	10mm	0.187
9.5	9	Hotspot Left Edge	46mm	0.041
9.5	9	Hotspot Bottom Edge	$> 50 \text{ mm}$	0.400
WWAN Antenna		Exposure Position	Test Separation Distances	Estimated SAR (W/kg)
		Hotspot Top Edge	$> 50 \text{ mm}$	0.400

**Simultaneous transmission SAR for WIFI and GSM/WCDMA**

SAR <sub>1g</sub> (W/kg) Test Position	GSM 850	GSM 1900	WCDMA Band II	WCDMA Band V	WIFI	MAX. ΣSAR <sub>1g</sub>	Peak location separation ratio
Left, Cheek	0.145	0.244	<b>0.246</b>	0.112	<b>0.374</b>	0.620	N/A
Left, Tilt	0.095	0.121	<b>0.124</b>	0.080	<b>0.374</b>	0.498	N/A
Right, Cheek	0.141	<b>0.546</b>	0.542	0.105	<b>0.374</b>	0.920	N/A
Right, Tilt	0.094	0.206	<b>0.219</b>	0.076	<b>0.374</b>	0.593	N/A
Rear Side	<b>0.521</b>	0.443	0.447	0.295	<b>0.187</b>	0.708	N/A
Front Side	0.229	0.290	<b>0.298</b>	0.139	<b>0.187</b>	0.485	N/A
Left Edge	0.050	0.081	<b>0.091</b>	0.044	<b>0.041</b>	0.132	N/A
Right Edge	0.185	0.402	<b>0.411</b>	0.118	<b>0.187</b>	0.598	N/A
Top Edge	<b>0.400</b>	<b>0.400</b>	<b>0.400</b>	<b>0.400</b>	<b>0.187</b>	0.587	N/A
Bottom Edge	0.088	0.478	<b>0.604</b>	0.058	<b>0.400</b>	<b>1.004</b>	N/A

Note: 1. The value with blue color is estimated by the maximum tune-up power per KDB 447498 D01v05r02. Refer to chapter 8.3.3 sub-clause 4) of this report.

MAX. ΣSAR<sub>1g</sub> = 1.004 W/kg < 1.6 W/kg, so the Simultaneous transmission SAR with volume scan are not required for WIFI and GSM/WCDMA

**Simultaneous transmission SAR for Bluetooth and GSM/WCDMA**

SAR <sub>1g</sub> (W/kg) Test Position	GSM 850	GSM 1900	WCDMA Band II	WCDMA Band V	Bluetooth (W/kg)	MAX. ΣSAR <sub>1g</sub>	Peak location separation ratio
Left, Cheek	0.145	0.244	<b>0.246</b>	0.112	<b>0.125</b>	0.371	N/A
Left, Tilt	0.095	0.121	<b>0.124</b>	0.080	<b>0.125</b>	0.249	N/A
Right, Cheek	0.141	<b>0.546</b>	0.542	0.105	<b>0.125</b>	0.671	N/A
Right, Tilt	0.094	0.206	<b>0.219</b>	0.076	<b>0.125</b>	0.344	N/A
Rear Side	<b>0.521</b>	0.443	0.447	0.295	<b>0.0625</b>	0.584	N/A
Front Side	0.229	0.290	<b>0.298</b>	0.139	<b>0.0625</b>	0.361	N/A
Left Edge	0.050	0.081	<b>0.091</b>	0.044	<b>0.014</b>	0.105	N/A
Right Edge	0.185	0.402	<b>0.411</b>	0.118	<b>0.0625</b>	0.474	N/A
Top Edge	<b>0.400</b>	<b>0.400</b>	<b>0.400</b>	<b>0.400</b>	<b>0.0625</b>	0.463	N/A
Bottom Edge	0.088	0.478	<b>0.604</b>	0.058	<b>0.400</b>	<b>1.004</b>	N/A

Note: 1. The value with blue color is estimated by the maximum tune-up power per KDB 447498 D01v05r02. Refer to chapter 8.3.3 sub-clause 4) of this report.

MAX. ΣSAR<sub>1g</sub> = 1.004 W/kg < 1.6 W/kg, so the Simultaneous transmission SAR with volume scan are not required for BT and GSM/WCDMA

## 9. System Check Results

### System Performance Check at 835 MHz Head

Date: 19/11/2015

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d134

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 835$  MHz;  $\sigma = 0.89$  S/m;  $\epsilon_r = 41.50$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3292; ConvF(6.23, 6.23, 6.23); Calibrated: 15/08/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 22/07/2015
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (7x7x1):** Measurement grid: dx=15.00 mm, dy=15.00 mm

Maximum value of SAR (measured) = 2.92 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 58.749 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 3.558 W/kg

**SAR(1 g) = 2.44 W/kg; SAR(10 g) = 1.55 W/kg**

Maximum value of SAR (measured) = 3.11 W/kg

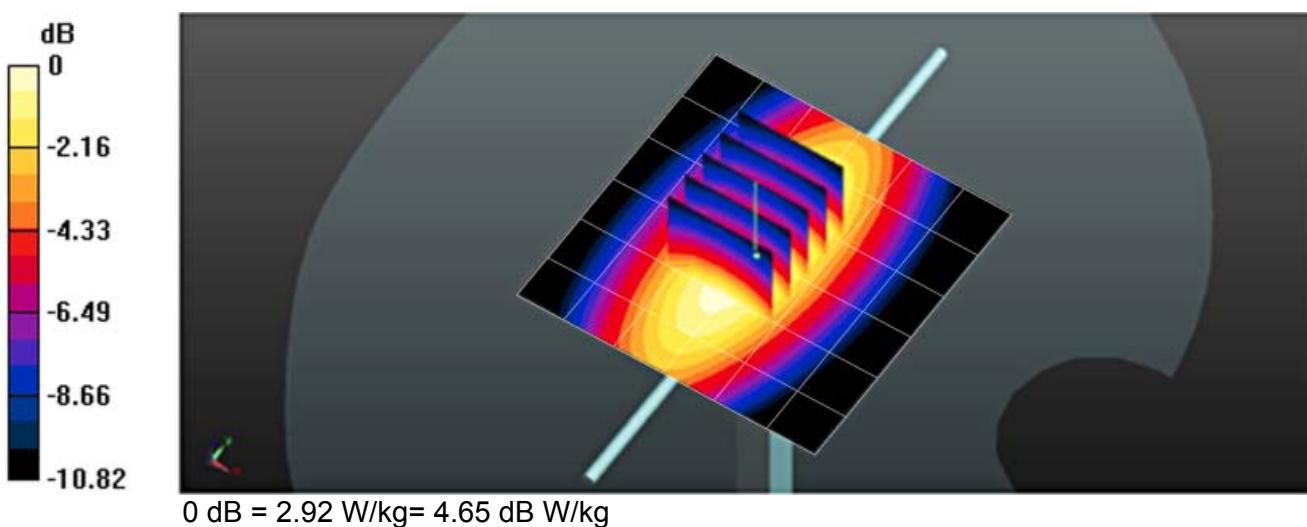

System Performance Check 835MHz Head 250mW

## System Performance Check at 835 MHz Body

Date: 19/11/2015

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d134

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 835$  MHz;  $\sigma = 0.96$  S/m;  $\epsilon_r = 55.87$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3292; ConvF (6.11, 6.11, 6.11); Calibrated: 15/08/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 22/07/2015
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (7x7x1):** Measurement grid: dx=15.00 mm, dy=15.00 mm

Maximum value of SAR (measured) = 2.87 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 56.663 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.472 W/kg

**SAR(1 g) = 2.39 W/kg; SAR(10 g) = 1.56 W/kg**

Maximum value of SAR (measured) = 3.02 W/kg

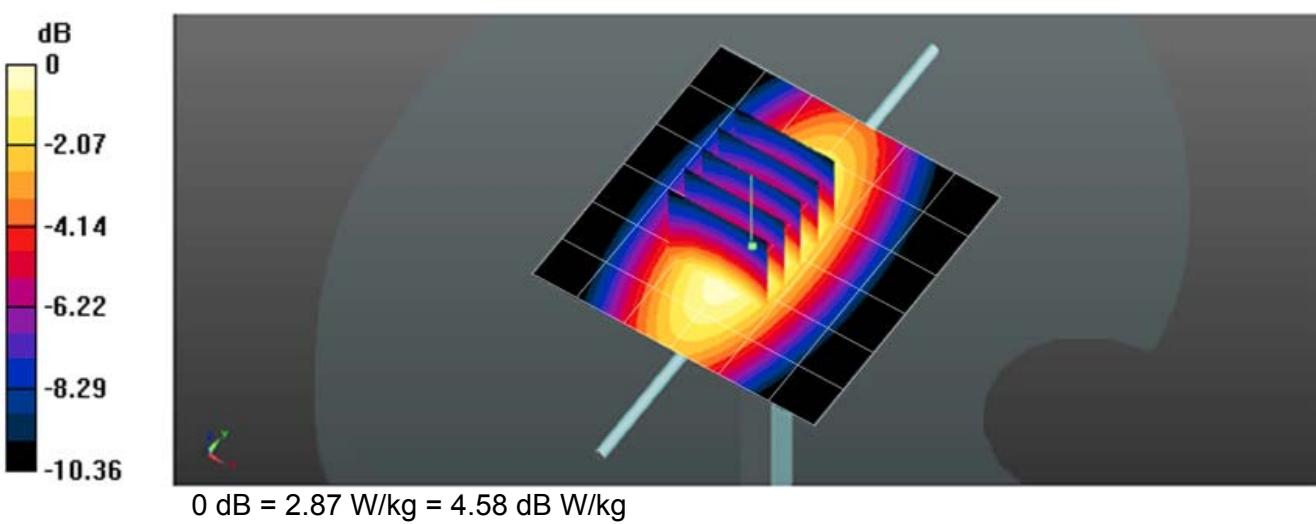

## System Performance Check at 1900 MHz Head

Date: 20/11/2015

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d150

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1900$  MHz;  $\sigma = 1.45$  S/m;  $\epsilon_r = 39.75$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3292; ConvF (5.03, 5.03, 5.03); Calibrated: 15/08/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 22/07/2015
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (7x7x1):** Measurement grid: dx=15.00 mm, dy=15.00 mm

Maximum value of SAR (measured) = 11.43 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 89.982 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 17.476 W/kg

**SAR(1 g) = 9.71 W/kg; SAR(10 g) = 5.03 W/kg**

Maximum value of SAR (measured) = 11.65 W/kg

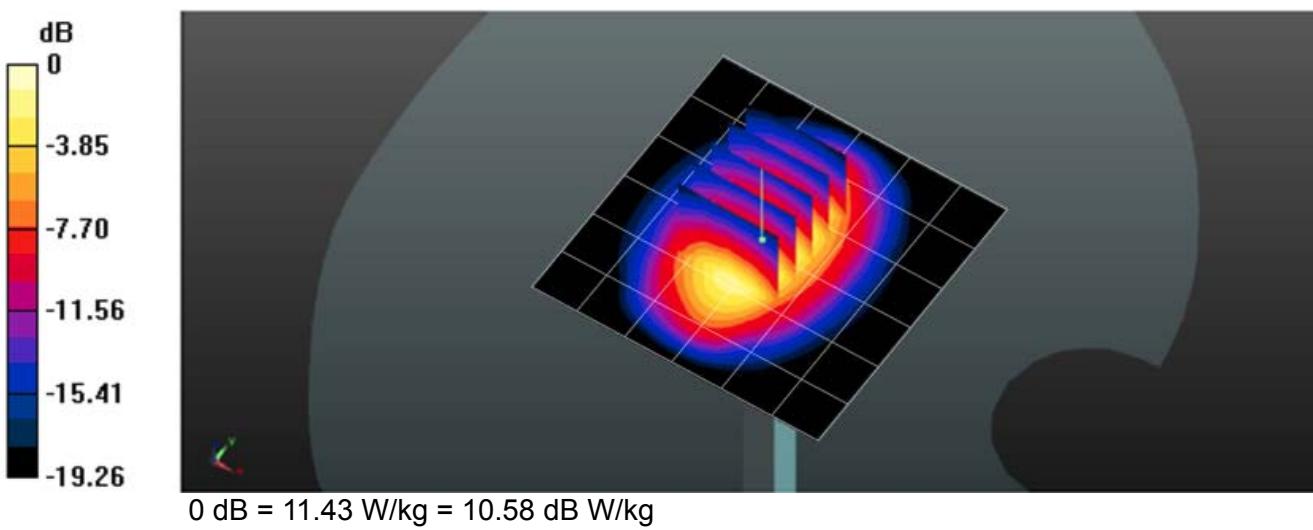

System Performance Check 1900MHz Head 250mW

## System Performance Check at 1900 MHz Body

Date: 20/11/2015

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d150

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1900$  MHz;  $\sigma = 1.57$  S/m;  $\epsilon_r = 51.05$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3292; ConvF (4.66, 4.66, 4.66); Calibrated: 15/08/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 22/07/2015
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (7x7x1):** Measurement grid: dx=15.00 mm, dy=15.00 mm

Maximum value of SAR (measured) = 11.71 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 83.543 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 16.972 W/kg

**SAR (1 g) = 9.86 W/kg; SAR (10 g) = 5.17 W/kg**

Maximum value of SAR (measured) = 11.93 W/kg

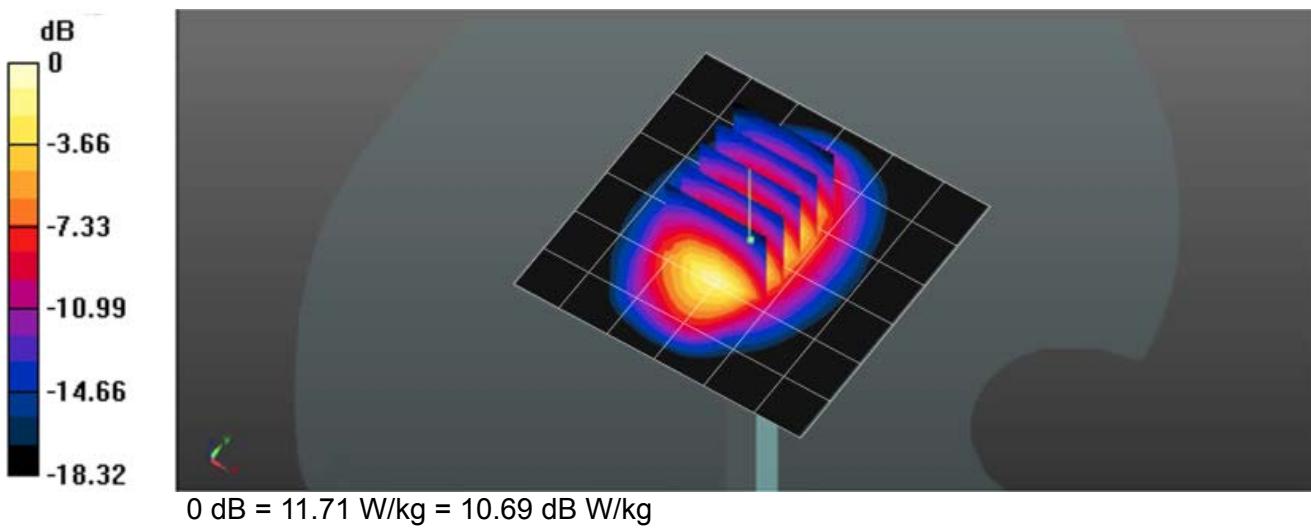

System Performance Check 1900MHz Body 250mW

## 10. SAR Test Graph Results

### GSM 850 Voice Left Cheek High Channel

Date: 19/11/2015

Communication System: Customer System; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 848.8$  MHz;  $\sigma = 0.90$  S/m;  $\epsilon_r = 41.33$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3292; ConvF (6.23, 6.23, 6.23); Calibrated: 15/08/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 22/07/2015
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (41x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.166 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.290 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.170 W/kg

**SAR(1 g) = 0.141 W/kg; SAR(10 g) = 0.111 W/kg**

Maximum value of SAR (measured) = 0.157 W/kg

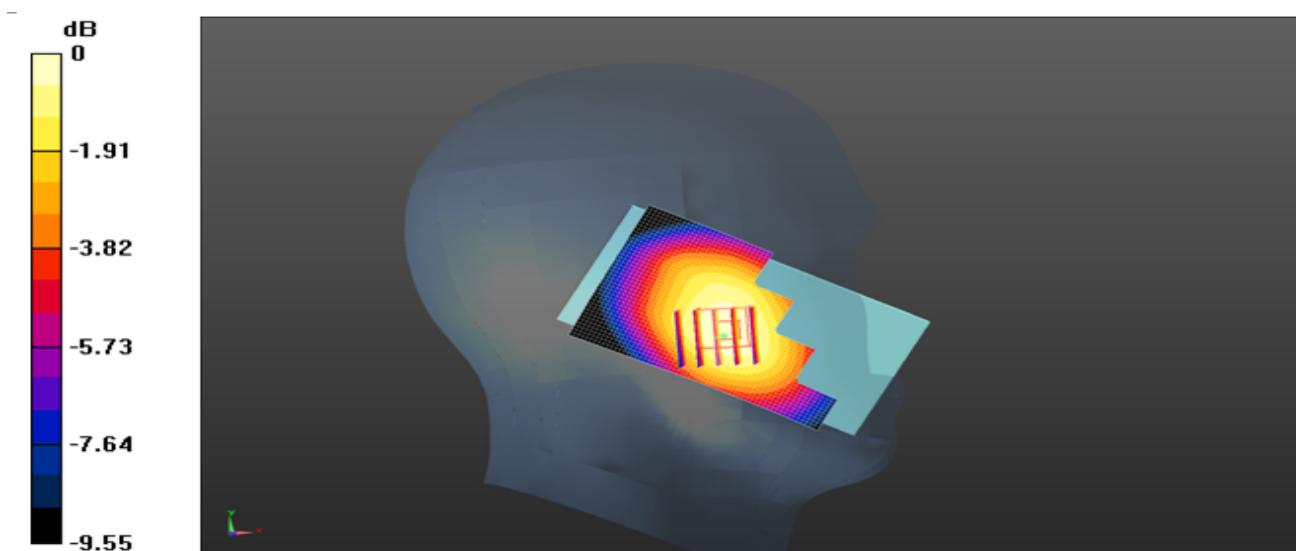

0 dB = 0.166 W/kg = -7.80 dB W/kg

**Figure 1 Left Cheek GSM 850 Voice Channel 251**

## GSM 850 GPRS (2Txslots) Rear Side High Channel

Date: 19/11/2015

Communication System: Customer System; Frequency: 848.8 MHz; Duty Cycle: 1:4.15

Medium parameters used:  $f = 848.8$  MHz;  $\sigma = 0.97$  S/m;  $\epsilon_r = 55.75$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3292; ConvF (6.11, 6.11, 6.11); Calibrated: 15/08/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 22/07/2015
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.563 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.194 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.620 W/kg

**SAR(1 g) = 0.496 W/kg; SAR(10 g) = 0.388 W/kg**

Maximum value of SAR (measured) = 0.567 W/kg

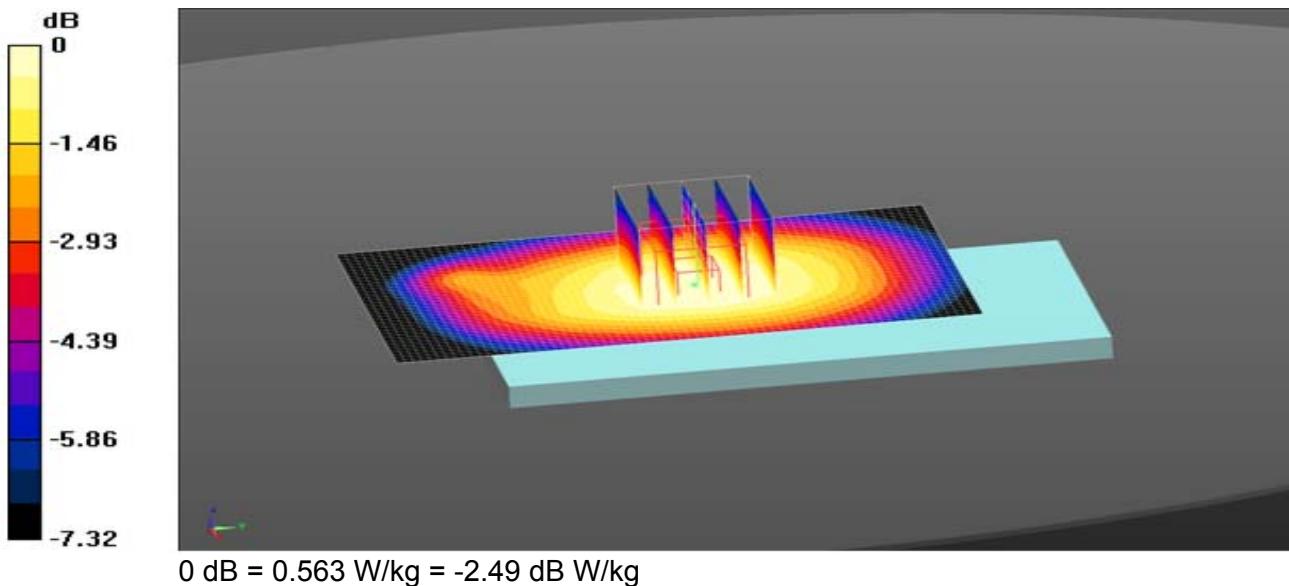

**Figure 2 : Body Rear Side, GSM 850 GPRS (2Txslots) Channel 251**

## GSM 1900 Voice Right Cheek Low Channel

Date: 20/11/2015

Communication System: Customer System; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 1850.2$  MHz;  $\sigma = 1.42$  S/m;  $\epsilon_r = 39.87$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3292; ConvF (5.03, 5.03, 5.03); Calibrated: 15/08/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 22/07/2015
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (41x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.581 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.047 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.796 W/kg

**SAR(1 g) = 0.483 W/kg; SAR(10 g) = 0.272 W/kg**

Maximum value of SAR (measured) = 0.631 W/kg

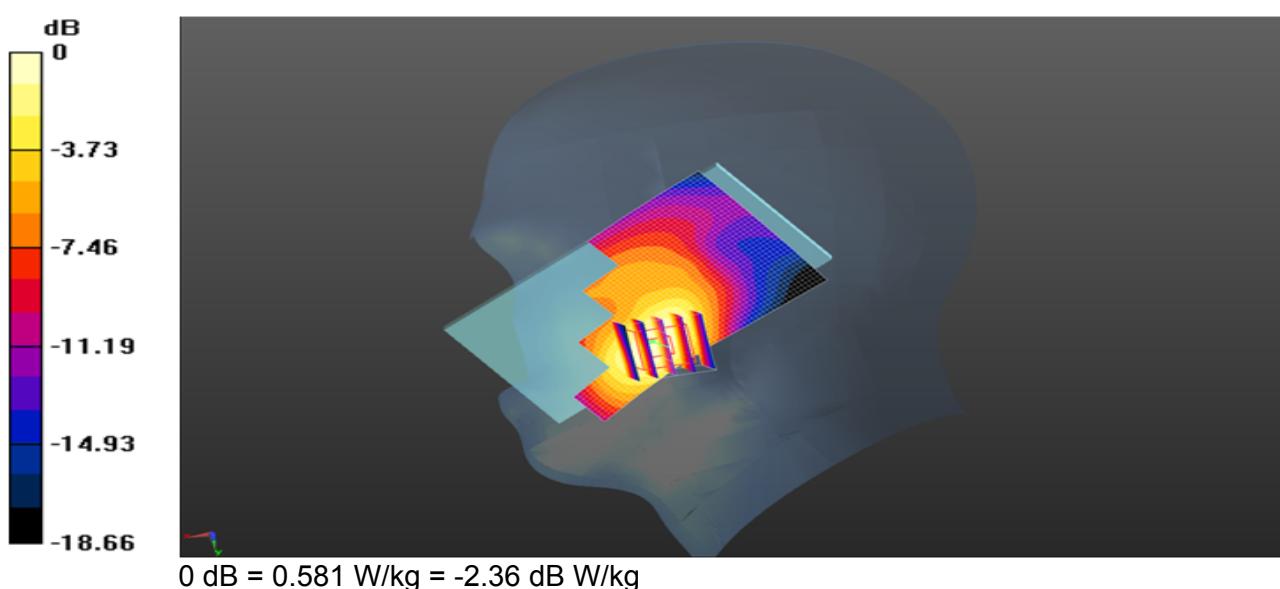

**Figure 3 Right Cheek GSM 1900 Voice Channel 512**

## GSM 1900 GPRS (2Txslots) Bottom Edge Low Channel

Date: 20/11/2015

Communication System: Customer System; Frequency: 1850.2MHz; Duty Cycle: 1:4.15

Medium parameters used:  $f = 1850.2\text{MHz}$ ;  $\sigma = 1.53 \text{ S/m}$ ;  $\epsilon_r = 51.24$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3292; ConvF (4.66, 4.66, 4.66); Calibrated: 15/08/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 22/07/2015
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (41x51x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.535 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 19.482 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.695 W/kg

**SAR(1 g) = 0.423 W/kg; SAR(10 g) = 0.235 W/kg**

Maximum value of SAR (measured) = 0.575 W/kg

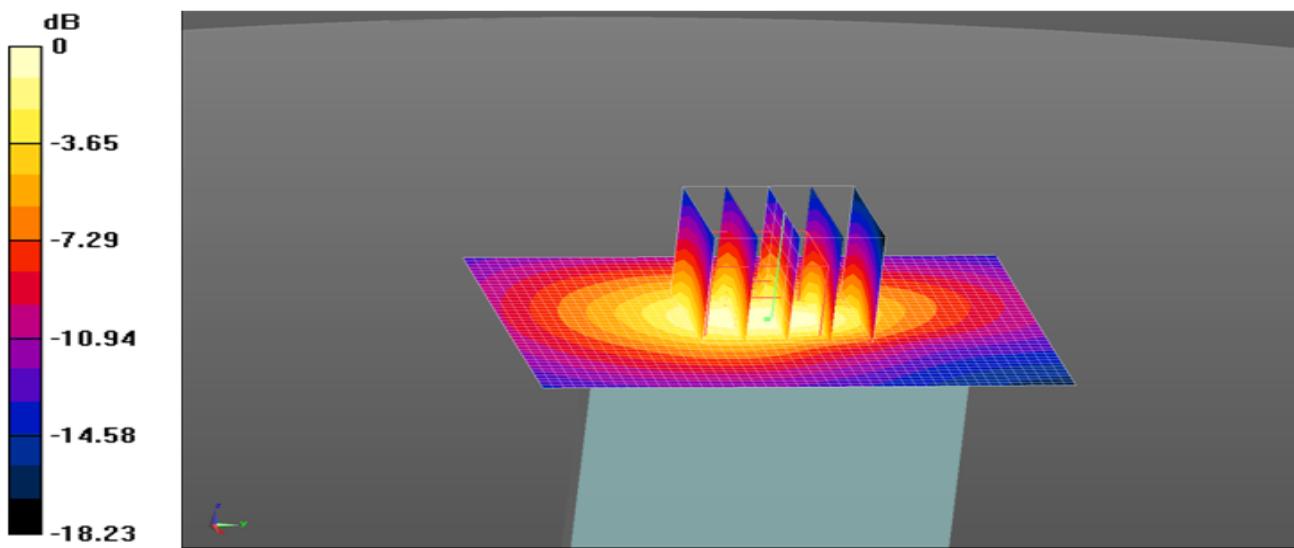

**Figure 4 : Body Bottom Edge, GSM 1900 GPRS (2Txslots) Channel 512**

## WCDMA Band II Right Cheek Low Channel

Date: 20/11/2015

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1852.4$  MHz;  $\sigma = 1.42$  S/m;  $\epsilon_r = 39.87$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3292; ConvF (5.03, 5.03, 5.03); Calibrated: 15/08/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 22/07/2015
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (41x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.634 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.185 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.828 W/kg

**SAR(1 g) = 0.502 W/kg; SAR(10 g) = 0.289 W/kg**

Maximum value of SAR (measured) = 0.669 W/kg

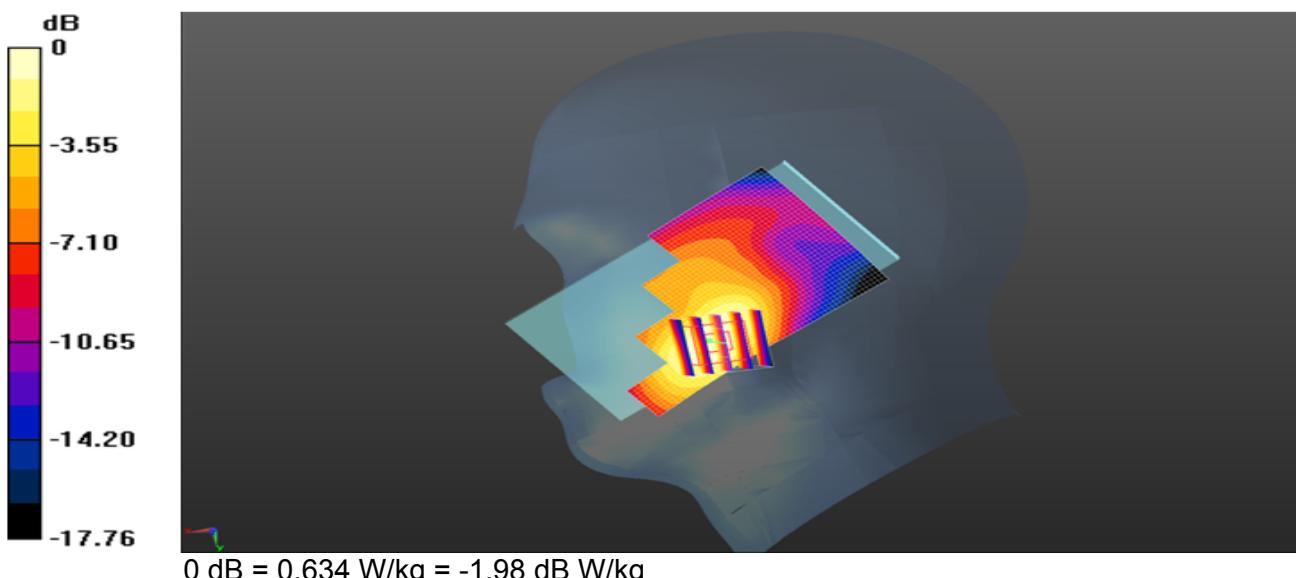

**Figure 5: Right Cheek WCDMA Band II Channel 9262**

## WCDMA Band II Bottom Edge Low Channel

Date: 20/11/2015

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1852.4$  MHz;  $\sigma = 1.53$  S/m;  $\epsilon_r = 51.24$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3292; ConvF (4.66, 4.66, 4.66); Calibrated: 15/08/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 22/07/2015
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (41x51x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.754 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$  mm,  $dy=8$  mm,  $dz=5$  mm

Reference Value = 20.962 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.922 W/kg

**SAR(1 g) = 0.559 W/kg; SAR(10 g) = 0.305 W/kg**

Maximum value of SAR (measured) = 0.731 W/kg

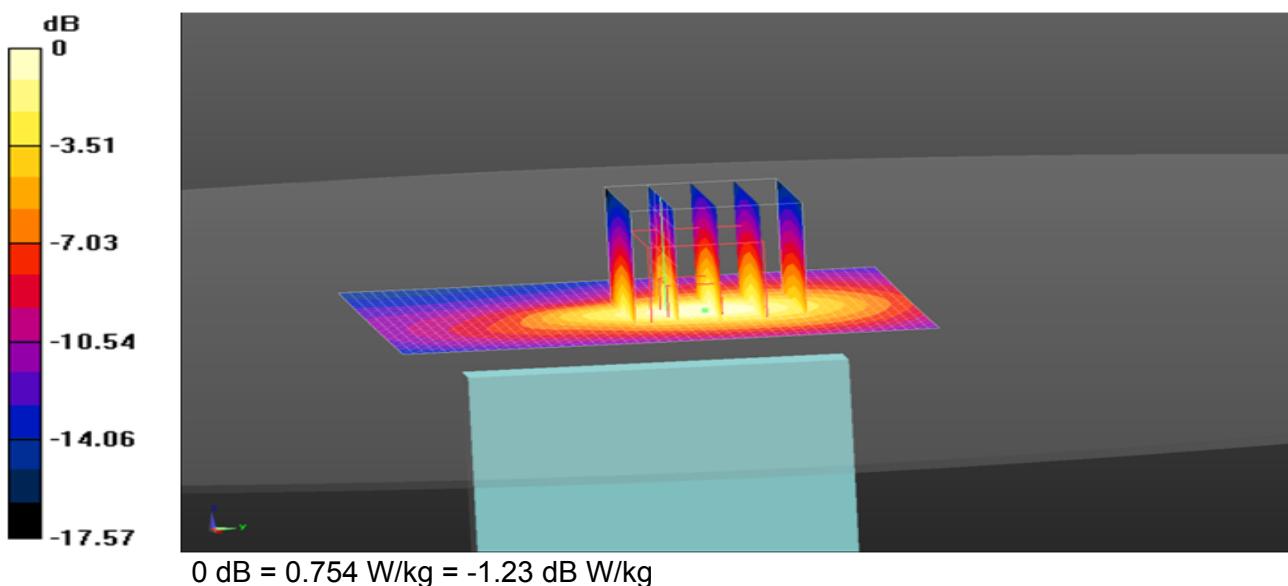


Figure 6 : Body Bottom Edge, WCDMA Band II Channel 9262

## WCDMA Band V Left Cheek Low Channel

Date: 19/11/2015

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 826.4$  MHz;  $\sigma = 0.88$  S/m;  $\epsilon_r = 41.61$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3292; ConvF (6.23, 6.23, 6.23); Calibrated: 15/08/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 22/07/2015
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (41x61x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.118 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$  mm,  $dy=8$  mm,  $dz=5$  mm

Reference Value = 3.421 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.123 W/kg

**SAR(1 g) = 0.100 W/kg; SAR(10 g) = 0.078 W/kg**

Maximum value of SAR (measured) = 0.112 W/kg

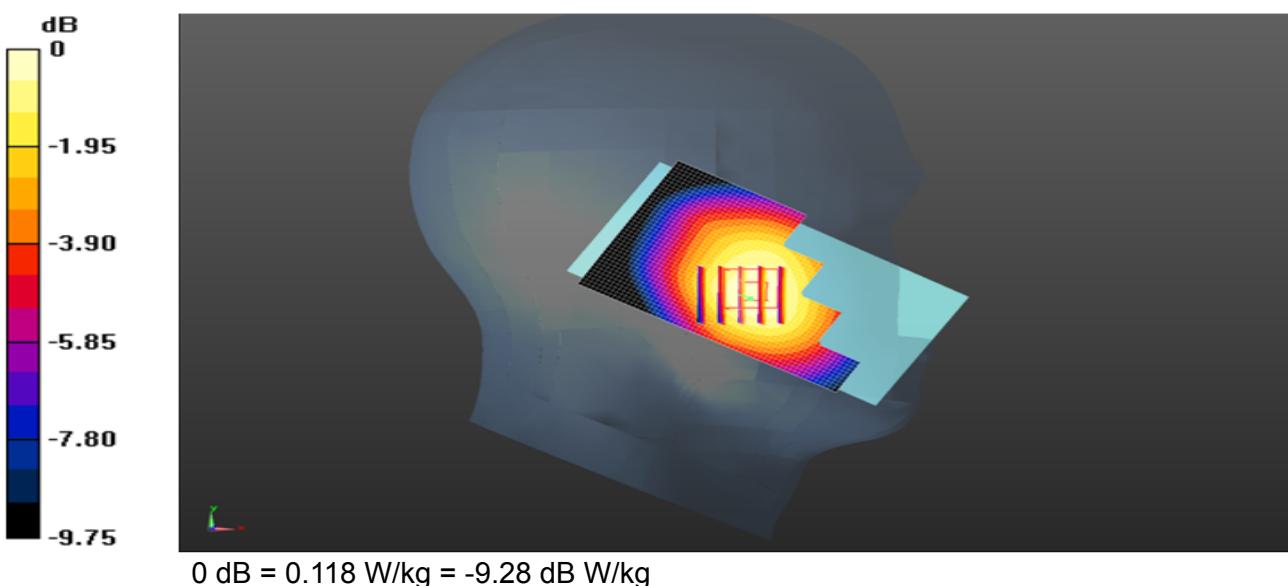

**Figure 7 Left Cheek WCDMA Band V Channel 4132**

## WCDMA Band V Rear Side Low Channel

Date: 19/11/2015

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 826.4$  MHz;  $\sigma = 0.95$  S/m;  $\epsilon_r = 55.95$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3292; ConvF (6.11, 6.11, 6.11); Calibrated: 15/08/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 22/07/2015
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (41x71x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.297 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$  mm,  $dy=8$  mm,  $dz=5$  mm

Reference Value = 17.904 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.330 W/kg

**SAR(1 g) = 0.263 W/kg; SAR(10 g) = 0.205 W/kg**

Maximum value of SAR (measured) = 0.301 W/kg

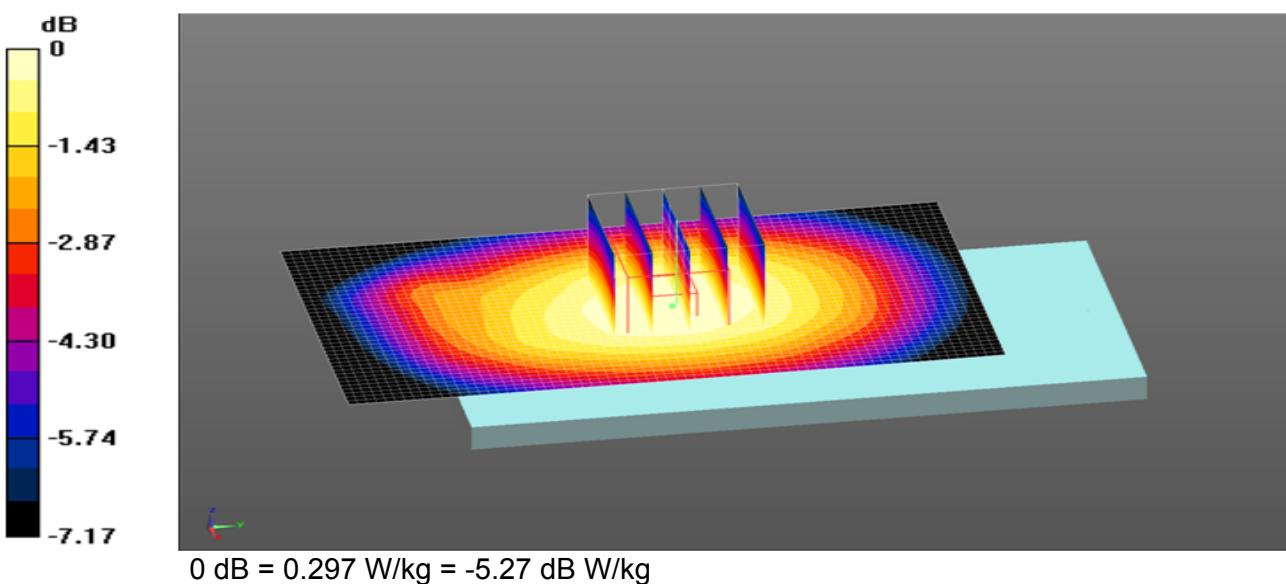

**Figure 8: Body Rear Side, WCDMA Band V Channel 4132**

## 11. CALIBRATION CERTIFICATE

### 11.1 Probe Calibration Certificate ES3DV3 (3292)

**Calibration Laboratory of**  
**Schmid & Partner**  
**Engineering AG**  
**Zeughausstrasse 43, 8004 Zurich, Switzerland**



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **CIQ (Auden)**

Certificate No: **ES3-3292\_Aug15**

### CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3292**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-12.v9, QA CAL-23.v5, QA CAL-25.v6**  
Calibration procedure for dosimetric E-field probes

Calibration date: **August 15, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	03-Apr-15 (No. 217-01911)	Apr-16
Power sensor E4412A	MY41498087	03-Apr-15 (No. 217-01911)	Apr-16
Reference 3 dB Attenuator	SN: S5054 (3c)	03-Apr-15 (No. 217-01915)	Apr-16
Reference 20 dB Attenuator	SN: S5277 (20x)	03-Apr-15 (No. 217-01919)	Apr-16
Reference 30 dB Attenuator	SN: S5129 (30b)	03-Apr-15 (No. 217-01920)	Apr-16
Reference Probe ES3DV2	SN: 3013	30-Dec-14 (No. ES3-3013_Dec14)	Dec-15
DAE4	SN: 660	13-Dec-14 (No. DAE4-660_Dec14)	Dec-15
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-13)	In house check: Apr-16
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-14)	In house check: Oct-15

Calibrated by:	Name Claudio Leubler	Function Laboratory Technician	Signature 
Approved by:	Katja Pokovic	Technical Manager	

Issued: August 15, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of**  
**Schmid & Partner**  
**Engineering AG**  
**Zeughausstrasse 43, 8004 Zurich, Switzerland**



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

#### Glossary:

TSL	tissue simulating liquid
NORM <sub>x,y,z</sub>	sensitivity in free space
ConvF	sensitivity in TSL / NORM <sub>x,y,z</sub>
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization $\varphi$	$\varphi$ rotation around probe axis
Polarization $\vartheta$	$\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

#### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

#### Methods Applied and Interpretation of Parameters:

- $NORM_{x,y,z}$ : Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide).  $NORM_{x,y,z}$  are only intermediate values, i.e., the uncertainties of  $NORM_{x,y,z}$  does not affect the E<sup>2</sup>-field uncertainty inside TSL (see below ConvF).
- $NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency\_response$  (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- $DCPx,y,z$ : DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- $PAR$ : PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- $Ax,y,z; Bx,y,z; Cx,y,z; Dx,y,z; VRx,y,z$ :  $A, B, C, D$  are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters*: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to  $NORM_{x,y,z} * ConvF$  whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)*: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle*: The angle is assessed using the information gained by determining the  $NORM_x$  (no uncertainty required).



ES3DV3 – SN:3292

August 15, 2015

# Probe ES3DV3

SN:3292

Manufactured: July 6, 2010  
Repaired: July 28, 2014  
Calibrated: August 15, 2015

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)



ES3DV3- SN:3292

August 15, 2015

**DASY/EASY - Parameters of Probe: ES3DV3 - SN:3292****Basic Calibration Parameters**

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup>	0.89	0.95	1.46	$\pm 10.1\%$
DCP (mV) <sup>B</sup>	107.1	106.1	103.9	

**Modulation Calibration Parameters**

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc <sup>E</sup> (k=2)
0	CW	X	0.0	0.0	1.0	0.00	209.7	$\pm 3.8\%$
		Y	0.0	0.0	1.0		218.8	
		Z	0.0	0.0	1.0		198.5	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Pages 5 and 6).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



ES3DV3- SN:3292

August 15, 2015

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3292

### Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) <sup>F</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>G</sup> (mm)	Unct. (k=2)
835	41.5	0.90	6.23	6.23	6.23	0.80	1.11	± 12.0 %
900	41.5	0.97	6.10	6.10	6.10	0.76	1.17	± 12.0 %
1810	40.0	1.40	5.07	5.07	5.07	0.61	1.36	± 12.0 %
1900	40.0	1.40	5.03	5.03	5.03	0.45	1.55	± 12.0 %
2100	39.8	1.49	5.04	5.04	5.04	0.77	1.17	± 12.0 %
2450	39.2	1.80	4.43	4.43	4.43	0.73	1.23	± 12.0 %

<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



ES3DV3- SN:3292

August 15, 2015

**DASY/EASY - Parameters of Probe: ES3DV3 - SN:3292****Calibration Parameter Determined in Body Tissue Simulating Media**

f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) <sup>F</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>G</sup> (mm)	Unct. (k=2)
450	56.7	0.94	7.10	7.10	7.10	0.13	1.00	± 13.3 %
835	55.2	0.97	6.11	6.11	6.11	0.36	1.78	± 12.0 %
900	55.0	1.05	5.97	5.97	5.97	0.73	1.22	± 12.0 %
1810	53.3	1.52	4.79	4.79	4.79	0.59	1.45	± 12.0 %
1900	53.3	1.52	4.66	4.66	4.66	0.41	1.79	± 12.0 %
2100	53.2	1.62	4.77	4.77	4.77	0.63	1.42	± 12.0 %
2450	52.7	1.95	4.23	4.23	4.23	0.66	0.98	± 12.0 %

<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.


<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

ES3DV3- SN:3292

August 15, 2015

## Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

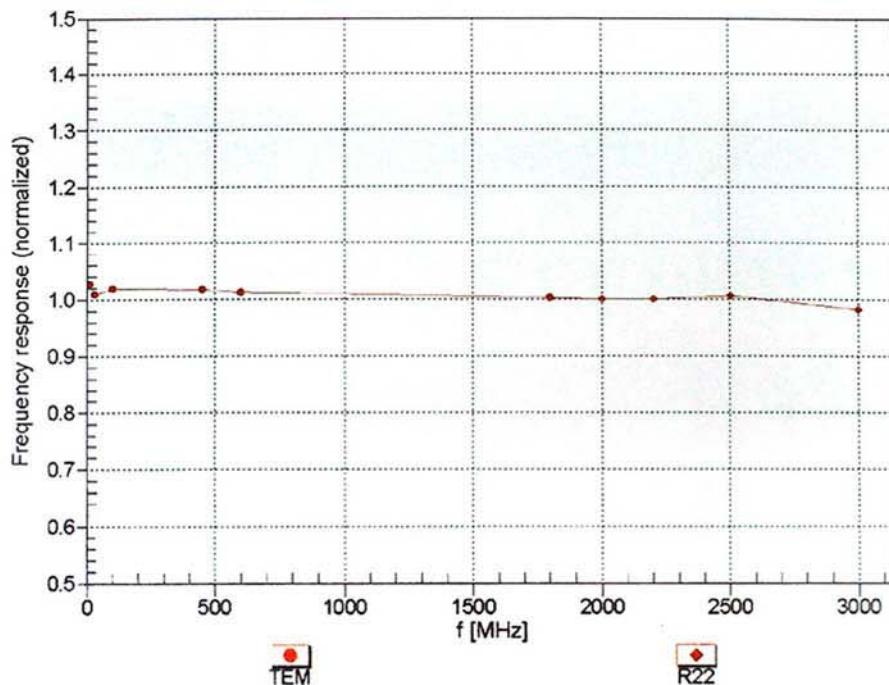


Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )

ES3DV3- SN:3292



August 15, 2015

### Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

$f=600$  MHz, TEM

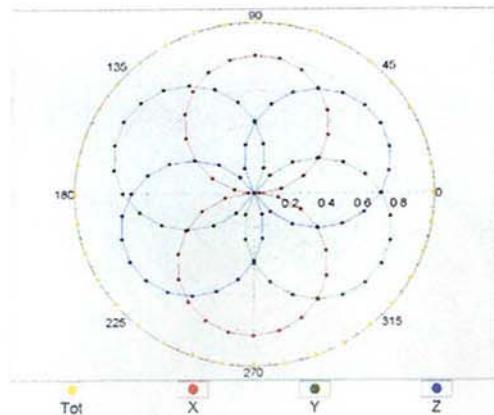

$f=1800$  MHz, R22

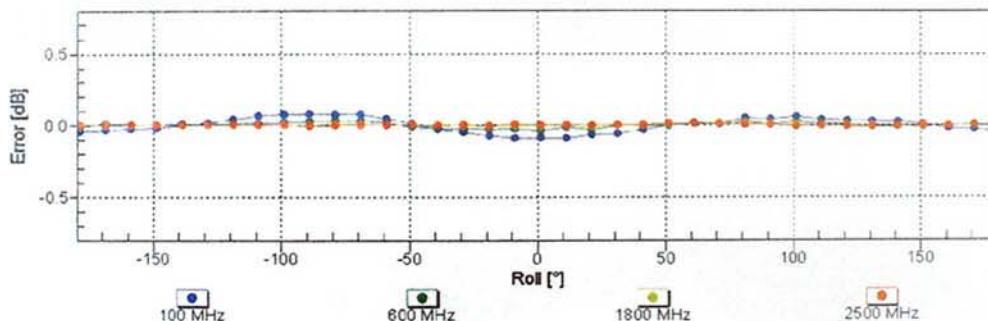
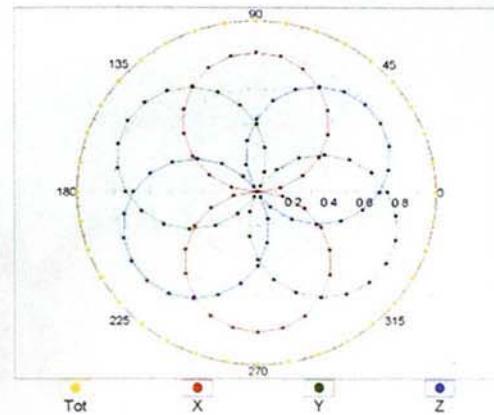


Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )

ES3DV3- SN:3292

August 15, 2015

**Dynamic Range f(SAR<sub>head</sub>)**  
(TEM cell, f<sub>eval</sub>= 1900 MHz)

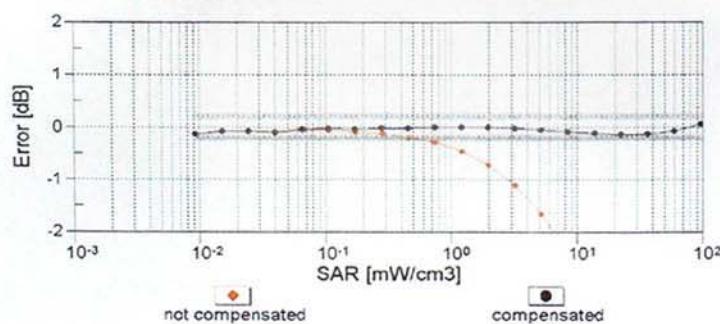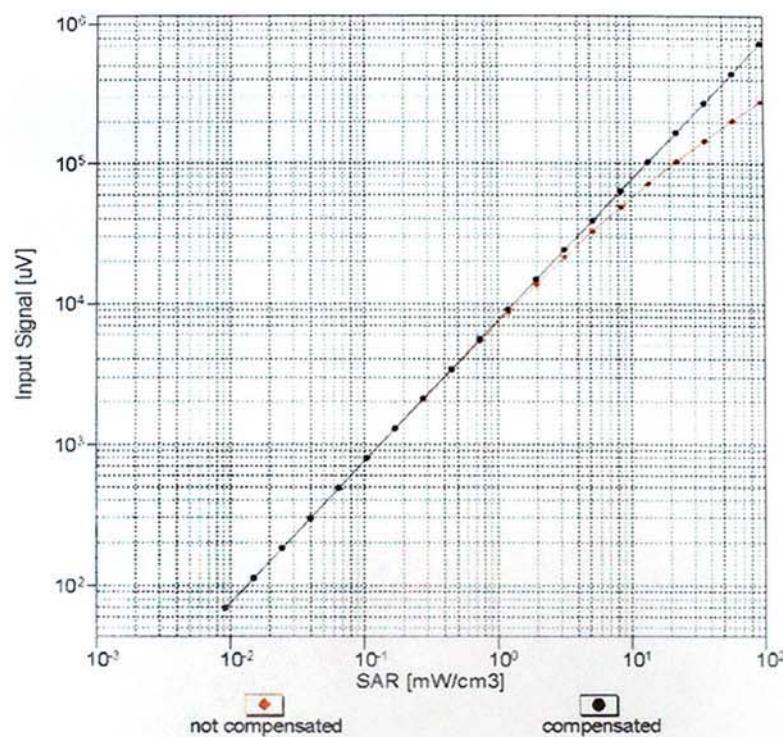


Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )


ES3DV3- SN:3292

August 15, 2015

## Conversion Factor Assessment

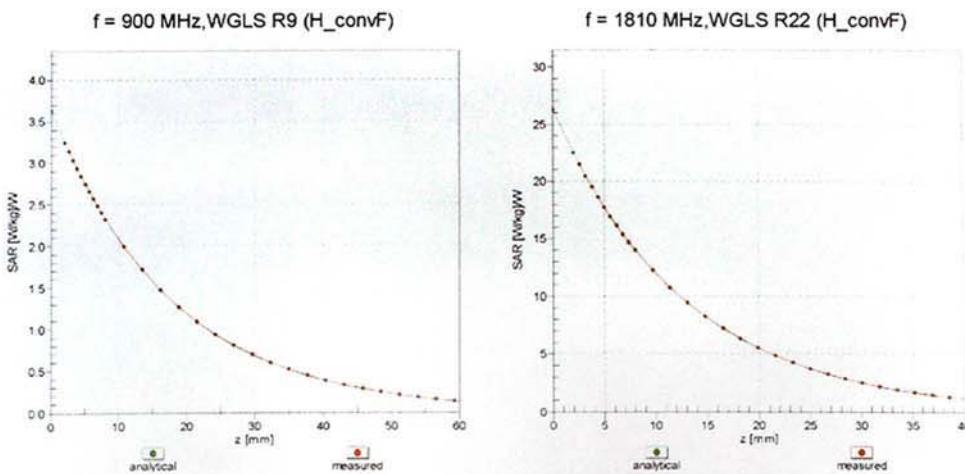

## Deviation from Isotropy in Liquid Error $(\phi, \theta)$ , $f = 900 \text{ MHz}$

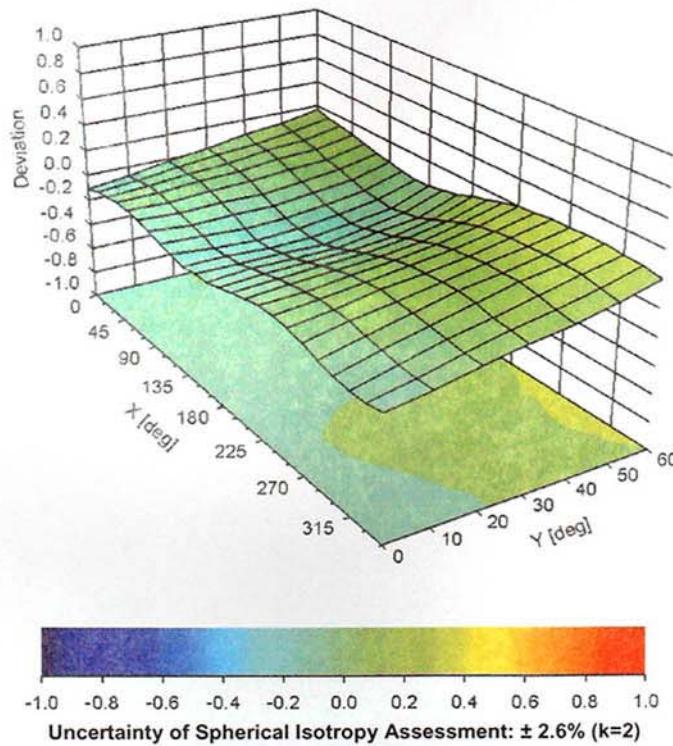



ES3DV3- SN:3292

August 15, 2015

**DASY/EASY - Parameters of Probe: ES3DV3 - SN:3292****Other Probe Parameters**

Sensor Arrangement	Triangular
Connector Angle (°)	-8.9
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	4 mm
Probe Tip to Sensor X Calibration Point	2 mm
Probe Tip to Sensor Y Calibration Point	2 mm
Probe Tip to Sensor Z Calibration Point	2 mm
Recommended Measurement Distance from Surface	3 mm



## 11.2 Probe Calibration Certificate D835V2 (4d134)



In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: [ctl@chinatl.com](mailto:ctl@chinatl.com) [Http://www.chinatl.cn](http://www.chinatl.cn)



Client

CIQ (Auden)

Certificate No: Z15-97067

### CALIBRATION CERTIFICATE

Object D835V2 - SN: 4d134

Calibration Procedure(s) TMC-OS-E-02-194  
Calibration procedure for dipole validation kits

Calibration date: July 24, 2015

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature( $22\pm3$ )°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRV	102083	11-Sep-14 (TMC, No.JZ14-443)	Sep-15
Power sensor NRV-Z5	100595	11-Sep-14 (TMC, No. JZ14-443)	Sep -15
Reference Probe EX3DV4	SN 3846	3- Sep-14 (SPEAG, No.EX3-3846_Sep14)	Sep-15
DAE4	SN 1331	23-Jan-15 (SPEAG, DAE4-1331_Jan15)	Jan -16
Signal Generator E4438C	MY49070393	13-Nov-14 (TMC, No.JZ14-394)	Nov-15
Network Analyzer E8362B	MY43021135	19-Oct-14 (TMC, No.JZ14-278)	Oct-15

Calibrated by:	Name	Function	Signature
	Yu Zongying	SAR Test Engineer	
Reviewed by:	Qi Dianyuan	SAR Project Leader	
Approved by:	Lu Bingsong	Deputy Director of the laboratory	

Issued: July 28, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z15-97067

Page 1 of 8



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: [cttl@chinattl.com](mailto:cttl@chinattl.com) [Http://www.chinattl.cn](http://www.chinattl.cn)

**Glossary:**

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORMx,y,z
N/A	not applicable or not measured

**Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) For hand-held devices used in close proximity to the ear (frequency range of 300MHz to 3GHz)", February 2005
- KDB865664, SAR Measurement Requirements for 100 MHz to 6 GHz

**Additional Documentation:**

- DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
 Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
 E-mail: ctu@chinattl.com Http://www.chinattl.cn



CALIBRATION  
No. L0570

### Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY52	52.8.8.1222
Extrapolation	Advanced Extrapolation	
Phantom	Triple Flat Phantom 5.1C	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz ± 1 MHz	

### Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	41.7 ± 6 %	0.90 mho/m ± 6 %
Head TSL temperature change during test	<1.0 °C	----	----

### SAR result with Head TSL

SAR averaged over 1 $cm^3$ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.41 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	9.62 mW /g ± 20.8 % (k=2)
SAR averaged over 10 $cm^3$ (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	1.57 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	6.27 mW /g ± 20.4 % (k=2)

### Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	55.6 ± 6 %	0.99 mho/m ± 6 %
Body TSL temperature change during test	<1.0 °C	----	----

### SAR result with Body TSL

SAR averaged over 1 $cm^3$ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.47 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	9.77 mW /g ± 20.8 % (k=2)
SAR averaged over 10 $cm^3$ (10 g) of Body TSL	Condition	
SAR measured	250 mW input power	1.64 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	6.50 mW /g ± 20.4 % (k=2)



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: [cttl@chinattl.com](mailto:cttl@chinattl.com) [Http://www.chinattl.cn](http://www.chinattl.cn)



## Appendix

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	48.8Ω + 3.34jΩ
Return Loss	- 28.9dB

### Antenna Parameters with Body TSL

Impedance, transformed to feed point	50.9Ω + 7.08jΩ
Return Loss	- 23.0dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.261 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
-----------------	-------



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: [cttl@chinatl.com](mailto:cttl@chinatl.com) [Http://www.chinatl.cn](http://www.chinatl.cn)



CALIBRATION  
No. L0570

### DASY5 Validation Report for Head TSL

Date: 24.07.2015

Test Laboratory: TMC, Beijing, China

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d134**

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.904$  S/m;  $\epsilon_r = 41.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3846; ConvF(9.32, 9.32, 9.32); Calibrated: 2014-09-03;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1331; Calibrated: 2015-01-23
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1161/2
- Measurement SW: DASY52. Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=250 mW, dist=2.0mm (EX-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:**


dx=5mm, dy=5mm, dz=5mm

Reference Value = 58.91 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 3.60 W/kg

**SAR(1 g) = 2.41 W/kg; SAR(10 g) = 1.57 W/kg**

Maximum value of SAR (measured) = 3.05 W/kg

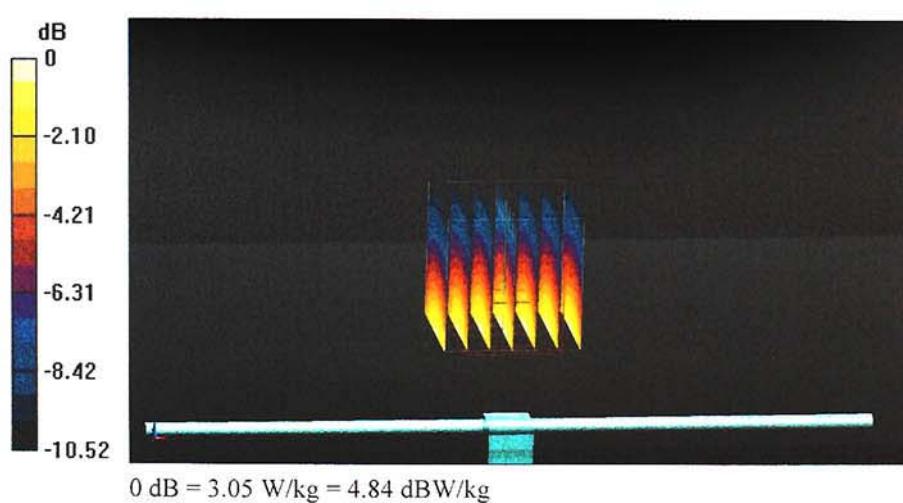

Certificate No: Z15-97067

Page 5 of 8




In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: [cttl@chinattl.com](mailto:cttl@chinattl.com) [Http://www.chinattl.cn](http://www.chinattl.cn)



### Impedance Measurement Plot for Head TSL

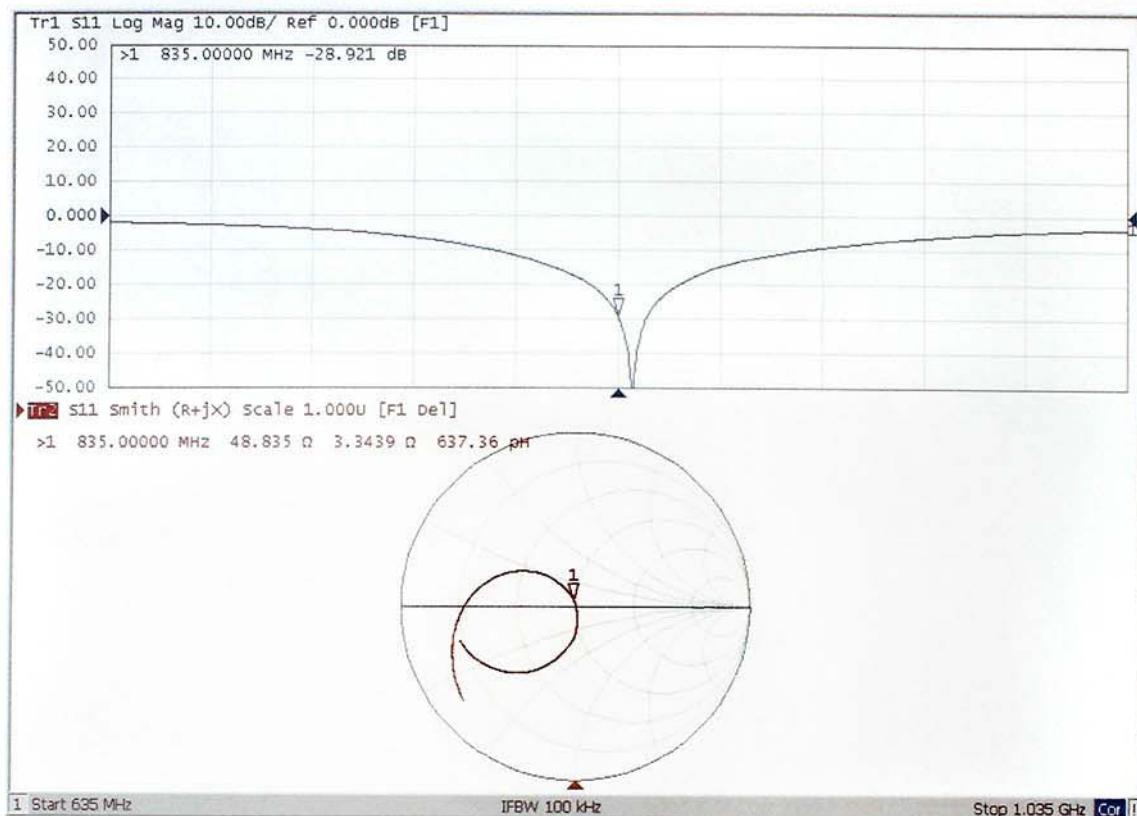



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: [cttl@chinattl.com](mailto:cttl@chinattl.com) [Http://www.chinattl.cn](http://www.chinattl.cn)



**DASY5 Validation Report for Body TSL**  
Test Laboratory: TMC, Beijing, China

Date: 24.07.2015

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d134**

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.986 \text{ S/m}$ ;  $\epsilon_r = 55.6$ ;  $\rho = 1000 \text{ kg/m}^3$


Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3846; ConvF(8.96, 8.96, 8.96); Calibrated: 2014-09-03;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1331; Calibrated: 2015-01-23
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1161/1
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=250 mW, dist=2.0mm (EX-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 57.01 V/m; Power Drift = 0.01 dB  
Peak SAR (extrapolated) = 3.66 W/kg  
**SAR(1 g) = 2.47 W/kg; SAR(10 g) = 1.64 W/kg**  
Maximum value of SAR (measured) = 3.10 W/kg

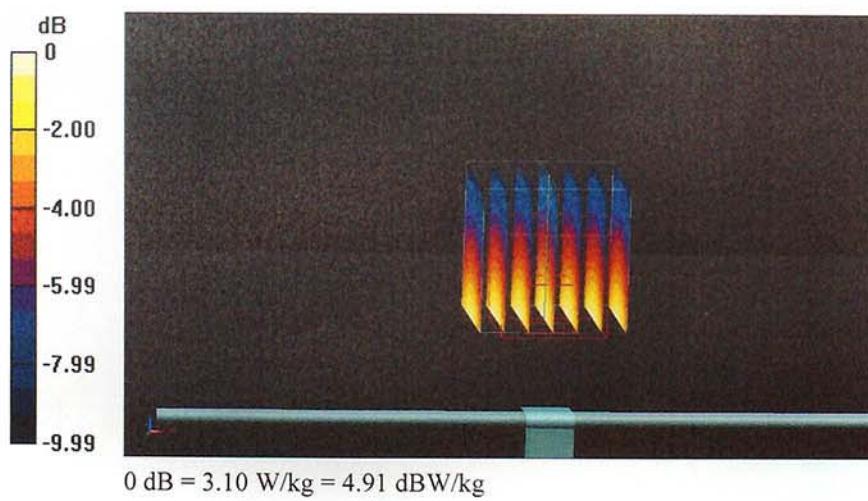




Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: [cttl@chinattl.com](mailto:cttl@chinattl.com) [Http://www.chinattl.cn](http://www.chinattl.cn)



### Impedance Measurement Plot for Body TSL

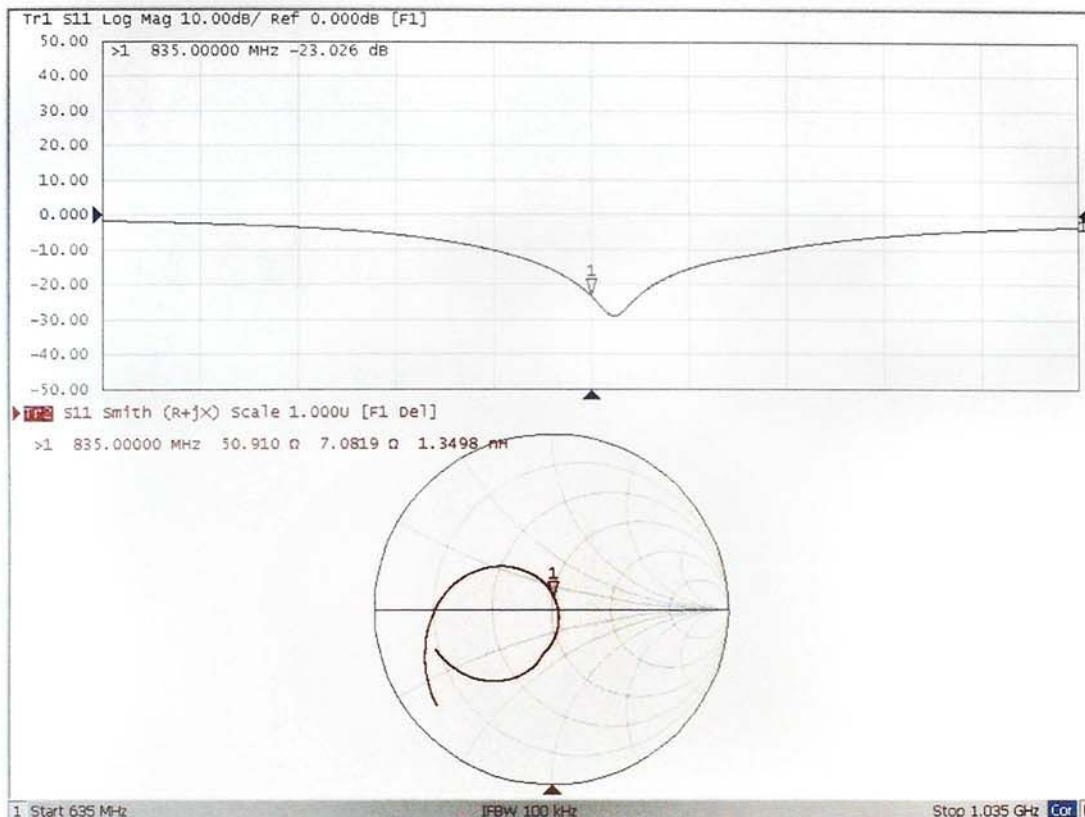



## 11.3 Probe Calibration Certificate D1900V2 (5d150)



In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: ctl@chinattl.com Http://www.chinattl.cn



CALIBRATION  
No. L0570

Client

CIQ (Auden)

Certificate No: Z15-97071

### CALIBRATION CERTIFICATE

Object D1900V2 - SN: 5d150

Calibration Procedure(s) TMC-OS-E-02-194  
Calibration procedure for dipole validation kits

Calibration date: July 25, 2015

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature( $22\pm3$ )°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRV	102083	11-Sep-14 (TMC, No.JZ14-443)	Sep-15
Power sensor NRV-Z5	100595	11-Sep-14 (TMC, No. JZ14-443)	Sep -15
Reference Probe EX3DV4	SN 3846	3- Sep-14 (SPEAG, No.EX3-3846_Sep14)	Sep-15
DAE4	SN 1331	23-Jan-15 (SPEAG, DAE4-1331_Jan15)	Jan -16
Signal Generator E4438C	MY49070393	13-Nov-14 (TMC, No.JZ14-394)	Nov-15
Network Analyzer E8362B	MY43021135	19-Oct-14 (TMC, No.JZ14-278)	Oct-15

Calibrated by:	Name	Function	Signature
	Yu Zongying	SAR Test Engineer	
Reviewed by:	Qi Dianyuan	SAR Project Leader	
Approved by:	Lu Bingsong	Deputy Director of the laboratory	

Issued: July 28, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: ctll@chinattl.com Http://www.chinattl.cn

**Glossary:**

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORMx,y,z
N/A	not applicable or not measured

**Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) For hand-held devices used in close proximity to the ear (frequency range of 300MHz to 3GHz)", February 2005
- KDB865664, SAR Measurement Requirements for 100 MHz to 6 GHz

**Additional Documentation:**

- DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.



In Collaboration with  
**s p e a g**  
 CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
 Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
 E-mail: [cttl@chinattl.com](mailto:cttl@chinattl.com) [Http://www.chinattl.cn](http://www.chinattl.cn)



CALIBRATION  
No. L0570

### Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY52	52.8.8.1222
Extrapolation	Advanced Extrapolation	
Phantom	Triple Flat Phantom 5.1C	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz ± 1 MHz	

### Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	38.9 ± 6 %	1.42 mho/m ± 6 %
Head TSL temperature change during test	<1.0 °C	---	---

### SAR result with Head TSL

SAR averaged over 1 $cm^3$ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.71 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	38.3 mW / g ± 20.8 % (k=2)
SAR averaged over 10 $cm^3$ (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	5.08 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	20.2 mW / g ± 20.4 % (k=2)

### Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	53.7 ± 6 %	1.53 mho/m ± 6 %
Body TSL temperature change during test	<1.0 °C	---	---

### SAR result with Body TSL

SAR averaged over 1 $cm^3$ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.98 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	39.9 mW / g ± 20.8 % (k=2)
SAR averaged over 10 $cm^3$ (10 g) of Body TSL	Condition	
SAR measured	250 mW input power	5.26 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	21.0 mW / g ± 20.4 % (k=2)



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: ctu@chinattl.com Http://www.chinattl.cn



## Appendix

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	50.3Ω+ 3.17jΩ
Return Loss	- 30.0dB

### Antenna Parameters with Body TSL

Impedance, transformed to feed point	48.8Ω+ 3.92jΩ
Return Loss	- 27.7dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.048 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
-----------------	-------



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: [cttl@chinattl.com](mailto:cttl@chinattl.com) [Http://www.chinattl.cn](http://www.chinattl.cn)



### DASY5 Validation Report for Head TSL

Date: 25.07.2015

Test Laboratory: TMC, Beijing, China

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d150**

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.416$  S/m;  $\epsilon_r = 38.91$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3846; ConvF(7.65, 7.65, 7.65); Calibrated: 2014-09-03;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1331; Calibrated: 2015-01-23
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1161/2
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)


**System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=2.0mm (EX-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 90.05 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 17.9 W/kg

**SAR(1 g) = 9.71 W/kg; SAR(10 g) = 5.08 W/kg**

Maximum value of SAR (measured) = 11.8 W/kg

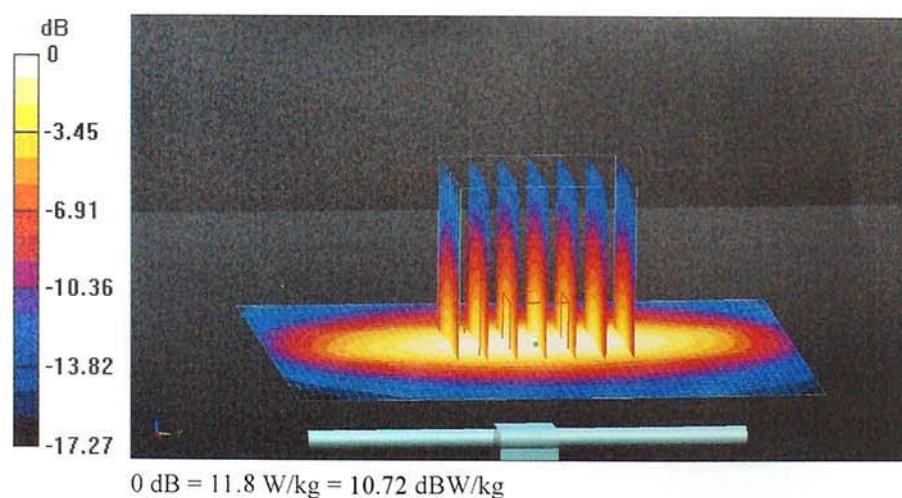

Certificate No: Z15-97071


Page 5 of 8



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: [cttl@chinattl.com](mailto:cttl@chinattl.com) [Http://www.chinattl.cn](http://www.chinattl.cn)



### Impedance Measurement Plot for Head TSL

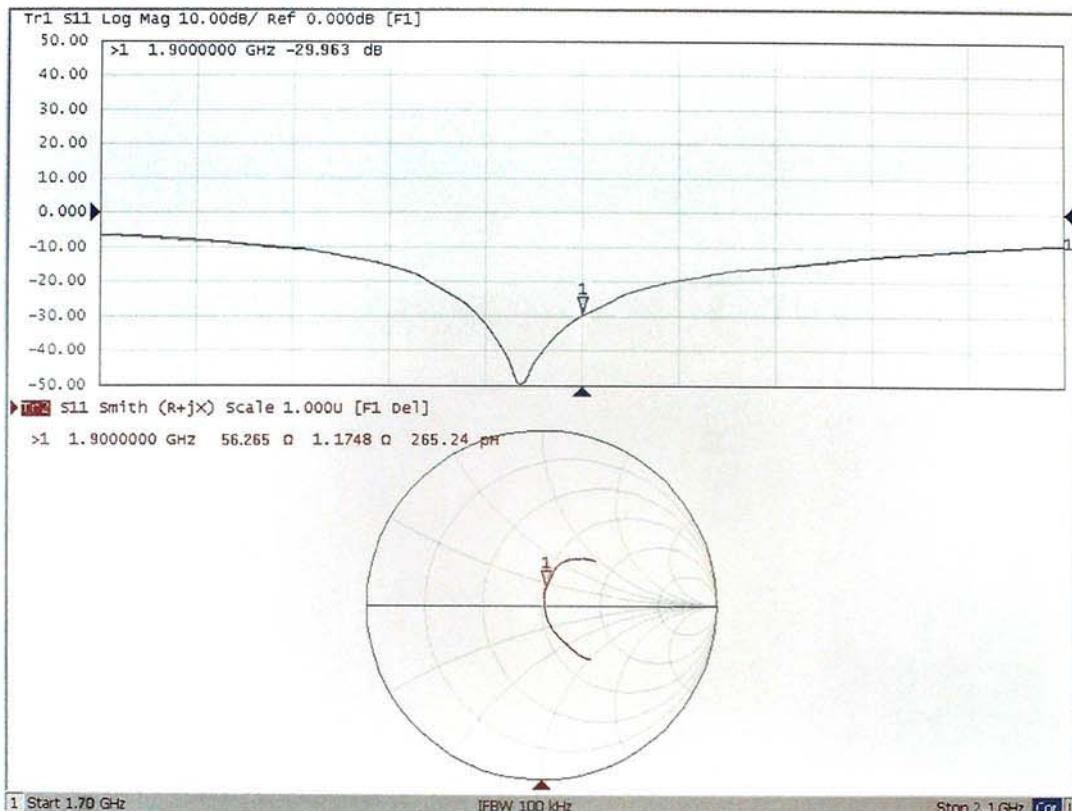

Certificate No: Z15-97071

Page 6 of 8



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: [ctl@chinattl.com](mailto:ctl@chinattl.com) [Http://www.chinattl.cn](http://www.chinattl.cn)



CALIBRATION  
No. L0570

### DASY5 Validation Report for Body TSL

Date: 25.07.2015

Test Laboratory: TMC, Beijing, China

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d150**

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.528$  S/m;  $\epsilon_r = 53.74$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3846; ConvF(7.36, 7.36, 7.36); Calibrated: 2014-09-03;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1331; Calibrated: 2015-01-23
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1161/3
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)


**System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=2.0mm (EX-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 83.606 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 17.7 W/kg

SAR(1 g) = 9.98 W/kg; SAR(10 g) = 5.26 W/kg

Maximum value of SAR (measured) = 12.1 W/kg

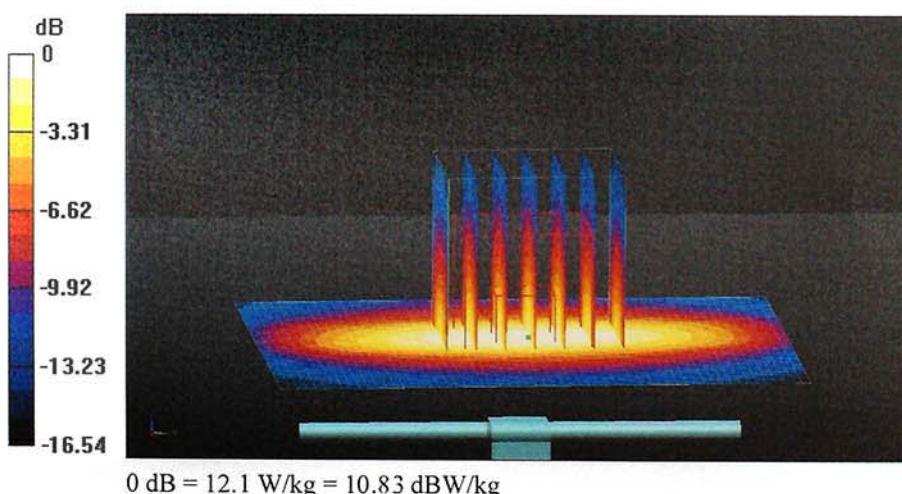

Certificate No: Z15-97071


Page 7 of 8



Add: No.51 Xucyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: [cttl@chinattl.com](mailto:cttl@chinattl.com) [Http://www.chinattl.cn](http://www.chinattl.cn)



### Impedance Measurement Plot for Body TSL

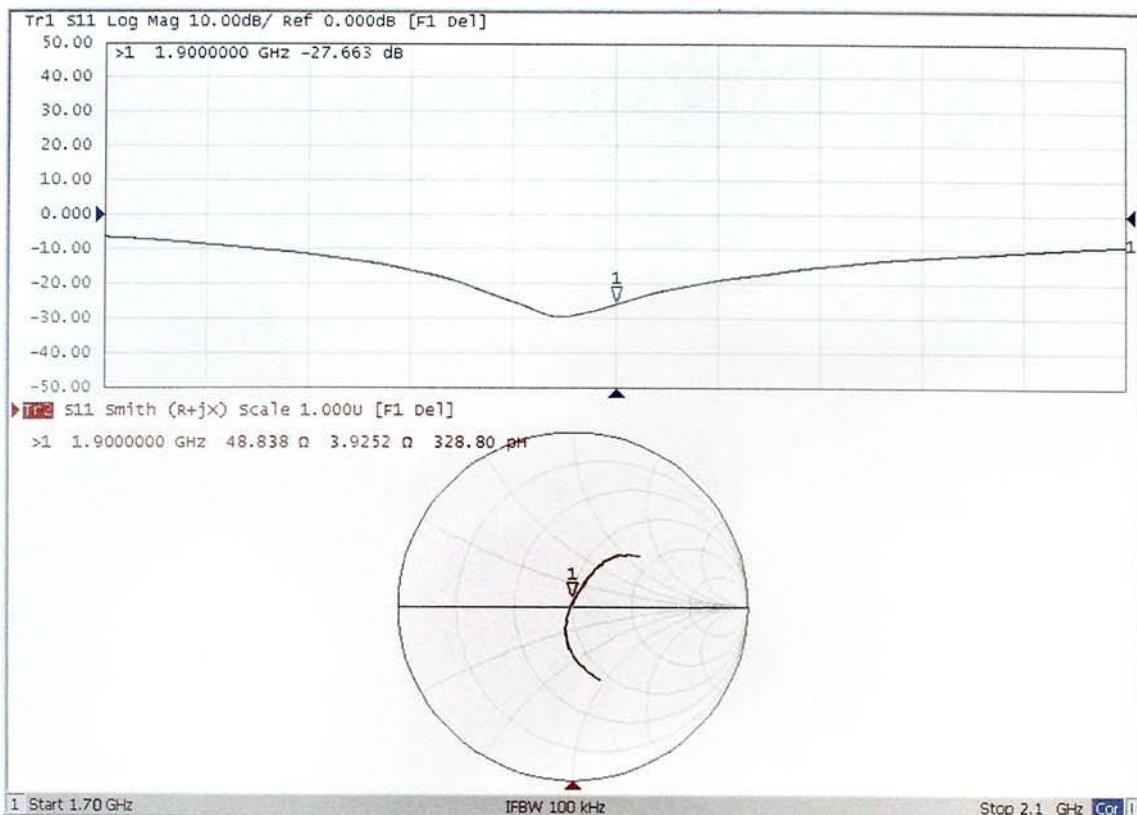

Certificate No: Z15-97071

Page 8 of 8

## 11.4 DAE Calibration Certificate DAE4 (1315)



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: ctll@chinattl.com Http://www.chinattl.cn



Client :

CIQ (Auden)

Certificate No: Z15-97066

### CALIBRATION CERTIFICATE

Object DAE4 - SN: 1315

Calibration Procedure(s) TMC-OS-E-01-198  
Calibration Procedure for the Data Acquisition Electronics  
(DAEEx)

Calibration date: July 22, 2015



This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature( $22\pm3$ )°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Documenting Process Calibrator 753	1971018	01-July-15 (CTTL, No:J15X02147)	July-16

Calibrated by: Name Yu Zongying Function SAR Test Engineer  
Reviewed by: Qi Dianyuan SAR Project Leader  
Approved by: Lu Bingsong Deputy Director of the laboratory



Issued: July 23, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: [ctl@chinattl.com](mailto:ctl@chinattl.com) Http://www.chinattl.cn



CALIBRATION  
No. L0570

### Glossary:

DAE	data acquisition electronics
Connector angle	information used in DASY system to align probe sensor X to the robot coordinate system.

### Methods Applied and Interpretation of Parameters:

- *DC Voltage Measurement:* Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle:* The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The report provide only calibration results for DAE, it does not contain other performance test results.



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: [cttl@chinattl.com](mailto:cttl@chinattl.com) [Http://www.chinattl.cn](http://www.chinattl.cn)



CALIBRATION  
No. L0570

### DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB =  $6.1\mu V$ , full range =  $-100...+300\text{ mV}$   
Low Range: 1LSB =  $61\text{nV}$ , full range =  $-1.....+3\text{mV}$

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	$405.162 \pm 0.15\% \text{ (k=2)}$	$405.006 \pm 0.15\% \text{ (k=2)}$	$404.963 \pm 0.15\% \text{ (k=2)}$
Low Range	$3.99072 \pm 0.7\% \text{ (k=2)}$	$3.98481 \pm 0.7\% \text{ (k=2)}$	$3.98836 \pm 0.7\% \text{ (k=2)}$

### Connector Angle

Connector Angle to be used in DASY system	$22^\circ \pm 1^\circ$
---	------------------------

## 12. EUT TEST PHOTO



Liquid depth in the flat Phantom (835 MHz, 15.3cm depth)




Liquid depth in the head Phantom (835 MHz, 15.0cm depth)




Liquid depth in the flat Phantom (1900 MHz, 15.2cm depth)




Liquid depth in the head Phantom (1900 MHz, 15.1cm depth)

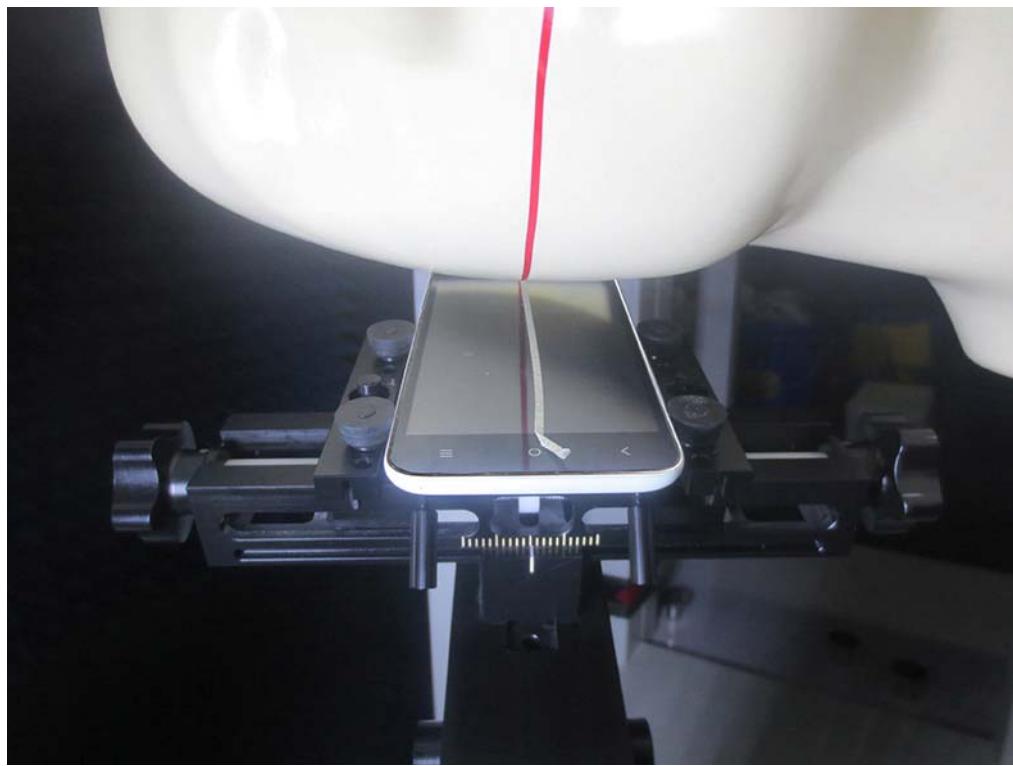


**Right Head Tilt Setup Photo**

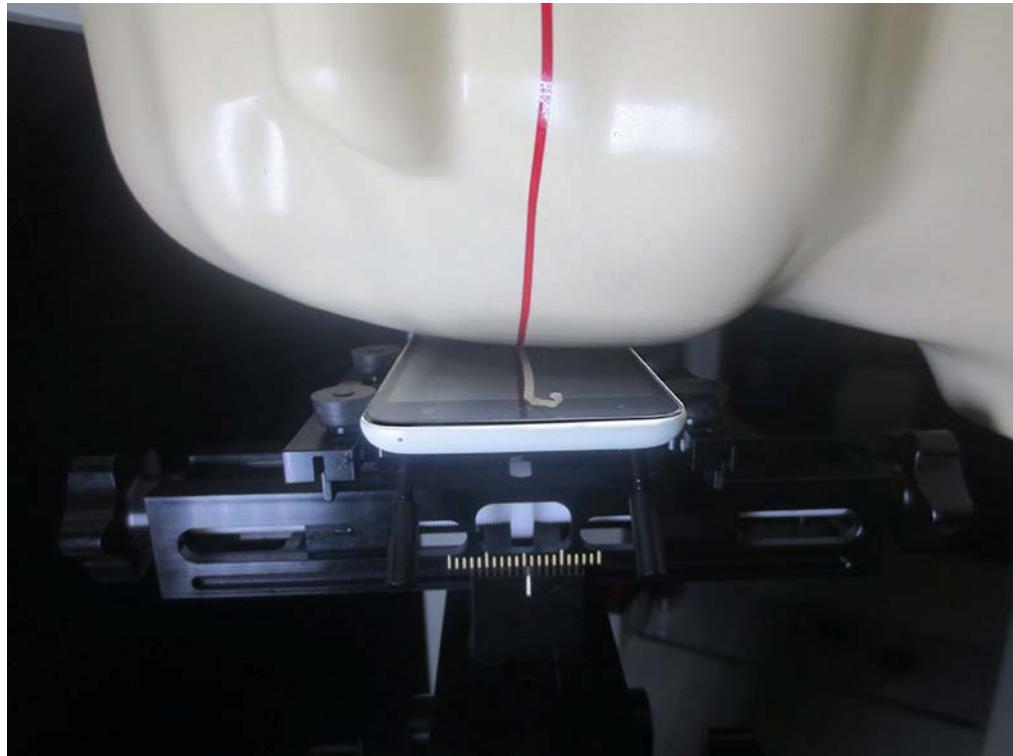

**Right Head Cheek Setup Photo**

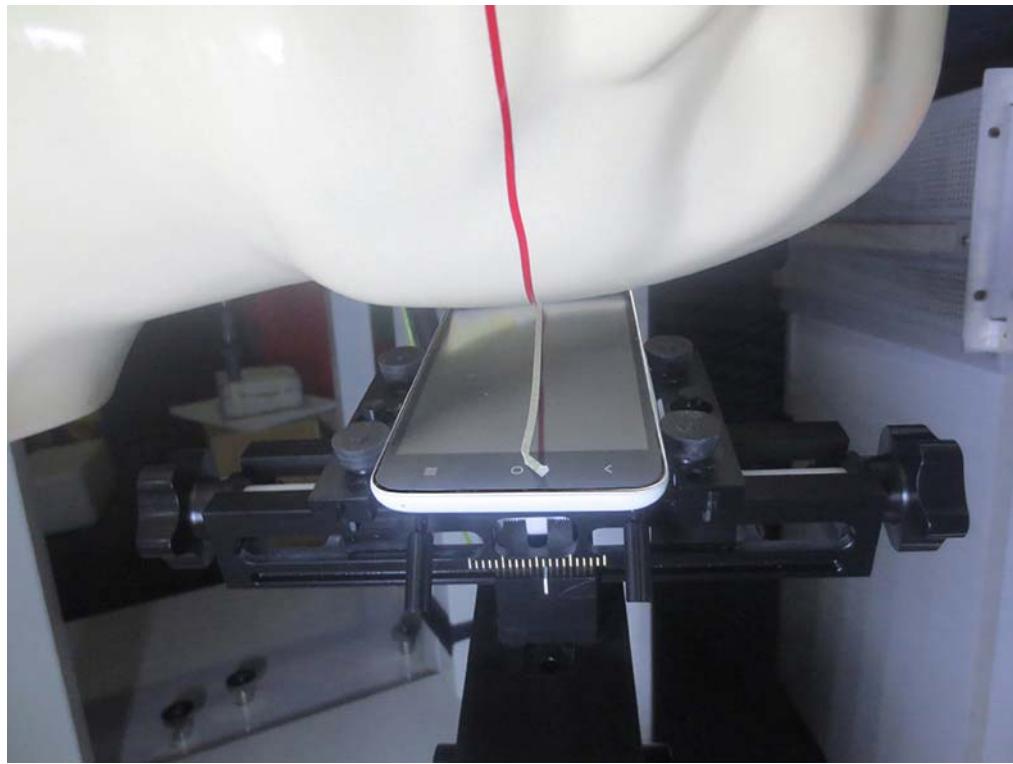


**Left Head Tilt Setup Photo**

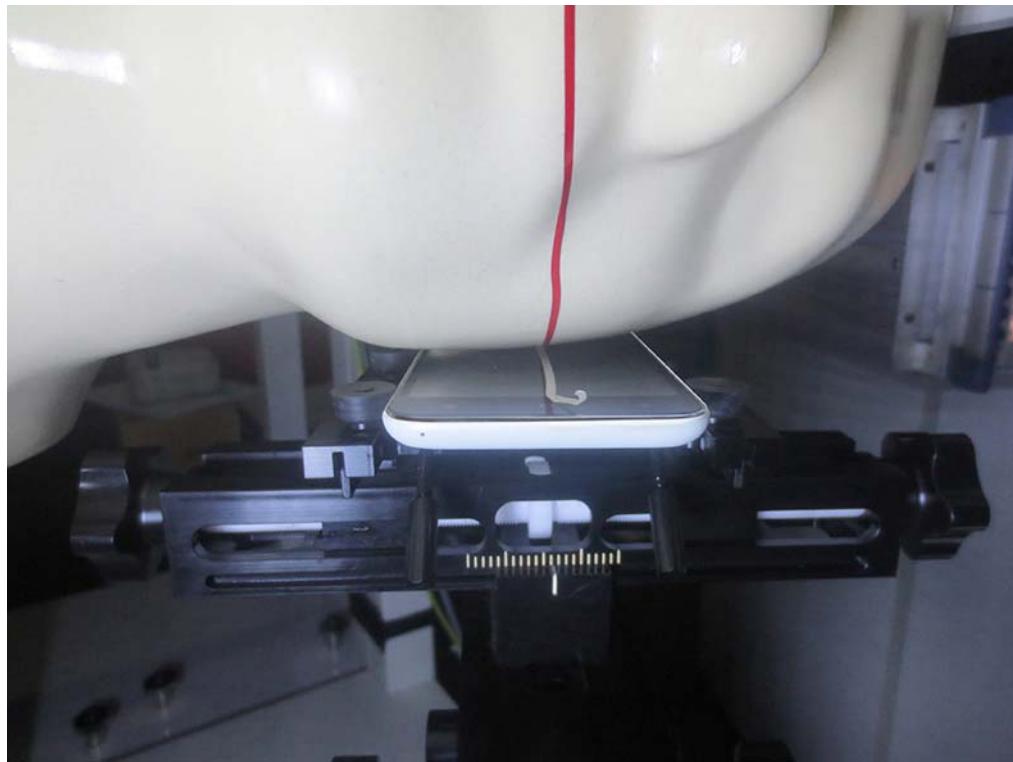

**Left Head Cheek Setup Photo**



10mm Body-worn Accessory& Hotspot Mode Rear Side Setup Photo

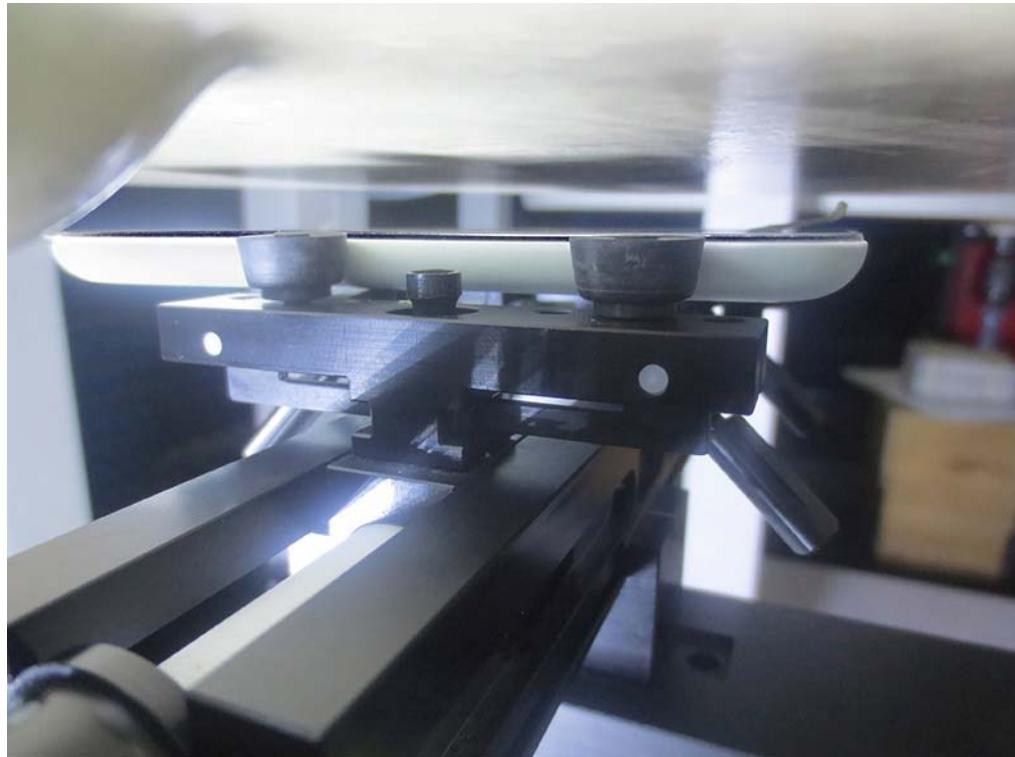

10mm Body-worn Accessory& Hotspot Mode Front Side Setup Photo



**10mm Hotspot mode Bottom Edge Setup Photo**



**10mm Hotspot mode Left Edge Setup Photo**



**10mm Hotspot mode Right Edge Setup Photo**



## 13. PHOTOGRAPHS OF EUT CONSTRUCTIONAL

Reference to the test report No. GTI20150681F-1

\*\*\*\*\*THE END\*\*\*\*\*