


Attachment 4

➤ Co-location

30MHz-1GHz Spurious

Site :	CB4-H	Engineer :	Lion
Model No :	CV90-JE103	Test Date :	2019/4/13
Test Voltage :	DC 12V	Polarity :	Horizontal
Test Mode :	Mode 1: Transmit Mode		
Note :	WCDMA+BT		

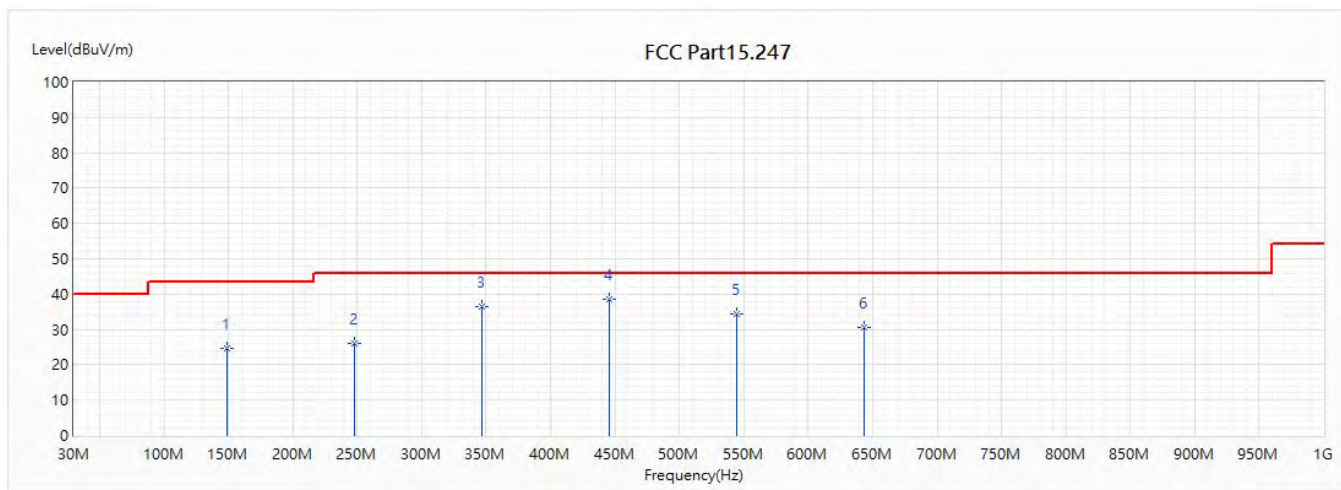


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	148.534	24.59	43.50	-18.91	46.23	-21.64	QP
2	247.474	26.01	46.00	-19.99	45.98	-19.97	QP
3	346.511	36.62	46.00	-9.38	53.89	-17.27	QP
* 4	445.548	38.43	46.00	-7.57	53.06	-14.63	QP
5	544.488	34.43	46.00	-11.57	47.53	-13.10	QP
6	643.525	30.72	46.00	-15.28	42.82	-12.10	QP

Note:

1. All reading levels is Quasi-Peak value.
2. " * ", means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Site :	CB4-H	Engineer :	Lion
Model No :	CV90-JE103	Test Date :	2019/4/13
Test Voltage :	DC 12V	Polarity :	Vertical
Test Mode :	Mode 1: Transmit Mode		
Note :	WCDMA+BT		

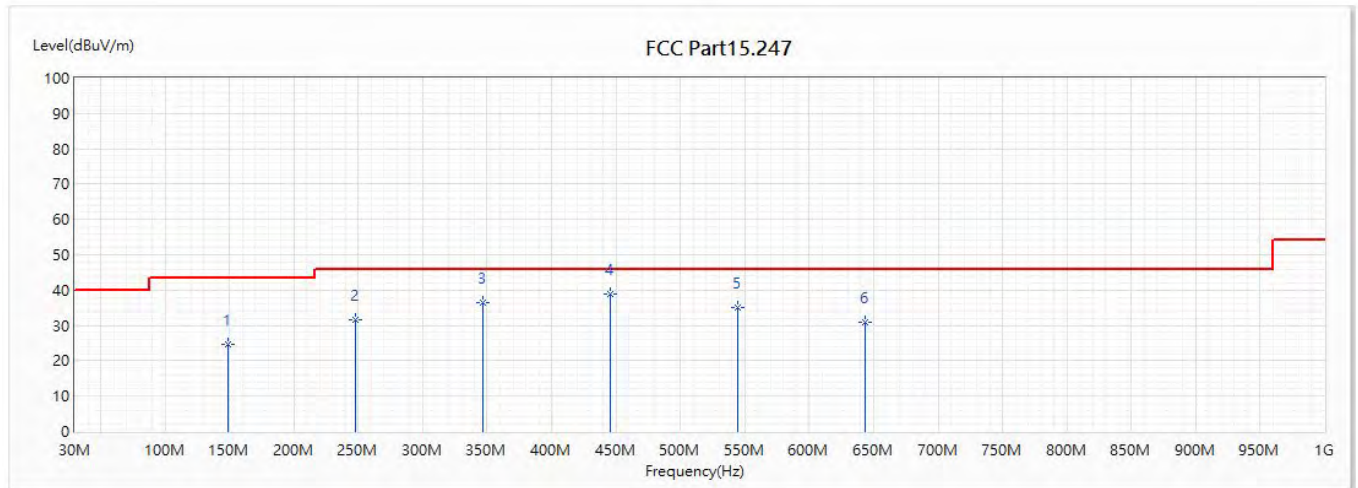


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	148.437	24.49	43.50	-19.01	46.13	-21.64	QP
2	247.474	31.75	46.00	-14.25	51.72	-19.97	QP
3	346.511	36.58	46.00	-9.42	53.85	-17.27	QP
* 4	445.548	38.85	46.00	-7.15	53.48	-14.63	QP
5	544.488	35.01	46.00	-10.99	48.11	-13.10	QP
6	643.525	30.79	46.00	-15.21	42.89	-12.10	QP

Note:

1. All reading levels is Quasi-Peak value.
2. " * ", means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Site :	CB4-H	Engineer :	Lion
Model No :	CV90-JE103	Test Date :	2019/4/13
Test Voltage :	DC 12V	Polarity :	Horizontal
Test Mode :	Mode 1: Transmit Mode		
Note :	LTE+BT		

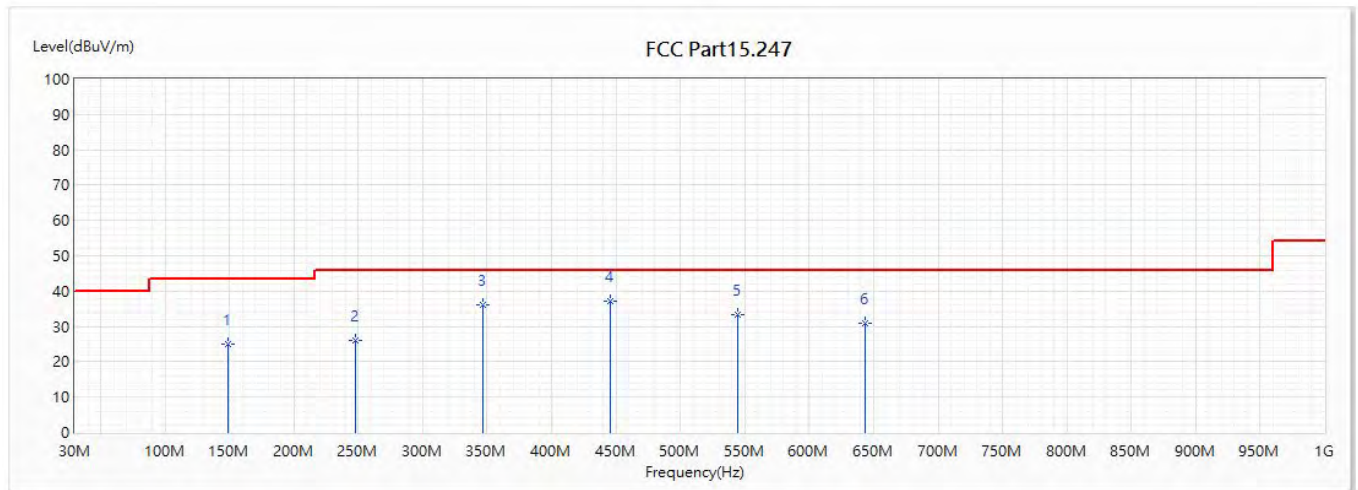


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	148.437	24.99	43.50	-18.51	46.63	-21.64	QP
2	247.474	25.93	46.00	-20.07	45.90	-19.97	QP
3	346.511	35.99	46.00	-10.01	53.26	-17.27	QP
* 4	445.548	36.98	46.00	-9.02	51.61	-14.63	QP
5	544.488	33.44	46.00	-12.56	46.54	-13.10	QP
6	643.525	30.99	46.00	-15.01	43.09	-12.10	QP

Note:

1. All reading levels is Quasi-Peak value.
2. " * ", means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Site :	CB4-H	Engineer :	Lion
Model No :	CV90-JE103	Test Date :	2019/4/13
Test Voltage :	DC 12V	Polarity :	Vertical
Test Mode :	Mode 1: Transmit Mode		
Note :	LTE+BT		

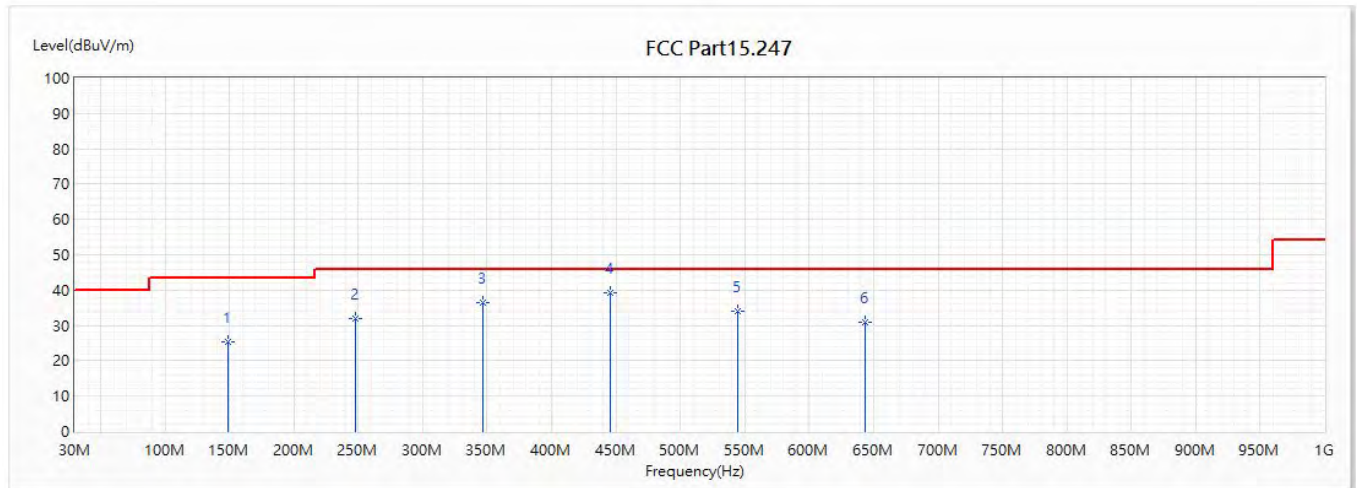


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	148.437	25.27	43.50	-18.23	46.91	-21.64	QP
2	247.474	31.88	46.00	-14.12	51.85	-19.97	QP
3	346.511	36.54	46.00	-9.46	53.81	-17.27	QP
* 4	445.451	39.32	46.00	-6.68	53.95	-14.63	QP
5	544.488	34.19	46.00	-11.81	47.29	-13.10	QP
6	643.525	30.80	46.00	-15.20	42.90	-12.10	QP

Note:

1. All reading levels is Quasi-Peak value.
2. " * ", means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Harmonic & Spurious:

Site :	CB4-H	Engineer :	Lion
Model No :	CV90-JE103	Test Date :	2019/4/13
Test Voltage :	DC 12V	Polarity :	Horizontal
Test Mode :	Mode 1: Transmit Mode		
Note :	WCDMA+BT		

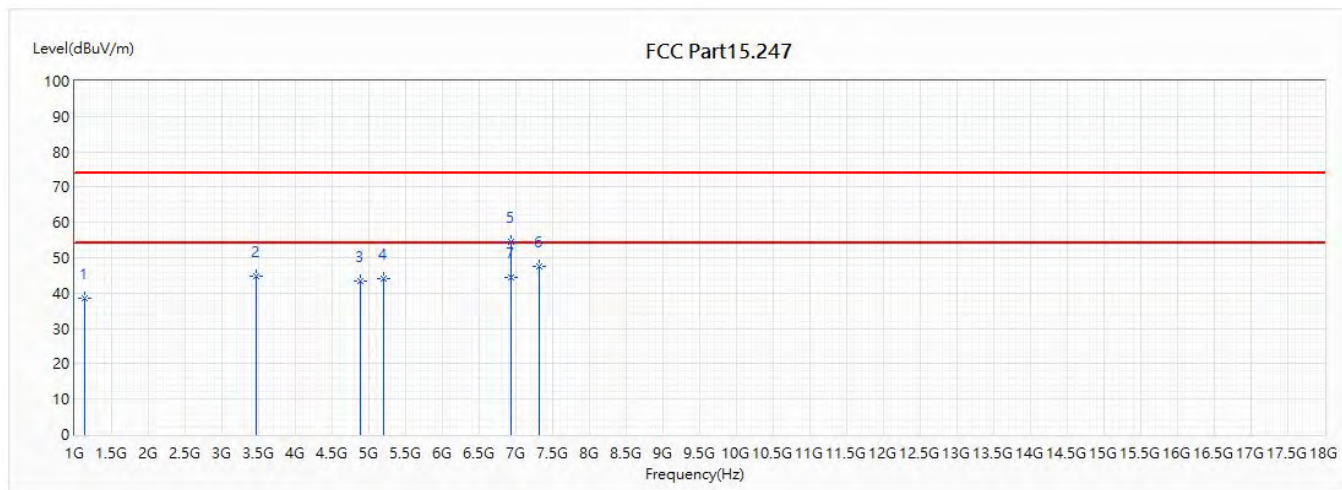


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	1132.6	38.58	74.00	-35.42	42.99	-4.41	PK
2	3465.2	44.92	74.00	-29.08	40.12	4.80	PK
3	4882	43.25	74.00	-30.75	32.92	10.33	PK
4	5197.8	44.10	74.00	-29.90	33.25	10.85	PK
5	6930.4	54.65	74.00	-19.35	39.15	15.50	PK
6	7323	47.48	74.00	-26.52	30.89	16.59	PK
* 7	6930.4	44.48	54.00	-9.52	28.98	15.50	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limit.

Site :	CB4-H	Engineer :	Lion
Model No :	CV90-JE103	Test Date :	2019/4/13
Test Voltage :	DC 12V	Polarity :	Vertical
Test Mode :	Mode 1: Transmit Mode		
Note :	WCDMA+BT		

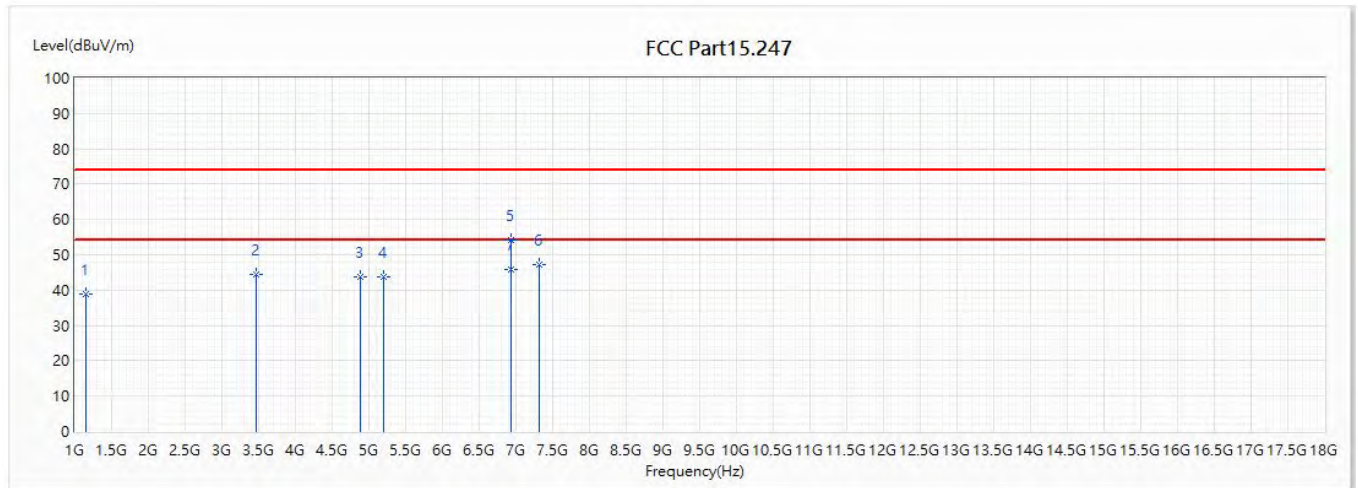


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	1153	38.88	74.00	-35.12	43.16	-4.28	PK
2	3465.2	44.34	74.00	-29.66	39.54	4.80	PK
3	4882	43.78	74.00	-30.22	33.45	10.33	PK
4	5197.8	43.77	74.00	-30.23	32.92	10.85	PK
5	6930.4	54.05	74.00	-19.95	38.55	15.50	PK
6	7323	47.23	74.00	-26.77	30.64	16.59	PK
* 7	6930.4	45.66	54.00	-8.34	30.16	15.50	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limit.

Site :	CB4-H	Engineer :	Lion
Model No :	CV90-JE103	Test Date :	2019/4/13
Test Voltage :	DC 12V	Polarity :	Horizontal
Test Mode :	Mode 1: Transmit Mode		
Note :	LTE+BT		

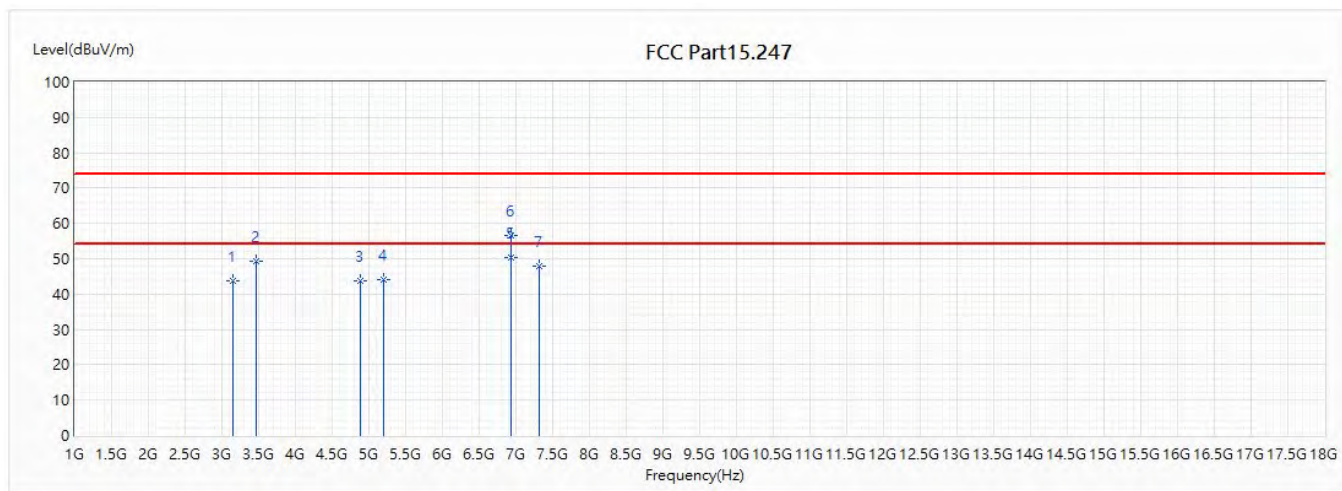


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	3150.5	43.88	74.00	-30.12	39.67	4.21	PK
2	3465	49.42	74.00	-24.58	44.62	4.80	PK
3	4882	43.63	74.00	-30.37	33.30	10.33	PK
4	5197.5	44.18	74.00	-29.82	33.33	10.85	PK
* 5	6930	50.21	54.00	-3.79	34.72	15.49	AV
6	6930	56.67	74.00	-17.33	41.18	15.49	PK
7	7323	47.85	74.00	-26.15	31.26	16.59	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limit.

Site :	CB4-H	Engineer :	Lion
Model No :	CV90-JE103	Test Date :	2019/4/13
Test Voltage :	DC 12V	Polarity :	Vertical
Test Mode :	Mode 1: Transmit Mode		
Note :	LTE+BT		

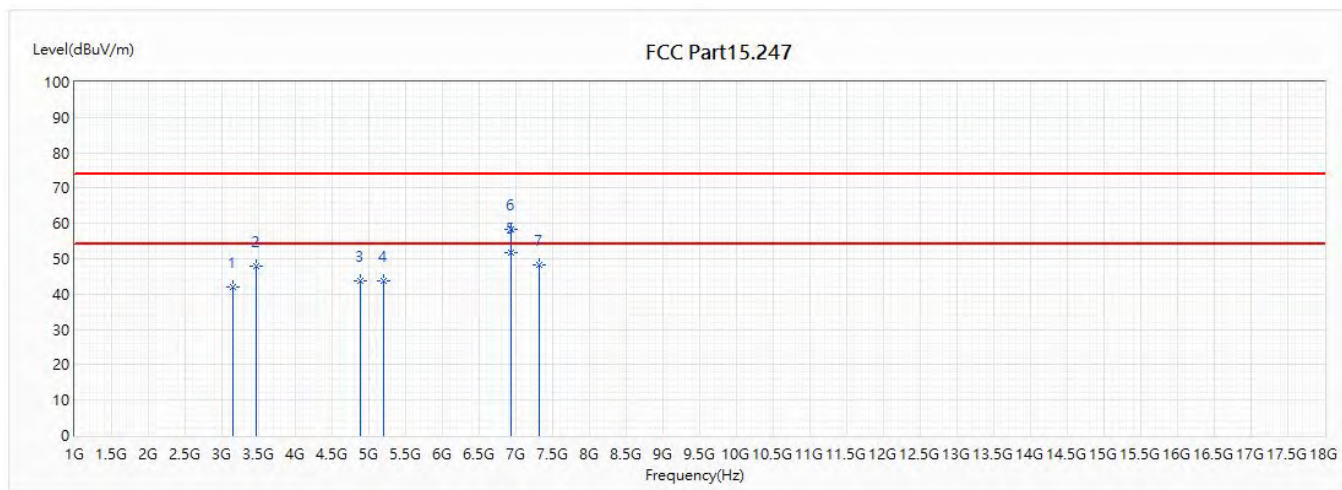

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	3150.5	42.04	74.00	-31.96	37.83	4.21	PK
2	3465	47.87	74.00	-26.13	43.07	4.80	PK
3	4882	43.82	74.00	-30.18	33.49	10.33	PK
4	5197.5	43.64	74.00	-30.36	32.79	10.85	PK
* 5	6930	51.67	54.00	-2.33	36.18	15.49	AV
6	6930	58.28	74.00	-15.72	42.79	15.49	PK
7	7323	48.28	74.00	-25.72	31.69	16.59	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limit.