EMC TEST REPORT



Report No.: 16070822-FCC-E
Supersede Report No.:N/A

Applicant	AOC			
Product Name	Tablet PC			
Model No.	A725			
Serial No.	A721,A722,A723,A724,A726,A727,A728,A729			
Test Standard	FCC Part 15 Subpart B Class B:2015, ANSI C63.4: 2014			
Test Date	July 22 to August 05, 2016			
Issue Date	August 06, 2016			
Test Result	Pass Fail			
Equipment complied with the specification				
Equipment did not comply with the specification				
Loven	Luo	David	Huang	
Loren Luo Test Engineer			Huang ked By	

This test report may be reproduced in full only

Test result presented in this test report is applicable to the tested sample only

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park
South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn



Test Report	16070822-FCC-E
Page	2 of 30

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety



Test Report	16070822-FCC-E
Page	3 of 30

This page has been left blank intentionally.



Test Report	16070822-FCC-E
Page	4 of 30

CONTENTS

1	REPORT REVISION HISTORY	5
2.	CUSTOMER INFORMATION	5
3.	TEST SITE INFORMATION	5
4.	EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5.	TEST SUMMARY	8
6.	MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	9
6.1	AC POWER LINE CONDUCTED EMISSIONS	9
6.2	RADIATED EMISSIONS	15
INA	NEX A. TEST INSTRUMENT	20
INA	NEX B. EUT AND TEST SETUP PHOTOGRAPHS	21
ANI	NEX C. TEST SETUP AND SUPPORTING EQUIPMENT	26
ANI	NEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	29
ANI	NEX F DECLARATION OF SIMILARITY	30



Test Report	16070822-FCC-E
Page	5 of 30

1. Report Revision History

Report No.	Report Version	Description	Issue Date
16070822-FCC-E	NONE	Original	August 06, 2016

2. Customer information

Applicant Name	AOC	
Applicant Add	14F-5, NO.258, Liancheng Rd., Zhonghe Dist., New Taipei	
	City, Taiwan	
Manufacturer	China Great Wall Computer Shenzhen Co., Ltd.	
Manufacturer Add	No.Great Wall Computer Industrial Park,Bao Shi East Road,Bao' an	
	Bistrict,Shenzhen,P.R.China	

3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES	
	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park	
Lab Address	South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China	
	518108	
FCC Test Site No.	718246	
IC Test Site No.	4842E-1	
Test Software	Radiated Emission Program-To Shenzhen v2.0	



Date EUT received:

Test Report	16070822-FCC-E
Page	6 of 30

4. Equipment under Test (EUT) Information

Description of EUT:	Tablet PC
Main Model:	A725
Serial Model:	A721,A722,A723,A724,A726,A727,A728,A729
Antenna Gain:	Bluetooth/BLE/WIFI: 0dBi
Antenna Type:	PIFA antenna
Input Power:	Adapter: Model:LFS0501500D-A8S Input: AC 100-240V~50/60Hz;0.5A Output: DC 5.0V,1500mA Battery: Spec: 3.7V,2500mAh(9.25Wh)
Equipment Category :	JBC
Type of Modulation:	802.11b/g/n: DSSS, OFDM Bluetooth: GFSK, π /4DQPSK, 8DPSK BLE: GFSK
RF Operating Frequency (ies):	WIFI: 802.11b/g/n(20M): 2412-2472 MHz Bluetooth& BLE: 2402-2480 MHz
Number of Channels:	WIFI:802.11b/g/n(20M): 13CH Bluetooth: 79CH BLE: 40CH
Port:	Earphone Port, USB Port , SD Card Port
Trade Name :	AOC
FCC ID:	2AEB5-A725

July 21, 2016



Test Report	16070822-FCC-E
Page	7 of 30

Test Date(s):	July 22 to August 05, 2016



Test Report	16070822-FCC-E
Page	8 of 30

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.107; ANSI C63.4: 2014	AC Power Line Conducted Emissions	Compliance
§15.109; ANSI C63.4: 2014	Radiated Emissions	Compliance

Measurement Uncertainty

Emissions		
Test Item Description Uncertainty		
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-



Test Report	16070822-FCC-E
Page	9 of 30

6. Measurements, Examination And Derived Results

6.1 AC Power Line Conducted Emissions

Temperature	24°C
Relative Humidity	56%
Atmospheric Pressure	1004mbar
Test date :	August 04, 2016
Tested By:	Loren Luo

Requirement(s):

Spec	Item	Requirement			Applicable
47CFR§15.	a)	For Low-power radio-freconnected to the public voltage that is conducted frequency or frequencied not exceed the limits in [mu] H/50 ohms line implower limit applies at the	c utility (AC) power line ed back onto the AC poses, within the band 150 the following table, as appedance stabilization in	the radio frequency ower line on any kHz to 30 MHz, shall measured using a 50 network (LISN). The	₹
107		Frequency ranges	Limit (
		(MHz)	QP	Average	
		0.15 ~ 0.5	66 – 56	56 – 46	
		0.5 ~ 5	56	46	
		5 ~ 30	60	50	
Test Setup	Test Setup Vertical Ground Reference Plane Test Receiver Horizontal Ground Reference Plane				
	Note: 1.Support units were connected to second LISN. 2.Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.				
Procedure	 The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table. The power supply for the EUT was fed through a 50Ω /50mH EUT LISN, connected to 				
	filte	ered mains.			



Test Report	16070822-FCC-E
Page	10 of 30


_	
	3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss
	coaxial cable.
	4. All other supporting equipment were powered separately from another main supply.
	5. The EUT was switched on and allowed to warm up to its normal operating condition.
	6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power)
	over the required frequency range using an EMI test receiver.
	7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the
	selected frequencies and the necessary measurements made with a receiver bandwidth
	setting of 10 kHz.
	8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).
Remark	
Result	Pass Fail
	Yes N/A Yes (See below)
Test Mode 1:	USB Mode
Test Mode 2:	MP4 Mode
Test Mode 3:	Camera Mode
Test Mode 4:	SD Card Mode

All modes were investigated. The result below show only the worst case.



Test Report	16070822-FCC-E
Page	11 of 30

Test Mode:	USB Mode

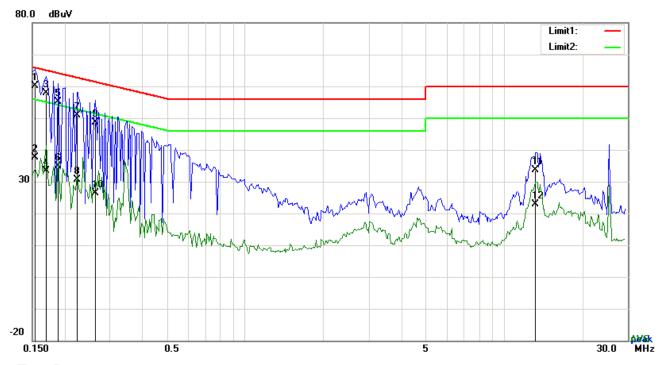


Phase Line Plot at 120Vac, 60Hz

	That Int at 125 tag, con							
No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	L1	0.1539	50.01	QP	10.03	60.04	65.79	-5.75
2	L1	0.1539	27.62	AVG	10.03	37.65	55.79	-18.14
3	L1	0.1695	47.74	QP	10.03	57.77	64.98	-7.21
4	L1	0.1695	23.40	AVG	10.03	33.43	54.98	-21.55
5	L1	0.1890	45.10	QP	10.03	55.13	64.08	-8.95
6	L1	0.1890	24.90	AVG	10.03	34.93	54.08	-19.15
7	L1	0.2241	40.79	QP	10.03	50.82	62.67	-11.85
8	L1	0.2241	20.56	AVG	10.03	30.59	52.67	-22.08
9	L1	0.2631	38.48	QP	10.03	48.51	61.33	-12.82
10	L1	0.2631	16.37	AVG	10.03	26.40	51.33	-24.93
11	L1	13.2063	23.55	QP	10.20	33.75	60.00	-26.25
12	L1	13.2063	12.77	AVG	10.20	22.97	50.00	-27.03



Test Report	16070822-FCC-E
Page	12 of 30

Test Mode:

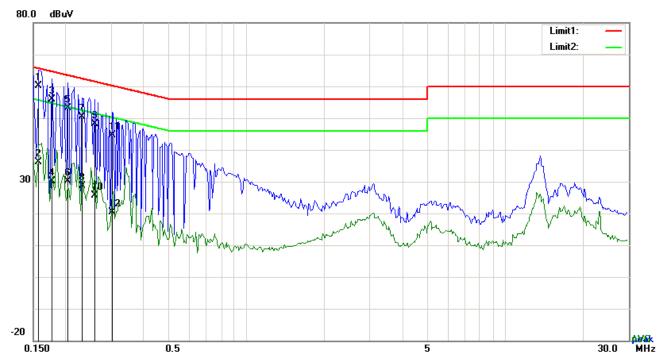


Phase Neutral Plot at 120Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB}	(dBuV)	(dBuV)	(dB)
1	N	0.1578	50.14	QP	10.02	60.16	65.58	-5.42
2	N	0.1578	26.04	AVG	10.02	36.06	55.58	-19.52
3	N	0.1773	45.98	QP	10.02	56.00	64.61	-8.61
4	N	0.1773	20.10	AVG	10.02	30.12	54.61	-24.49
5	N	0.2046	43.23	QP	10.02	53.25	63.42	-10.17
6	N	0.2046	20.02	AVG	10.02	30.04	53.42	-23.38
7	N	0.2319	40.38	QP	10.02	50.40	62.38	-11.98
8	N	0.2319	18.65	AVG	10.02	28.67	52.38	-23.71
9	N	0.2592	38.21	QP	10.02	48.23	61.46	-13.23
10	N	0.2592	15.49	AVG	10.02	25.51	51.46	-25.95
11	N	0.3021	34.55	QP	10.02	44.57	60.18	-15.61
12	N	0.3021	10.45	AVG	10.02	20.47	50.18	-29.71



Test Report	16070822-FCC-E
Page	13 of 30

Test Mode:

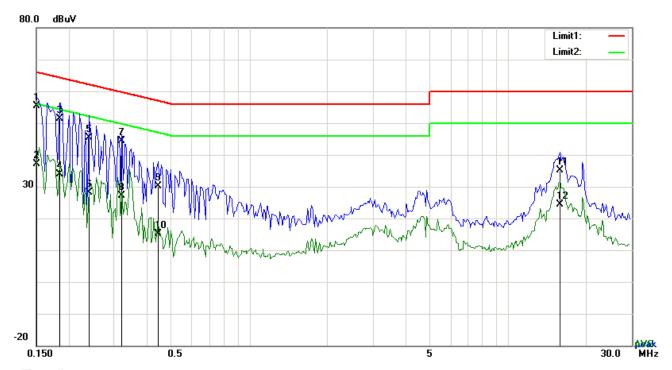


Phase Line Plot at 240Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB}	(dBuV)	(dBuV)	(dB)
1	L1	0.1500	45.34	QP	10.03	55.37	66.00	-10.63
2	L1	0.1500	27.08	AVG	10.03	37.11	56.00	-18.89
3	L1	0.1851	41.32	QP	10.03	51.35	64.25	-12.90
4	L1	0.1851	23.92	AVG	10.03	33.95	54.25	-20.30
5	L1	0.2397	35.45	QP	10.03	45.48	62.11	-16.63
6	L1	0.2397	18.01	AVG	10.03	28.04	52.11	-24.07
7	L1	0.3216	34.46	QP	10.03	44.49	59.67	-15.18
8	L1	0.3216	17.05	AVG	10.03	27.08	49.67	-22.59
9	L1	0.4425	20.19	QP	10.03	30.22	57.01	-26.79
10	L1	0.4425	5.11	AVG	10.03	15.14	47.01	-31.87
11	L1	15.8310	24.83	QP	10.24	35.07	60.00	-24.93
12	L1	15.8310	14.16	AVG	10.24	24.40	50.00	-25.60



Test Report	16070822-FCC-E
Page	14 of 30

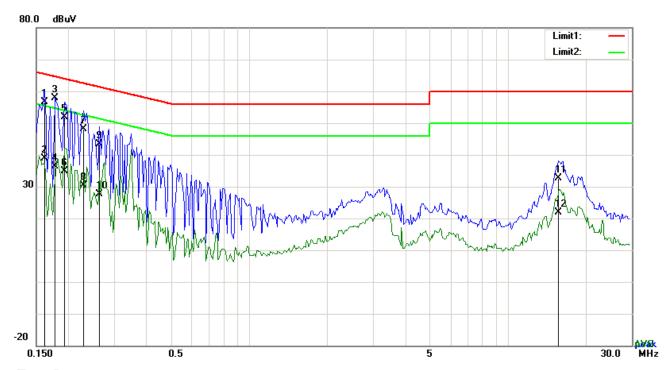

Phase Neutral Plot at 240Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB}	(dBuV)	(dBuV)	(dB)
1	N	0.1617	46.64	QP	10.02	56.66	65.38	-8.72
2	N	0.1617	28.90	AVG	10.02	38.92	55.38	-16.46
3	N	0.1773	47.93	QP	10.02	57.95	64.61	-6.66
4	N	0.1773	26.32	AVG	10.02	36.34	54.61	-18.27
5	N	0.1929	41.86	QP	10.02	51.88	63.91	-12.03
6	N	0.1929	24.77	AVG	10.02	34.79	53.91	-19.12
7	N	0.2280	38.10	QP	10.02	48.12	62.52	-14.40
8	N	0.2280	20.39	AVG	10.02	30.41	52.52	-22.11
9	N	0.2631	33.45	QP	10.02	43.47	61.33	-17.86
10	N	0.2631	17.58	AVG	10.02	27.60	51.33	-23.73
11	N	15.6048	22.38	QP	10.21	32.59	60.00	-27.41
12	N	15.6048	11.70	AVG	10.21	21.91	50.00	-28.09



Test Report	16070822-FCC-E
Page	15 of 30

6.2 Radiated Emissions

Temperature	24°C
Relative Humidity	56%
Atmospheric Pressure	1004mbar
Test date :	August 04, 2016
Tested By :	Loren Luo

Requirement(s):

Spec	Item	tem Requirement Applicable					
47CFR§15.	a)	Except higher limit as specified else emissions from the low-power radio exceed the field strength levels spe the level of any unwanted emission; the fundamental emission. The tight edges	\				
109(d)	u)	Frequency range (MHz)	Field Strength (μV/m)	, .			
		30 - 88	100				
		88 – 216	150				
		216 960	200				
		Above 960	500				
Test Setup	Ant. Tower Support Units Turn Table Ground Plane Test Receiver						
Procedure	1. The EUT was switched on and allowed to warm up to its normal operating condit 2. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the changing the antenna polarization, and adjusting the antenna height in the follow manner: a. Vertical or horizontal polarization (whichever gave the higher emission less						



Test Report	16070822-FCC-E
Page	16 of 30

	over a full rotation of the EUT) was chosen.
	b. The EUT was then rotated to the direction that gave the maximum
	emission.
	c. Finally, the antenna height was adjusted to the height that gave the maximum
	emission.
	3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is
	120 kHz for Quasiy Peak detection at frequency below 1GHz.
	4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video
	bandwidth is 3MHz with Peak detection for Peak measurement at frequency above
	1GHz.
	The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video
	bandwidth with Peak detection for Average Measurement as below at frequency above 1GHz.
	■ 1 kHz (Duty cycle < 98%) □ 10 Hz (Duty cycle > 98%)
	5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency
	points were measured.
Davasada	
Remark	
Result	Pass Fail
Tant Data	Yes N/A
Test Data	Yes IN/A
Test Plot	Yes (See below)
Test Mode 1:	USB Mode
roce widde 1.	
	_
Test Mode 2:	MP4 Mode
Test Mode 3:	Camera Mode
Test Mode 4:	SD Card Mode


All modes were investigated. The result below show only the worst case.



Test Report	16070822-FCC-E
Page	17 of 30

Test Mode : USB Mode

Below 1GHz

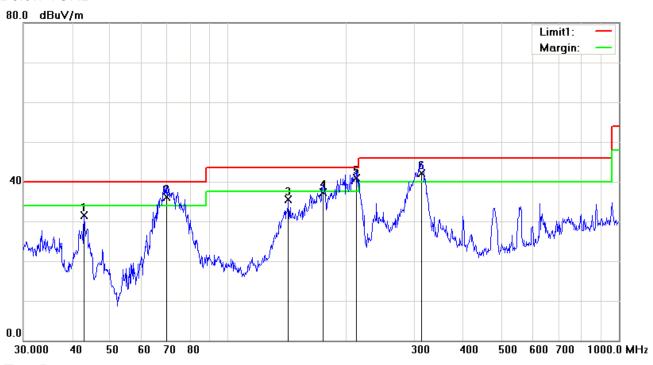

Test Data


Horizontal Polarity Plot @3m

No.	P/L	Frequency	Readin g	Detector	Corrected	Result	Limit	Margin	Height	Degree
		(MHz)	(dBuV/ m)		(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	()
1	Н	42.8998	41.03	peak	-9.53	31.50	40.00	-8.50	100	246
2	Н	69.6005	49.77	QP	-13.63	36.14	40.00	-3.86	100	135
3	Η	142.8244	43.99	peak	-8.50	35.49	43.50	-8.01	100	347
4	Н	175.0368	46.75	QP	-9.49	37.26	43.50	-6.24	100	122
5	Н	213.0151	49.81	QP	-8.86	40.95	43.50	-2.55	100	67
6	Н	312.1794	48.74	QP	-6.55	42.19	46.00	-3.81	100	194



Test Report	16070822-FCC-E
Page	18 of 30

Below 1GHz

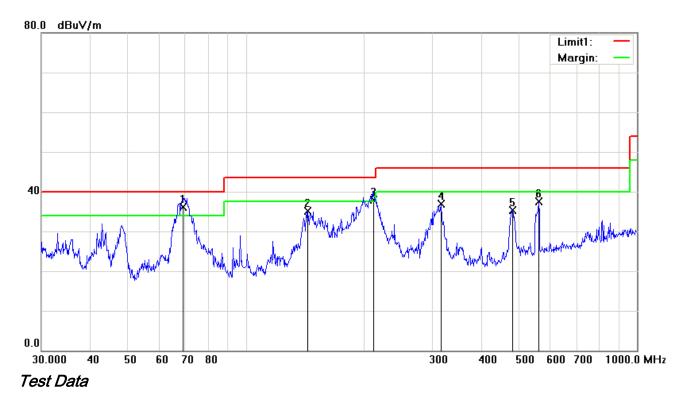

Vertical Polarity Plot @3m

No.	P/L	Frequency	Readin g	Detector	Corrected	Result	Limit	Margin	Height	Degree
		(MHz)	(dBuV/ m)		(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	()
1	V	69.1141	49.78	QP	-13.66	36.12	40.00	-3.88	100	331
2	V	143.8295	43.67	peak	-8.48	35.19	43.50	-8.31	100	331
3	V	212.2695	46.85	QP	-8.85	38.00	43.50	-5.50	100	353
4	V	315.4808	43.32	peak	-6.45	36.87	46.00	-9.13	100	359
5	V	480.5276	37.49	peak	-2.23	35.26	46.00	-10.74	100	359
6	V	560.6928	38.13	peak	-0.64	37.49	46.00	-8.51	100	338



Test Report	16070822-FCC-E
Page	19 of 30

Above 1GHz

Frequency (MHz)	Amplitude (dΒμV/m)	Azimuth	Height (cm)	Polarity (H/V)	Factors (dB)	Limit (dBµV/m)	Margin (dB)	Detector (PK/AV)
732.56	50.32	51	152	٧	-20.32	74	-23.68	PK
1325.66	56.44	111	167	V	-21.52	74	-17.56	PK
1341.5	51.25	99	145	V	-23.42	74	-22.75	PK
826.34	53.22	78	263	Н	-22.53	74	-20.78	PK
1215.73	48.96	112	210	Н	-20.13	74	-25.04	PK
1705.68	53.53	135	186	Н	-22.52	74	-20.47	PK

Note1: The highest frequency of the EUT is 2480 MHz, so the testing has been conformed to 5*2472MHz=12,360MHz.

Note 2: The frequency that above 3GHz is mainly from the environment noise.

Note3: The AV measurement performed, more than 20dB below limit so AV test data was not presented.



Test Report	16070822-FCC-E
Page	20 of 30

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use		
AC Line Conducted Emissions							
EMI test receiver	ESCS30	8471241027	09/17/2015	09/16/2016	~		
Line Impedance Stabilization Network	LI-125A	191106	09/25/2015	09/24/2016	V		
Line Impedance Stabilization Network	LI-125A	191107	09/25/2015	09/24/2016	V		
LISN	ISN T800	34373	09/25/2015	09/24/2016	~		
Transient Limiter	LIT-153	531118	09/01/2015	08/31/2016	~		
Radiated Emissions							
EMI test receiver	ESL6	100262	09/17/2015	09/16/2016	~		
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	09/01/2015	08/31/2016	V		
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/24/2016	03/23/2017	V		
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/21/2015	09/20/2016	✓		
Double Ridge Horn Antenna	AH-118	71259	09/24/2015	09/23/2016	V		



Test Report	16070822-FCC-E
Page	21 of 30

Annex B. EUT And Test Setup Photographs

Annex B.i. Photograph: EUT External Photo





Whole Package View










EUT - Rear View



Test Report	16070822-FCC-E
Page	22 of 30

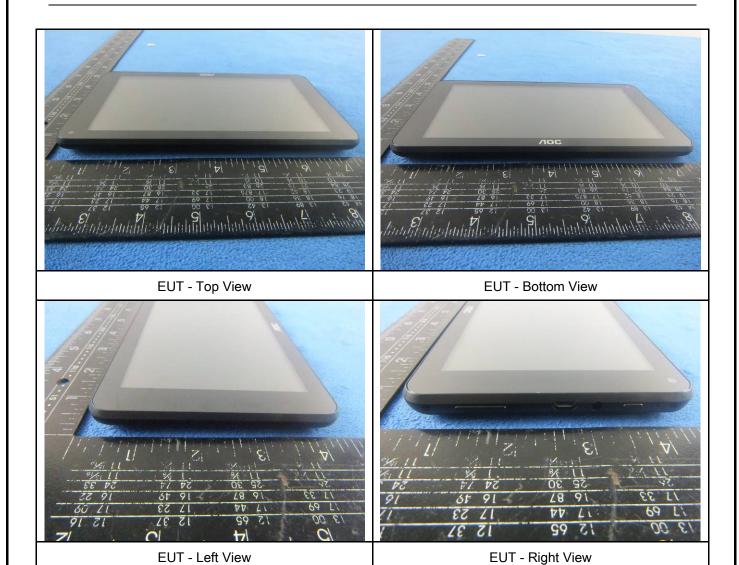



Test Report	16070822-FCC-E
Page	23 of 30

Annex B.ii. Photograph: EUT Internal Photo






Cover Off - Top View 1





Battery - Rear View



Mainboard with Shielding - Front View




Mainboard without Shielding - Front View



Mainboard - Rear View




Test Report	16070822-FCC-E	
Page	24 of 30	





LCD - Front View

LCD - Rear View



BT Antenna View



Test Report	16070822-FCC-E
Page	25 of 30


Annex B.iii. Photograph: Test Setup Photo




Conducted Emissions Test Setup - Front View



Conducted Emissions Test Setup - Side View



Radiated Emissions Test Setup Below 1GHz




Radiated Emissions Test Setup Above 1GHz



Test Report	16070822-FCC-E
Page	26 of 30

Annex C. TEST SETUP AND SUPPORTING EQUIPMENT


Annex C.ii. TEST SET UP BLOCK

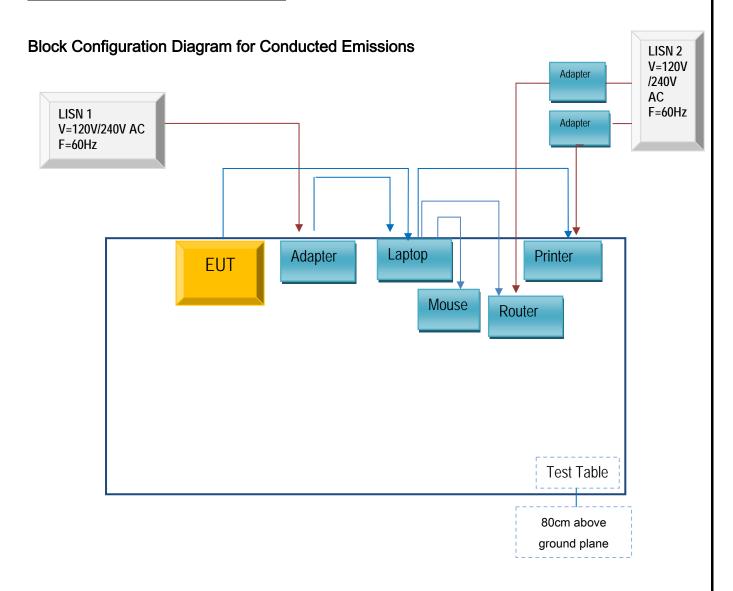



Test Report	16070822-FCC-E
Page	27 of 30

Block Configuration Diagram for Radiated Emissions

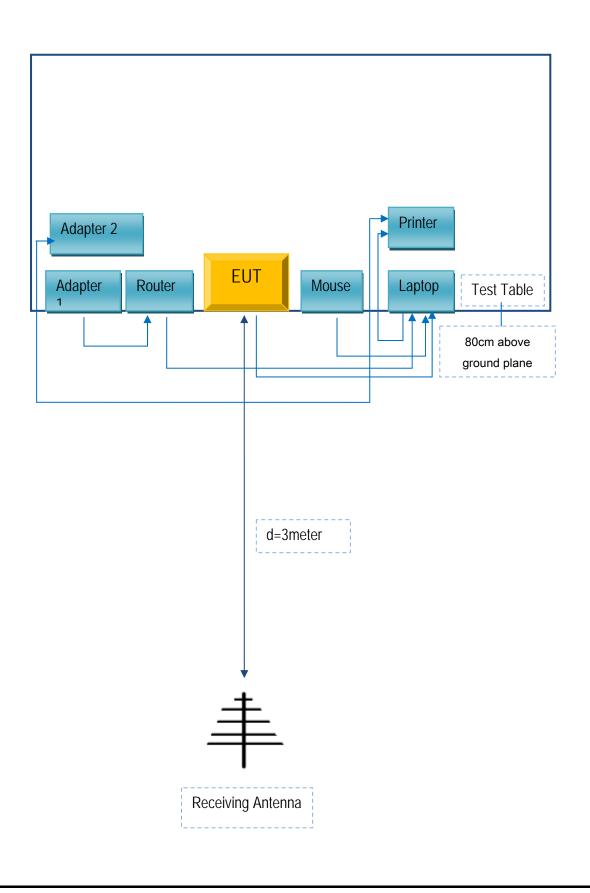



Test Report	16070822-FCC-E
Page	28 of 30

Annex C. il. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
Lenovo	Laptop	E40	LR-1EHRX
GOLDWEB	Router	R102	1202032094
AOC	Adapter	LFS0501500D-A8S	A8S
Lenovo	AC Adapter	42T4416	21D9JU
HP	Printer	VCVRA-1003	CN36M19JWX
DELL	Mouse	E100	912NMTUT41481
BULL	Socket	GN-403	GN201203

Supporting Cable:

- approximate of the second of				
Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	2m	JX120051274
USB Cable	Un-shielding	No	2m	JX110725002
RJ45 Cable	Un-shielding	No	2m	KX156327541
Router Power cable	Un-shielding	No	2m	13274630Z
Printer Power cable	Un-shielding	No	2m	127581031
Power Cable	Un-shielding	No	0.8m	GT211032



Test Report	16070822-FCC-E
Page	29 of 30

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see attachment



Test Report	16070822-FCC-E
Page	30 of 30

Annex E. DECLARATION OF SIMILARITY

AOC

To: SIEMIC,775MontagueExpressway,Milpitas,CA95035,USA

Declaration Letter

Dear Sir,

For our business issue and marketing requirement, we would like to list 9model numbers on the FCC certificates and reports, as following:

Model No.: A725, A721, A722, A723, A724, A726, A727, A728, A729

We declare that, all the model PCB, Antenna and Appearance shape, accessories are the same.

The difference of these is listed as below:

Main Model No	Serial Model No	Differenc
A725	A721,A722,A723,A724,A726,A727,A728,A729	Different model name

Thank you!

Signature:

Printed name/title: Carol Sung

Cerrl Suy

Address: 14F-5, NO.258, Liancheng Rd., Zhonghe Dist., New Taipei City, Taiwan