



# **FCC TEST REPORT**

**FCC ID: 2AEBCXPOS-I100**

On Behalf of

**ZHUHAI HONOR TECHNOLOGY CO.LTD**

**Smart handheld printer**

Model No.: XPOS-I100, XPOS-I100A, XPOS-I100B, XPOS-I100C,  
XPOS-I100D, XPOS-I100E, XPOS-I100F, XPOS-I100S, XPOS-I100P,  
XPOS-I100X, XPOS-I100C1, XPOS-I100C2, XPOS-I100C3,  
XPOS-I100S1, XPOS-I100S2, XPOS-I100S3, POS-I100, POS-I100A,  
POS-I100B, POS-I100C, POS-I100D, POS-I100E, POS-I100F,  
POS-I100S, POS-I100P, POS-I100X, POS-I100C1, POS-I100C2,  
POS-I100C3, POS-I100S1, POS-I100S2, POS-I100S3

Prepared for : ZHUHAI HONOR TECHNOLOGY CO.LTD  
Address : A 2nd Floor,Building 3,No. 639,Huayu Road,Xiangzhou  
District,Zhuhai,China

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.  
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District,  
518103, Shenzhen, Guangdong, China

Report Number : A1907043-C01-R11  
Date of Receipt : July 16, 2019  
Date of Test : July 16, 2019-September 04, 2019  
Date of Report : September 06, 2019  
Version Number : V0

## TABLE OF CONTENTS

Description	Page
<b>1. General Information .....</b>	<b>5</b>
1.1. Description of Device (EUT) .....	5
1.2. Accessories of Device (EUT) .....	6
1.3. Ancillary equipment Details .....	6
1.4. Block Diagram of connection between EUT and simulators.....	6
<b>2. Summary Of Standards And Results .....</b>	<b>7</b>
2.1. Description of Standards and Results .....	7
2.2. Test Mode Description.....	8
2.3. Test Equipment List.....	9
2.4. Test Facility .....	10
2.5. Measurement Uncertainty .....	10
<b>3. Power Line Conducted Emission Test.....</b>	<b>11</b>
3.1. Test Limits .....	11
3.2. Block Diagram of Test Setup.....	11
3.3. Configuration of EUT on Test .....	12
3.4. Operating Condition of EUT .....	12
3.5. Test Procedure .....	12
3.6. Test Results.....	13
<b>4. Radiated Emission Test.....</b>	<b>15</b>
4.1. Test Limit.....	15
4.2. Block Diagram of Test Setup.....	16
4.3. Configuration of EUT on Test .....	17
4.4. Operating Condition of EUT .....	17
4.5. Test Procedure .....	17
4.6. Test Results.....	18
<b>5. Photograph.....</b>	<b>22</b>
5.1. Photo of Radiated Emission Test (In Semi Anechoic Chamber).....	22
5.2. Photo of Power Line Conducted Emission Test .....	23
<b>6. Photos Of The EUT .....</b>	<b>24</b>

## TEST REPORT DECLARATION

Applicant : ZHUHAI HONOR TECHNOLOGY CO.LTD

Address : A 2nd Floor,Building 3,No. 639,Huayu Road,Xiangzhou  
District,Zhuhai,China

Manufacturer : ZHUHAI HONOR TECHNOLOGY CO.LTD

Address : A 2nd Floor,Building 3,No. 639,Huayu Road,Xiangzhou  
District,Zhuhai,China

EUT Description : Smart handheld printer

(A) Model No. : XPOS-I100, XPOS-I100A, XPOS-I100B,  
XPOS-I100C, XPOS-I100D, XPOS-I100E,  
XPOS-I100F, XPOS-I100S, XPOS-I100P,  
XPOS-I100X, XPOS-I100C1, XPOS-I100C2,  
XPOS-I100C3, XPOS-I100S1, XPOS-I100S2,  
XPOS-I100S3, POS-I100, POS-I100A,  
POS-I100B, POS-I100C, POS-I100D, POS-I100E,  
POS-I100F, POS-I100S, POS-I100P, POS-I100X,  
POS-I100C1, POS-I100C2, POS-I100C3,  
POS-I100S1, POS-I100S2, POS-I100S3


(B) Trademark : N/A

Measurement Standard Used:

**FCC Rules and Regulations Part 15 Subpart B Class B**  
**ANSI C63.4:2014**

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed full responsibility for the accuracy and completeness of test. Also, this report shows that the EUT is technically compliant with the FCC Part15 requirements.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....: Ella Liang  
Project Engineer 

Approved by (name + signature).....: Simple Guan  
Project Manager 

Date of issue.....: September 06, 2019

**Revision History**

Revision	Issue Date	Revisions	Revised By
V0	September 06, 2019	Initial released Issue	Simple Guan

## 1. General Information

### 1.1. Description of Device (EUT)

Product Name	: Smart handheld printer
Model Number	: XPOS-I100, XPOS-I100A, XPOS-I100B, XPOS-I100C, XPOS-I100D, XPOS-I100E, XPOS-I100F, XPOS-I100S, XPOS-I100P, XPOS-I100X, XPOS-I100C1, XPOS-I100C2, XPOS-I100C3, XPOS-I100S1, XPOS-I100S2, XPOS-I100S3, POS-I100, POS-I100A, POS-I100B, POS-I100C, POS-I100D, POS-I100E, POS-I100F, POS-I100S, POS-I100P, POS-I100X, POS-I100C1, POS-I100C2, POS-I100C3, POS-I100S1, POS-I100S2, POS-I100S3
Diff	: All model's the function, software and electric circuit are the same, except the model number difference. This report performs the model XPOS-I100.
Highest Frequency	: More than 108MHz
Test Voltage	: DC 3.8V from battery or Input DC 5V/2A
Software version	: V1.0
Hardware version	: L5F1GB-V2

## 1.2. Accessories of Device (EUT)


Accessories 1	Switching power adapter
Manufacturer	: Shenzhen Fangxin Technology Co., Ltd.
Model	: FX2U-050200U
Input	: AC 100-240V, 50/60Hz, 0.4A max
Output	: DC 5V/2A
Accessories 2	: USB Cable
Manufacturer	: Dongguan jiulian Electronics Co., Ltd.
Model	: /
Ratings	: 1m
Accessories 3	: Charging base
Manufacturer	: ZHUHAI HONOR TECHNOLOGY CO.LTD
Model	: XPOS-I100 Charging base
Input	: DC 5V/2A

## 1.3. Ancillary equipment Details

No.	Description	Manufacturer	Model	Serial Number	Certification or SDOC
1	Monitor	ACER	ASPIRE M1830	PTSF90C003050 05CAC3000	DOC
2	PC	ACER	G205HV	10306738385	DOC

## 1.4. Block Diagram of connection between EUT and simulators

For Test Data Transmitting Mode

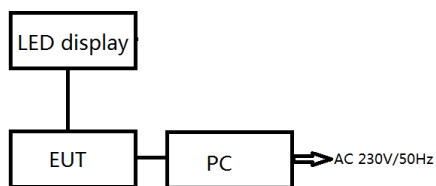

**EUT: Smart handheld printer**

## 2. Summary Of Standards And Results

### 2.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

EMISSION			
Description of Test Item	Standard	Limits	Results
Power Line Conducted Emission Test	FCC Part 15.107 ANSI C63.4:2014	Class B	<b>P</b>
Radiated Emission Test	FCC Part 15.109 ANSI C63.4:2014	Class B	<b>P</b>
Note: 1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable.			

## 2.2.Test Mode Description

For Radiated Emission Test		
Mode No.	Test Mode	Test Voltage
※1.	Data transmitting	DC 5V From PC
2	GPS	DC 5V From PC
Note: ※1 is worst case mode tests, so this report only reflected the worst mode in each part.		

For Power Line Conducted Emission Test		
Mode No.	Test Mode	Test Voltage
1.	Data transmitting	DC 5V From PC
2	GPS	DC 5V From PC



### 2.3.Test Equipment List

For Power Line Conducted Emission Test Equipment:						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESCI	101165	2018.09.21	1 Year
2.	L.I.S.N.#1	Schwarz beck	NSLK8126	8126-466	2018.09.21	1 Year
3.	L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	101043	2018.09.21	1 Year
4.	Pulse Limiter	Schwarz beck	9516F	9618	2018.09.21	1 Year

For Frequency Range 30MHz~1GHz Radiated Emission Test Equipment:						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Test Receiver	Rohde&Schwarz	ESR	1316.3003K03-102082-Wa	2018.09.21	1 Year
2	Bilog Antenna	Schwarz beck	VULB 9168	9168-627	2018.09.24	2 Year

For Frequency Range above 1GHz Radiated Emission Test Equipment:						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Spectrum analyzer	ROHDE&SCHWARZ	FSU	1166.1660.26	2018.09.21	1 Year
2	Horn Antenna	Schwarz beck	BBHA 9120 D	BBHA 9120 D(1201)	2018.04.13	2 Year
3	Amplifier	Agilent	8449B	3008A02664	2018.09.21	1 Year

## 2.4. Test Facility

Shenzhen Alpha Product Testing Co., Ltd.

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103, Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission

Registration Number: 293961

Designation Number: CN1236

July 15, 2019 Certificated by IC

Registration Number: CN0085

## 2.5. Measurement Uncertainty

Test Item	Uncertainty
Uncertainty for Conduction emission test	2.74dB
Uncertainty for Radiation Emission test (<1G)	3.77 dB (Distance: 3m Polarize: V)
	3.80 dB (Distance: 3m Polarize: H)
Uncertainty for Radiation Emission test (>1G)	4.13 dB (Distance: 3m Polarize: V)
	4.16 dB (Distance: 3m Polarize: H)
(95% confidence levels, k=2)	


### 3. Power Line Conducted Emission Test

#### 3.1. Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB( $\mu$ V)	Average Level dB( $\mu$ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

- Notes:
1. Emission level=Read level + LISN factor-Preamplifier factor + Cable loss
  2. \* Decreasing linearly with logarithm of frequency.
  3. The lower limit shall apply at the transition frequencies.

#### 3.2. Block Diagram of Test Setup

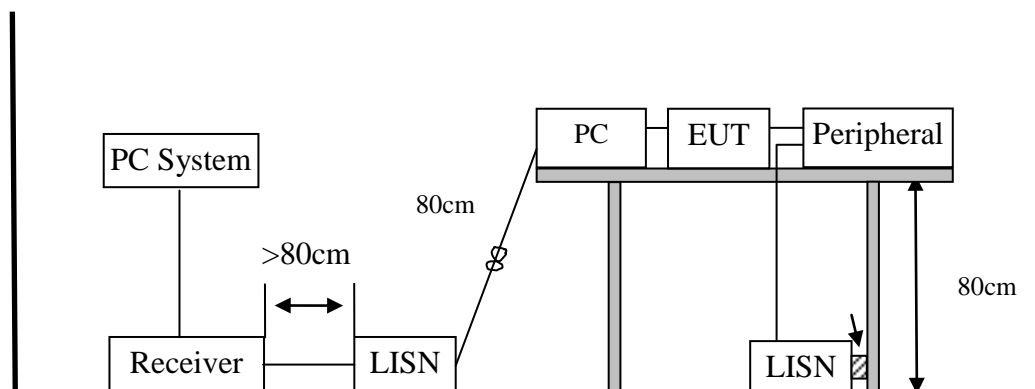

### 3.3.Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

### 3.4.Operating Condition of EUT



- (1) Setup the EUT as shown as Section 3.2.
- (2) Turn on the power of all equipment.
- (3) Let the EUT work in test mode and 15 minutes before taking the test.

### 3.5.Test Procedure

- (1) The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power connected to the power mains through a line impedance stabilization network (L.I.S.N. 1#). This provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N.#2). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.4:2014 on conducted Emission test.
- (2) The frequency range from 150kHz to 30MHz is checked, the bandwidth of test receiver (R&S TEST RECEIVER ESCI) is set at 9kHz.

### 3.6. Test Results

Test Date	:	2019.08.9	Temperature	:	24℃
Test Engineer	:	Ella Liang	Humidity	:	56%
Test Mode	:	Data transmitting			
Test Results	:	Pass			
Note:	1. The test results are listed in next pages.				
	1. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector and quasi-peak detector need not be carried out.				
	2. If the limits for the measurement with the average detector are met when using a receiver with a quasi-peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.				

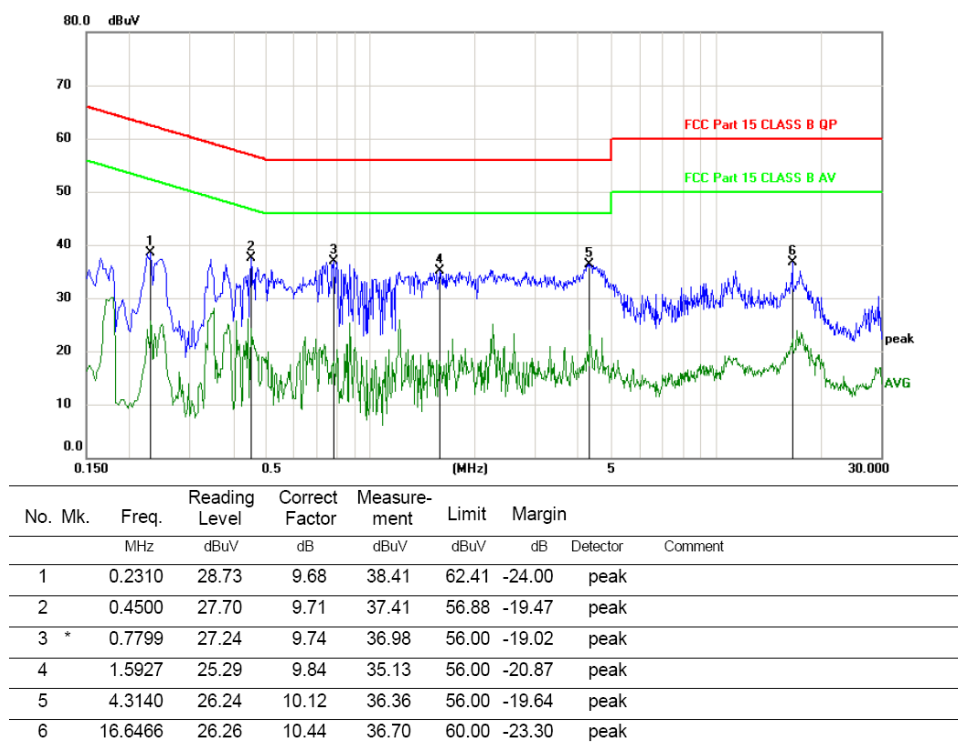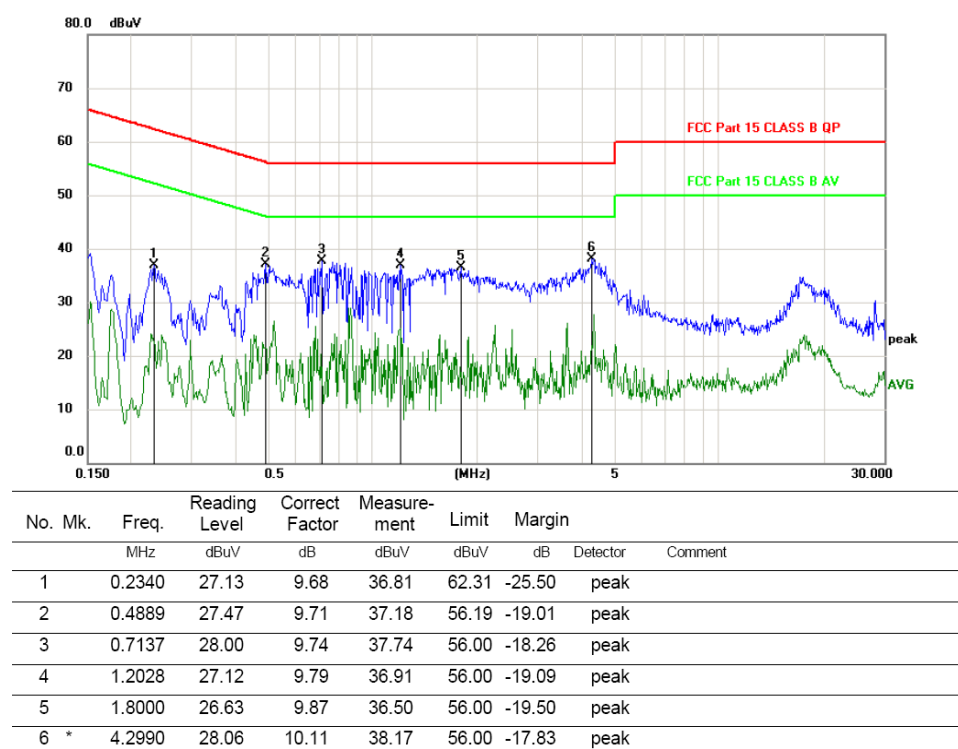**Polarity: L****Polarity: N**

\*:Maximum data    x:Over limit    !:over margin

Note: Measurement=Reading Level+Correc Factor.    Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

## 4. RADIATED EMISSION TEST

### 4.1. Test Limit


Frequency MHz			Distance (Meters)	Distance (Meters)
30	~	88	3	40.0
88	~	216	3	43.5
216	~	960	3	46.0
960	~	1000	3	54.0
Above 1GHz			3	74(Peak) 54(Average)

- Notes:
1. The smaller limit shall apply at the cross point between two frequency bands.
  2. Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.
  3. Frequency range of radiated measurements:


Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705-108	1000
108-500	2000
500-1000	5000
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower.

## 4.2. Block Diagram of Test Setup

In Semi Anechoic Chamber (3m) Test Setup Diagram for 30MHz~1000MHz

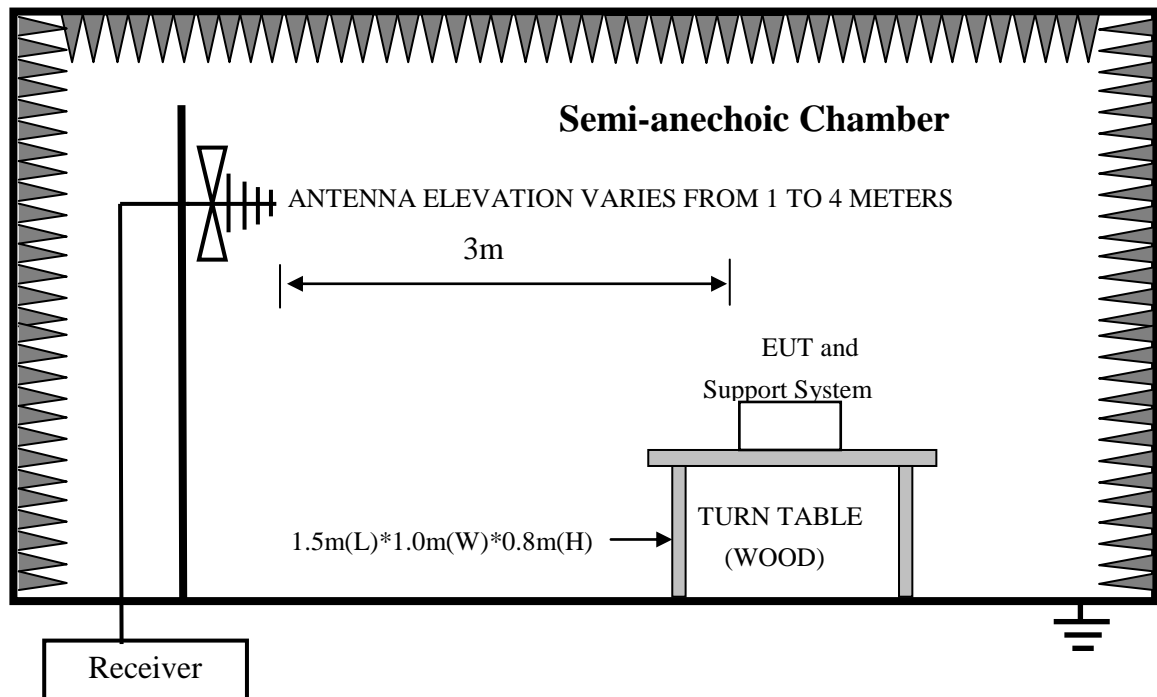

In Semi Anechoic Chamber (3m) Test Setup Diagram for Above 1GHz

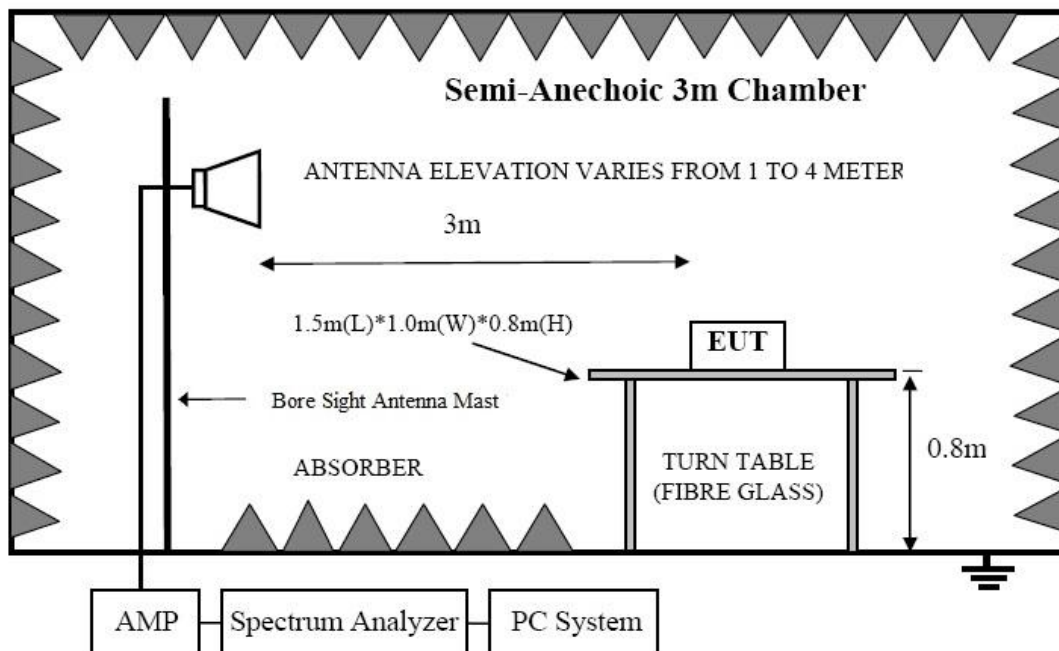



### 4.3.Configuration of EUT on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner that tends to maximize its emission characteristics in normal application.

### 4.4.Operating Condition of EUT


- (1) Setup the EUT as shown as Section 4.2.
- (2) Turn on the power of all equipment.
- (3) Let the EUT work in test mode and 15 minutes before taking the test.

### 4.5.Test Procedure


- (1) The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber. An antenna was located 3m from the EUT on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.4:2014 on Radiated Emission test.
- (2) For the radiated emission test above 1GHz:  
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- (3) The frequency range from 30MHz to 1000MHz is checked, the bandwidth of test receiver (R&S TEST RECEIVER ESR) is set at 120kHz.
- (4) The frequency range from above 1GHz is checked, the bandwidth of spectrum analyzer (Spectrum Analyzer FSU) is set at 1MHz.
- (5) The frequency range from 30MHz to 1000MHz was pre-scanned with a peak detector and all final readings of measurement from Test Receiver are Quasi-Peak values, the frequency range from 1GHz to 6GHz was pre-scanned with a peak detector and all final readings of measurement from Spectrum Analyzer are peak and average values checked, all measurement distance is 3m in 3m semi anechoic chamber.
- (6) The test results are reported on Section 4.7.

#### 4.6. Test Results

Frequency Range : <b>30MHz~1000MHz</b>	
Test Date : 2019.08.08	Temperature : 24℃
Test Engineer : Ella Liang	Humidity : 56%
Test Mode : Data transmitting	
Test Results : <b>PASS</b>	
Note: 1. The test results are listed in next pages. 2. If the limits for the measurement with the quasi-peak detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the quasi-peak detector need not be carried out.	

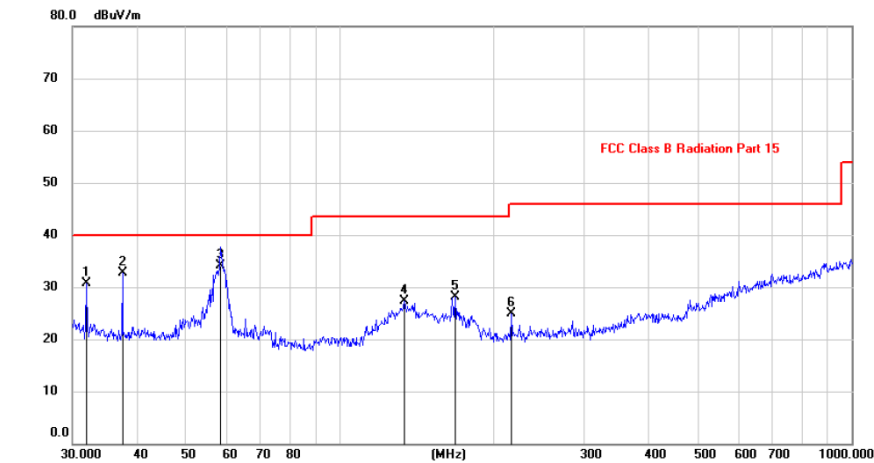
**Antenna polarity: Vertical**

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		31.9544	17.17	13.60	30.77	40.00	-9.23	peak		
2		37.6796	18.66	14.11	32.77	40.00	-7.23	peak		
3	*	58.4074	20.68	13.34	34.02	40.00	-5.98	QP		
4		133.6187	13.37	13.85	27.22	43.50	-16.28	peak		
5		168.4137	13.85	14.23	28.08	43.50	-15.42	peak		
6		216.0240	13.37	11.47	24.84	46.00	-21.16	peak		

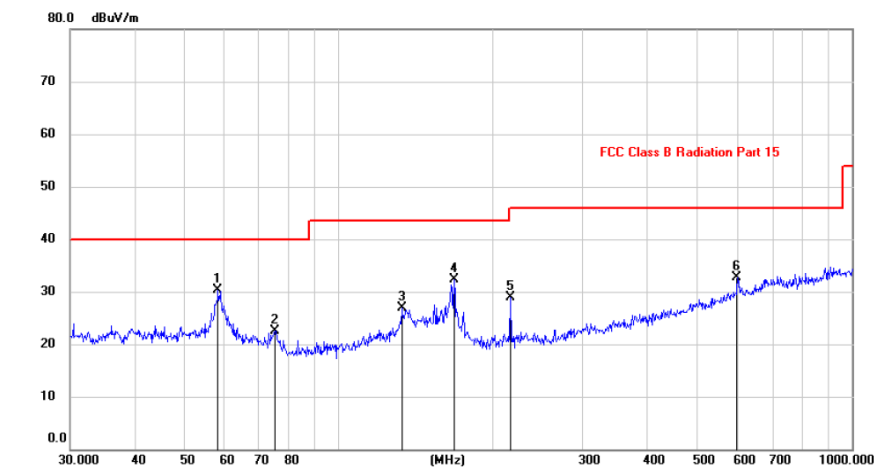
**Antenna polarity: Horizontal**

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	58.2030	16.91	13.38	30.29	40.00	-9.71	peak		
2		75.4462	11.98	10.50	22.48	40.00	-17.52	peak		
3		132.6850	13.16	13.78	26.94	43.50	-16.56	peak		
4		168.4137	18.13	14.23	32.36	43.50	-11.14	peak		
5		216.0240	17.40	11.47	28.87	46.00	-17.13	peak		
6		599.3211	12.42	20.21	32.63	46.00	-13.37	peak		

Frequency Range : <b>Above 1GHz</b>	
Test Date : 2019.08.08	Temperature : 24°C
Test Engineer : Ella Liang	Humidity : 56%
Test Mode : Data transmitting	
Test Results : <b>Pass</b>	
Note: 1. The data is shown in the next page. 2. If the limits for the measurement with the quasi-peak detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the quasi-peak detector need not be carried out.	

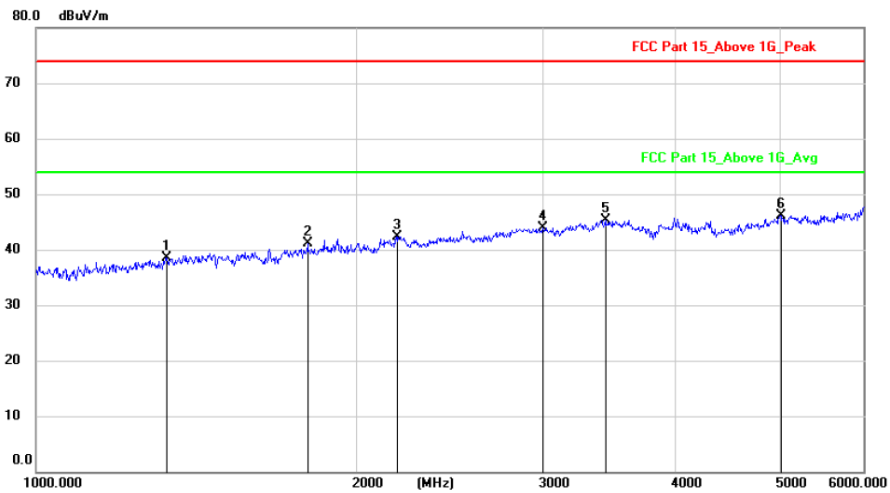**Antenna polarity: Vertical**

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		1327.235	45.76	-7.24	38.52	74.00	-35.48	peak		
2		1799.839	47.48	-6.45	41.03	74.00	-32.97	peak		
3		2188.024	45.81	-3.43	42.38	74.00	-31.62	peak		
4		2999.209	46.27	-2.31	43.96	74.00	-30.04	peak		
5		3430.584	52.21	-6.84	45.37	74.00	-28.63	peak		
6	*	5015.753	48.61	-2.46	46.15	74.00	-27.85	peak		

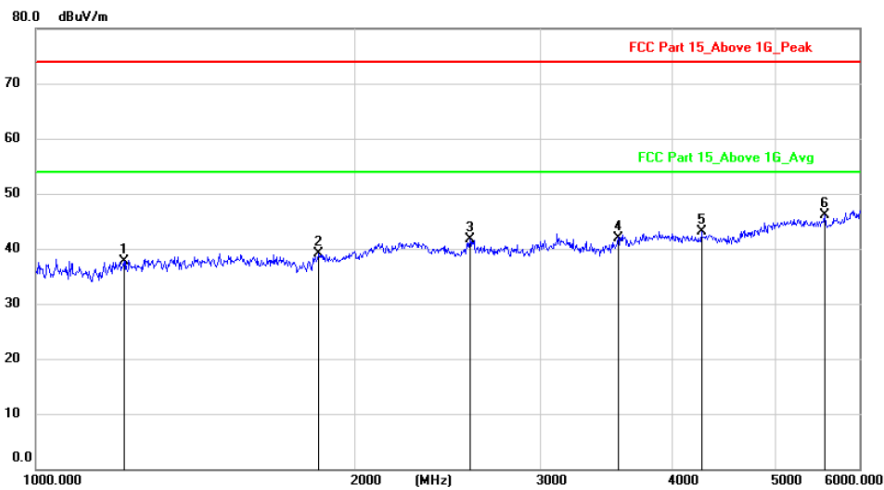**Antenna polarity: Horizontal**

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		1211.329	45.88	-8.15	37.73	74.00	-36.27	peak		
2		1848.868	45.26	-6.23	39.03	74.00	-34.97	peak		
3		2570.903	44.82	-3.21	41.61	74.00	-32.39	peak		
4		3549.384	48.26	-6.26	42.00	74.00	-32.00	peak		
5		4253.498	47.56	-4.49	43.07	74.00	-30.93	peak		
6	*	5565.048	47.69	-1.57	46.12	74.00	-27.88	peak		


## 5. PHOTOGRAPH

### 5.1.Photo of Radiated Emission Test (In Semi Anechoic Chamber)

30M-1000MHz



Above 1GHz

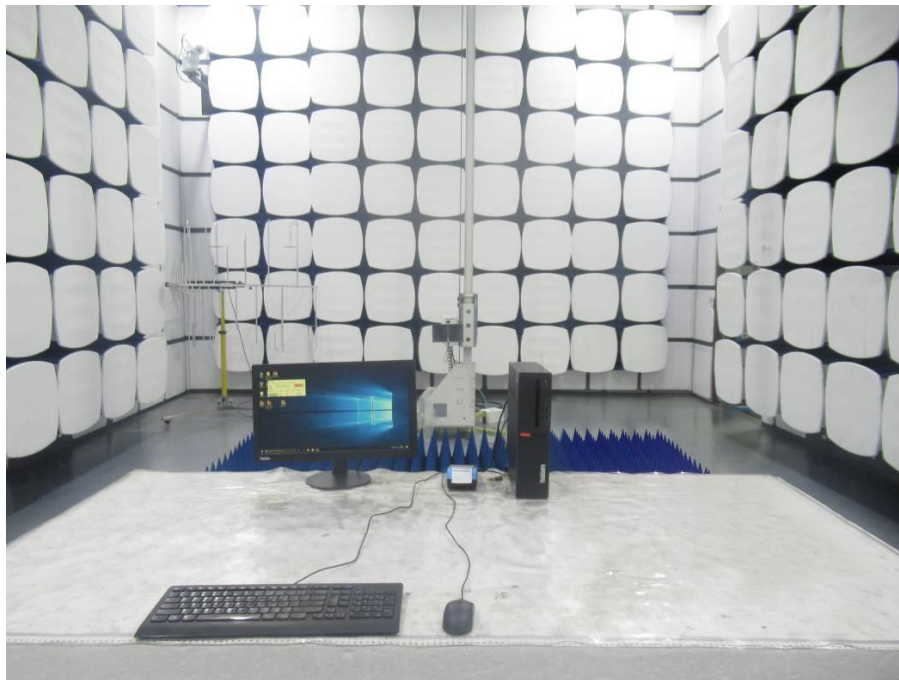

## 5.2.Photo of Power Line Conducted Emission Test








## 6. PHOTOS OF THE EUT









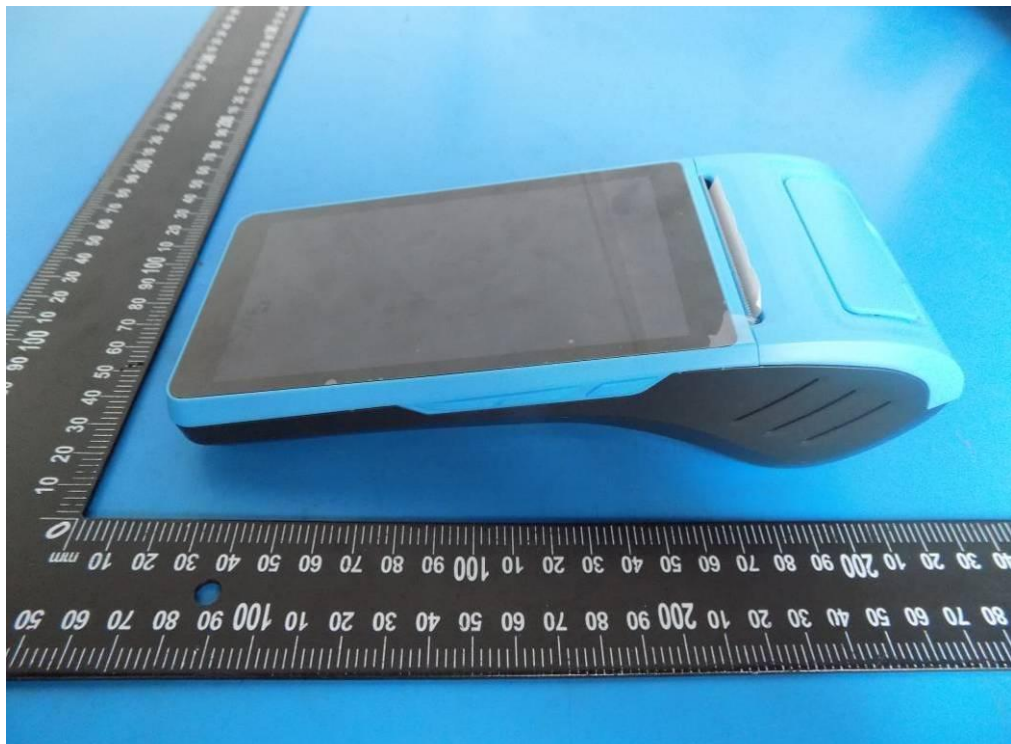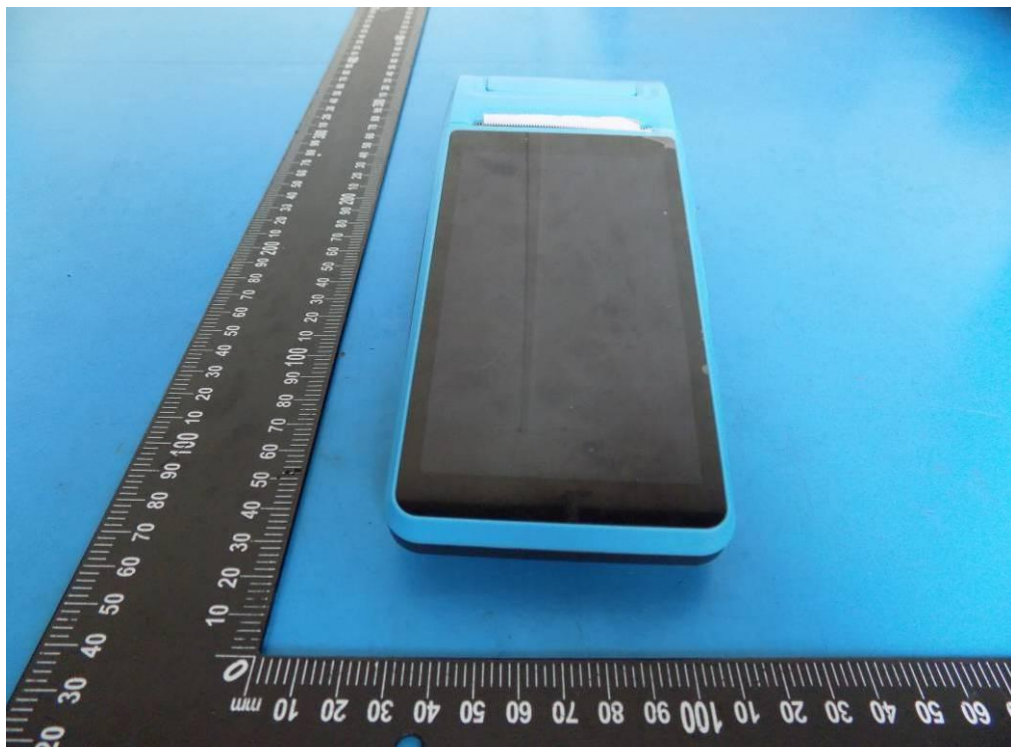


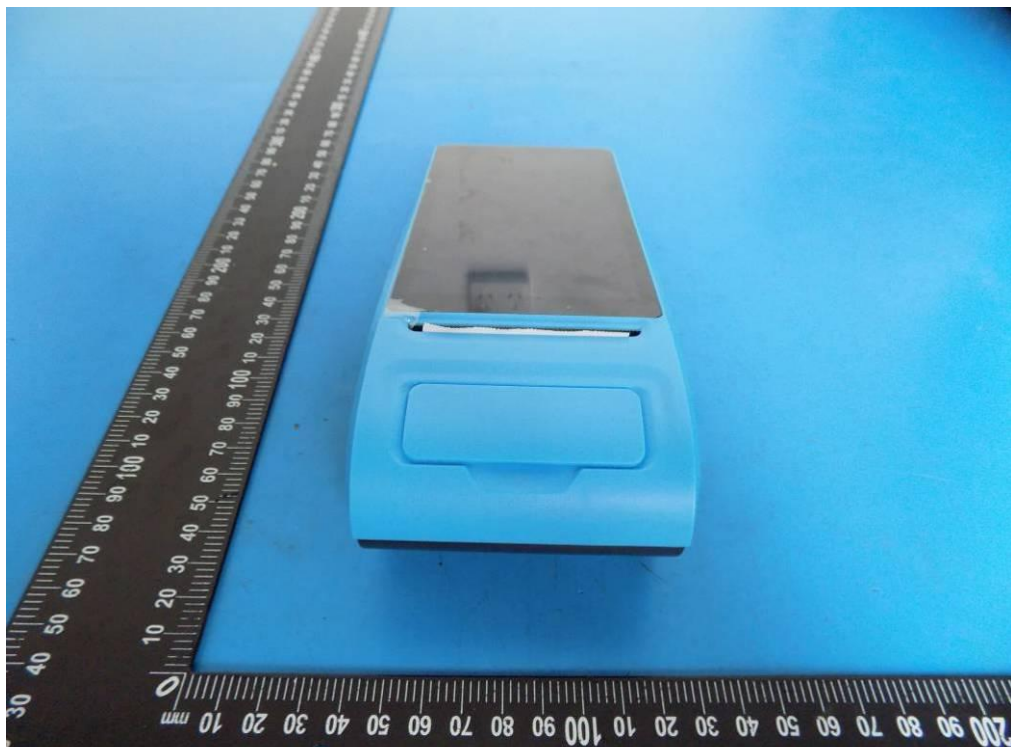








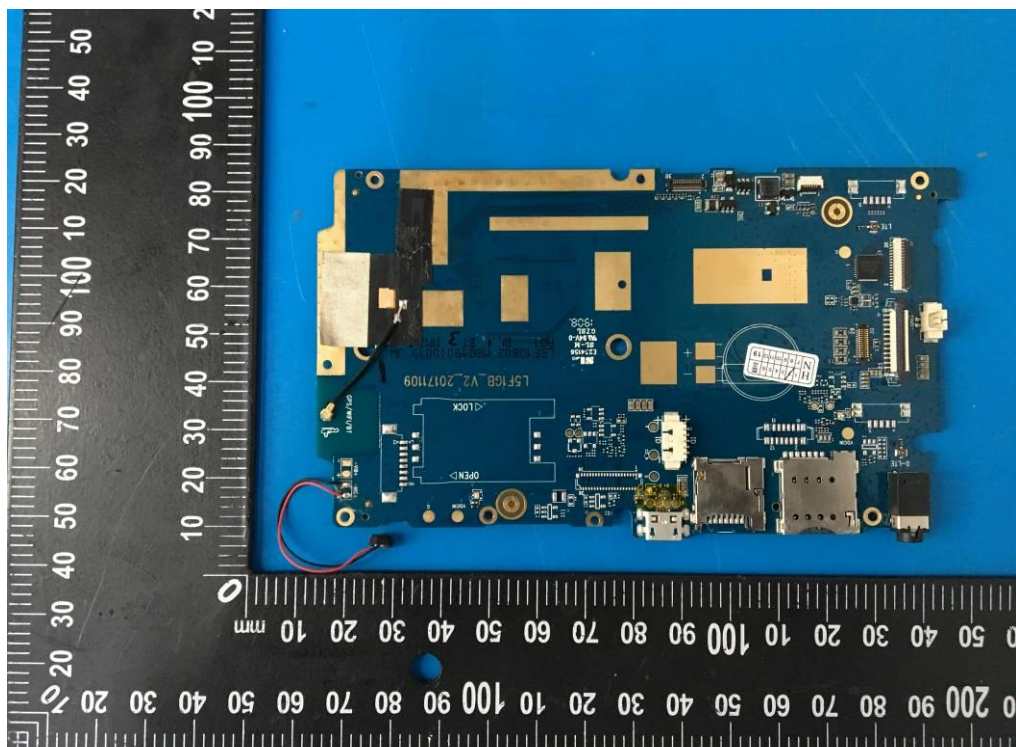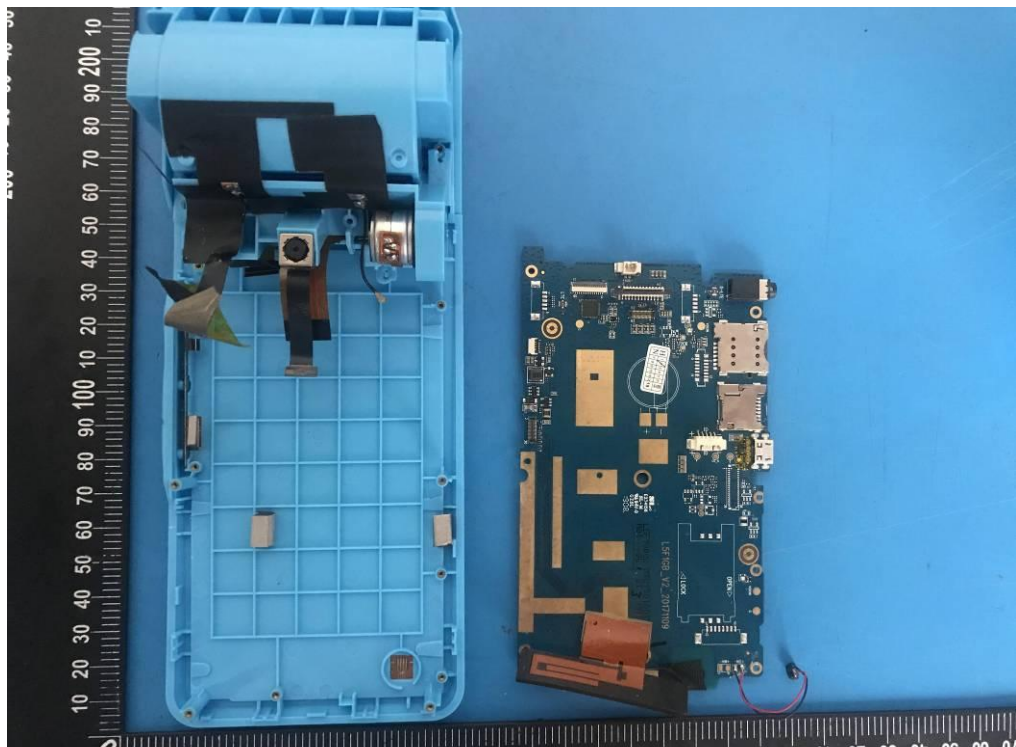




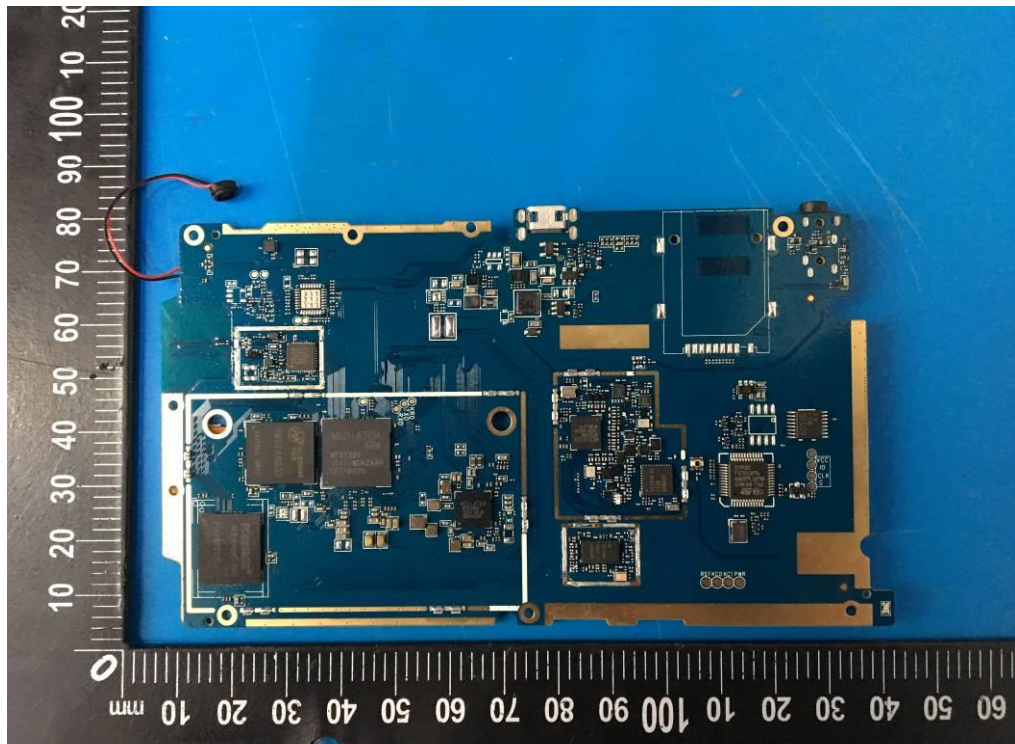
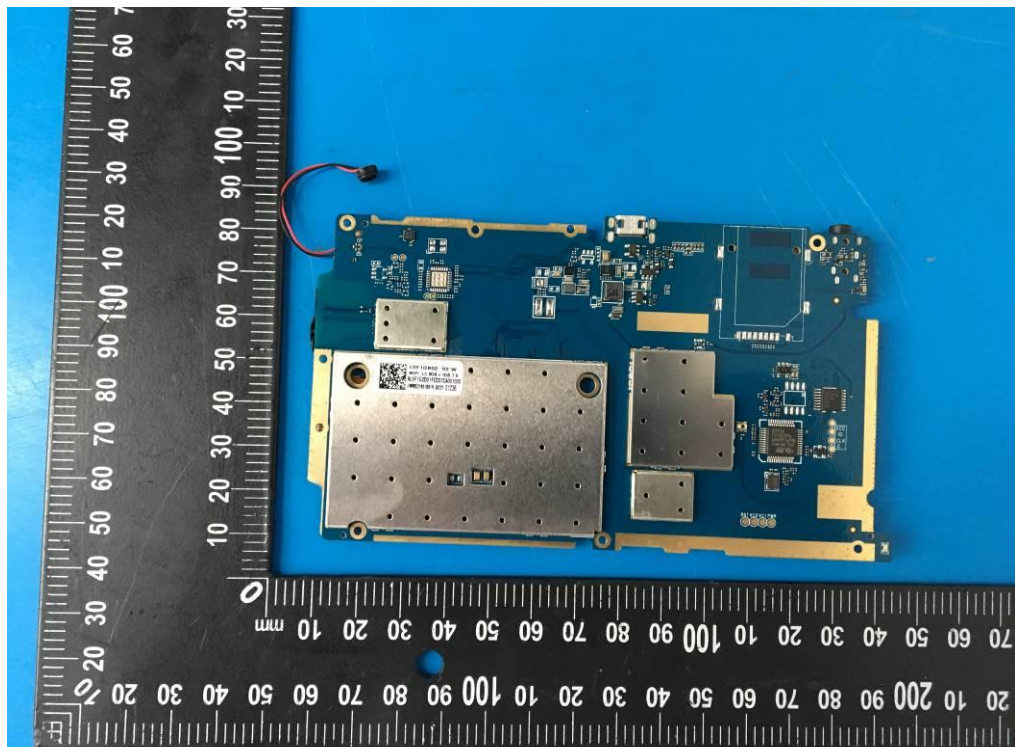


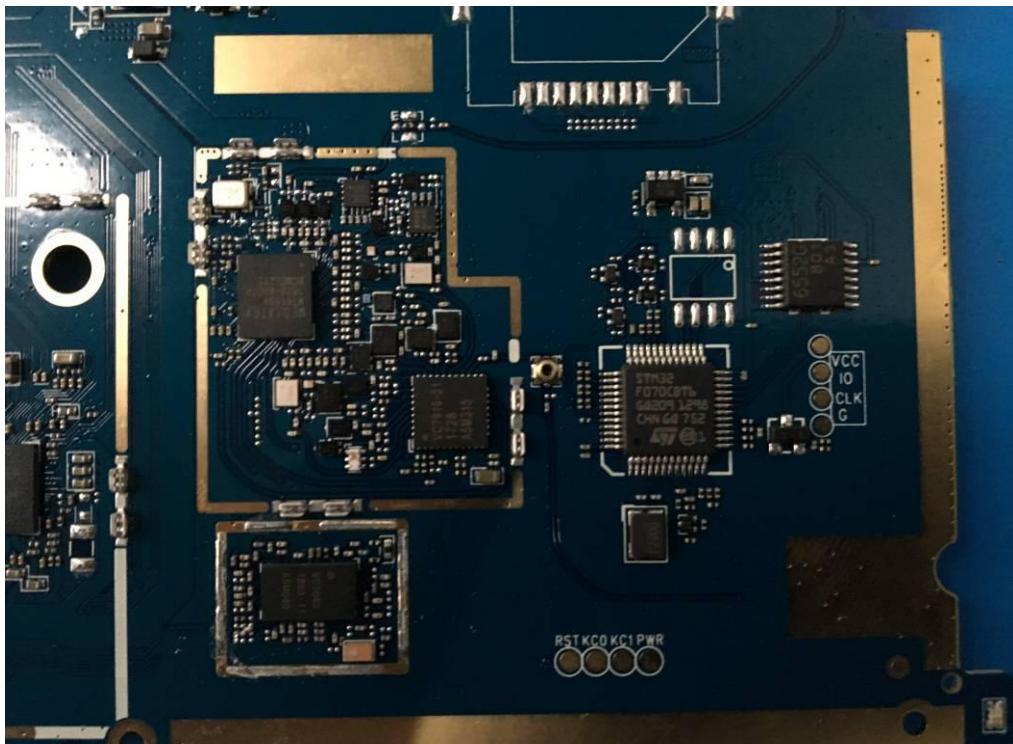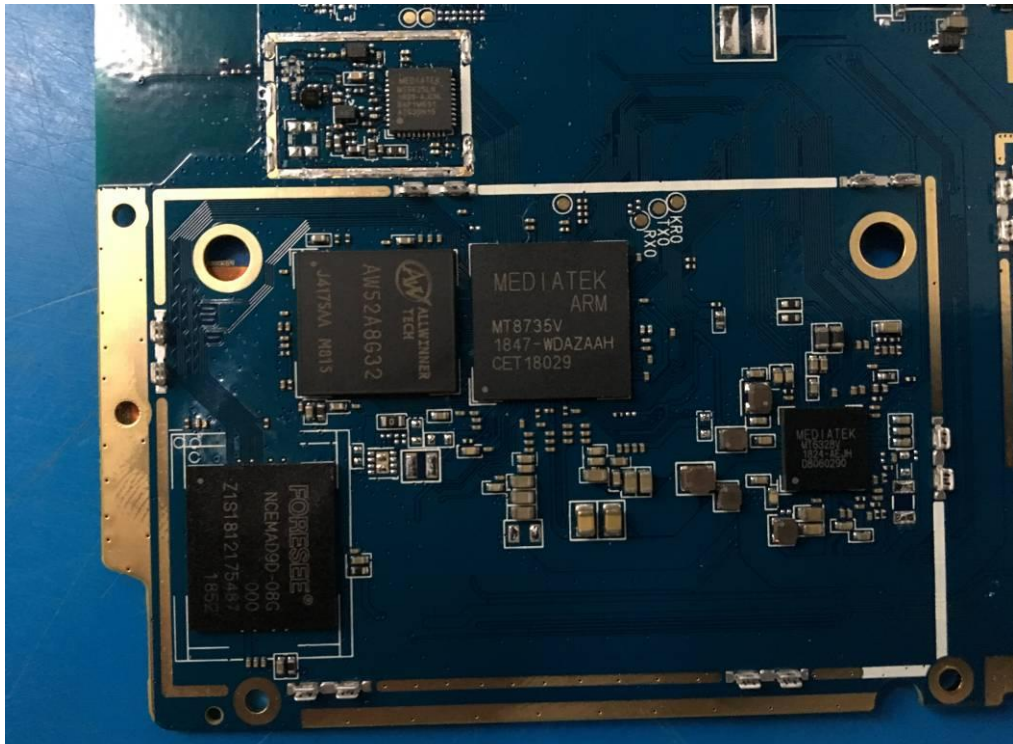



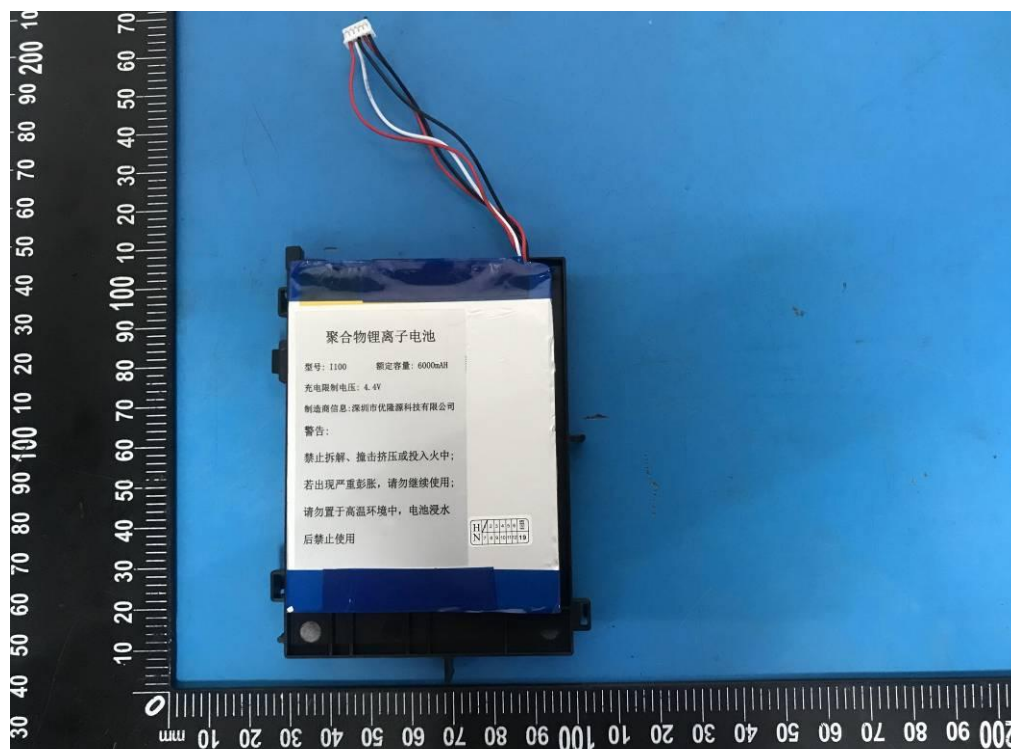



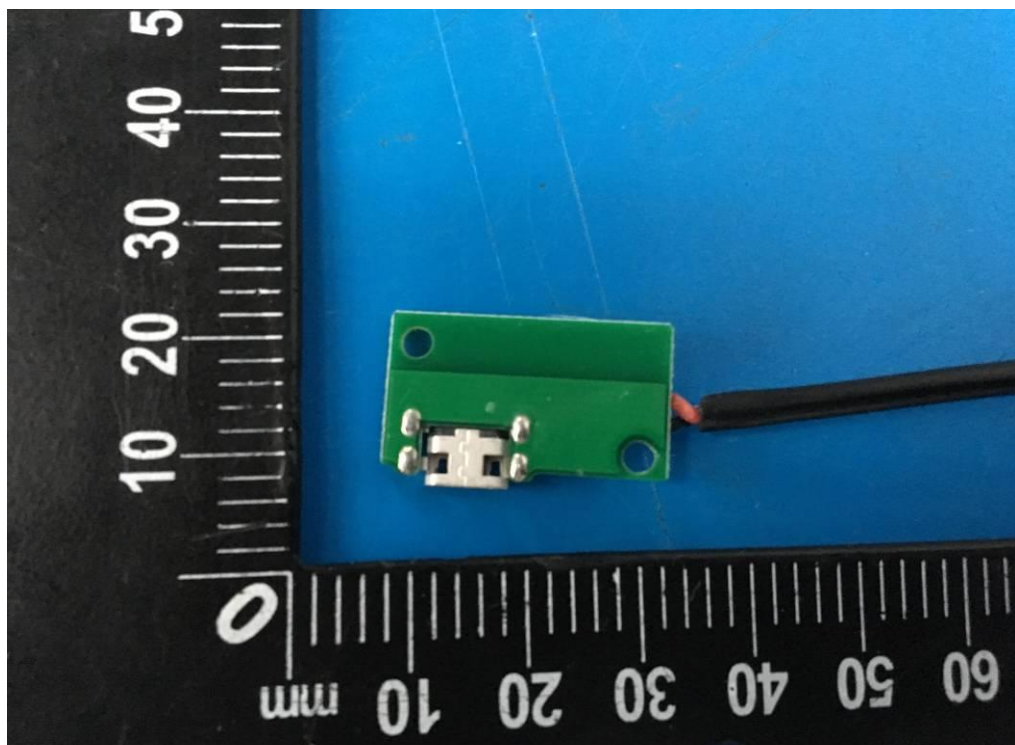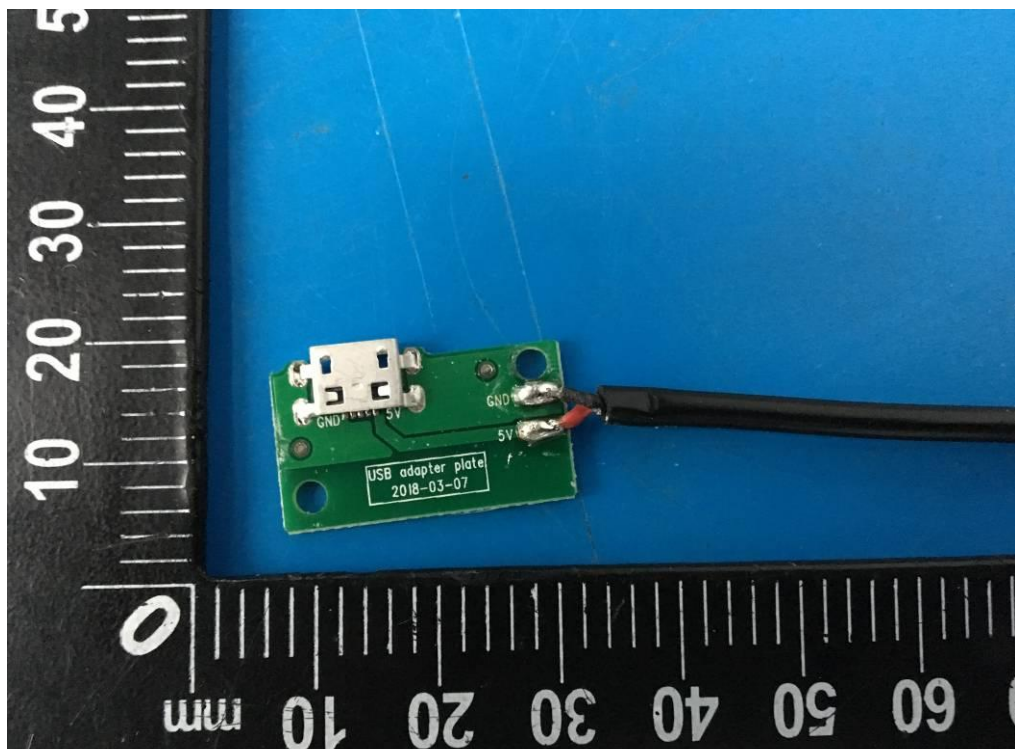

-----End of report-----