# **TEST REPORT**

| Applicant:               | Guangde Ledup Enterprise, Inc.                                             |
|--------------------------|----------------------------------------------------------------------------|
| Address of Applicant:    | Jingtang Road, Guangde Economic Development Zone, Guangde, Anhui,<br>China |
| Manufacturer:            | Guangde Ledup Enterprise, Inc.                                             |
| Address of Manufacturer: | Jingtang Road, Guangde Economic Development Zone, Guangde, Anhui,<br>China |
| Product name:            | Remote                                                                     |
| Model:                   | PIXEL-M                                                                    |
| Rating(s):               | DC 3V                                                                      |
| Trademark:               | LEDUP                                                                      |
| Standards:               | 47 CFR PART 15 Subpart C: section 15.249                                   |
| FCC ID:                  | 2AEBHPIXEL-M                                                               |
| Data of Receipt:         | 2019-04-22                                                                 |
| Date of Test:            | 2019-04-22~2019-05-30                                                      |
| Date of Issue:           | 2019-05-30                                                                 |
| Test Result              | Pass*                                                                      |

<sup>\*</sup> In the configuration tested, the test item complied with the standards specified above.

| Authorized for | issue by:     |              | /CC         | 2.               |           |
|----------------|---------------|--------------|-------------|------------------|-----------|
| Test by:       |               | 7, /         | Reviewed by | TIT!             |           |
| May.30, 2019   |               | Eleven Frang | May.30, 201 | 9 Pauler Li Paw  | er l:     |
|                | Project Engin | eer          | *           | Project Engineer | ſ         |
| Date           | Name/Position | Sianature    | Date        | Name/Positiion   | Sianature |

**ITL** Page 2 of 34 Report No.: D181224007

| С | Possible | toet   | C260 | vordi | cte. |
|---|----------|--------|------|-------|------|
| г | OSSIDIE  | a rest | Case | veron | CTS: |

test case does not apply to the test object ..: N/A

test object does meet the requirement ....... P (Pass)

test object does not meet the requirement ..: F (Fail)

### **Testing Laboratory information:**

Testing Laboratory Name .....: ITL Co., LTD

Address\_\_\_\_\_: No.8, Jinqianling Street 5, Huangjiang, Dongguan,

Guangdong, China.

Testing location : Same as above

Tel : 0086-769-39001678

Fax : 0086-20-62824387

E-mail : itl@i-testlab.com

### **General remarks:**

The test results presented in this report relate only to the object tested.

The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.

This report would be invalid test report without all the signatures of testing technician and approver.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

### Note:

/

**ITL** Page 3 of 34 Report No.: D181224007

1 Test Summary

| 1 0 0 1 0 0 1111111011 }                  |                                             |                                 |        |
|-------------------------------------------|---------------------------------------------|---------------------------------|--------|
| Test                                      | Test Requirement                            | Test method                     | Result |
| Antenna Requirement                       | FCC PART 15 C<br>Section 15.203             | FCC PART 15 C<br>Section 15.203 | PASS   |
| Occupied Bandwidth                        | FCC PART 15 C<br>section 15.215 (c)         | ANSI C63.10:2013                | PASS   |
| Radiated Emission                         | FCC PART 15 C<br>section 15.249<br>(a), (d) | ANSI C63.10:2013                | PASS   |
| Band Edges Measurement                    | FCC PART 15 C<br>section 15.249 (d)         | ANSI C63.10:2013                | PASS   |
| Conducted Emissions at Mains<br>Terminals | FCC PART 15 C<br>section 15.207             | ANSI C63.10:2013                | N/A    |

# Page 4 of 34

Report No.: D181224007

# 2 Contents

|   |        |                                                               | Page |
|---|--------|---------------------------------------------------------------|------|
| T | EST RE | PORT                                                          | 1    |
| 1 | TES    | T SUMMARY                                                     |      |
| 2 |        | TENTS                                                         |      |
| _ |        |                                                               |      |
| 3 | GEN    | ERAL INFORMATION                                              | 5    |
|   | 3.1    | CLIENT INFORMATION                                            | 5    |
|   | 3.2    | GENERAL DESCRIPTION OF E.U.T.                                 |      |
|   | 3.3    | DETAILS OF E.U.T.                                             |      |
|   | 3.4    | DESCRIPTION OF SUPPORT UNITS                                  | 5    |
|   | 3.5    | TEST LOCATION                                                 |      |
|   | 3.6    | DEVIATION FROM STANDARDS                                      |      |
|   | 3.7    | ABNORMALITIES FROM STANDARD CONDITIONS                        |      |
|   | 3.8    | OTHER INFORMATION REQUESTED BY THE CUSTOMER                   |      |
|   | 3.9    | TEST FACILITY                                                 |      |
|   | 3.10   | MEASUREMENT UNCERTAINTY                                       |      |
| 4 | INST   | RUMENTS USED DURING TEST                                      | 7    |
| 5 |        | T RESULTS                                                     |      |
|   | 5.1    | E.U.T. TEST CONDITIONS                                        | 8    |
|   | 5.2    | ANTENNA REQUIREMENT                                           |      |
|   | 5.3    | OCCUPIED BANDWIDTH                                            | 11   |
|   | 5.4    | RADIATED SPURIOUS EMISSIONS                                   | 15   |
|   |        | Harmonic and other spurious emissions                         | 20   |
|   | 5.5    | BAND EDGES REQUIREMENT                                        |      |
|   | 5.6    | CONDUCTED EMISSIONS AT MAINS TERMINALS 150 KHZ TO 30MHZ (N/A) | 34   |

**ITL** Page 5 of 34 Report No.: D181224007

# 3 General Information

### 3.1 Client Information

Applicant: Guangde Ledup Enterprise, Inc.

Address of Applicant: Jingtang Road, Guangde Economic Development Zone, Guangde, Anhui,

China

# 3.2 General Description of E.U.T.

Name: Remote

Model No.: PIXEL-M

Trade Mark: LEDUP

Operating Frequency: 2435 MHz, 2445 MHz, 2455 MHz

Channel Separation: 10 MHz
Type of Modulation GFSK

Antenna Type: PIFA antenna

Antenna gain: 1 dBi

### 3.3 Details of E.U.T.

EUT Power Supply: DC 3V battery

Test mode: The program used to control the EUT for staying in continuous transmitting

and receiving mode is programmed. Channel lowest (2435MHz), middle

(2445MHz) and highest (2455MHz) are chosen for full testing.

Power cord: /

# 3.4 Description of Support Units

The EUT has been tested as an independent unit for fixed frequency by testing lab.

### 3.5 Test Location

All tests were performed at:

ITL Co., Ltd.

No.8, JinQianLing street 5, DongHuan Road, Huangjiang Town, Dongguan, China.

0086-769-39001678

itl@i-testlab.com

No tests were sub-contracted.

### 3.6 Deviation from Standards

Biconical and log periodic antennas were used instead of dipole antennas.

### 3.7 Abnormalities from Standard Conditions

None.

# 3.8 Other Information Requested by the Customer

None.

# 3.9 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS( Lab code:L9342)

• FCC (Resignation No.:CN5035)

• IC (Registration NO.:12593A)

# 3.10 Measurement Uncertainty

The below measurement uncertainties given below are based on a 95% confidence level (base on a coverage factor (k=2).)

| Parameter                     | Uncertainty              |
|-------------------------------|--------------------------|
| Radio frequency               | ±1.06 x 10 <sup>-7</sup> |
| total RF power, conducted     | 1.37 dB                  |
| RF power density , conducted  | 2.89 dB                  |
| All emissions, radiated       | ±3.35 dB                 |
| Temperature                   | ±0.23 °C                 |
| Humidity                      | ±0.3 %                   |
| DC and low frequency voltages | ±0.3 %                   |

**ITL** Page 7 of 34 Report No.: D181224007

# 4 Instruments Used during Test

| No.            | Test Equipment                       | Manufacturer         | Model          | Serial No.        | Last Cal.  | Cal. Due   |
|----------------|--------------------------------------|----------------------|----------------|-------------------|------------|------------|
| DGITL-<br>306  | Spectrum<br>Analyzer                 | Agilent Technologies | N9010A         | MY54200334        | 2018.09.05 | 2019.09.05 |
| DGITL-<br>307  | Test Receiver                        | R&S                  | ESVS 10        | 840698/013        | 2018.09.05 | 2019.09.05 |
| DGITL-<br>352  | Pre Amplifier                        | MInI-Circuits        | ZFC-<br>1000HX | SN29280111<br>0   | 2019.06.23 | 2020.06.23 |
| DGITL-<br>350  | Wideband<br>Amplifier Super<br>Ultra | Mini-circuits        | ZVA-183-<br>S+ | SN98640142<br>6   | 2018.06.23 | 2019.06.23 |
| DGITL-<br>308  | Biconilog<br>Antenna                 | ETS•Lindgren         | 3142E          | 156975            | 2017.02.21 | 2020.02.21 |
| DGITL-<br>309  | Horn Antenna                         | ETS•Lindgren         | 3117           | SN00152265        | 2017.02.21 | 2020.02.21 |
| DGITL-<br>303a | EMI Test receiver                    | R&S                  | ESCI           | 100910            | 2018.06.23 | 2019.06.23 |
| DGITL-<br>304  | L.I.S.N.#1                           | R&S                  | ESH3-Z5        | 100272            | 2018.09.05 | 2019.09.05 |
| DGITL-<br>316  | Pulse Limiter                        | R&S                  | ESH3-Z2        | 100327            | 2018.06.23 | 2019.06.23 |
| DGITL-<br>300  | 50Ω Coaxial<br>Cable                 | Mini-circuits        | CBL            | C002              | 2018.06.23 | 2019.06.23 |
| DGITL-<br>301  | Anechoic chamber                     | ETS•Lindgren         | 9m*6m*6<br>m   | CT000874-<br>1181 | 2017.08.14 | 2020.08.14 |
| DGITL-<br>364  | Horn Antenna                         | Schwarzbeck          | BBHA<br>9170   | B09806543         | 2017.02.21 | 2020.02.21 |
| DGITL-<br>302  | Shielded Room                        | ETS•Lindgren         | 8*4*3          | CT09010           | 2018.06.19 | 2021.06.19 |

**ITL** Page 8 of 34 Report No.: D181224007

### 5 Test Results

### 5.1 E.U.T. test conditions

Test Voltage: DC 3V

Temperature: 23.2 -25.0 °C

Humidity: 38-50 % RH

Atmospheric Pressure: 1000 -1010 mbar

Requirements: 15.31(e): For intentional radiators, measurements of the variation of

the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be

performed using a new battery.

**15.32:** Power supplies and CPU boards used with personal computers and for which separate authorizations are required to be obtained shall be tested as follows: Testing shall be in accordance with the procedures

specified in Section 15.31 of this part.

Test frequencies and frequency range:

According to the 15.31(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and, if required, reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:

According to the 15.33 (a) For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency

shown in the following table:

### Number of fundamental frequencies to be tested in EUT transmit band

| Frequency range in which | Number of | Location in frequency range                 |
|--------------------------|-----------|---------------------------------------------|
| 1 MHz or less            | 1         | Middle                                      |
| 1 MHz                    | 2         | 1 near top and 1 near bottom                |
| More than 10 MHz         | 3         | 1 near top, 1 near middle and 1 near bottom |

### Frequency range of radiated emission measurements

| Lowest frequency generated  | Upper frequency range of measurement                         |
|-----------------------------|--------------------------------------------------------------|
| 9 kHz to below 10 GHz       | 10th harmonic of highest fundamental frequency or to 40 GHz, |
| At or above 10 GHz to below | 5th harmonic of highest fundamental frequency or to 100 GHz, |
| At or above 30 GHz          | 5th harmonic of highest fundamental frequency or to 200 GHz, |

**ITL** Page 9 of 34 Report No.: 190422007

EUT channels and frequencies list:

| channel | Frequency |
|---------|-----------|
| 1       | 2435      |
| 2       | 2445      |
| 3       | 2455      |

Test frequencies are the lowest channel: 2435MHz, middle channel: 2445

MHz and highest channel: 2455 MHz

Test the EUT in continuous transmission mode, duty cycle > 98%.

**ITL** Page 10 of 34 Report No.: 190422007

# 5.2 Antenna requirement

# Standard requirement

15.203 requirement:

For intentional device. According to 15.203. An intentional radiator shall be designed to Ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### **EUT Antenna**

The antenna is a PIFA antenna and no consideration of replacement. The best case gain of the antenna is 1 dBi.

Test result: The unit does meet the FCC requirements.

**ITL** Page 11 of 34 Report No.: 190422007

# 5.3 Occupied Bandwidth

Test Requirement: FCC PART 15 C section 15.215(c)

(c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rulesection under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated


Test Method: ANSI C63.10:2013

Test Status: Pre-Scan has been conducted to determine the worst-case mode from all

possible combinations between available modulations, channels and antenna ports (if EUT with antenna diversity architecture). Following

channel(s) was (were) selected for the final test as listed below.

### Test Configuration:

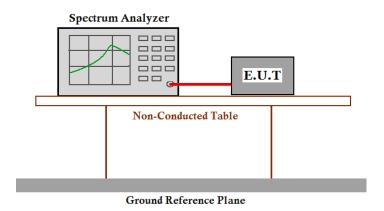

### Test Procedure:

- Remove the antenna from the EUT and then connect a low attention attenuation RF cable
   (Cable loss =0.5dB) from the antenna port to the spectrum.
- a) The instrument center frequency was set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer was between 1.5 times and 5.0 times the OBW(20 dB Bandwidth).
- b) The nominal IF filter bandwidth (3 dB RBW) was in the range of 1% to 5% of the OBW, and VBW was approximately three times the RBW.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral

ITL Page 12 of 34 Report No.: 190422007

envelope was more than [10 log (OBW/RBW)] below the reference level.

- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) The dynamic range of the instrument at the selected RBW was more than 10 dB below the target "-20 dB down" requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW was at least 30 dB below the reference value.
- f) Peak detection and max hold mode (until the trace stabilizes) was used.
- g) Used the 20dB bandwidth function of the instrument and reported the measured bandwidth.
- h) The occupied bandwidth was reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division was clearly labeled. Tabular data was reported in addition to the plot(s).

### 20 dB bandwidth:


| Channel<br>No. | Frequency<br>(MHz) | Measured 20dB<br>bandwidth<br>(MHz) | Limit  | Result |
|----------------|--------------------|-------------------------------------|--------|--------|
| 1              | 2435               | 6.308                               | 2400-  | Pass   |
| 2              | 2445               | 5.570                               | 2483.5 | Pass   |
| 3              | 2455               | 4.387                               | MHz    | Pass   |

ITL Page 13 of 34 Report No.: 190422007

20dB bandwidth:

Result plot as follows:

Channel 1:2.435GHz:

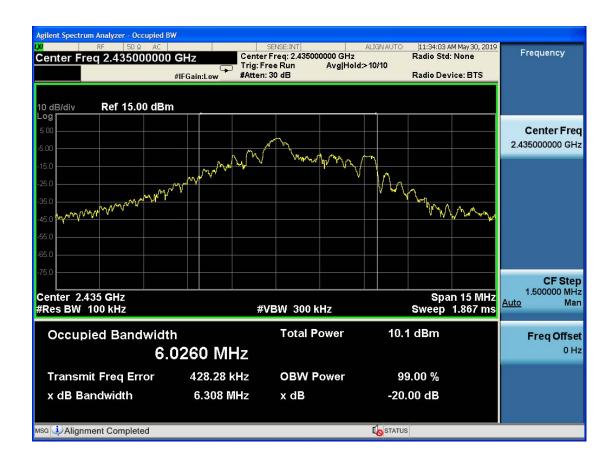


ITL Page 14 of 34 Report No.: 190422007

### Channel 2:2.445GHz:



#### Channel 3:2.455GHz:

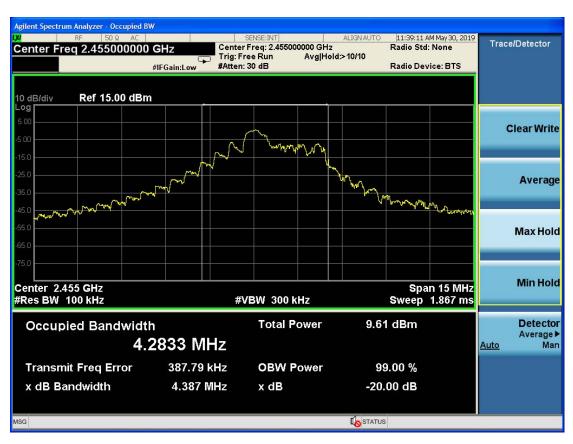

ITL Page 15 of 34 Report No.: 190422007

### 5.4 Radiated Spurious Emissions

Test Requirement: FCC PART 15 C section 15.249 (a), (d)

> (a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

| Fundamental<br>Frequency<br>(MHz) | Field Strength of<br>Fundamental<br>(dBµV/m @ 3m) | Field Strength of<br>Harmonics<br>(dBµV/m @ 3m) |
|-----------------------------------|---------------------------------------------------|-------------------------------------------------|
| 902 to 928                        | 94.0                                              | 54.0                                            |
| 2400 to 2483.5                    | 94.0                                              | 54.0                                            |
| 5725 to 5875                      | 94.0                                              | 54.0                                            |

Note: The limits shown in the above table are based on measurements using an average detector, except for the fundamental emission in the frequency band 902-928 MHz, which is based on measurements using a CISPR guasi-peak detector.

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in \$15.209, whichever is the lesser attenuation.

Test Method: ANSI C63.10:2013 Clause 6.4, 6.5 and 6.6

Test Status: Pre-Scan has been conducted to determine the worst-case mode from all

> possible combinations between available modulations, channels and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Detector: For PK value:

RBW = 1 MHz for  $f \ge 1$  GHz, 100 kHz for f < 1 GHz

VBW ≥ RBW Sweep = auto

Detector function = peak

Trace = max hold

15.209 Limit: 40.0 dBµV/m between 30MHz & 88MHz

 $43.5 \text{ dB}\mu\text{V/m}$  between 88MHz & 216MHz

46.0 dBµV/m between 216MHz & 960MHz

54.0 dBµV/m above 960MHz

The average correction factor was computed by analyzing the on time in 100ms over one complete pulse train. Analysis of the remote transmitter on time in one complete pulse train, therefore the average value of fundamental frequency was: Average = Peak value + 20log (Duty cycle), where the duty factor is calculated from following formula:


ITL Page 16 of 34 Report No.: 190422007


The duration of one cycle =2.48ms Effective period of the cycle =0.4ms DC =0.4/2.48=0.1613 or 16.13%


Therefore, the averaging factor is found by 20lg0.1613=-15.85

Please refer to below plots for more details.

Retest on all keys ,found that the worst case result was the "on" Key

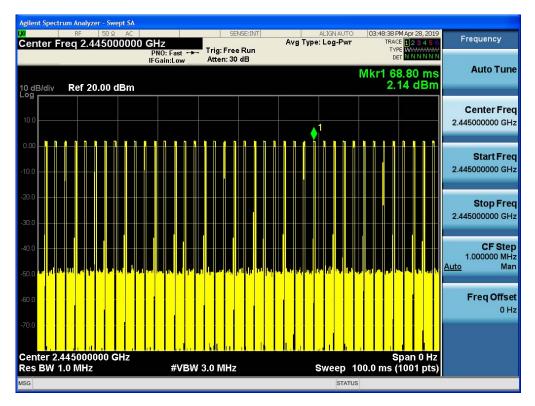

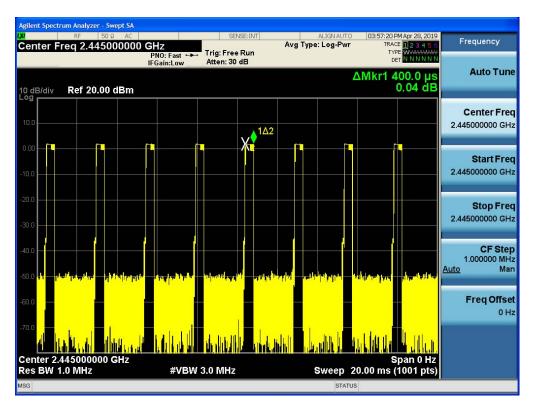

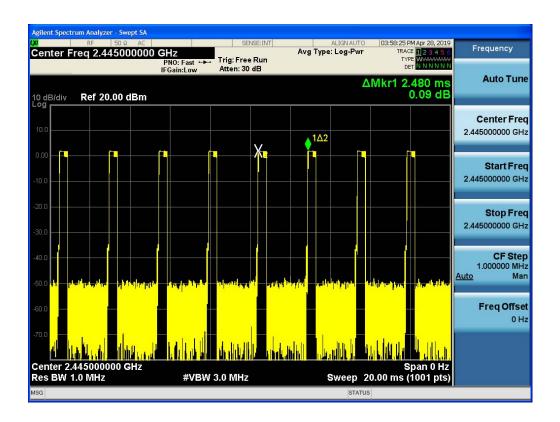


Section 15.205 Restricted bands of operation.

|                                                                                                                                                                                                                                                                                                                | ted bands of operation.                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                         | T                                                                                                                                                                                                                              |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MHz                                                                                                                                                                                                                                                                                                            | MHz                                                                                                                                                                                                                                                                                     | MHz                                                                                                                                                                                                                                                     | GHz                                                                                                                                                                                                                            |
| 0.090 - 0.110<br>10.495 - 0.505<br>2.1735 - 2.1905<br>4.125 - 4.128<br>4.17725 - 4.17775<br>4.20725 - 4.20775<br>6.215 - 6.218<br>6.26775 - 6.26825<br>6.31175 - 6.31225<br>8.291 - 8.294<br>8.362 - 8.366<br>8.37625 - 8.38675<br>8.41425 - 8.41475<br>12.29 - 12.293<br>12.51975 - 12.52025<br>13.36 - 13.41 | 16.42 - 16.423<br>16.69475 - 16.69525<br>16.80425 - 16.80475<br>25.5 - 25.67<br>37.5 - 38.25<br>73 - 74.6<br>74.8 - 75.2<br>108 - 121.94<br>123 - 138<br>149.9 - 150.05<br>156.52475 -<br>156.52525<br>156.7 - 156.9<br>162.0125 - 167.17<br>167.72 - 173.2<br>240 - 285<br>322 - 335.4 | 399.9 - 410<br>608 - 614<br>960 - 1240<br>1300 - 1427<br>1435 - 1626.5<br>1645.5 - 1646.5<br>1660 - 1710<br>1718.8 - 1722.2<br>2200 - 2300<br>2310 - 2390<br>2483.5 - 2500<br>2655 - 2900<br>3260 - 3267<br>3332 - 3339<br>3345.8 - 3358<br>3600 - 4400 | 4.5 - 5.15<br>5.35 - 5.46<br>7.25 - 7.75<br>8.025 - 8.5<br>9.0 - 9.2<br>9.3 - 9.5<br>10.6 - 12.7<br>13.25 - 13.4<br>14.47 - 14.5<br>15.35 - 16.2<br>17.7 - 21.4<br>22.01 - 23.12<br>23.6 - 24.0<br>31.2 - 31.8<br>36.43 - 36.5 |


ITL Page 18 of 34 Report No.: 190422007

# **Test Configuration:**

1) 9kHz to 30MHz emissions:

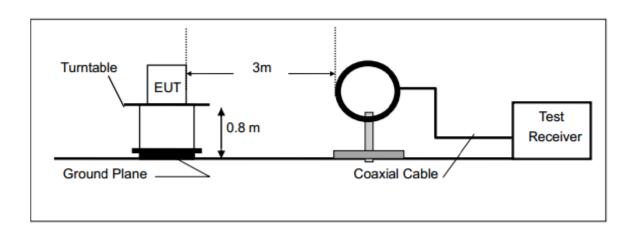


### 2) 30 MHz to 1 GHz emissions:

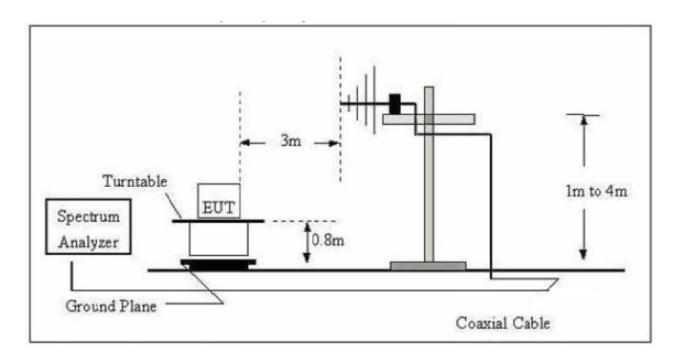

ITL Page 19 of 34 Report No.: 190422007

### 3) 1 GHz to 40 GHz emissions:

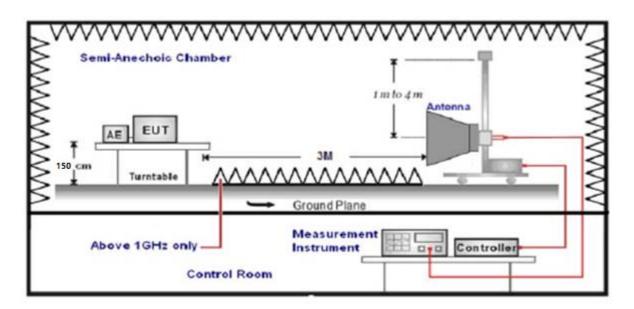

#### **Test Procedure:**

### 1) 9 kHz to 30 MHz emissions:

For testing performed with the loop antenna. The centre of the loop was positioned 1 m above the ground and positioned with its plane vertical at the special distance from the EUT. During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane.

2) 30 MHz to 1 GHz emissions:

For testing performed with the bi-log type antenna. The measurement is performed with the EUT rotated 360o, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

# 3) 1 GHz to 25 GHz emissions:

Test site with RF absorbing material covering the ground plane that met the site validation criterion called out in CISPR 16-1-4:2010 was used to perform radiated emission test above 1 GHz

For testing performed with the horn antenna. The measurement is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

4) The receiver was scanned from 9 kHz to 25 GHz. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. The worst case emissions were reported.

Used Test Equipment List:

3m Semi-Anechoic Chamber, EMI Test Receiver (9 kHz~7 GHz), Signal and Spectrum Analyzer (10 Hz~40 GHz), Loop antenna (9 kHz-30 MHz). TRILOG Super Broadband test Antenna(30 MHz-

3 GHz ) (RX), Bouble-Ridged Waveguide Horn Antenna (800 MHz-18 GHz)(RX) and High Frequency Antenna & preamplifier(18 GHz~26.5 GHz) (RX). Refer to Clause 5 Test Equipment List for details.

9 kHz $\sim$ 30 MHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement The measurements with active loop antenna were greater than 20dB below the limit, so the

test data were not recorded in the test report.

ITL Page 20 of 34 Report No.: 190422007

# 5.4.1 Harmonic and other spurious emissions

Test at Channel 1 (2.435 GHz) in transmitting status


9kHz~30MHz Test result

The Low frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not report

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

#### **Horizontal:**

Peak scan

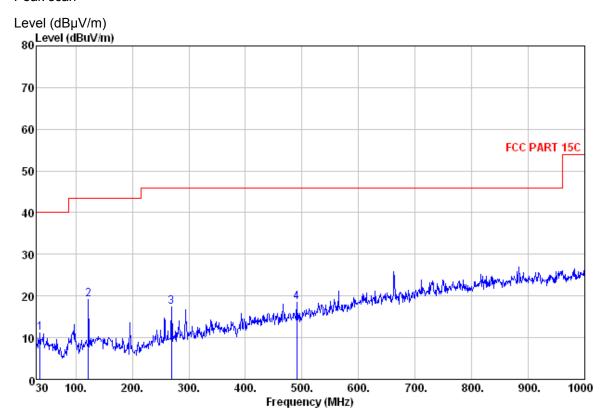

Quasi-peak measurement

| No | . Freq<br>MHz | Read<br>Level<br>dBuV | Antenna<br>Factor<br>dB | Cable<br>Loss<br>dB | Preamp<br>Factor<br>dB | Level<br>dBuV/m | Limit<br>Line<br>dBuV/m | Limit  | Pol/Phase | Remark |
|----|---------------|-----------------------|-------------------------|---------------------|------------------------|-----------------|-------------------------|--------|-----------|--------|
| _  |               |                       |                         |                     |                        |                 |                         |        |           |        |
| 1  | 36.790        | 25.87                 | 13.05                   | 0.69                | 28.41                  | 11.20           | 40.00                   | -28.80 | HORIZONTA | L QP   |
| 2  | 122.150       | 35.17                 | 11.14                   | 1.31                | 28.48                  | 19.14           | 43.50                   | -24.36 | HORIZONTA | L QP   |
| 3  | 269.590       | 30.43                 | 12.13                   | 2.01                | 27.22                  | 17.35           | 46.00                   | -28.65 | HORIZONTA | L QP   |
| 4  | 490.750       | 27.31                 | 17.11                   | 2.75                | 28.65                  | 18.52           | 46.00                   | -27.48 | HORIZONTA | L QP   |


Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

ITL Page 21 of 34 Report No.: 190422007

### Vertical:

Peak scan

Level (dBµV/m)

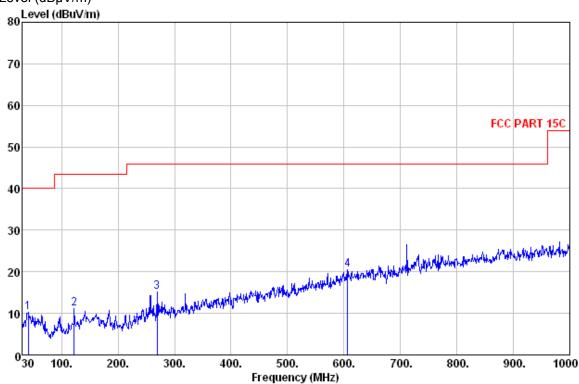

Quasi-peak measurement

| No. | Freq<br>MHz | Read<br>Level<br>dBuV | Antenna<br>Factor<br>dB | Cable<br>Loss<br>dB | Preamp<br>Factor<br>dB |       | Limit<br>Line<br>dBuV/m | Over<br>Limit<br>dB | Pol/Phase | Remark |
|-----|-------------|-----------------------|-------------------------|---------------------|------------------------|-------|-------------------------|---------------------|-----------|--------|
| _   |             |                       |                         |                     |                        |       |                         |                     |           |        |
| 1   | 40.670      | 24.14                 | 13.47                   | 0.72                | 28.16                  | 10.17 | 40.00                   | -29.83              | VERTICAL  | QP     |
| 2   | 122.150     | 27.27                 | 11.14                   | 1.31                | 28.48                  | 11.24 | 43.50                   | -32.26              | VERTICAL  | QP     |
| 3   | 269.590     | 28.23                 | 12.13                   | 2.01                | 27.22                  | 15.15 | 46.00                   | -30.85              | VERTICAL  | QP     |
| 4   | 606.180     | 26.08                 | 19.67                   | 3.08                | 28.30                  | 20.53 | 46.00                   | -25.47              | VERTICAL  | QP     |

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

**ITL** Page 22 of 34 Report No.: 190422007

# Above 1G

| No. | Frequency<br>(MHz) | Reading<br>Level<br>(dBuV) | Correct<br>(dB/m) | Duty cycle<br>Factor<br>(dB) | Level<br>(dBµV/m) | Limit<br>(dBµV/m) | Margin<br>(dB) | Antenna<br>polarizatio<br>n | Remark |
|-----|--------------------|----------------------------|-------------------|------------------------------|-------------------|-------------------|----------------|-----------------------------|--------|
| 1   | 2435               | 89.97                      | 0.14              | N/A                          | 90.11             | 114.00            | -23.89         | Н                           | Peak   |
|     |                    |                            |                   | -15.85                       | 74.26             | 94.00             | -19.74         | Н                           | AV     |
| 2   | 4870               | 35.41                      | 5.79              | N/A                          | 41.20             | 74.00             | -28.02         | Н                           | Peak   |
|     |                    |                            |                   | -15.85                       | 30.13             | 54.00             | -23.87         | Н                           | AV     |

| No. | Frequency<br>(MHz) | Reading<br>Level<br>(dBuV) | Correct<br>(dB/m) | Duty cycle<br>Factor<br>(dB) | Level<br>(dBµV/m) | Limit<br>(dBµV/m) | Margin<br>(dB) | Antenna<br>polarizatio<br>n | Remark |
|-----|--------------------|----------------------------|-------------------|------------------------------|-------------------|-------------------|----------------|-----------------------------|--------|
| 1   | 2435               | 89.72                      | 0.14              | N/A                          | 89.86             | 114.00            | -24.14         | V                           | Peak   |
|     |                    |                            |                   | -15.85                       | 74.01             | 94.00             | -19.99         | V                           | AV     |
| 2   | 4870               | 34.99                      | 5.79              | N/A                          | 40.78             | 74.00             | -33.22         | V                           | Peak   |
|     |                    |                            |                   | -15.85                       | 24.93             | 54.00             | -29.07         | V                           | AV     |

ITL Page 23 of 34 Report No.: 190422007

Test at Channel 2 (2.445 GHz) in transmitting status

9 kHz~30MHz Test result


The Low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not report

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

### Horizontal:

Peak scan

Level (dBµV/m)

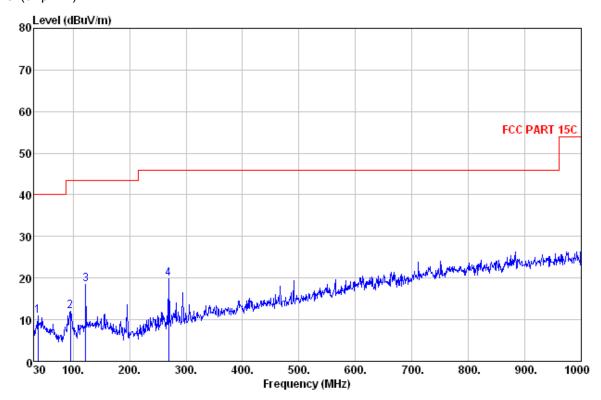

### Quasi-peak measurement

| No | . Freq<br>MHz      | Read<br>Level<br>dBuV | Antenna<br>Factor<br>dB |      | Preamp<br>Factor<br>dB |                |       | Limit            | Pol/Phase       | Remark |
|----|--------------------|-----------------------|-------------------------|------|------------------------|----------------|-------|------------------|-----------------|--------|
| _  |                    |                       |                         |      |                        |                |       |                  |                 |        |
| 1  | 37.760             | 25.43                 | 13.19                   | 0.70 | 28.32                  | 11.00          | 40.00 | -29.00           | HORIZONTAL      | . QP   |
| 2  | 94.990             | 30.70                 | 8.70                    | 1.14 | 28.60                  | 11.94          | 43.50 | -31.56           | HORIZONTAL      | . QP   |
| _  | 122.150<br>269.590 |                       | 11.14<br>12.13          | 1.31 | 28.48<br>27.22         | 18.51<br>19.94 |       | -24.99<br>-26.06 |                 |        |
| -  | 200.000            | 00.02                 | 12.10                   | 2.01 |                        | 10.01          | 20.00 | 20.00            | 110111110111111 | - 41   |


Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

**ITL** Page 24 of 34 Report No.: 190422007

### Vertical:

Peak scan

Level (dBµV/m)

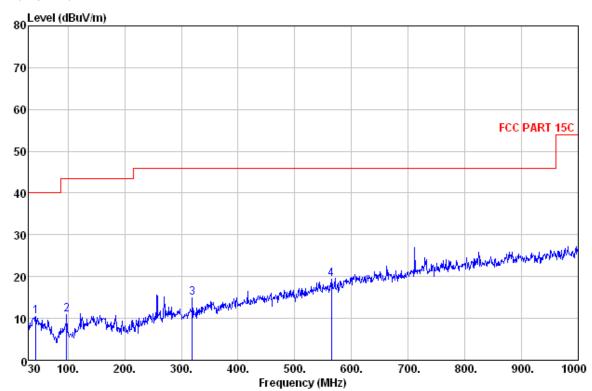

# Quasi-peak measurement

| No. | Freq<br>MHz | Read<br>Level<br>dBuV | Antenna<br>Factor<br>dB | Cable<br>Loss<br>dB | Preamp<br>Factor<br>dB | Level<br>dBuV/m | Limit<br>Line<br>dBuV/m | Limit  | Pol/Phase | Remark |
|-----|-------------|-----------------------|-------------------------|---------------------|------------------------|-----------------|-------------------------|--------|-----------|--------|
| _   |             |                       |                         |                     |                        |                 |                         |        |           |        |
| 1   | 43.580      | 24.78                 | 13.32                   | 0.75                | 28.39                  | 10.46           | 40.00                   | -29.54 | VERTICAL  | QP     |
| 2   | 97.900      | 29.63                 | 8.93                    | 1.16                | 28.72                  | 11.00           | 43.50                   | -32.50 | VERTICAL  | QP     |
| _   | 319.060     | 26.84                 | 13.36                   | 2.19                | 27.52                  | 14.87           |                         | -31.13 |           | QP     |
| 4   | 564.470     | 26.49                 | 18.78                   | 2.96                | 28.78                  | 19.45           | 46.00                   | -26.55 | VERTICAL  | QP     |

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

**ITL** Page 25 of 34 Report No.: 190422007

# Above 1G

| No. | Frequency<br>(MHz) | Reading<br>Level<br>(dBuV) | Correct<br>(dB/m) | Duty cycle<br>Factor<br>(dB) | Level<br>(dBµV/m) | Limit<br>(dBµV/m) | Margin<br>(dB) | Antenna<br>polarizatio<br>n | Remark |
|-----|--------------------|----------------------------|-------------------|------------------------------|-------------------|-------------------|----------------|-----------------------------|--------|
| 1   | 2445               | 87.84                      | 0.14              | N/A                          | 87.98             | 114.00            | -26.02         | Н                           | Peak   |
|     |                    |                            |                   | -15.85                       | 72.13             | 94.00             | -21.87         | Н                           | AV     |
| 2   | 4890               | 38.63                      | 5.80              | N/A                          | 44.43             | 74.00             | -29.57         | Н                           | Peak   |
|     |                    |                            |                   | -15.85                       | 28.58             | 54.00             | -25.42         | Н                           | AV     |

| No. | Frequency<br>(MHz) | Reading<br>Level<br>(dBuV) | Correct<br>(dB/m) | Duty cycle<br>Factor<br>(dB) | Level<br>(dBµV/m) | Limit<br>(dBµV/m) | Margin<br>(dB) | Antenna<br>polarizatio<br>n | Remark |
|-----|--------------------|----------------------------|-------------------|------------------------------|-------------------|-------------------|----------------|-----------------------------|--------|
| 1   | 2445               | 86.57                      | 0.13              | N/A                          | 86.70             | 114.00            | -27.30         | V                           | Peak   |
|     |                    |                            |                   | -15.85                       | 70.85             | 94.00             | -23.15         | V                           | AV     |
| 2   | 4890               | 37.26                      | 5.80              | N/A                          | 43.06             | 74.00             | -30.94         | V                           | Peak   |
|     |                    |                            |                   | -15.85                       | 27.21             | 54.00             | -26.79         | V                           | AV     |

**ITL** Page 26 of 34 Report No.: 190422007

Test at Channel 3 (2.455 GHz) in transmitting status

9kHz~30MHz Test result


The Low frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not report

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

#### Horizontal:

Peak scan

Level (dBµV/m)

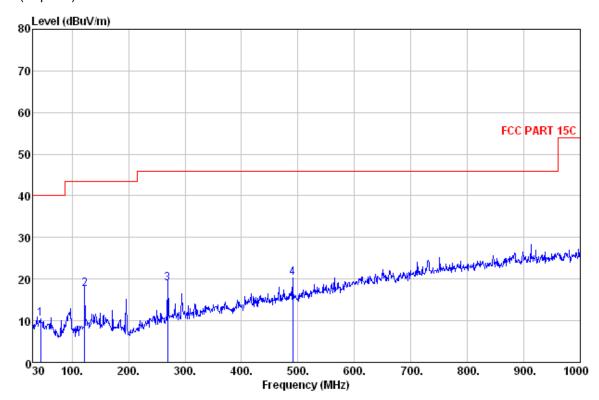

### Quasi-peak measurement

| No. | Freq<br>MHz | Read<br>Level<br>dBuV | Antenna<br>Factor<br>dB | Cable<br>Loss<br>dB | Preamp<br>Factor<br>dB | Level<br>dBuV/m | Limit<br>Line<br>dBuV/m | Limit  | Pol/Phase  | Remark |
|-----|-------------|-----------------------|-------------------------|---------------------|------------------------|-----------------|-------------------------|--------|------------|--------|
| _   |             |                       |                         |                     |                        |                 |                         |        |            |        |
| 1   | 44.550      | 24.93                 | 13.27                   | 0.76                | 28.47                  | 10.49           | 40.00                   | -29.51 | HORIZONTAL | . QP   |
| 2   | 122.150     | 33.54                 | 11.14                   | 1.31                | 28.48                  | 17.51           | 43.50                   | -25.99 | HORIZONTAL | . QP   |
| 3   | 269.590     | 32.02                 | 12.13                   | 2.01                | 27.22                  | 18.94           | 46.00                   | -27.06 | HORIZONTAL | QP     |
| 4   | 490.750     | 29.17                 | 17.11                   | 2.75                | 28.65                  | 20.38           | 46.00                   | -25.62 | HORIZONTAL | . QP   |


Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

**ITL** Page 27 of 34 Report No.: 190422007

### Vertical:

Peak scan

Level (dBµV/m)

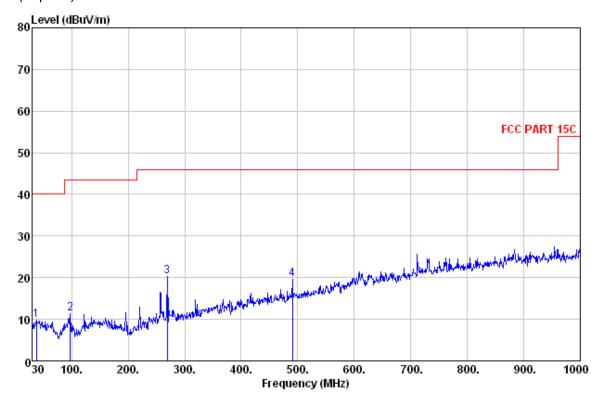

# Quasi-peak measurement

| No. | . Freq<br>MHz      | Read<br>Level<br>dBuV | Antenna<br>Factor<br>dB | Cable<br>Loss<br>dB | Preamp<br>Factor<br>dB | Level<br>dBuV/m | Limit<br>Line<br>dBuV/m | Limit            | Pol/Phase | Remark   |
|-----|--------------------|-----------------------|-------------------------|---------------------|------------------------|-----------------|-------------------------|------------------|-----------|----------|
| _   |                    |                       |                         |                     |                        |                 |                         |                  |           |          |
| 1   | 37.760             | 24.16                 | 13.19                   | 0.70                | 28.32                  | 9.73            | 40.00                   | -30.27           | VERTICAL  | QP       |
| 2   | 97.900             | 29.96                 | 8.93                    | 1.16                | 28.72                  | 11.33           | 43.50                   | -32.17           | VERTICAL  | QP       |
| _   | 269.590<br>490.750 | 33.30<br>28.30        | 12.13<br>17.11          | 2.01<br>2.75        | 27.22<br>28.65         | 20.22<br>19.51  |                         | -25.78<br>-26.49 |           | QP<br>QP |
| 4   | 450.100            | 20.30                 | 11.11                   | 2.10                | 20.00                  | 10.01           | 40.00                   | 20.45            | ARKLICAL  | QI.      |

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

**ITL** Page 28 of 34 Report No.: 190422007

#### Above 1G

| No. | Frequency<br>(MHz) | Reading<br>Level<br>(dBuV) | Correct<br>(dB/m) | Duty cycle<br>Factor<br>(dB) | Level<br>(dBµV/m) | Limit<br>(dBµV/m) | Margin<br>(dB) | Antenna<br>polarizatio<br>n | Remark |
|-----|--------------------|----------------------------|-------------------|------------------------------|-------------------|-------------------|----------------|-----------------------------|--------|
| 1   | 2455               | 89.25                      | 0.13              | N/A                          | 89.38             | 114.00            | -24.62         | Н                           | Peak   |
|     |                    |                            |                   | -15.85                       | 73.53             | 94.00             | -20.47         | Н                           | AV     |
| 2   | 4910               | 40.55                      | 5.80              | N/A                          | 46.35             | 74.00             | -27.65         | Н                           | Peak   |
|     |                    |                            |                   | -15.85                       | 30.50             | 54.00             | -23.50         | Н                           | AV     |

| No. | Frequency<br>(MHz) | Reading<br>Level<br>(dBuV) | Correct<br>(dB/m) | Duty cycle<br>Factor<br>(dB) | Level<br>(dBµV/m) | Limit<br>(dBµV/m) | Margin<br>(dB) | Antenna<br>polarizatio<br>n | Remark |
|-----|--------------------|----------------------------|-------------------|------------------------------|-------------------|-------------------|----------------|-----------------------------|--------|
| 1   | 2455               | 88.67                      | 0.13              | N/A                          | 88.80             | 114.00            | -25.20         | V                           | Peak   |
|     |                    |                            |                   | -15.85                       | 72.95             | 94.00             | -21.05         | V                           | AV     |
| 2   | 4910               | 39.74                      | 5.82              | N/A                          | 45.56             | 74.00             | -28.44         | V                           | Peak   |
|     |                    |                            |                   | -15.85                       | 29.71             | 54.00             | -24.29         | V                           | AV     |

### Remark:

- 1) .For this intentional radiator operates below 25 GHz. The spectrum shall be investigated to the tenth harmonics of the highest fundamental frequency. And above the third harmonic of this intentional radiator, the disturbance is very low. So the test result only displays to 3<sup>rd</sup> harmonic.
- 2). As shown in Section, for frequencies above 1000 MHz. the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.
- 3). The test only perform the EUT in transmitting status since the test frequencies were over 1GHz only required transmitting status.

Test result: The unit does meet the FCC requirements.

**ITL** Page 29 of 34 Report No.: 190422007

# 5.5 Band Edges Requirement

Test Requirement: FCC Part 15 C section 15.249

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission

limits in § 15.209, whichever is the lesser attenuation.


Frequency Band: 2400 MHz to 2483.5 MHz

Test Method: ANSI C63.10:2013

Test Status: Pre-Scan has been conducted to determine the worst-case mode from all

possible combinations between available modulations, channels and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

**Test Configuration:** 

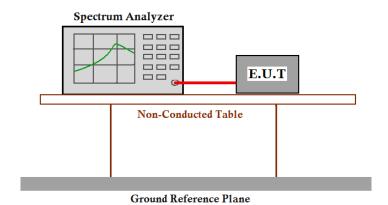

### Used Test Equipment List:


3m Semi-Anechoic Chamber, EMI Test Receiver (9kHz~7 GHz), Signal and Spectrum Analyzer (10 Hz~40 GHz), Loop antenna (9 kHz-30 MHz). TRILOG Super Broadband test Antenna(30 MHz-3 GHz) (RX), Bouble-Ridged Waveguide Horn Antenna (800 MHz-18 GHz)(RX) and High Frequency Antenna & preamplifier(18 GHz~26.5 GHz) (RX). Refer to Clause 5 Test Equipment List for details.

ITL Page 30 of 34 Report No.: 190422007

Result plot as follows:


Channel 1: 2.435 GHz

### Horizontal:

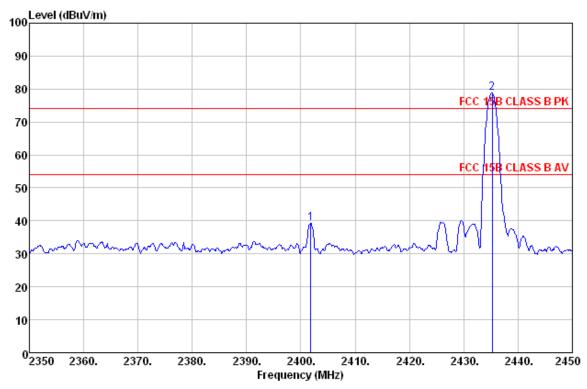

| Frequency<br>(MHz) | Reading<br>Level<br>(dBuV) | Meas.<br>Time<br>(ms) | Bandwidth<br>(kHz) | Correct<br>(dB/m) | Level<br>(dBµV/m) | Limit<br>(dBµV/m) | Margin<br>(dB) | Antenna<br>polarizatio<br>n | Remark |
|--------------------|----------------------------|-----------------------|--------------------|-------------------|-------------------|-------------------|----------------|-----------------------------|--------|
| 2401.8             | 39.25                      | 1000                  | 1000               | -0.21             | 39.04             | 74                | -34.96         | Н                           | Peak   |



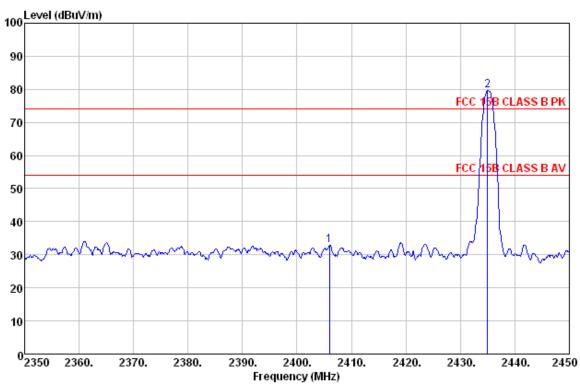


| I | Frequency<br>(MHz) | Reading<br>Level<br>(dBuV) | Meas.<br>Time<br>(ms) | Bandwidth<br>(kHz) | Correct<br>(dB/m) | Level<br>(dBµV/m) | Limit<br>(dBµV/m) | Margin<br>(dB) | Antenna<br>polarizatio<br>n | Remark |
|---|--------------------|----------------------------|-----------------------|--------------------|-------------------|-------------------|-------------------|----------------|-----------------------------|--------|
|   | 2406.0             | 32.73                      | 1000                  | 1000               | -0.16             | 32.89             | 74                | -41.11         | V                           | Peak   |

**ITL** Page 32 of 34 Report No.: 190422007

Channel 3: 2.455 GHz


### Horizontal:

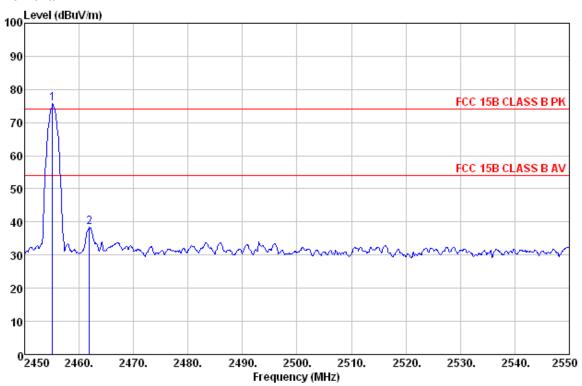

| Frequency<br>(MHz) | Reading<br>Level<br>(dBuV) | Meas.<br>Time<br>(ms) | Bandwidth<br>(kHz) | Correct<br>(dB/m) | Level<br>(dBµV/m) | Limit<br>(dBµV/m) | Margin<br>(dB) | Antenna<br>polarizatio<br>n | Remark |
|--------------------|----------------------------|-----------------------|--------------------|-------------------|-------------------|-------------------|----------------|-----------------------------|--------|
| 2461.9             | 38.18                      | 1000                  | 1000               | -0.13             | 38.31             | 74                | -35.69         | Н                           | Peak   |

Page 33 of 34 Report No.: 190422007

# Vertical:

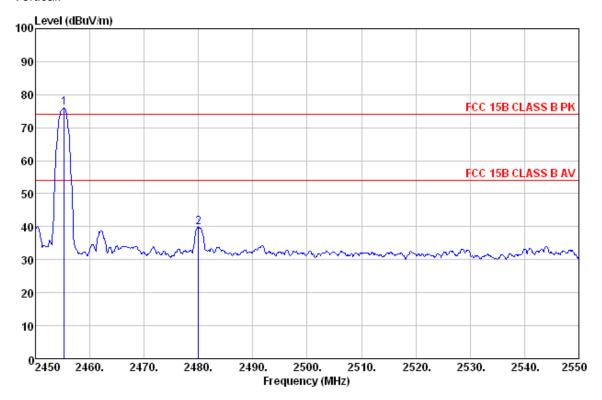

| Frequency<br>(MHz) | Reading<br>Level<br>(dBuV) | Meas.<br>Time<br>(ms) | Bandwidth<br>(kHz) | Correct<br>(dB/m) | Level<br>(dBµV/m) | Limit<br>(dBµV/m) | Margin<br>(dB) | Antenna<br>polarizatio<br>n | Remark |
|--------------------|----------------------------|-----------------------|--------------------|-------------------|-------------------|-------------------|----------------|-----------------------------|--------|
| 2480.0             | 39.70                      | 1000                  | 1000               | -0.11             | 39.81             | 74                | -34.19         | V                           | Peak   |

ITL Page 34 of 34 Report No.: 190422007

# 5.6 Conducted Emissions at Mains Terminals 150 kHz to 30MHz (N/A)

**Test Requirement:** FCC Part 15 C section 15.207

Test Method: ANSI C63.10:2013

Frequency Range: 150 kHz to 30 MHz

**Detector:** Peak for pre-scan (9 kHz Resolution Bandwidth)

**Test Limit** 

# Limits for conducted disturbance at the mains ports of class B

| Eroguanov Pango | Class B Limit dB(μV) |          |  |  |  |
|-----------------|----------------------|----------|--|--|--|
| Frequency Range | Quasi-peak           | Average  |  |  |  |
| 0.15 to 0.50    | 66 to 56             | 56 to 46 |  |  |  |
| 0.50 to 5       | 56                   | 46       |  |  |  |
| 5 to 30         | 60                   | 50       |  |  |  |

NOTE 1 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.