

FCC TEST REPORT
for
PRADOTEC CORPORATION SDN. BHD. (807780-P)

Desktop Passport Reader
Model No.: DPS300

Prepared for : PRADOTEC CORPORATION SDN. BHD. (807780-P)
Address : IRIS Smart Technology Complex, Technology Park Malaysia,
Bukit Jalil, 57000 Kuala Lumpur, Malaysia

Prepared By : Shenzhen Anbotek Compliance Laboratory Limited
Address : 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road,
Nanshan District, Shenzhen, Guangdong, China
Tel: (86) 755-26066544
Fax: (86) 755-26014772

Report Number : R011501694E
Date of Test : Feb. 05~ 28, 2015
Date of Report : Mar. 05, 2015

TABLE OF CHONENTS

Description

	Page
1. GENERAL INFORMATION.....	4
1.1. Description of Device (EUT).....	4
1.2. Auxiliary Equipment Used during Test.....	5
1.3. Description of Test Facility.....	6
1.4. Measurement Uncertainty.....	6
2. TEST PROCEDURE.....	7
3. POWER LINE CONDUCTED MEASUREMENT.....	8
3.1 Block Diagram of Test Setup.....	8
3.2 Power Line Conducted Emission Measurement Limits (Class A).....	8
3.3 Configuration of EUT on Measurement.....	8
3.4 Operating Condition of EUT.....	8
3.5 Test Procedure.....	9
3.6 Test equipment.....	9
3.7 Power Line Conducted Emission Measurement Results.....	9
4. RADIATED EMISSION MEASUREMENT.....	12
4.1. Radiated Emission Limits.....	12
4.2. Test Procedure.....	12
4.3. Test Setup.....	13
4.4. Test Results (Field Strength within the band of operation).....	15
4.5. Test Results (Field strength outside of the band of operation).....	15
5. FREQUENCY TOLERANCE.....	18
5.1. Frequency Tolerance Limits.....	18
5.2. Test Setups.....	18
5.3. Test Procedure.....	18
5.4. Test Results.....	19
6. 20DB BANDWIDTH.....	20
6.1. Limits.....	20
6.2. Test Setups.....	20
6.3. Test Procedure.....	20
6.4. Test Results.....	20
7. ANTENNA APPLICATION.....	22
7.1. Antenna Requirement.....	22
7.2. Result.....	22
8. PHOTOGRAPH.....	23
8.1 Photo of Conducted Emission Test.....	23
8.2 Photo of Radiation Emission Test.....	23
APPENDIX I (EXTERNAL PHOTOS).....	24
APPENDIX II (INTERNAL PHOTOS).....	28

TEST REPORT VERIFICATION

Applicant : PRADOTEC CORPORATION SDN. BHD. (807780-P)
Manufacturer : OPTIMA KLASIK SDN. BHD. (807783-T)
EUT : Desktop Passport Reader
Model No. : DPS300
Rating : Input: 100-240V~, 50/60Hz, 1.5A
Trade Mark : 

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart C 15.225 & FCC / ANSI C63.4-2009

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited To determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both radiated and conducted emissions. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited Is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Test : Feb. 05~28, 2015

Prepared by : Kebo Zhang
(Tested Engineer / Kebo Zhang)

Reviewer : Amy Ding
(Project Manager / Amy Ding)

Approved & Authorized Signer : Tom Chen
(Manager / Tom Chen)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Description : Desktop Passport Reader

Model Number : DPS300

Test Power Supply : AC 120V/60Hz

Adapter : Model: SMS-00120500-S01
Input: AC 100-240V, 50/60Hz, 1.5A
Output: DC 12V, 5.0A

Frequency : 13.56 MHz

Antenna Gain : 0 dBi

Antenna Type : Integrated

Applicant : PRADOTEC CORPORATION SDN. BHD. (807780-P)

Address : IRIS Smart Technology Complex, Technology Park
Malaysia, Bukit Jalil, 57000 Kuala Lumpur, Malaysia

Manufacturer : OPTIMA KLASIK SDN. BHD. (807783-T)

Address : IRIS Smart Technology Complex, Technology Park
Malaysia, Bukit Jalil, 57000 Kuala Lumpur, Malaysia

Factory : OPTIMA KLASIK SDN. BHD. (807783-T)

Address : IRIS Smart Technology Complex, Technology Park
Malaysia, Bukit Jalil, 57000 Kuala Lumpur, Malaysia

Date of Sample received : Feb. 05, 2015

Date of Test : Feb. 05~ 28, 2015

1.2. Auxiliary Equipment Used during Test

PC	: Manufacturer: DELL M/N: OPTIPLEX 380 S/N: 1J63X2X CE , FCC: DOC
MONITOR	: Manufacturer: DELL M/N: E170Sc S/N: CN-00V539-64180-055-0UPS CE , FCC: DOC
KEYBOARD	: Manufacturer: DELL M/N: SK-8115 S/N: CN-0DJ313-71616-06C-02XN CE , FCC: DOC Cable: 1m, unshielded
MOUSE	: Manufacturer: DELL M/N: M-UARDEL7 S/N: N/A CE , FCC: DOC Cable: 1m, unshielded
Printer	: Manufacturer:Brother M/N: MFC-3360C S/N: N/A CE, FCC:DOC
Power Line	: Non-Shielded, 1.5m
VGA Cable	: Non-Shielded, 1.5m

1.3. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS - LAB Code: L3503

Shenzhen Anbotek Compliance Laboratory Limited., Laboratory has been assessed and in compliance with CNAS/CL01: 2006 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

FCC-Registration No.: 752021

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 752021, July 10, 2013.

IC-Registration No.: 8058A-1

Shenzhen Anbotek Compliance Laboratory Limited., EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration 8058A-1, February 22, 2013.

Test Location

All Emissions tests were performed

Shenzhen Anbotek Compliance Laboratory Limited. at 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road, Nanshan District, Shenzhen, Guangdong, China

1.4. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 4.3dB (Vertical)
Radiation Uncertainty	:	Ur = 4.1dB (Horizontal)
Conduction Uncertainty	:	Uc = 3.4dB

2. Test Procedure

GENERAL: This report shall NOT be reproduced except in full without the written approval of Shenzhen Anbotek Compliance Laboratory Limited. The EUT was transmitting a test signal during the testing.

RADIATION INTERFERENCE: The test procedure used was ANSI STANDARD C63.4-2009 using a spectrum analyzer with a pre-selector. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100KHz and the video bandwidth was 300KHz up to 1.0GHz and 1.0MHz with a video BW of 3.0MHz above 1.0GHz. The ambient temperature of the EUT was 74.3oF with a humidity of 69%.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the Preselector was accounted for in the Spectrum Analyzer Meter Reading.

Example:

Freq (MHz) METER READING + ACF = FS
33.20 dBuV + 10.36 dB = 30.36 dBuV/m @ 3m


ANSI STANDARD C63.4-2009 10.1.7 MEASUREMENT PROCEDURES: The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The EUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

3. POWER LINE CONDUCTED measurement

3.1 Block Diagram of Test Setup

3.1.1. Block diagram of connection between the EUT and simulators

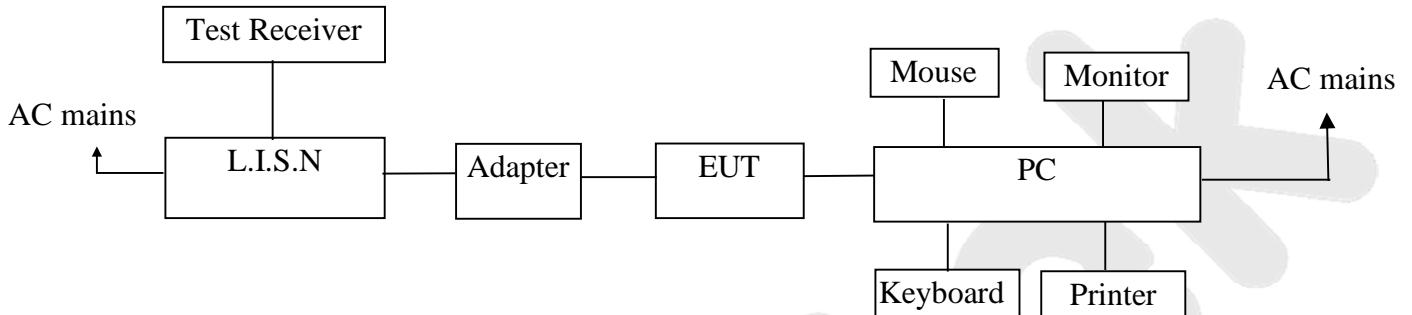

3.2 Power Line Conducted Emission Measurement Limits (Class A)

Frequency (MHz)	Limit (dB μ V)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	79	66
0.50 ~ 30.00	73	60

NOTE1-The lower limit shall apply at the transition frequencies.
NOTE2-The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

Notes: 1. *Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

3.3 Configuration of EUT on Measurement

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

3.4 Operating Condition of EUT

- 3.4.1. Setup the EUT and simulator as shown as Section 3.1.
- 3.4.2. Turn on the power of all equipment.
- 3.4.3. Let the EUT work in test mode (On) and measure it.

3.5 Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.4-2003 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9KHz.

The frequency range from 150KHz to 30MHz is checked.

The test results are reported on Section 3.6.

3.6 Test equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Two-Line V-network	Rohde & Schwarz	ENV216	100055	Apr. 22, 2014	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Apr. 22, 2014	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Apr. 22, 2014	1 Year

3.7 Power Line Conducted Emission Measurement Results

PASS.

The frequency range from 150KHz to 30 MHz is investigated.


Please refer the following pages.

CONDUCTED EMISSION TEST DATA

Test Site: 1# Shielded Room
 Operating Condition: ON
 Test Specification: AC 120V/60Hz
 Comment: Live Line
 Tem.:25°C Hum.:50%

SCAN TABLE: "Voltage (150K~30M) FIN"

Short Description: 150K-30M Disturbance Voltages

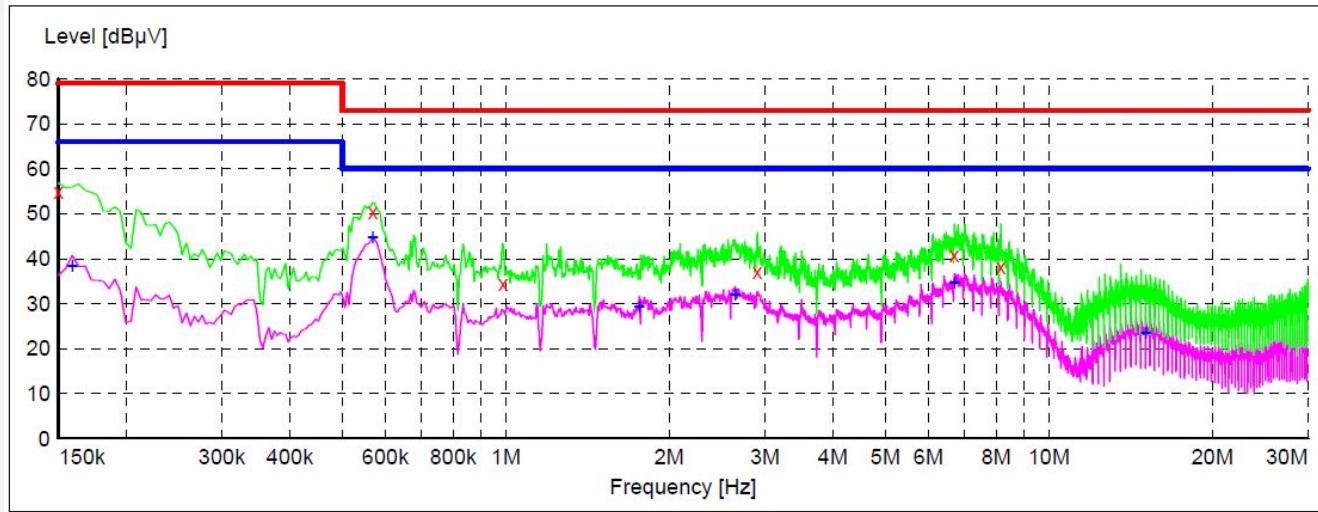

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.150000	54.90	20.1	79	24.1	QP	L1	GND
0.568500	50.40	20.1	73	22.6	QP	L1	GND
0.987000	34.50	20.2	73	38.5	QP	L1	GND
2.903500	37.00	20.4	73	36.0	QP	L1	GND
6.697000	40.80	20.5	73	32.2	QP	L1	GND
8.155000	38.10	20.5	73	34.9	QP	L1	GND


Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.159000	38.40	20.1	66	27.6	AV	L1	GND
0.568500	44.70	20.1	60	15.3	AV	L1	GND
1.760500	29.40	20.3	60	30.6	AV	L1	GND
2.642500	32.00	20.4	60	28.0	AV	L1	GND
6.697000	34.60	20.5	60	25.4	AV	L1	GND
15.085000	23.60	20.7	60	36.4	AV	L1	GND

CONDUCTED EMISSION TEST DATA

Test Site: 1# Shielded Room
 Operating Condition: ON
 Test Specification: DC 5V Via USB Port
 Comment: Neutral Line
 Tem.:25°C Hum:50%

SCAN TABLE: "Voltage (150K~30M) FIN"

Short Description: 150K-30M Disturbance Voltages

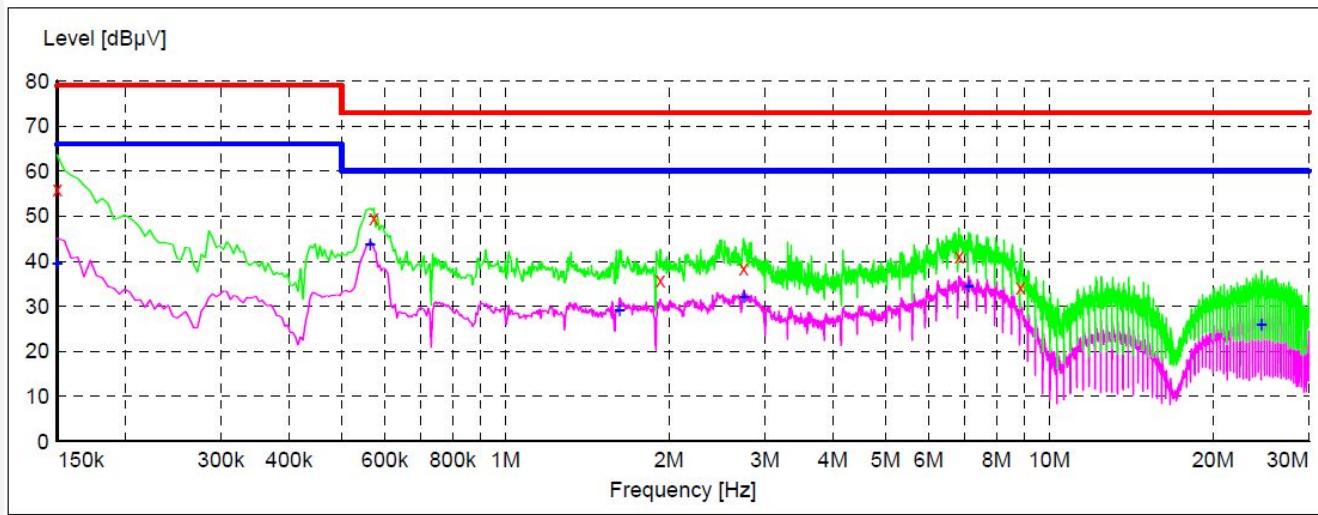

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.150000	55.90	20.1	79	23.1	QP	N	GND
0.573000	49.60	20.1	73	23.4	QP	N	GND
1.927000	35.80	20.3	73	37.2	QP	N	GND
2.741500	38.30	20.4	73	34.7	QP	N	GND
6.823000	41.20	20.5	73	31.8	QP	N	GND
8.857000	34.30	20.6	73	38.7	QP	N	GND

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.150000	39.50	20.1	66	26.5	AV	N	GND
0.564000	43.70	20.1	60	16.3	AV	N	GND
1.621000	29.10	20.3	60	30.9	AV	N	GND
2.746000	31.90	20.4	60	28.1	AV	N	GND
7.106500	34.40	20.5	60	25.6	AV	N	GND
24.580000	25.80	20.9	60	34.2	AV	N	GND

4. RADIATED EMISSION MEASUREMENT

4.1. Radiated Emission Limits

- (a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.
- (b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- (c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- (d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

Note:

- (1) The tighter limit shall apply at the boundary between two frequency range.
- (2) Limitation expressed in dBuV/m is calculated by $20\log$ Emission Level (uV/m).
- (3) If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula of $Ld1 = Ld2 * (d2/d1)^2$.

Example:


F.S Limit at 30m distance is 30uV/m , then F.S Limitation at 3m distance is adjusted as $Ld1 = L1 = 30uV/m * (10)^2 = 100 * 30 uV/m$

4.2. Test Procedure


- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.3. Test Setup

(A) Radiated Emission Test Set-Up, Frequency below 30MHz

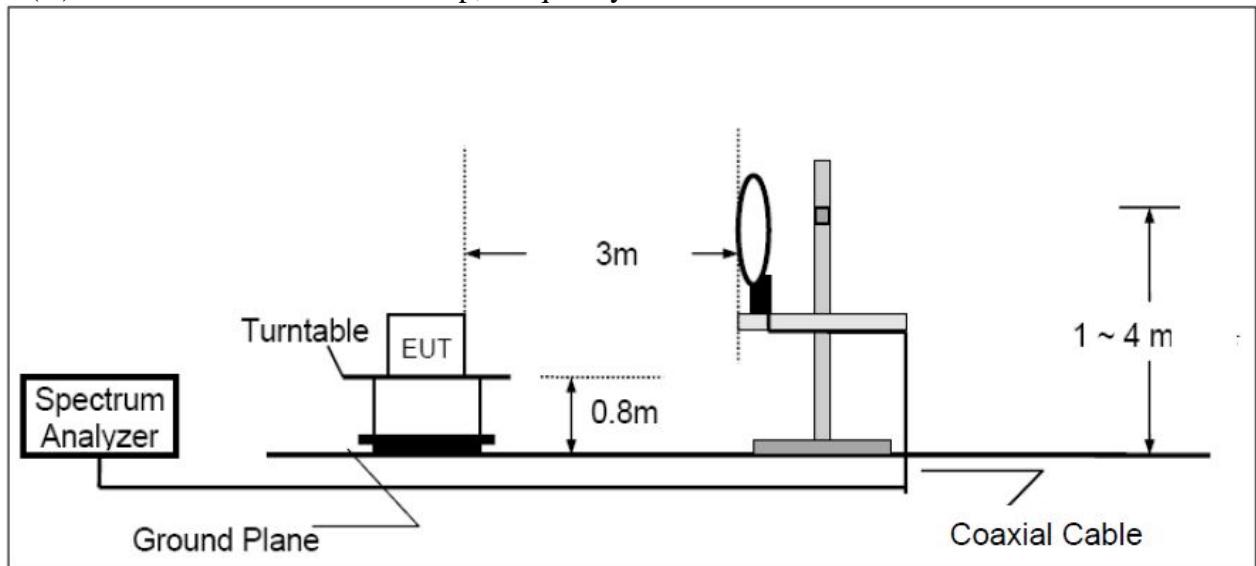

(B) Radiated Emission Test Set-Up, Frequency 30-1000MHz

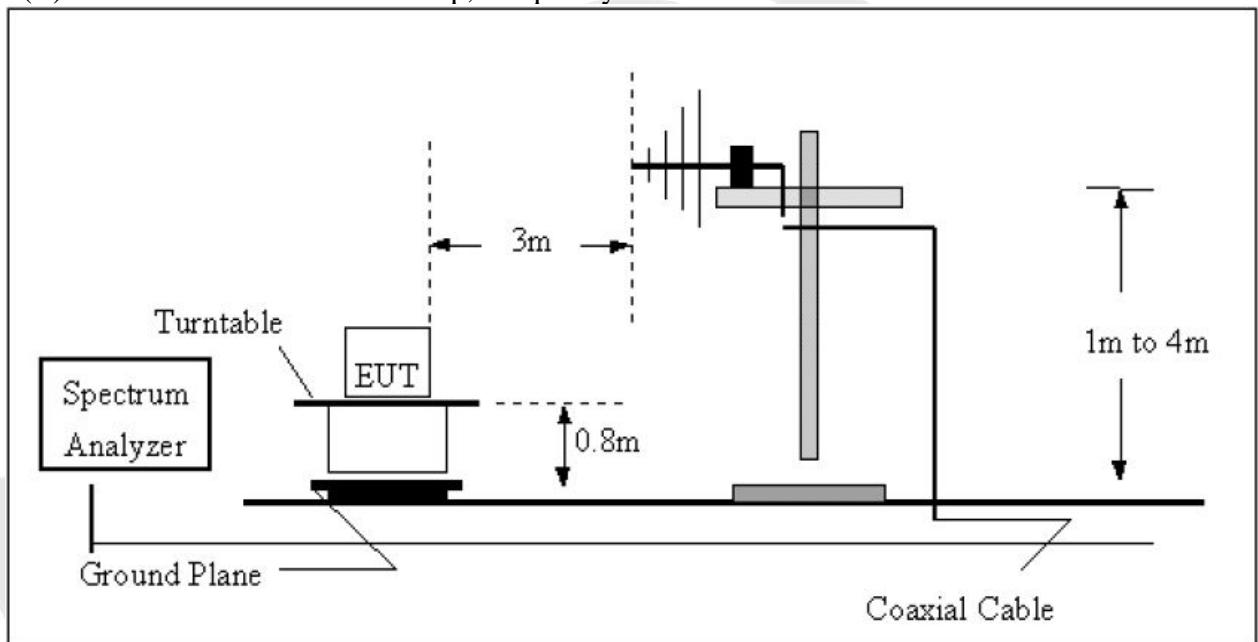

Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analysis	Agilent	E4407B	US39390582	Aug. 08, 2014	1 Year
2.	Preamplifier	Instruments corporation	EMC011830	980100	Aug. 08, 2014	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESPI	101604	Apr. 22, 2014	1 Year
4.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Apr. 04, 2014	1 Year
5.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Apr. 24, 2014	1 Year
6.	Pre-amplifier	SONOMA	310N	186860	Aug. 08, 2014	1 Year
7.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A

4.4. Test Results (Field Strength within the band of operation)

Freq.(MHz)	Ant. Orientation	Result at 3m (dBuV/m)	Limitation Converted 3m dist. (dBuV/m)	Margin dB
13.110	Front	57.41	80.50	-23.09
13.410	Front	62.33	80.50	-18.17
13.553	Front	75.87	90.50	-14.63
13.560	Front	90.36	124.00	-33.64
13.567	Front	69.97	90.50	-20.53
13.710	Front	63.23	80.50	-17.27
14.010	Front	56.12	80.50	-24.38
--	--	--	--	--
13.110	Side	59.52	80.50	-20.98
13.410	Side	67.23	80.50	-13.27
13.553	Side	72.69	90.50	-17.81
13.560	Side	92.14	124.00	-31.86
13.567	Side	66.3	90.50	-24.2
13.710	Side	59.22	80.50	-21.28
14.010	Side	63.69	80.50	-16.81
--	--	--	--	--

Remark:


- (1) Spectrum Setting:
150 K Hz – 30 MHz, RBW= 9 KHz, VBW=9 KHz, Sweep time = 200 ms.
- (2) The Log-Bicon Antenna will use to test frequency range from 30MHz to 1000MHz and the Loop Antenna will use to test frequency below 30MHz.
- (3) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.

4.5. Test Results (Field strength outside of the band of operation)

PASS.


Please refer the following pages.

Job No.:	011501694E	Polarization:	Horizontal
Standard:	(RE)FCC PART 15C _3m	Power Source:	DC 5V Via USB Port
Test item:	Radiation Test (30~1000MHz)	Temp.(C)/Hum.(%RH):	24.3(C)/55%RH
Test Mode:	On	Distance:	3m

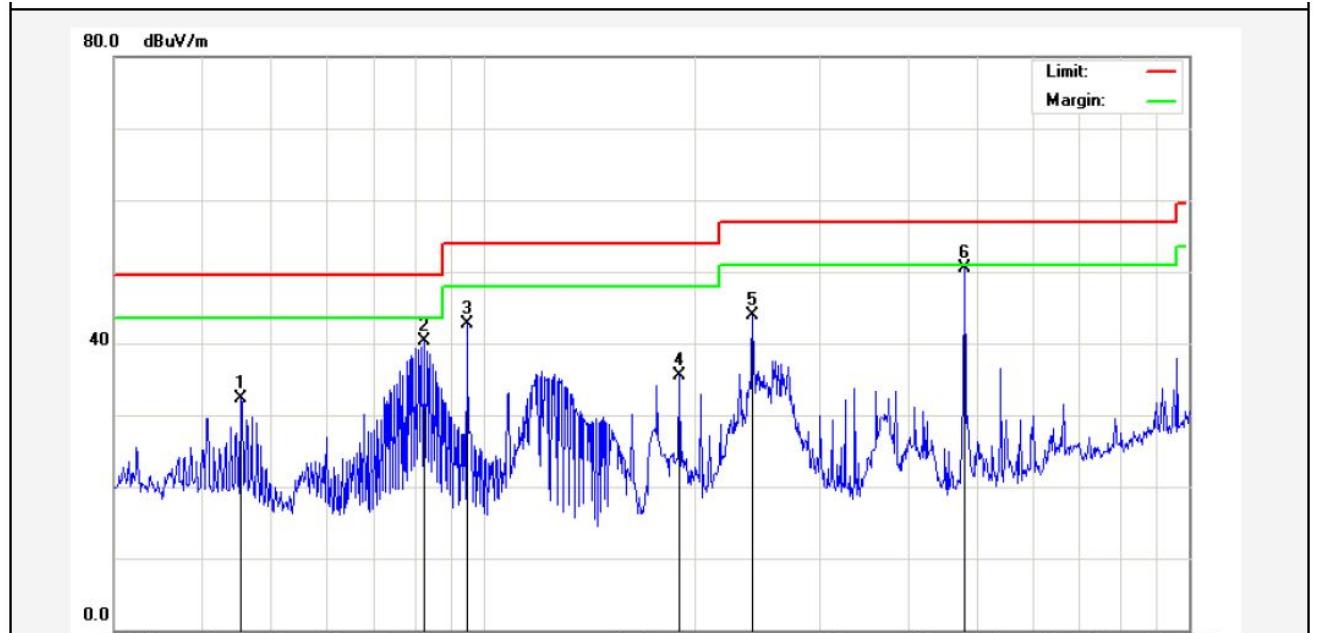

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	45.3755	44.87	-12.50	32.37	49.50	-17.13	peak			
2	82.3588	61.53	-21.20	40.33	49.50	-9.17	peak			
3	94.7601	63.77	-21.10	42.67	54.00	-11.33	peak			
4	189.7385	56.42	-20.95	35.47	54.00	-18.53	peak			
5	240.8304	62.03	-18.13	43.90	56.90	-13.00	peak			
6	480.5276	61.96	-11.53	50.43	56.90	-6.47	peak			

Job No.:	011501694E	Polarization:	Vertical
Standard:	(RE)FCC PART 15C _3m	Power Source:	DC 5V Via USB Port
Test item:	Radiation Test (30~1000MHz)	Temp.(C)/Hum.(%RH):	24.3(C)/55%RH
Test Mode:	On	Distance:	3m

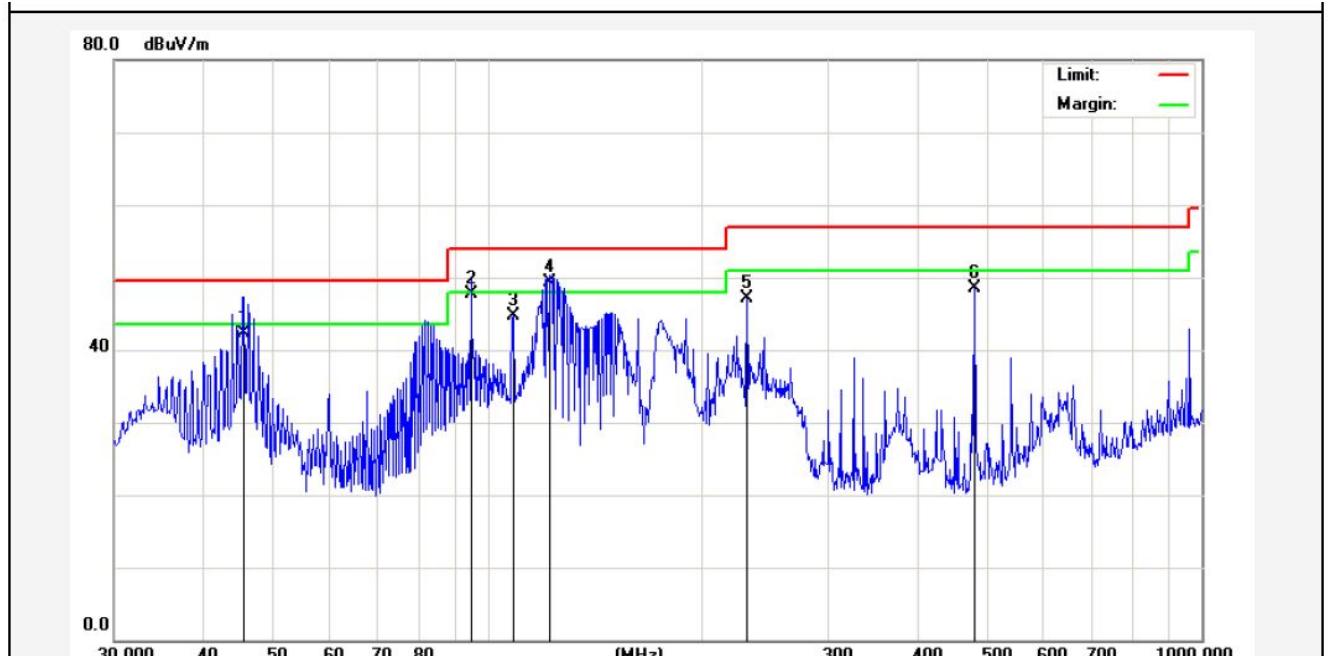

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	45.5348	54.89	-12.56	42.33	49.50	-7.17	QP	100	0	
2	94.7601	63.74	-16.10	47.64	54.00	-6.36	QP	100	360	
3	108.6470	60.28	-15.64	44.64	54.00	-9.36	peak			
4	121.9755	65.92	-16.62	49.30	54.00	-4.70	QP	100	0	
5	230.9068	61.68	-14.55	47.13	56.90	-9.77	peak			
6	480.5276	60.01	-11.53	48.48	56.90	-8.42	peak			

5. Frequency Tolerance

5.1. Frequency Tolerance Limits

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency.

Fundamental Frequency (MHz)	Limit of Tolerance Bandwidth (Hz)
13.56	$13.56 \times 1000 \times 1000 \times 0.01\% = 1356$

5.2. Test Setups



Test Equipment


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analysis	Agilent	E4407B	US39390582	Aug. 08, 2014	1 Year
2.	Preamplifier	Instruments corporation	EMC011830	980100	Aug. 08, 2014	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESPI	101604	Apr. 22, 2014	1 Year
4.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Apr. 04, 2014	1 Year
5.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB9163-289	Apr. 24, 2014	1 Year
6.	Pre-amplifier	SONOMA	310N	186860	Aug. 08, 2014	1 Year
7.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
8.	Temp. / Humidity Chamber	Kingson	THS-M1	335960	Apr. 22, 2014	1 Year
9.	Programmable AC Power source	SOPH POWER	PAG-1050	630250	Apr. 23, 2014	1 Year

5.3. Test Procedure

Let the EUT works on temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

5.4. Test Results

Test Condition		Temperature (°C)	Test Result (Hz)	Limit (Hz)
	Voltage (V)			
Normal Condition	DC 120V	-20	758	1356
		+20	760	1356
		+50	755	1356
Extreme Condition	DC 132V	+20	763	1356
	DC 108V	+20	749	1356

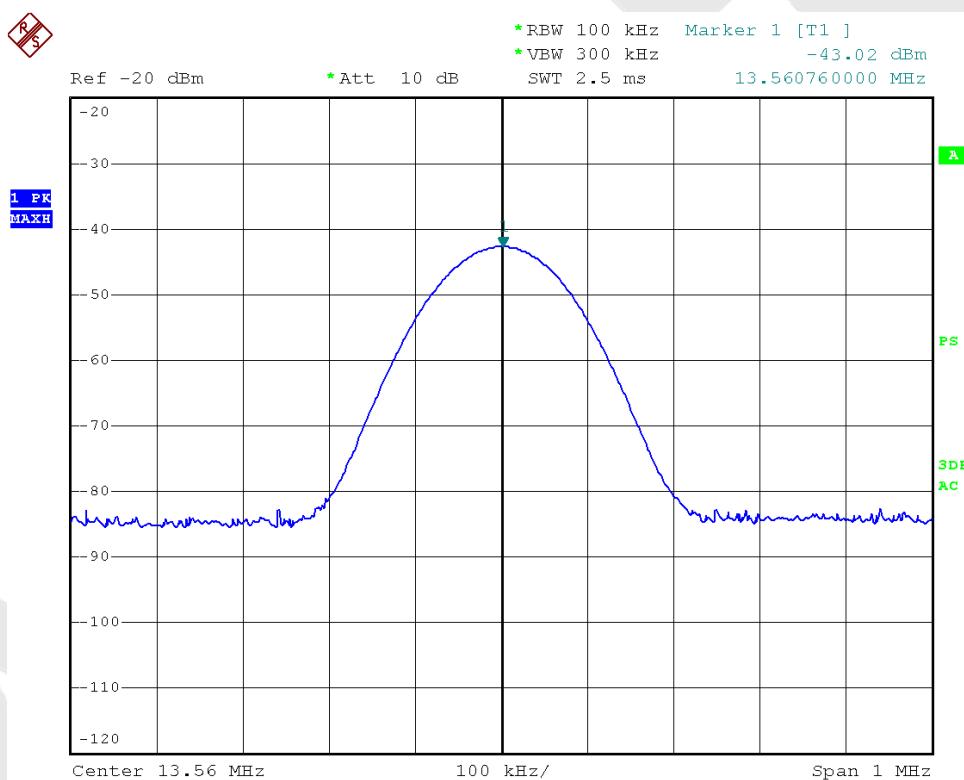


6. 20dB Bandwidth

6.1. Limits

According to 15.215 (c):

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

6.2. Test Setups



Test Equipment


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analysis	Agilent	E4407B	US39390582	Aug. 08, 2014	1 Year
2.	Preamplifier	Instruments corporation	EMC011830	980100	Aug. 08, 2014	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESPI	101604	Apr. 22, 2014	1 Year
4.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Apr. 04, 2014	1 Year
5.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB9163-289	Apr. 24, 2014	1 Year
6.	Pre-amplifier	SONOMA	310N	186860	Aug. 08, 2014	1 Year
7.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A

6.3. Test Procedure

The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

6.4. Test Results

Frequency (MHz)	20dB BW (kHz)
13.56	75.0

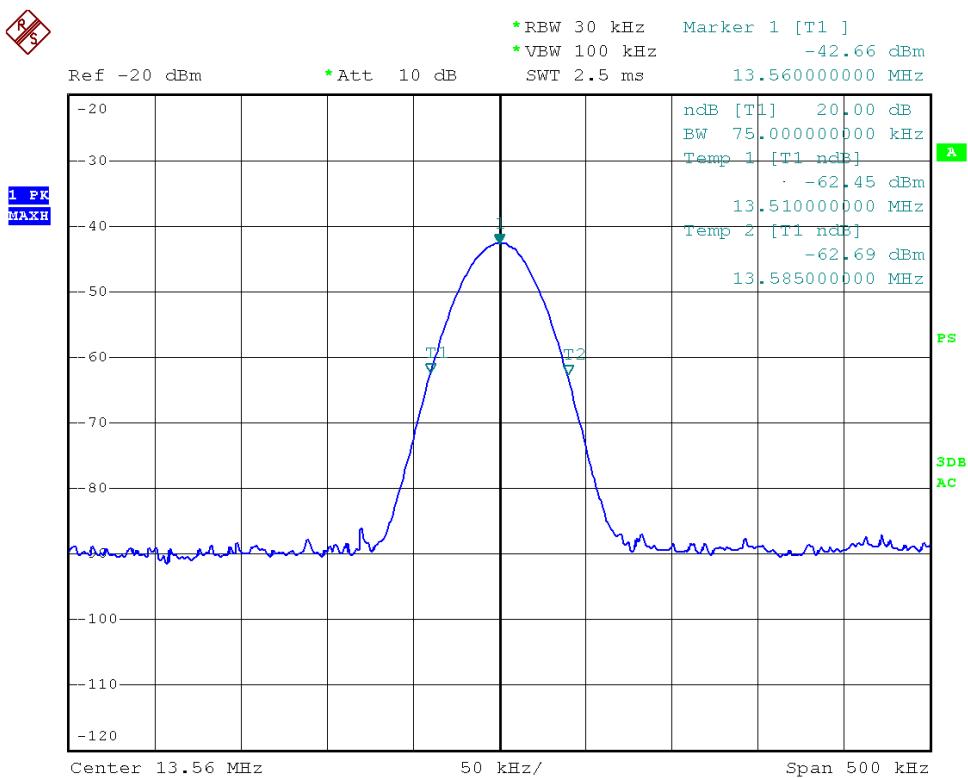

7. Antenna Application

7.1. Antenna Requirement

The EUT'S antenna should met the requirement of FCC part 15C section 15.203.


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna requirement must meet at least one of the following:

- 1) Antenna must be permanently attached to device.
- 2) The antenna must use a unique type of connector to attach to the device.
- 3) Device must be professionally installed. The installer shall be responsible for ensuring that the correct antenna is employed by the device.

7.2. Result

The RFID antenna is integral to the PCB board permanently to the device which meets the requirement, see the below:

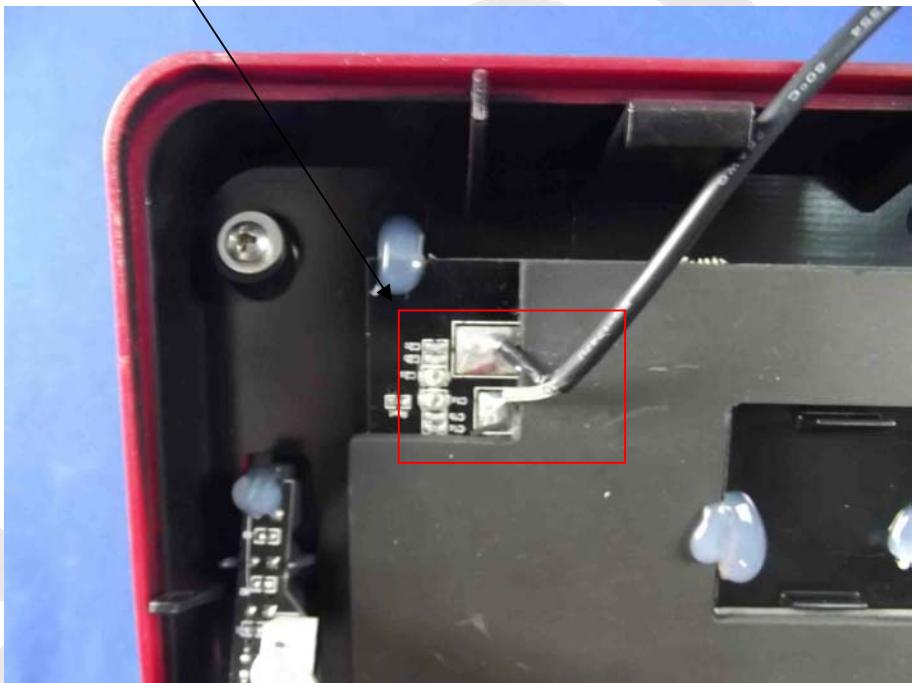


8. PHOTOGRAPH

8.1 Photo of Conducted Emission Test



8.2 Photo of Radiation Emission Test

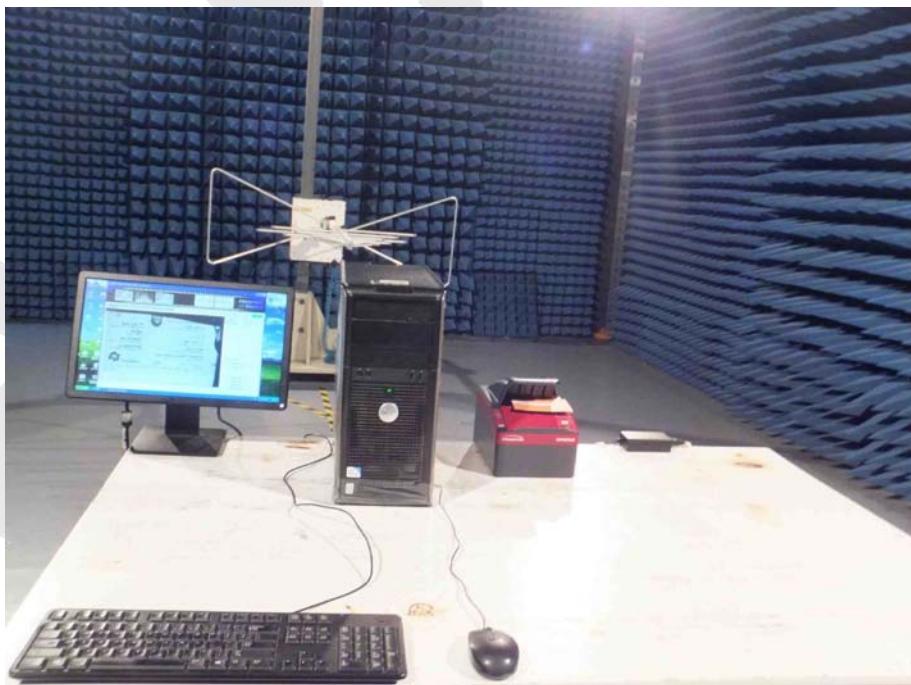

APPENDIX I (EXTERNAL PHOTOS)

Figure 1
The EUT-Overall View



Figure 2
The EUT-Top View



Figure 3
The EUT-Bottom View

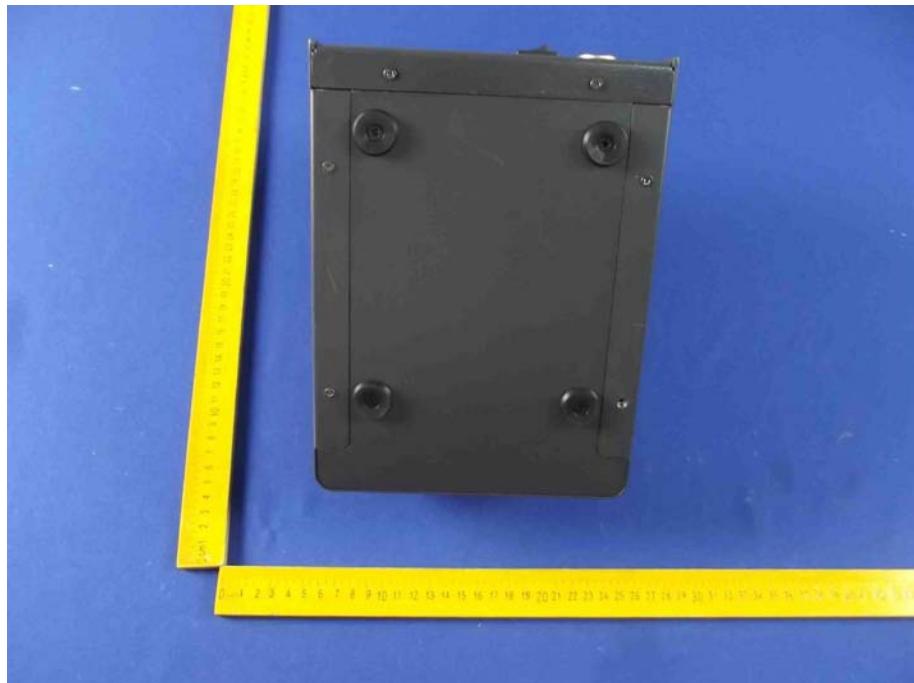


Figure 4
The EUT-Front View



Figure 5
The EUT-Back View



Figure 6
The EUT-Right View



Figure 7
The EUT-Left View



APPENDIX II (INTERNAL PHOTOS)

Figure 8
The EUT-Inside View



Figure 9
PCB of The EUT-Front View

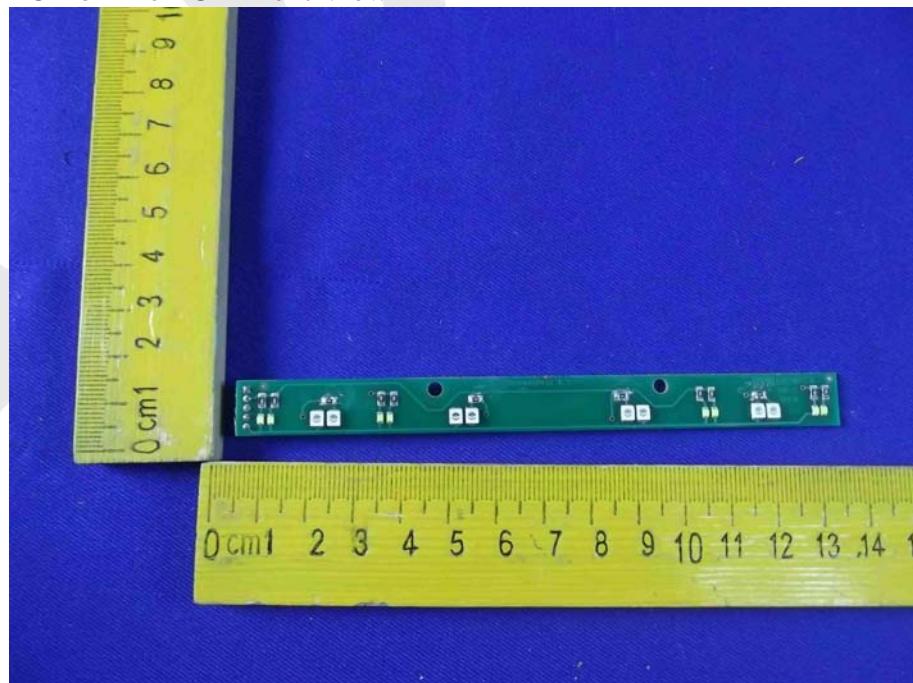


Figure 10
PCB of The EUT-Back View



Figure 11
PCB of The EUT-Front View

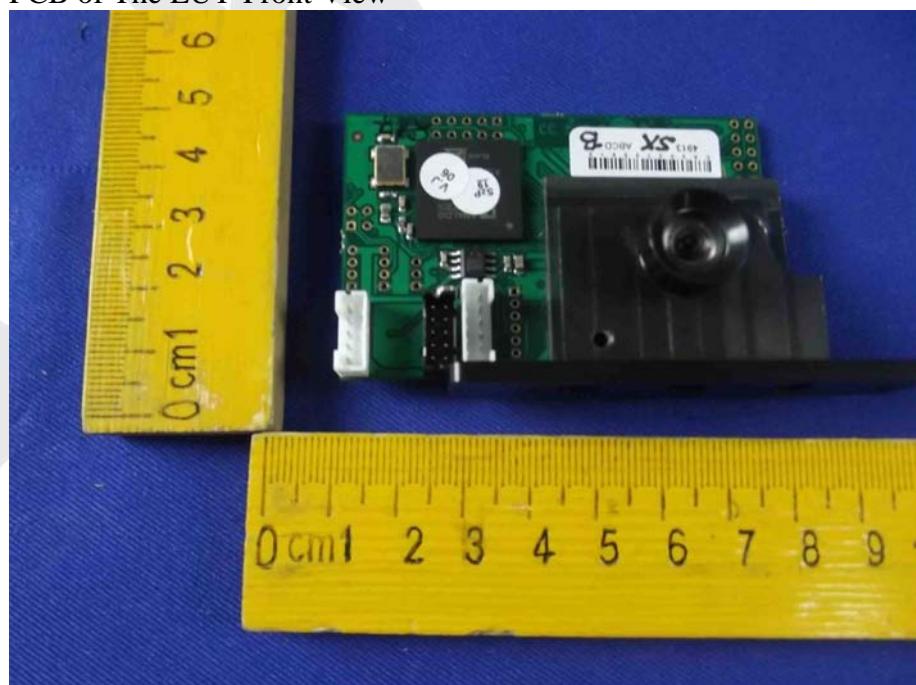


Figure 12
PCB of The EUT-Back View

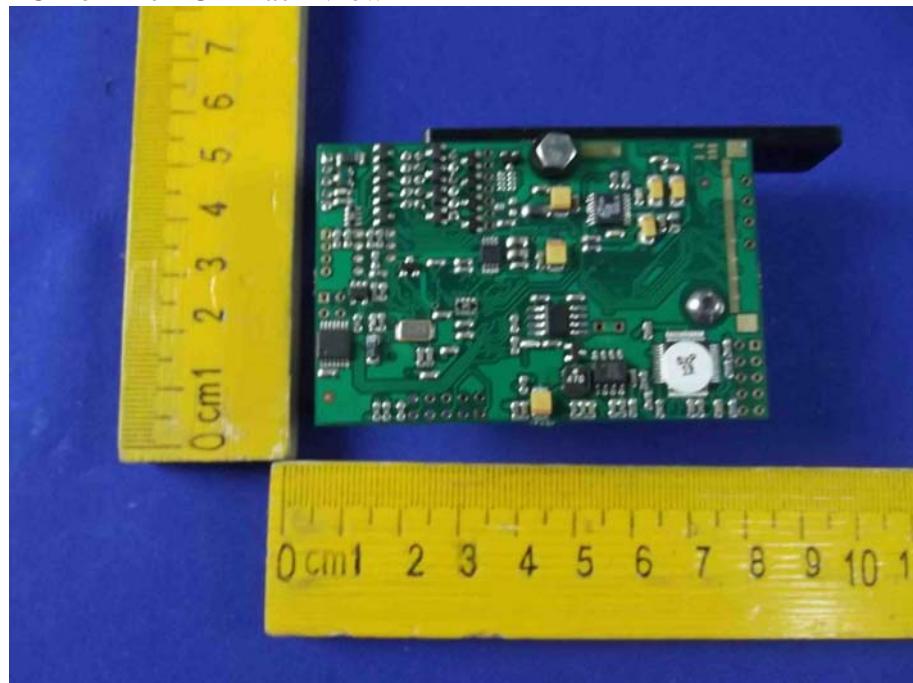


Figure 13
PCB of The EUT-Front View

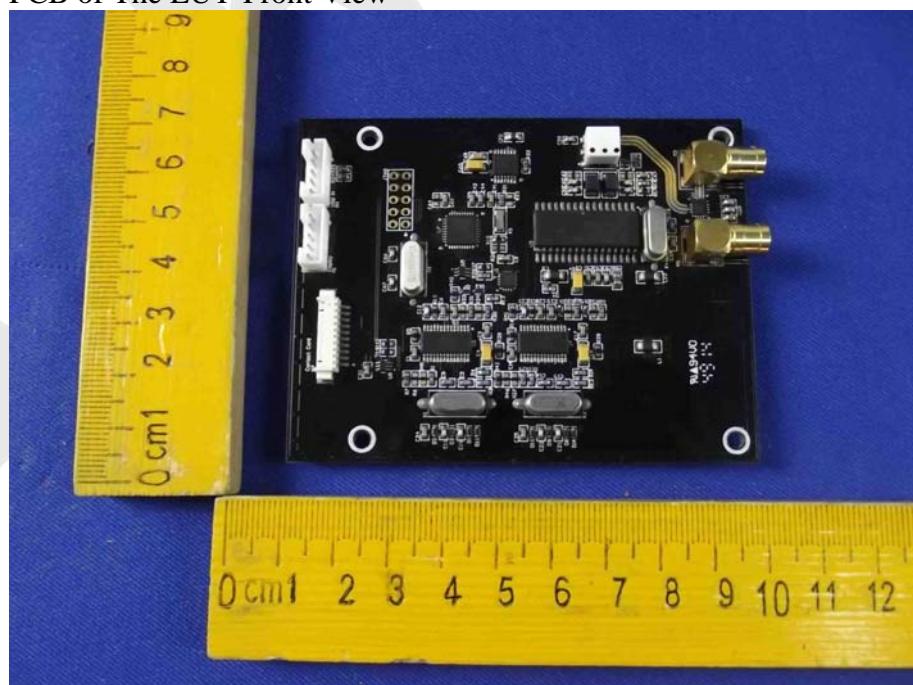


Figure 14
PCB of The EUT-Back View

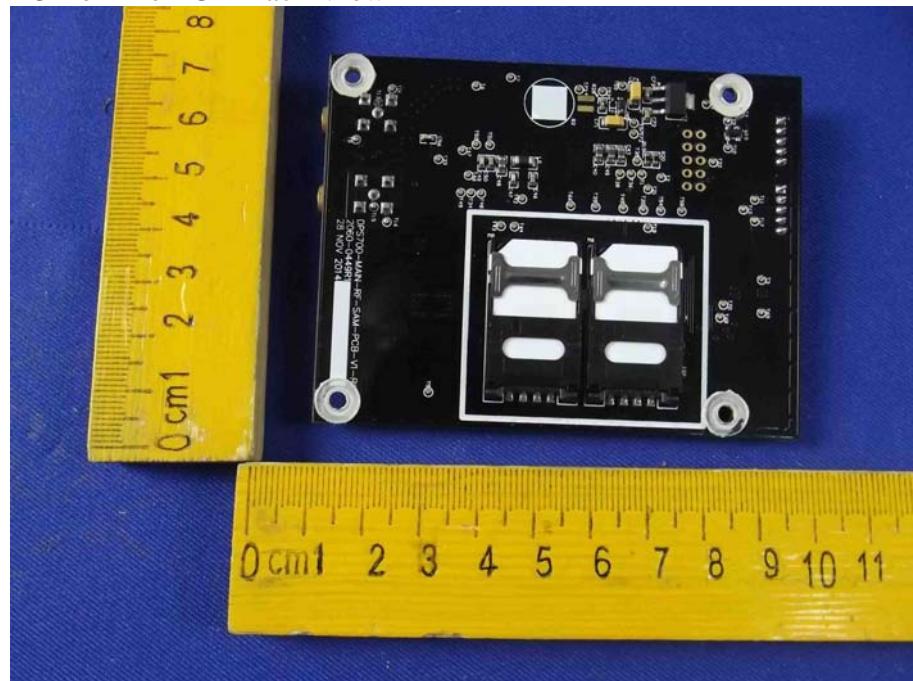


Figure 15
PCB of The EUT-Front View

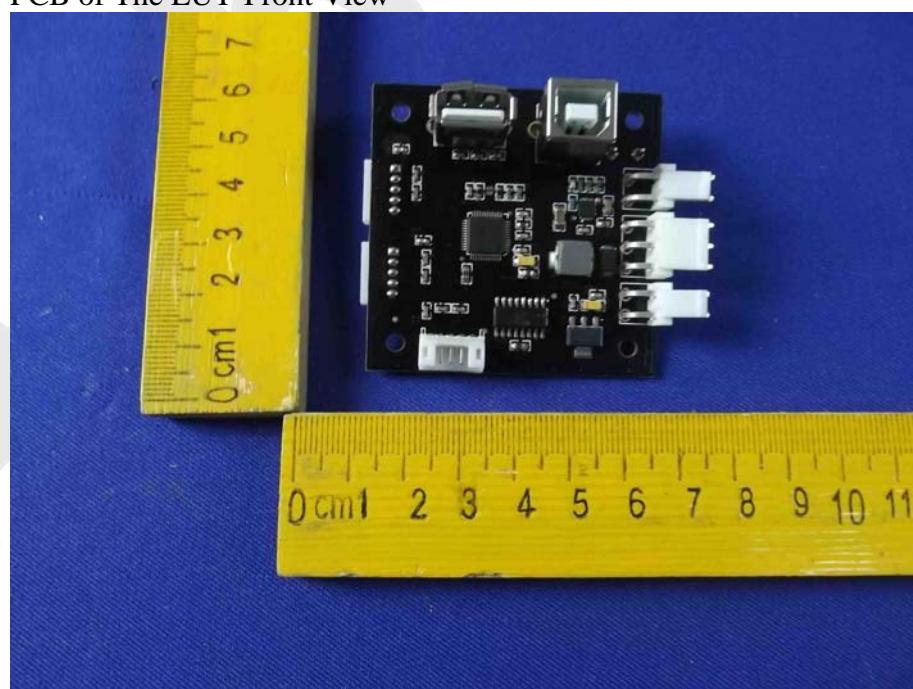


Figure 16
PCB of The EUT-Back View

