

FCC RADIO TEST REPORT-BLE FCC ID:2AECY-S-52

Product: Bluetooth Speaker

Trade Name: N/A

Model Name: S-52

Serial Model: N/A

Report No.: NTEK-2015NT02071223F2

Prepared for

SHENZHEN SOAIY TECHNOLOGY CO.,LTD.

4F, Bldg. D, Fuxinlin Industrial Park, Hangcheng Industrial Zone, Xixiang Street, Bao'an District, Shenzhen, China

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street Bao'an District, Shenzhen P.R. China

Tel.: +86-0755-61156588 Fax.: +86-0755-61156599 Website:www.ntek.org.cn




TEST RESULT CERTIFICATION

Manufacture's Name	4F, Bldg. D, Fu: Street, Bao'an I SHENZHEN SO 4F, Bldg. D, Fu:	xinlin Industrial I District, Shenzho DAIY TECHNOL xinlin Industrial I	Park, Hangcheng Industr en, China .OGY CO.,LTD. Park, Hangcheng Industr	
Draduot description	Street, Bao'an I	District, Shenzh	en, China	
Product description	Divistanth Cons	lean.		
Product name	•	ker		
Model and/or type reference	S-52			
Serial Model	N/A			
Standards	FCC Part15.24	7: 01 Oct. 2014		
Test procedure	ANSI C63.4-20	09 and KDB 55	8074: June 5, 2014	
	UT) is in compli	ance with the Fo	and the test results show CC requirements. And it is	
This report shall not be r	eproduced exce	ept in full, withou	it the written approval of	NTEK, this
document may be altere	d or revised by	NTEK, personal	only, and shall be noted	in the revision of
the document.				
Date of Test				
Date (s) of performance	of tests	07 Feb. 2015	~ 11 Mar. 2015	
Date of Issue		11 Mar. 2015		
Test Result		Pass		
Testing	g Engineer	•	cileen Wu.	-
			(Eileen Liu)	
Techni	cal Manager	:	(Brown Lu)	
Author	ized Signatory		Bun (Bill Yao)	-



Table of Contents

	Page
1. SUMMARY OF TEST RESULTS	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
2. GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	9
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTER	_
	11
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE) 2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
3 . EMC EMISSION TEST	13
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS 3.1.2 TEST PROCEDURE	13 14
3.1.3 DEVIATION FROM TEST STANDARD	14
3.1.4 TEST SETUP	14
3.1.5 EUT OPERATING CONDITIONS	14
3.1.6 TEST RESULTS	15
3.2 RADIATED EMISSION MEASUREMENT 3.2.1 RADIATED EMISSION LIMITS	17 17
3.2.2 TEST PROCEDURE	18
3.2.3 DEVIATION FROM TEST STANDARD	18
3.2.4 TEST SETUP	19
3.2.5 EUT OPERATING CONDITIONS 3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	20 21
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	22
3.2.8 TEST RESULTS (ABOVE 1000 MHZ)	24
4 . POWER SPECTRAL DENSITY TEST	25
4.1 APPLIED PROCEDURES / LIMIT	25
4.1.1 TEST PROCEDURE	25
4.1.2 DEVIATION FROM STANDARD 4.1.3 TEST SETUP	25 25
4.1.4 EUT OPERATION CONDITIONS	25 25
4.1.5 TEST RESULTS	26
5 . BANDWIDTH TEST	28
5.1 APPLIED PROCEDURES / LIMIT	28
5.1.1 TEST PROCEDURE	28





Ta	h	ما	Ωf	Co	nt	۵n	te

rable of contents	Page
TEST SETUP 5.1.2 EUT OPERATION CONDITIONS 5.1.3 TEST RESULTS	28 28 29
6 . PEAK OUTPUT POWER TEST	31
6.1 APPLIED PROCEDURES / LIMIT	31
6.1.1 TEST PROCEDURE 6.1.2 DEVIATION FROM STANDARD 6.1.3 TEST SETUP 6.1.4 EUT OPERATION CONDITIONS 6.1.5 TEST RESULTS	31 31 31 31 32
7 . 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE 7.1 DEVIATION FROM STANDARD 7.2 TEST SETUP 7.3 EUT OPERATION CONDITIONS 7.4 TEST RESULTS	33 33 33 33 34
8 . ANTENNA REQUIREMENT	36
8.1 STANDARD REQUIREMENT	36
8.2 EUT ANTENNA	36
9 . EUT TEST PHOTO APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	37

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C				
Standard Section	Test Item	Judgment	Remark	
15.207	Conducted Emission	PASS		
15.247 (a)(2)	6dB Bandwidth	PASS		
15.247 (b)	Peak Output Power	PASS		
15.247 (c)	Radiated Spurious Emission	PASS		
15.247 (d)	Power Spectral Density	PASS		
15.205	Band Edge Emission	PASS		
15.203	Antenna Requirement	PASS		

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report



1.1 TEST FACILITY

NTEK Testing Technology Co., Ltd

Add.:1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.

Report No.: NTEK-2015NT02071223F2

FCC Registration No.:238937; IC Registration No.:9270A-1

CNAS Registration No.:L5516

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $\mathbf{y} \pm \mathbf{U}$, where expended uncertainty \mathbf{U} is based on a standard uncertainty multiplied by a coverage factor of $\mathbf{k=2}$, providing a level of confidence of approximately 95 % $^{\circ}$

No.	Item	Uncertainty
1	Conducted Emission Test	±1.38dB
2	RF power,conducted	±0.16dB
3	Spurious emissions,conducted	±0.21dB
4	All emissions,radiated(<1G)	±4.68dB
5	All emissions,radiated(>1G)	±4.89dB
6	Temperature	±0.5°C
7	Humidity	±2%



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Bluetooth Speaker		
Trade Name	N/A		
Model Name	S-52		
Serial Model	N/A		
Model Difference	N/A		
	The EUT is a Bluetoo BLE Operation		eaker 2~2480MHz
	Frequency:	2402	2400IVII IZ
	Modulation Type:	GFS	
	Number Of Channel	40Cl	
	Antenna	Plea	se see Note 3.
	Designation:	0.5.0	ID:
Draduat Daggintian	Antenna Gain (dBi)	0.5 d	IDI
Product Description	ВТ		
	Operation Frequency	' :	2402~2480 MHz
	Modulation Type:		BT(1Mbps): GFSK
			BT EDR(2Mbps): π /4-DQPSK
			BT EDR(3Mbps): 8-DPSK
	Bit Rate of Transmitte	er	1Mbps/2Mbps/3Mbps
	Number Of Channel		79 CH
Channel List	Please refer to the No	ote 2.	
Ratings	DC 3.7V		
Adapter	N/A		
Battery	DC 3.7V		
Connecting I/O Port(s)	Please refer to the User's Manual		

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2.

Channel	Frequency (MHz)
00	240Ź
01	2404
•••••	
•••••	·····.
38	2478
39	2480

Page 8 of 38

3

Table for Filed Antenna

Ant	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
Α	N/A	N/A	PCB Antenna	N/A	0.5	BT Antenna



2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	CH00
Mode 2	CH19
Mode 3	CH39
Mode 4	Link Mode

For Conducted Emission		
Final Test Mode	Description	
Mode 4	Link Mode	

For Radiated Emission		
Final Test Mode	Description	
Mode 1	CH00	
Mode 2	CH19	
Mode 3	CH39	
Mode 4	Link Mode	

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported



2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted Emission Test



Radiated Spurious Emission Test

E-1 EUT



2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
E-1	Bluetooth Speaker	N/A	S-52	N/A	EUT
E-2	Adapter	N/A	AD1	N/A	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	1.2m	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in <code>[Length]</code> column.



2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibratio n period
1	Spectrum Analyzer	Agilent	E4407B	MY4510804 0	2014.07.06	2015.07.05	1 year
2	Test Receiver	R&S	ESPI	101318	2014.06.07	2015.06.06	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2014.07.06	2015.07.05	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	620026441 6	2014.06.07	2015.06.06	1 year
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	2014.06.07	2015.06.06	1 year
6	Horn Antenna	EM	EM-AH-101 80	2011071402	2014.07.06	2015.07.05	1 year
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2014.07.06	2015.07.05	1 year
8	Amplifier	EM	EM-30180	060538	2014.12.22	2015.12.21	1 year
9	Loop Antenna	ARA	PLA-1030/B	1029	2014.06.08	2015.06.07	1 year
10	Power Meter	R&S	NRVS	100696	2014.07.06	2015.07.05	1 year
11	Power Sensor	R&S	URV5-Z4	0395.1619. 05	2014.07.06	2015.07.05	1 year

Conduction Test equipment

	Conduction rest equipment							
Item	Kind of Equipment	Manufactu rer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period	
1	Test Receiver	R&S	ESCI	101160	2014.06.06	2015.06.05	1 year	
2	LISN	R&S	ENV216	101313	2014.08.24	2015.08.23	1 year	
3	LISN	EMCO	3816/2	00042990	2014.08.24	2015.08.23	1 year	
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2014.06.07	2015.06.06	1 year	
5	Passive Voltage Probe	R&S	ESH2-Z3	100196	2014.06.07	2015.06.06	1 year	
6	Absorbing clamp	R&S	MOS-21	100423	2014.06.08	2015.06.07	1 year	

1	Attenuation	MCE	24-10-34	BN9258	2014.06.08	2015.06.07	1 year
---	-------------	-----	----------	--------	------------	------------	--------



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

	Class A (dBuV)		Class B	Standard	
FREQUENCY (MHz)	Quasi-peak	Average	Quasi-peak	Average	Stariuaru
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz




3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

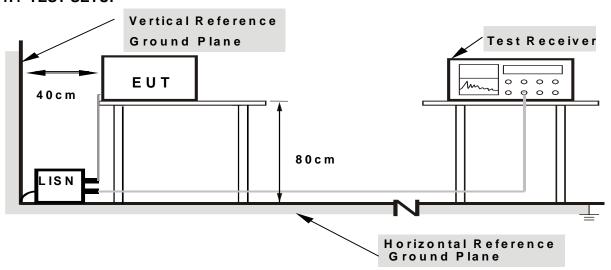

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.




3.1.6 TEST RESULTS

EUT:	Bluetooth Speaker	Model Name. :	S-52
Temperature :	26 ℃	Relative Humidity:	56%
Pressure:	1010hPa	Phase :	L
TASE VOIDAGE .	DC 5.0V form Adapter AC 120V/60Hz	Test Mode:	Mode 4

Page 15 of 38

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBµV)	(dB)	(dBµV)	(dBµV)	(dB)	
0.3220	30.93	9.66	40.59	59.65	-19.06	QP
0.3220	18.58	9.66	28.24	49.65	-21.41	AVG
0.4339	31.38	9.50	40.88	57.18	-16.30	QP
0.4339	18.27	9.50	27.77	47.18	-19.41	AVG
0.6301	30.97	9.77	40.74	56.00	-15.26	QP
0.6301	21.55	9.77	31.32	46.00	-14.68	AVG
1.8817	33.98	9.66	43.64	56.00	-12.36	QP
1.8817	25.05	9.66	34.71	46.00	-11.29	AVG
3.1379	32.17	9.67	41.84	56.00	-14.16	QP
3.1379	23.13	9.67	32.80	46.00	-13.20	AVG
20.1460	26.83	9.97	36.80	60.00	-23.20	QP
20.1460	16.79	9.97	26.76	50.00	-23.24	AVG

Remark:

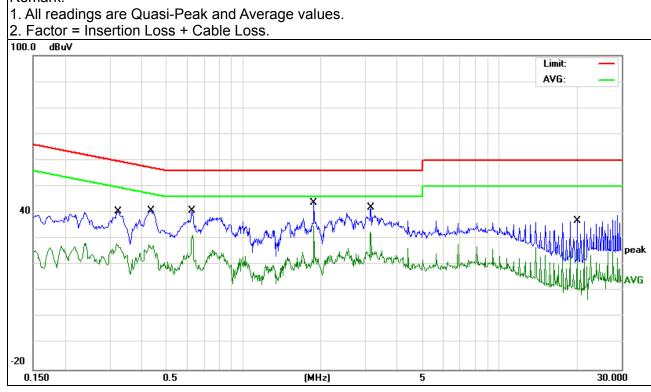




EUT:	Bluetooth Speaker	Model Name. :	S-52
Temperature :	26 ℃	Relative Humidity:	56%
Pressure :	1010hPa	Phase :	N
Test vollage .	DC 5.0V form Adapter AC 120V/60Hz	Test Mode :	Mode 4

Page 16 of 38

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBµV)	(dB)	(dBµV)	(dBµV)	(dB)	
0.1700	31.99	9.61	41.60	64.96	-23.36	QP
0.1700	20.64	9.61	30.25	54.96	-24.71	AVG
0.4349	31.32	9.66	40.98	57.16	-16.18	QP
0.4349	22.41	9.66	32.07	47.16	-15.09	AVG
0.7500	29.54	9.63	39.17	56.00	-16.83	QP
0.7500	20.06	9.63	29.69	46.00	-16.31	AVG
1.4979	28.90	9.58	38.48	56.00	-17.52	QP
1.4979	19.42	9.58	29.00	46.00	-17.00	AVG
8.1257	30.17	9.56	39.73	60.00	-20.27	QP
8.1257	22.39	9.56	31.95	50.00	-18.05	AVG
25.2020	30.54	9.95	40.49	60.00	-19.51	QP
25.2020	17.69	9.95	27.64	50.00	-22.36	AVG

Remark:

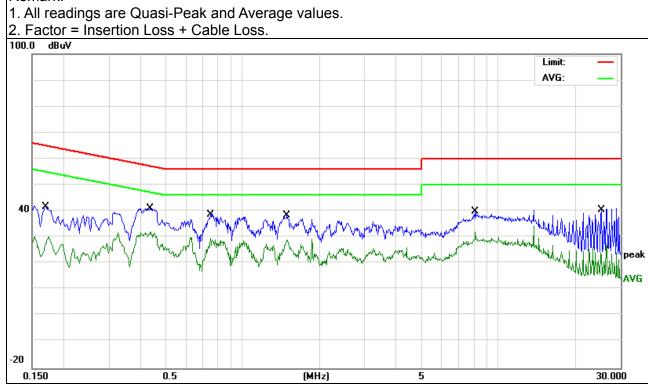



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies	Field Strength	Measurement Distance
(MHz)	(micorvolts/meter)	(meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBu	ıV/m) (at 3M)
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting	
Attenuation	Auto	
Start Frequency	1000 MHz	
Stop Frequency	10th carrier harmonic	
RB / VB (emission in restricted	1 MHz / 1 MHz for Dook, 1 MHz / 10Hz for Average	
band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average	

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP



3.2.2 TEST PROCEDURE

a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.

Report No.: NTEK-2015NT02071223F2

- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos. Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth	
30 to 1000	QP	120 kHz	300 kHz	
	Peak	1 MHz	1 MHz	
Above 1000	Peak	1 MHz	10 Hz	

3.2.3 DEVIATION FROM TEST STANDARD


No deviation






3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

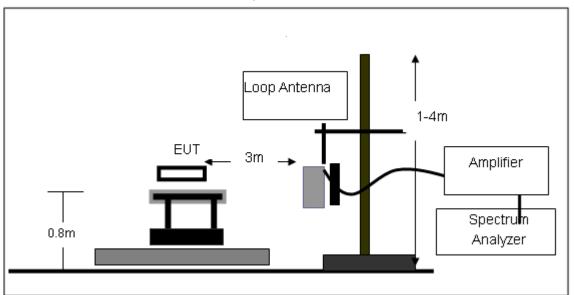


(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

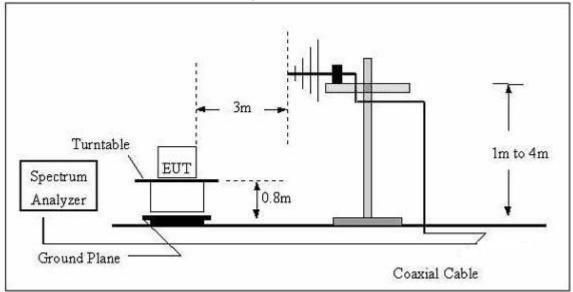





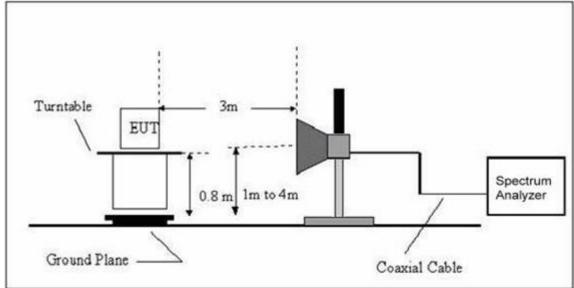

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



3.2.6 TEST RESULTS (BETWEEN 9KHZ - 30 MHZ)

EUT:	Bluetooth Speaker	Model Name. :	S-52
Temperature:	20 ℃	Relative Humidtity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V
Test Mode:	TX	Polarization :	

Report No.: NTEK-2015NT02071223F2

Freq.	Reading	Limit	Limit Margin	
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
				Pass
		1		Pass

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =40 log (specific distance/test distance)(dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.



3.2.7 TEST RESULTS (BETWEEN 30MHZ - 1GHZ)


EUT:	Bluetooth Speaker	Model Name :	S-52
Temperature :	20 ℃	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage:	DC 3.7V
Test Mode:	TX		

Page 22 of 38

Polar	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(H/V)	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	T.C.I.I.C.I.K
V	36.8952	10.51	15.50	26.01	40.00	-13.99	QP
V	66.4989	20.16	6.37	26.53	40.00	-13.47	QP
V	148.9625	14.53	10.52	25.05	43.50	-18.45	QP
V	224.5192	14.35	12.44	26.79	46.00	-19.21	QP
V	317.7010	15.62	14.89	30.51	46.00	-15.49	QP
V	580.7024	11.42	21.99	33.41	46.00	-12.59	QP

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

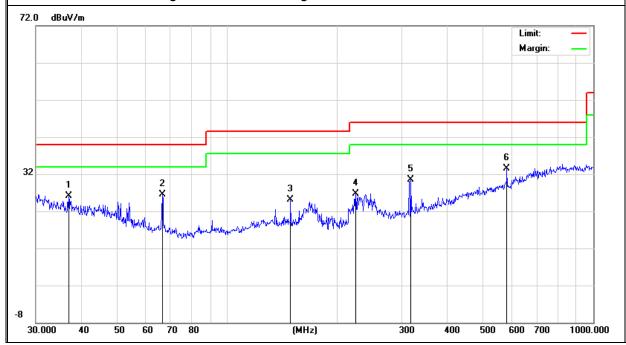



Polar	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(H/V)	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	reman
Н	30.6376	6.34	19.08	25.42	40.00	-14.58	QP
Н	124.5690	10.88	12.01	22.89	43.50	-20.61	QP
Н	185.1379	20.34	10.67	31.01	43.50	-12.49	QP
Н	230.9068	24.49	12.87	37.36	46.00	-8.64	QP
Н	327.8872	17.22	15.31	32.53	46.00	-13.47	QP
Н	531.9633	15.49	20.96	36.45	46.00	-9.55	QP

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

Page 23 of 38





3.2.8 TEST RESULTS (ABOVE 1000 MHZ)

EUT:	Bluetooth Speaker	Model Name :	S-52
Temperature :	20 ℃	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage:	DC 3.7V
Test Mode:	TX		

Frequency (MHz)	Reading (dBµV)	Factor (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Remark	Polar (H/V)
		Low Cha	nnel (2402 MHz	z)-Above 1G	i		
4804.059	58.67	-3.64	62.31	74.00	-11.69	Pk	Vertical
4804.059	41.49	-3.64	45.13	54.00	-8.87	AV	Vertical
7206.347	60.26	-0.95	61.21	74.00	-12.79	Pk	Vertical
7206.347	38.05	-0.95	39.00	54.00	-15.00	AV	Vertical
4804.129	59.97	-3.64	63.61	74.00	-10.39	Pk	Horizontal
4804.129	42.58	-3.64	46.22	54.00	-7.78	AV	Horizontal
7206.298	57.91	-0.95	58.86	74.00	-15.14	Pk	Horizontal
7206.298	38.64	-0.95	39.59	54.00	-14.41	AV	Horizontal
		Mid Cha	nnel (2440 MHz	:)-Above 1G			
4880.297	60.34	-3.68	64.02	74.00	-9.98	Pk	Vertical
4880.297	41.02	-3.68	44.70	54.00	-9.30	AV	Vertical
7320.264	60.08	-0.82	60.90	74.00	-13.10	Pk	Vertical
7320.264	41.61	-0.82	42.43	54.00	-11.57	AV	Vertical
4880.094	62.22	-3.68	65.90	74.00	-8.10	Pk	Horizontal
4880.094	43.53	-3.68	47.21	54.00	-6.79	AV	Horizontal
7320.207	59.38	-0.82	60.20	74.00	-13.80	Pk	Horizontal
7320.207	40.14	-0.82	40.96	54.00	-13.04	AV	Horizontal
		High Cha	nnel (2480MHz)- Above 1G	i		
4960.338	59.55	-3.59	63.14	74.00	-10.86	Pk	Vertical
4960.338	42.26	-3.59	45.85	54.00	-8.15	AV	Vertical
7440.154	57.77	-0.68	58.45	74.00	-15.55	Pk	Vertical
7440.154	42.26	-0.68	42.94	54.00	-11.06	AV	Vertical
4960.224	59.25	-3.59	62.84	74.00	-11.16	Pk	Horizontal
4960.224	42.41	-3.59	46.00	54.00	-8.00	AV	Horizontal
7440.305	60.78	-0.68	61.46	74.00	-12.54	Pk	Horizontal
7440.305	39.97	-0.68	40.65	54.00	-13.35	AV	Horizontal
Remark: Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit							



4. POWER SPECTRAL DENSITY TEST

4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C					
Section	Test Item	Frequency Range (MHz)	Result		
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS	


4.1.1 TEST PROCEDURE

- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. Set the span to 1.5 times the DTS channel bandwidth.
- 3. 3 kHz ≤Set the RBW≤100 kHz.
- 4. Set the VBW ≥ 3 x RBW.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level within the RBW.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP



4.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.




4.1.5 TEST RESULTS


EUT:	Bluetooth Speaker	Model Name :	S-52
Temperature:	25 ℃	Relative Humidity:	56%
Pressure :	1015 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX Mode /CH00, CH19, CH39		


Page 26 of 38

Frequency	Power Density (dBm)	Limit (dBm)	Result
2402 MHz	-25.77	8	PASS
2440 MHz	-24.81	8	PASS
2480 MHz	-23.98	8	PASS

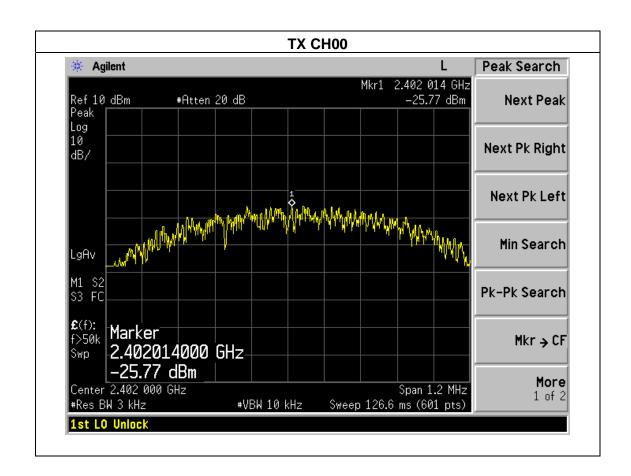



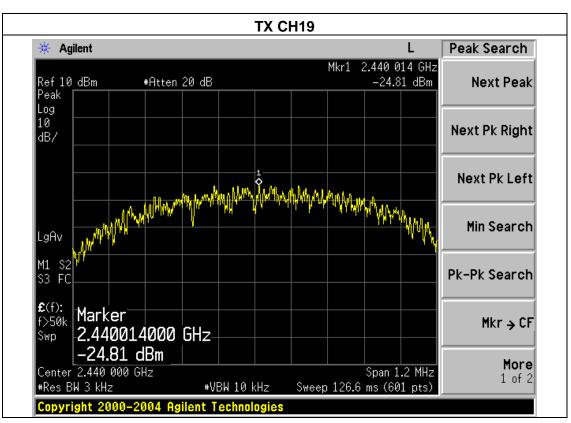

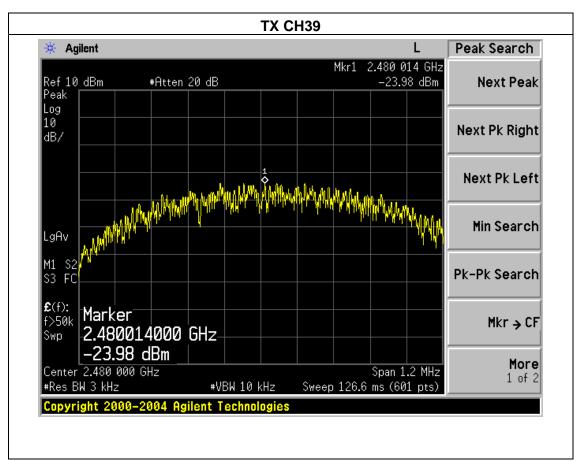



5. BANDWIDTH TEST


5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C					
Section Test Item Limit Frequency F (MHz)				Result	
15.247(a)(2)	Bandwidth	>= 500KHz (6dB bandwidth)	2400-2483.5	PASS	

5.1.1 TEST PROCEDURE

- 1. Set RBW = 100 kHz.
- 2. Set the video bandwidth (VBW) \geq 3 x RBW.
- 3. Detector = Peak.
- 4. Trace mode = max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

TEST SETUP



5.1.2 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.




5.1.3 TEST RESULTS


EUT:	Bluetooth Speaker	Model Name :	S-52
Temperature :	25 ℃	Relative Humidity:	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX Mode /CH00, CH19, CH39		


Page 29 of 38

Channel	Frequency (MHz)	6dB bandwidth (kHz)	Limit (kHz)	Result
Low	2402	697.799	500	Pass
Middle	2440	695.130	500	Pass
High	2480	696.829	500	Pass

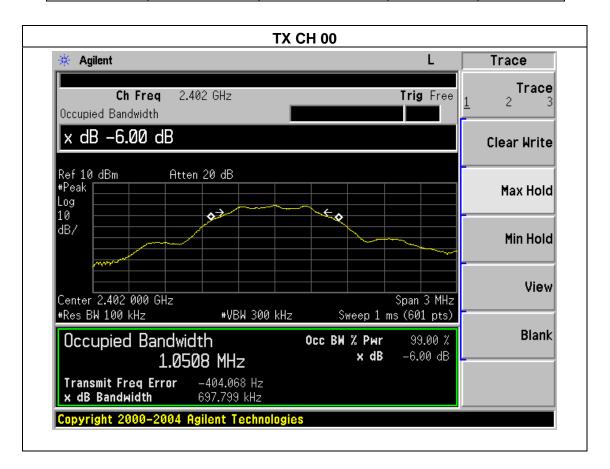



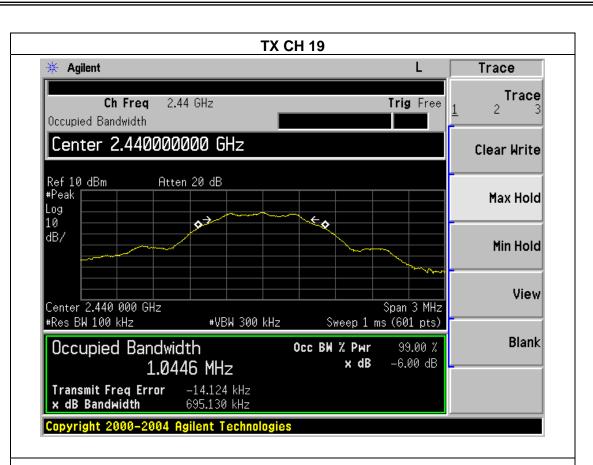

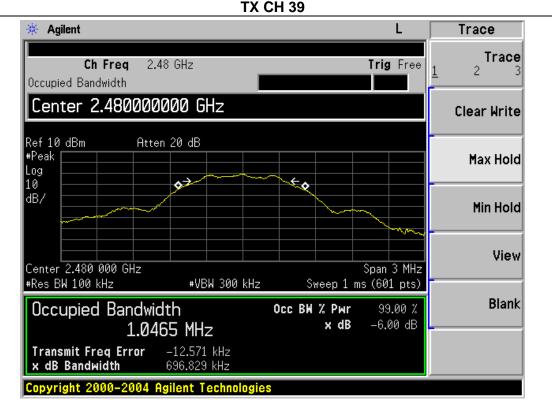



6. PEAK OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C					
Section Test Item Limit Frequency Range (MHz)				Result	
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS	

6.1.1 TEST PROCEDURE

a. The EUT was directly connected to the Power meter

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



6.1.5 TEST RESULTS

EUT:	Bluetooth Speaker	Model Name :	S-52
Temperature:	25 ℃	Relative Humidity:	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX Mode		

Page 32 of 38

Test Channe	Frequency Conducted Output Power(PK)		LIMIT	
	(MHz)	(dBm)	dBm	
CH00	2402	-8.02	30	
CH19	2440	-8.09	30	
CH39	2480	-7.26	30	



7. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE APPLICABLE STANDARD

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST PROCEDURE

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.

7.1 DEVIATION FROM STANDARD

No deviation.

7.2 TEST SETUP



7.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



7.4 TEST RESULTS

EUT:	Bluetooth Speaker	Model Name :	S-52
Temperature :	25 ℃	Relative Humidity:	56%
Pressure:	1012 hPa	Test Voltage :	DC 3.7V


Frequency Band	Pelta Peak to band emission (dBc)		Result
2400	56.77	20	Pass
2483.5	61.03	20	Pass


Radiated band edge:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре	Comment
2390	59.44	-13.06	46.38	74	-27.62	peak	Vertical
2390	57.96	-13.06	44.90	74	-29.10	peak	Horizontal
2483.5	59.15	-12.78	46.37	74	-27.63	peak	Vertical
2483.5	59.73	-12.78	46.95	74	-27.05	peak	Horizontal

Note: Test method to see chapter 3.2. When PK value is lower than the Average value limit, average not record.



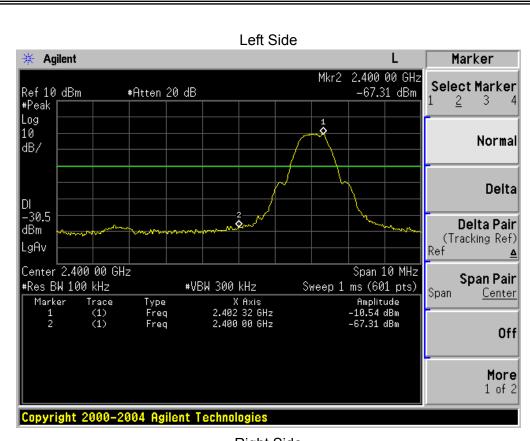

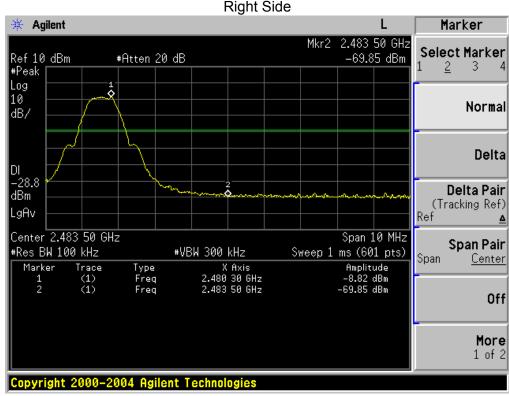



8. ANTENNA REQUIREMENT

8.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Report No.: NTEK-2015NT02071223F2

8.2 EUT ANTENNA The EUT antenna is permanent attached antenna. It comply with the standard requirement.



9. EUT TEST PHOTO



