

FCC ID: 2AECY-S-62

Product: Bluetooth HandsFree Car Kit

Trade Mark: N/A

Model No.: S-62

CSP2000,BTRAVEL,BTS-600,

Serial Model: EasyTooth S5, CK990, DYNADRIVE

MT-BT66,BCK800, CarMate-8, BTC-108

Report No.: NTEK-2016NT12200743F1

Issue Date: 26 Dec. 2016

Prepared for

SHENZHEN SOAIY TECHNOLOGY CO.,LTD

4F, Building D, Fuxinlin Industrial Park, Hangcheng Industrial Zone, Xixiang Street, Bao'an District, Shenzhen, China

Prepared by

NTEK TESTING TECHNOLOGY CO., LTD.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street Bao'an District, Shenzhen 518126 P.R. China

Tel.: +86-755-6115 6588 Fax.: +86-755-6115 6599 Website:http://www.ntek.org.cn



TABLE OF CONTENTS

1	TE	EST RESULT CERTIFICATION	3
2	SU	MMARY OF TEST RESULTS	4
3		CILITIES AND ACCREDITATIONS	
	3.1	FACILITIES	5
	3.2	LABORATORY ACCREDITATIONS AND LISTINGS	5
	3.3	MEASUREMENT UNCERTAINTY	5
4	GI	ENERAL DESCRIPTION OF EUT	6
5		ESCRIPTION OF TEST MODES	
6	SE	TUP OF EQUIPMENT UNDER TEST	9
	6.1	BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM	9
	6.2	SUPPORT EQUIPMENT	10
	6.3	EQUIPMENTS LIST FOR ALL TEST ITEMS	11
7	TE	EST REQUIREMENTS	13
	7.1	CONDUCTED EMISSIONS TEST	13
	7.2	RADIATED SPURIOUS EMISSION	
	7.3	NUMBER OF HOPPING CHANNEL	
	7.4	HOPPING CHANNEL SEPARATION MEASUREMENT	
	7.5	AVERAGE TIME OF OCCUPANCY (DWELL TIME)	
	7.6	20DB BANDWIDTH TEST	
	7.7	PEAK OUTPUT POWER	
	7.8	CONDUCTED BAND EDGE MEASUREMENT	
	7.9	ANTENNA APPLICATION	46



1 TEST RESULT CERTIFICATION

Applicant's name	SHENZHEN SOAIY TECHNOLOGY CO.,LTD
Address	4F, Building D, Fuxinlin Industrial Park, Hangcheng Industrial Zone, Xixiang Street, Bao'an District, Shenzhen, China
Manufacturer's Name:	SHENZHEN SOAIY TECHNOLOGY CO.,LTD
Address:	4F, Building D, Fuxinlin Industrial Park, Hangcheng Industrial Zone, Xixiang Street, Bao'an District, Shenzhen, China
Product description	
Product name:	Bluetooth HandsFree Car Kit
Model and/or type reference:	S-62
Serial Model	CSP2000,BTRAVEL,BTS-600,EasyTooth S5
	CK990,DYNADRIVE,MT-BT66,BCK800, CarMate-8, BTC-108

Measurement Procedure Used:

Date of Test

APPLICABLE STANDARDS		
STANDARD/ TEST PROCEDURE	TEST RESULT	
FCC 47 CFR Part 2, Subpart J:2016 FCC 47 CFR Part 15, Subpart C:2016 KDB 174176 D01 Line Conducted FAQ v01r01 ANSI C63.10-2013	Complied	

This device described above has been tested by NTEK Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK Testing Technology Co., Ltd., this document may be altered or revised by NTEK Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.

20 Dec. 2016 ~ 26 Dec. 2016

The test results of this report relate only to the tested sample identified in this report.

Testing Engineer	lehe. Xie
	(Lake Xie)
Technical Manager	Jason chen
-	(Jason Chen)
	Sam. Chen
Authorized Signatory	: <u> </u>
	(Sam Chen)



2 SUMMARY OF TEST RESULTS

FCC Part15 (15.247), Subpart C				
Standard Section	Test Item	Verdict	Remark	
15.207	Conducted Emission	N/A		
15.247(c)	Radiated Spurious Emission	PASS		
15.247(a)(1)	Hopping Channel Separation	PASS		
15.247(b)(1)	Peak Output Power	PASS		
15.247(a)(iii)	Number of Hopping Frequency	PASS		
15.247(a)(iii)	Dwell Time	PASS		
15.247(a)(1)	Bandwidth	PASS		
15.205	Band Edge Emission	PASS		
15.203	Antenna Requirement	PASS		

Remark:

- "N/A" denotes test is not applicable in this Test Report.
 All test items were verified and recorded according to the standards and without any deviation during the test.



3 FACILITIES AND ACCREDITATIONS

3.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

3.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

EMC Lab. : Accredited by CNAS, 2014.09.04

The certificate is valid until 2017.09.03

The Laboratory has been assessed and proved to be in compliance with

CNAS-CL01:2006 (identical to ISO/IEC 17025:2005) The Certificate Registration Number is L5516.

Accredited by FCC, September 6, 2013

The Certificate Registration Number is 238937.

Accredited by Industry Canada, August 29, 2012 The Certificate Registration Number is 9270A-1.

Name of Firm : NTEK Testing Technology Co., Ltd

Site Location : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang

Street, Bao'an District, Shenzhen P.R. China.

3.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	±1.38dB
2	RF power, conducted	±0.16dB
3	Spurious emissions, conducted	±0.21dB
4	All emissions, radiated(<1G)	±4.68dB
5	All emissions, radiated(>1G)	±4.89dB
6	Temperature	±0.5°C
7	Humidity	±2%



4 GENERAL DESCRIPTION OF EUT

Product Feature and Specification		
Equipment	Bluetooth HandsFree Car Kit	
Trade Mark	N/A	
FCC ID	2AECY-S-62	
Model No.	S-62	
Serial Model	CSP2000,BTRAVEL,BTS-600,EasyTooth S5 CK990,DYNADRIVE,MT-BT66,BCK800, CarMate-8, BTC-108	
Model Difference	All the model are the same circuit and RF module, except the model name.	
Operating Frequency	2402MHz~2480MHz	
Modulation	GFSK,π/4-DQPSK, 8DPSK	
Bluetooth Version	BT V4.1(EDR+BLE)	
Number of Channels	79 Channels	
Antenna Type	PCB Antenna	
Antenna Gain	1 dBi	
	☑DC supply: DC 3.7V 1300mAh	
Power supply	☐Adapter supply: Model: 5A Input: DC 12V Output:5V-500mA	
HW Version	S-62AMP(8635)V1.1	
SW Version	S62(S-62)_ENG_CSR8635_20161221_voice_PA21_List-6BD	

Note: Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.



Revision History

Report No.	Version	Description	Issued Date
NTEK-2016NT12200743F1	Rev.01	Initial issue of report	Dec 26, 2016



5 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (1Mbps for GFSK modulation; 2Mbps for $\pi/4$ -DQPSK modulation; 3Mbps for 8DPSK modulation) were used for all test.

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

Carrier Frequency and Channel list:

Channel	Frequency(MHz)
0	2402
1	2403
	10
39	2441
40	2442
77	2479
78	2480

Note: $fc=2402MHz+k\times 1MHz$ k=0 to 78

The following summary table is showing all test modes to demonstrate in compliance with the standard.

For AC Conducted Emission		
Final Test Mode	Description	
Mode 1	normal link mode	

Note: AC power line Conducted Emission was tested under maximum output power.

For Radiated Test Cases		
Final Test Mode	Description	
Mode 1	normal link mode	
Mode 2	CH00(2402MHz)	
Mode 3	CH39(2441MHz)	
Mode 4	CH78(2480MHz)	

Note: For radiated test cases, the worst mode data rate 1Mbps was reported only, because this data rate has the highest RF output power at preliminary tests, and no other significantly frequencies found in conducted spurious emission.

For Conducted Test Cases		
Final Test Mode	Description	
Mode 2	CH00(2402MHz)	
Mode 3	CH39(2441MHz)	
Mode 4	CH78(2480MHz)	
Mode 5	Hopping mode	


Note: The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.


1. EUT built-in battery-powered, fully-charged battery use of the test battery



6 SETUP OF EQUIPMENT UNDER TEST

6.1 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

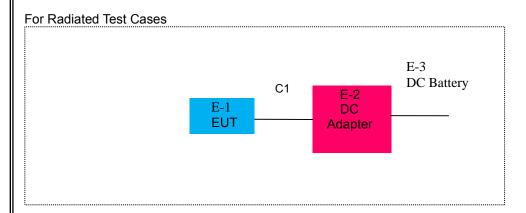

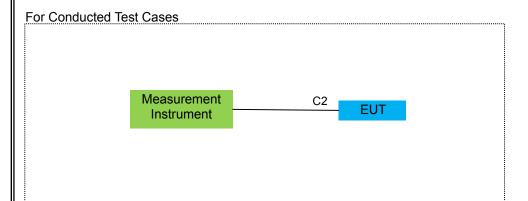

Note:The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.



6.2 SUPPORT EQUIPMENT

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Note
E-1	Bluetooth HandsFree Car Kit	N/A	S-62	2AECY-S-62	EUT
E-2	DC Adapter	N/A	5A	N/A	Peripherals
E-3	DC Battery	N/A	100AH	N/A	Peripherals

Item	Cable Type	Shielded Type	Ferrite Core	Length
C-1	DC Cable	NO	NO	1.2m
C-2	RF Cable	NO	NO	0.5m

Notes:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in <code>[Length]</code> column.
- (3) "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".



6.3 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Nauiai	Radiation Test equipment						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2016.07.06	2017.07.05	1 year
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2016.11.19	2017.11.18	1 year
3	Test Receiver	R&S	ESPI	101318	2016.06.07	2017.06.06	1 year
4	Bilog Antenna	TESEQ	CBL6111D	31216	2016.07.06	2017.07.05	1 year
5	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2016.06.07	2017.06.06	1 year
7	Horn Antenna	EM	EM-AH-1018 0	2011071402	2016.07.06	2017.07.05	1 year
8	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2016.07.06	2017.07.05	1 year
9	Pre-Amplifier	EMC	EMC051835 SE	980246	2016.08.09	2017.08.09	1 year
10	Loop Antenna	ARA	PLA-1030/B	1029	2016.06.08	2017.06.07	1 year
11	Test Cable (9KHz-30MHz)	N/A	R-04	N/A	2016.06.06	2017.06.05	1 year
12	Test Cable (30MHz-1GHz)	N/A	R-01	N/A	2016.07.06	2017.07.05	1 year
13	Test Cable (1-18GHz)	N/A	R-02	N/A	2016.07.06	2017.07.05	1 year
14	High Test Cable(18G-40 GHz)	N/A	R-03	N/A	2016.06.06	2017.06.05	1 year
15	temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A

Note:

We will use the temporary antenna connector (soldered on the PCB board) When conducted test And this temporary antenna connector is listed within the instrument list



Conduction Test equipment Kind of Last Calibrated Calibration Manufacturer Type No. Serial No. Item Equipment calibration until period 101160 2016.06.06 2017.06.05 1 Test Receiver R&S **ESCI** 1 year 2 R&S **ENV216** 2017.08.23 LISN 101313 2016.08.24 1 year 3 LISN **EMCO** 3816/2 00042990 2016.08.24 2017.08.23 1 year 50Ω Coaxial MP59B 4 Anritsu 6200264417 2016.06.07 2017.06.06 1 year Switch Test Cable 7 (9KHz-30MH N/A C01 N/A 2016.06.08 2017.06.07 1 year Test Cable (9KHz-30MH C02 8 N/A N/A 2016.06.08 2017.06.07 1 year z) Test Cable 9 (9KHz-30MH N/A C03 N/A 2016.06.08 2017.06.07 1 year z)

Note: Each piece of equipment is scheduled for calibration once a year.



7 TEST REQUIREMENTS

7.1 CONDUCTED EMISSIONS TEST

7.1.1 Applicable Standard

According to FCC Part 15.207(a) and KDB 174176 D01 Line Conducted FAQ v01r01


7.1.2 Conformance Limit

Froguency/MHz)	Conducted Emission Limit		
Frequency(MHz)	Quasi-peak	Average	
0.15-0.5	66-56*	56-46*	
0.5-5.0	56	46	
5.0-30.0	60	50	

Note: 1. *Decreases with the logarithm of the frequency

- 2. The lower limit shall apply at the transition frequencies
- 3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

7.1.3 Test Configuration

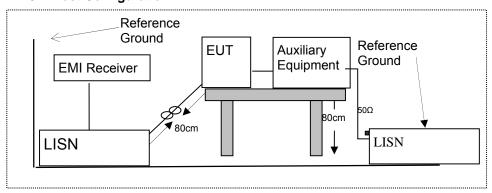

7.1.4 Test Procedure

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

- 1. The EUT was placed 0.4 meter from the conducting wall of the shielding room.
- 2. The EUT was placed on a table which is 0.8m above ground plane.
- Connect EUT to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- 4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40cm long.
- 5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- 6. LISN at least 80 cm from nearest part of EUT chassis.
- 7. The frequency range from 150KHz to 30MHz was searched.
- 8. Set the test-receiver system to Peak Detect Function and specified bandwidth(IF bandwidth=9KHz) with Maximum Hold Mode
- 9. For the actual test configuration, please refer to the related Item -EUT Test Photos.

7.1.5 Test Results

Pass



7.1.6 Test Results

EUT:	Bluetooth HandsFree Car Kit	Model Name :	S-62
Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
Test Voltage :	N/A	Test Mode:	N/A



7.2 RADIATED SPURIOUS EMISSION

7.2.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and ANSI C63.10-2013

7.2.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)). According to FCC Part15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

conticted band epochied on respect(a), then the respect(a) with the table below had to be relieved.					
Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBµV/m)	Measurement Distance		
0.009~0.490	2400/F(KHz)	20 log (uV/m)	300		
0.490~1.705	2400/F(KHz)	20 log (uV/m)	30		
1.705~30.0	30	29.5	30		
30-88	100	40	3		
88-216	150	43.5	3		
216-960	200	46	3		
Above 960	500	54	3		

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dBuV/m) (at 3M)		
	PEAK	AVERAGE	
Above 1000	74	54	

Remark :1. Emission level in dBuV/m=20 log (uV/m)

- 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
- 3. Distance extrapolation factor =40log(Specific distance/ test distance)(dB); Limit line=Specific limits(dBuV) + distance extrapolation factor.




7.2.3 Measuring Instruments


The Measuring equipment is listed in the section 6.3 of this test report.

7.2.4 Test Configuration


(a) For radiated emissions below 30MHz

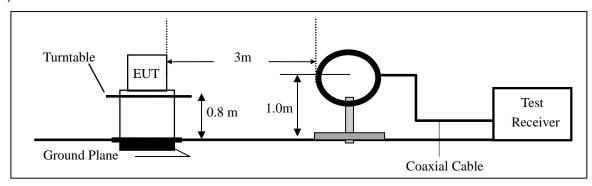

(b) For radiated emissions from 30MHz to 1000MHz

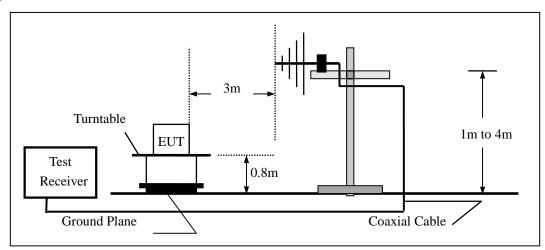

(c) For radiated emissions above 1000MHz

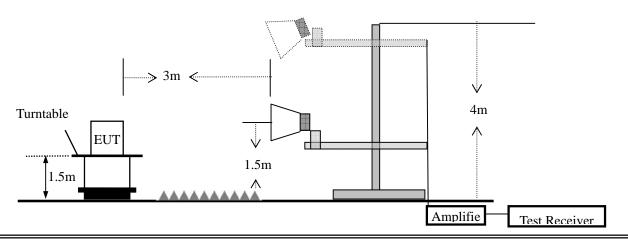



7.2.5 Test Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m.The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

J-p J-p J-				
Spectrum Parameter	Setting			
Attenuation	Auto			
Start Frequency	1000 MHz			
Stop Frequency	10th carrier harmonic			
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average			

Receiver Parameter	Setting	
Attenuation	Auto	
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP	
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP	
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP	

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation
- c. The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For the radiated emission test above 1GHz:
 - Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- e. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- f. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- g. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported



During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function Resolution bandwidth		Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Ah awa 4000	Peak	1 MHz	1 MHz
Above 1000	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where RBWCF [dB] =10*lg(100 [kHz]/narrower RBW [kHz]). , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

7.2.6 Test Results

■ Spurious Emission below 30MHz (9KHz to 30MHz)

EUT:	Bluetooth MiniSoundbar	Model No.:	S-62
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Lake Xie

Freq.	Ant.Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
(MHz)	H/V	PK	AV	PK	AV	PK	AV

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor =20log(Specific distance/ test distance)(dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor




Spurious Emission below 1GHz (30MHz to 1GHz)
All the modulation modes have been tested, and the worst result was report as below:

EUT:	Bluetooth HandsFree Car Kit	Model Name:	S-62
Temperature:	20 ℃	Relative Humidity:	48%
Pressure:	1010hPa	Test Mode:	Mode 1
Test Voltage :	DC 3.7V		

Polar	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(H/V)	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	30.6377	5.71	19.55	25.26	40	-14.74	QP
V	88.3421	10.01	10.25	20.26	43.5	-23.24	QP
V	215.2678	18.56	11.82	30.38	43.5	-13.12	QP
V	444.8514	5.47	20.83	26.3	46	-19.7	QP
V	524.5539	5.48	23.1	28.58	46	-17.42	QP
V	750.1082	7.17	27.67	34.84	46	-11.16	QP

Remark:


Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

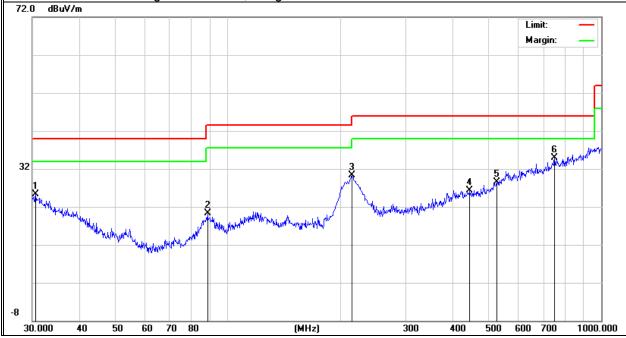



Polar Frequency		Meter Reading	Factor	Emission Level	Limits	Margin	Remark
Polar (H/V)	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Н	33.3278	6.02	18.11	24.13	40	-15.87	QP
Н	88.3421	15.19	10.25	25.44	43.5	-18.06	QP
Н	215.2678	24.29	11.82	36.11	43.5	-7.39	QP
Н	547.0977	6.34	24.68	31.02	46	-14.98	QP
Н	731.9202	7.03	26.9	33.93	46	-12.07	QP
Н	824.5968	6.77	28.48	35.25	46	-10.75	QP

Remark:

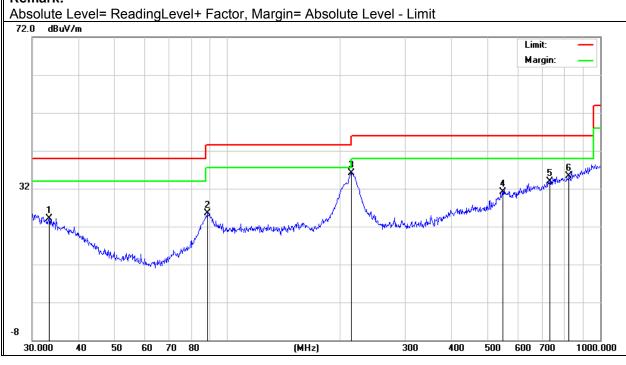



■ Spurious Emission Above 1GHz (1GHz to 25GHz)

EUT:	Bluetooth HandsFree Car Kit	Model No.:	S-62
Temperature:	120 (Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Lake Xie

All the modulation modes have been tested, and the worst result was report as below: Cable Antenna Preamp **Emission** Frequenc Read Limits Margin Factor Remark Comment Level loss Factor Level (dBµV/m) (dBµV/m) (dB) (MHz) (dBµV) (dB) dB/m (dB) Low Channel (2402 MHz)(GFSK)--Above 1G Vertical 4804.00 49.57 74.00 53.07 5.21 35.59 44.30 -24.43 Pk 4804.00 43.07 5.21 35.59 44.30 39.57 54.00 -14.43 ΑV Vertical Vertical 7206.27 50.36 6.48 44.60 74.00 -25.49 36.27 48.51 Pk Vertical 7206.27 43.36 6.48 36.27 44.60 41.51 54.00 -12.49 ΑV 44.30 74.00 -25.72 Horizontal 4804.00 51.82 5.21 35.55 48.28 Pk 43.14 44.30 54.00 Horizontal 4804.00 5.21 35.55 39.60 -14.40 ΑV Horizontal 7206.78 49.15 6.48 36.27 44.52 47.38 74.00 -26.62 Pk 7206.78 40.41 6.48 36.27 44.52 38.64 54.00 -15.36 ΑV Horizontal Mid Channel (2441 MHz)(GFSK)--Above 1G Vertical 4882.10 55.29 5.21 35.66 44.20 51.96 74.00 -22.04 Pk 4882.10 43.79 5.21 35.66 44.20 40.46 54.00 -13.54 Vertical A۱/ Vertical 7323.54 54.59 7.10 36.50 44.43 53.76 74.00 -20.24 Pk Vertical 7323.54 42.15 7.10 36.50 44.43 41.32 54.00 -12.68 ΑV 44.20 49.54 74.00 -24.46 Horizontal 4882.40 52.87 5.21 35.66 Pk Horizontal 4882.40 43.06 5.21 35.66 44.20 39.73 54.00 -14.27 ΑV Horizontal 7323.48 50.73 7.10 36.50 44.43 49.90 74.00 -24.10 Pk -12.32 Horizontal 7323.48 42.51 7.10 36.50 44.43 41.68 54.00 ΑV High Channel (2480 MHz)(GFSK)-- Above 1G 4960.56 56.07 5.21 35.52 44.21 52.59 74.00 -21.41 Pk Vertical Vertical 4960.56 43.60 5.21 35.52 44.21 40.12 54.00 -13.88 ΑV 7440.47 50.01 7.10 36.53 44.60 49.04 74.00 -24.96 Vertical Pk 43.77 54.00 Vertical 7440.47 7.10 36.53 44.60 42.80 -11.20 ΑV 4960.64 51.03 5.21 44.21 47.55 74.00 -26.45 Pk Horizontal 35.52 Horizontal 4960.64 42.67 5.21 35.52 44.21 39.19 54.00 -14.81 ΑV 7440.18 49.86 44.60 48.89 74.00 -25.11 Horizontal 7.10 36.53 Pk 7440.18 42.21 7.10 36.53 44.60 41.24 54.00 -12.76 ΑV Horizontal

Note: (1) All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).

(2) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor

(3)All other emissions more than 20dB below the limit.



■ Spurious Emission in Band edge								
EUT:	Bluetooth HandsFree Car Kit	Model No.:	S-62					
Temperature:	120 7	Relative Humidity:	48%					
Test Mode:	Mode2/ Mode4	Test By:	Lake Xie					
All the modulation modes have been tested, and the worst result was report as below:								

All the mo	All the modulation modes have been tested, and the worst result was report as below:								
Frequenc		Cable	Antenna	Preamp	Emission	Limits	Margin	Detector	
У	Reading	Loss	Factor	Factor	Level				Comment
(MHz)	(dBµV)	(dB)	dB/m	(dB)	(dBµV/m)		(dB)	Type	
					SK)-hoppin	9			,
2310	53.88	2.97	27.80	43.80	40.85	74	-33.15	Pk	Horizontal
2310	40.21	2.97	27.80	43.80	27.18	54	-26.82	AV	Horizontal
2310	50.80	2.97	27.80	43.80	37.77	74	-36.23	Pk	Vertical
2310	41.28	2.97	27.80	43.80	28.25	54	-25.75	AV	Vertical
2390	50.61	3.14	27.21	43.80	37.16	74	-36.84	Pk	Vertical
2390	42.67	3.14	27.21	43.80	29.22	54	-24.78	AV	Vertical
2390	54.51	3.14	27.21	43.80	41.06	74	-32.94	Pk	Horizontal
2390	40.51	3.14	27.21	43.80	27.06	54	-26.94	AV	Horizontal
2483.5	54.01	3.58	27.70	44.00	41.29	74	-32.71	Pk	Vertical
2483.5	42.15	3.58	27.70	44.00	29.43	54	-24.57	AV	Vertical
2483.5	52.48	3.58	27.70	44.00	39.76	74	-34.24	Pk	Horizontal
2483.5	43.07	3.58	27.70	44.00	30.35	54	-23.65	AV	Horizontal
			1M	bps(GFSK)	- Non-hopp	oing			
2310	50.53	2.97	27.80	43.80	37.50	74	-36.5026	Pk	Horizontal
2310	41.32	2.97	27.80	43.80	28.29	54	-25.7115	AV	Horizontal
2310	52.82	2.97	27.80	43.80	39.79	74	-34.2102	Pk	Vertical
2310	44.71	2.97	27.80	43.80	31.68	54	-22.3184	AV	Vertical
2390	52.78	3.14	27.21	43.80	39.33	74	-34.6698	Pk	Vertical
2390	42.20	3.14	27.21	43.80	28.75	54	-25.253	AV	Vertical
2390	51.96	3.14	27.21	43.80	38.51	74	-35.49	Pk	Horizontal
2390	40.97	3.14	27.21	43.80	27.52	54	-26.4809	AV	Horizontal
2483.5	51.94	3.58	27.70	44.00	39.22	74	-34.7809	Pk	Vertical
2483.5	40.12	3.58	27.70	44.00	27.40	54	-26.6043	AV	Vertical
2483.5	54.92	3.58	27.70	44.00	42.20	74	-31.7958	Pk	Horizontal
2483.5	42.66	3.58	27.70	44.00	29.94	54	-24.0553	AV	Horizontal

Note: (1) All other emissions more than 20dB below the limit.



■ Spurious Emission in Restricted Band 3260MMHz-18000MHz

EUT:	Bluetooth HandsFree Car Kit	Model No.:	S-62
Temperature:	12() (*	Relative Humidity:	48%
Test Mode:	Mode2/ Mode4	Test By:	Lake Xie

All the modulation modes have been tested, and the worst result GFSK was report as below:

Frequenc	Readin	Cable	Antenn	Preamp	Emission	Limits	Margin	Detecto	
У	g Level	Loss	а	Factor	Level		,	r	Comment
(MHz)	(dBµV)	(dB)	dB/m	(dB)	(dBµ V/m)	(dBµ V/m)	(dB)	Туре	Comment
3260	62.36	4.04	29.57	44.70	51.27	74	-22.73	Pk	Vertical
3260	54.48	4.04	29.57	44.70	43.39	54	-10.61	AV	Vertical
3260	60.10	4.04	29.57	44.70	49.01	74	-24.99	Pk	Horizontal
3260	57.81	4.04	29.57	44.70	46.72	54	-7.28	AV	Horizontal
3332	60.19	4.26	29.87	44.40	49.92	74	-24.08	Pk	Vertical
3332	56.08	4.26	29.87	44.40	45.81	54	-8.19	AV	Vertical
3332	63.96	4.26	29.87	44.40	53.69	74	-20.31	Pk	Horizontal
3332	57.14	4.26	29.87	44.40	46.87	54	-7.13	AV	Horizontal
17789	52.36	10.99	43.95	43.50	63.80	74	-10.20	Pk	Vertical
17789	38.26	10.99	43.95	43.50	49.70	54	-4.30	AV	Vertical
17957	53.21	11.81	43.69	44.60	64.11	74	-9.89	Pk	Horizontal
17957	38.59	11.81	43.69	44.60	49.49	54	-4.51	AV	Horizontal

Note: (1) All other emissions more than 20dB below the limit.



7.3 NUMBER OF HOPPING CHANNEL

7.3.1 Applicable Standard

According to FCC Part 15.247(a)(1) (iii)and ANSI C63.10-2013

7.3.2 Conformance Limit

Frequency hopping systems in the 2400-2483.5MHz band shall use at least 15 channels.

7.3.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.3.4 Test Setup

Please refer to Section 6.1 of this test report.

7.3.5 Test Procedure

The testing follows ANSI C63.10-2013 clause 7.8.3

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT must have its hopping function enabled.

Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW ≥ 1% of the span

 $VBW \geq RBW$

Sweep = auto

Detector function = peak


Trace = max hold

7.3.6 Test Results

EUT:	Bluetooth HandsFree Car Kit	Model No.:	S-62
Temperature:	120 ('	Relative Humidity:	48%
Test Mode:	Mode 5(1Mbps)	Test By:	Lake Xie

Number of Hopping (Channel)	Adaptive Frequency hopping (Channel)	limit	Verdict
79	20	≥15	Pass



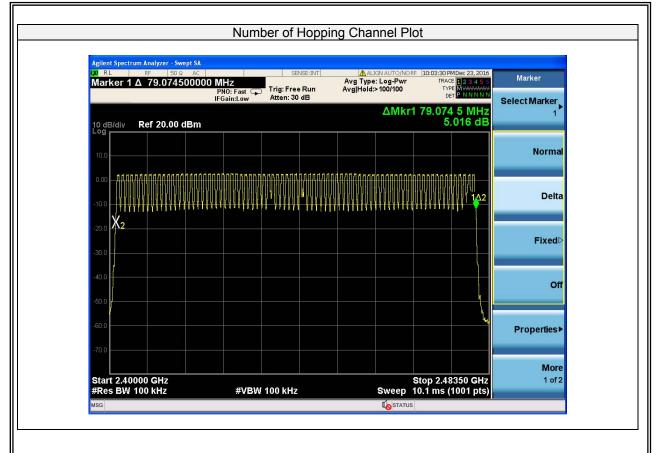



7.4 HOPPING CHANNEL SEPARATION MEASUREMENT

7.4.1 Applicable Standard

According to FCC Part 15.247(a)(1) and ANSI C63.10-2013

7.4.2 Conformance Limit

Frequency hopping systems operating in the 2400-2483.5MHz band shall have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

7.4.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.4.4 Test Setup

Please refer to Section 6.1 of this test report.

7.4.5 Test Procedure

The testing follows ANSI C63.10-2013 clause 7.8.2

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Span = Measurement Bandwidth or Channel Separation

 $RBW \geq 30 KHz \\$

 $VBW \geq 3*RBW$

Sweep = auto

Detector function = peak

Trace = max hold



7.4.6 Test Results

EUT:	Bluetooth HandsFree Car Kit	Model No.:	S-62
Temperature:	120 ('	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Lake Xie

Modulation	Channel	Channel	Measurement	Limit		
Mode	Number	Frequency	Bandwidth		(kHz)	Verdict
		(MHz)	(MHz)			
	0	2402	1	>916.360	20dB BW	PASS
GFSK	39	2441	1	>866.144	20dB BW	PASS
	78	2480	1	>867.227	20dB BW	PASS
	0	2402	1	>842.000	2/3 of 20dB BW	PASS
π/4-DQPSK	39	2441	1	>815.333	2/3 of 20dB BW	PASS
	78	2480	1	>797.333	2/3 of 20dB BW	PASS
	0	2402	1	>797.333	2/3 of 20dB BW	PASS
8DPSK	39	2441	1	>805.333	2/3 of 20dB BW	PASS
	78	2480	1	>805.333	2/3 of 20dB BW	PASS



(1Mbps) Channel Separation plot on channel 00-01

(2Mbps) Channel Separation plot on channel 00-01





(1Mbps) Channel Separation plot on channel 39-40







(1Mbps) Channel Separation plot on channel 77-78

(2Mbps) Channel Separation plot on channel 77-78







(3Mbps) Channel Separation plot on channel 00-01



(3Mbps) Channel Separation plot on channel 39-40



(3Mbps) Channel Separation plot on channel 77-78





7.5 AVERAGE TIME OF OCCUPANCY (DWELL TIME)

7.5.1 Applicable Standard

According to FCC Part 15.247(a)(1)(iii) and ANSI C63.10-2013

7.5.2 Conformance Limit

The average time of occupancy on any channel shall not be greater than 0.4s within a period of 0.4s multiplied by the number of hopping channels employed.

7.5.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.5.4 Test Setup

Please refer to Section 6.1 of this test report.

7.5.5 Test Procedure

The testing follows ANSI C63.10-2013 clause 7.8.4

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT must have its hopping function enabled.

Use the following spectrum analyzer settings:

Span = zero span, centered on a hopping channel

 $RBW \geq 1MHz \\$

 $\mathsf{VBW} \geq \mathsf{RBW}$

Sweep = as necessary to capture the entire dwell time per hopping channel

Detector function = peak

Trace = max hold

Measure the maximum time duration of one single pulse.

Set the EUT for DH5, DH3 and DH1 packet transmitting.

Measure the maximum time duration of one single pulse.



7.5.6 Test Results

EUT:	Bluetooth HandsFree Car Kit	Model No.:	S-62
Temperature:	120 "('	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Lake Xie

Modulatio n Mode	Channel Number	Packet type	Mode	Hops Over Occupanc y Time (ms)	Pulse width (ms)	dwell time (ms)	Limit (ms)	Verdict
	39	DIII	Normal	320	0.4	128.000	<400	PASS
	39	DH1	AFH	160	0.4	64.000	<400	PASS
GFSK	39	DH3	Normal	160	1.65	264.000	<400	PASS
GFSK	39	טחט	AFH	80	1.65	132.000	<400	PASS
	39	DH5	Normal	106.67	2.91	310.410	<400	PASS
	39	טחט	AFH	53.33	2.91	155.190	<400	PASS
	39	2DH1	Normal	320	0.41	131.200	<400	PASS
	39	Ζυπι	AFH	160	0.41	65.600	<400	PASS
π/4-	39	2DH3	Normal	160	1.66	265.600	<400	PASS
DQPSK	39	2003	AFH	80	1.66	132.800	<400	PASS
	39	2DH5	Normal	106.67	2.91	310.410	<400	PASS
	39	2000	AFH	53.33	2.91	155.190	<400	PASS
	39	3DH1	Normal	320	0.43	137.600	<400	PASS
	39	3001	AFH	160	0.43	68.800	<400	PASS
8DPSK	39	3DH3	Normal	160	1.67	267.200	<400	PASS
	39	งบทง	AFH	80	1.67	133.600	<400	PASS
	39	3DH5	Normal	106.67	2.91	310.410	<400	PASS
	39	טחט	AFH	53.33	2.91	155.190	<400	PASS

Note:

A Period Time = (channel number)*0.4


DH1 Time Slot: Reading * (1600/2)*31.6/(channel number) DH3 Time Slot: Reading * (1600/4)*31.6/(channel number) DH5 Time Slot: Reading * (1600/6)*31.6/(channel number)

For Example:


- 1. In normal mode, hopping rate is 1600 hops/s with 6 slots in 79 hopping channels. With channel hopping rate (1600 / 6 / 79) in Occupancy Time Limit (0.4×79) (s), Hops Over Occupancy Time comes to $(1600 / 6 / 79) \times (0.4 \times 79) = 106.67$ hops.
- 2. In AFH mode, hopping rate is 800 hops/s with 6 slots in 20 hopping channels. With channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 x 20) (s), Hops Over Occupancy Time comes to (800 / 6 / 20) x (0.4 x 20) = 53.33 hops.
- 3. Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time




Package Transfer Time Plot CH39-DH1




Package Transfer Time Plot CH39-DH3




Package Transfer Time Plot CH39-DH5



Package Transfer Time Plot CH39-2DH1



Package Transfer Time Plot CH39-2DH3




Package Transfer Time Plot CH39-2DH5







Package Transfer Time Plot CH39-3DH1



Package Transfer Time Plot CH39-3DH3



Package Transfer Time Plot CH39-3DH5





7.6 20DB BANDWIDTH TEST

7.6.1 Applicable Standard

According to FCC Part 15.247(a)(1) and ANSI C63.10-2013

7.6.2 Conformance Limit

No limit requirement.

7.6.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.6.4 Test Setup

Please refer to Section 6.1 of this test report.

7.6.5 Test Procedure

The testing follows ANSI C63.10-2013 clause 6.9.2

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW ≥ 1% of the 20 dB bandwidth

 $VBW \geq RBW$

Sweep = auto

Detector function = peak

Trace = max hold



7.6.6 Test Results

EUT:	Bluetooth HandsFree Car Kit	Model No.:	S-62
Temperature:	120 ('	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Lake Xie

Test Channel	Frequency	Measurement Bandwidth (KHz)	Limit	Verdict
	(MHz)	(14112)	(kHz)	
		1Mbps		
0	2402	931.3	N/A	PASS
39	2441	934.9	N/A	PASS
78	2480	935.2	N/A	PASS
		2Mbps		
0	2402	1258	N/A	PASS
39	2441	1258	N/A	PASS
78	2480	1259	N/A	PASS
		3Mbps		
0	2402	1267	N/A	PASS
39	2441	1266	N/A	PASS
78	2480	1265	N/A	PASS

Note: N/A (Not Applicable)



20dB Bandwidth plot on channel 00 (1Mbps)




20dB Bandwidth plot on channel 00 (2Mbps)



20dB Bandwidth plot on channel 39 (1Mbps)



20dB Bandwidth plot on channel 39 (2Mbps)



20dB Bandwidth plot on channel 78 (1Mbps)




20dB Bandwidth plot on channel 78 (2Mbps)






Test Plot

20dB Bandwidth plot on channel 00 (3Mbps)



20dB Bandwidth plot on channel 39 (3Mbps)



20dB Bandwidth plot on channel 78 (3Mbps)





7.7 PEAK OUTPUT POWER

7.7.1 Applicable Standard

According to FCC Part 15.247(b)(1) and ANSI C63.10-2013

7.7.2 Conformance Limit

The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts.

7.7.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.7.4 Test Setup

Please refer to Section 6.1 of this test report.

7.7.5 Test Procedure

The testing follows ANSI C63.10-2013 clause 7.8.5.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW ≥ the 20 dB bandwidth of the emission being measured

 $VBW \ge RBW$

Sweep = auto

Detector function = peak

Trace = max hold



7.7.6 Test Results

EUT:	Bluetooth HandsFree Car Kit	Model No.:	S-62
Temperature:	120 ('	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Lake Xie

Test Channel	Frequenc y	Power Setting	Peak Output Power	LIMIT	Verdict		
	(MHz)		(dBm)	(dBm)			
	_	1 M	bps				
0	2402	Default	2.327	30	PASS		
39	2441	Default	2.705	30	PASS		
78	2480	Default	2.461	30	PASS		
	2Mbps						
0	2402	Default	1.877	20.97	PASS		
39	2441	Default	2.241	20.97	PASS		
78	2480	Default	1.976	20.97	PASS		
	3Mbps						
0	2402	Default	2.291	20.97	PASS		
39	2441	Default	2.717	20.97	PASS		
78	2480	Default	2.462	20.97	PASS		



Peak output Power plot on channel 00 (1Mbps)



Peak output Power plot on channel 00 (2Mbps)



Peak output Power plot on channel 39 (1Mbps)




Peak output Power plot on channel 39 (2Mbps)



Peak output Power plot on channel 78 (1Mbps)




Peak output Power plot on channel 78 (2Mbps)






Peak output Power plot on channel 00 (3Mbps)



Peak output Power plot on channel 39 (3Mbps)



Peak output Power plot on channel 78 (3Mbps)





7.8 CONDUCTED BAND EDGE MEASUREMENT

7.8.1 Applicable Standard

According to FCC Part 15.247(d) and ANSI C63.10-2013

7.8.2 Conformance Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.8.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.8.4 Test Setup

Please refer to Section 6.1 of this test report.

7.8.5 Test Procedure

The testing follows ANSI C63.10-2013 clause 7.8.6.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT must have its hopping function enabled.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW = 100KHz

VBW = 300KHz

Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.

Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.

Repeat above procedures until all measured frequencies were complete.



7.8.6 Test Results

EUT:	Bluetooth HandsFree Car Kit	Model No.:	S-62
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode2 /Mode4/ Mode 5	Test By:	Lake Xie

Note: Hopping enabled and disabled have evaluated, and the wortest data was reported

Test Plot


BDR mode (GFSK): Band Edge-Low Channel




BDR mode (GFSK): Band Edge-Low Channel (Hopping Mode)



BDR mode (GFSK): Band Edge-High Channel



BDR mode (GFSK): Band Edge-High Channel (Hopping Mode)






BDR mode (π /4-DQPSK): Band Edge-Low Channel



BDR mode (π /4-DQPSK): Band Edge-Low Channel (Hopping Mode)



BDR mode (17 /4-DQPSK): Band Edge-High Channel




BDR mode (π /4-DQPSK): Band Edge-High Channel (Hopping Mode)






BDR mode (8DPSK): Band Edge-Low Channel




BDR mode (8DPSK): Band Edge-Low Channel (Hopping Mode)



BDR mode (8DPSK): Band Edge-High Channel



BDR mode (8DPSK): Band Edge-High Channel (Hopping Mode)





7.9 ANTENNA APPLICATION

7.9.1 Antenna Requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible partyshall be used with the device.

7.9.2 Result

The	FUT	antenna is	permanent	attached	PCB	antenna	(Gain:1dBi)	It comp	olv with the	e standard	requirement

END OF REPORT