

47 CFR PART 15 SUBPART C TEST REPORT

for

Electro-mechanical Rack Handle Lock

Model No.: 3525DFR

FCC ID: 2AED9-RL603

of

Applicant: **dormakaba Canada Inc**

Address: **65 Struck Court Cambridge, Ontario N1R8L2 Canada**

Tested and Prepared

by

Worldwide Testing Services (Taiwan) Co., Ltd.

FCC Registration No.: TW1477, TW1072

Industry Canada filed test laboratory Reg. No. 20037



Report No.: W6M22110-21258-C-5

6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU TAIPEI 114, TAIWAN, R.O.C.
TEL: 886-2-66068877 FAX: 886-2-66068879 E-mail: wts@wts-lab.com




TABLE OF CONTENTS

1	GENERAL INFORMATION	2
1.1	NOTES.....	2
1.2	TESTING LABORATORY	3
1.2.1	Location	3
1.2.2	Details of accreditation status	3
1.3	DETAILS OF APPROVAL HOLDER.....	3
1.4	APPLICATION DETAILS	4
1.5	GENERAL INFORMATION OF TEST ITEM	4
1.6	TEST STANDARDS.....	4
2	TECHNICAL TEST	5
2.1	SUMMARY OF TEST RESULTS	5
2.2	TEST ENVIRONMENT	5
2.3	TEST EQUIPMENT LIST	6
2.4	GENERAL TEST PROCEDURE	9
3	TEST RESULTS (ENCLOSURE)	11
3.1	OUTPUT POWER (FIELD STRENGTH)	12
3.2	OUT OF BAND RADIATED EMISSIONS.....	13
3.3	OCCUPIED BANDWIDTH	15
3.4	FREQUENCY TOLERANCE	16
3.5	POWER LINE CONDUCTED EMISSION	18
	APPENDIX	20



Registration number: W6M22110-21258-C-5
FCC ID: 2AED9-RL603

1 General Information

1.1 Notes

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems.

The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

The test results of this test report relate exclusively to the item tested as specified in 1.5.

The test report may only be reproduced or published in full.

Reproduction or publication of extracts from the report requires the prior written approval of the Worldwide Testing Services(Taiwan) Co., Ltd.

Tester:

June 27, 2022

Rick Chen

Rick Chen.

Date

WTS-Lab.

Name

Signature

Technical responsibility for area of testing:

June 27, 2022

Kevin Wang


Kevin Wang

Date

WTS

Name

Signature



Registration number: W6M22110-21258-C-5
FCC ID: 2AED9-RL603

1.2 Testing laboratory

1.2.1 Location

OATS

No.5-1, Lishui, Shuang Sing Village,
Wanli Dist., New Taipei City 207,
Taiwan (R.O.C.)

3 meter semi-anechoic chamber

No.35, Aly. 21, Ln. 228, Ankang Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

TEL:886-2-6613-0228

FAX:886-2-2791-5046

Company

Worldwide Testing Services(Taiwan) Co., Ltd.

6F, NO. 58, LANE 188, RUEY-KUANG RD.

NEIHU, TAIPEI 114, TAIWAN R.O.C.

Tel : 886-2-66068877

Fax : 886-2-66068879

1.2.2 Details of accreditation status

Accredited testing laboratory

FCC filed test laboratory Reg. No. TW1477, TW1072

Industry Canada filed test laboratory Reg. No. 20037

Test location, where different from Worldwide Testing Services (Taiwan) Co., Ltd. :

Name: ./.

Accredited number: ./.

Street: ./.

Town: ./.

Country: ./.

Telephone: ./.

Fax: ./.

1.3 Details of approval holder

Name: dormakaba Canada Inc

Street: 65 Struck Court Cambridge,

City: Ontario N1R8L2

Country: Canada



Registration number: W6M22110-21258-C-5

FCC ID: 2AED9-RL603

1.4 Application details

Date of receipt of test item: December 06, 2021

Date of test: from December 07, 2021 to December 20, 2021

1.5 General information of Test item

Description of test item: Electro-mechanical Rack Handle Lock

Type identification: 3525DFR

Multi-listing model number: ./.

Transmitting frequency: 13.56 MHz

Operation mode: Half-duplex

Voltage supply: 12 Vd.c.

Antenna type: Loop antenna


Photos: see Annex

Manufacturer: (if applicable)

Name: Southco,. Inc
Street: Wainwright Road, Warndon,
Town: Worcester, WR49FA,
Country: United Kingdom

1.6 Test standards

47 CFR PART 15 SUBPART C § 2.1049, § 15.225 (2020-10)



Registration number: W6M22110-21258-C-5

FCC ID: 2AED9-RL603

2 Technical test

2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed. ☒

or

The deviations were ascertained in the course of the tests performed. ☐

2.2 Test environment

Relative humidity content: 20 ... 75 %


Air pressure: 86 ... 103 kPa

Details of power supply: 12 Vd.c.

Extreme conditions parameters: ./.

Test item Name	Measurement Uncertainty
Estimation Result of Uncertainty of Conducted Emission (Power Line Conducted Emission)	Expanded Uncertainty : AMN : 1.05 dB Voltage probe : 1.05 dB
Estimation Result of Uncertainty of Radiated Emission(3M) (Output Power (Field Strength), Out of Band Radiated Emissions, Band Edge)	Expanded Uncertainty : 0.009-30 MHz : 2.13 dB 30-1000 MHz : 3.53 dB 1-18 GHz : 4.19 dB 18-40 GHz : 4.09 dB
Estimation Result of Uncertainty of Bandwidth Measurement (Occupied Bandwidth)	Expanded Uncertainty : 0.41 kHz
Estimation Result of Uncertainty of Frequency Drift Measurement (Frequency tolerance)	Expanded Uncertainty : 6.11 Hz

The decision rule is: Measurement uncertainty is not included in the calculation of test results.




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22110-21258-C-5

FCC ID: 2AED9-RL603

2.3 Test Equipment List

No.	Test equipment	Type	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
ETSTW-CE 001	EMI TEST RECEIVER	ESHS10	842121/013	R&S	2021/6/17	2022/6/16
ETSTW-CE 003	AC POWER SOURCE	APS-9102	D161137	GW	Function Test	
ETSTW-CE 004	ZWEILEITER-V-NETZNACHBILDUNG TWO-LINE V-NETWORK	ESH3-Z5	840731/011	R&S	2021/11/9	2022/11/8
ETSTW-CE 006	IMPULSBEGRENZER PULSE LIMITER	ESH3-Z2	100226	R&S	2021/9/22	2022/9/21
ETSTW-CE 008	HF-EICHLITUNG RF STEP ATTENUATOR 139dB DPSP	334.6010.02	844581/024	R&S	Function Test	
ETSTW-CE 009	TEMP.&HUMIDITY CHAMBER	GTH-225-40-1P-U	MAA0305-009	GIANT FORCE	2021/7/29	2022/7/28
ETSTW-CE 016	TWO-LINE V-NETWORK	ENV216	100050	R&S	2021/11/8	2022/11/7
ETSTW-CE 028	MXE EMI Receiver	N9038A	MY53220110	Agilent	2021/7/28	2022/7/27
ETSTW-RE 003	EMI TEST RECEIVER	ESI 26	831438/001	R&S	2021/6/17	2022/6/16
ETSTW-RE 004	EMI TEST RECEIVER	ESI 40	832427/004	R&S	2021/9/28	2022/9/27
ETSTW-RE 012	TUNABLE BANDREJECT FILTER	D.C 0309	146	K&L	Function Test	
ETSTW-RE 013	TUNABLE BANDREJECT FILTER	D.C 0336	397	K&L	Function Test	
ETSTW-RE 018	MICROWAVE HORN ANTENNA	AT4560	27212	AR	2021/8/4	2022/8/3
ETSTW-RE 019	MICROWAVE HORN ANTENNA	22240-25	121074	FM	2021/5/31	2022/5/30
ETSTW-RE 027	Passive Loop Antenna	6512	00034563	ETS-Lindgren	2021/6/16	2022/6/15
ETSTW-RE 030	Double-Ridged Guide Horn Antenna	3117	00035224	ETS-Lindgren	2021/5/5	2022/5/4
ETSTW-RE 042	Biconical Antenna	HK116	100172	R&S	2021/3/18	2022/3/17
ETSTW-RE 043	Log-Periodic Dipole Antenna	HL223	100166	R&S	2021/5/21	2022/5/20
ETSTW-RE 044	Log-Periodic Antenna	HL050	100094	R&S	2021/7/14	2022/7/13
ETSTW-RE 045	ESA-E SERIES SPECTRUM ANALYZER	E4404B	MY45111242	Agilent	Pre-test Use	
ETSTW-RE 050	Attenuator 10dB	50HF-010-1	None	JFW	2021/2/19	2022/2/18
ETSTW-RE 051	Attenuator 6dB	50HF-006-1	None	JFW	2021/2/19	2022/2/18
ETSTW-RE 053	Attenuator 3dB	50HF-003-1	None	JFW	2021/2/19	2022/2/18
ETSTW-RE 055	SPECTRUM ANALYZER	FSU 26	200074	R&S	2021/3/16	2022/3/15
ETSTW-RE 060	Attenuator 30dB	5015-30	F651012z-01	ATM	2021/2/19	2022/2/18
ETSTW-RE 062	Amplifier Module	CHC 2	None	KMIC	2021/5/14	2022/5/13
ETSTW-RE 064	Bluetooth Test Set	MT8852B-042	6K00005709	Anritsu	Function Test	
ETSTW-RE 069	Double-Ridged Guide Horn Antenna	3117	00069377	ETS-Lindgren	Function Test	
ETSTW-RE 072	CELL SITE TEST SET	8921A	3339A00375	HP	2021/10/27	2022/10/26
ETSTW-RE 088	SOLID STATE AMPLIFIER	KMA180265A01	99057	KMIC	2021/9/17	2022/9/16
ETSTW-RE 091	Match Pad	MDCS1500	None	WOKEN	2021/5/27	2022/5/26
ETSTW-RE 099	DC Block	50DB-007-1	None	JFW	2021/2/19	2022/2/18
ETSTW-RE 112	AC POWER SOURCE	TFC-1005	T-0A023536	T-Power	Function test	
ETSTW-RE 115	2.4GHz Notch Filter	N0124411	473874	MICROWAVE CIRCUITS	2021/1/6	2022/1/5




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22110-21258-C-5

FCC ID: 2AED9-RL603

ETSTW-RE 120	RF Player	MP9200	MP9210-111022	ADIVIC	2021/10/29	2022/10/28
ETSTW-RE 122	SIGNAL GENERATOR	SMF100A	102149	R&S	2021/6/8	2022/6/7
ETSTW-RE 125	5GHz Notch filter	5NSL11-5200/E221.3-O/O	1	K&L Microwave	2021/8/6	2022/8/5
ETSTW-RE 126	5GHz Notch filter	5NSL12-5800/E221.3-O/O	1	K&L Microwave	2021/8/6	2022/8/5
ETSTW-RE 127	RF Switch Box	RFS-01	None	WTS	2021/2/19	2022/2/18
ETSTW-RE 128	5.3GHz Notch filter	N0153001	SN487233	Microwave Circuits	2021/8/6	2022/8/5
ETSTW-RE 129	5.5GHz Notch filter	N0555984	SN487234	Microwave Circuits	2021/8/6	2022/8/5
ETSTW-RE 130	Handheld RF Spectrum Analyzer	N9340A	CN0147000204	Agilent	Pre-test Use	
ETSTW-RE 142	Amplifier	8447D	2805A03378	Agilent	2021/5/14	2022/5/13
ETSTW-RE 146	Preamplifier	JPA-10M1G	15090004	JPT	2021/6/4	2022/6/3
ETSTW-RE 152	Bi-log Hybrid Antenna	MCTD 2786B	BLB20J04029	ETC	2021/10/5	2022/10/4
ETSTW-RE 153	Signal Analyzer	FSV40	101929	R&S	2021/10/6	2022/10/5
ETSTW-RE 159	Bi-log Hybrid Antenna (30M~1000 MHz)	MCTD 2786B	BLB21N04035	ETC	2021/12/06	2022/12/05
ETSTW-RF 002	Electromagnetic field probe	LF-30	K-0007	STT	2021/7/19	2022/7/18
ETSTW-EMI 011	USB Compact Modulator	SFC-U	101689	R&S	2021/6/2	2022/6/1
ETSTW-GSM 002	Universal Radio Communication Tester	CMU 200	109439	R&S	2021/3/16	2022/3/15
ETSTW-GSM 003	Radio Communication Analyzer	MT8820C	6201342073	Anritsu	2021/4/27	2022/4/26
ETSTW-GSM 004	Wideband Radio Communication Tester	CMW500	128092	R&S	2021/10/29	2022/10/28
ETSTW-GSM 019	Band Reject Filter	WRCTF824/849-822/851-40 /12+9SS	3	WI	2021/1/6	2022/1/5
ETSTW-GSM 020	Band Reject Filter	WRCD1747/1748-1743/1752-32/5SS	1	WI	2021/1/6	2022/1/5
ETSTW-GSM 021	Band Reject Filter	WRCD1879.5/1880.5-1875.5/1884.5-32/5SS	3	WI	2021/1/6	2022/1/5
ETSTW-GSM 022	Band Reject Filter	WRCT901.9/903.1-904.25-50/8SS	1	WI	2021/1/6	2022/1/5
ETSTW-GSM 023	Power Divider	4901.19.A	None	SUHNER	2021/9/7	2022/9/6
ETSTW-GSM 024	Radio Communication Analyzer	MT8821C	None	Anritsu	2021/4/1	2022/3/31
ETSTW-GSM 025	Band Reject Filter	BRM19835	001	Micro-Tronics	2021/8/6	2022/8/5
ETSTW-Cable 011	SMA to N type Cable	RGU-400	None	THERMAX	Pre-test Use NCR	
ETSTW-Cable 016	BNC Cable	Switch Box	B Cable 1	Schwarz beck	2021/2/19	2022/2/18
ETSTW-Cable 017	BNC Cable	X Cable	B Cable 2	Schwarz beck	2021/2/19	2022/2/18
ETSTW-Cable 018	BNC Cable	Y Cable	B Cable 3	Schwarz beck	2021/2/19	2022/2/18
ETSTW-Cable 019	BNC Cable	Z Cable	B Cable 4	Schwarz beck	2021/2/19	2022/2/18
ETSTW-Cable 020	N TYPE Cable	OATS Cable 1	N30N30-L335-15M	JYE BAO CO.,LTD.	2021/7/1	2022/6/30
ETSTW-Cable 027	Microwave Cable	SUCOFLEX 104	279083	HUBER+SUHNER	2021/5/7	2022/5/6
ETSTW-Cable 028	Microwave Cable	FA147A0015M2020	30064-2	UTIFLEX	2021/9/17	2022/9/16
ETSTW-Cable 029	Microwave Cable	FA147A0015M2020	30064-3	UTIFLEX	2021/9/17	2022/9/16
ETSTW-Cable 030	Microwave Cable	SUCOFLEX 104 (S Cable 9)	279067	HUBER+SUHNER	2021/2/19	2022/2/18
ETSTW-Cable 043	Microwave Cable	SUCOFLEX 104	317576	HUBER+SUHNER	2021/5/14	2022/5/13
ETSTW-Cable 047	Microwave Cable	SUCOFLEX 104	325518	HUBER+SUHNER	2021/7/2	2022/7/1




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22110-21258-C-5

FCC ID: 2AED9-RL603

ETSTW-Cable 058	Microwave Cable	SUCOFLEX 104	none	HUBER+SUHNER	2021/6/4	2022/6/3
ETSTW-Cable 064	Microwave Cable	SUCOFLEX 104	MY28891	HUBER+SUHNER	2021/5/14	2022/5/13
ETSTW-Cable 071	N TYPE CABLE	EMCCFD400-NM-NM-25000	170239	EMCI	2021/6/4	2022/6/3
ETSTW-Cable 072	SMA type cable (8m)	SUCOFLEX 104	805800/4	HUBER+SUHNER	2021/5/14	2022/5/13
ETSTW-Cable 074	SMA type cable (2m)	SUCOFLEX 104	802563/4	HUBER+SUHNER	2021/5/14	2022/5/13
WTSTW-SW 002	EMI TEST SOFTWARE	EZ EMC	None	Farad	Version ETS-03A1 Version EMEC-3A1+	
WTSTW-SW 006	EMI TEST SOFTWARE	e3	None	AUDIX	Version 9.161014	
WTSTW-SW 008	Signal studio	Agilent	None	AUDIX	Version 2.0.0.1	
ETSTW-TH 002	Thermohygrometer	608-H1	45204317	Testo	2021/10/18	2022/10/17
ETSTW-TH 003	Wireless weather station	GAIA	N/A	TFA	2021/10/18	2022/10/17



Registration number: W6M22110-21258-C-5
FCC ID: 2AED9-RL603

2.4 General Test Procedure

POWER LINE CONDUCTED INTERFERENCE: The procedure used was ANSI STANDARD C63.10-2013 6.2 using a LISN (if necessary). Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

RADIATION INTERFERENCE: The test procedure used was according to ANSI STANDARD C63.10-2013 6.3 employing a spectrum analyzer. For investigated frequency is equal to or below 1GHz, the RBW and VBW of the spectrum analyzer was 100 kHz and 100kHz respectively with an appropriate sweep speed. For investigated frequency is above 1GHz, both of RBW and VBW of the spectrum analyzer were 1 MHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBμV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB.

Example:


Freq (MHz)	METER READING + ACF + CABLE LOSS (to the receiver) = FS
33	20 dBμV + 10.36 dB + 6 dB = 36.36 dBμV/m @3m

The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m (non metallic table) and arranged according to ANSI C63.10-2013 Section 6.2.2. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to the frequency specified as follows:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1)-(a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this Section, whichever is the higher frequency range of investigation.

For hand-held devices, a exploratory test was performed with three (3) orthogonal planes to determine the highest emissions.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.



Registration number: W6M22110-21258-C-5

FCC ID: 2AED9-RL603

When the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

The formula is as follows:


Average = Peak + Duty Factor

Duty Factor = $20 \log (\text{dwell time}/T)$

T = 100ms when the pulse train period is over 100 ms or the period of the pulse train.

Modified Limits for peak according to 15.35 (b) = Max Permitted average Limits + 20dB

ANSI STANDARD C63.10-2013 B.2.7: Any measurements that utilize special test software shall be indicated and referenced in the test report. During testing, test software 'EZ EMC' was used for setting up different operation modes.



Registration number: W6M22110-21258-C-5
FCC ID: 2AED9-RL603

3 Test results (enclosure)

TEST CASE	Para. Number	Required	Test passed	Test failed
Output Power Field Strength	15.225 (a) (b) (c)	☒	☒	☐
Out of Band Radiated Emissions	15.225 (d)	☒	☒	☐
Band Edge	15.225 (d)	☒	☒	☐
Occupied Bandwidth	2.1049	☒	☒	☐
Frequency Stability	15.225 (e)	☒	☒	☐
Power Line Conducted Emission	15.207 (a)	☒	☒	☐

The following is intentionally left blank.



Registration number: W6M22110-21258-C-5
FCC ID: 2AED9-RL603

3.1 Output Power (Field Strength)

FCC Rules: 15.225 (a) (b) (c), 15.205, 15.209, 15.35

Operation within the band 13.110 - 14.010 MHz

Limit


(a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

(b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

Measurement Results:

The field strength at 3 meter distance as 59.17 dB μ V/m. Extrapolated with 40dB to 30 meter distance it would be 19.17 dB μ V/m.

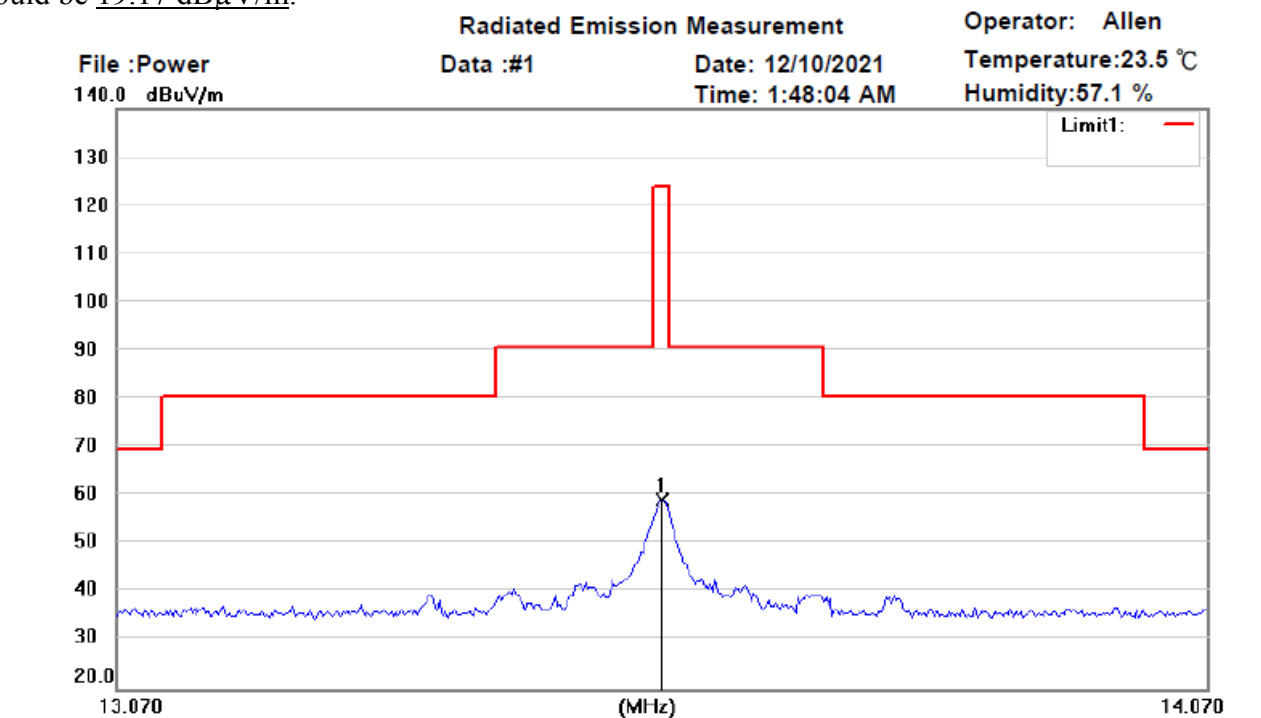

Site : Chamber

Condition : FCC 15.225 power (3m)(13.56MHz)

EUT : W6M22110-21258

M/N:

Test Mode : TX 13.56MHz

Note :

Polarization:

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	13.5617	25.41	peak	33.76	59.17	124.00	100	360	-64.83	RF Power

Test equipment used: ETSTW-RE 027, ETSTW-RE 055



Registration number: W6M22110-21258-C-5

FCC ID: 2AED9-RL603

3.2 Out of Band Radiated Emissions

(d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

Frequency of Emission (MHz)	Limit	Measurement distance
0.009 – 0.490	2400 / f (KHz)	300
0.49 – 1.705	24000 / f (KHz)	30
1.705 – 30	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

Calculation of test results:

Such factors like antenna correction, cable loss, external attenuation etc. are already included in the provided measurement results. This is done by using validated test software and calibrated test system according the accreditation requirements.

Summary table with radiated data of the test plots

Model: 3525DFR Date: --
Mode: -- Temperature: -- °C Engineer: --
Polarization: Horizontal Humidity: -- %

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

Note

1. Correction Factor = Antenna factor + Cable loss - Preamplifier
2. The formula of measured value as: Test Result = Reading + Correction Factor
3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
4. All not in the table noted test results are more than 20 dB below the relevant limits.
5. See attached diagrams in appendix.

Explanation: See attached diagrams for above 30MHz in appendix. For receiver part of above 30 MHz, Please refer to test report no.: W6M22110-21258-P-15B.

All other not noted test plots do not contain significant test results in relation to the limits

Test results: The unit meet the FCC requirements.

Test equipment used: ETSTW-RE 004, ETSTW-RE 027, ETSTW-RE 142, ETSTW-RE 147, ETSTW-RE 062




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22110-21258-C-5

FCC ID: 2AED9-RL603

Test result of Band Edge

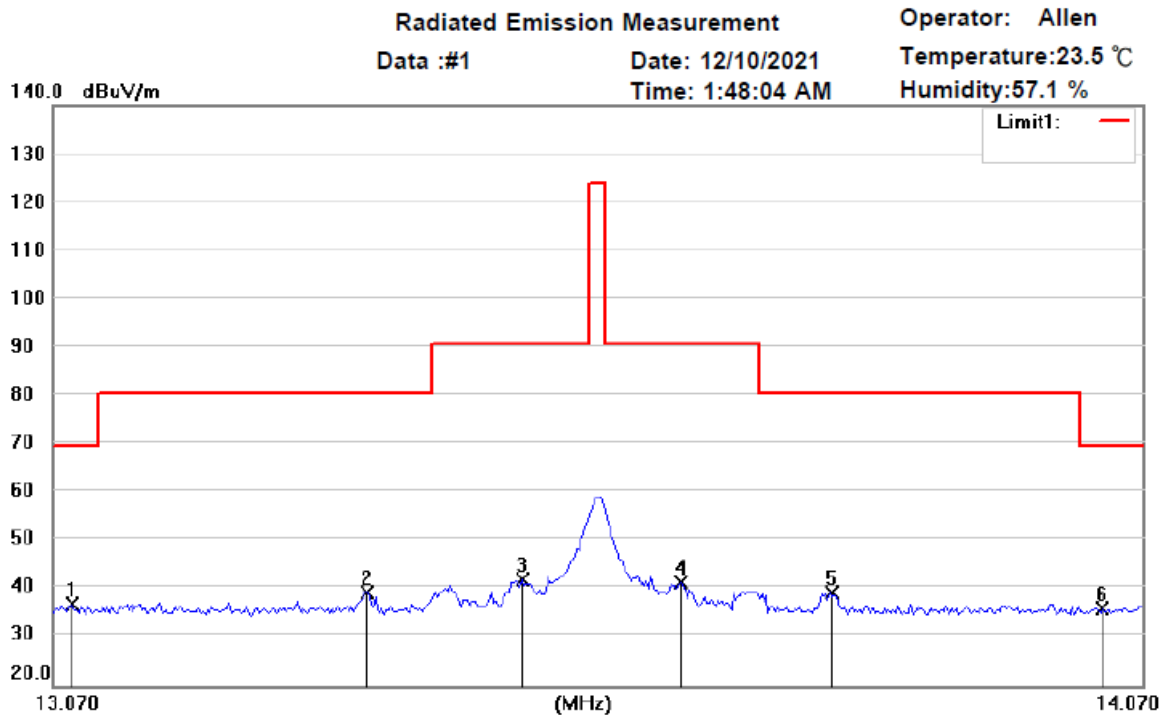

Site : Chamber

Condition : FCC 15.225 bandedge (3m)(13.56MHz)

EUT : W6M22110-21258

M/N:

Test Mode : TX 13.56MHz

Note :

Polarization:

Power : 120 V.a.c.

Distance: 3m


Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	13.0874	3.11	peak	33.81	36.92	69.50	100	360	-32.58	
	13.3510	5.70	peak	33.78	39.48	80.50	100	360	-41.02	
	13.4918	8.30	peak	33.76	42.06	90.50	100	360	-48.44	
	13.6381	7.68	peak	33.75	41.43	90.50	100	360	-49.07	
	13.7760	5.52	peak	33.73	39.25	80.50	100	360	-41.25	
	14.0326	2.37	peak	33.71	36.08	69.50	100	360	-33.42	

Test equipment used: ETSTW-RE 055

Registration number: W6M22110-21258-C-5
FCC ID: 2AED9-RL603

3.3 Occupied Bandwidth

Test date: December 14, 2021
Temperature: 23.5°C
Humidity: 52.1 %
Tester: Allen

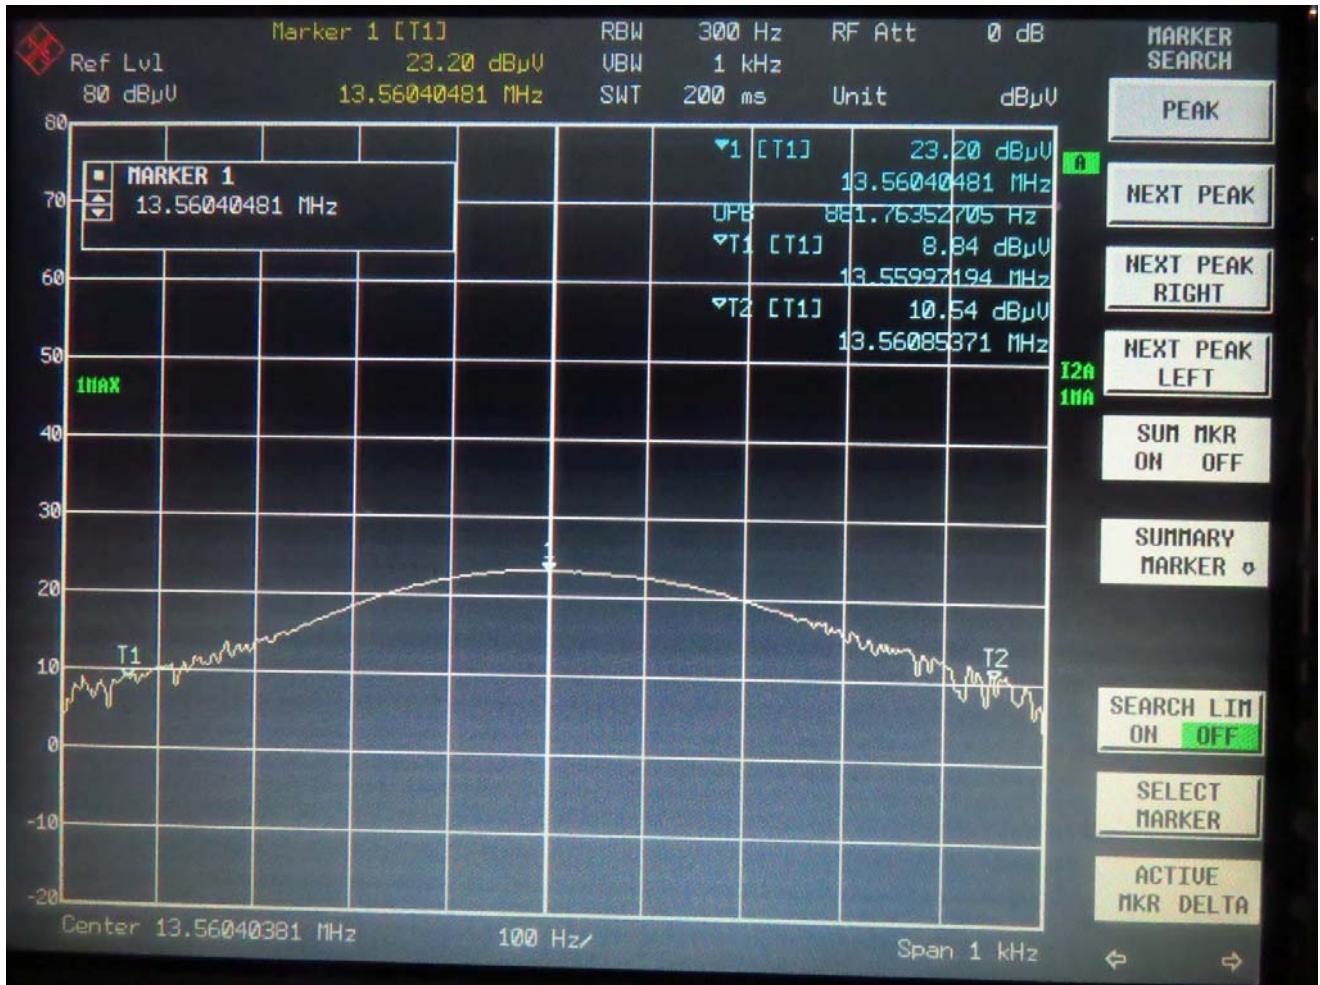

Test equipment used: ETSTW-RE 055, ETSTW-RE 064



Registration number: W6M22110-21258-C-5
FCC ID: 2AED9-RL603

3.4 Frequency tolerance

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20°C to +50°C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20°C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Test date: December 16, 2021

Temperature: 22.7°C


Humidity: 58.0 %

Tester: Rick

Measurement Results:

Test Voltage 12V	On time	Carrier Freq.	Deviation	Result
	0 min	13.560468	0.000	0 ppm
	*2min	13.560468	0.000	0 ppm
	5min	13.560468	0.000	0 ppm
	10min	13.560468	0.000	0 ppm
Test Voltage 10.2V	On time	Carrier Freq.	Deviation	Result
	0 min	13.560468	0.000	0 ppm
	2min	13.560468	0.000	0 ppm
	5min	13.560468	0.000	0 ppm
	10min	13.560468	0.000	0 ppm
Test Voltage 13.8V	On time	Carrier Freq.	Deviation	Result
	0 min	13.560468	0.000	0 ppm
	2min	13.560468	0.000	0 ppm
	5min	13.560468	0.000	0 ppm
	10min	13.560468	0.000	0 ppm

*Represent test standard frequency




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22110-21258-C-5
FCC ID: 2AED9-RL603

Test Temp	On time	Carrier Freq.	Deviation	Result
50°C	0 min	13.560404	-0.051	-3.76 ppm
50°C	2min	13.560404	-0.051	-3.76 ppm
50°C	5min	13.560404	-0.051	-3.76 ppm
50°C	10min	13.560404	-0.051	-3.76 ppm
40°C	0 min	13.560417	-0.038	-2.8 ppm
40°C	2min	13.560417	-0.038	-2.8 ppm
40°C	5min	13.560417	-0.038	-2.8 ppm
40°C	10min	13.560417	-0.038	-2.8 ppm
30°C	0 min	13.560442	-0.013	-0.96 ppm
30°C	2min	13.560442	-0.013	-0.96 ppm
30°C	5min	13.560442	-0.013	-0.96 ppm
30°C	10min	13.560442	-0.013	-0.96 ppm
20°C	0 min	13.560455	0.000	0 ppm
*20°C	2min	13.560455	0.000	0 ppm
20°C	5min	13.560455	0.000	0 ppm
20°C	10min	13.560455	0.000	0 ppm
10°C	0 min	13.560468	0.013	0.96 ppm
10°C	2min	13.560468	0.013	0.96 ppm
10°C	5min	13.560468	0.013	0.96 ppm
10°C	10min	13.560468	0.013	0.96 ppm
0°C	0 min	13.560538	0.083	6.12 ppm
0°C	2min	13.560538	0.083	6.12 ppm
0°C	5min	13.560538	0.083	6.12 ppm
0°C	10min	13.560538	0.083	6.12 ppm
-10°C	0 min	13.560542	0.087	6.42 ppm
-10°C	2min	13.560542	0.087	6.42 ppm
-10°C	5min	13.560542	0.087	6.42 ppm
-10°C	10min	13.560542	0.087	6.42 ppm
-20°C	0 min	13.560545	0.090	6.64 ppm
-20°C	2min	13.560545	0.090	6.64 ppm
-20°C	5min	13.560545	0.090	6.64 ppm
-20°C	10min	13.560545	0.090	6.64 ppm

*Represent test standard frequency

Test equipment used: ETSTW-RE 055, ETSTW-CE 009




Registration number: W6M22110-21258-C-5

FCC ID: 2AED9-RL603


3.5 Power Line Conducted Emission

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the table bellows with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

This measurement was transact first with instrumentation using an average and peak detector and a 10 kHz bandwidth. If the peak detector achieves a calculated level, the measurement is repeated by an instrumentation using a quasi-peak detector.

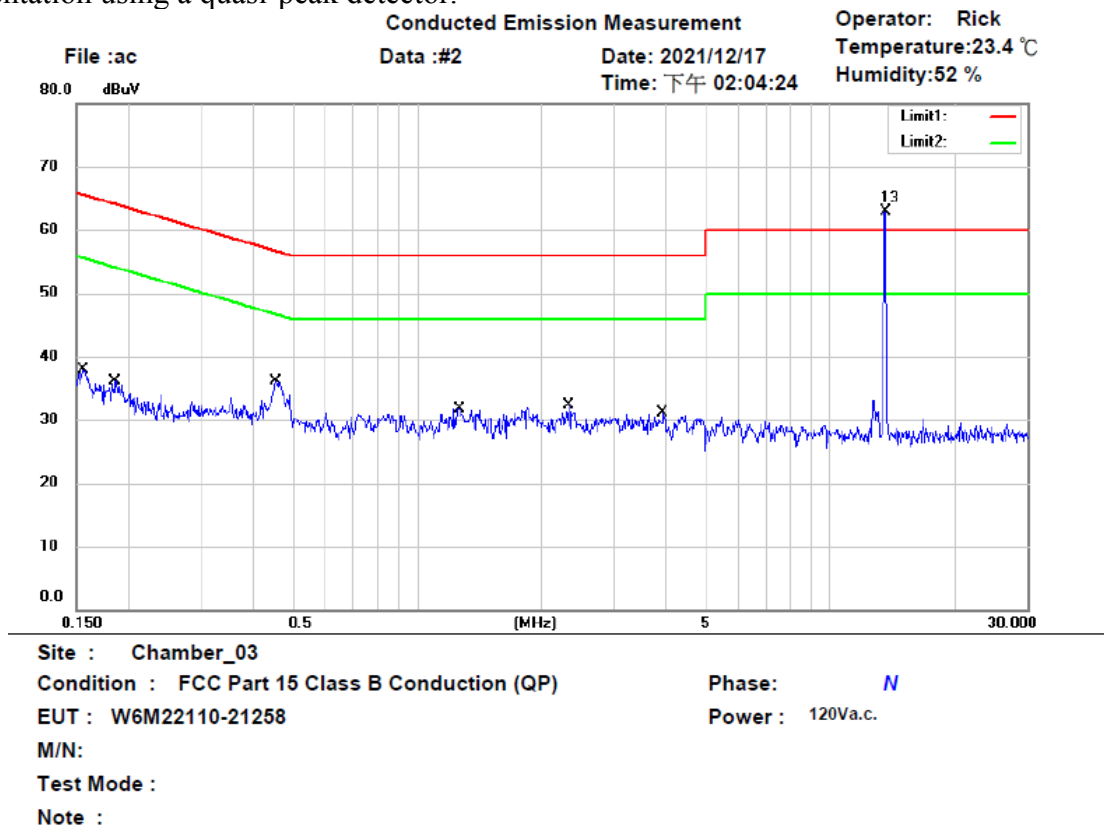


Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corrected factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Comment
	0.1552	26.93	QP	9.61	36.54	65.72	-29.18	
	0.1552	23.90	AVG	9.61	33.51	55.72	-22.21	
	0.1864	22.61	QP	9.61	32.22	64.20	-31.98	
	0.1864	20.27	AVG	9.61	29.88	54.20	-24.32	
	0.4552	20.47	QP	9.46	29.93	56.78	-26.85	
	0.4552	16.19	AVG	9.46	25.65	46.78	-21.13	
	1.2628	10.16	QP	9.71	19.87	56.00	-36.13	
	1.2628	5.43	AVG	9.71	15.14	46.00	-30.86	
	2.3315	9.72	QP	9.78	19.50	56.00	-36.50	
	2.3315	4.84	AVG	9.78	14.62	46.00	-31.38	
	3.9312	6.49	QP	9.84	16.33	56.00	-39.67	
	3.9312	2.00	AVG	9.84	11.84	46.00	-34.16	
*	13.5625	52.72	peak	10.15	62.87	60.00	2.87	RF POWER



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22110-21258-C-5
FCC ID: 2AED9-RL603

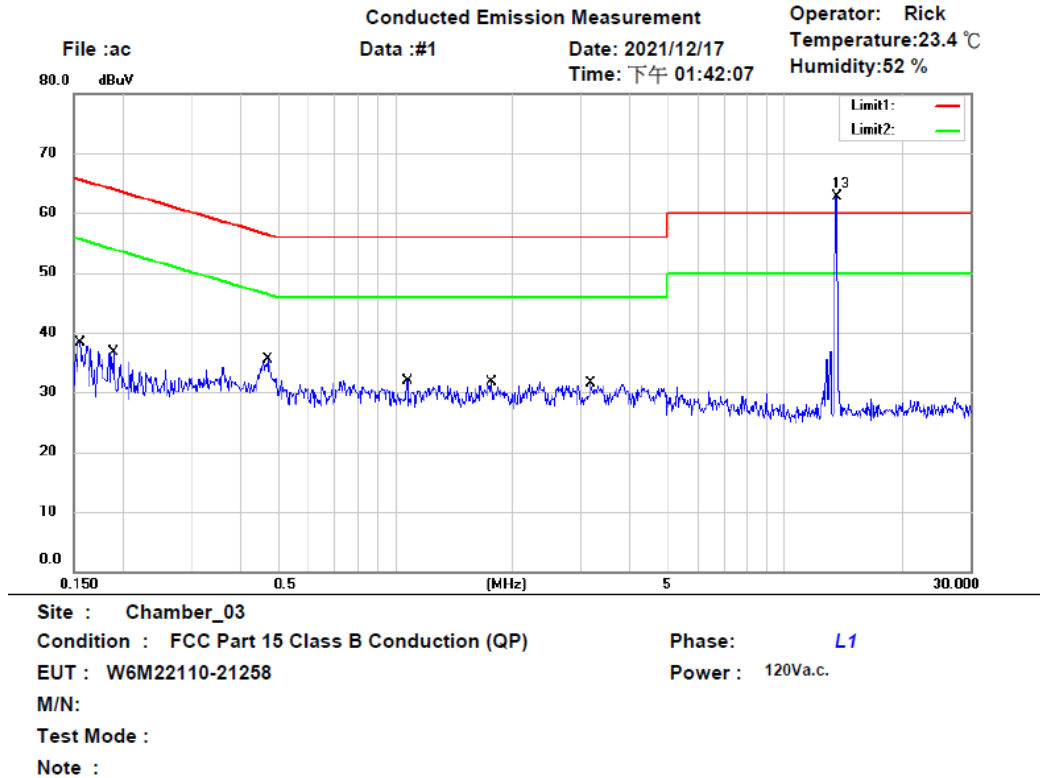


Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corrected factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Comment
	0.1550	23.07	QP	9.62	32.69	65.73	-33.04	
	0.1550	16.09	AVG	9.62	25.71	55.73	-30.02	
	0.1890	19.68	QP	9.62	29.30	64.08	-34.78	
	0.1890	9.01	AVG	9.62	18.63	54.08	-35.45	
	0.4701	19.85	QP	9.48	29.33	56.51	-27.18	
	0.4701	15.53	AVG	9.48	25.01	46.51	-21.50	
	1.0715	4.43	QP	9.69	14.12	56.00	-41.88	
	1.0715	-0.44	AVG	9.69	9.25	46.00	-36.75	
	1.7668	10.97	QP	9.74	20.71	56.00	-35.29	
	1.7668	6.17	AVG	9.74	15.91	46.00	-30.09	
	3.1888	9.73	QP	9.79	19.52	56.00	-36.48	
	3.1888	5.00	AVG	9.79	14.79	46.00	-31.21	
*	13.5625	52.68	peak	10.03	62.71	60.00	2.71	RF POWER

- Note: 1. The formula of measured value as: Test Result = Reading + Correction Factor
2. The Correction Factor = Cable Loss + LISN Insertion Loss + Pulse Limit Loss
3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
4. All not in the table noted test results are more than 20 dB below the relevant limits.
5. Up Line: QP Limit Line, Down Line: Ave Limit Line.

Limits:

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi Peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Test equipment used: ETSTW-CE 001, ETSTW-CE 016, ETSTW-RE 045.



Registration number: W6M22110-21258-C-5
FCC ID: 2AED9-RL603

Appendix

Measurement diagrams

Radiated Emissions



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
 Tel: +886-2-6606-8877
 Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Allen

File :1

Data :#1


Date: 12/9/2021

Temperature: 23.3 °C

152.0 dBuV/m

Time: 6:58:40 AM

Humidity: 53.9 %

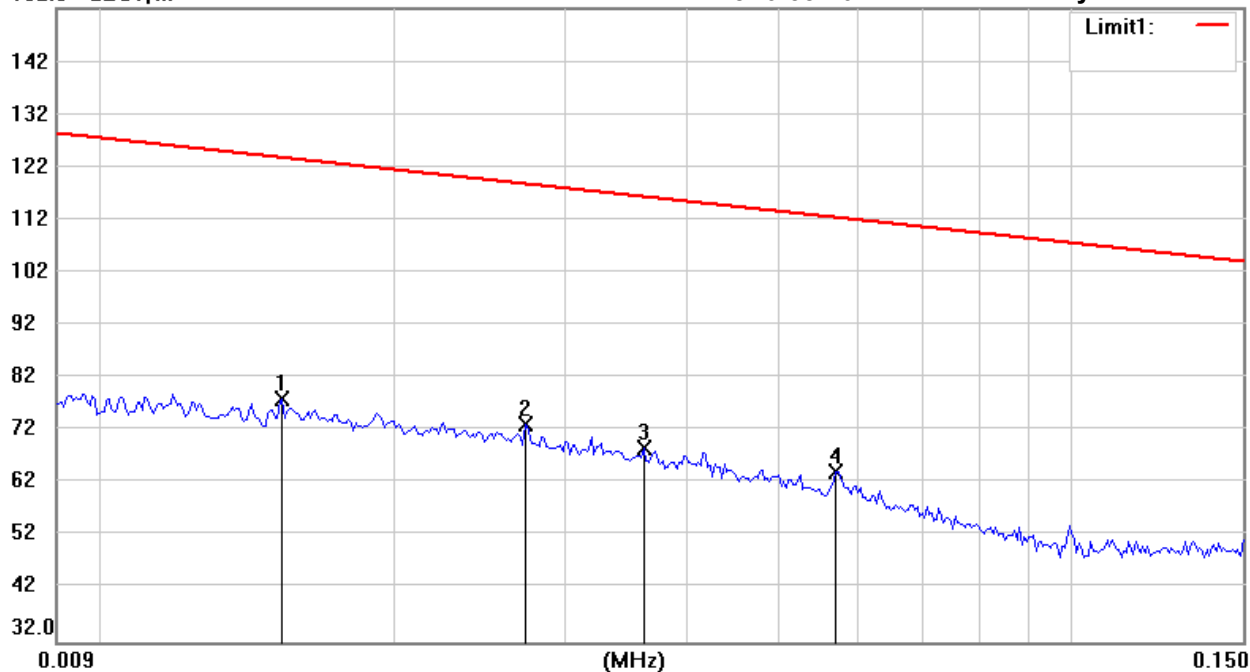

Site : Chamber

Condition : FCC 15.225 RE (3m)(13.56MHz)

EUT : W6M22110-21258

M/N:

Test Mode : TX 13.56MHz

Note :

Polarization:

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	0.0154	-3.91	peak	81.88	77.97	123.85	100	225	-45.88	
*	0.0273	-4.07	peak	77.35	73.28	118.87	100	130	-45.59	
	0.0362	-6.24	peak	74.90	68.66	116.42	100	65	-47.76	
	0.0572	-6.53	peak	70.75	64.22	112.45	100	185	-48.23	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Allen

File : 2

Data : #1


Date: 12/9/2021

Temperature: 23.3 °C

132.0 dBuV/m

Time: 7:13:26 AM

Humidity: 53.9 %

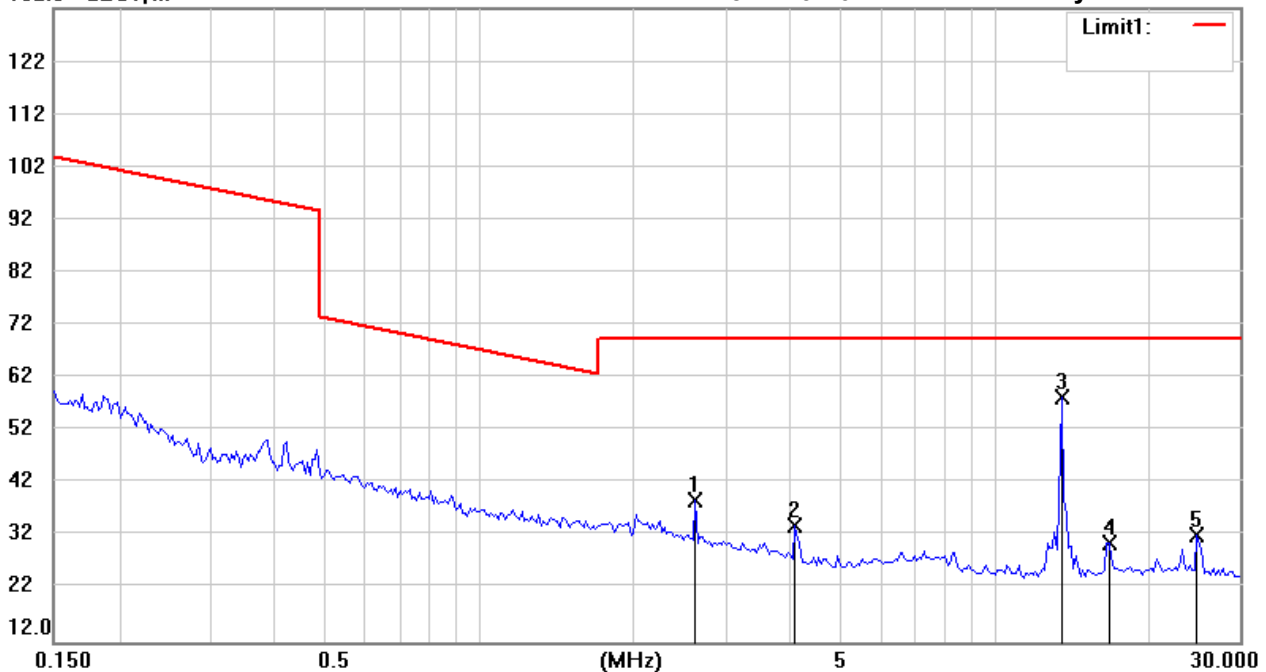

Site : Chamber

Condition : FCC 15.225 RE (3m)(13.56MHz)

EUT : W6M22110-21258

M/N:

Test Mode : TX 13.56MHz

Note :

Polarization:

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2.6371	-0.99	peak	39.71	38.72	69.54	100	72	-30.82	
	4.1192	-2.36	peak	36.36	34.00	69.54	100	280	-35.54	
*	13.5293	24.53	peak	33.76	58.29	69.54			-11.25	RF Power
	16.7302	-2.64	peak	33.43	30.79	69.54	100	135	-38.75	
	24.7810	-0.46	peak	32.80	32.34	69.54	100	163	-37.20	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Allen

File :3

Data :#1


Date: 12/9/2021

Temperature: 23.3 °C

80.0 dBuV/m

Time: 6:10:56 AM

Humidity: 53.9 %

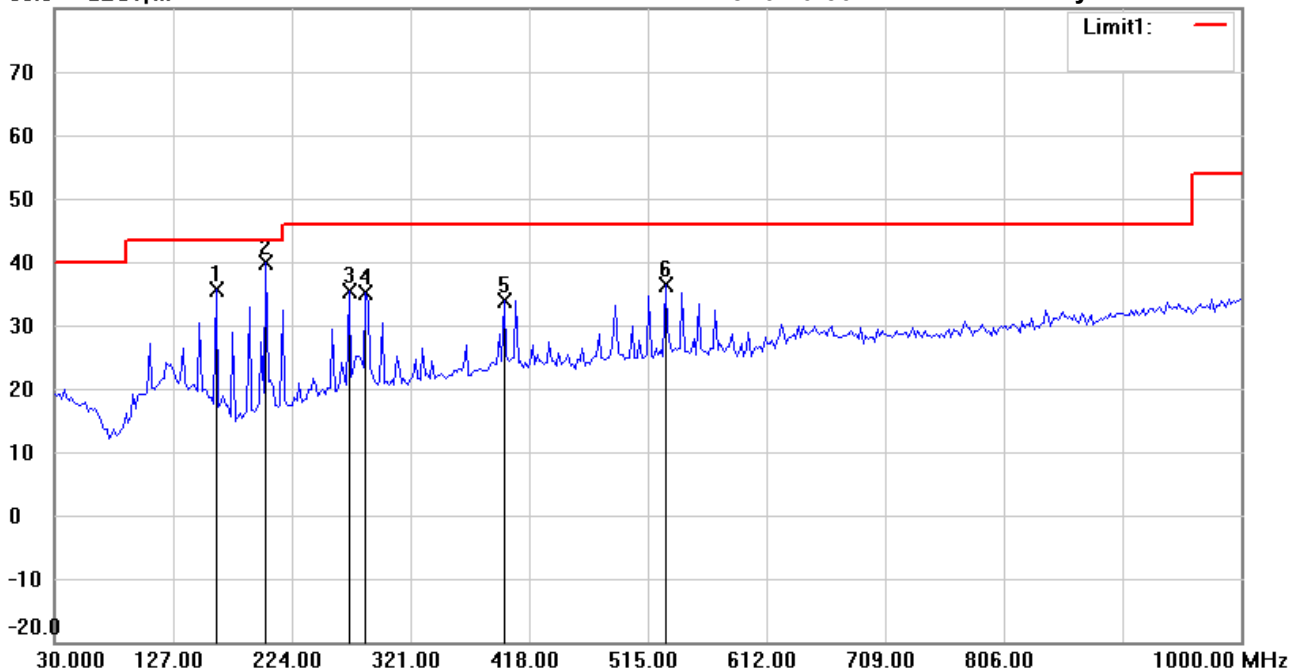

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M22110-21258

M/N:

Test Mode : TX 13.56MHz

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	162.1844	44.86	peak	-9.28	35.58	43.50	100	58	-7.92	
*	203.0060	50.30	peak	-10.43	39.87	43.50	135	260	-3.63	
	271.0421	41.65	peak	-6.28	35.37	46.00	100	331	-10.63	
	284.6492	40.85	peak	-5.78	35.07	46.00	114	125	-10.93	
	397.3948	37.39	peak	-3.41	33.98	46.00	127	76	-12.02	
	529.5792	38.12	peak	-1.66	36.46	46.00	108	180	-9.54	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Allen

File :3

Data :#2


Date: 12/9/2021

Temperature: 23.3 °C

80.0 dBuV/m

Time: 6:12:52 AM

Humidity: 53.9 %

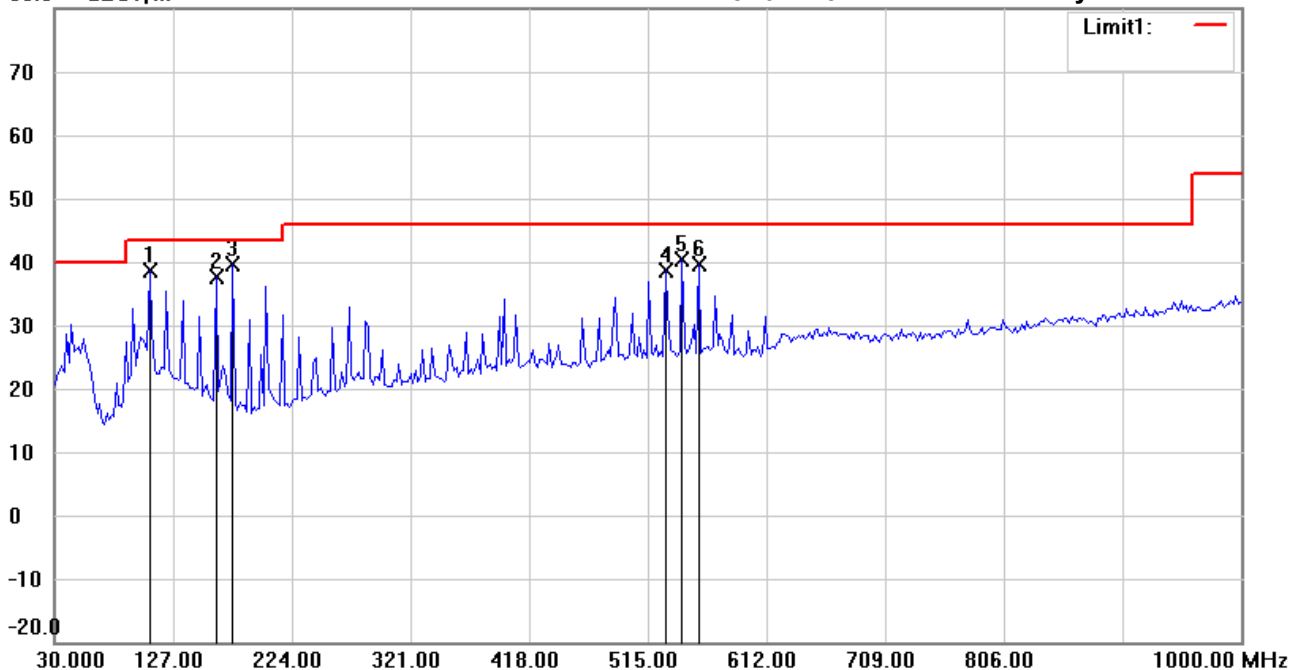

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M22110-21258

M/N:

Test Mode : TX 13.56MHz

Note :

Polarization: *Vertical*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	107.7555	46.31	peak	-7.60	38.71	43.50	141	55	-4.79	
	162.1844	46.94	peak	-9.28	37.66	43.50	128	39	-5.84	
*	175.7916	50.58	peak	-10.99	39.59	43.50	100	180	-3.91	
	529.5792	40.34	peak	-1.66	38.68	46.00	137	282	-7.32	
	543.1864	41.66	peak	-1.38	40.28	46.00	113	248	-5.72	
	556.7936	41.00	peak	-1.30	39.70	46.00	106	300	-6.30	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
 Tel: +886-2-6606-8877
 Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Allen

File :1

Data :#1


Date: 12/9/2021

Temperature: 23.3 °C

152.0 dBuV/m

Time: 7:08:26 AM

Humidity: 53.9 %

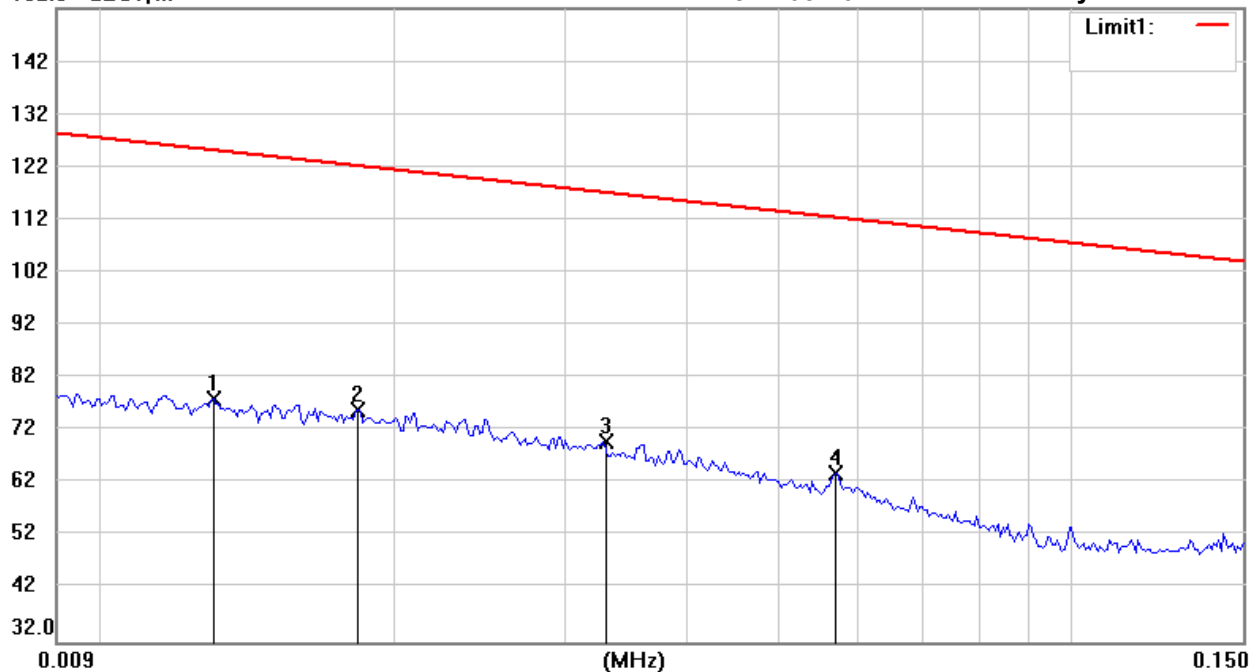

Site : Chamber

Condition : FCC 15.225 RE (3m)(13.56MHz)

EUT : W6M22110-21258

M/N:

Test Mode : RX 13.56MHz

Note :

Polarization:

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	0.0131	-4.73	peak	82.75	78.02	125.25	100	236	-47.23	
*	0.0184	-4.72	peak	80.73	76.01	122.30	100	15	-46.29	
	0.0330	-5.68	peak	75.63	69.95	117.23	100	180	-47.28	
	0.0572	-6.93	peak	70.75	63.82	112.45	100	342	-48.63	

*:Maximum data x:Over limit !:over margin



Radiated Emission Measurement

Operator: Allen

File :2

Data :#1


Date: 12/9/2021

Temperature:23.3 °C

132.0 dBuV/m

Time: 7:17:12 AM

Humidity:53.9 %

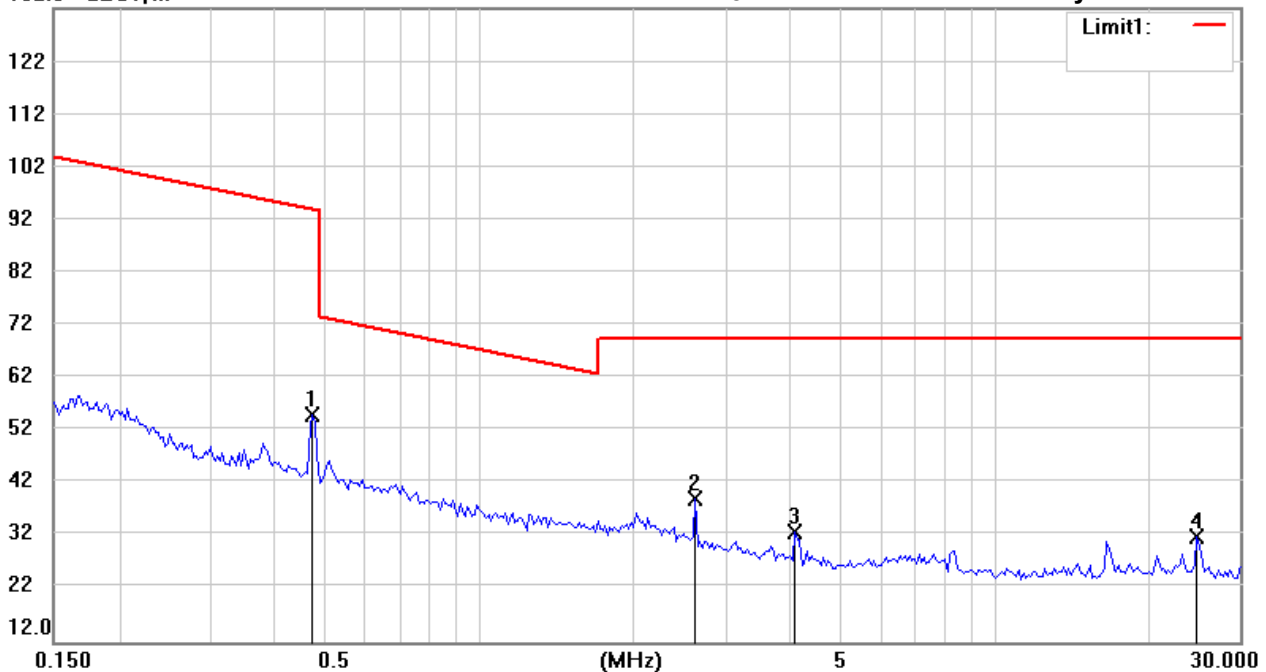

Site : Chamber

Condition : FCC 15.225 RE (3m)(13.56MHz)

EUT : W6M22110-21258

M/N:

Test Mode : RX 13.56MHz

Note :

Polarization:

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	0.4772	2.57	peak	52.37	54.94	94.03	100	97	-39.09	
*	2.6371	-0.63	peak	39.71	39.08	69.54	100	260	-30.46	
	4.1192	-3.49	peak	36.36	32.87	69.54	100	43	-36.67	
	24.7810	-0.82	peak	32.80	31.98	69.54	100	315	-37.56	