# **FCC Test Report**

Report No.: AGC04017150201FE03

FCC ID : 2AEDGP220

**APPLICATION PURPOSE**: Original Equipment

**PRODUCT DESIGNATION**: Petkit P2

**BRAND NAME** : PETKIT

MODEL NAME : P120

**CLIENT**: SHANGHAI PETKIT NETWORK TECHNOLOGY CO., LTD.

**DATE OF ISSUE** : Apr.24,2015

STANDARD(S)

TEST PROCEDURE(S) : FCC Part 15 Rules

**REPORT VERSION**: V1.0

## Attestation of Global Compliance (Shenzhen) Co., Ltd

## **CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Page 2 of 44

## **REPORT REVISE RECORD**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	1	Apr.24,2015 Valid O		Original Report

## **TABLE OF CONTENTS**

1. VERIFICATION OF CONFORMITY	5
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION	6
2.2. TABLE OF CARRIER FREQUENCYS	6
3. MEASUREMENT UNCERTAINTY	7
4. DESCRIPTION OF TEST MODES	7
5. SYSTEM TEST CONFIGURATION	8
5.1. CONFIGURATION OF EUT SYSTEM	8
5.2. EQUIPMENT USED IN EUT SYSTEM	8
5.3. SUMMARY OF TEST RESULTS	8
6. TEST FACILITY	9
7 ALL TEST EQUIPMENT LIST	9
8. RADIATED EMISSION	10
8.1TEST LIMIT	10
8.2. MEASUREMENT PROCEDURE	
8.3. TEST SETUP	
8.4. TEST RESULT(Worst MODULATION:GFSK)	15
9. BAND EDGE EMISSION	28
9.1. MEASUREMENT PROCEDURE	28
9.2 TEST SETUP	28
9.3 RADIATED TEST RESULT(Worst modulation:GFSK)	29
10 20DB BANDWIDTH	33
10.1. MEASUREMENT PROCEDURE	33
10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
10.3. LIMITS AND MEASUREMENT RESULTS	33
11. FCC LINE CONDUCTED EMISSION TEST	36

Page 4 of 44

APPENDIX B: PHOTOGRAPHS OF EUT	39
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	38
11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	37
11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION	TEST37
11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED E	MISSION TEST37
11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION T	EST36
11.1. LIMITS OF LINE CONDUCTED EMISSION TEST	36

Page 5 of 44

#### 1. VERIFICATION OF CONFORMITY

Applicant	SHANGHAI PETKIT NETWORK TECHNOLOGY CO., LTD.		
Address	Room 106, No.22 Boxia Road, Shanghai, China		
Manufacturer	SHANGHAI PETKIT NETWORK TECHNOLOGY CO., LTD.		
Address	Room 106, No.22 Boxia Road, Shanghai, China		
Product Designation	Petkit P2		
Brand Name	PETKIT		
Test Model	P120		
Date of test	Apr.22,2015 to Apr.23,2015		
Deviation	None		
Condition of Test Sample	Normal		
Report Template	AGCRT-US-BR/RF		

We hereby certify that:

The above equipment was tested by Compliance Certification Service(Shenzhen) Inc.. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.249.

Prepared By

Water Zuo Apr.24,2015

Checked By

Forrest Lei Apr.24,2015

Authorized By

Solger Zhang Apr.24,2015

Page 6 of 44

## 2. GENERAL INFORMATION

## 2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz
RF Output Power	1.4dBm(Max)
Bluetooth Version	V4.0
Modulation	GFSK
Number of channels	40
Hardware Version	V3.3.2
Software Version	V4.0
Antenna Designation	Ceramic Antenna (Met 15.203 Antenna requirement)
Antenna Gain	-2dBi
Power Supply	DC3V

## 2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
	0	2402MHZ
	1	2404MHZ
	:	:
2400 2402 5MUZ	19	2440 MHZ
2400~2483.5MHZ	20	2442 MHZ
	:	:
	38	2478 MHZ
	39	2480 MHZ

Page 7 of 44

## 3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y  $\pm U$ , where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %  $\sim$ 

No.	Item	Uncertainty
1	Conducted Emission Test	±3.18dB
2	All emissions,radiated	±3.91dB
3	Temperature	±0.5°C
4	Humidity	±2%

## 4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION		
1	Low channel GFSK		
2	Middle channel GFSK		
3	High channel GFSK		
4	Normal operation (BT)		


- 1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.

Page 8 of 44

## **5. SYSTEM TEST CONFIGURATION**

## **5.1. CONFIGURATION OF EUT SYSTEM**

Configure 1: (Normal hopping)



Configure 2: (Control continuous TX)



## **5.2. EQUIPMENT USED IN EUT SYSTEM**

Item	Item Equipment Model No. ID		ID or Specification	Remark
1	Petkit P2	PETKIT	P120	EUT
2	2 Control box		N/A	A.E
3	PC	Dell	INSPIRON	A.E

## **5.3. SUMMARY OF TEST RESULTS**

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249	Radiated Emission	Compliant
§15.249	Band Edges	Compliant
§15.207	Conduction Emission	N/A

Page 9 of 44

## **6. TEST FACILITY**

Site	Compliance Certification Service(Shenzhen) Inc.				
Location	No.10-1 Mingkeda Logistics Park, No.18 Huanguan South RD. Guan lan Town,Baoan Distr				
FCC Registration No.	441872				
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2009.				

## **7 ALL TEST EQUIPMENT LIST**

Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Spectrum Analyzer	Agilent	E4407B	MY50140340	2014.10.25	2015.10.24
Test Receiver	R&S	ESCI	101427	2014.10.25	2015.10.24
Bilog Antenna	TESEQ	CBL6111D	34678	2014.10.27	2015.10.26
50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2014.06.06	2015.06.06
Horn Antenna	R&S	9120D	152265	2014.10.27	2015.10.26
Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2014.07.06	2015.07.05
Amplifier	EM	EM-30180	060538	2014.12.22	2015.12.21
Loop Antenna	ARA	PLA-1030/B	1029	2014.06.08	2015.06.07
Power Meter	Anritsu	ML2495A	1204003	2014.10.25	2015.10.24
Power Sensor	Anritsu	MA2411B	100309	2014.10.25	2015.10.24

Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	
Test Receiver	R&S	102086	102086	2014.10.25	2015.10.24	
LISN	R&S	ENV216	101242	2014.10.25	2015.10.24	
LISN	EMCO	3810/2NM	000-23625	2014.10.25	2015.10.24	
50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2014.06.06	2015.06.06	
Passive Voltage Probe	R&S	ESH2-Z3	100196	2014.06.06	2015.06.06	
Absorbing clamp	R&S	MDS-21	100668	2014.10.27	2015.10.26	

Page 10 of 44

## 8. RADIATED EMISSION

## 8.1TEST LIMIT

#### Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental	Field Strength of Harmonics		
	(millivolts/meter)	(microvolts/meter)		
900-928MHz	50	500		
2400-2483.5MHz	50	500		
5725-5875MHz	50	500		
24.0-24.25GHz	250	2500		

#### Standard FCC 15.209

Frequency	Distance	Field	Strengths Limit
(MHz) Meters		μ <b>V/m</b>	dB(μV)/m
0.009 ~ 0.490	300	2400/F(kHz)	
0.490 ~ 1.705	30	24000/F(kHz)	
1.705 ~ 30	30	30	
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Other:74.0 dB(µV)/m	(Peak) 54.0 dB(μV)/m (Average)

Remark:

- (1) Emission level dB  $\mu$  V = 20 log Emission level  $\mu$  V/m
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

Report No.: AGC04017150201FE03 Page 11 of 44

#### **8.2. MEASUREMENT PROCEDURE**

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.

- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

Report No.: AGC04017150201FE03 Page 12 of 44

The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting				
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP				
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP				
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP				
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/1MHz for Peak, 1MHz/10Hz for Average				

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP


Page 13 of 44

## 8.3. TEST SETUP

Radiated Emission Test-Setup Frequency Below 30MHz

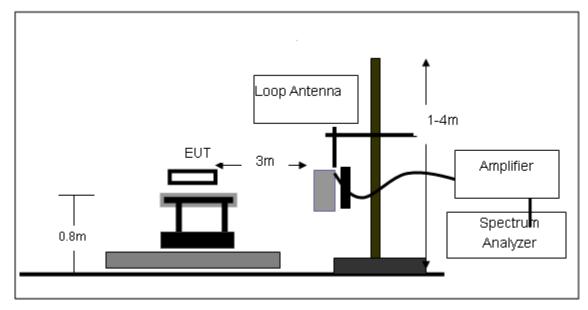


## RADIATED EMISSION TEST SETUP 30MHz-1000MHz

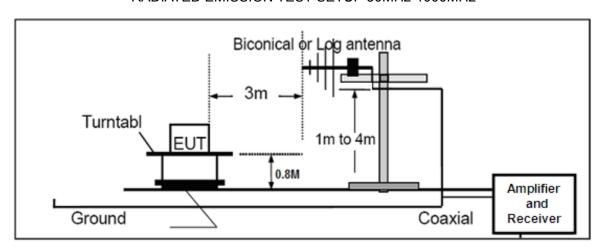

Page 14 of 44

## RADIATED EMISSION TEST SETUP ABOVE 1000MHz

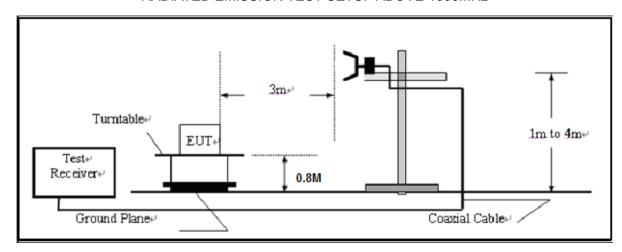

Page 15 of 44


## 8.4. TEST RESULT(Worst modulation:GFSK)

## **RADIATED EMISSION BELOW 30MHZ**

No emission found between lowest internal used/generated frequencies to 30MHz.

## **RADIATED EMISSION BELOW 1GHZ**

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL

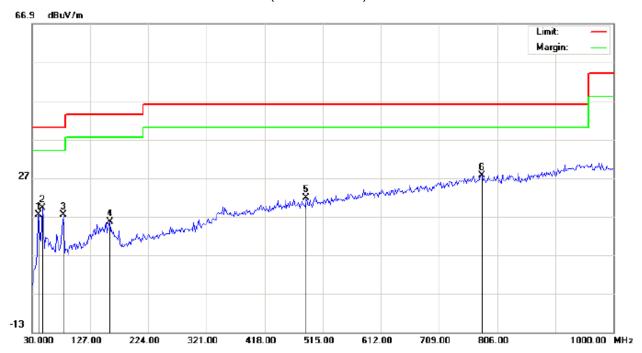

Site: site #1

Limit: FCC Class B 3M Radiation

EUT:Petkit P2 M/N:P120

Mode: Low Channel TX

Note:


Polarization: *Horizontal* Temperature: 26
Power: Humidity: 60 %

Distance: 3m

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu√/m	dB		cm	degree	
1		41.3167	5.59	11.81	17.40	40.00	-22.60	peak			
2		47.7833	7.83	11.39	19.22	40.00	-20.78	peak			
3		81.7333	7.75	9.73	17.48	40.00	-22.52	peak			
4		159.3333	0.25	15.33	15.58	43.50	-27.92	peak			
5		487.5167	0.72	21.00	21.72	46.00	-24.28	peak			
6	*	780.1333	0.48	27.05	27.53	46.00	-18.47	peak			

Page 16 of 44

## RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL

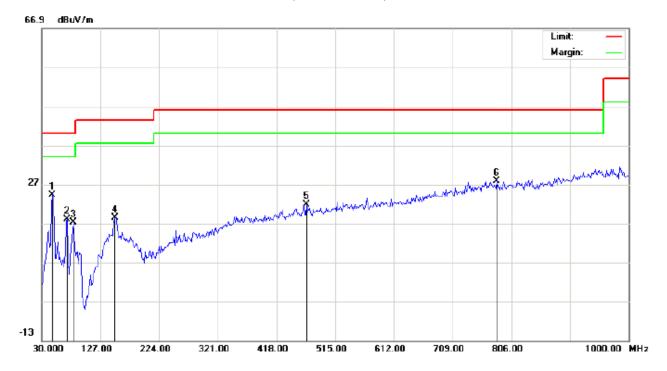

Site: site #1

Limit: FCC Class B 3M Radiation

EUT:Petkit P2 M/N:P120

Mode: Low Channel TX

Note:

Polarization:	Vertical	Temperature: 26	ì
Power:		Humidity: 60 %	

Distance: 3m

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	47.7833	15.91	8.39	24.30	40.00	-15.70	peak			
2		72.0333	14.16	3.76	17.92	40.00	-22.08	peak			
3		81.7333	14.82	2.42	17.24	40.00	-22.76	peak			
4		151.2500	3.06	15.27	18.33	43.50	-25.17	peak			
5		468.1167	0.99	20.79	21.78	46.00	-24.22	peak			
6		781.7500	0.83	27.07	27.90	46.00	-18.10	peak			


## **RESULT: PASS**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 17 of 44

## RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL

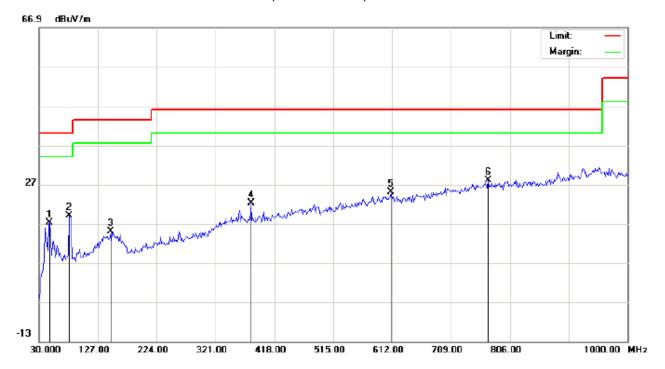

Site: site #1 Limit: FCC Class B 3M Radiation

EUT:Petkit P2 M/N:P120

Mode: Middle Channel TX

Note:


Polarization: *Horizontal* Temperature: 26
Power: Humidity: 60 %

Distance: 3m

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu√/m	dB		cm	degree	
1		47.7833	5.90	11.39	17.29	40.00	-22.71	peak			
2		80.1167	9.24	9.80	19.04	40.00	-20.96	peak			
3		148.0167	-0.22	15.25	15.03	43.50	-28.47	peak			
4		379.2000	3.21	18.93	22.14	46.00	-23.86	peak			
5		610.3833	1.28	23.75	25.03	46.00	-20.97	peak			
6	*	770.4333	1.12	26.91	28.03	46.00	-17.97	peak			

Page 18 of 44

## RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL -VERTICAL

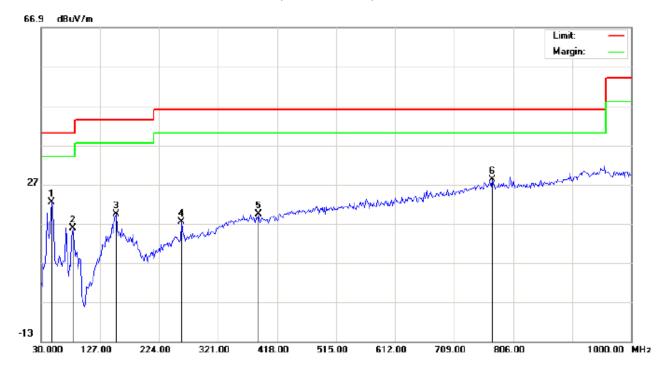

Site: site #1 Limit: FCC Class B 3M Radiation

EUT:Petkit P2 M/N:P120

Mode: Middle Channel TX

Note:

Polarization:	Vertical	Temperature: 2	6
Power:		Humidity: 60 %	,

Distance: 3m

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	47.7833	13.94	8.39	22.33	40.00	-17.67	peak			
2		81.7333	13.39	2.42	15.81	40.00	-24.19	peak			
3		152.8667	4.21	15.28	19.49	43.50	-24.01	peak			
4		261.1833	3.15	14.24	17.39	46.00	-28.61	peak			
5		387.2833	0.42	18.99	19.41	46.00	-26.59	peak			
6		772.0500	1.27	26.93	28.20	46.00	-17.80	peak			

## **RESULT: PASS**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.


2. The "Factor" value can be calculated automatically by software of measurement system.

Temperature: 26

Humidity: 60 %

Page 19 of 44

## RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL

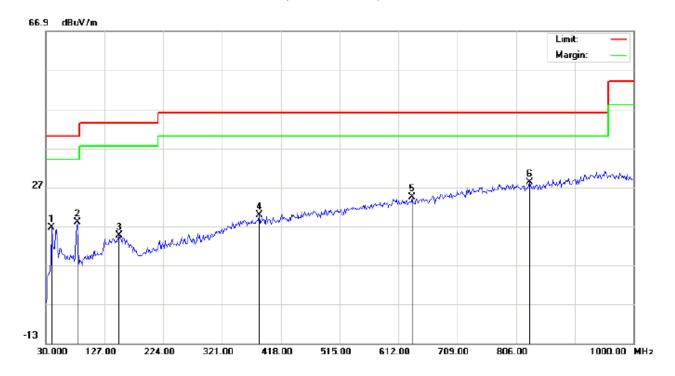

Site: site #1 Polarization: Horizontal
Limit: FCC Class B 3M Radiation Power:

EUT:Petkit P2 M/N:P120

Mode: High Channel TX

Note:


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB	cr	cm	degree	
1		39.7000	5.02	11.51	16.53	40.00	-23.47	peak			
2		81.7333	8.22	9.73	17.95	40.00	-22.05	peak			
3		151.2500	-0.69	15.27	14.58	43.50	-28.92	peak			
4		382.4332	0.80	18.95	19.75	46.00	-26.25	peak			
5		634.6333	0.57	23.81	24.38	46.00	-21.62	peak			
6	*	828.6333	0.99	27.31	28.30	46.00	-17.70	peak			

Distance: 3m

Humidity: 60 %

Page 20 of 44

## RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL

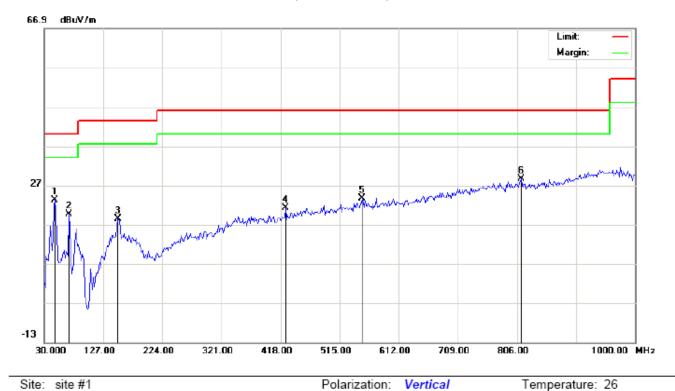

Site: site #1

Limit: FCC Class B 3M Radiation EUT:Petkit P2

M/N:P120

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	47.7833	14.88	8.39	23.27	40.00	-16.73	peak			
2		70.4167	15.41	4.16	19.57	40.00	-20.43	peak			
3		151.2500	3.10	15.27	18.37	43.50	-25.13	peak			
4		426.0833	1.35	19.86	21.21	46.00	-24.79	peak			
5		552.1833	1.04	22.49	23.53	46.00	-22.47	peak			
6		812.4667	1.31	27.32	28.63	46.00	-17.37	peak			

Power:

Distance: 3m

Polarization: Vertical

## **RESULT: PASS**


Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 21 of 44

## **RADIATED EMISSION ABOVE 1GHZ**

## RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL-HORIZONTAL

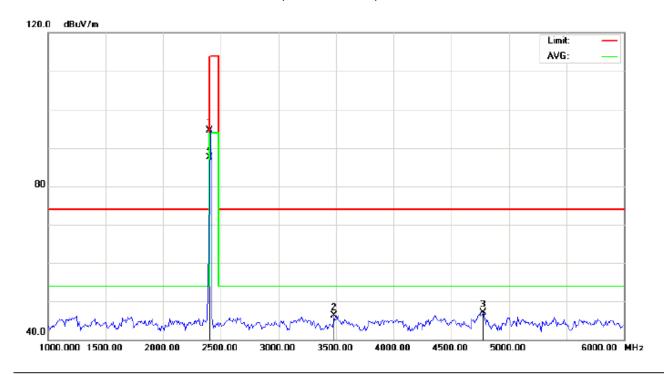

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT: Petkit P2 Distance: 3m

M/N: P120


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2402.000	104.19	-9.68	94.51	114.00	-19.49	peak			
2		3483.333	54.19	-7.91	46.28	74.00	-27.72	peak			
3		4775.000	49.48	-2.39	47.09	74.00	-26.91	peak			
4	*	2402.000	97.25	-9.68	87.57	94.00	-6.43	AVG	150	281	

Page 22 of 44

## RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL- VERTICAL

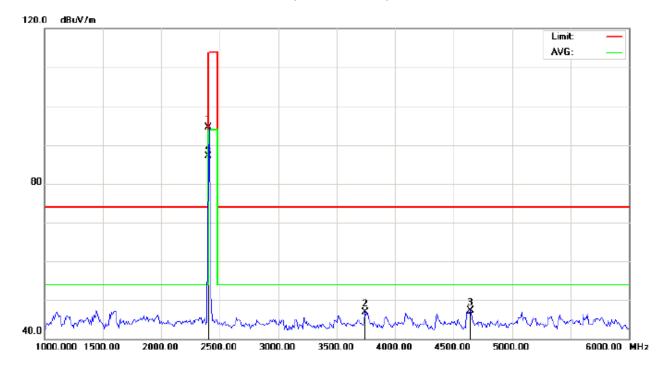

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT: Petkit P2 Distance: 3m

M/N: P120


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2402.000	104.23	-9.68	94.55	114.00	-19.45	peak			
2		3741.667	53.38	-6.40	46.98	74.00	-27.02	peak			
3		4641.667	49.95	-2.74	47.21	74.00	-26.79	peak			
4	*	2402.000	96.84	-9.68	87.16	94.00	-6.84	AVG	150	27	

Page 23 of 44

## RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL-HORIZONTAL

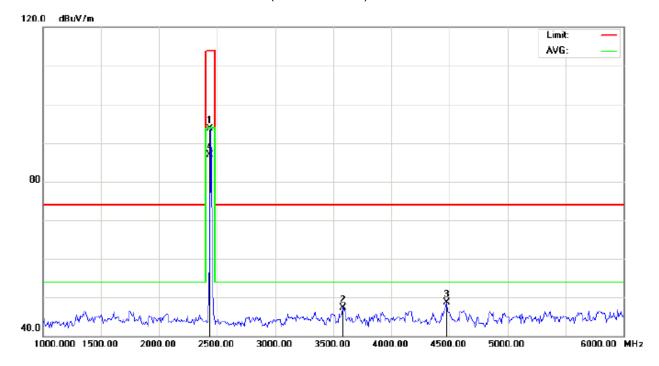

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT: Petkit P2 Distance: 3m

M/N: P120


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2440.000	103.30	-9.64	93.66	114.00	-20.34	peak			
2		3583.333	54.71	-7.38	47.33	74.00	-26.67	peak			
3		4475.000	51.82	-3.19	48.63	74.00	-25.37	peak			
4	*	2440.000	96.57	-9.64	86.93	94.00	-7.07	AVG	150	126	

Page 24 of 44

## RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL- VERTICAL

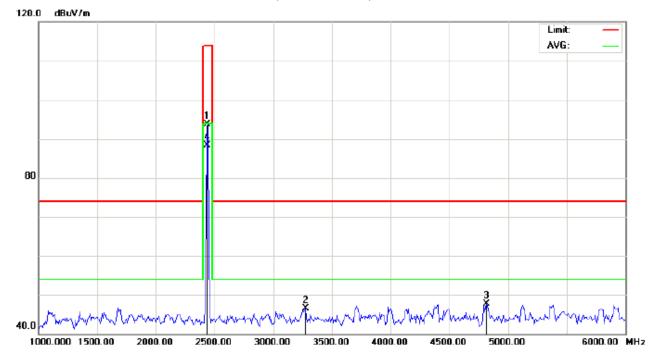

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT: Petkit P2 Distance: 3m

M/N: P120


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2440.000	103.26	-9.64	93.62	114.00	-20.38	peak			
2		3275.000	54.63	-8.10	46.53	74.00	-27.47	peak			
3		4816.667	49.95	-2.28	47.67	74.00	-26.33	peak			
4	*	2440.000	97.85	-9.64	88.21	94.00	-5.79	AVG	150	70	

Page 25 of 44

## RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL-HORIZONTAL

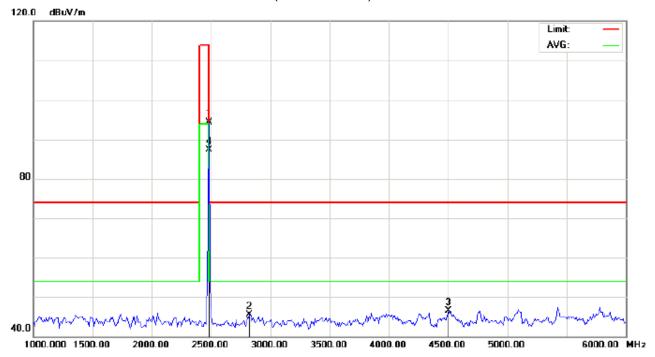

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT: Petkit P2 Distance: 3m

M/N: P120


Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2480.000	103.82	-9.59	94.23	114.00	-19.77	peak			
2		2825.000	54.38	-8.78	45.60	74.00	-28.40	peak			
3		4500.000	49.58	-3.11	46.47	74.00	-27.53	peak			
4	*	2480.000	96.98	-9.59	87.39	94.00	-6.61	AVG	150	73	

Page 26 of 44

## RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL- VERTICAL

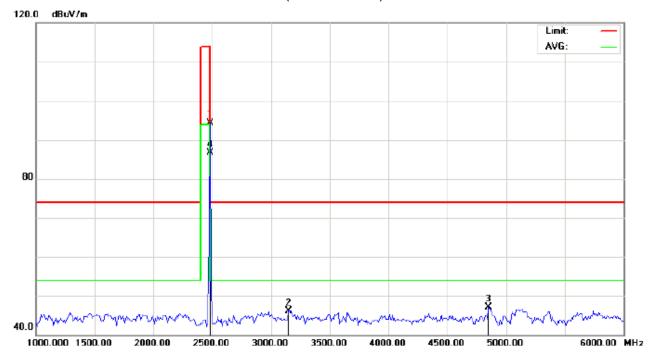

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT: Petkit P2 Distance: 3m

M/N: P120

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		2480.000	103.84	-9.59	94.25	114.00	-19.75	peak			
2		3150.000	54.39	-8.22	46.17	74.00	-27.83	peak			
3		4850.000	49.20	-2.19	47.01	74.00	-26.99	peak			
4	*	2480.000	96.27	-9.59	86.68	94.00	-7.32	AVG	150	0	

#### **RESULT: PASS**

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Page 27 of 44

## Field strength of the fundamental signal

## Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	104.19	-9.68	94.51	114	-19.49	Horizontal
2402	104.23	-9.68	94.55	114	-19.45	Vertical
2440	103.30	-9.64	93.66	114	-20.34	Horizontal
2440	103.26	-9.64	93.62	114	-20.38	Vertical
2480	103.82	-9.59	94.23	114	-19.77	Horizontal
2480	103.84	-9.59	94.25	114	-19.75	Vertical

## Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	97.25	-9.68	87.57	94	-6.43	Horizontal
2402	96.84	-9.68	87.16	94	-6.84	Vertical
2440	96.57	-9.64	86.93	94	-7.07	Horizontal
2440	97.85	-9.64	88.21	94	-5.79	Vertical
2480	96.98	-9.59	87.39	94	-6.61	Horizontal
2480	96.27	-9.59	86.68	94	-7.32	Vertical

Page 28 of 44

## 9. BAND EDGE EMISSION

## 9.1. MEASUREMENT PROCEDURE

1The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.


2Max hold the trace of the setp 1,and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.

3Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission: (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO


(b) AVERAGE: RBW=1MHz; VBW=1/on time(1KHz) / Sweep=AUTO

#### 9.2 TEST SETUP

#### RADIATED EMISSION TEST SETUP

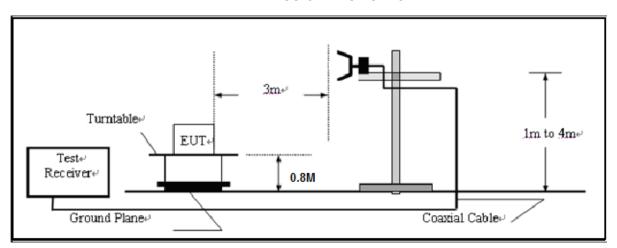


#### CONDUCTED TEST SETUP



Page 29 of 44

## 9.3 RADIATED TEST RESULT(Worst modulation:GFSK)

## TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

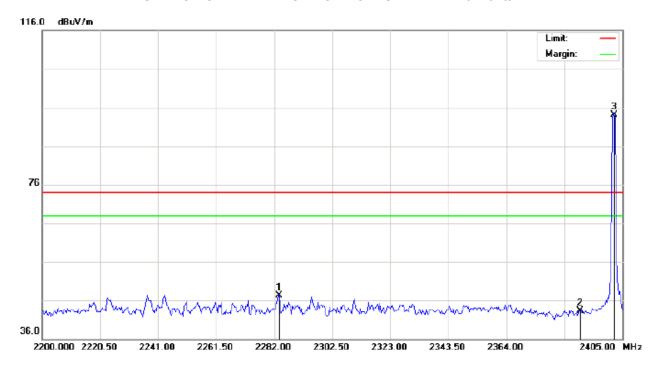

Site: site #1

Polarization: Horizontal

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)

Power: Humidity: 60 %

EUT: Petkit P2

Distance:


M/N: P120

Mode: Low Channel TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		2283.708	37.16	10.19	47.35	74.00	-26.65	peak			
2		2390.000	33.00	10.31	43.31	74.00	-30.69	peak			
3	*	2402.000	83.72	10.32	94.04	74.00	20.04	peak			

Page 30 of 44

## TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical

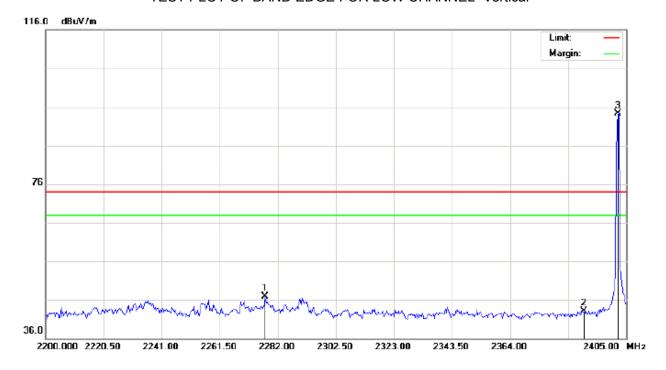

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Petkit P2 Distance:


M/N: P120

Mode: Low Channel TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
1		2277.558	36.68	10.19	46.87	74.00	-27.13	peak			
2		2390.000	32.71	10.31	43.02	74.00	-30.98	peak			
3	*	2402.000	84.08	10.32	94.40	74.00	20.40	peak			

Page 31 of 44

## TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

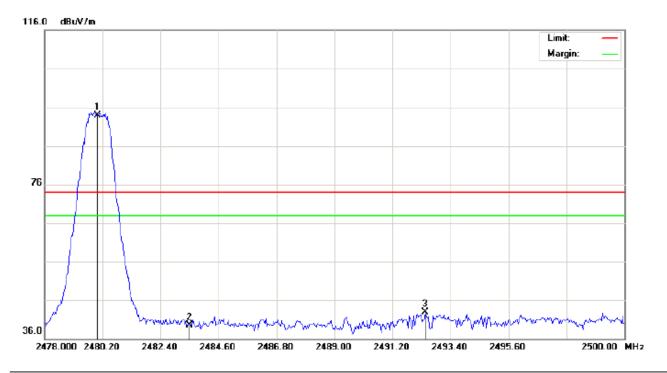

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Petkit P2 Distance:


M/N: P120

Mode: High Channel TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1	*	2480.000	83.55	10.41	93.96	74.00	19.96	peak			
2		2483.500	29.19	10.41	39.60	74.00	-34.40	peak			
3		2492.447	32.49	10.42	42.91	74.00	-31.09	peak			

Page 32 of 44

#### TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

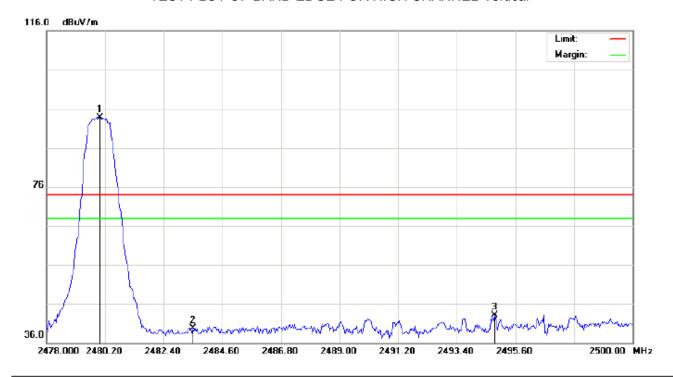

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Petkit P2 Distance:

M/N: P120

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBu√/m	dB		cm	degree	
1	*	2480.000	83.32	10.41	93.73	74.00	19.73	peak			
2		2483.500	29.26	10.41	39.67	74.00	-34.33	peak			
3		2494.830	32.61	10.42	43.03	74.00	-30.97	peak			

## **RESULT: PASS**

Note: The other modes radiation emission have enough 20dB margin.

Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.


Page 33 of 44

## 10 20DB BANDWIDTH

## 10.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hoping channel RBW ≥ 1% of the 20 dB bandwidth, VBW ≥ RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.

## 10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

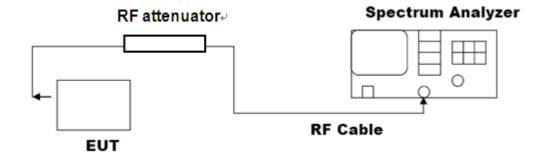

## 10.3. LIMITS AND MEASUREMENT RESULTS

BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESUL							
Applicable Limite	Measurement Result						
Applicable Limits	Test Da	Criteria					
	Low Channel	1.691	PASS				
N/A	Middle Channel	1.631	PASS				
	High Channel	1.641	PASS				

#### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL



#### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL



Page 35 of 44

#### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL



Page 36 of 44

## 11. FCC LINE CONDUCTED EMISSION TEST


## 11.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Francisco	Maximum RF Line Voltage					
Frequency	Q.P.( dBuV)	Average( dBuV)				
150kHz~500kHz	66-56	56-46				
500kHz~5MHz	56	46				
5MHz~30MHz	60	50				

#### Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

## 11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

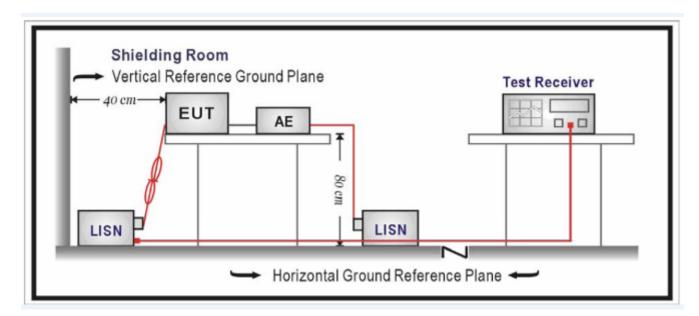

Page 37 of 44

#### 11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.

- 2. Support equipment, if needed, was placed as per ANSI C63.4.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4. All support equipments received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC charging voltage by PC which received 120V/60Hzpower by a LISN..
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

## 11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

#### 11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

N/A

Page 38 of 44

## **APPENDIX A: PHOTOGRAPHS OF TEST SETUP**

FCC RADIATED EMISSION TEST SETUP






Page 39 of 44

## **APPENDIX B: PHOTOGRAPHS OF EUT**

TOTAL VIEW OF EUT

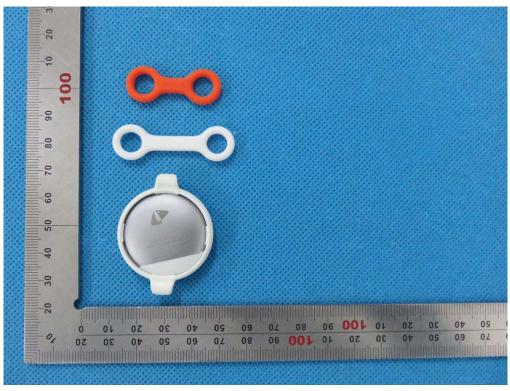

TOP VIEW OF EUT



**BOTTOM VIEW OF EUT** 



FRONT VIEW OF EUT



Page 41 of 44

**BACK VIEW OF EUT** 



**LEFT VIEW OF EUT** 




Page 42 of 44


RIGHT VIEW OF EUT




**OPEN VIEW OF EUT** 

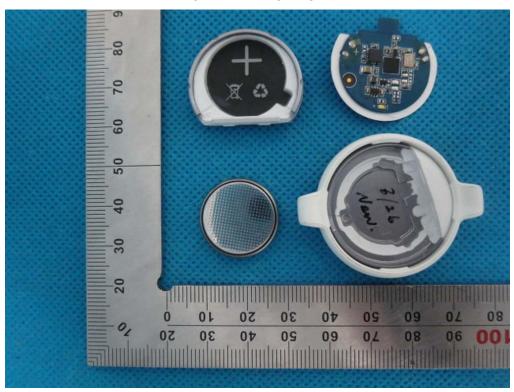


**INTERNAL VIEW OF EUT-1** 

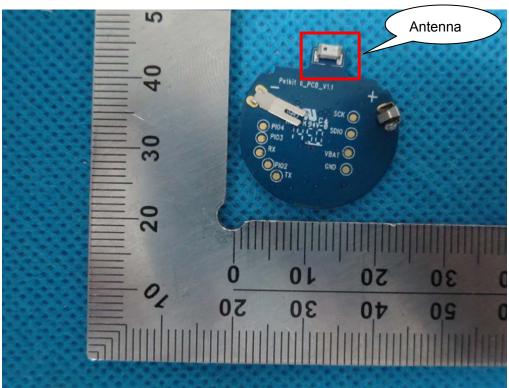

**INTERNAL VIEW OF EUT-2** 

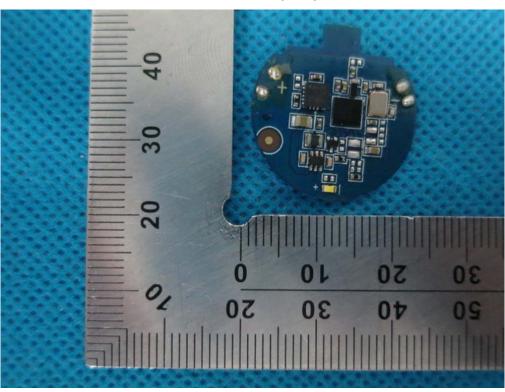

## **INTERNAL VIEW OF EUT-3**

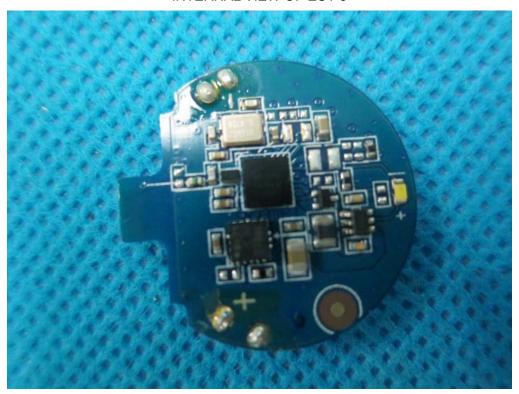

----END OF REPORT----