FCC Part 15C

Measurement And Test Report For

Xiamen Tongren IOT Technology Co.,Ltd.

4F-A, Block A, Huaxun Buliding, Software Park, Torch Hi-tech Zone, Xiamen, China.

FCC ID: 2AEEDUS-IC101

Jan. 17, 2015

This Report Concerns: ☑ Original Report	Equipment Type: Smart IR Controller		
Report Number:	MTI141204002RF		
Test Engineer:	Bill Chen		
Reviewed By:	Jason Zheng Jason Zheng		
Approved & Authorized By:	Hebe Lee Hebe Lee		
Test Date:	Jan. 05 - Jan. 17, 2015		
Prepared By:	Shenzhen Microtest Technology Co.,Ltd 6F, Zhongbao Building, Gushu, Bao' an District, Shenzhen, P.R.China Tel: +86-755-8885 0135 Fax: +86-755-8885 0136		

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior written consent of Shenzhen Microtest Technology Co.,Ltd.

TEST RESULT CERTIFICATION			
Applicant's name:	Applicant's nameXiamen Tongren IOT Technology Co.,Ltd.		
Address:	4F-A, Block A, Huaxun Buliding, Software Park, Torch Hi-tech Zone, Xiamen, China.		
Manufacture's Name:	Xiamen Tongren IOT Technology Co.,Ltd.		
Address:	4F-A, Block A, Huaxun Buliding, Software Park, Torch Hi-tech Zone, Xiamen, China.		
Product description			
Product name	Smart IR Controller		
Model and/or type reference :	US-IC101		
Serial Model	N/A		
Standards:	FCC Part15.247		
Test procedure	ANSI C63.4-2003		

Report No.: MTI141204002RF Page 2 of 38

Table of Contents

	Page
1 . SUMMARY OF TEST RESULTS	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	9
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTE	_
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	11
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
3 . EMC EMISSION TEST	13
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS 3.1.2 TEST PROCEDURE	13 14
3.1.2 TEST PROCEDURE 3.1.3 DEVIATION FROM TEST STANDARD	14
3.1.4 TEST SETUP	14
3.1.5 EUT OPERATING CONDITIONS	14
3.1.6 TEST RESULTS	15
3.2 RADIATED EMISSION MEASUREMENT	16
3.2.1 RADIATED EMISSION LIMITS	16
3.2.2 TEST PROCEDURE	17
3.2.3 DEVIATION FROM TEST STANDARD	17
3.2.4 TEST SETUP 3.2.5 EUT OPERATING CONDITIONS	18 19
3.2.6 TEST RESULTS (BETWEEN 9KHZ - 30 MHZ)	20
3.2.7 TEST RESULTS (BETWEEN 30MHZ - 1GHZ)	21
3.2.8 TEST RESULTS (ABOVE 1000 MHZ)	22
4 . POWER SPECTRAL DENSITY TEST	27
4.1 APPLIED PROCEDURES / LIMIT	27
4.1.1 TEST PROCEDURE	27
4.1.2 DEVIATION FROM STANDARD	27
4.1.3 TEST SETUP	27
4.1.4 EUT OPERATION CONDITIONS 4.1.5 TEST RESULTS	27 28
5 . BANDWIDTH TEST	
	30
5.1 APPLIED PROCEDURES / LIMIT 5.1.1 TEST PROCEDURE	30 30
5.1.1 TEST PROCEDURE 5.1.2 DEVIATION FROM STANDARD	30 30

Report No.: MTI141204002RF Page 3 of 38

Table of Contents

	Page
5.1.3 TEST SETUP 5.1.4 EUT OPERATION CONDITIONS 5.1.5 TEST RESULTS	30 30 31
6 . PEAK OUTPUT POWER TEST	33
6.1 APPLIED PROCEDURES / LIMIT	33
6.1.1 TEST PROCEDURE 6.1.2 DEVIATION FROM STANDARD 6.1.3 TEST SETUP 6.1.4 EUT OPERATION CONDITIONS 6.1.5 TEST RESULTS	33 33 33 33 34
7 . 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE 7.1 DEVIATION FROM STANDARD 7.2 TEST SETUP 7.3 EUT OPERATION CONDITIONS 7.4 TEST RESULTS	35 35 35 35 36
8 . ANTENNA REQUIREMENT 8.1 STANDARD REQUIREMENT	38 38
8.2 EUT ANTENNA	38

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C				
Standard Section	Test Item Judgment Remark			
15.207	Conducted Emission	N/A		
15.247 (a)(2)	6dB Bandwidth	PASS		
15.247 (b)	Peak Output Power	PASS		
15.247 (c)	Radiated Spurious Emission	PASS		
15.247 (d)	Power Spectral Density	PASS		
15.205	Band Edge Emission	PASS		
15.203	Antenna Requirement	PASS		

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

Report No.: MTI141204002RF Page 5 of 38

1.1 TEST FACILITY

Shenzhen Toby Technology Co., Ltd.

Add.: 10/F.,A Block, Jiada R&D Bldg., No.5 Songpingshan, Road, Science&Technology Park,

Shenzhen, 518057

FCC Registration No.:811562

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $\mathbf{y} \pm \mathbf{U}$, where expended uncertainty \mathbf{U} is based on a standard uncertainty multiplied by a coverage factor of $\mathbf{k=2}$, providing a level of confidence of approximately 95 % $^{\circ}$

No.	Item	Uncertainty
1	Conducted Emission Test	±1.38dB
2	RF power,conducted	±0.16dB
3	Spurious emissions,conducted	±0.21dB
4	All emissions,radiated(<1G)	±4.68dB
5	All emissions,radiated(>1G)	±4.89dB
6	Temperature	±0.5°C
7	Humidity	±2%

Report No.: MTI141204002RF Page 6 of 38

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Smart IR Controller			
Trade Name	USUNG			
Model Name	US-IC101			
Serial Model	N/A			
Model Difference	N/A			
Product Description	User's Manual, the EUT Device. More details of	2405~2480 MHz,(Channel Number:16, Channel Frequency=2405+5(K-1), K=1,2,316) O-QPSK 16CH Please see Note 3. 9.51dBm (Max.) 2.0dbi on, features, or specification exhibited in is considered as an ITE/Computing EUT technical specification, please		
Channel List	refer to the User's Manual. Please refer to the Note 2.			
Adapter	N/A			
Battery	DC 3V			
Connecting I/O Port(s)	Please refer to the User's Manual			

Note

Report No.: MTI141204002RF Page 7 of 38

^{1.} For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

	Channel List for 802.15.4						
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2405	05	2425	09	2445	13	2465
02	2410	06	2430	10	2450	14	2470
03	2415	07	2435	11	2455	15	2475
04	2420	08	2440	12	2460	16	2480

Table for Filed Antenna

Ant	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
Α	N/A	N/A	PCB antenna	Reverse SMA-type	2.0	Zigbee Antenna

Report No.: MTI141204002RF Page 8 of 38

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	CH1TX
Mode 2	CH8TX
Mode 3	CH16TX
Mode 4	Zigbee Link Mode

For Conducted Emission		
Final Test Mode	Description	
Mode 4	N/A	

For Radiated Emission		
Final Test Mode	Description	
Mode 1	CH1TX	
Mode 2	CH8TX	
Mode 3	CH16TX	
Mode 4	Zigbee Link Mode	

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported

Report No.: MTI141204002RF Page 9 of 38

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

E-1 EUT

Report No.: MTI141204002RF Page 10 of 38

2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
E-1	Smart IR Controller	USUNG	US-IC101	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in <code>[Length]</code> column.

Report No.: MTI141204002RF Page 11 of 38

2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Mar. 20, 2014	Mar. 19, 2015
Spectrum Analyzer	Rohde & Schwarz	FSP30	DE25181	Mar. 07, 2014	Mar.06, 2015
EMI Test Receiver	Rohde & Schwarz	ESCI	101165	Mar. 07, 2014	Mar.06, 2015
Bilog Antenna	ETS-LINDGREN	3142E	00117537	Mar. 07, 2014	Mar.06, 2015
Bilog Antenna	ETS-LINDGREN	3142E	00117542	Mar. 07, 2014	Mar.06, 2015
Horn Antenna	ETS-LINDGREN	3117	00143207	Mar. 07, 2014	Mar.06, 2015
Horn Antenna	ETS-LINDGREN	3117	00143209	Mar. 07, 2014	Mar.06, 2015
Pre-amplifier	HP	11909A	185903	Mar. 07, 2014	Mar.06, 2015
Pre-amplifier	HP	8447B	3008A00849	Mar. 07, 2014	Mar.06, 2015
Cable	HUBER+SUHNE R	100	SUCOFLEX	Mar. 07, 2014	Mar.06, 2015
Signal Generator	Rohde & Schwarz	SML03	IKW682-054	Feb. 11, 2014	Feb.10, 2015
Positioning Controller	ETS-LINDGREN	2090	N/A	N/A	N/A

Conduction Test equipment

Description	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due Date
EMI Test	ROHDE&		100221	2014-08-10	2015-08-09
Receiver	SCHWARZ	ESCI	100321	2014-00-10	2013-00-03
50ΩCoaxial	Anritsu	MP59B	X10321	2014-08-10	2015-08-09
Switch	Aimsu	WIF-33D	X10021	2014-00-10	2015-00-03
L.I.S.N	Rohde & Schwarz	ENV216	101131	2014-08-10	2015-08-09
L.I.S.N	SCHWARZBECK	NNBL 8226-2	8226-2/164	2014-08-10	2015-08-09

Report No. : MTI141204002RF Page 12 of 38

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
PREQUENCY (MHZ)	Quasi-peak	Average	Quasi-peak	Average	Statiuatu
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

Report No.: MTI141204002RF Page 13 of 38


3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

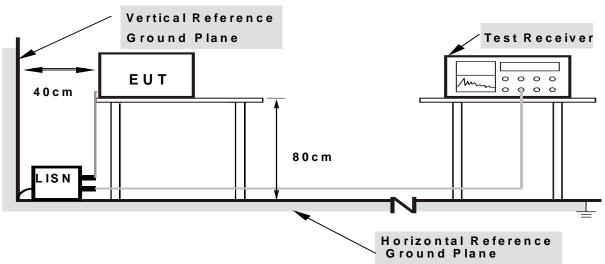

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

Report No.: MTI141204002RF Page 14 of 38

3.1.6 TEST RESULTS

EUT:	Smart IR Controller	Model Name. :	US-IC101
Temperature :	26 ℃	Relative Humidity:	54%
Pressure :	1010hPa	Phase :	N/A
Test Voltage :	DC 3V	Test Mode:	N/A

Report No.: MTI141204002RF Page 15 of 38

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies	Field Strength	Measurement Distance
(MHz)	(micorvolts/meter)	(meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Spectrum Parameter	Setting	
Attenuation	Auto	
Start Frequency	1000 MHz	
Stop Frequency	10th carrier harmonic	
RB / VB (emission in restricted	1 MHz / 1 MHz for Dock, 1 MHz / 10Hz for Average	
band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average	

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

Report No.: MTI141204002RF Page 16 of 38

3.2.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported


3.2.3 DEVIATION FROM TEST STANDARD

No deviation


Report No.: MTI141204002RF Page 17 of 38

3.2.4 TEST SETUP

(A) Radiated Emission Test-Up Frequency Below 30MHz

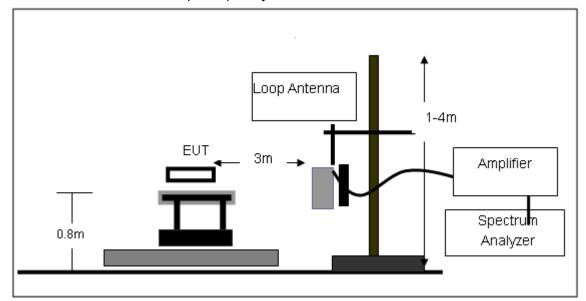


(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

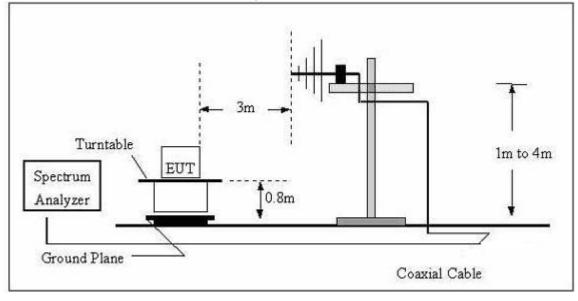

Report No. : MTI141204002RF Page 18 of 38

(C) Radiated Emission Test-Up Frequency Above 1GHz

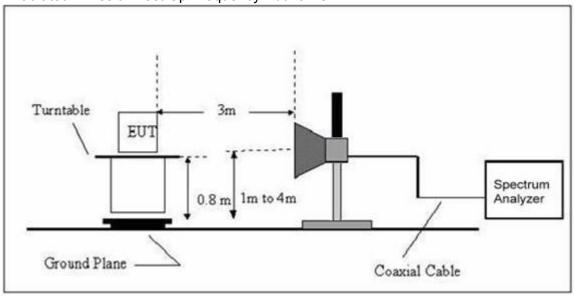

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

Report No. : MTI141204002RF Page 19 of 38

3.2.6 TEST RESULTS (BETWEEN 9KHZ - 30 MHZ)

EUT:	Smart IR Controller	Model Name. :	US-IC101
Temperature:	20 ℃	Relative Humidtity:	48%
Pressure:	1010 hPa	Test Voltage:	DC 3V
Test Mode:	TX	Polarization :	

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
				PASS
				PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =40 log (specific distance/test distance)(dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

Report No.: MTI141204002RF Page 20 of 38

3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)

EUT:	Smart IR Controller	Model Name :	US-IC101
Temperature :	20 ℃	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage:	DC 3V
Test Mode:	TX		

Polar	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector
(H/V)	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	Туре
Н	36.8751	24.45	-9.72	14.73	40	-25.27	QP
Н	68.3738	27.75	-8.49	19.26	40	-20.74	QP
Н	128.6474	25.78	-4.83	20.95	43.5	-22.55	QP
Н	178.7369	28.65	-9.51	19.14	43.5	-24.36	QP
Н	474.2961	30.23	-6.27	23.96	46	-22.04	QP
Н	793.7302	27.72	-6.79	20.93	46	-25.07	QP
V	41.8733	33.89	-15.98	17.91	40	-22.09	QP
V	56.9828	41.76	-19.83	21.93	40	-18.07	QP
V	71.9823	39.73	-18.67	21.06	40	-18.94	QP
V	84.5521	40.68	-19.47	21.21	40	-18.79	QP
V	156.6438	42.89	-19.18	23.71	43.5	-19.79	QP
V	683.6524	34.56	-13.14	21.42	46	-24.58	QP

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level- Limit

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Factor added by measurement software automatically

Report No.: MTI141204002RF Page 21 of 38

3.2.8 TEST RESULTS (1G-25GHZ)

802.15.4Normal Voltage

Polar	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector
(H/V)	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	Туре
		Lo	w Channel	(2405MHz)			
Vertical	2492.168	60.38	-11.33	49.05	74	-24.95	Pk
Horizontal	2493.727	59.75	-10.89	48.86	74	-25.14	Pk
Vertical	4810.412	58.44	-11.67	46.77	74	-27.23	Pk
Horizontal	4810.423	58.51	-9.93	48.58	74	-25.42	Pk
Vertical	1446.974	61.18	-10.73	50.45	74	-23.55	Pk
Vertical	1658.392	59.76	-16.11	43.65	74	-30.35	Pk
Vertical	2105.911	58.25	-11.68	46.57	74	-27.43	Pk
Horizontal	1113.472	57.81	-15.33	42.48	74	-31.52	Pk
Horizontal	1499.848	56.93	-19.11	37.82	74	-36.18	Pk
Horizontal	1905.176	56.12	-17.85	38.27	74	-35.73	Pk
		Mi	d Channel	(2440 MHz)			
Vertical	2475.138	56.35	-11.52	44.83	74	-29.17	Pk
Horizontal	2475.143	54.62	-8.34	46.28	74	-27.72	Pk
Vertical	4880.6732	57.93	-7.38	50.55	74	-23.45	Pk
Horizontal	4880.6814	56.83	-8.56	48.27	74	-25.73	Pk
Vertical	1376.274	60.51	-13.17	47.34	74	-26.66	Pk
Vertical	1658.398	58.19	-13.43	44.76	74	-29.24	Pk
Vertical	2214.643	55.63	-14.18	41.45	74	-32.55	Pk
Horizontal	1412.793	56.37	-15.55	40.82	74	-33.18	Pk
Horizontal	1667.168	55.45	-16.72	38.73	74	-35.27	Pk
Horizontal	1937.155	56.25	-16.32	39.93	74	-34.07	Pk
		Hig	h Channel	(2480 MHz)			
Vertical	2454.257	56.62	-10.46	46.16	74	-27.84	Pk
Horizontal	2454.281	56.17	-8.13	48.04	74	-25.96	Pk
Vertical	4960.215	54.73	-9.52	45.21	74	-28.79	Pk
Horizontal	4960.221	54.59	-9.48	45.11	74	-28.89	Pk
Vertical	1237.262	57.47	-13.32	44.15	74	-29.85	Pk
Vertical	1717.926	55.52	-15.36	40.16	74	-33.84	Pk
Vertical	1987.548	53.47	-11.26	42.21	74	-31.79	Pk
Horizontal	1476.361	54.37	-14.77	39.6	74	-34.4	Pk
Horizontal	1729.357	57.55	-14.81	42.74	74	-31.26	Pk
Horizontal	1925.617	55.23	-15.51	39.72	74	-34.28	Pk

Note:The PK value is less than the AV value, AV value is not required Factor added by measurement software automatically.

Report No.: MTI141204002RF Page 22 of 38

BAND EDGE(Radiated)


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector	Commont
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре	Comment
	802.15.4						
2390	58.45	-13.51	44.94	74	-29.06	peak	Vertical
2390	58.82	-13.55	45.27	74	-28.73	peak	Horizontal
2483.5	57.73	-12.36	45.37	74	-28.63	peak	Vertical
2483.5	56.17	-12.41	43.76	74	-30.24	peak	Horizontal


NOTE: The PK value is less than the AV value, AV value is not required.

Report No. : MTI141204002RF Page 23 of 38

Conducted Spurious Emissions at Antenna Port:


802.15.4 Low Channel

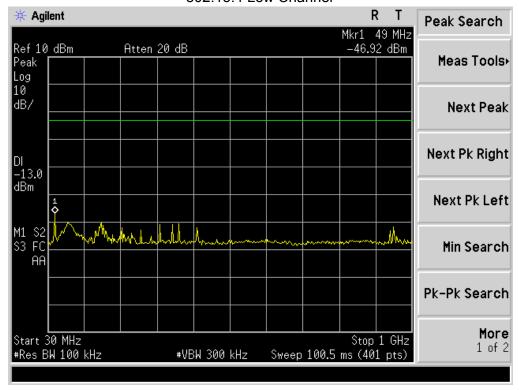


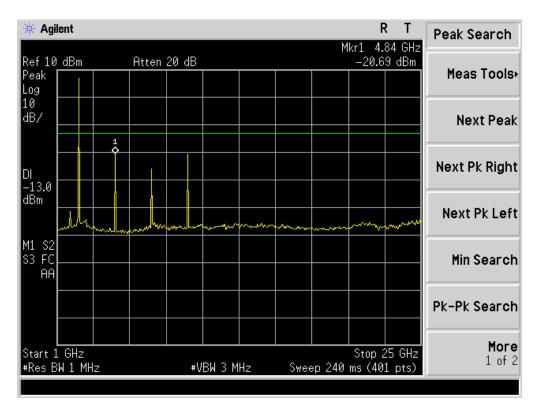

Report No.: MTI141204002RF Page 24 of 38


802.15.4 Middle Channel

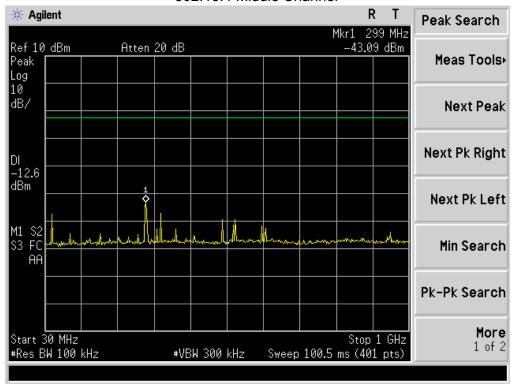


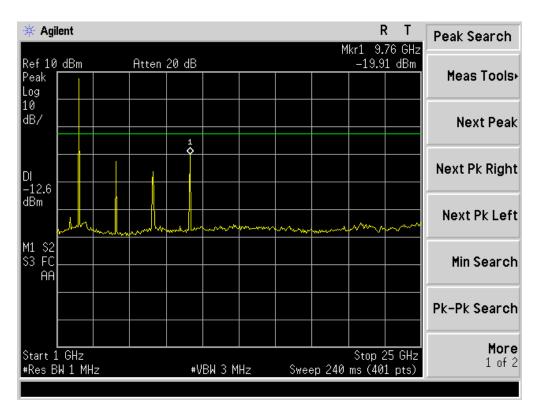

Report No.: MTI141204002RF Page 25 of 38

802.15.4 High Channel

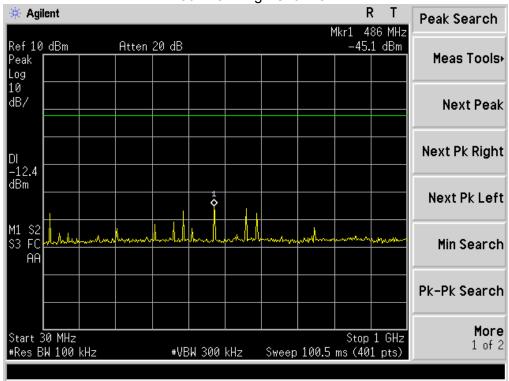

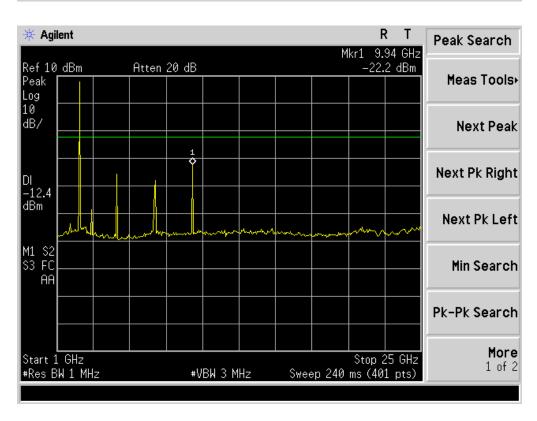

4. POWER SPECTRAL DENSITY TEST

4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C					
Section	Test Item	Limit	Frequency Range (MHz)	Result	
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS	

4.1.1 TEST PROCEDURE

- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. Set the span to 1.5 times the DTS channel bandwidth.
- 3. Set the RBW \geq 3 kHz.
- 4. Set the VBW \geq 3 x RBW.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP



4.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

Report No.: MTI141204002RF Page 27 of 38


4.1.5 TEST RESULTS


EUT:	Smart IR Controller	Model Name :	US-IC101	
Temperature :	25 ℃	Relative Humidity:	60%	
Pressure:	1015 hPa	Test Voltage :	DC 3V	
Test Mode :	TX Mode /CH01, CH08, CH16			

Frequency	Power Density (dBm)	Limit (dBm)	Result
2405 MHz	-6.152	8	PASS
2440 MHz	-5.964	8	PASS
2480 MHz	-6.112	8	PASS

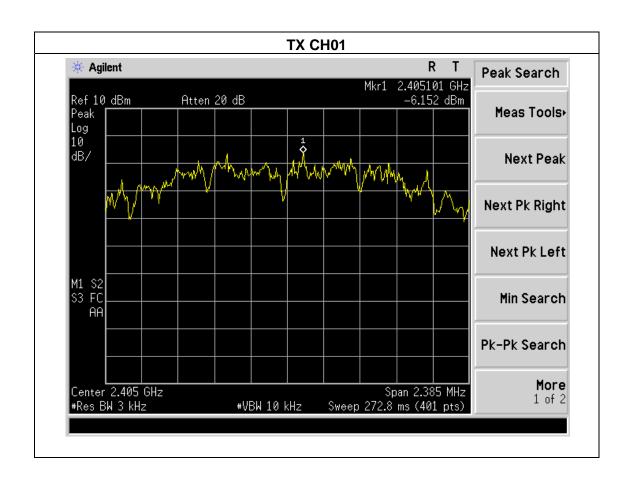

Report No. : MTI141204002RF Page 28 of 38

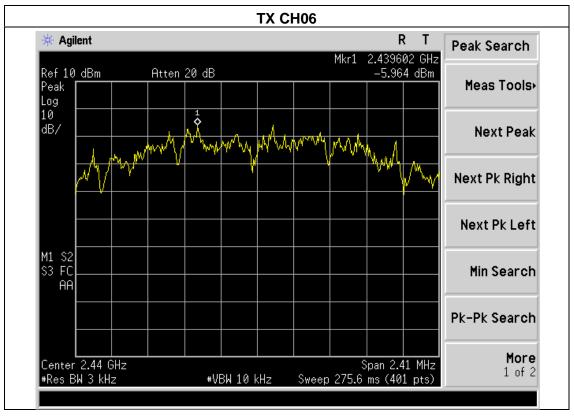

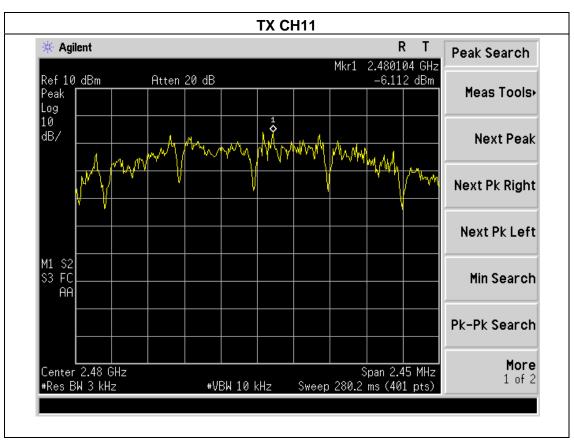

Report No.: MTI141204002RF Page 29 of 38

5. BANDWIDTH TEST

5.1 APPLIED PROCEDURES / LIMIT

	FCC Part15 (15.247) , Subpart C					
Section Test Item Limit Frequency Range (MHz)				Result		
15.247(a)(2)	Bandwidth	>= 500KHz (6dB bandwidth)	2400-2483.5	PASS		

5.1.1 TEST PROCEDURE

- 1. Set RBW= 100 kHz.
- 2. Set the video bandwidth (VBW) \geq 3 x RBW.
- 3. Detector = Peak.
- 4. Trace mode = max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

Report No.: MTI141204002RF Page 30 of 38


5.1.5 TEST RESULTS


EUT:	Smart IR Controller	Model Name :	US-IC101
Temperature :	25 ℃	Relative Humidity:	60%
Pressure :	1012 hPa	Test Voltage :	DC 3V
Test Mode :	TX Mode /CH01, CH08, CH16	6	

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2405	1.590	500	Pass
Middle	2440	1.604	500	Pass
High	2480	1.633	500	Pass

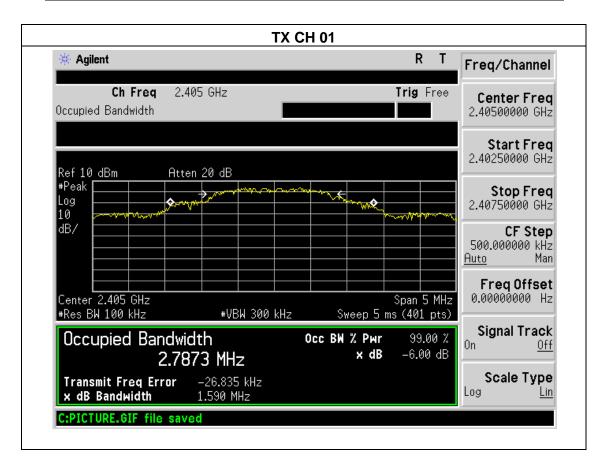

Report No.: MTI141204002RF Page 31 of 38

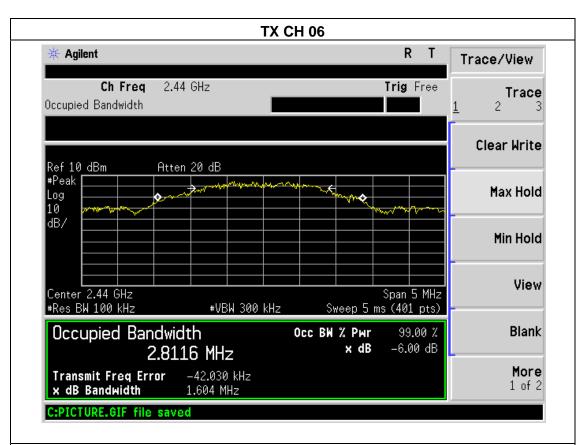

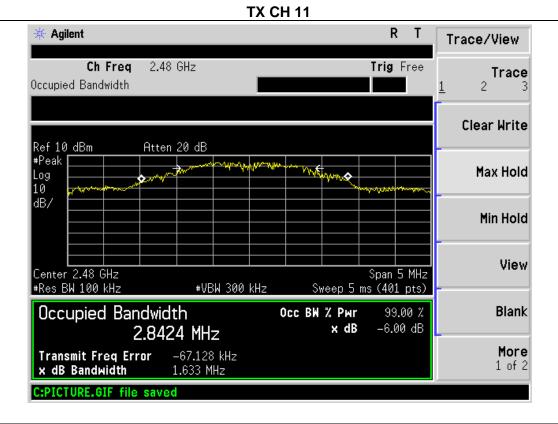

6. PEAK OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C					
Section	Test Item	Limit	Frequency Range (MHz)	Result	
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS	

6.1.1 TEST PROCEDURE

a. The EUT was directly connected to the Power meter

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

Report No.: MTI141204002RF Page 33 of 38

6.1.5 TEST RESULTS

EUT:	Smart IR Controller	Model Name :	US-IC101
Temperature :	25 ℃	Relative Humidity:	60%
Pressure :	1012 hPa	Test Voltage :	DC 3V
Test Mode :	TX Mode /CH01, CH08, CH16		

TX 802.15.4 Mode					
.	Frequency	Maximum Conducted Output	LINALT		
Test Channe		Power(PK)	LIMIT		
	(MHz)	(dBm)	dBm		
CH01	2405	9.51	30		
CH08	2440	9.43	30		
CH16	2480	9.44	30		

Report No.: MTI141204002RF Page 34 of 38

7. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE APPLICABLE STANDARD

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST PROCEDURE

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.

7.1 DEVIATION FROM STANDARD

No deviation.

7.2 TEST SETUP



7.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

Report No.: MTI141204002RF Page 35 of 38


7.4 TEST RESULTS

EUT:	Smart IR Controller	Model Name :	US-IC101
Temperature :	25 ℃	Relative Humidity:	60%
Pressure:	1012 hPa	Test Voltage :	DC 3V


Frequency Band	Delta Peak to band emission (dBc)	>Limit (dBc)	Result		
802.15.4mode					
Left-band	55.677	20	Pass		
Right-band	42.20	20	Pass		

Report No.: MTI141204002RF Page 36 of 38

802.15.4: Band Edge, Left Side

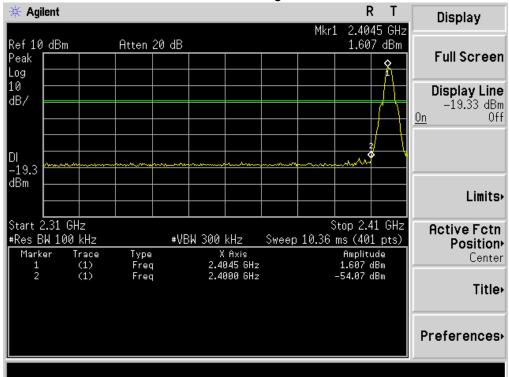

802.15.4: Band Edge, Right Side

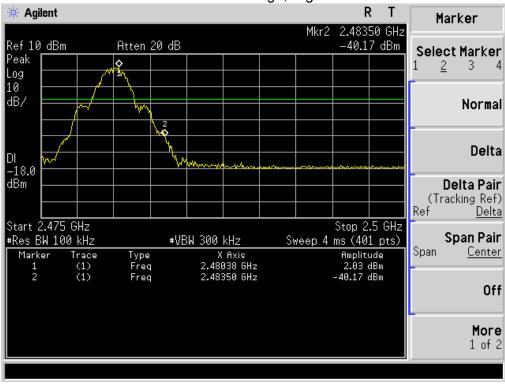

Report No.: MTI141204002RF Page 37 of 38

8. ANTENNA REQUIREMENT

8.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2 EUT ANTENNA

The EUT antenna is PCB antenna. It comply with the standard requirement. In case of replacement of broken antenna the same antenna type must be used.

Report No.: MTI141204002RF Page 38 of 38