



**KDB 865664 D01 SAR Measurement 100MHz to 6GHz**  
**FCC 47 CFR part 2 (2.1093)**

**SAR EVALUATION REPORT**  
*For*  
**Digital Camera with, IEEE 802.11a/b/g/n/ac (MIMO 2x2) Radio**

**Model: H6D-50c**  
**Contains FCC ID: 2AEFAX1311**

**REPORT NUMBER UL-SAR-RP11055704JD06A V2.0**  
**ISSUE DATE: 17 MAY 2016**

*Prepared for*  
**VICTOR HASSELBLAD AB**  
**UTVECKLINGSGATAN 2**  
**GOTEBORG 41756**  
**SWEDEN**

*Prepared by*  
**UL VS LTD**  
**PAVILION A, ASHWOOD PARK, ASHWOOD WAY**  
**BASINGSTOKE, HAMPSHIRE, RG23 8BG, UK**  
**TEL: +44 (0) 1256 312000**  
**FAX: +44 (0) 1256 312001**



## REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
--	04 May 2016	Initial Issue	--
1	17 May 2016	The following amendments are made in the report: 1. The FCC ID of the module was included on the front page.	Sandhya Menon

## TABLE OF CONTENTS


<b>1. Attestation of Test Results .....</b>	<b>4</b>
<b>2. Test Specification, Methods and Procedures .....</b>	<b>5</b>
2.1. Test Specification	5
2.2. Methods and Procedures Reference Documentation	5
2.3. Definition of Measurement Equipment	5
<b>3. Facilities and Accreditation .....</b>	<b>6</b>
<b>4. SAR Measurement System &amp; Test Equipment .....</b>	<b>7</b>
4.1. SAR Measurement System	7
4.2. Test Equipment	8
4.3. SAR System Specifications	9
<b>5. Measurement Uncertainty .....</b>	<b>11</b>
5.1. Uncertainty – Freq. < 3GHz Body Configuration 1g	12
5.2. Uncertainty – Freq. > 3GHz Body Configuration 1g	13
<b>6. Equipment Under Test (EUT) .....</b>	<b>14</b>
6.1. Identification of Equipment Under Test (EUT)	14
6.2. Wireless Technologies	15
6.3. Nominal and Maximum Output power: Wi-Fi	16
6.4. Conducted Power Measurements Consideration	16
<b>7. RF Exposure Conditions (Test Configurations).....</b>	<b>17</b>
7.1. Configuration Consideration	17
7.2. SAR Test Exclusion Consideration	17
<b>8. Conducted output power measurements .....</b>	<b>18</b>
8.1. RF Output Average Power Measurement: Wi-Fi	18
<b>9. Dielectric Property Measurements &amp; System Check.....</b>	<b>20</b>
9.1. Tissue Dielectric Parameters	20
9.2. System Check	21
9.3. Reference Target SAR Values	21
9.4. Dielectric Property Measurements & System Check Results	22
<b>10. Measurements, Examinations and Derived Result .....</b>	<b>23</b>
<b>11. Appendixes.....</b>	<b>24</b>
11.1. Photos and Antenna Schematics	24
11.2. System Check Plots	33
11.3. SAR Test Plots	38
11.4. Calibration Certificate for E-field probe	47
11.5. Calibration Certificate for Dipole	48
11.6. Tissues-Equivalent Media Recipes	49

## 1. Attestation of Test Results

Applicant Name:	Victor Hasselblad AB				
Model:	H6D-50c, Contains FCC ID: 2AEFAX1311				
Test Device is	An identical prototype				
Device category	Portable				
Exposure Category	General Population/Uncontrolled Exposure (1g SAR limit: 1.6 W/kg)				
Date Tested	25 April 2016 to 27 April 2016				
The highest reported SAR values	RF Exposure Conditions	Equipment Class			
		Licensed	DTS	UNII	DSS
	Body-worn	N/A	N/A*	0.024 W/kg	N/A
Applicable Standards	FCC 47 CFR part 2 (2.1093) KDB publication IEEE Std 1528-2013				
	Test Results				

UL VS Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL VS Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties are in accordance with the above standard and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample(s), under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL VS Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL VS Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by UKAS. This report is written to support regulatory compliance of the applicable standards stated above.

Approved & Released By:	Prepared By:
	
Naseer Mirza Project Lead UL VS Ltd.	Sandhya Menon Senior Engineer UL VS Ltd.

\*No peak was detected for the SAR test runs

## **2. Test Specification, Methods and Procedures**

### **2.1. Test Specification**

<b>Reference:</b>	KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
<b>Title:</b>	SAR Measurement Requirements for 100 MHz to 6 GHz
<b>Purpose of Test:</b>	Field probes, tissue dielectric properties, SAR scans, measurement accuracy and variability of the measured results are discussed. The field probe and SAR scan requirements are derived from criteria considered in draft standard IEEE P1528-2011.

### **2.2. Methods and Procedures Reference Documentation**

The methods and procedures used were as detailed in:

#### **IEEE 1528 - 2013**

IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques

Thomas Schmid, Oliver Egger and Neils Kuster, "Automated E-field scanning system for dosimetric assessments", IEEE Transaction on microwave theory and techniques, Vol. 44, pp. 105-113, January 1996.

Neils Kuster, Ralph Kastle and Thomas Schmid, "Dosimetric evaluation of mobile communications equipment with known precision", IEICE Transactions of communications, Vol. E80-B, No.5, pp. 645-652, May 1997.

#### **FCC KDB Publication:**

248227 D01 SAR guidance for IEEE 802.11 (Wi-Fi) transmitters v02r02

447498 D01 General RF Exposure Guidance v06

865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04

865664 D02 RF Exposure Reporting v01r02

### **2.3. Definition of Measurement Equipment**

The measurement equipment used complied with the requirements of the standards referenced in the methods & procedures section above. Section 4.2 contains a list of the test equipment used.

### **3. Facilities and Accreditation**

The test sites and measurement facilities used to collect data are located at


Pavilion A, Ashwood Park, Ashwood Way, Basingstoke, Hampshire, RG23 8BG UK	Facility Type
SAR Lab 59	Controlled Environment Chamber
SAR Lab 61	Controlled Environment Chamber

UL VS Limited is accredited by UKAS (United Kingdom Accreditation Service, Accredited to ISO/IEC 17025: 2005), Laboratory UKAS Code 0644.

## 4. SAR Measurement System & Test Equipment

### 4.1. SAR Measurement System

The DASY system used for performing compliance tests consists of the following items:

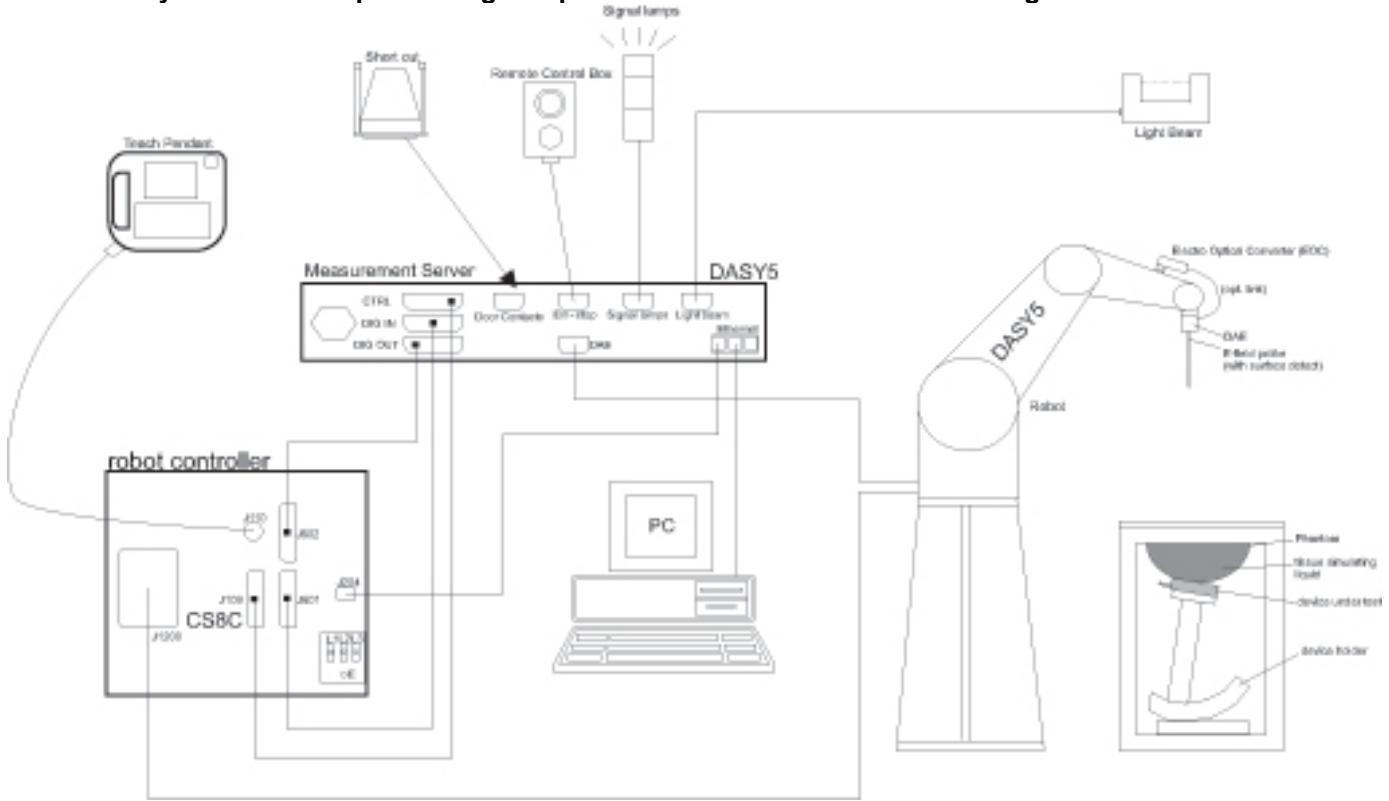

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

## 4.2. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

UL No.	Instrument	Manufacturer	Type No.	Serial No.	Date Last Calibrated	Cal. Interval (Months)
A2110	Data Acquisition Electronics	SPEAG	DAE3	431	17 Nov 2015	12
A2111	Data Acquisition Electronics	SPEAG	DAE4	432	25 Aug 2015	12
A2436	Probe	SPEAG	ES3 DV3	3335	23 July 2015	12
A2544	Probe	SPEAG	EX3 DV4	3994	21 Mar 2016	12
A1322	2450 MHz Dipole	SPEAG	D2450V2	725	10 Nov 2015	12
A2781	5.0 GHz Dipole Kit	SPEAG	D5GHzV2	1222	11 Aug 2015	12
G0610	Robot Power Supply	SPEAG	DASY52	None	Calibrated before use	-
G0612	Robot Power Supply	SPEAG	DASY52	None	Calibrated before use	-
M1875	Robot Arm	Staubli	TX60 L	F13/5SC6F1/A/01	Calibrated before use	-
M1877	Robot Arm	Staubli	TX60 L	F14/5UA6A1/A/01	Calibrated before use	-
A2443	Handset Positioner	SPEAG	MD4HHTV5	None	-	-
A172	Handset Positioner	SPEAG	MD4HHTV5	None	-	-
M1755	DAK Fluid Probe	SPEAG	SM DAK 040 CA	1089	Calibrated before use	-
M1855	Power Sensor	R & S	NRP-Z51	103246	05 Oct 2015	12
M1015	Network Analyser	Agilent Technologies	8753ES	US39172406	28 Sept 2015	12
A2621	Digital Camera	Nikon	S3600	41010357	-	-
M1768	Signal Generator	R & S	SME06	837633/001	27 Nov 2015	12
M1908	Signal Generator	R & S	SME06	831377/005	30 Nov 2015	12
M1840	Dual Channel Power Meter	R & S	NRVD	844860/040	06 Apr 2016	12
M263	Dual Channel Power Meter	R & S	NRVD	826558/004	02 Sep 2015	12
M1847	Power Sensor	R & S	ZRPZ1	831430/003	08 Apr 2016	12
M1848	Power Sensor	R & S	ZRPZ1	831430/004	08 Apr 2016	12
M265	Power Sensor	R & S	ZRPZ1	893350/0017	03 Sep 2015	12
M1044	Power Sensor	R & S	ZRPZ1	893350/0019	03 Sep 2015	12
A2100	Directional Coupler	RF-Lambda	11101300748	None	Calibrated as part of system	-
A2099	Directional Coupler	RF-Lambda	11101300747	None	Calibrated as part of system	-
A1938	Amplifier	Mini-Circuits	ZHL-42	QA0826002	Calibrated as part of system	-
A1474	Amplifier	Mini-Circuits	ZVE-8G	638700305	Calibrated as part of system	-

### 4.3. SAR System Specifications

<b>Robot System</b>	
<b>Positioner:</b>	Stäubli Unimation Corp. Robot Model: TX60L
<b>Repeatability:</b>	±0.030 mm
<b>No. of Axis:</b>	6
<b>Serial Number:</b>	F13/5SC6F1/A/01 F14/5UA6A1/A/01
<b>Reach:</b>	920 mm
<b>Payload:</b>	2.0 kg
<b>Control Unit:</b>	CS8C
<b>Programming Language:</b>	V+
<b>Data Acquisition Electronic (DAE) System</b>	
<b>Serial Number:</b>	DAE3 SN:431 DAE4 SN:432
<b>PC Controller</b>	
<b>PC:</b>	Dell Precision 340
<b>Operating System:</b>	Windows 2000
<b>Data Card:</b>	DASY5 Measurement Servers
<b>Serial Number:</b>	1080
<b>Data Converter</b>	
<b>Features:</b>	Signal Amplifier, multiplexer, A/D converted and control logic.
<b>Software:</b>	DASY PRO Software
<b>Connecting Lines:</b>	Optical downlink for data and status info. Optical uplink for commands and clock.
<b>PC Interface Card</b>	
<b>Function:</b>	24 bit (64 MHz) DSP for real time processing Link to DAE4 16 bit A/D converter for surface detection system serial link to robot direct emergency stop output for robot.
<b>E-Field Probe</b>	
<b>Model:</b>	ES3DV3
<b>Serial No:</b>	3335
<b>Construction:</b>	Triangular core
<b>Frequency:</b>	10 MHz to >4 GHz
<b>Linearity:</b>	±0.2 dB (30 MHz to 4 GHz)
<b>Probe Length (mm):</b>	337
<b>Probe Diameter (mm):</b>	10
<b>Tip Length (mm):</b>	10
<b>Tip Diameter (mm):</b>	4
<b>Sensor X Offset (mm):</b>	2
<b>Sensor Y Offset (mm):</b>	2
<b>Sensor Z Offset (mm):</b>	2

**SAR System Specifications (Continued):**

<b>E-Field Probe</b>	
<b>Model:</b>	EX3DV4
<b>Serial No:</b>	3994
<b>Construction:</b>	Triangular core
<b>Frequency:</b>	10 MHz to 6 GHz
<b>Linearity:</b>	$\pm 0.2$ dB (30 MHz to 6 GHz)
<b>Probe Length (mm):</b>	337
<b>Probe Diameter (mm):</b>	10
<b>Tip Length (mm):</b>	9
<b>Tip Diameter (mm):</b>	2.5
<b>Sensor X Offset (mm):</b>	1
<b>Sensor Y Offset (mm):</b>	1
<b>Sensor Z Offset (mm):</b>	1
<b>Phantom</b>	
<b>Phantom:</b>	ELI Phantom
<b>Shell Material:</b>	Fibreglass
<b>Thickness:</b>	$2.0 \pm 0.1$ mm

## **5. Measurement Uncertainty**

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently, the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor, such that a confidence level of approximately 95% is maintained. For the purposes of this document “approximately” is interpreted as meaning “effectively” or “for most practical purposes”.

Test Name	Confidence Level	Calculated Uncertainty
Uncertainty- Freq. < 3GHz Body Configuration 1g	95%	±19.88%
Uncertainty- Freq. > 3GHz Body Configuration 1g	95%	±17.26%

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty, the published guidance of the appropriate accreditation body is followed.

## 5.1. Uncertainty – Freq. &lt; 3GHz Body Configuration 1g

Type	Source of uncertainty	+ Value	- Value	Probability Distribution	Divisor	C <sub>i</sub> (1g)	Standard Uncertainty		v <sub>i</sub> or v <sub>eff</sub>
							+ u (%)	- u (%)	
B	Probe calibration	5.050	5.050	normal (k=1)	1.0000	1.0000	5.050	5.050	∞
B	Axial Isotropy	0.250	0.250	normal (k=1)	1.0000	1.0000	0.250	0.250	∞
B	Hemispherical Isotropy	1.300	1.300	normal (k=1)	1.0000	1.0000	1.300	1.300	∞
B	Spatial Resolution	0.500	0.500	Rectangular	1.7321	1.0000	0.289	0.289	∞
B	Boundary Effect	0.769	0.769	Rectangular	1.7321	1.0000	0.444	0.444	∞
B	Linearity	0.300	0.300	Rectangular	1.7321	1.0000	0.173	0.173	∞
B	Detection Limits	0.200	0.200	Rectangular	1.7321	1.0000	0.115	0.115	∞
B	Readout Electronics	0.160	0.160	normal (k=1)	1.0000	1.0000	0.160	0.160	∞
B	Response Time	0.000	0.000	Rectangular	1.7321	1.0000	0.000	0.000	∞
B	Integration Time	8.520	8.520	Rectangular	1.7321	1.0000	4.919	4.919	∞
B	RF Ambient conditions	3.000	3.000	Rectangular	1.7321	1.0000	1.732	1.732	∞
B	Probe Positioner Mechanical Restrictions	4.000	4.000	Rectangular	1.7321	1.0000	2.309	2.309	∞
B	Probe Positioning with regard to Phantom Shell	2.850	2.850	Rectangular	1.7321	1.0000	1.645	1.645	∞
B	Extrapolation and integration / Maximum SAR evaluation	5.080	5.080	Rectangular	1.7321	1.0000	2.933	2.933	∞
A	Test Sample Positioning	2.580	2.580	normal (k=1)	1.0000	1.0000	2.580	2.580	10
A	Device Holder uncertainty	0.154	0.154	normal (k=1)	1.0000	1.0000	0.154	0.154	10
B	Phantom Uncertainty	4.000	4.000	Rectangular	1.7321	1.0000	2.309	2.309	∞
B	Drift of output power	5.000	5.000	Rectangular	1.7321	1.0000	2.887	2.887	∞
B	Liquid Conductivity (target value)	5.000	5.000	Rectangular	1.7321	0.6400	1.848	1.848	∞
A	Liquid Conductivity (measured value)	2.470	2.470	normal (k=1)	1.0000	0.6400	1.581	1.581	5
B	Liquid Permittivity (target value)	5.000	5.000	Rectangular	1.7321	0.6000	1.732	1.732	∞
A	Liquid Permittivity (measured value)	2.430	2.430	normal (k=1)	1.0000	0.6000	1.458	1.458	5
	Combined standard uncertainty			t-distribution			10.14	10.14	>500
	Expanded uncertainty			k = 1.96			19.88	19.88	>500

## 5.2. Uncertainty – Freq. &gt; 3GHz Body Configuration 1g

Type	Source of uncertainty	+ Value	- Value	Probability Distribution	Divisor	C <sub>i</sub> (1g)	Standard Uncertainty		v <sub>i</sub> or v <sub>eff</sub>
							+ u (%)	- u (%)	
B	Probe calibration	5.050	5.050	normal (k=1)	1.0000	1.0000	5.050	5.050	∞
B	Axial Isotropy	0.250	0.250	normal (k=1)	1.0000	1.0000	0.250	0.250	∞
B	Hemispherical Isotropy	1.300	1.300	normal (k=1)	1.0000	1.0000	1.300	1.300	∞
B	Spatial Resolution	0.500	0.500	Rectangular	1.7321	1.0000	0.289	0.289	∞
B	Boundary Effect	0.769	0.769	Rectangular	1.7321	1.0000	0.444	0.444	∞
B	Linearity	0.300	0.300	Rectangular	1.7321	1.0000	0.173	0.173	∞
B	Detection Limits	0.200	0.200	Rectangular	1.7321	1.0000	0.115	0.115	∞
B	Readout Electronics	0.160	0.160	normal (k=1)	1.0000	1.0000	0.160	0.160	∞
B	Response Time	0.000	0.000	Rectangular	1.7321	1.0000	0.000	0.000	∞
B	Integration Time	0.000	0.000	Rectangular	1.7321	1.0000	0.000	0.000	∞
B	RF Ambient conditions	3.000	3.000	Rectangular	1.7321	1.0000	1.732	1.732	∞
B	Probe Positioner Mechanical Restrictions	4.000	4.000	Rectangular	1.7321	1.0000	2.309	2.309	∞
B	Probe Positioning with regard to Phantom Shell	2.850	2.850	Rectangular	1.7321	1.0000	1.645	1.645	∞
B	Extrapolation and integration / Maximum SAR evaluation	5.080	5.080	Rectangular	1.7321	1.0000	2.933	2.933	∞
A	Test Sample Positioning	1.960	1.960	normal (k=1)	1.0000	1.0000	1.960	1.960	10
A	Device Holder uncertainty	0.154	0.154	normal (k=1)	1.0000	1.0000	0.154	0.154	10
B	Phantom Uncertainty	4.000	4.000	Rectangular	1.7321	1.0000	2.309	2.309	∞
B	Drift of output power	5.000	5.000	Rectangular	1.7321	1.0000	2.887	2.887	∞
B	Liquid Conductivity (target value)	5.000	5.000	Rectangular	1.7321	0.6400	1.848	1.848	∞
A	Liquid Conductivity (measured value)	2.700	2.700	normal (k=1)	1.0000	0.6400	1.728	1.728	5
B	Liquid Permittivity (target value)	5.000	5.000	Rectangular	1.7321	0.6000	1.732	1.732	∞
A	Liquid Permittivity (measured value)	3.060	3.060	normal (k=1)	1.0000	0.6000	1.836	1.836	5
	Combined standard uncertainty			t-distribution			8.81	8.81	>500
	Expanded uncertainty			k = 1.96			17.26	17.26	>500

## 6. Equipment Under Test (EUT)

### 6.1. Identification of Equipment Under Test (EUT)

<b>Serial Number:</b>	<p><b>The following sample was used to perform radiated SAR measurements:</b> TQ36000058</p> <p><b>The following samples with serial numbers were used for the conducted power measurements:</b> None Stated</p>
<b>Hardware Version Number:</b>	1601057 v003 1601069 v011 1601070 v006 1601071 v003
<b>Software Version Number:</b>	955
<b>Country of Manufacture:</b>	Sweden
<b>Date of Receipt:</b>	06 January 2016

<b>DUT Description:</b>	Digital Camera
<b>Operating Configurations</b>	Body-worn
<b>Device dimension</b>	Overall (Length x Width x Depth): 140 x 130 x 200 mm
<b>Battery Options</b>	<input type="checkbox"/> Standard – Lithium-ion battery <input checked="" type="checkbox"/> Extended (large capacity) - Removable Battery: 8.4 VDC (charging DC power input)

## 6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode	Duty Cycle
Wi-Fi	2.4 GHz	802.11b 802.11g 802.11n (HT20) 802.11n (HT40)	~100%
W-Fi	5.0 GHz	802.11a 802.11n (HT20) 802.11n (HT40) 802.11ac (VHT20) 802.11ac (VHT40) 802.11ac (VHT80)	~100%

Transmitter Frequency Allocation of EUT When Under Test:		Band: 2.4 / 5.0 GHz Wi-Fi 802.11a/n/ac (HT20 / HT40/HT80)						
		Rule	20 MHz BW Ch.#	Frq. (MHz)	40 MHz BW Ch.#	Frq. (MHz)	80 MHz BW Ch.#	Frq. (MHz)
15.247	1	2412.0						
	6	2436.0						
	11	2462.0						
5.2 U-NII-1	36	5180.0	38	5190.0				
	40	5200.0			42	5210.0		
	44	5220.0	46	5230.0				
	48	5240.0						
5.3 U-NII-2A	52	5260.0	54	5270.0				
	56	5280.0			58	5290.0		
	60	5300.0	62	5310.0				
	64	5320.0						
5.6 U-NII-2C	100	5500.0	102	5510.0				
	104	5520.0			106	5530.0		
	108	5540.0	110	5550.0				
	112	5560.0						
	116	5580.0	118	5590.0				
	120	5600.0			122	5610.0		
	124	5620.0	126	5630.0				
	128	5640.0						
	132	5660.0	134	5670.0				
	136	5680.0						
5.8 UNII-3	140	5700.0						
	149	5745.0	151	5755.0				
	153	5765.0			155	5775.0		
	157	5785.0	159	5795.0				
	161	5805.0						
	165	5825.0						
Antenna Type:		Internal integral						
Antenna Length:		Unknown						
Number of Antenna Positions:		Antenna 0 (Main)						1 fixed
		Antenna 1 (Aux)						1 fixed

### 6.3.Nominal and Maximum Output power: Wi-Fi

RF Air interface	Mode	Channel Nos.	Target + Max. Tolerances (dBm)		
			SISO Ant 0	SISO Ant 1	MIMO Ant 0 + Ant 1
Wi-Fi 2.4 GHz	802.11b	ALL	18.0	18.0	N/A
	802.11g	ALL	16.0	16.0	16.0
	802.11n HT20	ALL	15.0	15.0	15.0
	802.11n HT40	ALL	13.0	13.0	13.0

RF Air interface	Mode	Channel Nos.	Target + Max. Tolerances (dBm)		
			SISO Ant 0	SISO Ant 1	MIMO Ant 0 + Ant 1
Wi-Fi 5.2 / 5.3 / 5.5 / 5.8 GHz	802.11a	ALL	15.0	15.0	N/A
	802.11n HT20	ALL	14.0	14.0	14.0
	802.11n HT40	ALL	12.0	12.0	12.0
	802.11ac VHT80	ALL	10.0	10.0	10.0

### 6.4.Conducted Power Measurements Consideration

RF Air interface	Mode	Channel Nos.	Target + Max. Tolerances (dBm)		
			SISO Ant 0	SISO Ant 1	MIMO Ant 0 + Ant 1
Wi-Fi 2.4 GHz	802.11b	ALL	Yes	Yes	N/A
	802.11g	ALL	No	No	No
	802.11n HT20	ALL	No	No	No
	802.11n HT40	ALL	No	No	No

RF Air interface	Mode	Channel Nos.	Target + Max. Tolerances (dBm)		
			SISO Ant 0	SISO Ant 1	MIMO Ant 0 + Ant 1
Wi-Fi 5.2 / 5.3 / 5.5 / 5.8 GHz	802.11a	ALL	Yes	Yes	N/A
	802.11n HT20	ALL	No	No	No
	802.11n HT40	ALL	No	No	No
	802.11ac VHT80	ALL	No	No	No

## 7. RF Exposure Conditions (Test Configurations)

### 7.1. Configuration Consideration

Technology Antenna	Operating Mode	Configuration	Position	Antenna to Edge Separation	Evaluation Considered
Antenna 0 (WLAN ~ Main)	SISO	Body	Back Screen	>25	No
			Edge 1	>25	No
			Edge 2	>25	No
			Edge 3	>25	No
			Bottom	>25	No
Antenna 1 (WLAN ~ Aux)	SISO	Body	Back Screen	>25	No
			Edge 1	>25	No
			Edge 2	>25	No
			Edge 3	>25	Yes <sup>1</sup>
			Bottom	>25	No
Antenna 0 + Antenna 1	MIMO	Body	Back Screen	>25	No
			Edge 1	>25	No
			Edge 2	>25	No
			Edge 3	>25	No
			Bottom	>25	No

**Note:**

1. Prior to the SAR testing, the FCC was contacted and confirmation was obtained to test the edge with the antenna to edge distance closest to 25mm. Based on this confirmation, Edge 3 was selected for SAR Evaluation.
2. Since the Antenna to edge separation of both antennas is >25mm and the Maximum power including tolerances for MIMO mode was lower than SISO mode, SAR evaluation was not considered for operation in MIMO mode.

### 7.2. SAR Test Exclusion Consideration

Frequency Band	Configuration(s)
	Body
WLAN 2.4GHz	No
WLAN 5.2GHz	No
WLAN 5.3GHz	No
WLAN 5.6GHz	No
WLAN 5.8GHz	No

**Note:**

1. As per KDB 447498 D01 General RF Exposure Guidance v06, The Frequency Bands with Rated Power including Upper tolerance, which qualify for **Standalone SAR Test Exclusion**, are as per the above table.
2. The details for the Maximum Rated Power and tolerance(s) can be found in section 6.

## **8. Conducted output power measurements**

### **8.1. RF Output Average Power Measurement: Wi-Fi**

#### **8.1.1. Wi-Fi 802.11b/g/n (2.4 GHz) - SISO**

		Avg Power (dBm)		Operating Mode
		Antenna 0 (Main)	Antenna 1 (Aux)	
Channel Number	Frequency (MHz)	(6Mbps)	(6Mbps)	
1	2412	16.7	16.8	802.11b
6	2437	16.7	16.9	
11	2462	17.0	17.0	
12	2467	Not Supported	Not Supported	
13	2472	Not Supported	Not Supported	

## 8.1.2. Wi-Fi 802.11a/n/ac (5.0 GHz) – SISO

		Avg Power (dBm)		
		Antenna 0 (Main)	Antenna 1 (Aux)	
Channel Number	Frequency (MHz)	6 Mbps	6 Mbps	Operating Mode
36	5180	15.0	14.9	802.11a
40	5200	14.8	14.8	
44	5220	15.0	14.5	
48	5240	14.8	14.9	
Channel Number	Frequency (MHz)	6 Mbps	6 Mbps	
52	5260	14.8	15.0	
56	5280	15.0	15.0	
60	5300	15.0	14.8	
64	5320	14.8	14.7	
Channel Number	Frequency (MHz)	6 Mbps	6 Mbps	
100	5500	14.8	15.0	
104	5520	14.8	14.7	
108	5540	14.8	14.9	
112	5560	14.9	15.0	
116	5580	15.0	15.0	
132	5660	14.7	14.7	
136	5680	14.7	14.9	
140	5700	14.7	14.8	
Channel Number	Frequency (MHz)	6 Mbps	6 Mbps	
149	5745	14.8	14.9	
153	5765	14.8	14.8	
157	5785	14.8	14.8	
161	5805	14.8	14.9	
165	5825	14.9	14.7	

## **9. Dielectric Property Measurements & System Check**

### **9.1.Tissue Dielectric Parameters**

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within  $\pm 2^\circ\text{C}$  of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

#### **IEEE 1528: 2013**

Target Frequency (MHz)	Body (FCC only)	
	$\epsilon_r$	$\epsilon_r$
150	61.9	61.9
300	58.2	58.2
450	56.7	56.7
750	-	-
835	55.2	55.2
900	55.0	55.0
915	55.0	55.0
1450	54.0	54.0
1500	-	-
1610	53.8	53.8
1640	-	-
1750	-	-
1800	53.3	53.3
1900	53.3	53.3
2000	53.3	53.3
2100	-	-
2300	-	-
2450	52.7	52.7
2600	-	-
3000	52.0	52.0
3500	-	-
4000	-	-
4500	-	-
5000	49.3	49.3
5100	49.1	49.1
5200	49.0	49.0
5300	48.9	48.9
5400	48.7	48.7
5500	48.6	48.6
5600	48.5	48.5
5700	48.3	48.3
5800	48.2	48.2
6000	-	-

**NOTE:** For convenience, permittivity and conductivity values at some frequencies that are not part of the original data from Drossos et al. [B60] or the extension to 5800 MHz are provided (i.e., the values shown in italics). These values were linearly interpolated between the values in this table that are immediately above and below these values, except the values at 6000 MHz that were linearly extrapolated from the values at 3000 MHz and 5800 MHz.

## **9.2. System Check**

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

## **9.3. Reference Target SAR Values**

The reference SAR values are obtained from the calibration certificate of system validation dipoles. The measured values are normalised to 1 Watt.

System Dipole	Serial No.	Cal. Date	Freq. (MHz)	Target SAR Values (mW/g)	
				1g/10g	Body
D2450V2	725	10/10/2015	2450	1g	51.90
				10g	24.50
D5GHzV2	1016	10/02/2016	5250	1g	77.90
				10g	21.70
D5GHzV2	1016	10/02/2016	5600	1g	80.70
				10g	22.40
D5GHzV2	1016	10/02/2016	5750	1g	77.30
				10g	21.40

## **9.4. Dielectric Property Measurements & System Check Results**

The 1-g SAR and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target. The internal limit is set to 5%.

### **SAR Lab 59**

#### **System Check 2450 Body**

**Date: 27/04/2016**

**Validation Dipole and Serial Number: D2440V2 SN: 725**

Simulant	Frequency (MHz)	Room Temp	Liquid Temp	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)
Head	2450	24.0	23.0	$\epsilon_r$	52.70	53.18	0.91	5.00
				$\sigma$	1.95	1.95	0.09	5.00
				1g SAR	51.90	53.20	2.50	5.00
				10g SAR	24.50	24.12	-1.55	5.00

### **SAR Lab 61**

#### **System Check 5.25/5.60/5.85 GHz Body**

**Date: 25/03/2016**

**Validation Dipole and Serial Number: D1016V2 SN: 1016**

Simulant	Frequency (MHz)	Room Temp	Liquid Temp	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)
Head	5250	24.0	24.0	$\epsilon_r$	48.90	47.65	-2.56	5.00
				$\sigma$	5.36	5.46	1.81	5.00
				1g SAR	77.90	80.30	3.08	5.00
				10g SAR	21.70	22.40	3.23	5.00
Head	5600	24.0	24.0	$\epsilon_r$	48.50	46.84	-3.42	5.00
				$\sigma$	6.00	5.77	4.06	5.00
				1g SAR	80.70	76.80	-4.83	5.00
				10g SAR	22.40	21.40	-4.46	5.00
Head	5750	24.0	24.0	$\epsilon_r$	48.30	46.67	-3.37	5.00
				$\sigma$	5.94	6.19	4.22	5.00
				1g SAR	77.30	74.40	-3.75	5.00
				10g SAR	21.40	20.90	-2.34	5.00

## 10. Measurements, Examinations and Derived Result

### 10.0.1. Wi-Fi 2.4 GHz – Body Testing

Max Reported SAR 10g: N/A

					Ant 0				Ant 1				
Mode or Modulation	Dist	EUT Position	Channel No.	Freq (MHz)	Power (dBm)		1g: SAR Results (W/kg)		Power (dBm)		1g: SAR Results (W/kg)		
	(mm)				Tune up limit	Meas.	Meas. Level (W/kg)	Reported SAR (W/kg)	Tune up limit	Meas.	Meas. Level (W/kg)	Reported SAR (W/kg)	Scan No.
DBPSK (802.11b 1Mbps)	0	Edge 3	1	2412.0	N/A				18.00	16.80	-	-	1
	0	Edge 3	6	2437.0					18.00	16.90	-	-	2
	0	Edge 3	11	2462.0					18.00	17.00	-	-	3

For scans 1-3, no peak was detected in order to perform zoom scan

### 10.0.2. Wi-Fi 5.0 GHz – Body Testing

Max Reported SAR 10g: 0.024 W/kg

					Ant 0				Ant 1				
Mode or Modulation	Dist	EUT Position	Channel No.	Freq (MHz)	Power (dBm)		1g: SAR Results (W/kg)		Power (dBm)		1g: SAR Results (W/kg)		
	(mm)				Tune up limit	Meas.	Meas. Level (W/kg)	Reported SAR (W/kg)	Tune up limit	Meas.	Meas. Level (W/kg)	Reported SAR (W/kg)	Scan No.
	0	Edge 3	56	5280.0	N/A				15.00	15.00	0.024	0.024	4
	0	Edge 3	100	5500.0					15.00	15.00	0.004	0.004	5
	0	Edge 3	149	5745.0					15.00	14.90	0.023	0.024	6
	0	Edge 3	52	5260.0					15.00	15.00	0.020	0.020	7
	0	Edge 3	64	5320.0					15.00	14.70	0.001	0.001	8